



FCC RF Test Report

APPLICANT : Inseego Corp.
EQUIPMENT : wireless device
BRAND NAME : Inseego
MODEL NAME : FX20003
FCC ID : PKRISGFX20003
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Aug. 28, 2020 and testing was completed on Oct. 21, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This product installed a RF module (Brand Name: Inseego, Model Name: MD2000, FCC ID: PKRISGMD2000) during the test.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Reviewed by: Jason Jia / Supervisor

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 6

 1.6 Testing Location 6

 1.7 Test Software 7

 1.8 Applicable Standards..... 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Test Mode 9

 2.3 Connection Diagram of Test System 10

 2.4 Support Unit used in test configuration and system 10

 2.5 EUT Operation Test Setup 10

3 TEST RESULT 11

 3.1 Unwanted Emissions Measurement 11

 3.2 AC Conducted Emission Measurement..... 15

 3.3 Automatically Discontinue Transmission 17

 3.4 Antenna Requirements 18

4 LIST OF MEASURING EQUIPMENT 19

5 UNCERTAINTY OF EVALUATION 20

APPENDIX A. AC CONDUCTED EMISSION TEST RESULT

APPENDIX B. RADIATED SPURIOUS EMISSION

APPENDIX C. DUTY CYCLE PLOTS

APPENDIX D. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
-	15.403(i)	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	1
-	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm	Pass	1
-	15.407(a)	Power Spectral Density	≤ 30 dBm/500kHz	Pass	1
3.1	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 10.24 dB at 5977.200 MHz
3.2	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 22.25 dB at 0.150 MHz
3.3	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.4	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-

Remark:

- All conducted test items were leveraged from module RF report which can refer to module report "FR090125C".

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Inseego Corp.
9710 Scranton Road, Suite 200 San Diego, CA 92121

1.2 Manufacturer

MeiG Smart Technology Co., Ltd
Floor 2, Office Building No.5, Lingxia Road, Fenghuang Community, Fuyong Street, Bao 'an District, Shenzhen

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	wireless device
Brand Name	Inseego
Model Name	FX20003
FCC ID	PKRISGFX20003
EUT supports Radios application	WCDMA/LTE/5G NR/GNSS WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ac VHT20/VHT40 WLAN 2.4GHz 802.11ax HE20/HE40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 WLAN 5GHz 802.11ax HE20/HE40/HE80
IMEI Code	Conduction: 990016670003480 Radiation: 990016670003779
HW Version	Rev1
SW Version	1
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This product installed a RF module (Brand Name: Inseego, Model Name: MD2000) during the test, The maximum power of host is lower than and very close to the module, therefore, the conducted test results are referred to module RF report FR090125C and RSE/conduction are tested in this report.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification										
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz									
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac/ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)									
Antenna Type / Gain	<Ant. 1> : IFA Antenna with gain 4.11 dBi <Ant. 2> : Monopole Antenna with gain 2.56 dBi									
Antenna Function Description	<table border="1"> <thead> <tr> <th></th> <th>Ant. 1</th> <th>Ant. 2</th> </tr> </thead> <tbody> <tr> <td>802.11a/n/ac/ax SISO</td> <td>V</td> <td>V</td> </tr> <tr> <td>802.11a/n/ac/ax MIMO</td> <td colspan="2">V</td> </tr> </tbody> </table>		Ant. 1	Ant. 2	802.11a/n/ac/ax SISO	V	V	802.11a/n/ac/ax MIMO	V	
	Ant. 1	Ant. 2								
802.11a/n/ac/ax SISO	V	V								
802.11a/n/ac/ax MIMO	V									

Note: For RSE testing, 802.11n HT20 / ac VHT20 / ax HE20 and 802.11n HT40 / ac VHT40 / ax HE40 mode and 802.11ac VHT80 / ax HE80, the whole testing have assessed only 802.11ax HE20/ HE40/ HE80 by referring to their maximum conducted power and Partial RU were verified for Radiated Band edge which is lower conducted power than full RU mode.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS	CN1257	314309



1.7 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5745-5825 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40.
2. The above Frequency and Channel in "#n" were 802.11ac VHT80 and 802.11ax HE80.



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

AC Conducted Emission	Mode 1 : WLAN(5G)Link + Adapter + LAN Link
Remark: For Radiated Test Cases, The tests were performed with Adapter.	

Ch. #		Band IV : 5745-5825 MHz			
		802.11a	802.11ax HE20	802.11ax HE40	802.11ax HE80
L	Low	149	149	151	-
M	Middle	157	157	-	155
H	High	165	165	159	-

2.3 Connection Diagram of Test System

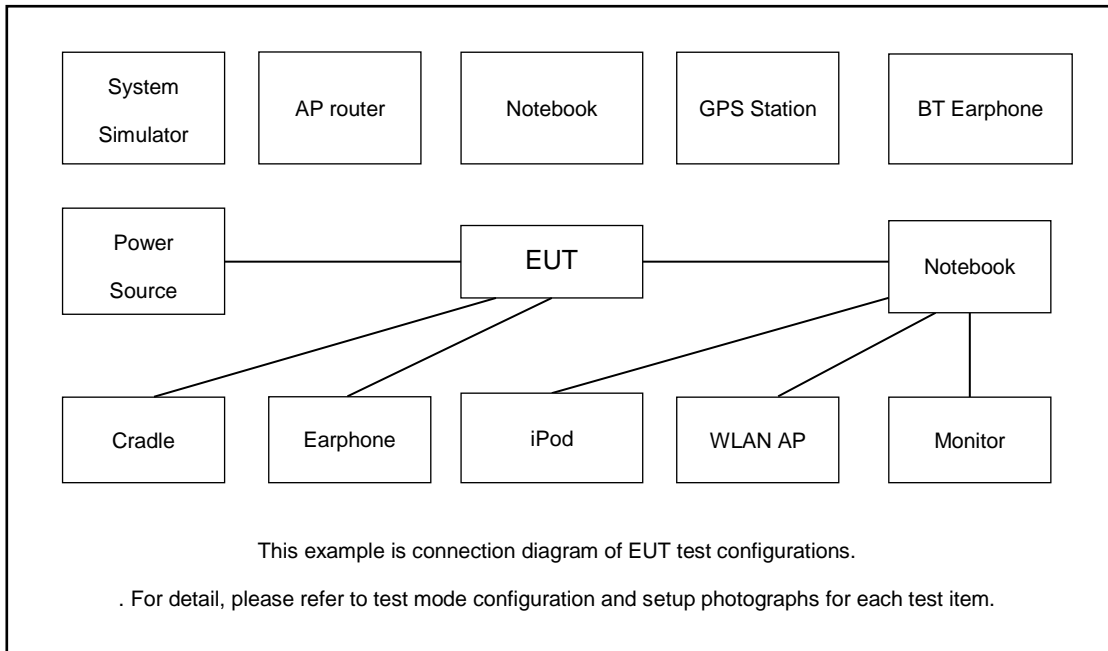

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
2.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
3.	Hard DISK	WD	C6B	N/A	N/A	N/A
4.	Earphone	Lenovo	P121	N/A	Unshielded,1.2m	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the notebook under large package sizes transmission.



3 Test Result

3.1 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.1.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m

d_{Meas} is the measurement distance, in m



3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in


average mode again and reported.

3.1.4 Test Setup


For radiated emissions below 30MHz

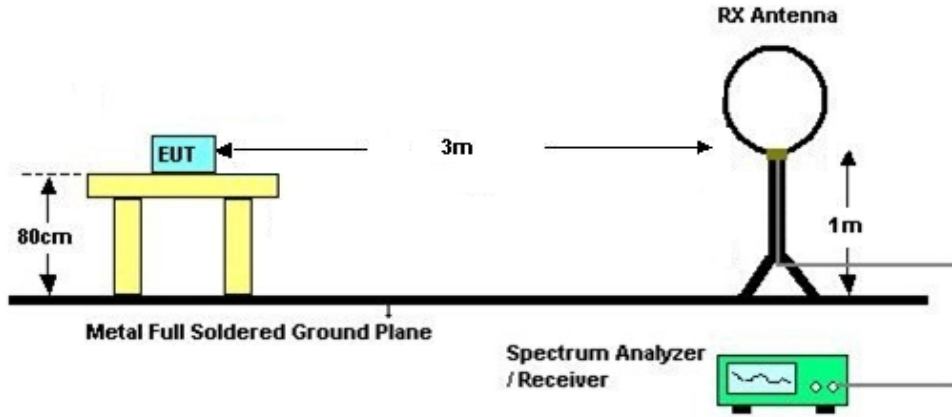

For radiated emissions from 30MHz to 1GHz

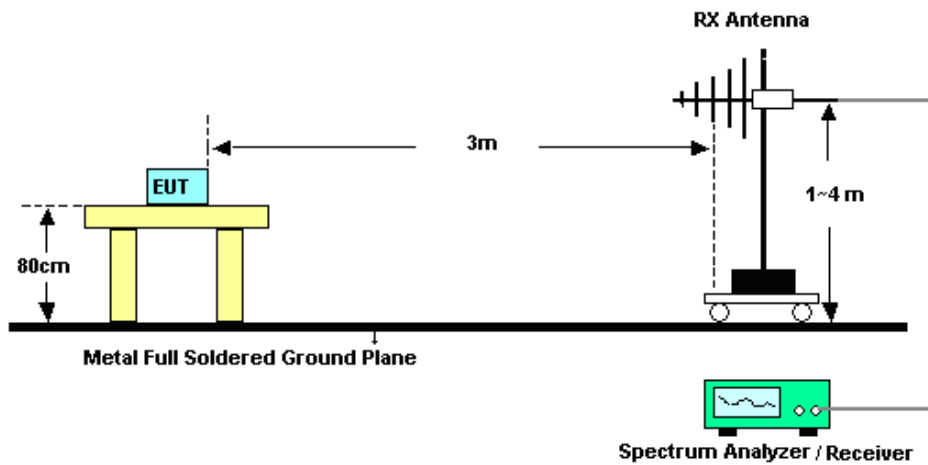

For radiated emissions above 1GHz

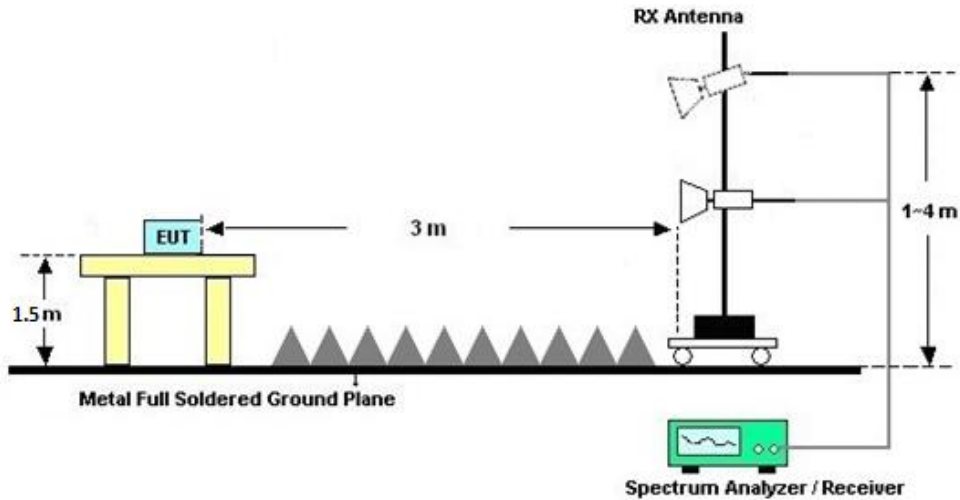

3.1.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.1.6 Test Result of Radiated Band Edges

Please refer to Appendix B.

3.1.7 Duty Cycle

Please refer to Appendix C.

3.1.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix B.



3.2 AC Conducted Emission Measurement

3.2.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.2.4 Test Setup

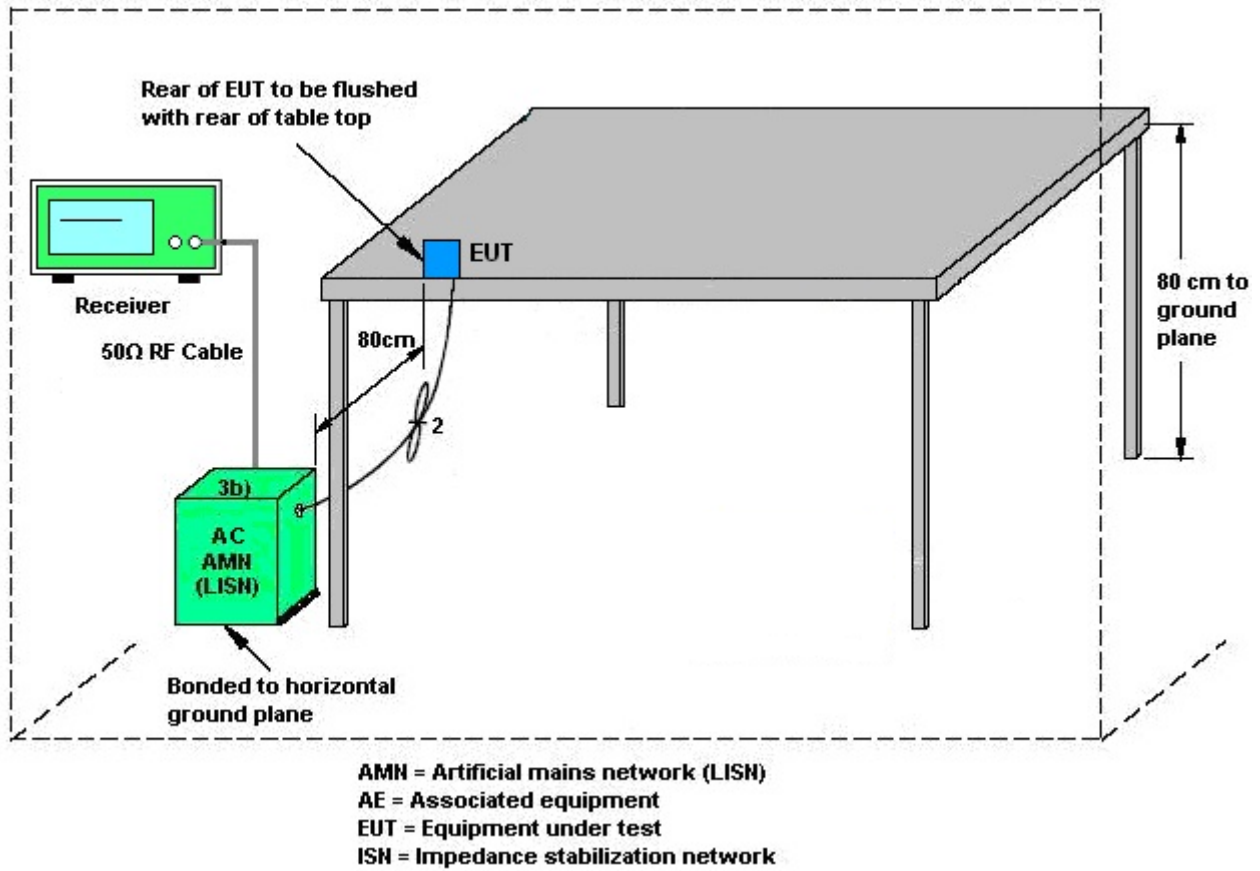

3.2.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



3.3 Automatically Discontinue Transmission

3.3.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.4 Antenna Requirements

3.4.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.4.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.4.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant. 1 (dBi)	Ant. 2 (dBi)				
Band IV	4.11	2.56	4.11	6.38	0.00	0.38



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 17, 2020	Oct. 21, 2020	Oct. 16, 2021	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz-44GHz	Apr. 14, 2020	Oct. 21, 2020	Apr. 13, 2021	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Jun. 05, 2020	Oct. 21, 2020	Jun. 04, 2021	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz-1GHz	May 29, 2020	Oct. 21, 2020	May 28, 2021	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 27, 2020	Oct. 21, 2020	Apr. 26, 2021	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Jun. 05, 2020	Oct. 21, 2020	Jun. 04, 2021	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Apr. 14, 2020	Oct. 21, 2020	Apr. 13, 2021	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Oct. 21, 2020	Jan. 07, 2021	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2025788	1Ghz-18Ghz	Jan. 03, 2020	Oct. 21, 2020	Jan. 02, 2021	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5GHz	Apr. 15, 2020	Oct. 21, 2020	Apr. 14, 2021	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 21, 2020	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 21, 2020	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 21, 2020	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 14, 2020	Oct. 16, 2020	Apr. 13, 2021	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 18, 2019	Oct. 16, 2020	Oct. 17, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 28, 2019	Oct. 16, 2020	Oct. 27, 2020	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 18, 2019	Oct. 16, 2020	Oct. 17, 2020	Conduction (CO01-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.9dB
---------------------------------------------------------------------	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---------------------------------------------------------------------	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---------------------------------------------------------------------	-------


Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---------------------------------------------------------------------	-------



Appendix A. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

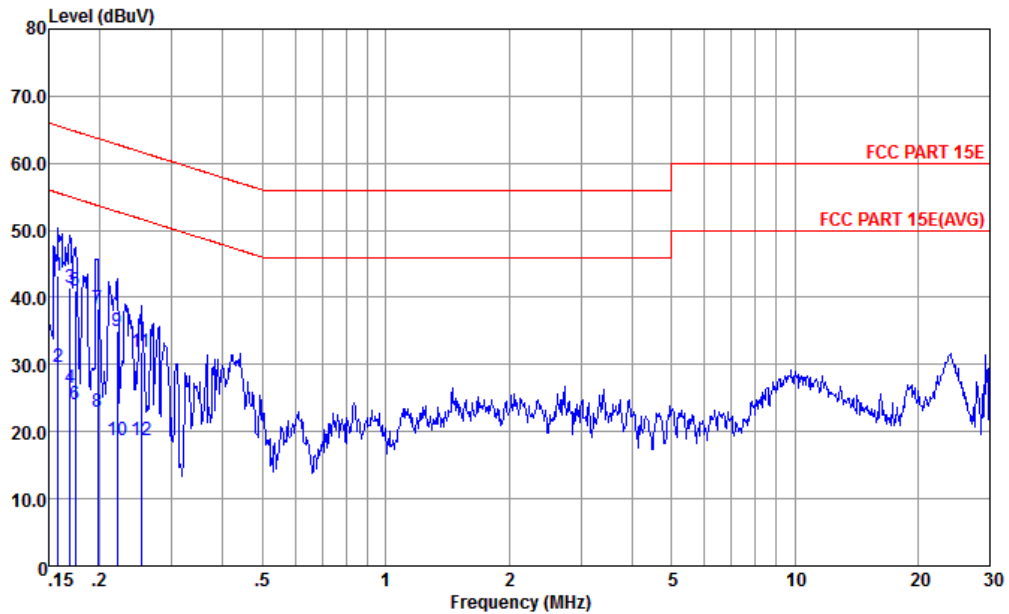


Site : CO01-KS
 Condition : FCC PART 15E LISN-L-191028-CN02 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.158	43.13	-22.43	65.56	32.60	0.07	10.46	QP
2	0.158	29.73	-25.83	55.56	19.20	0.07	10.46	Average
3	0.169	41.41	-23.58	64.99	30.90	0.08	10.43	QP
4	0.169	26.41	-28.58	54.99	15.90	0.08	10.43	Average
5	0.174	41.00	-23.77	64.77	30.50	0.08	10.42	QP
6	0.174	24.10	-30.67	54.77	13.60	0.08	10.42	Average
7	0.198	38.25	-25.46	63.71	27.79	0.09	10.37	QP
8	0.198	23.05	-30.66	53.71	12.59	0.09	10.37	Average
9	0.221	35.04	-27.75	62.79	24.60	0.09	10.35	QP
10	0.221	18.64	-34.15	52.79	8.20	0.09	10.35	Average
11	0.252	31.93	-29.76	61.69	21.50	0.10	10.33	QP
12	0.252	18.63	-33.06	51.69	8.20	0.10	10.33	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

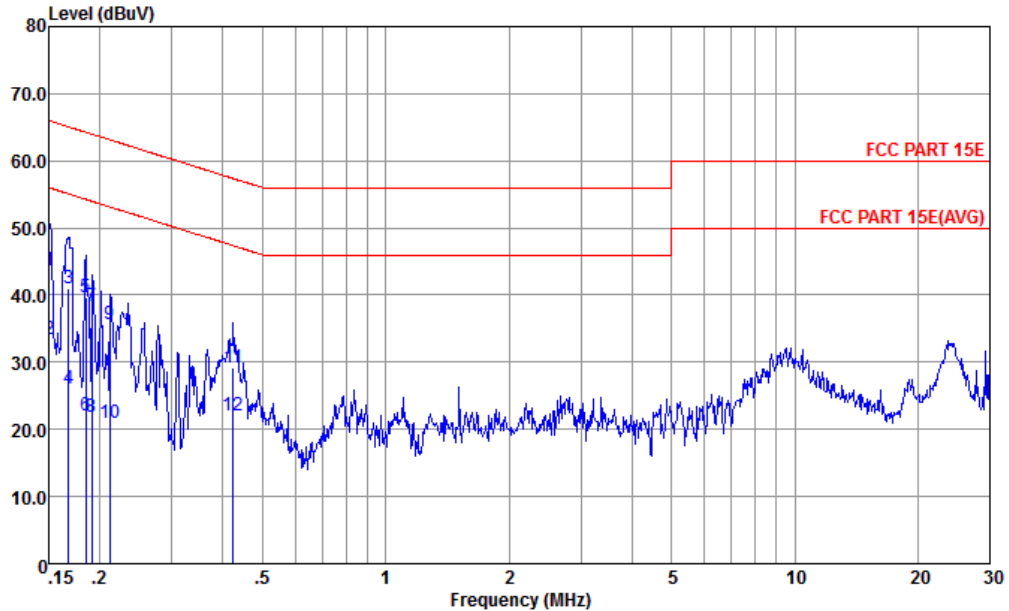

Site : CO01-KS
 Condition : FCC PART 15E LISN-N-191028-CN02 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.150	43.75	-22.25	66.00	33.12	0.15	10.48	QP
2	0.150	33.45	-22.55	56.00	22.82	0.15	10.48	Average
3	0.168	41.11	-23.97	65.08	30.52	0.16	10.43	QP
4	0.168	26.11	-28.97	55.08	15.52	0.16	10.43	Average
5	0.184	39.68	-24.60	64.28	29.12	0.16	10.40	QP
6	0.184	21.98	-32.30	54.28	11.42	0.16	10.40	Average
7	0.191	38.27	-26.71	63.98	27.73	0.16	10.38	QP
8	0.191	21.77	-32.21	53.98	11.23	0.16	10.38	Average
9	0.212	35.65	-27.49	63.14	25.12	0.17	10.36	QP
10	0.212	20.95	-32.19	53.14	10.42	0.17	10.36	Average
11	0.424	29.18	-28.19	57.37	18.70	0.22	10.26	QP
12	0.424	21.98	-25.39	47.37	11.50	0.22	10.26	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix B. Radiated Spurious Emission

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		5610.4	55.59	-12.71	68.3	41.59	35.77	11.57	33.34	100	284	P	H
		5667.6	54.89	-26.47	81.36	40.8	35.82	11.63	33.36	100	284	P	H
		5719.6	57.05	-53.74	110.79	42.91	35.84	11.68	33.38	100	284	P	H
		5724.8	59.07	-62.77	121.84	44.93	35.84	11.68	33.38	100	284	P	H
		5740	107.65	-	-	93.49	35.85	11.69	33.38	100	284	P	H
		5740	100.98	-	-	86.82	35.85	11.69	33.38	100	284	A	H
		5636	54.72	-13.58	68.3	40.67	35.8	11.6	33.35	309	170	P	V
		5699.2	54.64	-50.07	104.71	40.54	35.82	11.65	33.37	309	170	P	V
		5719.6	56.57	-54.22	110.79	42.43	35.84	11.68	33.38	309	170	P	V
		5723.6	63.49	-55.62	119.11	49.35	35.84	11.68	33.38	309	170	P	V
		5746	109.15	-	-	95	35.85	11.69	33.39	309	170	P	V
		5746	102.95	-	-	88.8	35.85	11.69	33.39	309	170	A	V



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 157 5785MHz		5630	55.57	-12.73	68.3	41.55	35.78	11.59	33.35	100	107	P	H
		5670.4	55.48	-27.96	83.44	41.39	35.82	11.63	33.36	100	107	P	H
		5702.8	54.54	-51.55	106.09	40.42	35.83	11.66	33.37	100	107	P	H
		5723.2	53.73	-64.47	118.2	39.59	35.84	11.68	33.38	100	107	P	H
		5850.4	54.61	-66.78	121.39	40.33	35.89	11.81	33.42	100	107	P	H
		5860.8	54.4	-54.87	109.27	40.08	35.9	11.84	33.42	100	107	P	H
		5920.4	55.72	-15.97	71.69	41.3	35.96	11.91	33.45	100	107	P	H
		5952.8	56.06	-12.24	68.3	41.55	36	11.97	33.46	100	107	P	H
		5788	109.2	-	-	94.99	35.87	11.74	33.4	100	107	P	H
		5788	101.56	-	-	87.35	35.87	11.74	33.4	100	107	A	H
		5600.4	55.2	-13.1	68.3	41.2	35.77	11.57	33.34	323	166	P	V
		5679.6	54.64	-35.6	90.24	40.56	35.82	11.63	33.37	323	166	P	V
		5709.2	55.22	-52.66	107.88	41.11	35.83	11.66	33.38	323	166	P	V
		5721.6	53.85	-60.7	114.55	39.71	35.84	11.68	33.38	323	166	P	V
		5853.6	54.56	-59.53	114.09	40.24	35.9	11.84	33.42	323	166	P	V
		5872	54.52	-51.62	106.14	40.17	35.92	11.86	33.43	323	166	P	V
		5913.2	55.07	-21.93	77	40.64	35.96	11.91	33.44	323	166	P	V
		5983.6	55.73	-12.57	68.3	41.13	36.04	12.02	33.46	323	166	P	V
		5788	110.68	-	-	96.47	35.87	11.74	33.4	323	166	P	V
	5788	103.53	-	-	89.32	35.87	11.74	33.4	323	166	A	V	



WiFi Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 165 5825MHz		5850.8	57.06	-63.42	120.48	42.78	35.89	11.81	33.42	104	109	P	H
		5855.6	56.16	-54.57	110.73	41.84	35.9	11.84	33.42	104	109	P	H
		5903.6	55.17	-28.93	84.1	40.78	35.94	11.89	33.44	104	109	P	H
		5943.2	56.19	-12.11	68.3	41.67	36	11.97	33.45	104	109	P	H
		5824	110.13	-	-	95.87	35.88	11.79	33.41	104	109	P	H
		5824	102.93	-	-	88.67	35.88	11.79	33.41	104	109	A	H
		5850	58.8	-63.5	122.3	44.52	35.89	11.81	33.42	330	167	P	V
		5856.4	57.15	-53.36	110.51	42.83	35.9	11.84	33.42	330	167	P	V
		5898	55.02	-33.22	88.24	40.63	35.94	11.89	33.44	330	167	P	V
		5984.4	56.03	-12.27	68.3	41.43	36.04	12.02	33.46	330	167	P	V
		5830	109.73	-	-	95.48	35.88	11.79	33.42	330	167	P	V
		5830	102.67	-	-	88.42	35.88	11.79	33.42	330	167	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		11490	47.64	-26.36	74	52.52	40.19	16.87	61.94	100	360	P	H
		11490	46.9	-27.1	74	51.78	40.19	16.87	61.94	100	360	P	V
802.11a CH 157 5785MHz		11570	46.2	-27.8	74	50.95	40.27	16.94	61.96	100	360	P	H
		11570	48.12	-25.88	74	52.87	40.27	16.94	61.96	100	360	P	V
802.11a CH 165 5825MHz		11650	47.48	-26.52	74	52.11	40.34	17.01	61.98	300	0	P	H
		11650	47.3	-26.7	74	51.93	40.34	17.01	61.98	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ax HE20_Full (Band Edge @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11ax HE20 Full and CH 149 5745MHz.



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 165 5825MHz		5851.6	58.98	-59.67	118.65	43.11	34.88	11.86	30.87	100	351	P	H
		5869.2	55.73	-51.19	106.92	39.83	34.9	11.88	30.88	100	351	P	H
		5881.2	56.54	-44.15	100.69	40.63	34.91	11.89	30.89	100	351	P	H
		5941.2	57.14	-11.16	68.3	41.15	34.94	11.96	30.91	100	351	P	H
		5818	108.85	-	-	93.03	34.85	11.83	30.86	100	351	P	H
		5818	99.28	-	-	83.46	34.85	11.83	30.86	100	351	A	H
		5852.4	56.6	-60.23	116.83	40.73	34.88	11.86	30.87	119	299	P	V
		5856.8	57.23	-53.17	110.4	41.33	34.9	11.88	30.88	119	299	P	V
		5888.4	55.51	-39.84	95.35	39.57	34.92	11.91	30.89	119	299	P	V
		5946	56.58	-11.72	68.3	40.59	34.94	11.96	30.91	119	299	P	V
	5824	107.49	-	-	91.64	34.87	11.84	30.86	119	299	P	V	
	5824	99.21	-	-	83.36	34.87	11.84	30.86	119	299	A	V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



Band 4 5725~5850MHz
WIFI 802.11ax HE20_Partial 106 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 106/53 CH 149 5745MHz		5642.8	56.33	-11.97	68.3	40.74	34.7	11.66	30.77	305	341	P	H
		5694.8	56.38	-45.09	101.47	40.72	34.75	11.71	30.8	305	341	P	H
		5717.6	64.71	-45.52	110.23	48.99	34.78	11.75	30.81	305	341	P	H
		5724.8	57.29	-64.55	121.84	41.58	34.78	11.75	30.82	305	341	P	H
		5740	109.78	-	-	94.05	34.79	11.76	30.82	305	341	P	H
		5740	100.69	-	-	84.96	34.79	11.76	30.82	305	341	A	H
		5613.6	56.25	-12.05	68.3	40.73	34.66	11.63	30.77	245	172	P	V
		5652	56.28	-13.51	69.79	40.66	34.72	11.68	30.78	245	172	P	V
		5702.4	55.43	-50.54	105.97	39.74	34.76	11.73	30.8	245	172	P	V
		5724.8	57.38	-64.46	121.84	41.67	34.78	11.75	30.82	245	172	P	V
		5740	108.78	-	-	93.05	34.79	11.76	30.82	245	172	P	V
		5740	101.77	-	-	86.04	34.79	11.76	30.82	245	172	A	V
802.11ax HE20 Partial 106/54 CH 165 5825MHz		5850	56.05	-66.25	122.3	39.71	35.35	11.86	30.87	295	334	P	H
		5863.6	58.08	-50.41	108.49	41.71	35.37	11.88	30.88	295	334	P	H
		5892	56.14	-36.54	92.68	39.72	35.4	11.91	30.89	295	334	P	H
		5976.4	56.9	-11.4	68.3	40.35	35.48	11.99	30.92	295	334	P	H
		5830	109.31	-	-	93	35.33	11.84	30.86	295	334	P	H
		5830	101.41	-	-	85.1	35.33	11.84	30.86	295	334	A	H
		5850.4	56.64	-64.75	121.39	40.3	35.35	11.86	30.87	253	173	P	V
		5874	56.36	-49.22	105.58	39.98	35.38	11.89	30.89	253	173	P	V
		5890.4	56.97	-36.9	93.87	40.55	35.4	11.91	30.89	253	173	P	V
		5941.2	57.57	-10.73	68.3	41.07	35.45	11.96	30.91	253	173	P	V
	5830	110.83	-	-	94.52	35.33	11.84	30.86	253	173	P	V	
	5830	102.93	-	-	86.62	35.33	11.84	30.86	253	173	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11ax HE40_Full (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 151 5755MHz		5613.6	56.03	-12.27	68.3	40.51	34.66	11.63	30.77	100	350	P	H
		5654	56.34	-14.93	71.27	40.72	34.72	11.68	30.78	100	350	P	H
		5719.6	66.61	-44.18	110.79	50.89	34.78	11.75	30.81	100	350	P	H
		5721.6	66.73	-47.82	114.55	51.02	34.78	11.75	30.82	100	350	P	H
		5853.2	55.28	-59.72	115	39.41	34.88	11.86	30.87	100	350	P	H
		5865.6	55.19	-52.74	107.93	39.29	34.9	11.88	30.88	100	350	P	H
		5902	55.77	-29.51	85.28	39.83	34.92	11.91	30.89	100	350	P	H
		5986	56.94	-11.36	68.3	40.91	34.96	11.99	30.92	100	350	P	H
		5752	105.96	-	-	90.2	34.81	11.78	30.83	100	350	P	H
		5752	97.35	-	-	81.59	34.81	11.78	30.83	100	350	A	H
		5643.6	55.39	-12.91	68.3	39.8	34.7	11.66	30.77	101	300	P	V
		5662.8	55.73	-22.07	77.8	40.11	34.72	11.68	30.78	101	300	P	V
		5716.8	65.75	-44.26	110.01	50.07	34.76	11.73	30.81	101	300	P	V
		5722	66.41	-49.05	115.46	50.7	34.78	11.75	30.82	101	300	P	V
		5854.8	54.09	-57.27	111.36	38.19	34.9	11.88	30.88	101	300	P	V
		5867.6	55.13	-52.24	107.37	39.23	34.9	11.88	30.88	101	300	P	V
		5917.6	55.94	-17.82	73.76	39.99	34.92	11.93	30.9	101	300	P	V
		5948	55.84	-12.46	68.3	39.85	34.94	11.96	30.91	101	300	P	V
		5740	103.7	-	-	87.97	34.79	11.76	30.82	101	300	P	V
	5740	96.05	-	-	80.32	34.79	11.76	30.82	101	300	A	V	



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 159 5795MHz		5633.2	56.43	-11.87	68.3	40.84	34.7	11.66	30.77	114	350	P	H
		5666.8	55.7	-25.07	80.77	40.06	34.73	11.7	30.79	114	350	P	H
		5703.6	55.11	-51.2	106.31	39.43	34.76	11.73	30.81	114	350	P	H
		5720.4	54.77	-57.04	111.81	39.05	34.78	11.75	30.81	114	350	P	H
		5852.8	55.53	-60.39	115.92	39.66	34.88	11.86	30.87	114	350	P	H
		5870	57.24	-49.46	106.7	41.34	34.9	11.88	30.88	114	350	P	H
		5898	57.48	-30.76	88.24	41.54	34.92	11.91	30.89	114	350	P	H
		5930.8	56.3	-12	68.3	40.34	34.93	11.94	30.91	114	350	P	H
		5788	105.06	-	-	89.25	34.84	11.81	30.84	114	350	P	H
		5788	97.13	-	-	81.32	34.84	11.81	30.84	114	350	A	H
		5606.8	55.79	-12.51	68.3	40.26	34.66	11.63	30.76	101	298	P	V
		5665.6	55.62	-24.26	79.88	40.01	34.72	11.68	30.79	101	298	P	V
		5708.4	55.75	-51.9	107.65	40.07	34.76	11.73	30.81	101	298	P	V
		5723.6	54.59	-64.52	119.11	38.88	34.78	11.75	30.82	101	298	P	V
		5852.4	55.16	-61.67	116.83	39.29	34.88	11.86	30.87	101	298	P	V
		5861.6	55.98	-53.07	109.05	40.08	34.9	11.88	30.88	101	298	P	V
		5884	57.62	-41	98.62	41.71	34.91	11.89	30.89	101	298	P	V
		5980.8	55.79	-12.51	68.3	39.76	34.96	11.99	30.92	101	298	P	V
		5794	103.21	-	-	87.4	34.84	11.81	30.84	101	298	P	V
	5794	96.01	-	-	80.2	34.84	11.81	30.84	101	298	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE40_Partial 242 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Partial 262/61 CH 151 5755MHz		5632.4	56.77	-11.53	68.3	41.14	34.75	11.65	30.77	303	335	P	H
		5690.8	56.43	-42.09	98.52	40.55	34.97	11.71	30.8	303	335	P	H
		5712.8	70.65	-38.24	108.89	54.7	35.03	11.73	30.81	303	335	P	H
		5723.6	74.11	-45	119.11	58.1	35.08	11.75	30.82	303	335	P	H
		5853.2	55.9	-59.1	115	39.56	35.35	11.86	30.87	303	335	P	H
		5870.8	55.79	-50.68	106.47	39.4	35.38	11.89	30.88	303	335	P	H
		5896.4	56.94	-32.49	89.43	40.52	35.4	11.91	30.89	303	335	P	H
		5977.2	58.06	-10.24	68.3	41.51	35.48	11.99	30.92	303	335	P	H
		5752	108.81	-	-	92.67	35.19	11.78	30.83	303	335	P	H
		5752	100.3	-	-	84.16	35.19	11.78	30.83	303	335	A	H
		5637.2	55.87	-12.43	68.3	40.17	34.81	11.66	30.77	114	297	P	V
		5698	63.33	-40.5	103.83	47.45	34.97	11.71	30.8	114	297	P	V
		5720	65.38	-45.52	110.9	49.36	35.08	11.75	30.81	114	297	P	V
		5724.8	73.92	-47.92	121.84	57.91	35.08	11.75	30.82	114	297	P	V
		5851.2	54.86	-64.7	119.56	38.52	35.35	11.86	30.87	114	297	P	V
		5859.2	55.89	-53.83	109.72	39.52	35.37	11.88	30.88	114	297	P	V
		5882.4	57.07	-42.73	99.8	40.69	35.38	11.89	30.89	114	297	P	V
		5982.8	57.18	-11.12	68.3	40.63	35.48	11.99	30.92	114	297	P	V
	5740	107.94	-	-	91.86	35.14	11.76	30.82	114	297	P	V	
	5740	100.38	-	-	84.3	35.14	11.76	30.82	114	297	A	V	



WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBµV/m)	Over Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Partial 262/62 CH 159 5795MHz		5648.8	55.2	-13.1	68.3	39.51	34.81	11.66	30.78	100	70	P	H
		5697.2	55.45	-47.79	103.24	39.57	34.97	11.71	30.8	100	70	P	H
		5716.8	55.57	-54.44	110.01	39.62	35.03	11.73	30.81	100	70	P	H
		5720	54.87	-56.03	110.9	38.85	35.08	11.75	30.81	100	70	P	H
		5850.4	55.94	-65.45	121.39	39.6	35.35	11.86	30.87	100	70	P	H
		5864	55.74	-52.64	108.38	39.37	35.37	11.88	30.88	100	70	P	H
		5882	55.91	-44.19	100.1	39.53	35.38	11.89	30.89	100	70	P	H
		5955.6	56.31	-11.99	68.3	39.77	35.47	11.98	30.91	100	70	P	H
		5806	106.39	-	-	90.09	35.32	11.83	30.85	100	70	P	H
		5806	97.19	-	-	80.89	35.32	11.83	30.85	100	70	A	H
		5602.8	55.88	-12.42	68.3	40.31	34.7	11.63	30.76	247	175	P	V
		5682.4	56.09	-36.22	92.31	40.26	34.92	11.7	30.79	247	175	P	V
		5702.8	54.95	-51.14	106.09	39	35.03	11.73	30.81	247	175	P	V
		5724.4	55.15	-65.78	120.93	39.14	35.08	11.75	30.82	247	175	P	V
		5852.4	54.87	-61.96	116.83	38.53	35.35	11.86	30.87	247	175	P	V
		5856.4	55.78	-54.73	110.51	39.41	35.37	11.88	30.88	247	175	P	V
		5886.8	55.47	-41.07	96.54	39.09	35.38	11.89	30.89	247	175	P	V
		5976.4	56.87	-11.43	68.3	40.32	35.48	11.99	30.92	247	175	P	V
	5800	108.61	-	-	92.35	35.3	11.81	30.85	247	175	P	V	
	5800	100.07	-	-	83.81	35.3	11.81	30.85	247	175	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ax HE80_Full (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full CH 155 5775MHz		5640.4	56	-12.3	68.3	40.41	34.7	11.66	30.77	100	352	P	H
		5695.2	61.63	-40.13	101.76	45.97	34.75	11.71	30.8	100	352	P	H
		5716.8	65.01	-45	110.01	49.33	34.76	11.73	30.81	100	352	P	H
		5722.8	64.84	-52.44	117.28	49.13	34.78	11.75	30.82	100	352	P	H
		5852.4	62	-54.83	116.83	46.13	34.88	11.86	30.87	100	352	P	H
		5856.4	60.18	-50.33	110.51	44.28	34.9	11.88	30.88	100	352	P	H
		5875.1	56.6	-48.63	105.23	40.69	34.91	11.89	30.89	100	352	P	H
		5952.8	56.58	-11.72	68.3	40.59	34.94	11.96	30.91	100	352	P	H
		5770	102.39	-	-	86.62	34.82	11.79	30.84	100	352	P	H
		5770	94.5	-	-	78.73	34.82	11.79	30.84	100	352	A	H
		5644.8	56.64	-11.66	68.3	41.05	34.7	11.66	30.77	270	173	P	V
		5699.2	63.92	-40.79	104.71	48.26	34.75	11.71	30.8	270	173	P	V
		5714	66.43	-42.79	109.22	50.75	34.76	11.73	30.81	270	173	P	V
		5723.2	66.59	-51.61	118.2	50.88	34.78	11.75	30.82	270	173	P	V
		5850.8	65.69	-54.79	120.48	49.82	34.88	11.86	30.87	270	173	P	V
		5865.6	62.06	-45.87	107.93	46.16	34.9	11.88	30.88	270	173	P	V
		5878.4	58.58	-44.19	102.77	42.67	34.91	11.89	30.89	270	173	P	V
		5935.2	56.39	-11.91	68.3	40.43	34.93	11.94	30.91	270	173	P	V
		5770	103.19	-	-	87.42	34.82	11.79	30.84	270	173	P	V
	5770	94.31	-	-	78.54	34.82	11.79	30.84	270	173	A	V	

Remark

- No other spurious found.
- All results are PASS against Peak and Average limit line.



Band 4 5725~5850MHz

WIFI 802.11ax HE80_Partial 242 (Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Partial 242/61 CH 155 5775MHz		5602.4	54.97	-13.33	68.3	39.4	34.7	11.63	30.76	304	346	P	H
		5664	55.63	-23.06	78.69	39.87	34.86	11.68	30.78	304	346	P	H
		5714.4	60.88	-48.45	109.33	44.93	35.03	11.73	30.81	304	346	P	H
		5724	64.28	-55.74	120.02	48.27	35.08	11.75	30.82	304	346	P	H
		5852	64.69	-53.05	117.74	48.35	35.35	11.86	30.87	304	346	P	H
		5872.4	56.01	-50.02	106.03	39.62	35.38	11.89	30.88	304	346	P	H
		5908.4	56.15	-24.4	80.55	39.69	35.42	11.93	30.89	304	346	P	H
		5927.2	56.61	-11.69	68.3	40.14	35.43	11.94	30.9	304	346	P	H
		5740	102.31	-	-	86.23	35.14	11.76	30.82	304	346	P	H
		5740	94.22	-	-	78.14	35.14	11.76	30.82	304	346	A	H
		5601.6	55.72	-12.58	68.3	40.15	34.7	11.63	30.76	221	174	P	V
		5679.6	66.15	-24.09	90.24	50.32	34.92	11.7	30.79	221	174	P	V
		5719.6	66.7	-44.09	110.79	50.68	35.08	11.75	30.81	221	174	P	V
		5720.4	68.66	-43.15	111.81	52.64	35.08	11.75	30.81	221	174	P	V
		5854	55.52	-57.66	113.18	39.14	35.37	11.88	30.87	221	174	P	V
		5866	69.98	-37.84	107.82	53.61	35.37	11.88	30.88	221	174	P	V
		5879.2	60.45	-41.73	102.18	44.07	35.38	11.89	30.89	221	174	P	V
		5930.8	56.7	-11.6	68.3	40.24	35.43	11.94	30.91	221	174	P	V
	5746	104.86	-	-	88.79	35.14	11.76	30.83	221	174	P	V	
	5746	96.38	-	-	80.31	35.14	11.76	30.83	221	174	A	V	

Remark

- No other spurious found.
- All results are PASS against Peak and Average limit line.



WiFi Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Partial 242/64 CH 155 5775MHz		5616	56.07	-12.23	68.3	40.44	34.75	11.65	30.77	332	340	P	H
		5697.6	54.88	-48.65	103.53	39	34.97	11.71	30.8	332	340	P	H
		5718	57.76	-52.58	110.34	41.74	35.08	11.75	30.81	332	340	P	H
		5724.4	63.32	-57.61	120.93	47.31	35.08	11.75	30.82	332	340	P	H
		5850.4	64.58	-56.81	121.39	48.24	35.35	11.86	30.87	332	340	P	H
		5870.4	55.63	-50.96	106.59	39.26	35.37	11.88	30.88	332	340	P	H
		5908.8	56.6	-23.65	80.25	40.14	35.42	11.93	30.89	332	340	P	H
		5961.6	57.41	-10.89	68.3	40.87	35.47	11.98	30.91	332	340	P	H
		5776	102.38	-	-	86.18	35.25	11.79	30.84	332	340	P	H
		5776	94	-	-	77.8	35.25	11.79	30.84	332	340	A	H
		5642.4	55.49	-12.81	68.3	39.79	34.81	11.66	30.77	247	178	P	V
		5663.2	61.45	-16.65	78.1	45.69	34.86	11.68	30.78	247	178	P	V
		5708.4	67.23	-40.42	107.65	51.28	35.03	11.73	30.81	247	178	P	V
		5724.4	62.25	-58.68	120.93	46.24	35.08	11.75	30.82	247	178	P	V
		5852.8	66.86	-49.06	115.92	50.52	35.35	11.86	30.87	247	178	P	V
		5858.4	67.06	-42.89	109.95	50.69	35.37	11.88	30.88	247	178	P	V
		5876.8	59.21	-44.75	103.96	42.83	35.38	11.89	30.89	247	178	P	V
		5959.2	57.98	-10.32	68.3	41.44	35.47	11.98	30.91	247	178	P	V
	5788	103.93	-	-	87.66	35.3	11.81	30.84	247	178	P	V	
	5788	95.89	-	-	79.62	35.3	11.81	30.84	247	178	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11ax HE40 Full (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE40 Full LF		30	19.31	-20.69	40	25.17	25.1	1.24	32.2	-	-	P	H
		66.86	13.51	-26.49	40	31.48	12.32	1.85	32.14	-	-	P	H
		157.07	18.74	-24.76	43.5	31.33	16.68	2.83	32.1	-	-	P	H
		186.17	16.35	-27.15	43.5	30.45	14.92	3.08	32.1	-	-	P	H
		864.2	27.33	-18.67	46	23.83	29.24	6.6	32.34	100	0	P	H
		967.99	28.36	-25.64	54	22.69	30.85	6.98	32.16	-	-	P	H
		54.25	20.42	-19.58	40	37.56	13.4	1.66	32.2	-	-	P	V
		76.56	26.99	-13.01	40	44.01	13.2	1.98	32.2	100	0	P	V
		152.22	24.09	-19.41	43.5	36.43	16.98	2.78	32.1	-	-	P	V
		167.74	25.76	-17.74	43.5	39.07	15.86	2.93	32.1	-	-	P	V
		732.28	25.55	-20.45	46	24.06	27.67	6.08	32.26	-	-	P	V
		943.74	27.99	-26.01	54	22.51	30.78	6.9	32.2	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.




Appendix C. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1+2	802.11a	98.75	-	-	10Hz
1+2	802.11ax HE20	100	-	-	10Hz
1+2	802.11ax HE40	100	-	-	10Hz
1+2	802.11ax HE80	98.73	-	-	10Hz


<MIMO Ant.1+2>

802.11a

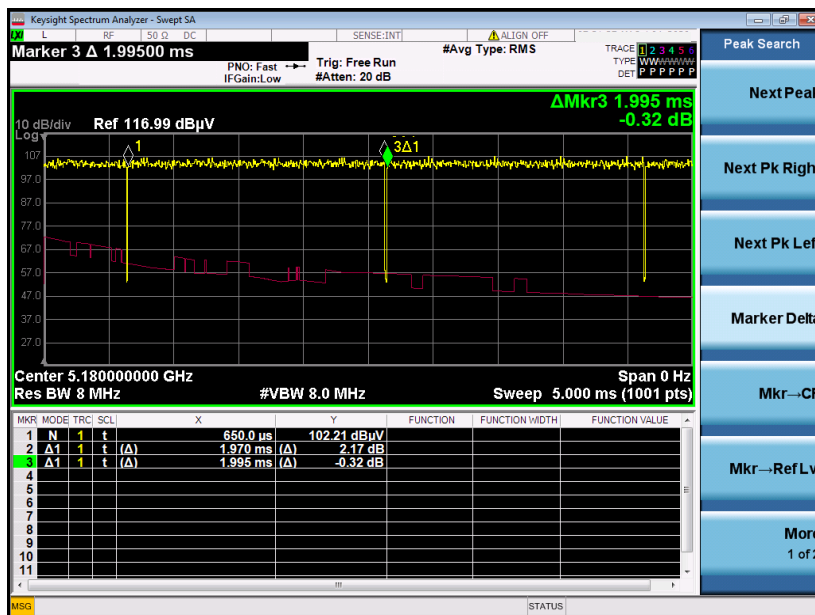




802.11ax HE20

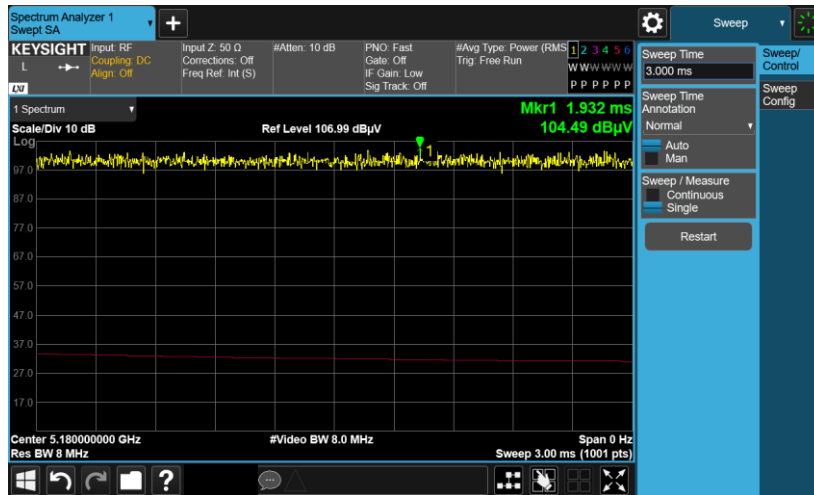

802.11ax HE40

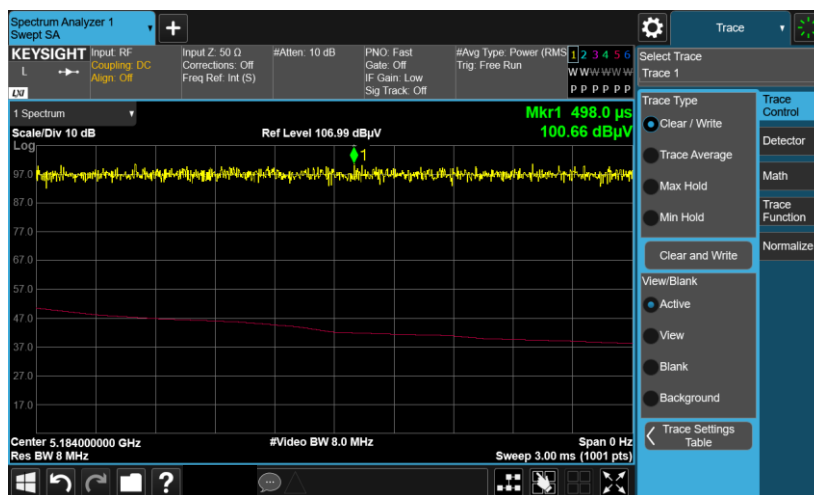



802.11ax HE80

