



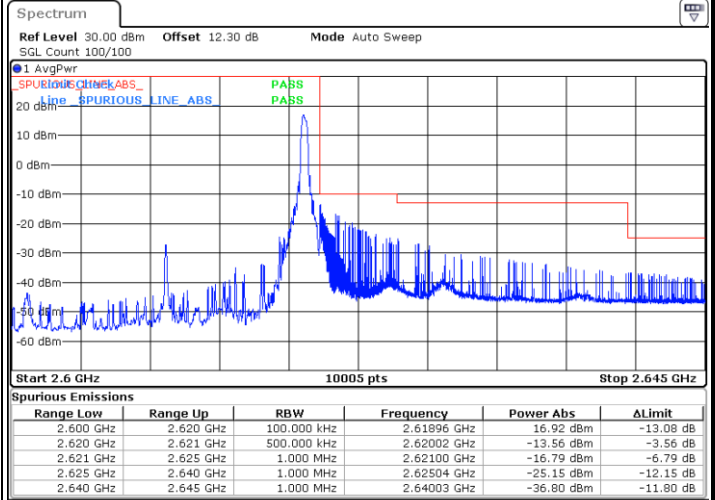

FR1 n38 / 20MHz / DFT-S OFDM / 64QAM

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax


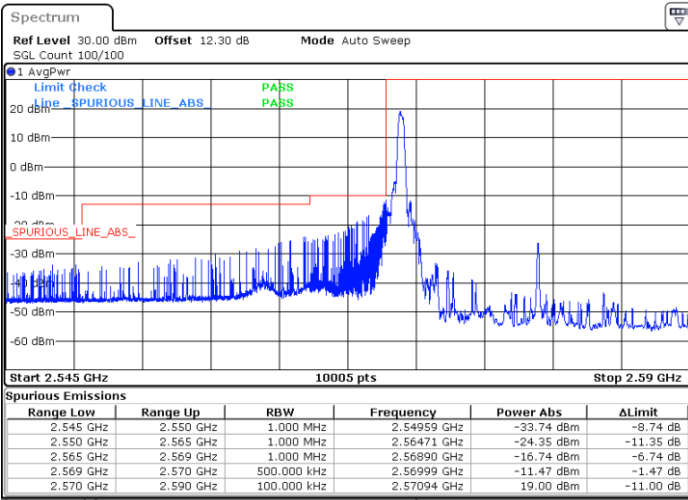


Date: 22.MAR.2021 15:56:14

Date: 22.MAR.2021 16:03:38

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

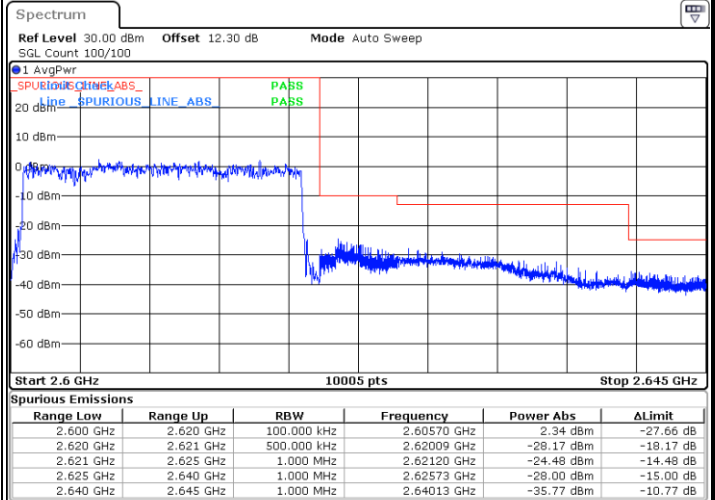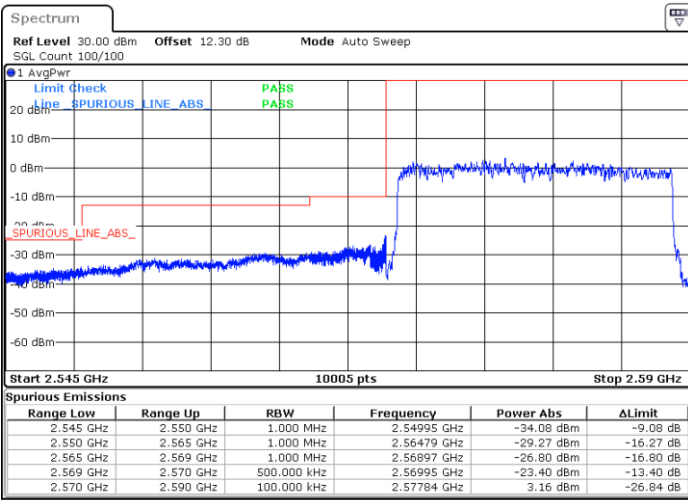

Date: 22.MAR.2021 15:55:39



Date: 22.MAR.2021 16:04:41



FR1 n38 / 20MHz / DFT-S OFDM / 256QAM

Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

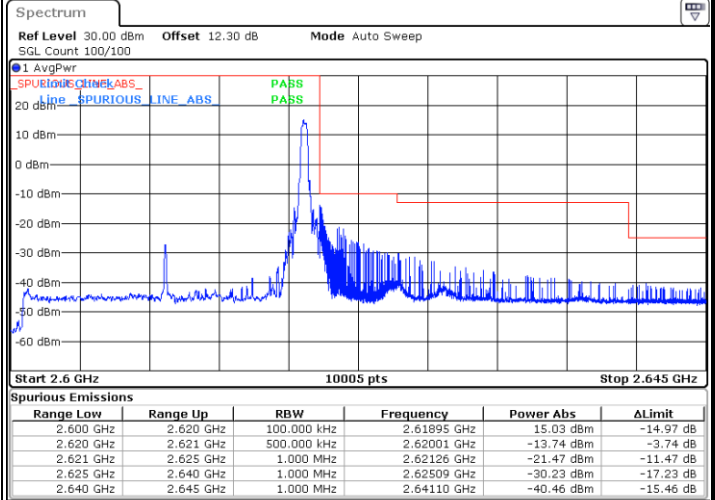
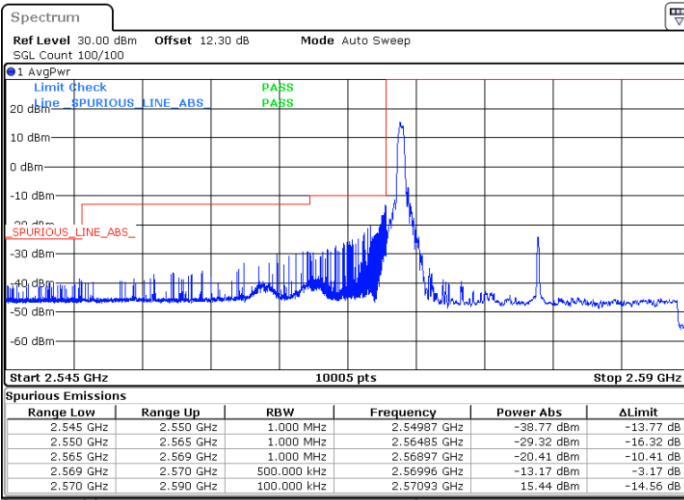


Date: 22.MAR.2021 15:57:42

Date: 22.MAR.2021 16:10:42


Lowest Band Edge / Full RB

Highest Band Edge / Full RB

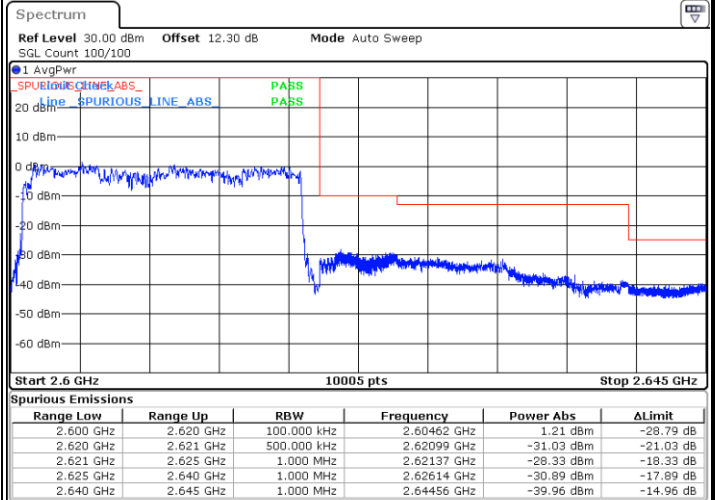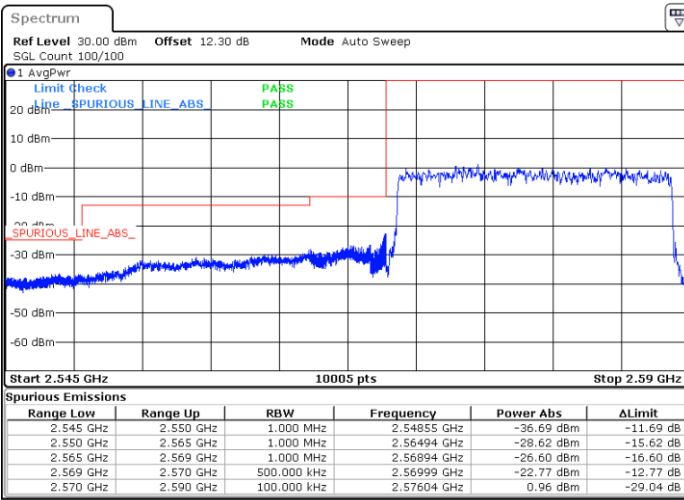

Date: 22.MAR.2021 15:58:10

Date: 22.MAR.2021 16:09:59

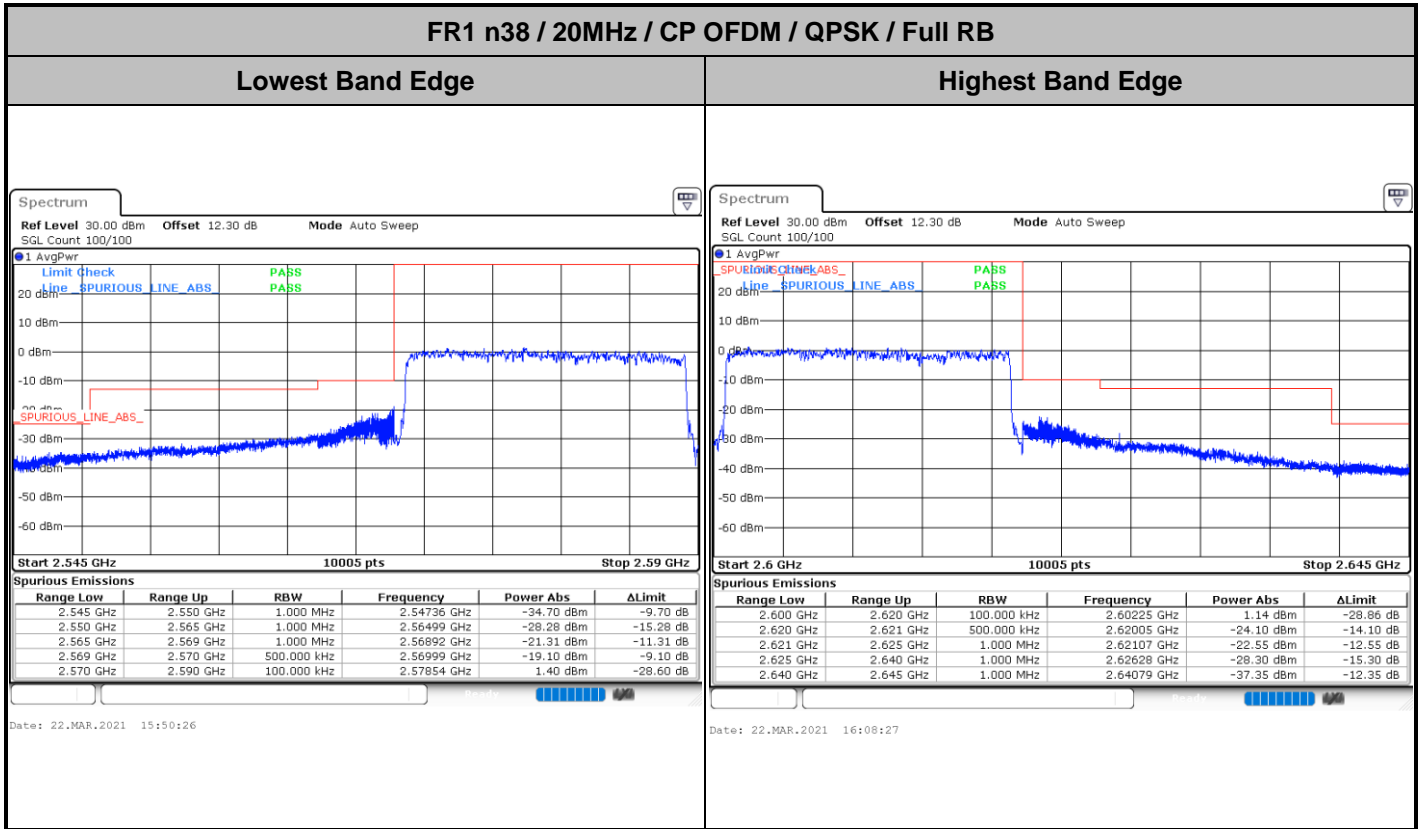





# Conducted Spurious Emission

FR1 n38 / 20MHz / DFT-S OFDM / QPSK / 1RB1

Lowest Channel


Middle Channel

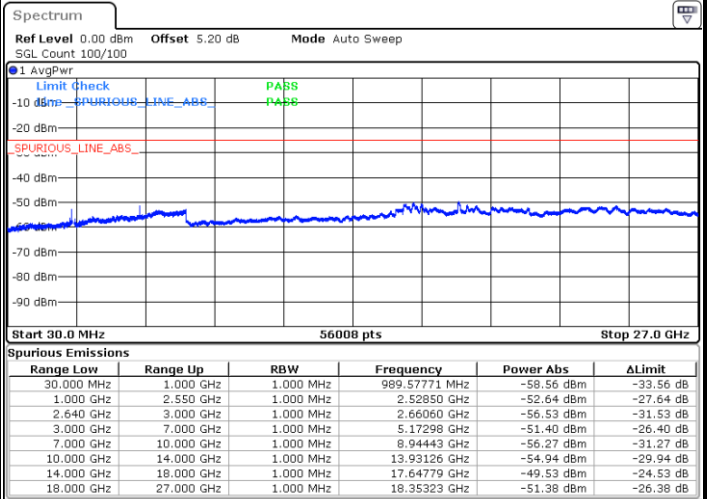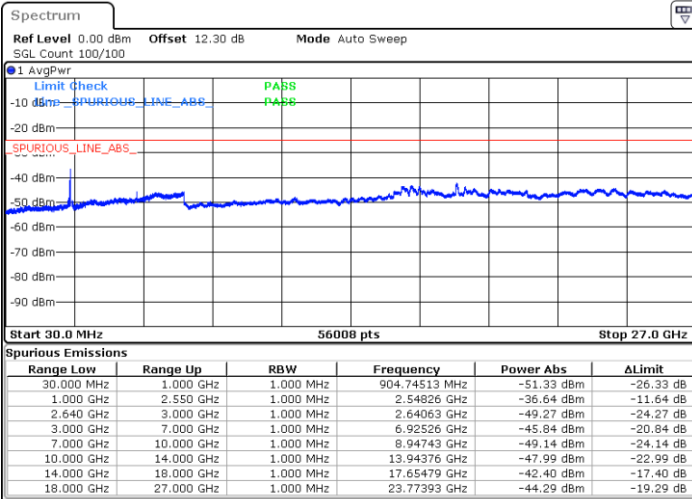

Date: 22.MAR.2021 15:53:54

Date: 22.MAR.2021 15:38:44

Highest Channel

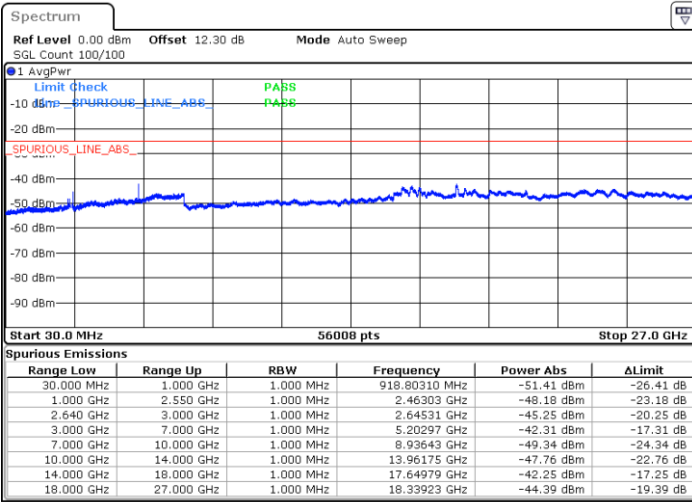

Date: 22.MAR.2021 16:01:26



**Frequency Stability**

Test Conditions		FR1 n38 (BPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 20MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0156	PASS
40	Normal Voltage	0.0164	
30	Normal Voltage	0.0150	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0160	
0	Normal Voltage	0.0152	
-10	Normal Voltage	0.0003	
-20	Normal Voltage	0.0160	
-30	Normal Voltage	0.0006	
20	Maximum Voltage	0.0176	
20	Normal Voltage	0.0165	
20	Battery End Point	0.0171	

**Note:**

- 1. Normal Voltage =3.85 V. ; Battery End Point (BEP) =3.30 V. ; Maximum Voltage =4.25 V.
- 2. The frequency fundamental emissions stay within the authorized frequency block.



## Appendix B. Test Results of Radiated Test

<Ant. 0>

### 5G NR n5A

NR SA n5A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-63.06	-13	-50.06	-71.48	-68.65	0.92	8.66	H
	2472	-58.88	-13	-45.88	-72.33	-66.25	1.14	10.66	H
	3304	-57.66	-13	-44.66	-72.98	-66.21	1.32	12.03	H
									H
									H
									H
	1648	-63.07	-13	-50.07	-70.96	-68.66	0.92	8.66	V
	2472	-58.72	-13	-45.72	-72.32	-66.09	1.14	10.66	V
	3304	-56.94	-13	-43.94	-72.73	-65.49	1.32	12.03	V
									V
									V
									V
Middle	1656	-62.84	-13	-49.84	-71.29	-68.46	0.92	8.69	H
	2480	-58.97	-13	-45.97	-72.43	-66.35	1.15	10.67	H
	3312	-57.82	-13	-44.82	-73.12	-66.39	1.33	12.05	H
									H
									H
									H
	1656	-63.10	-13	-50.10	-70.98	-68.72	0.92	8.69	V
	2480	-58.73	-13	-45.73	-72.36	-66.11	1.15	10.67	V
	3312	-56.96	-13	-43.96	-72.72	-65.53	1.33	12.05	V
									V
									V
									V



Highest	1664	-63.14	-13	-50.14	-71.61	-68.79	0.93	8.72	H
	2488	-59.08	-13	-46.08	-72.56	-66.47	1.15	10.68	H
	3320	-57.53	-13	-44.53	-72.8	-66.12	1.33	12.07	H
									H
									H
									H
	1664	-63.57	-13	-50.57	-71.45	-69.22	0.93	8.72	V
	2488	-58.74	-13	-45.74	-72.41	-66.13	1.15	10.68	V
	3320	-56.98	-13	-43.98	-72.71	-65.57	1.33	12.07	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**5G NR n2A**

NR SA n2A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3705	-54.85	-13	-41.85	-72.81	-66.06	1.41	12.62	H
	5557	-50.83	-13	-37.83	-73.98	-62.39	1.74	13.30	H
	7410	-47.26	-13	-34.26	-74.05	-56.56	1.94	11.24	H
									H
									H
									H
	3705	-54.88	-13	-41.88	-72.98	-66.09	1.41	12.62	V
	5557	-51.37	-13	-38.37	-74.07	-62.93	1.74	13.30	V
	7410	-47.54	-13	-34.54	-74.18	-56.84	1.94	11.24	V
									V
									V
									V
Middle	3760	-54.81	-13	-41.81	-73	-66.04	1.43	12.66	H
	5640	-50.86	-13	-37.86	-74.08	-62.43	1.73	13.30	H
	7520	-47.87	-13	-34.87	-74.14	-56.98	1.99	11.10	H
									H
									H
									H
	3760	-53.90	-13	-40.90	-72.31	-65.13	1.43	12.66	V
	5640	-51.53	-13	-38.53	-74.34	-63.10	1.73	13.30	V
	7520	-47.89	-13	-34.89	-74.12	-57.00	1.99	11.10	V
									V
									V
									V





Highest	3815	-54.39	-13	-41.39	-72.79	-65.64	1.44	12.69	H
	5722	-50.49	-13	-37.49	-74.13	-62.06	1.73	13.30	H
	7630	-47.73	-13	-34.73	-73.58	-56.85	2.01	11.13	H
									H
									H
									H
	3815	-54.16	-13	-41.16	-72.8	-65.41	1.44	12.69	V
	5722	-51.48	-13	-38.48	-74.5	-63.05	1.73	13.30	V
	7630	-48.25	-13	-35.25	-74.02	-57.37	2.01	11.13	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**5G NR n7A**

NR SA n7A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5004	-52.00	-25	-27.00	-74.02	-62.99	1.61	12.61	H
	7506	-47.38	-25	-22.38	-73.72	-56.49	1.99	11.10	H
	10008	-44.00	-25	-19.00	-73.57	-52.89	2.40	11.29	H
									H
									H
									H
	5004	-51.96	-25	-26.96	-73.54	-62.95	1.61	12.61	V
	7506	-47.57	-25	-22.57	-73.88	-56.68	1.99	11.10	V
	10008	-43.72	-25	-18.72	-74.07	-52.61	2.40	11.29	V
									V
									V
									V
Middle	5052	-51.70	-25	-26.70	-73.7	-62.75	1.62	12.67	H
	7578	-48.00	-25	-23.00	-73.96	-57.11	2.00	11.12	H
	10107	-44.02	-25	-19.02	-73.84	-52.84	2.40	11.21	H
									H
									H
									H
	5052	-52.15	-25	-27.15	-73.78	-63.20	1.62	12.67	V
	7578	-48.10	-25	-23.10	-74.02	-57.21	2.00	11.12	V
	10107	-43.47	-25	-18.47	-73.86	-52.29	2.40	11.21	V
									V
									V
									V



Highest	5100	-51.78	-25	-26.78	-73.76	-62.88	1.64	12.74	H
	7656	-47.64	-25	-22.64	-73.51	-56.76	2.01	11.13	H
	10206	-43.89	-25	-18.89	-73.96	-52.63	2.40	11.14	H
									H
									H
									H
	5100	-52.27	-25	-27.27	-73.95	-63.37	1.64	12.74	V
	7656	-48.13	-25	-23.13	-73.88	-57.25	2.01	11.13	V
	10206	-43.60	-25	-18.60	-74.02	-52.34	2.40	11.14	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**5G NR n12A**

NR SA n12A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1400	-61.49	-13.00	-48.49	-70.94	-66.14	0.84	7.64	H
	2104	-59.85	-13.00	-46.85	-72.52	-66.78	1.06	10.15	H
	2800	-58.32	-13.00	-45.32	-72.60	-66.01	1.22	11.06	H
									H
									H
									H
	1400	-62.95	-13.00	-49.95	-71.17	-67.60	0.84	7.64	V
	2104	-60.83	-13.00	-47.83	-72.39	-67.76	1.06	10.15	V
	2800	-58.15	-13.00	-45.15	-72.37	-65.84	1.22	11.06	V
									V
									V
									V
Middle	1400	-61.70	-13.00	-48.70	-71.15	-66.35	0.84	7.64	H
	2104	-59.96	-13.00	-46.96	-72.63	-66.89	1.06	10.15	H
	2808	-58.27	-13.00	-45.27	-72.59	-65.97	1.22	11.07	H
									H
									H
									H
	1400	-62.76	-13.00	-49.76	-70.98	-67.41	0.84	7.64	V
	2104	-60.89	-13.00	-47.89	-72.45	-67.82	1.06	10.15	V
	2808	-58.17	-13.00	-45.17	-72.44	-65.87	1.22	11.07	V
									V
									V
									V



Highest	1400	-70.10	-13.00	-57.10	-71.08	-74.74	0.84	7.64	H
	2104	-71.48	-13.00	-58.48	-72.48	-78.41	1.06	10.15	H
	2808	-71.31	-13.00	-58.31	-72.31	-79.01	1.22	11.07	H
									H
									H
									H
	1400	-62.95	-13.00	-49.95	-71.17	-67.60	0.84	7.64	V
	2104	-60.70	-13.00	-47.70	-72.26	-67.63	1.06	10.15	V
	2808	-58.05	-13.00	-45.05	-72.32	-65.75	1.22	11.07	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**5G NR n66A**

NR SA- n66A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3422	-56.68	-13	-43.68	-72.8	-67.65	1.35	12.31	H
	5133	-51.75	-13	-38.75	-73.7	-62.89	1.64	12.79	H
	6845	-48.31	-13	-35.31	-73.87	-58.69	1.74	12.12	H
									H
									H
									H
	3422	-56.13	-13	-43.13	-72.65	-67.10	1.35	12.31	V
	5133	-52.14	-13	-39.14	-73.88	-63.28	1.64	12.79	V
	6845	-48.75	-13	-35.75	-73.89	-59.13	1.74	12.12	V
									V
									V
									V
Middle	3490	-56.21	-13	-43.21	-72.8	-67.33	1.36	12.48	H
	5235	-52.33	-13	-39.33	-74.38	-63.59	1.67	12.93	H
	6980	-47.81	-13	-34.81	-73.88	-58.02	1.72	11.93	H
									H
									H
									H
	3490	-56.19	-13	-43.19	-73.15	-67.31	1.36	12.48	V
	5235	-52.52	-13	-39.52	-74.36	-63.78	1.67	12.93	V
	6980	-48.00	-13	-35.00	-73.58	-58.21	1.72	11.93	V
									V
									V
									V



Highest	3540	-55.66	-13	-42.66	-72.67	-66.81	1.37	12.52	H
	5310	-52.35	-13	-39.35	-74.67	-63.69	1.69	13.03	H
	7080	-47.57	-13	-34.57	-73.99	-57.58	1.76	11.77	H
									H
									H
									H
	3540	-55.79	-13	-42.79	-73.02	-66.94	1.37	12.52	V
	5310	-52.41	-13	-39.41	-74.43	-63.75	1.69	13.03	V
	7080	-47.55	-13	-34.55	-73.56	-57.56	1.76	11.77	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**5G NR n38A**

NR SA n38A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5142	-52.78	-25	-27.78	-74.74	-63.93	1.65	12.80	H
	7713	-47.86	-25	-22.86	-73.76	-56.98	2.02	11.14	H
	10285	-43.62	-25	-18.62	-73.89	-52.30	2.39	11.07	H
									H
									H
									H
	5142	-52.65	-25	-27.65	-74.36	-63.80	1.65	12.80	V
	7713	-47.97	-25	-22.97	-73.68	-57.09	2.02	11.14	V
	10285	-43.59	-25	-18.59	-74.04	-52.27	2.39	11.07	V
									V
									V
									V
Middle	5172	-52.85	-25	-27.85	-74.8	-64.04	1.65	12.84	H
	7758	-47.96	-25	-22.96	-73.87	-57.09	2.03	11.15	H
	10341	-43.04	-25	-18.04	-73.46	-51.67	2.39	11.03	H
									H
									H
									H
	5172	-53.01	-25	-28.01	-74.76	-64.20	1.65	12.84	V
	7758	-48.21	-25	-23.21	-73.87	-57.34	2.03	11.15	V
	10341	-43.67	-25	-18.67	-74.14	-52.30	2.39	11.03	V
									V
									V
									V





Highest	5202	-52.72	-25	-27.72	-74.66	-63.94	1.66	12.88	H
	7803	-48.11	-25	-23.11	-74.06	-57.24	2.03	11.16	H
	10405	-42.95	-25	-17.95	-73.54	-51.53	2.39	10.98	H
									H
									H
									H
	5202	-52.76	-25	-27.76	-74.53	-63.98	1.66	12.88	V
	7803	-48.63	-25	-23.63	-74.28	-57.76	2.03	11.16	V
	10405	-43.11	-25	-18.11	-73.62	-51.69	2.39	10.98	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 0+8>

**EN-DC 5A-n2A**

EN-DC 5A-n2A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3744	-54.20	-13	-41.20	-72.32	-65.42	1.42	12.65	H
	5613	-50.56	-13	-37.56	-73.64	-62.12	1.74	13.30	H
	7485	-46.97	-13	-33.97	-73.4	-56.11	1.98	11.12	H
									H
									H
									H
	3744	-54.46	-13	-41.46	-72.77	-65.68	1.42	12.65	V
	5613	-51.05	-13	-38.05	-73.79	-62.61	1.74	13.30	V
	7485	-46.65	-13	-33.65	-73.03	-55.79	1.98	11.12	V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**EN-DC 66A-n2A**

EN-DC 5A-n2A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3742	-54.82	-13	-41.82	-72.93	-66.04	1.42	12.65	H
	5613	-51.17	-13	-38.17	-74.25	-62.73	1.74	13.30	H
	7485	-47.33	-13	-34.33	-73.76	-56.47	1.98	11.12	H
									H
									H
									H
	3742	-55.27	-13	-42.27	-73.58	-66.49	1.42	12.65	V
	5613	-51.63	-13	-38.63	-74.37	-63.19	1.74	13.30	V
	7485	-47.64	-13	-34.64	-74.02	-56.78	1.98	11.12	V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**EN-DC 12A-n25A**

EN-DC 2A-n12A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3703	-54.50	-13	-41.50	-72.45	-65.71	1.41	12.62	H
	5554	-49.95	-13	-36.95	-73.11	-61.51	1.74	13.30	H
	7405	-46.01	-13	-33.01	-72.82	-55.32	1.94	11.25	H
									H
									H
									H
	3703	-54.93	-13	-41.93	-73.02	-66.14	1.41	12.62	V
	5554	-50.79	-13	-37.79	-73.48	-62.35	1.74	13.30	V
	7405	-46.72	-13	-33.72	-73.38	-56.03	1.94	11.25	V
									V
									V
									V
Middle	3747	-54.87	-13	-41.87	-73	-66.09	1.42	12.65	H
	5621	-51.26	-13	-38.26	-74.39	-62.82	1.74	13.30	H
	7495	-47.54	-13	-34.54	-73.92	-56.66	1.99	11.11	H
									H
									H
									H
	3747	-55.27	-13	-42.27	-73.61	-66.49	1.42	12.65	V
	5621	-51.60	-13	-38.60	-74.37	-63.16	1.74	13.30	V
	7495	-47.69	-13	-34.69	-74.04	-56.81	1.99	11.11	V
									V
									V
									V



Highest	3793	-54.15	-13	-41.15	-72.48	-65.39	1.44	12.68	H
	5689	-50.61	-13	-37.61	-74.09	-62.18	1.73	13.30	H
	7585	-47.72	-13	-34.72	-73.64	-56.84	2.00	11.12	H
									H
									H
									H
	3793	-54.23	-13	-41.23	-72.82	-65.47	1.44	12.68	V
	5689	-51.30	-13	-38.30	-74.24	-62.87	1.73	13.30	V
	7585	-47.90	-13	-34.90	-73.77	-57.02	2.00	11.12	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**EN-DC 5A-n66A**

EN-DC 5A-n66A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3472	-54.04	-13	-41.04	-70.46	-65.12	1.35	12.43	H
	5208	-52.46	-13	-39.46	-74.42	-63.69	1.66	12.89	H
	6945	-47.95	-13	-34.95	-73.83	-58.20	1.73	11.98	H
									H
									H
									H
	3472	-54.71	-13	-41.71	-71.51	-65.79	1.35	12.43	V
	5208	-52.34	-13	-39.34	-74.13	-63.57	1.66	12.89	V
	6945	-48.10	-13	-35.10	-73.52	-58.35	1.73	11.98	V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**EN-DC 5A-n7A**

EN-DC 5A-n7A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5002	-52.04	-25	-27.04	-74.06	-63.03	1.61	12.60	H
	7503	-47.34	-25	-22.34	-73.69	-56.45	1.99	11.10	H
	10005	-44.76	-25	-19.76	-74.32	-53.66	2.40	11.30	H
									H
									H
									H
	5002	-52.71	-25	-27.71	-74.28	-63.70	1.61	12.60	V
	7503	-47.05	-25	-22.05	-73.37	-56.16	1.99	11.10	V
	10005	-43.85	-25	-18.85	-74.2	-52.75	2.40	11.30	V
									V
									V
									V
Middle	5052	-51.91	-25	-26.91	-73.91	-62.96	1.62	12.67	H
	7578	-47.28	-25	-22.28	-73.24	-56.39	2.00	11.12	H
	10105	-43.92	-25	-18.92	-73.74	-52.74	2.40	11.22	H
									H
									H
									H
	5052	-52.26	-25	-27.26	-73.89	-63.31	1.62	12.67	V
	7578	-48.37	-25	-23.37	-74.29	-57.48	2.00	11.12	V
	10105	-44.17	-25	-19.17	-74.56	-52.99	2.40	11.22	V
									V
									V
									V



Highest	5102	-52.02	-25	-27.02	-73.99	-63.13	1.64	12.74	H
	7653	-47.58	-25	-22.58	-73.45	-56.70	2.01	11.13	H
	10205	-44.25	-25	-19.25	-74.32	-52.99	2.40	11.14	H
									H
									H
									H
	5102	-52.39	-25	-27.39	-74.06	-63.50	1.64	12.74	V
	7653	-47.49	-25	-22.49	-73.24	-56.61	2.01	11.13	V
	10205	-43.54	-25	-18.54	-73.96	-52.28	2.40	11.14	V
									V
									V
									V

Remark:

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2. The EN-DC, 5A-n7A, 12A-n7A, use same antenna configurations, and the middle channels are pre-scanned and the worst configuration, 5A-n7A, is tested by low, middle, high channels.





**EN-DC 12A-n7A**

EN-DC 12A-n7A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5052	-51.89	-25	-26.89	-73.89	-62.94	1.62	12.67	H
	7578	-48.45	-25	-23.45	-74.41	-57.56	2.00	11.12	H
	10105	-44.42	-25	-19.42	-74.24	-53.24	2.40	11.22	H
									H
									H
									H
	5052	-52.42	-25	-27.42	-74.05	-63.47	1.62	12.67	V
	7578	-48.41	-25	-23.41	-74.33	-57.52	2.00	11.12	V
	10105	-43.87	-25	-18.87	-74.26	-52.69	2.40	11.22	V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**EN-DC 5A-n38A**

EN-DC 5A-n38A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5142	-39.17	-25	-14.17	-71.04	-50.32	1.65	12.80	H
	7713	-37.81	-25	-12.81	-73.54	-46.93	2.02	11.14	H
	10285	-43.74	-25	-18.74	-74.19	-52.42	2.39	11.07	H
									H
									H
									H
	5142	-35.83	-25	-10.83	-67.45	-46.98	1.65	12.80	V
	7713	-36.35	-25	-11.35	-71.89	-45.47	2.02	11.14	V
	10285	-43.36	-25	-18.36	-73.99	-52.04	2.39	11.07	V
									V
									V
									V
Middle	5172	-36.66	-25	-11.66	-68.53	-47.85	1.65	12.84	H
	7758	-37.44	-25	-12.44	-73.17	-46.57	2.03	11.15	H
	10345	-43.47	-25	-18.47	-74.08	-52.10	2.39	11.02	H
									H
									H
									H
	5172	-36.69	-25	-11.69	-68.36	-47.88	1.65	12.84	V
	7758	-37.92	-25	-12.92	-73.4	-47.05	2.03	11.15	V
	10345	-43.57	-25	-18.57	-74.22	-52.20	2.39	11.02	V
									V
									V
									V



Highest	5202	-39.62	-25	-14.62	-71.49	-50.84	1.66	12.88	H
	7803	-37.89	-25	-12.89	-73.65	-47.02	2.03	11.16	H
	10405	-42.96	-25	-17.96	-73.72	-51.54	2.39	10.98	H
									H
									H
									H
	5202	-37.88	-25	-12.88	-69.58	-49.10	1.66	12.88	V
	7803	-38.24	-25	-13.24	-73.7	-47.37	2.03	11.16	V
	10405	-43.17	-25	-18.17	-73.85	-51.75	2.39	10.98	V
									V
									V
									V

Remark:

1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
2. The EN-DC, 5A-n38A, 12A-n38A, 71A-n38A use same antenna configurations, and the middle channels are pre-scanned and the worst configuration, 5A-n38A, is tested by low, middle, high channels.



**EN-DC 12A-n38A**

EN-DC 12A-n38A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5172	-38.78	-25	-13.78	-70.65	-49.97	1.65	12.84	H
	7758	-37.81	-25	-12.81	-73.54	-46.94	2.03	11.15	H
	10345	-43.07	-25	-18.07	-73.68	-51.70	2.39	11.02	H
									H
									H
									H
	5172	-32.93	-25	-7.93	-64.6	-44.12	1.65	12.84	V
	7758	-37.99	-25	-12.99	-73.47	-47.12	2.03	11.15	V
	10345	-43.39	-25	-18.39	-74.04	-52.02	2.39	11.02	V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**EN-DC 71A-n38A**

EN-DC 71A-n38A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5172	-36.62	-25	-11.62	-68.49	-47.81	1.65	12.84	H
	7758	-37.04	-25	-12.04	-72.77	-46.17	2.03	11.15	H
	10345	-43.20	-25	-18.20	-73.81	-51.83	2.39	11.02	H
									H
									H
									H
	5172	-33.76	-25	-8.76	-65.43	-44.95	1.65	12.84	V
	7758	-37.86	-25	-12.86	-73.34	-46.99	2.03	11.15	V
	10345	-43.14	-25	-18.14	-73.79	-51.77	2.39	11.02	V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**EN-DC 2A-n41A**

EN-DC 2A-n41A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4995	-51.94	-25	-26.94	-73.95	-62.93	1.61	12.60	H
	7492	-47.23	-25	-22.23	-73.62	-56.36	1.99	11.11	H
	9990	-44.54	-25	-19.54	-74.12	-53.45	2.40	11.30	H
									H
									H
									H
	4995	-52.66	-25	-27.66	-74.21	-63.65	1.61	12.60	V
	7492	-46.98	-25	-21.98	-73.33	-56.11	1.99	11.11	V
	9990	-44.02	-25	-19.02	-74.37	-52.93	2.40	11.30	V
									V
									V
									V
Middle	5169	-52.89	-25	-27.89	-74.84	-64.07	1.65	12.84	H
	7753	-47.65	-25	-22.65	-73.56	-56.78	2.03	11.15	H
	10337	-43.81	-25	-18.81	-74.22	-52.45	2.39	11.03	H
									H
									H
									H
	5169	-53.10	-25	-28.10	-74.84	-64.28	1.65	12.84	V
	7753	-48.23	-25	-23.23	-73.89	-57.36	2.03	11.15	V
	10337	-43.74	-25	-18.74	-74.21	-52.38	2.39	11.03	V
									V
									V
									V



Highest	5340	-52.19	-25	-27.19	-74.61	-63.57	1.70	13.08	H
	8016	-46.70	-25	-21.70	-73.86	-55.87	2.06	11.23	H
	10683	-43.01	-25	-18.01	-73.87	-51.42	2.49	10.90	H
									H
									H
									H
	5340	-52.77	-25	-27.77	-74.85	-64.15	1.70	13.08	V
	8016	-46.68	-25	-21.68	-73.73	-55.85	2.06	11.23	V
	10683	-43.38	-25	-18.38	-74	-51.79	2.49	10.90	V
									V
									V
									V

**Remark:**

- 1. Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
- 2. The EN-DC, 2A-n41A, 4A-n41A, 25A-n41A, 26A-n41A use same antenna configurations, and the middle channels are pre-scanned and the worst configuration, 2A-n41A, is tested by low, middle, high channels.



**EN-DC 4A-n41A**

EN-DC 4A-n41A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5169	-52.23	-25	-27.23	-74.18	-63.41	1.65	12.84	H
	7753	-47.81	-25	-22.81	-73.72	-56.94	2.03	11.15	H
	10337	-43.74	-25	-18.74	-74.15	-52.38	2.39	11.03	H
									H
									H
									H
	5169	-52.61	-25	-27.61	-74.35	-63.79	1.65	12.84	V
	7753	-48.20	-25	-23.20	-73.86	-57.33	2.03	11.15	V
	10337	-43.46	-25	-18.46	-73.93	-52.10	2.39	11.03	V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.





**EN-DC 25A-n41A**

EN-DC 25A-n41A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5169	-52.08	-25	-27.08	-74.03	-63.26	1.65	12.84	H
	7753	-47.83	-25	-22.83	-73.74	-56.96	2.03	11.15	H
	10337	-43.36	-25	-18.36	-73.78	-52.00	2.39	11.03	H
									H
									H
									H
	5169	-52.30	-25	-27.30	-74.05	-63.48	1.65	12.84	V
	7753	-47.74	-25	-22.74	-73.4	-56.87	2.03	11.15	V
	10337	-43.01	-25	-18.01	-73.48	-51.65	2.39	11.03	V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**EN-DC 26A-n41A**

EN-DC 26A-n41A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	5169	-52.18	-25	-27.18	-74.13	-63.36	1.65	12.84	H
	7753	-47.71	-25	-22.71	-73.62	-56.84	2.03	11.15	H
	10337	-43.56	-25	-18.56	-73.98	-52.20	2.39	11.03	H
									H
									H
									H
	5169	-52.23	-25	-27.23	-73.98	-63.41	1.65	12.84	V
	7753	-47.82	-25	-22.82	-73.48	-56.95	2.03	11.15	V
	10337	-43.32	-25	-18.32	-73.79	-51.96	2.39	11.03	V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**EN-DC 71A-n66A**

EN-DC 71A-n66A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3422	-57.02	-13	-44.02	-72.97	-67.99	1.35	12.31	H
	5133	-52.24	-13	-39.24	-74.19	-63.38	1.64	12.79	H
	6845	-48.70	-13	-35.70	-74.08	-59.08	1.74	12.12	H
									H
									H
									H
	3422	-56.66	-13	-43.66	-73.03	-67.63	1.35	12.31	V
	5133	-52.87	-13	-39.87	-74.57	-64.01	1.64	12.79	V
	6845	-49.34	-13	-36.34	-74.32	-59.72	1.74	12.12	V
									V
									V
									V
Middle	3472	-56.14	-13	-43.14	-72.56	-67.22	1.35	12.43	H
	5208	-52.55	-13	-39.55	-74.51	-63.78	1.66	12.89	H
	6945	-48.53	-13	-35.53	-74.41	-58.78	1.73	11.98	H
									H
									H
									H
	3472	-55.87	-13	-42.87	-72.67	-66.95	1.35	12.43	V
	5208	-52.81	-13	-39.81	-74.6	-64.04	1.66	12.89	V
	6945	-48.41	-13	-35.41	-73.83	-58.66	1.73	11.98	V
									V
									V
									V



Highest	3522	-53.83	-13	-40.83	-70.7	-64.98	1.37	12.51	H
	5283	-51.53	-13	-38.53	-73.76	-62.84	1.68	13.00	H
	7045	-46.78	-13	-33.78	-73.09	-56.86	1.74	11.83	H
									H
									H
									H
	3522	-53.66	-13	-40.66	-70.81	-64.81	1.37	12.51	V
	5283	-52.30	-13	-39.30	-74.26	-63.61	1.68	13.00	V
	7045	-47.42	-13	-34.42	-73.28	-57.50	1.74	11.83	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 8+0>

**EN-DC 7A-n5A**

EN-DC 7A-n5A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1650	-42.72	-13	-29.72	-71.19	-48.32	0.92	8.67	H
	2475	-37.63	-13	-24.63	-71.21	-45.00	1.14	10.67	H
	3301	-35.97	-13	-22.97	-71.31	-44.52	1.32	12.02	H
									H
									H
									H
	1650	-43.09	-13	-30.09	-71.02	-48.69	0.92	8.67	V
	2475	-37.24	-13	-24.24	-70.98	-44.61	1.14	10.67	V
	3301	-35.73	-13	-22.73	-71.54	-44.28	1.32	12.02	V
									V
									V
									V
Middle	1656	-42.63	-13	-29.63	-71.11	-48.25	0.92	8.69	H
	2480	-37.68	-13	-24.68	-71.27	-45.06	1.15	10.67	H
	3312	-35.81	-13	-22.81	-71.13	-44.38	1.33	12.05	H
									H
									H
									H
	1656	-43.28	-13	-30.28	-71.2	-48.90	0.92	8.69	V
	2480	-37.46	-13	-24.46	-71.23	-44.84	1.15	10.67	V
	3312	-35.14	-13	-22.14	-70.93	-43.71	1.33	12.05	V
									V
									V
									V



Highest	1660	-42.67	-13	-29.67	-71.16	-48.30	0.92	8.71	H
	2490	-37.79	-13	-24.79	-71.4	-45.18	1.15	10.69	H
	3321	-35.90	-13	-22.90	-71.19	-44.49	1.33	12.07	H
									H
									H
									H
	1660	-42.97	-13	-29.97	-70.88	-48.60	0.92	8.71	V
	2490	-37.46	-13	-24.46	-71.26	-44.85	1.15	10.69	V
	3321	-35.69	-13	-22.69	-71.44	-44.28	1.33	12.07	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**EN-DC 2A-n5A**

EN-DC 2A-n5A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1655	-42.24	-13	-29.24	-70.72	-47.86	0.92	8.69	H
	2483	-37.54	-13	-24.54	-71.13	-44.92	1.15	10.68	H
	3311	-35.87	-13	-22.87	-71.19	-44.44	1.33	12.05	H
									H
									H
									H
	1655	-43.01	-13	-30.01	-70.93	-48.63	0.92	8.69	V
	2483	-37.66	-13	-24.66	-71.43	-45.04	1.15	10.68	V
	3311	-35.77	-13	-22.77	-71.56	-44.34	1.33	12.05	V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**EN-DC 66A-n5A**

EN-DC 66A-n5A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1655	-42.64	-13	-29.64	-71.12	-48.26	0.92	8.69	H
	2483	-37.84	-13	-24.84	-71.43	-45.22	1.15	10.68	H
	3311	-36.11	-13	-23.11	-71.43	-44.68	1.33	12.05	H
									H
									H
									H
	1655	-43.32	-13	-30.32	-71.24	-48.94	0.92	8.69	V
	2483	-37.37	-13	-24.37	-71.14	-44.75	1.15	10.68	V
	3311	-35.13	-13	-22.13	-70.92	-43.70	1.33	12.05	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.





**EN-DC 2A-n12A**

EN-DC 2A-n12A / 15MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1402	-50.97	-13.00	-37.97	-70.54	-55.62	0.84	7.65	H
	2103	-49.36	-13.00	-36.36	-72.10	-56.29	1.06	10.14	H
	2804	-47.58	-13.00	-34.58	-72.04	-55.27	1.22	11.06	H
									H
									H
									H
	1402	-52.35	-13.00	-39.35	-70.69	-57.00	0.84	7.65	V
	2103	-50.54	-13.00	-37.54	-72.17	-57.47	1.06	10.14	V
	2804	-47.55	-13.00	-34.55	-71.95	-55.24	1.22	11.06	V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**EN-DC 66A-n12A**

EN-DC 66A-n12A / 15MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1402	-51.12	-13.00	-38.12	-70.69	-55.77	0.84	7.65	H
	2103	-49.31	-13.00	-36.31	-72.05	-56.24	1.06	10.14	H
	2804	-47.56	-13.00	-34.56	-72.02	-55.25	1.22	11.06	H
									H
									H
									H
	1402	-52.60	-13.00	-39.60	-70.94	-57.25	0.84	7.65	V
	2103	-50.36	-13.00	-37.36	-71.99	-57.29	1.06	10.14	V
	2804	-47.66	-13.00	-34.66	-72.06	-55.35	1.22	11.06	V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**EN-DC 66A-n7A**

EN-DC 66A-n7A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5002	-52.35	-25	-27.35	-74.37	-63.34	1.61	12.60	H
	7503	-47.39	-25	-22.39	-73.74	-56.50	1.99	11.10	H
	10005	-44.39	-25	-19.39	-73.95	-53.29	2.40	11.30	H
									H
									H
									H
	5002	-52.60	-25	-27.60	-74.17	-63.59	1.61	12.60	V
	7503	-47.74	-25	-22.74	-74.06	-56.85	1.99	11.10	V
	10005	-43.78	-25	-18.78	-74.13	-52.68	2.40	11.30	V
									V
									V
									V
Middle	5052	-51.70	-25	-26.70	-73.7	-62.75	1.62	12.67	H
	7578	-48.25	-25	-23.25	-74.21	-57.36	2.00	11.12	H
	10105	-44.12	-25	-19.12	-73.94	-52.94	2.40	11.22	H
									H
									H
									H
	5052	-52.19	-25	-27.19	-73.82	-63.24	1.62	12.67	V
	7578	-48.54	-25	-23.54	-74.46	-57.65	2.00	11.12	V
	10105	-43.84	-25	-18.84	-74.23	-52.66	2.40	11.22	V
									V
									V
									V



Highest	5102	-52.18	-25	-27.18	-74.15	-63.29	1.64	12.74	H
	7653	-48.14	-25	-23.14	-74.01	-57.26	2.01	11.13	H
	10205	-44.09	-25	-19.09	-74.16	-52.83	2.40	11.14	H
									H
									H
									H
	5102	-52.60	-25	-27.60	-74.27	-63.71	1.64	12.74	V
	7653	-48.14	-25	-23.14	-73.89	-57.26	2.01	11.13	V
	10205	-43.90	-25	-18.90	-74.32	-52.64	2.40	11.14	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**EN-DC 7A-n66A**

EN-DC 7A-n66A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3422	-57.25	-13	-44.25	-73.19	-68.22	1.35	12.31	H
	5133	-52.03	-13	-39.03	-73.98	-63.17	1.64	12.79	H
	6845	-48.56	-13	-35.56	-73.94	-58.94	1.74	12.12	H
									H
									H
									H
	3422	-56.17	-13	-43.17	-72.53	-67.14	1.35	12.31	V
	5133	-52.70	-13	-39.70	-74.4	-63.84	1.64	12.79	V
	6845	-48.97	-13	-35.97	-73.95	-59.35	1.74	12.12	V
									V
									V
									V
Middle	3472	-56.21	-13	-43.21	-72.63	-67.29	1.35	12.43	H
	5208	-52.48	-13	-39.48	-74.44	-63.71	1.66	12.89	H
	6945	-47.58	-13	-34.58	-73.46	-57.83	1.73	11.98	H
									H
									H
									H
	3472	-56.10	-13	-43.10	-72.9	-67.18	1.35	12.43	V
	5208	-52.55	-13	-39.55	-74.34	-63.78	1.66	12.89	V
	6945	-48.14	-13	-35.14	-73.56	-58.39	1.73	11.98	V
									V
									V
									V



Highest	3522	-55.80	-13	-42.80	-72.67	-66.95	1.37	12.51	H
	5283	-52.18	-13	-39.18	-74.41	-63.49	1.68	13.00	H
	7045	-47.22	-13	-34.22	-73.53	-57.30	1.74	11.83	H
									H
									H
									H
	3522	-55.26	-13	-42.26	-72.41	-66.41	1.37	12.51	V
	5283	-52.44	-13	-39.44	-74.4	-63.75	1.68	13.00	V
	7045	-47.91	-13	-34.91	-73.77	-57.99	1.74	11.83	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**EN-DC 7A-n71A**

EN-DC 7A-n71A / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1328	-40.98	-13	-27.98	-70.11	-47.46	0.83	7.31	H
	1992	-39.71	-13	-26.71	-70.53	-48.64	1.04	9.97	H
	2657	-35.68	-13	-22.68	-69.56	-45.38	1.19	10.89	H
									H
									H
									H
	1328	-41.45	-13	-28.45	-69.74	-47.93	0.83	7.31	V
	1992	-41.35	-13	-28.35	-71.2	-50.28	1.04	9.97	V
	2657	-31.32	-13	-18.32	-65.16	-41.02	1.19	10.89	V
									V
									V
									V
Middle	1343	-41.08	-13	-28.08	-70.31	-47.63	0.83	7.38	H
	2015	-39.87	-13	-26.87	-71.04	-48.85	1.04	10.02	H
	2687	-37.33	-13	-24.33	-71.33	-47.06	1.19	10.92	H
									H
									H
									H
	1343	-41.84	-13	-28.84	-70.15	-48.39	0.83	7.38	V
	2015	-40.84	-13	-27.84	-71.02	-49.82	1.04	10.02	V
	2687	-37.37	-13	-24.37	-71.33	-47.10	1.19	10.92	V
									V
									V
									V



Highest	1358	-40.90	-13	-27.90	-70.22	-47.51	0.83	7.45	H
	2037	-39.56	-13	-26.56	-71.13	-48.56	1.05	10.05	H
	2717	-36.78	-13	-23.78	-70.9	-46.54	1.20	10.96	H
									H
									H
									H
	1358	-42.01	-13	-29.01	-70.33	-48.62	0.83	7.45	V
	2037	-40.54	-13	-27.54	-71.09	-49.54	1.05	10.05	V
	2717	-36.94	-13	-23.94	-71.01	-46.70	1.20	10.96	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.