





FR1 n26 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

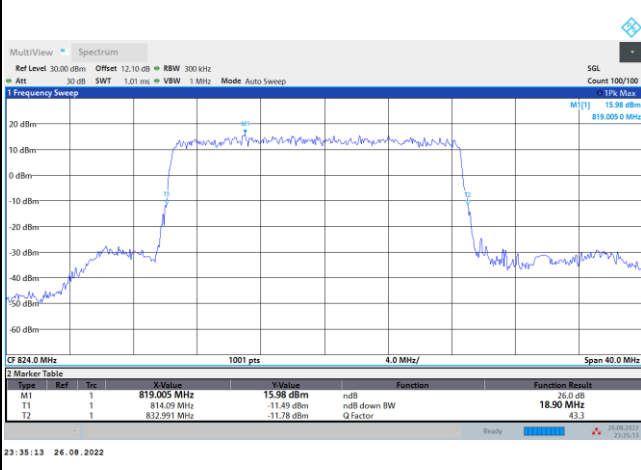


FR1 n26 / 20MHz / CP OFDM / Middle Channel / Full RB


QPSK

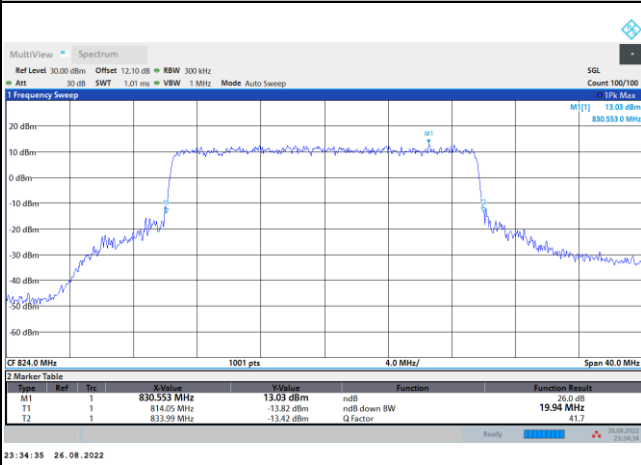


16QAM

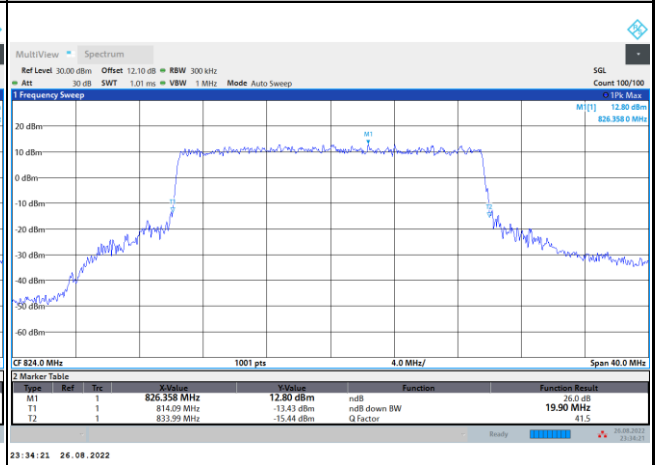

64QAM

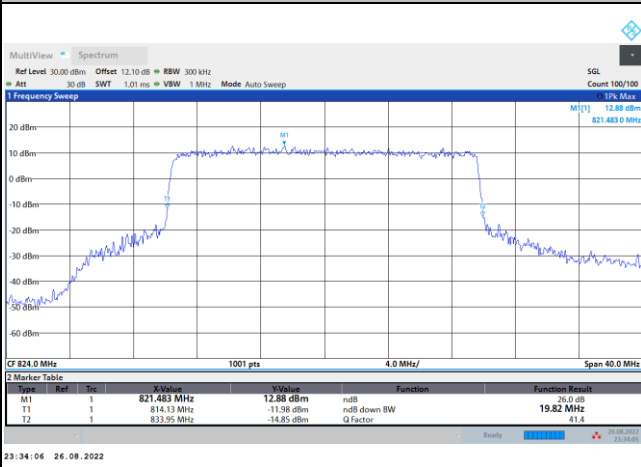

256QAM

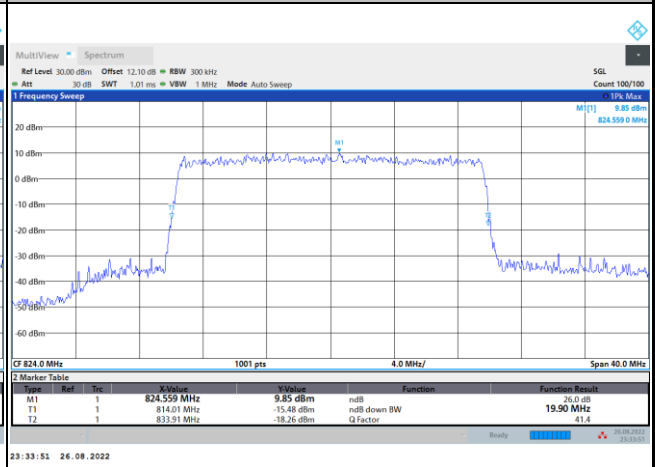



Occupied Bandwidth


Mode	FR1 n26 : 99%OBW(MHz) / DFT-S OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	PI/2 BPSK		PI/2 BPSK		PI/2 BPSK		PI/2 BPSK	
Middle CH	4.48		8.91		13.47		17.84	

Mode	FR1 n26 : 99%OBW (MHz) / CP OFDM							
BW	5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	4.51	4.49	9.27	9.28	14.14	14.14	18.90	18.90
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	4.49	4.51	9.26	9.29	14.18	14.11	18.85	18.87




FR1 n26 / 5MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

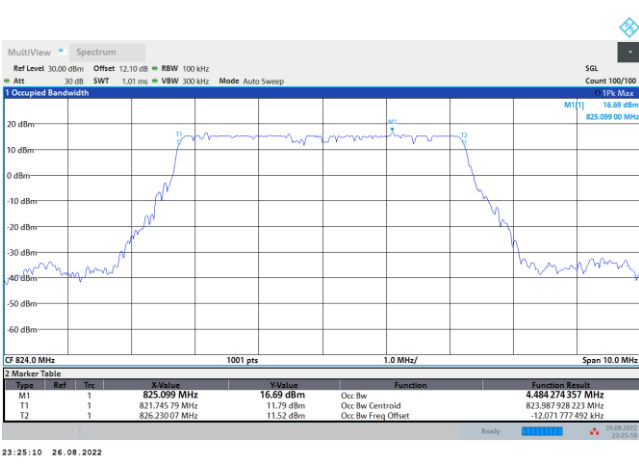


FR1 n26 / 5MHz / CP OFDM / Middle Channel / Full RB


QPSK

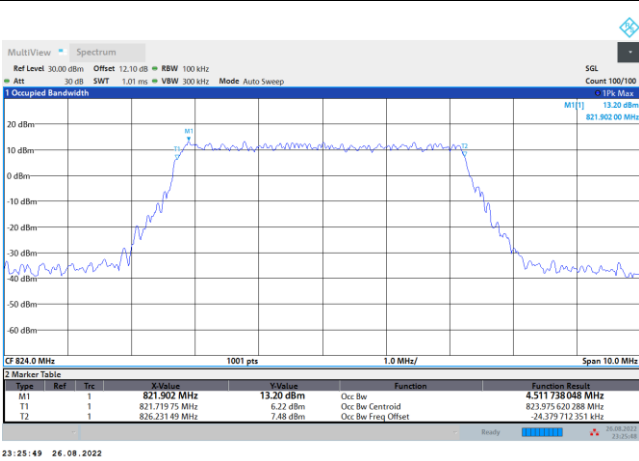


16QAM

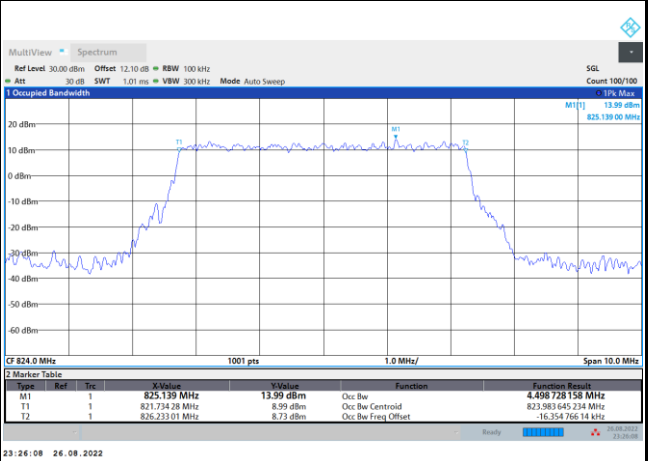

64QAM

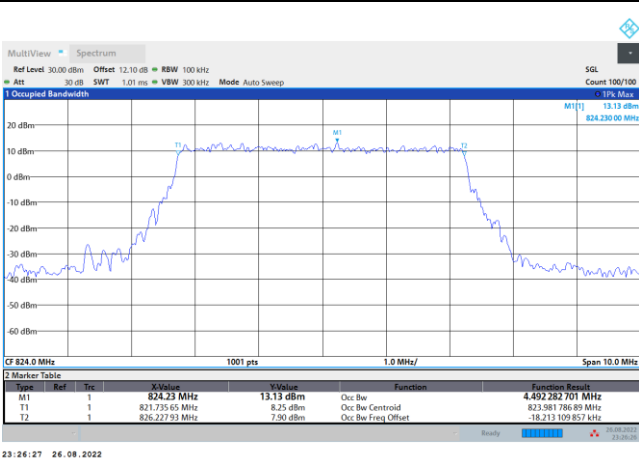


256QAM

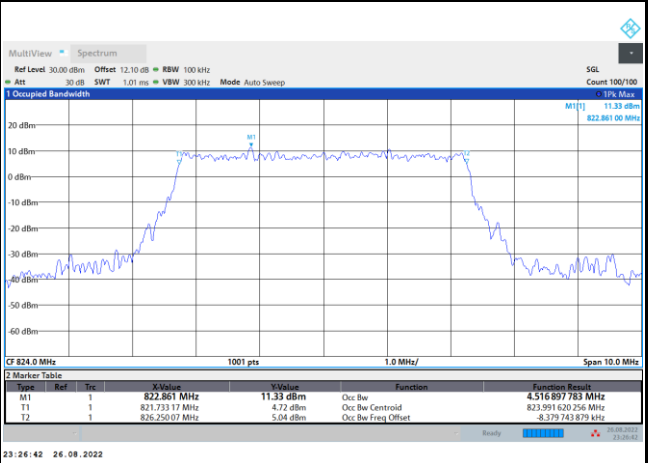




FR1 n26 / 10MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

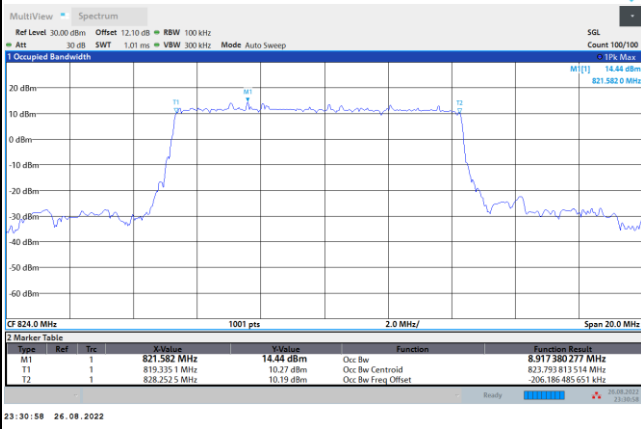


FR1 n26 / 10MHz / CP OFDM / Middle Channel / Full RB


QPSK

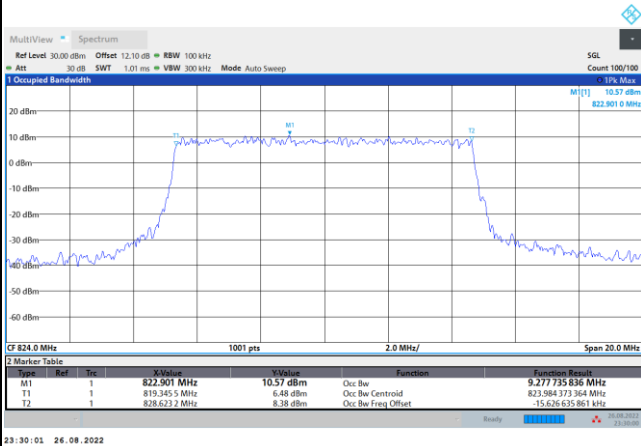


16QAM

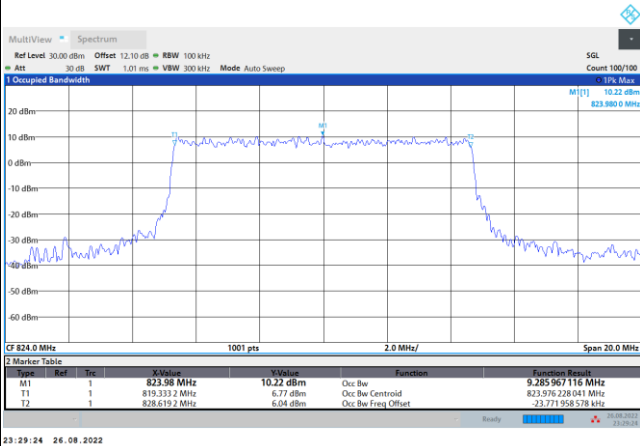

64QAM

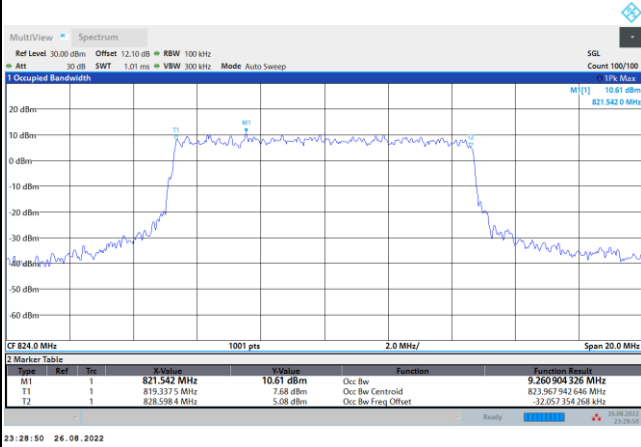


256QAM

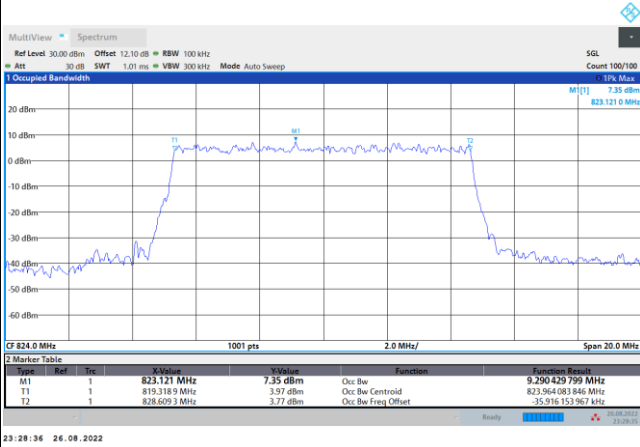




FR1 n26 / 15MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

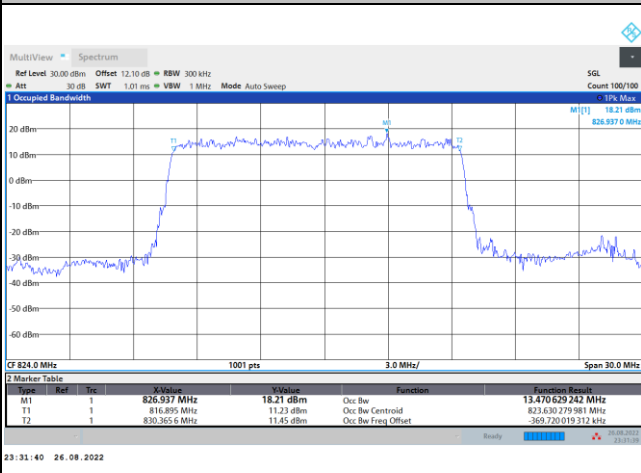


FR1 n26 / 15MHz / CP OFDM / Middle Channel / Full RB


QPSK

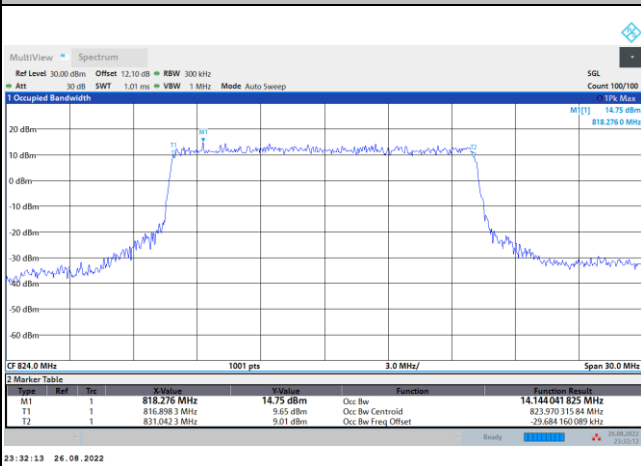


16QAM

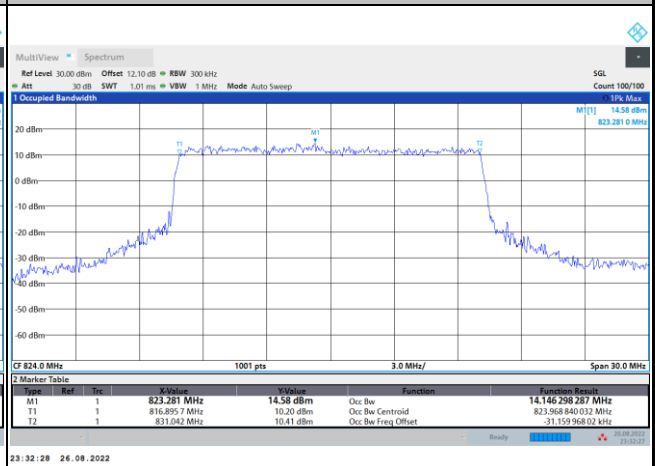

64QAM

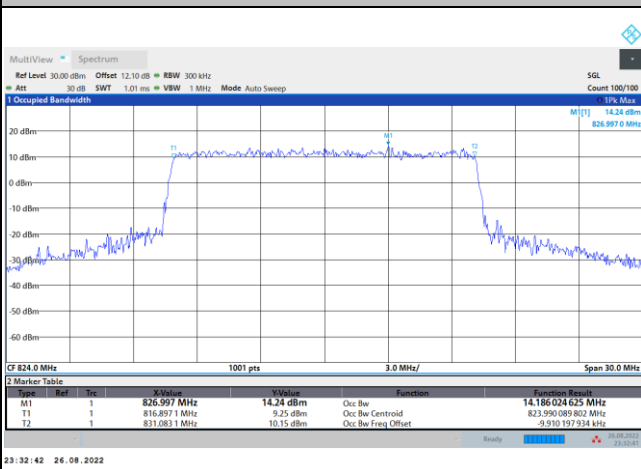


256QAM

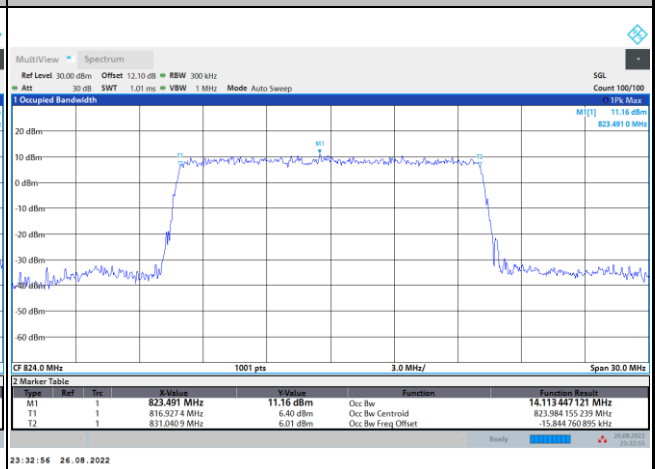




FR1 n26 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

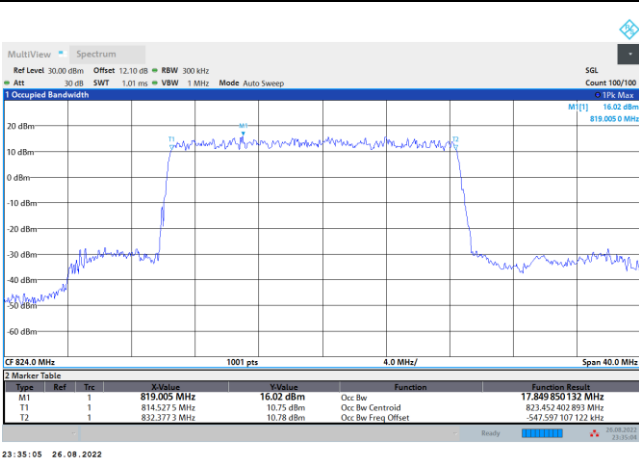


FR1 n26 / 20MHz / CP OFDM / Middle Channel / Full RB


QPSK

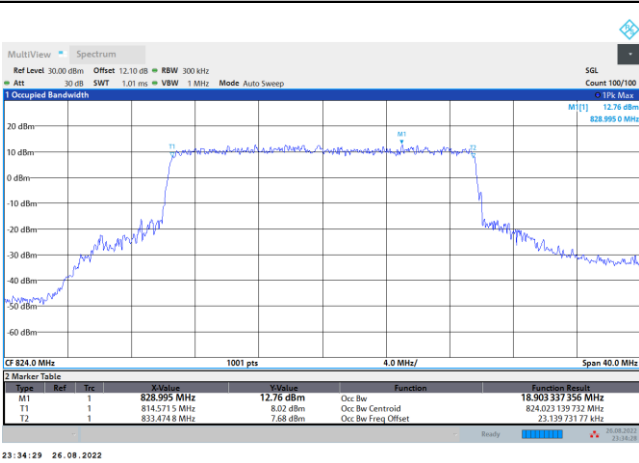


16QAM

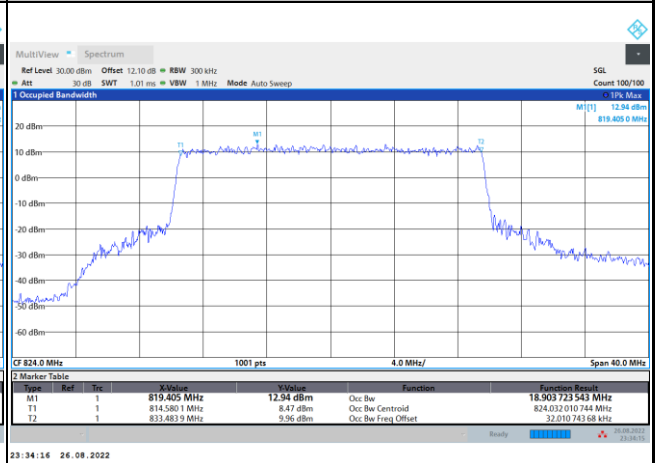

64QAM

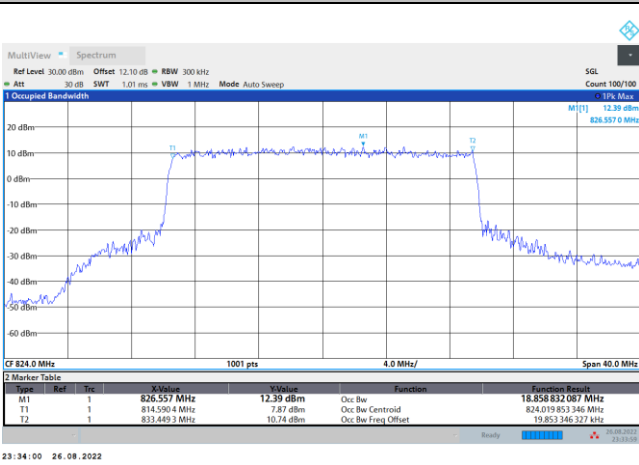

256QAM

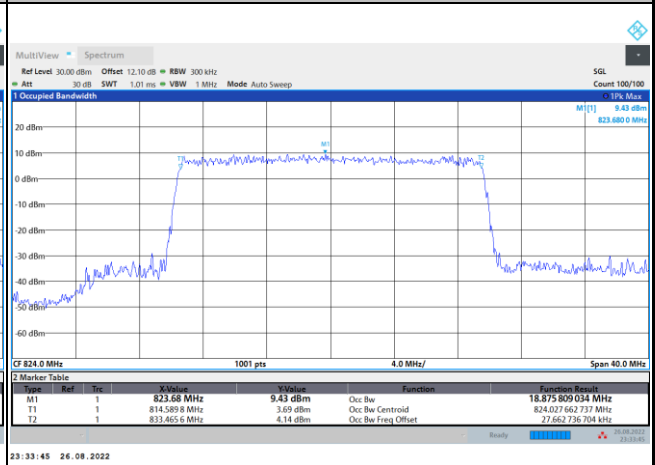




Conducted Spurious Emission

FR1 n26 / DFT-S OFDM / QPSK / 1RB1

5M

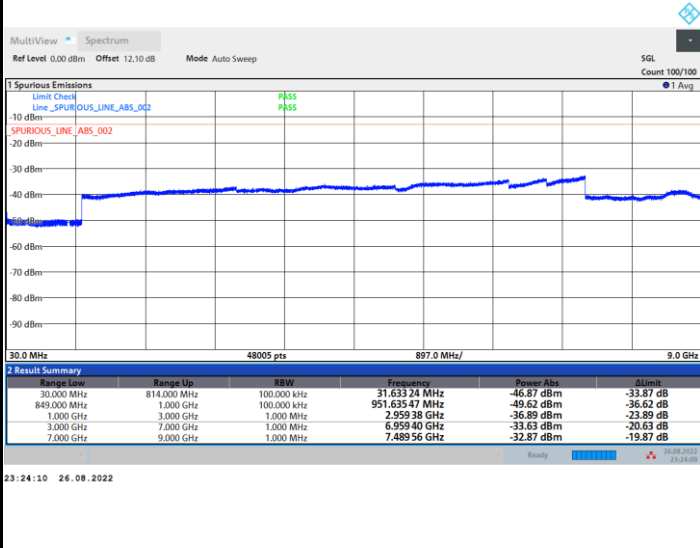



Frequency Stability

Test Conditions		FR1 n26 (BPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 20MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0030	PASS
40	Normal Voltage	0.0088	
30	Normal Voltage	0.0046	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0015	
0	Normal Voltage	0.0047	
-10	Normal Voltage	0.0069	
-20	Normal Voltage	0.0116	
-30	Normal Voltage	0.0085	
20	Maximum Voltage	0.0108	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0095	

Note:

- 1. Normal Voltage = 3.85 V. ; Battery End Point (BEP) = 3.3 V. ; Maximum Voltage = 4.25 V.
- 2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of Radiated Test

5G NR n26

5G NR n26/ 5MHz / PI/2 BPSK									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1624	-63.28	-13	-50.28	-74.99	-65.12	0.97	4.95	H
	2440	-59.03	-13	-46.03	-76.21	-60.83	1.27	5.22	H
	3256	-57.51	-13	-44.51	-76.58	-60.76	1.53	6.93	H
									H
									H
									H
									H
	1624	-62.74	-13	-49.74	-74.92	-64.58	0.97	4.95	V
	2440	-57.89	-13	-44.89	-75.4	-59.69	1.27	5.22	V
	3256	-57.13	-13	-44.13	-76.63	-60.38	1.53	6.93	V
									V
	Middle	1632	-62.42	-13	-49.42	-74.23	-64.23	0.97	4.93
2448		-59.23	-13	-46.23	-76.32	-61.05	1.27	5.24	H
3264		-57.73	-13	-44.73	-76.81	-61.01	1.53	6.96	H
									H
									H
									H
									H
1632		-60.84	-13	-47.84	-73.19	-62.65	0.97	4.93	V
2448		-59.07	-13	-46.07	-76.56	-60.89	1.27	5.24	V
3264		-57.27	-13	-44.27	-76.88	-60.55	1.53	6.96	V
									V
									V
								V	



Highest	1640	-62.91	-13	-49.91	-74.8	-64.69	0.97	1640	H
	2456	-59.04	-13	-46.04	-76.18	-60.88	1.28	2456	H
	3272	-57.38	-13	-44.38	-76.48	-60.69	1.53	3272	H
									H
									H
									H
									H
	1640	-62.47	-13	-49.47	-74.95	-64.25	0.97	4.91	V
	2456	-57.61	-13	-44.61	-75.22	-59.45	1.28	5.27	V
	3272	-57.56	-13	-44.56	-77.02	-60.87	1.53	7.00	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Appendix C. Setup Photographs

<Radiated Emission>

X Plane

LF



HF



—————THE END—————