

# RF Exposure Lab

802 N. Twin Oaks Valley Road, Suite 105 • San Marcos, CA 92069 • U.S.A.

TEL (760) 471-2100 • FAX (760) 471-2121

<http://www.rfexposurelab.com>

## CERTIFICATE OF COMPLIANCE SAR EVALUATION

Inseego  
9645 Scranton Road, Suite 205  
San Diego, CA 92121

Dates of Test:  
Test Report Number:

November 21-29, 2022  
SAR.20221206


Lab Designation Number: US1195 (FCC) & US0194 (ISED)

FCC ID:	PKRISGM3000D
IC Certificate:	3229A-M3000D
HVIN/Model(s):	M3000D
Product Market Number (PMN):	M3000
Test Sample:	Engineering Unit Same as Production
IMEI Number:	990018850002639
Equipment Type:	Portable Router (Hotspot)
Classification:	Portable Transmitter Next to Body
TX Frequency Range:	663 – 698 MHz, 699 – 716 MHz, 824 – 849 MHz, 1710 – 1780 MHz, 1850 – 1915 MHz, 2496 – 2690 MHz, 3300 – 3800 MHz
Frequency Tolerance:	± 2.5 ppm
Maximum RF Output:	600 MHz (FR1) – 24.0 dBm, 750 MHz (FR1) – 24.0 dBm, 850 MHz (FR1) – 24.0 dBm, 1750 MHz (FR1) – 24.5 dBm, 1900 MHz (FR1) – 24.5 dBm, 2550 MHz (FR1) – 27.5 dBm, 3500 MHz (FR1) – 26.0 dBm Conducted
Signal Modulation:	DFT-s-OFDM/CP-OFDM, Pi2 BPSK
Antenna Type:	Internal
Application Type:	Certification
FCC Rule Parts:	Part 2, 22, 24, 27, 90
KDB Test Methodology:	KDB 447498 D01 v07, KDB 248227 v02r02, KDB 941225 D01 v03r01, D02 v02r01, D05 v02r05 & D06 v02r01
Industry Canada:	RSS-102 Issue 5, Safety Code 6
Max. Stand Alone SAR Value:	0.89 W/kg Reported
Max. Simultaneous Value:	Not Able to Evaluate
Separation Distance:	10 mm

This wireless mobile and/or portable device has been shown to be compliant for localized specific absorption rate (SAR) for uncontrolled environment/general exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and IEC 62209-1528:2020 (See test report).

I attest to the accuracy of the data. All measurements were performed by myself or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RF Exposure Lab, LLC certifies that no party to this application is subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

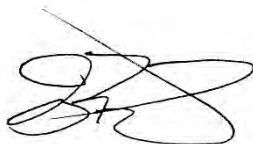

Jay M. Moulton  
Vice President



Testing Cert. # 2387.01

## Table of Contents

1. Introduction .....	4
SAR Definition [5] .....	6
2. SAR Measurement Setup .....	7
Robotic System .....	7
System Hardware .....	7
System Electronics .....	8
Probe Measurement System .....	8
3. Probe and Dipole Calibration .....	15
4. Phantom & Simulating Tissue Specifications .....	16
Head & Body Simulating Mixture Characterization .....	16
5. ANSI/IEEE C95.1 – 1992 RF Exposure Limits [2] .....	17
Uncontrolled Environment .....	17
Controlled Environment .....	17
6. Measurement Uncertainty .....	18
7. System Validation .....	19
Tissue Verification .....	19
Test System Verification .....	19
8. SAR Test Data Summary .....	20
Procedures Used To Establish Test Signal .....	20
Device Test Condition .....	20
9. SAR Test Results .....	60
10. Simultaneous Transmission Analysis .....	62
11. Test Equipment List .....	63
12. Conclusion .....	64
13. References .....	65
Appendix A – System Validation Plots and Data .....	66
Appendix B – SAR Test Data Plots .....	76
Appendix C – SAR Test Setup Photos .....	85
Appendix D – Probe Calibration Data Sheets .....	95
Appendix E – Dipole Calibration Data Sheets .....	118
Appendix F – DAE Calibration Data Sheets .....	155
Appendix G – Phantom Calibration Data Sheets .....	161

Comment/Revision	Date
Original Release	December 9, 2022

**Note: The latest version supersedes all previous versions listed in the above table. The latest version shall be used.**

# 1. Introduction

This measurement report shows compliance of the Inseego Model M3000D FCC ID: PKRISGM3000D with FCC Part 2, 1093, ET Docket 93-62 Rules for mobile and portable devices and IC Certificate: 3229A-M3000D with RSS102 Issue 5 & Safety Code 6. The FCC/ISED have adopted the guidelines for evaluating the environmental effects of radio frequency radiation to protect the public and workers from the potential hazards of RF emissions due to FCC/ISED regulated portable devices. [1], [6]

The test results recorded herein are based on a single type test of Inseego Model M3000D and therefore apply only to the tested sample.

The test procedures and limits, as described in ANSI C95.1 – 1999 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [2], ANSI C95.3 – 2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields [3], IEEE Std.1528 – 2013 Recommended Practice [4], and Industry Canada Safety Code 6 Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz were employed.

The following table indicates all the wireless technologies operating in the M3000D Portable Router (Hotspot). The table also shows the tolerance for the power level for each mode.

Band	Technology	Power	3GPP Nominal Power dBm	Calibrated Nominal Power dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
Band n71 – 600 MHz	FR1	Full	23.0	23.0	+1.0/-1.3	21.7	24.0
Band n12 – 750 MHz	FR1	Full	23.0	23.0	+1.0/-1.3	21.7	24.0
Band n5 – 835 MHz	FR1	Full	23.0	23.0	+1.0/-1.3	21.7	24.0
Band n66 – 1750 MHz	FR1	Full	23.0	23.0	+1.5/-1.3	21.7	24.5
Band n66 – 1750 MHz	FR1	Backoff	18.0	18.0	+1.5/-1.3	16.7	19.5
Band n2 & n25 – 1900 MHz	FR1	Full	23.0	23.0	+1.5/-1.3	21.7	24.5
Band n2 & n25 – 1900 MHz	FR1	Backoff	16.0	16.0	+1.5/-1.3	14.7	17.5
Band n7 – 2550 MHz	FR1	Full	23.0	23.0	+1.0/-1.3	21.7	24.0
Band n7 – 2550 MHz	FR1	Backoff	18.5	18.5	+1.0/-1.3	17.2	19.5
Band n41 & n38 – 2550 MHz PC3	FR1	Full	23.0	23.0	+1.5/-1.3	21.7	24.5
Band n41 & n38 – 2550 MHz PC3	FR1	Backoff	18.0	18.0	+1.5/-1.3	16.7	19.5
Band n41 – 2550 MHz PC2	FR1	Full	26.0	26.0	+1.0/-3.0	23.0	27.5
Band n41 – 2550 MHz PC2	FR1	Backoff	18.5	18.5	+1.0/-3.0	15.5	19.5
Band n78 – 3700 MHz PC3	FR1	Full	23.0	23.0	+1.5/-1.3	21.7	24.5
Band n78 – 3700 MHz PC3	FR1	Backoff	20.0	20.0	+1.5/-1.3	18.9	21.5
Band n78 – 3700 MHz PC2	FR1	Full	25.0	25.0	+1.0/-3.0	22.0	26.0
Band n78 – 3700 MHz PC2	FR1	Backoff	20.0	20.0	+1.5/-1.3	18.9	21.5

Note: n78 PC2 is disabled for product shipped to Canada.

**FR1 UL CA Combinations (Aggregate Power)**

FR1 SA 2x2 UL	Technology	Class	Nominal dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
n41	FR1	3	23.0	+1.5/-3.0	20.0	24.5
n78	FR1	3	23.0	+1.5/-3.0	20.0	24.5

**FR1 NSA UL ENDC Combinations (Aggregate Power)**

Band UL ENDC Combination	Technology	Class	Nominal dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
2A-n5A	LTE+FR1	3	23.0	+1.5/-3.0	20.0	24.5
12A-n5A	LTE+FR1	3	23.0	+1.0/-3.0	20.0	24.0
66A-n5A	LTE+FR1	3	23.0	+1.5/-3.0	20.0	24.5
2A-n66A	LTE+FR1	3	23.0	+1.5/-3.0	20.0	24.5
5A-n66A	LTE+FR1	3	23.0	+1.5/-3.0	20.0	24.5
7A-n66A	LTE+FR1	3	23.0	+1.5/-3.0	20.0	24.5
2A-n71A	LTE+FR1	3	23.0	+1.0/-3.0	20.0	24.0
7A-n71A	LTE+FR1	3	23.0	+1.0/-3.0	20.0	24.0
66A-n71A	LTE+FR1	3	23.0	+1.5/-3.0	20.0	24.5
2A-n78A	LTE+FR1	3	23.0	+1.5/-3.0	20.0	24.5
7A-n78A	LTE+FR1	3	23.0	+1.0/-3.0	20.0	24.0
12A-n78A	LTE+FR1	3	23.0	+1.0/-3.0	20.0	24.0
25A-n78A	LTE+FR1	3	23.0	+1.0/-3.0	20.0	24.0
66A-n78A	LTE+FR1	3	23.0	+1.5/-3.0	20.0	24.5

**SAR Definition [5]**

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dV$ ) of a given density ( $\rho$ ).

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where:

$\sigma$  = conductivity of the tissue (S/m)

$\rho$  = mass density of the tissue (kg/m<sup>3</sup>)

$E$  = rms electric field strength (V/m)


## 2. SAR Measurement Setup

### Robotic System

These measurements are performed using the DASY52 automated dosimetric assessment system. The DASY52 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Intel Core2 computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 2.1).

### System Hardware

A cell controller system contains the power supply, robot controller teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the HP Intel Core2 computer with Windows XP system and SAR Measurement Software DASY52, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

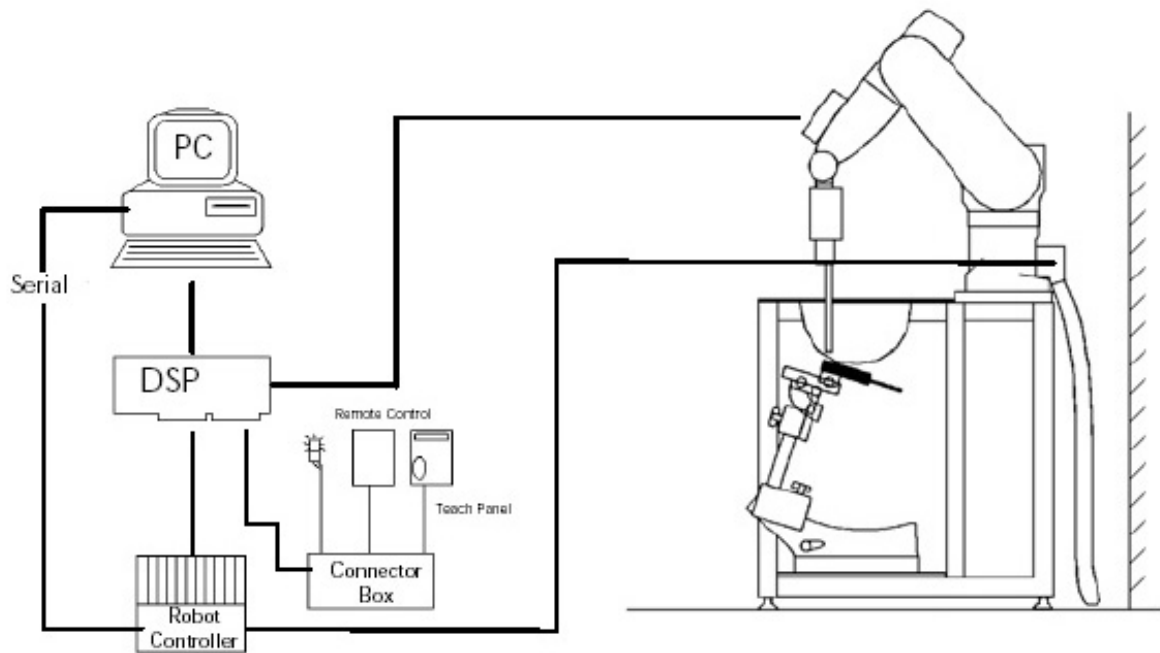

**Figure 2.1 SAR Measurement System Setup**

## System Electronics

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in.

## Probe Measurement System

The SAR measurements were conducted with the dosimetric probe EX3DV4, designed in the classical triangular configuration (see Fig. 2.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi fiber line ending at the front of the probe tip. (see Fig. 2.3) It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY52 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.



**DAE System**



## Probe Specifications

**Calibration:** In air from 10 MHz to 6.0 GHz  
In brain and muscle simulating tissue at Frequencies of 450 MHz, 835 MHz, 1750 MHz, 1900 MHz, 2450 MHz, 2600 MHz, 3500 MHz, 5200 MHz, 5300 MHz, 5600 MHz, 5800 MHz

**Frequency:** 10 MHz to 6 GHz

**Linearity:**  $\pm 0.2\text{dB}$  (30 MHz to 6 GHz)

**Dynamic:** 10 mW/kg to 100 W/kg

**Range:** Linearity:  $\pm 0.2\text{dB}$

**Dimensions:** Overall length: 330 mm

**Tip length:** 20 mm

**Body diameter:** 12 mm

**Tip diameter:** 2.5 mm

**Distance from probe tip to sensor center:** 1 mm

**Application:** SAR Dosimetry Testing  
Compliance tests of wireless device




Figure 2.2 Triangular Probe Configurations



Figure 2.3 Probe Thick-Film Technique

**Probe Calibration Process**

**Dosimetric Assessment Procedure**

Each probe is calibrated according to a dosimetric assessment procedure described in with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in and found to be better than +/-0.25dB. The sensitivity parameters (Norm X, Norm Y, Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe is tested.

**Free Space Assessment**

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a waveguide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm<sup>2</sup>.

**Temperature Assessment \***

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium, correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor based temperature probe is used in conjunction with the E-field probe

$$SAR = C \frac{\Delta T}{\Delta t}$$

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

where:

$\Delta t$  = exposure time (30 seconds),

$\sigma$  = simulated tissue conductivity,


C = heat capacity of tissue (brain or muscle),

$\rho$  = Tissue density (1.25 g/cm<sup>3</sup> for brain tissue)


$\Delta T$  = temperature increase due to RF exposure.

SAR is proportional to  $\Delta T / \Delta t$ , the initial rate of tissue heating, before thermal diffusion takes place.

Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

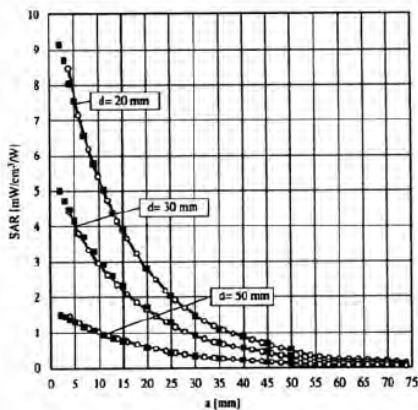

**Figure 2.4 E-Field and Temperature Measurements at 900MHz**

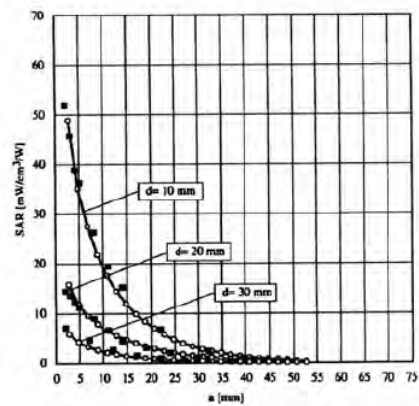

**Figure 2.5 E-Field and Temperature Measurements at 1800MHz**

## Data Extrapolation

The DASY52 software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given like below;

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with  $V_i$  = compensated signal of channel i (i=x,y,z)  
 $U_i$  = input signal of channel i (i=x,y,z)  
 $cf$  = crest factor of exciting field (DASY parameter)  
 $dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with  $V_i$  = compensated signal of channel i (i = x,y,z)  
 $Norm_i$  = sensor sensitivity of channel i (i = x,y,z)  
 $\mu V/(V/m)^2$  for E-field probes  
 $ConvF$  = sensitivity of enhancement in solution  
 $E_i$  = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with  $SAR$  = local specific absorption rate in W/g  
 $E_{tot}$  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in g/cm<sup>3</sup>

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{free} = \frac{E_{tot}^2}{3770}$$

with  $P_{pwe}$  = equivalent power density of a plane wave in W/cm<sup>2</sup>  
 $E_{tot}$  = total electric field strength in V/m

**Scanning procedure**

- The DASY installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.
- The „reference“ and „drift“ measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. +/- 5 %.
- The highest integrated SAR value is the main concern in compliance test applications. These values can mostly be found at the inner surface of the phantom and cannot be measured directly due to the sensor offset in the probe. To extrapolate the surface values, the measurement distances to the surface must be known accurately. A distance error of 0.5mm could produce SAR errors of 6% at 1800 MHz. Using predefined locations for measurements is not accurate enough. Any shift of the phantom (e.g., slight deformations after filling it with liquid) would produce high uncertainties. For an automatic and accurate detection of the phantom surface, the DASY5 system uses the mechanical surface detection. The detection is always at touch, but the probe will move backward from the surface the indicated distance before starting the measurement.
- The „area scan“ measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The scan uses different grid spacings for different frequency measurements. Standard grid spacing for head measurements in frequency ranges ≤ 2GHz is 15 mm in x - and y- dimension. For higher frequencies a finer resolution is needed, thus for the grid spacing is reduced according the following table:

<b>Area scan grid spacing for different frequency ranges</b>	
Frequency range	Grid spacing
≤ 2 GHz	≤ 15 mm
2 – 4 GHz	≤ 12 mm
4 – 6 GHz	≤ 10 mm

Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in annex B.

- A „zoom scan“ measures the field in a volume around the 2D peak SAR value acquired in the previous „coarse“ scan. It uses a fine meshed grid where the robot moves the probe in steps along all the 3 axis (x,y and z-axis) starting at the bottom of the Phantom. The grid spacing for the cube measurement is varied according to the measured frequency range, the dimensions are given in the following table:

<b>Zoom scan grid spacing and volume for different frequency ranges</b>			
Frequency range	Grid spacing for x, y axis	Grid spacing for z axis	Minimum zoom scan volume
≤ 2 GHz	≤ 8 mm	≤ 5 mm	≥ 30 mm
2 – 3 GHz	≤ 5 mm	≤ 5 mm	≥ 28 mm
3 – 4 GHz	≤ 5 mm	≤ 4 mm	≥ 28 mm
4 – 5 GHz	≤ 4 mm	≤ 3 mm	≥ 25 mm
5 – 6 GHz	≤ 4 mm	≤ 2 mm	≥ 22 mm

DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in annex B. Test results relevant for the specified standard (see section 3) are shown in table form in section 7.

## Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of all points in the three directions x, y and z. The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 1 to 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.

## Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

## Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff ].

## Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

## Advanced Extrapolation


DASY uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

**SAM PHANTOM**

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 2.6)

**Phantom Specification**

**Phantom:** SAM Twin Phantom (V4.0)  
**Shell Material:** Vivac Composite  
**Thickness:**  $2.0 \pm 0.2$  mm

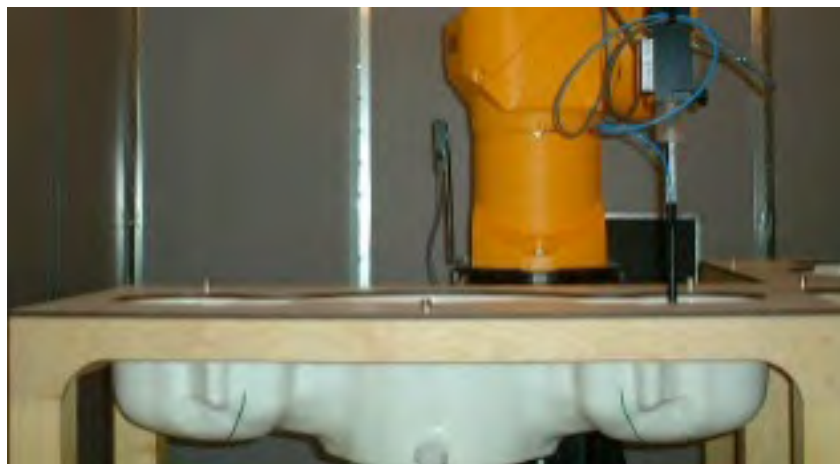

**Figure 2.6 SAM Twin Phantom**

**Device Holder for Transmitters**

In combination with the SAM Twin Phantom V4.0 the Mounting Device (see Fig. 2.7), enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can be easily, accurately, and repeat ably be positioned according to the FCC, CENELEC, IEC and IEEE specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



**Figure 2.7 Mounting Device**

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

### **3. Probe and Dipole Calibration**

See Appendix D and E.

## 4. Phantom & Simulating Tissue Specifications

### Head & Body Simulating Mixture Characterization

The head and body mixtures consist of the material based on the table listed below. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. Body tissue parameters that have not been specified in IEEE1528 – 2013 are derived from the issue dielectric parameters computed from the 4-Cole-Cole equations.

**Table 4.1 Typical Composition of Ingredients for Tissue**

Ingredients		Simulating Tissue					
		600 MHz Head	750 MHz Head	900 MHz Head	1750 MHz Head	1900 MHz Head	2550 MHz Head
Mixing Percentage							
Water		Proprietary Purchased From Speag					
Sugar							
Salt							
HEC							
Bactericide							
DGBE							
Dielectric Constant	Target	42.72	41.94	41.50	40.08	40.00	39.07
Conductivity (S/m)	Target	0.88	0.89	0.97	1.37	1.40	1.91

Ingredients		Simulating Tissue
		3500 MHz Head
Mixing Percentage		
Water		Proprietary Purchased From Speag
Sugar		
Salt		
HEC		
Bactericide		
DGBE		
Dielectric Constant	Target	37.93
Conductivity (S/m)	Target	2.91



## 5. ANSI/IEEE C95.1 – 1992 RF Exposure Limits [2]

### Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 5.1 Human Exposure Limits**

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIROMENT Professional Population (W/kg) or (mW/g)
SPATIAL PEAK SAR <sup>1</sup> Head	1.60	8.00
SPATIAL AVERAGE SAR <sup>2</sup> Whole Body	0.08	0.40
SPATIAL PEAK SAR <sup>3</sup> Hands, Feet, Ankles, Wrists	4.00	20.00

<sup>1</sup> The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

<sup>2</sup> The Spatial Average value of the SAR averaged over the whole body.

<sup>3</sup> The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

## 6. Measurement Uncertainty

Measurement uncertainty table is not required per KDB 865664 D01 v01 section 2.8.2 page 12. SAR measurement uncertainty analysis is required in the SAR report only when the highest measured SAR in a frequency band is  $\geq 1.5$  W/kg for 1-g SAR. The equivalent ratio (1.5/1.6) should be applied to extremity and occupational exposure conditions. The highest reported value is less than 1.5 W/kg. Therefore, the measurement uncertainty table is not required.

## 7. System Validation

### Tissue Verification

**Table 7.1 Measured Tissue Parameters**

		600 MHz Head		750 MHz Head		900 MHz Head	
Date(s)		Nov. 22, 2022		Nov. 22, 2022		Nov. 22, 2022	
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: $\epsilon$		42.72	41.47	41.94	41.19	41.50	40.78
Conductivity: $\sigma$		0.88	0.89	0.89	0.92	0.97	0.99
		1750 MHz Head		1900 MHz Head		2550 MHz Head	
Date(s)		Nov. 21, 2022		Nov. 21, 2022		Nov. 23, 2022	
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: $\epsilon$		40.08	39.35	40.00	39.44	39.07	38.88
Conductivity: $\sigma$		1.37	1.38	1.40	1.43	1.91	1.94
		3500 MHz Head					
Date(s)		Nov. 23, 2022					
Liquid Temperature (°C)	20.0	Target	Measured				
Dielectric Constant: $\epsilon$		37.93	37.67				
Conductivity: $\sigma$		2.91	2.96				

See Appendix A for data printout.


### Test System Verification

Prior to assessment, the system is verified to the  $\pm 10\%$  of the specifications at the test frequency by using the system kit. Power is normalized to 1 watt. (Graphic Plots Attached)

**Table 7.2 System Dipole Validation Target & Measured**

	Test Frequency	Targeted SAR <sub>1g</sub> (W/kg)	Measure SAR <sub>1g</sub> (W/kg)	Tissue Used for Verification	Deviation (%)	Plot Number
22-Nov-2022	750 MHz	8.57	8.61	Head	+ 0.47	1
22-Nov-2022	900 MHz	11.20	11.80	Head	+ 5.36	2
21-Nov-2022	1750 MHz	37.70	38.20	Head	+ 1.33	3
21-Nov-2022	1900 MHz	40.40	41.50	Head	+ 2.72	4
23-Nov-2022	2550 MHz	55.30	56.90	Head	+ 2.89	5
23-Nov-2022	3500 MHz	67.00	69.40	Head	+ 3.58	6

See Appendix A for data plots.

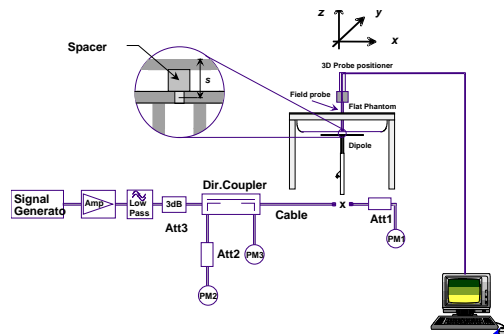

**Figure 7.1 Dipole Validation Test Setup**

## 8. SAR Test Data Summary

### See Measurement Result Data Pages

See Appendix B for SAR Test Data Plots.  
 See Appendix C for SAR Test Setup Photos.

### Procedures Used To Establish Test Signal

The device was either placed into simulated transmit mode using the manufacturer’s test codes or the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

### Device Test Condition

In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power unless otherwise noted. If a conducted power deviation of more than 5% occurred, the test was repeated. The power drift of each test is measured at the start of the test and again at the end of the test. The drift percentage is calculated by the formula  $((\text{end}/\text{start})-1)*100$  and rounded to three decimal places. The drift percentage is calculated into the resultant SAR value on the data sheet for each test.

Required Test Positions						
Antenna	Side A	Side B	Side C	Side D	Side E	Side F
Ant 0	Yes	Yes	Yes	Yes	No	Yes
Ant 1	Yes	Yes	Yes	Yes	Yes	No
Ant 4	Yes	Yes	Yes	No	No	Yes
Ant 6	Yes	No	Yes	Yes	Yes	No
Ant 8	Yes	No	Yes	Yes	No	No

The testing conducted in this report is only for spot checking the device to verify that it is still in compliance with the limits based on the original referenced model.

This device supports SRS capability in band n78. The SRS maximum uplink duty cycle is 1.43%. Per 47 CFR 1.1307, the average power for the maximum upper end of the tolerance for the bands are all excluded from SAR testing. The following table shows the peak transmit power, average transmit power and exclusion limit for each of the bands.

Band	Peak Transmit Power (dBm)	Duty Cycle	Average Power (mW)	Exclusion Limit
n78	26.0	1.43%	6	7

This device uses a power reduction mechanism to reduce output powers in certain use conditions when the device is used close the user’s body.

When the device’s antenna is within a certain distance of the user, the sensor activates and reduces the maximum allowed output power. However, the sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, additional evaluation is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional test positions. Sensor triggering distance summary data is included below.

The sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the sensor entirely covers the antennas. The device form factor will not allow the device to be sitting at an angle. Therefore, tilt measurements were not conducted on this device.

Per the May 2017 TCBC Workshop Notes, demonstration of proper functioning of the power reduction mechanisms is required to support the corresponding SAR configurations. The verification process was divided into two parts: (1) evaluation of the output power levels for individual or multiple triggering mechanisms and (2) evaluation of the triggering distances for proximity-based sensors.

### **9.1 Power Verification Procedure**

The power verification was performed according to the following procedure.

- A base station simulator was used to establish a conducted RF connection and the output power was monitored. The power measurements were confirmed to be within the expected tolerances for all states before and after a power reduction mechanism was triggered.
- Step 1 was repeated for all relevant modes and frequency bands for the mechanism being investigated.
- Steps 1 and 2 were repeated for all individual power reduction mechanisms and combinations thereof. For the combination cases, one mechanism was switched to a “triggered” state at a time; powers were confirmed to be within the tolerances after each additional mechanism was activated.

### **9.2 Distance Verification Procedure**

The distance verification procedure was performed according to the following procedure.

- A base station simulator was used to establish an RF connection and to monitor the power levels. The device being tested was placed below the relevant section of the phantom with the relevant side or edge of the device facing toward the phantom.
- The device was moved toward and away from the phantom to determine the distance at which the mechanism triggers and the output power is reduced, per KDB Publication 616217 D04v01r02 and FCC Guidance. Each applicable test position was evaluated. The distances were confirmed to be the same or larger (more conservative) than the minimum distances provided by the manufacturer.
- Steps 1 and 2 were repeated for low, mid and high bands, as appropriate.
- Steps 1 through 3 were repeated for all distance-based power reduction mechanisms.


### 9.3 WWAN Antenna Verification Summary


**Table 9.1**  
**Power Measurement Verification for WWAN Antenna**

Mechanism	Mode/Band	Conducted Power (dBm)	
1 <sup>st</sup>		Un-triggered (Max)	Mechanism #1 (Reduced)
Capacitive	UMTS 1750	22.60	19.20
	UMTS 1900	22.50	16.30
	LTE FDD Band 4	23.70	19.20
	LTE FDD Band 66	23.70	19.10
	LTE FDD Band 2	23.80	17.40
	LTE FDD Band 25	23.40	17.40
	LTE FDD Band 7	23.80	19.30
	LTE TDD Band 38	22.00	19.40
	LTE TDD Band 41 (PC3)	23.30	19.10
	LTE TDD Band 41 (PC2)	25.90	19.10
	FR1 FDD Band n66	24.20	19.10
	FR1 FDD Band n2	24.10	17.30
	FR1 FDD Band n25	24.30	17.30
	FR1 FDD Band n7	24.40	19.20
	FR1 TDD Band n38	24.20	19.30
	FR1 TDD Band n41 (PC3)	24.30	19.20
	FR1 TDD Band n41 (PC2)	27.20	19.20
	FR1 TDD Band n78 (PC3)	24.30	21.30
FR1 TDD Band n78 (PC2)	25.90	21.30	


**Table 9.2**  
**Distance Measurement Verification for WWAN Antenna**


Mechanism	Test Condition	Band	Distance Measurements (mm)		Minimum Distance per Manufacturer (mm)
			Moving Toward	Moving Away	
Capacitive	Side A	Mid	22	23	20
	Side C	Mid	24	21	20
	Side D	Mid	25	25	20
	Side F	Mid	21	22	20
	Side A	High	23	24	20
	Side C	High	23	21	20
	Side D	High	25	23	20
	Side F	High	24	24	20

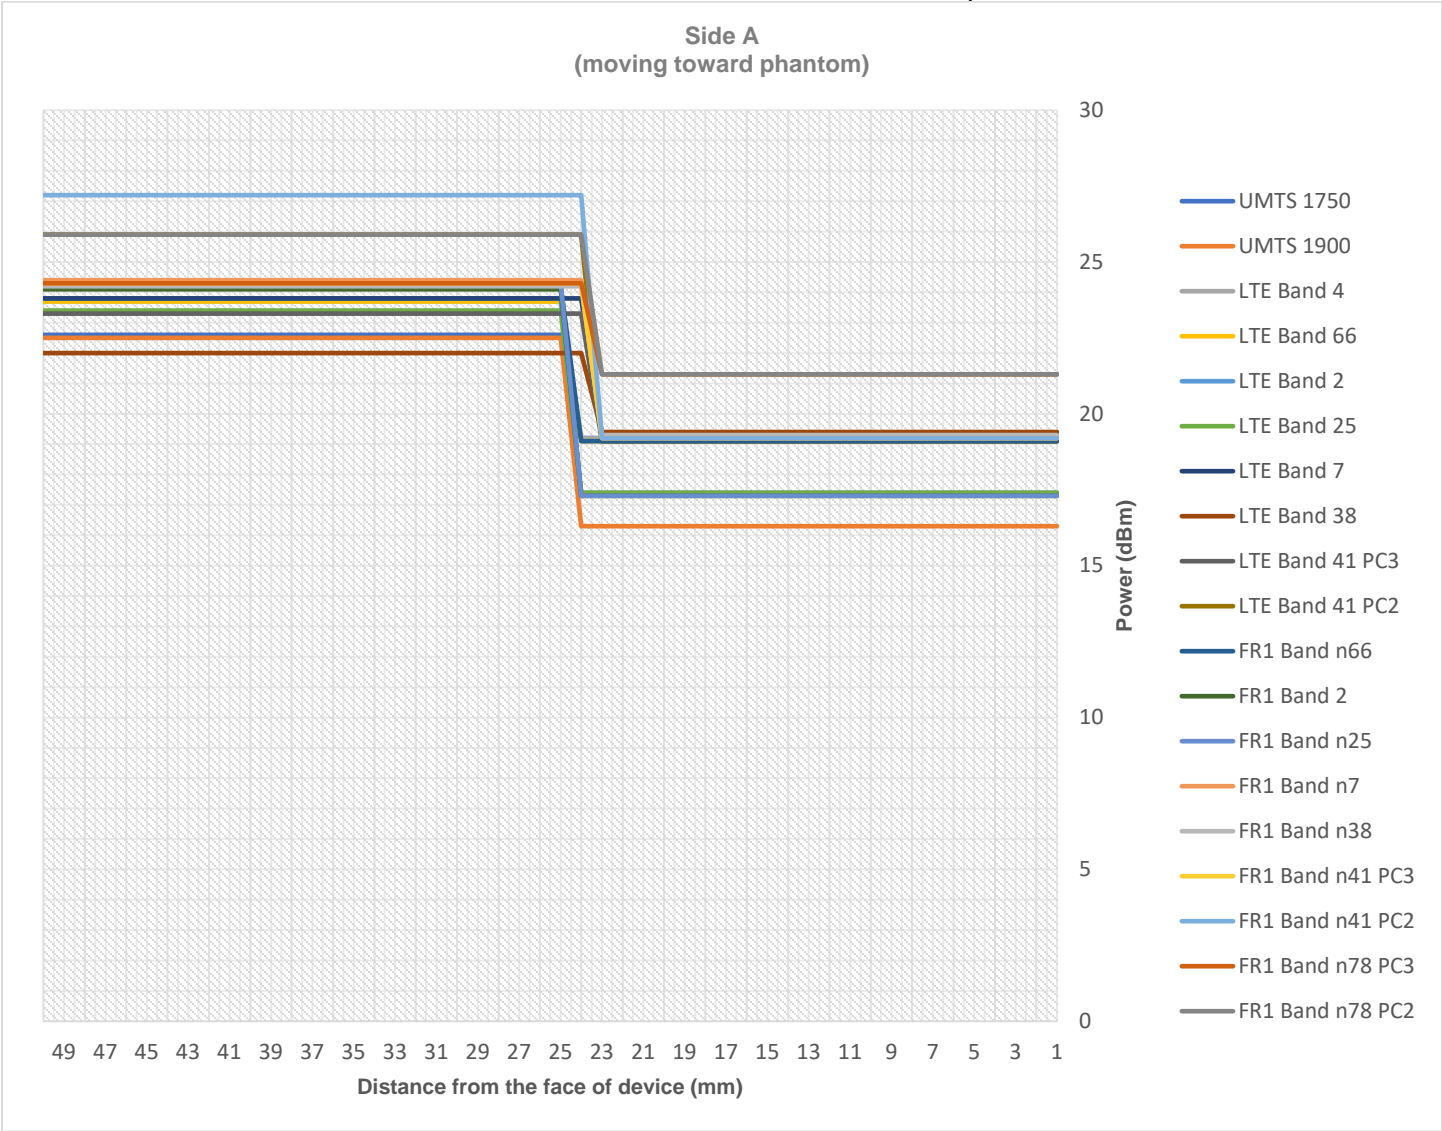


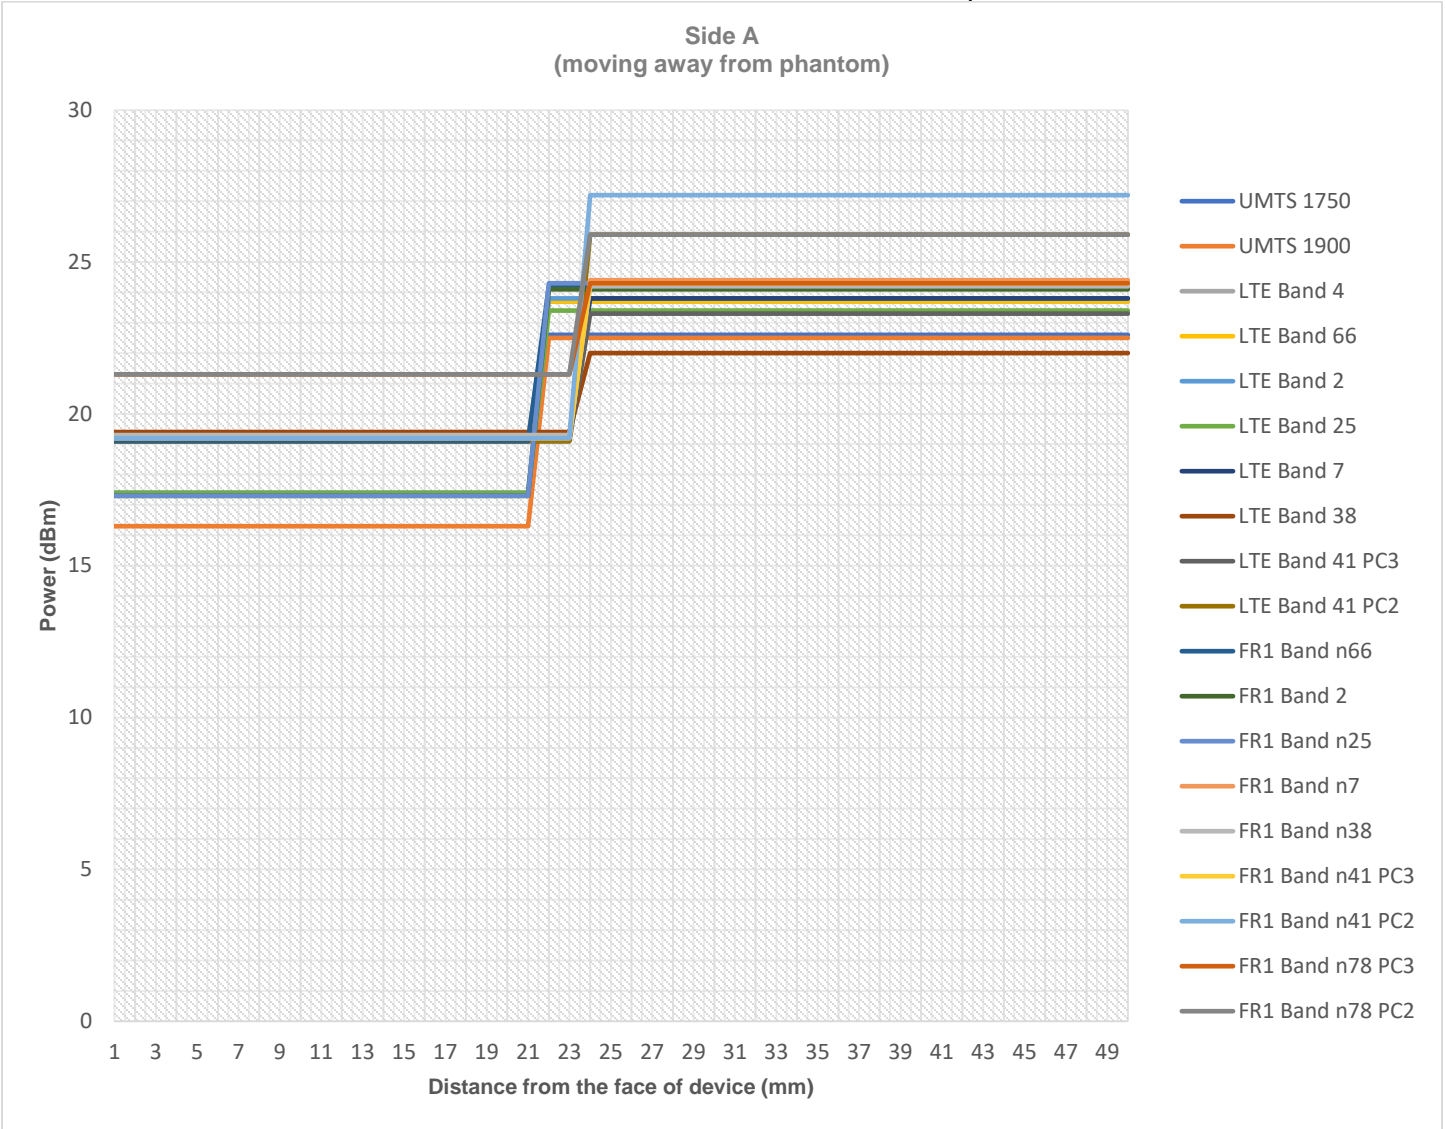





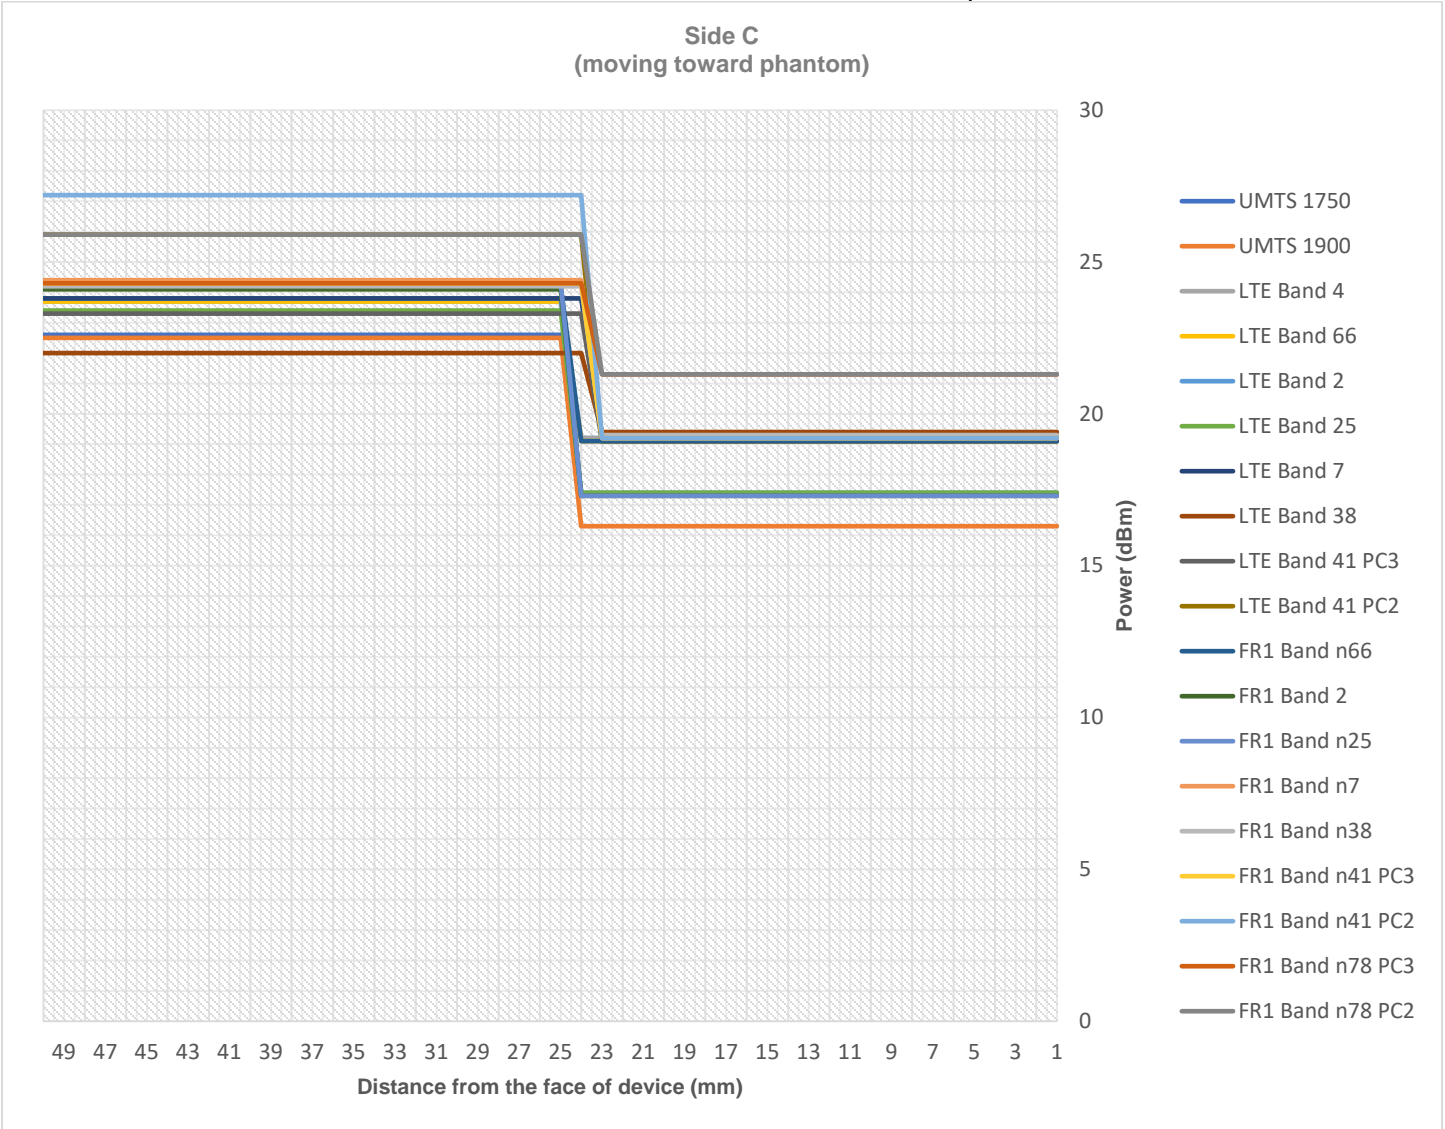


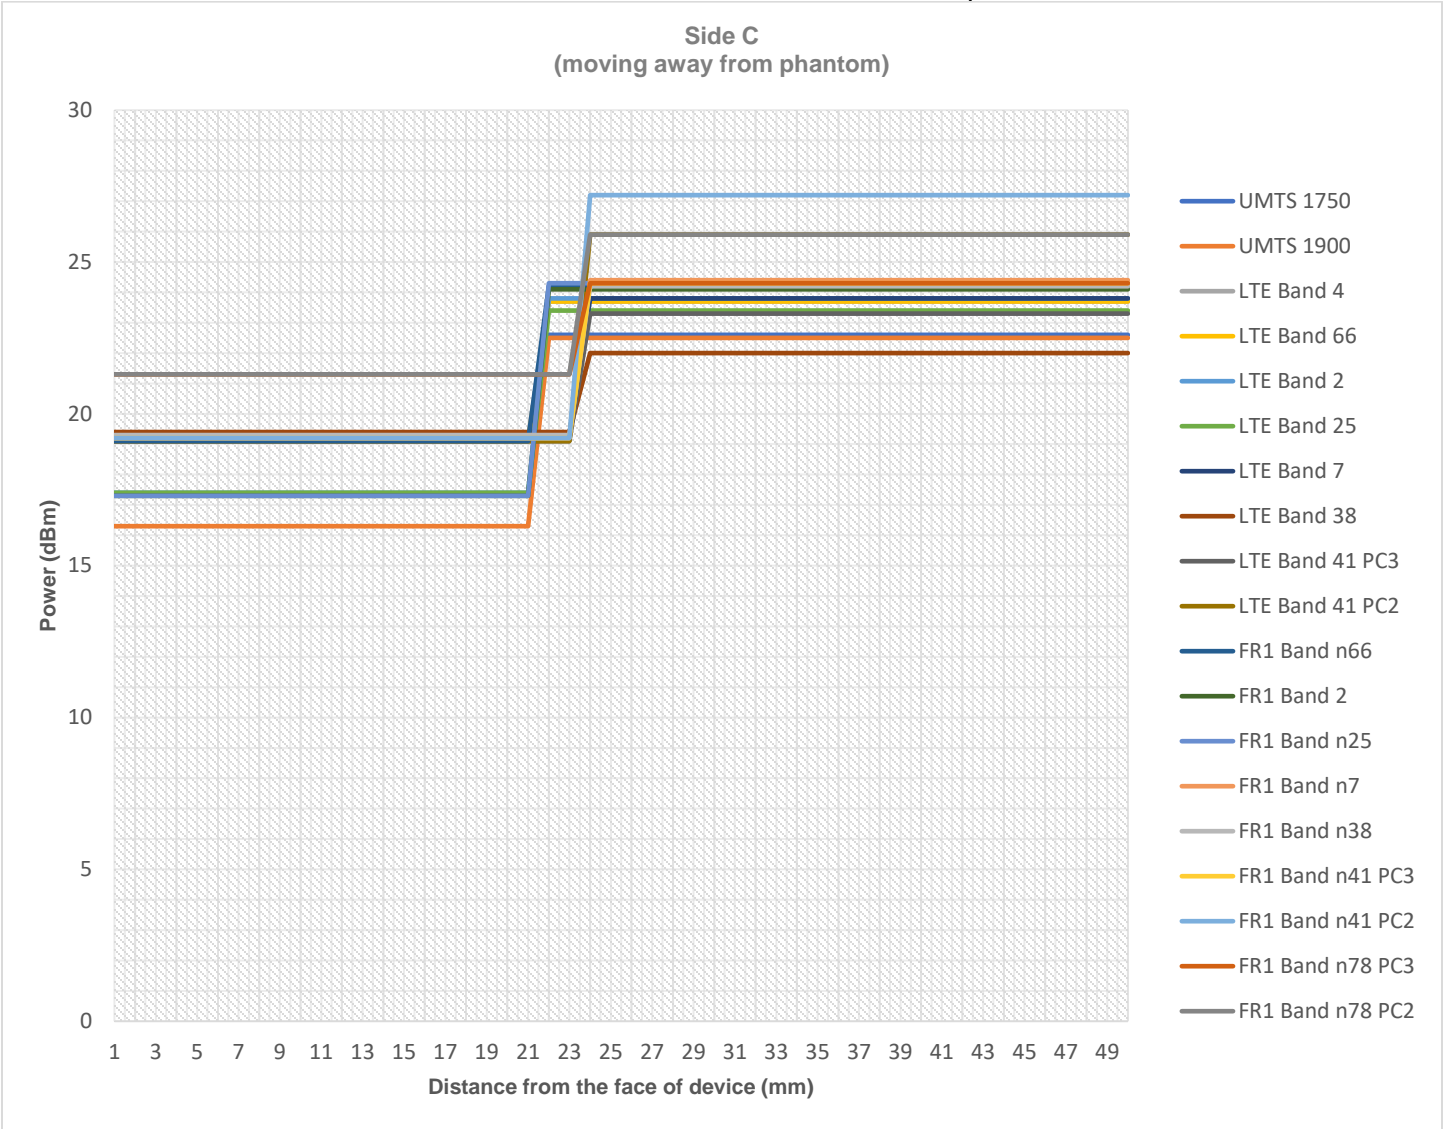

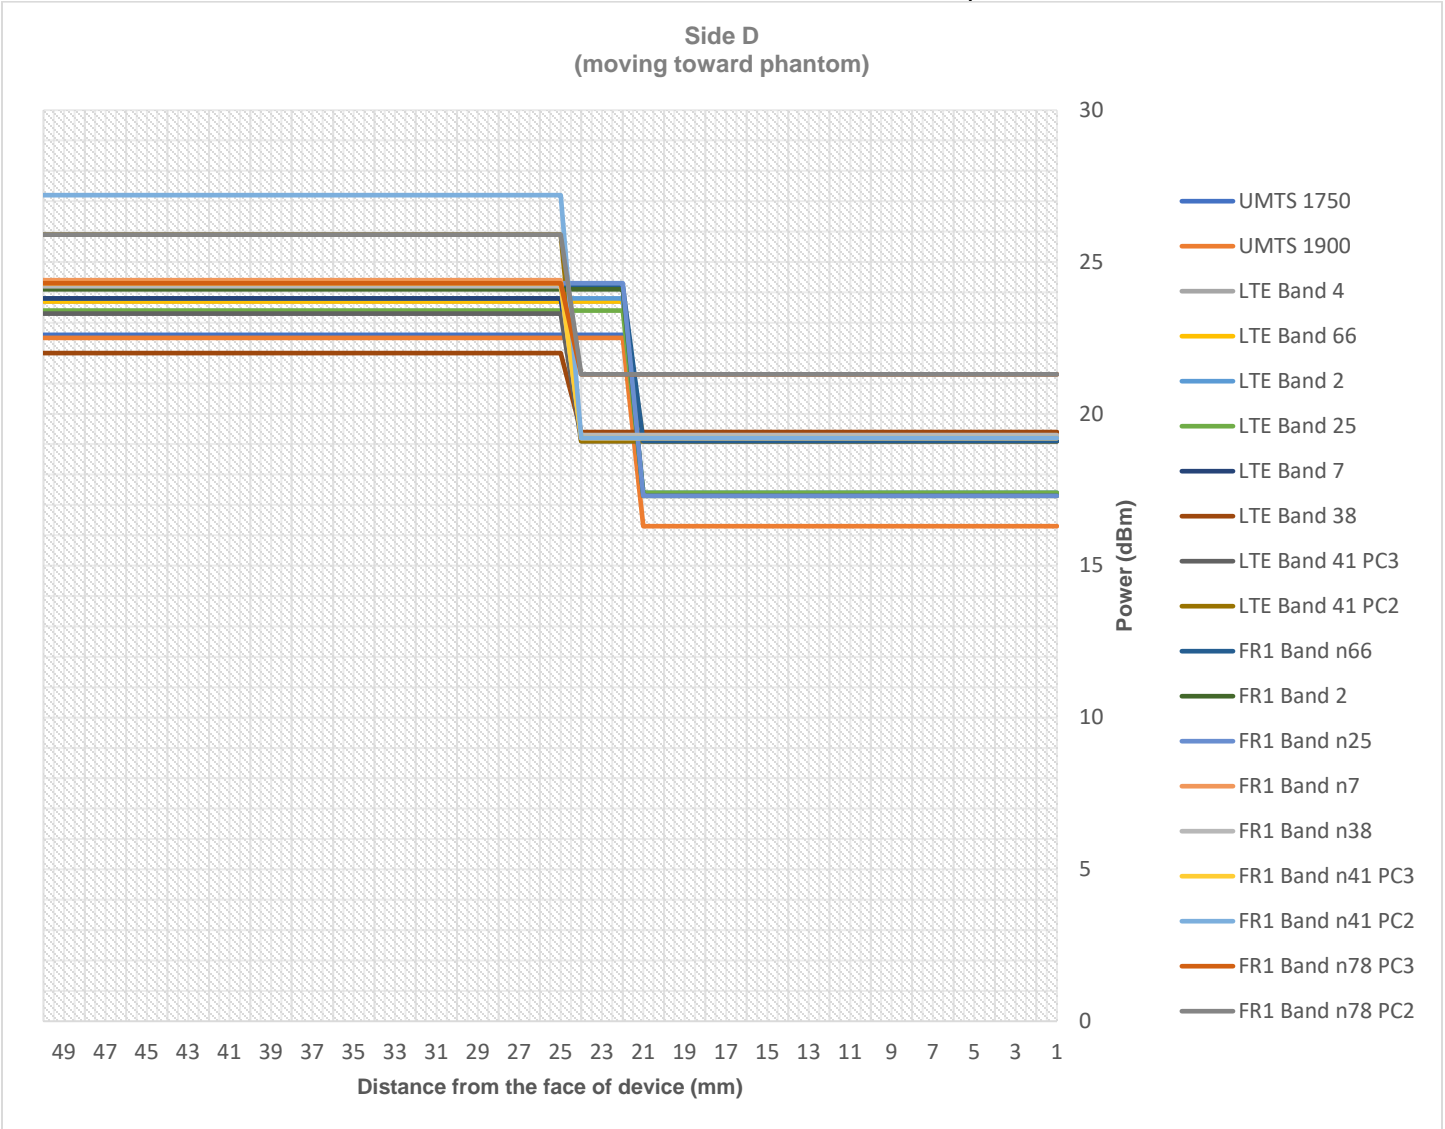

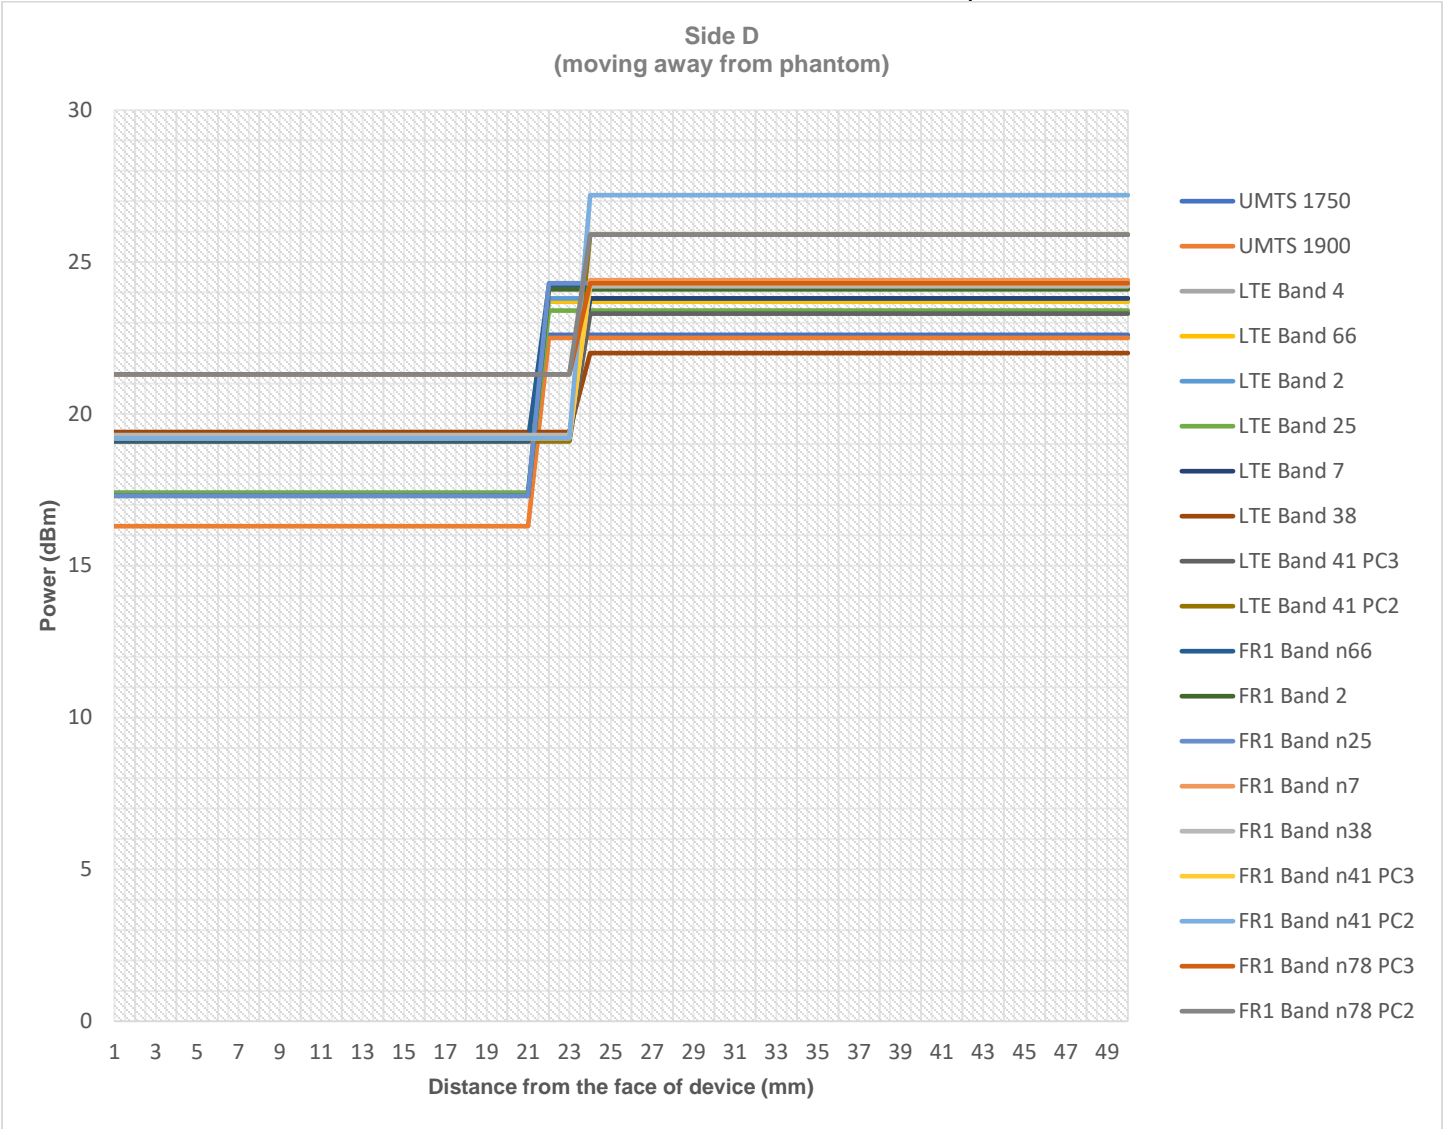

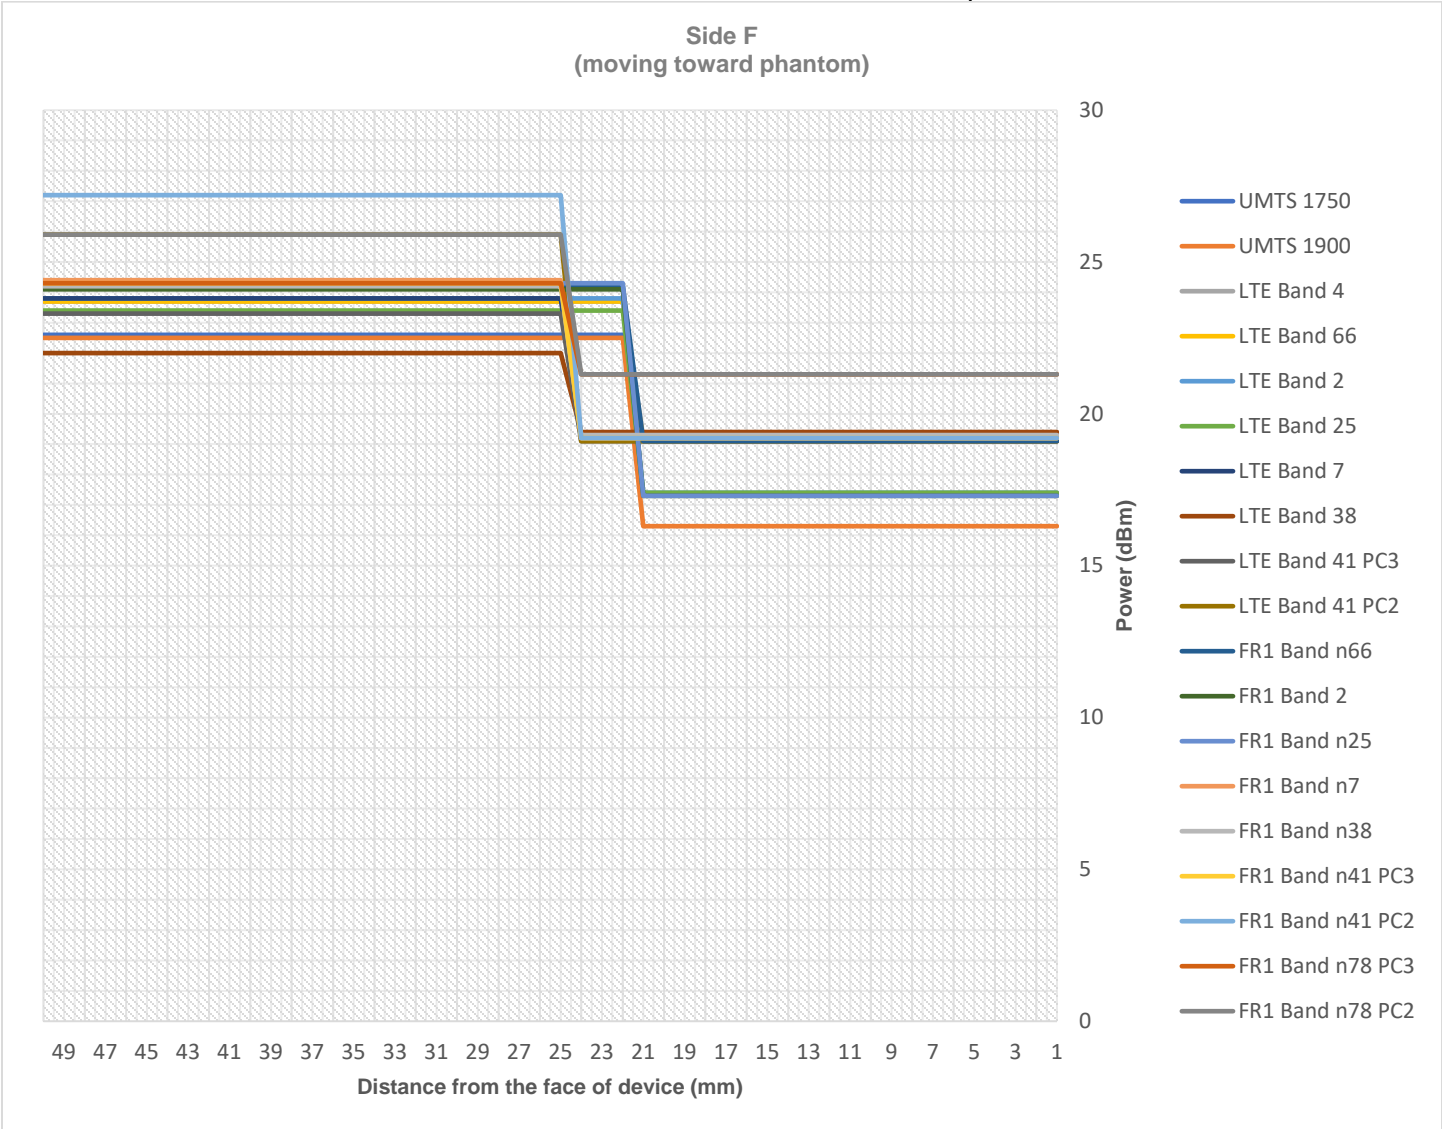

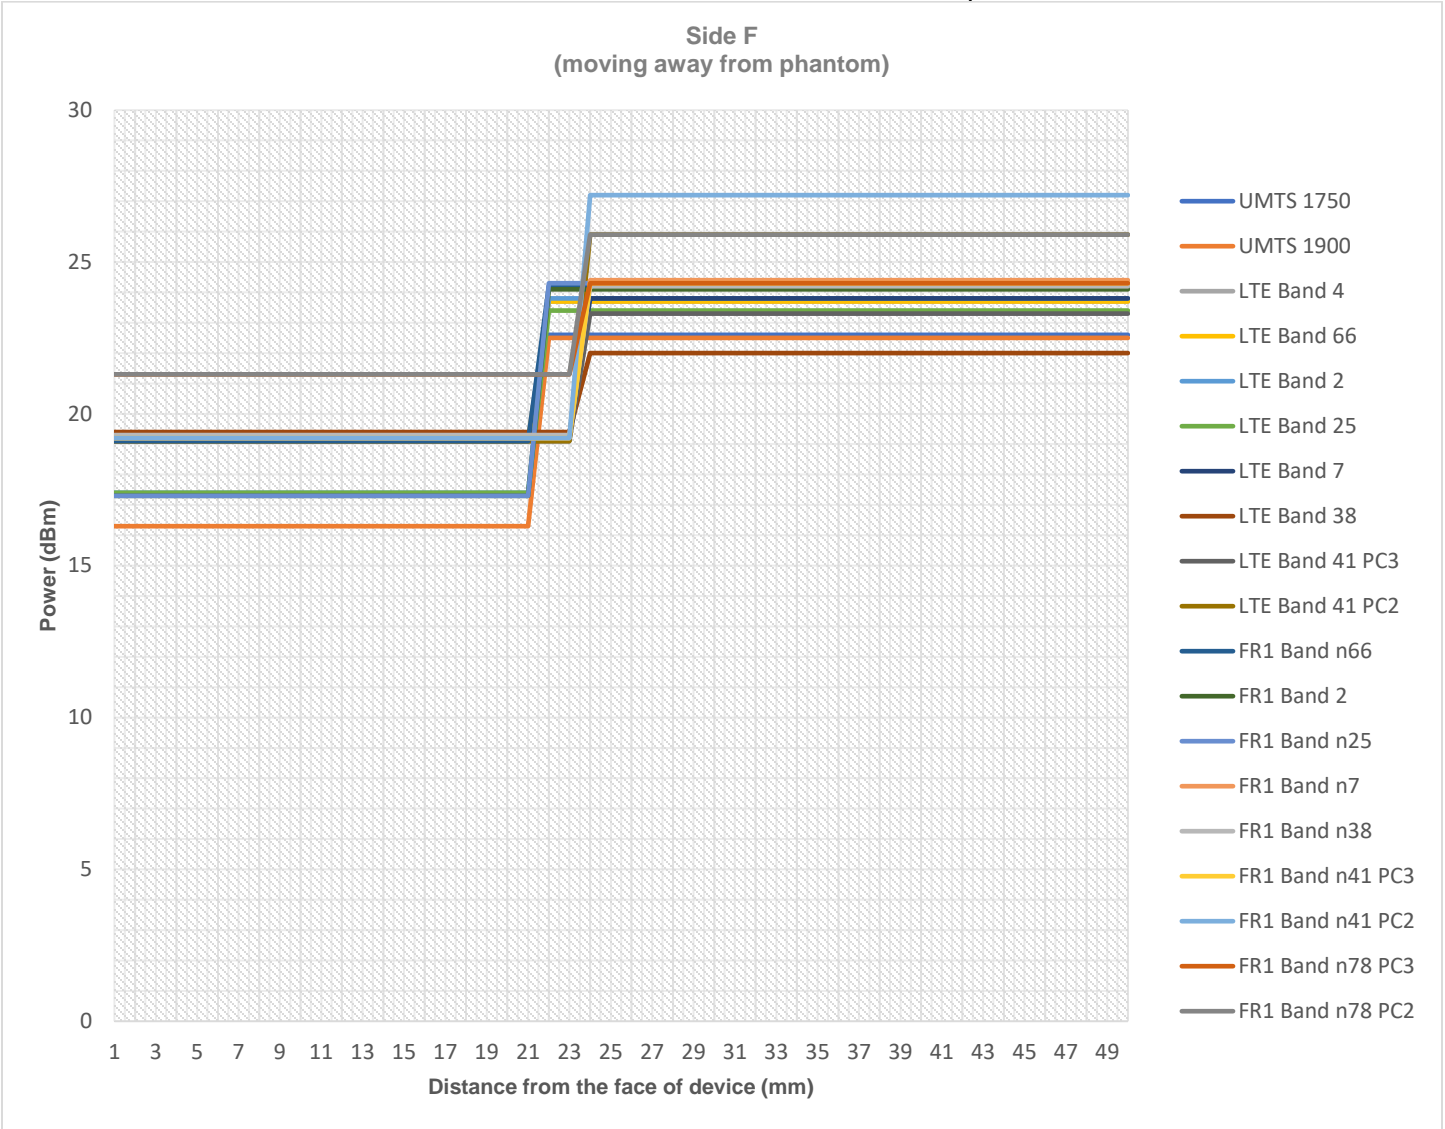

**FR1 Conducted Power**

**GENERAL NOTE:**

1. NR implementation of n2, n5, n12, n25, n41, n66 and n71 is limited to EN-DC operations only (NSA), with LTE Bands 2/4/5/7/12/13/14/25/26/30/66/71/41/48 acting as anchor bands, SAR tests for NR Bands and LTE Anchors Bands were performed separately due to limitations in SAR probe calibration factors. the detail EN-DC combination include in section3.3
2. 5G NR support SCS 15KHz / 30KHz, DFT-s/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM and support Bandwidth include in section3.3
3. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
  - a. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class 2 and 3, the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not ½ dB higher than the same configuration in DFT-s-Pi/2 BPSK and the reported SAR for the DFT-s-Pi/2 BPSK configuration is ≤ 1.45 W/kg; CP-OFDM measurement is unnecessary.
  - b. For DFT-s-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class 3, full measurement on Pi/2 BPSK/QPSK/16QAM/64QMA/256QAM with larger bandwidth, for smaller bandwidth output power also spot check 1RB 1offset configuration at Pi/2 BPSK to ensure output power will not ½ dB higher than largest supported bandwidth.
  - c. SAR testing start with the largest channel bandwidth and measure SAR for Pi/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
  - d. 50% RB allocation for Pi/2 BPSK SAR testing follows 1RB Pi/2 BPSK allocation procedure
  - e. Pi/2 BPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
  - f. QPSK/16QAM/64QAM/256QAM output powers are not ½ dB higher than the same configuration in Pi/2 BPSK, also reported SAR for the Pi/2 BPSK configuration is less than 1.45 W/kg, QPSK/16QAM/64QAM/256QAM SAR testing are not required.
  - g. Smaller bandwidth output power for each RB allocation configuration for this device will not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device.
4. FR1 band 2/5/38/78 SAR test was covered by Band 25/26/41/77; according to April 2015 TCB workshop, SAR test for overlapping FR1 bands can be reduced if
  - a. the maximum output power, including tolerance, for the smaller band is ≤ the larger band to qualify for the SAR test exclusion
  - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
5. Due to test setup limitations, SAR testing for NR was performed using Factory Test Mode software to establish the connection and perform SAR with 100% duty cycle. The Qualcomm QRCT program was used to establish the connection.

**3GPP 38.101 MPR FOR EN-DC**

**Table 6.2.2-1 Maximum power reduction (MPR) for power class 3**

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5 <sup>1</sup>	≤ 1.2 <sup>1</sup>	≤ 0.2 <sup>1</sup>
		≤ 0.5 <sup>2</sup>	≤ 0.5 <sup>2</sup>	0 <sup>2</sup>
	QPSK		≤ 1	0
	16 QAM		≤ 2	≤ 1
	64 QAM			
CP-OFDM	256 QAM		≤ 2.5	
	QPSK		≤ 4.5	
	16 QAM	≤ 3		≤ 1.5
	64 QAM	≤ 3		≤ 2
	256 QAM		≤ 3.5	
			≤ 6.5	

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

**Table 6.2.2-2 Maximum power reduction (MPR) for power class 2**

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5		
	256 QAM		≤ 2.5	
CP-OFDM			≤ 4.5	
	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM		≤ 3.5	
	256 QAM		≤ 6.5	

**Table 9.1 FR1 Full Power Measurements**

&lt;n2 Ant0&gt;

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
				372000	376000	380000	Tune-up limit	MPR
				1860	1880	1900	(dBm)	(dB)
20	PI/2 BPSK	1	1	23.91	24.09	23.73	24.5	0.0
20	PI/2 BPSK	1	53	24.02	24.10	24.04		
20	PI/2 BPSK	1	104	23.60	23.98	23.85		
20	PI/2 BPSK	50	0	22.76	22.96	23.06	23.5	1.0
20	PI/2 BPSK	50	28	22.70	23.00	22.62		
20	PI/2 BPSK	50	56	22.72	22.82	22.97		
20	PI/2 BPSK	100	0	22.92	22.78	23.04	23.5	1.0
20	QPSK	1	1	23.83	23.89	23.79	24.5	0.0
20	QPSK	1	53	23.92	23.68	23.68		
20	QPSK	1	104	23.76	23.62	23.88		
20	QPSK	50	0	22.66	22.90	22.96	23.5	1.0
20	QPSK	50	28	22.62	23.07	22.74		
20	QPSK	50	56	23.04	22.65	22.82		
20	QPSK	100	0	22.65	22.76	23.05	23.5	1.0
20	16QAM	1	1	23.64	23.94	23.88	24.5	0.0
20	16QAM	1	53	23.96	24.10	23.61		
20	16QAM	1	104	23.80	23.63	23.61		
20	16QAM	50	0	22.97	22.63	22.76	23.5	1.0
20	16QAM	50	28	23.03	22.97	22.69		
20	16QAM	50	56	23.02	22.70	22.90		
20	16QAM	100	0	22.60	22.99	22.73	23.5	1.0
20	64QAM	1	1	23.81	24.00	23.61	24.5	0.0
20	64QAM	1	53	23.90	23.68	23.82		
20	64QAM	1	104	23.78	23.84	23.79		
20	64QAM	50	0	22.99	22.67	22.85	23.5	1.0
20	64QAM	50	28	23.09	22.75	23.03		
20	64QAM	50	56	22.73	23.06	23.05		
20	64QAM	100	0	22.72	22.63	22.69	23.5	1.0
20	256QAM	1	1	23.93	23.78	23.89	24.5	0.0
20	256QAM	1	53	23.79	24.02	23.92		
20	256QAM	1	104	23.66	23.96	23.89		
20	256QAM	50	0	22.89	23.02	22.92	23.5	1.0
20	256QAM	50	28	22.73	23.00	22.76		
20	256QAM	50	56	22.67	23.08	22.76		
20	256QAM	100	0	22.98	22.97	22.92	23.5	1.0
				371500	376000	380500	Tune-up limit	MPR
				1857.5	1880	1902.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	23.72	23.99	24.02	24.5	0.0
				371000	376000	381000	Tune-up limit	MPR
				1855	1880	1905	(dBm)	(dB)
10	PI/2 BPSK	1	1	24.07	23.83	24.09	24.5	0.0
				370500	376000	381500	Tune-up limit	MPR
				1852.5	1880	1907.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	23.82	23.97	23.69	24.5	0.0



<n2 Ant8>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				372000	376000	380000	Tune-up limit	MPR
Frequency (MHz)				1860	1880	1900	(dBm)	(dB)
20	PI/2 BPSK	1	1	20.79	20.80	20.78	21.0	0.0
20	PI/2 BPSK	1	53	20.61	20.58	20.52		
20	PI/2 BPSK	1	104	20.74	20.89	20.99		
20	PI/2 BPSK	50	0	19.89	19.91	19.83	20.0	1.0
20	PI/2 BPSK	50	28	19.54	19.84	19.90		
20	PI/2 BPSK	50	56	19.93	19.69	19.54		
20	PI/2 BPSK	100	0	19.96	19.81	19.70	20.0	1.0
20	QPSK	1	1	20.90	20.79	20.57	21.0	0.0
20	QPSK	1	53	20.95	20.54	20.54		
20	QPSK	1	104	20.70	20.59	20.76		
20	QPSK	50	0	19.61	19.54	19.77	20.0	1.0
20	QPSK	50	28	19.83	19.90	19.78		
20	QPSK	50	56	19.70	19.68	19.68		
20	QPSK	100	0	19.71	19.67	19.87	20.0	1.0
20	16QAM	1	1	20.57	20.81	20.88	21.0	0.0
20	16QAM	1	53	20.95	20.91	20.80		
20	16QAM	1	104	20.54	20.90	20.55		
20	16QAM	50	0	19.83	19.72	19.89	20.0	1.0
20	16QAM	50	28	19.97	19.70	19.58		
20	16QAM	50	56	19.75	19.86	19.58		
20	16QAM	100	0	19.82	19.90	19.94	20.0	1.0
20	64QAM	1	1	20.59	20.81	20.67	21.0	0.0
20	64QAM	1	53	20.82	20.75	20.83		
20	64QAM	1	104	20.97	20.80	20.69		
20	64QAM	50	0	19.59	19.73	19.81	20.0	1.0
20	64QAM	50	28	19.87	19.74	19.88		
20	64QAM	50	56	19.85	19.98	19.62		
20	64QAM	100	0	19.55	19.90	19.70	20.0	1.0
20	256QAM	1	1	20.64	20.50	20.73	21.0	0.0
20	256QAM	1	53	20.56	20.95	20.56		
20	256QAM	1	104	20.52	20.58	20.84		
20	256QAM	50	0	19.79	19.69	19.53	20.0	1.0
20	256QAM	50	28	19.87	19.91	19.63		
20	256QAM	50	56	19.62	19.88	19.85		
20	256QAM	100	0	19.77	19.62	19.96	20.0	1.0
Channel				371500	376000	380500	Tune-up limit	MPR
Frequency (MHz)				1857.5	1880	1902.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	20.63	20.55	20.93	21.0	0.0
Channel				371000	376000	381000	Tune-up limit	MPR
Frequency (MHz)				1855	1880	1905	(dBm)	(dB)
10	PI/2 BPSK	1	1	20.80	20.58	20.57	21.0	0.0
Channel				370500	376000	381500	Tune-up limit	MPR
Frequency (MHz)				1852.5	1880	1907.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	20.65	20.87	20.86	21.0	0.0

<n5 Ant0>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				166800	167300	167300	Tune-up limit	MPR
Frequency (MHz)				834	836.5	839	(dBm)	(dB)
20	PI/2 BPSK	1	1	23.83	23.87	23.79	24.0	0.0
20	PI/2 BPSK	1	53	23.55	23.58	23.79		
20	PI/2 BPSK	1	104	23.71	23.68	23.76		
20	PI/2 BPSK	50	0	22.80	23.00	22.70	23.0	1.0
20	PI/2 BPSK	50	28	22.86	22.64	22.79		
20	PI/2 BPSK	50	56	22.53	22.69	22.78		
20	PI/2 BPSK	100	0	22.98	22.79	22.91	23.0	1.0
20	QPSK	1	1	23.52	23.69	23.69	24.0	0.0
20	QPSK	1	53	23.68	23.70	23.82		
20	QPSK	1	104	23.80	23.97	23.91		
20	QPSK	50	0	22.85	22.92	22.52	23.0	1.0
20	QPSK	50	28	22.78	22.65	22.62		
20	QPSK	50	56	22.93	22.95	22.84		
20	QPSK	100	0	22.90	22.59	22.67	23.0	1.0
20	16QAM	1	1	23.65	23.88	23.56	24.0	0.0
20	16QAM	1	53	23.96	23.73	23.71		
20	16QAM	1	104	23.80	23.91	23.87		
20	16QAM	50	0	22.59	22.54	22.81	23.0	1.0
20	16QAM	50	28	22.81	22.55	22.91		
20	16QAM	50	56	22.68	22.55	22.96		
20	16QAM	100	0	22.54	23.00	22.72	23.0	1.0
20	64QAM	1	1	23.83	23.55	23.83	24.0	0.0
20	64QAM	1	53	23.60	23.79	23.54		
20	64QAM	1	104	23.82	23.81	23.94		
20	64QAM	50	0	22.71	22.76	22.68	23.0	1.0
20	64QAM	50	28	22.62	22.77	22.63		
20	64QAM	50	56	22.73	22.54	22.73		
20	64QAM	100	0	22.75	22.88	22.86	23.0	1.0
20	256QAM	1	1	23.91	23.95	23.67	24.0	0.0
20	256QAM	1	53	23.67	23.80	23.59		
20	256QAM	1	104	23.71	23.85	23.75		
20	256QAM	50	0	22.89	22.65	22.79	23.0	1.0
20	256QAM	50	28	22.92	22.94	22.58		
20	256QAM	50	56	22.69	22.97	22.95		
20	256QAM	100	0	22.87	22.55	22.87	23.0	1.0
Channel				166300	167300	167800	Tune-up limit	MPR
Frequency (MHz)				831.5	836.5	841.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	23.72	23.53	23.72	24.0	0.0
Channel				165800	167300	168200	Tune-up limit	MPR
Frequency (MHz)				829	836.5	844	(dBm)	(dB)
10	PI/2 BPSK	1	1	23.68	23.64	23.81	24.0	0.0
Channel				165300	167300	168700	Tune-up limit	MPR
Frequency (MHz)				826.5	836.5	846.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	23.99	23.56	23.62	24.0	0.0

<n5 Ant1>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				166800	167300	167300	Tune-up limit	MPR
Frequency (MHz)				834	836.5	839	(dBm)	(dB)
20	PI/2 BPSK	1	1	20.57	20.52	20.60	21.0	0.0
20	PI/2 BPSK	1	53	20.69	20.66	20.85		
20	PI/2 BPSK	1	104	20.90	20.88	20.69		
20	PI/2 BPSK	50	0	19.57	19.79	19.98	20.0	1.0
20	PI/2 BPSK	50	28	19.55	19.82	19.90		
20	PI/2 BPSK	50	56	19.91	19.98	19.71		
20	PI/2 BPSK	100	0	19.69	19.51	19.54	20.0	1.0
20	QPSK	1	1	20.58	20.53	20.66	21.0	0.0
20	QPSK	1	53	20.79	20.62	20.64		
20	QPSK	1	104	20.50	20.63	20.73		
20	QPSK	50	0	19.53	19.88	19.52	20.0	1.0
20	QPSK	50	28	19.75	19.59	19.50		
20	QPSK	50	56	19.96	19.66	19.95		
20	QPSK	100	0	19.98	19.69	19.52	20.0	1.0
20	16QAM	1	1	20.52	20.98	20.88	21.0	0.0
20	16QAM	1	53	20.65	20.74	20.72		
20	16QAM	1	104	20.94	20.62	20.69		
20	16QAM	50	0	19.79	19.93	19.99	20.0	1.0
20	16QAM	50	28	19.79	19.50	19.65		
20	16QAM	50	56	19.50	19.94	19.64		
20	16QAM	100	0	19.98	19.54	19.72	20.0	1.0
20	64QAM	1	1	20.68	20.51	20.68	21.0	0.0
20	64QAM	1	53	20.87	20.94	20.85		
20	64QAM	1	104	20.55	20.96	20.69		
20	64QAM	50	0	19.73	19.92	19.81	20.0	1.0
20	64QAM	50	28	19.95	19.56	20.00		
20	64QAM	50	56	19.62	19.51	19.92		
20	64QAM	100	0	19.54	19.71	19.51	20.0	1.0
20	256QAM	1	1	20.94	20.74	20.91	21.0	0.0
20	256QAM	1	53	20.92	20.59	20.68		
20	256QAM	1	104	20.63	20.94	20.61		
20	256QAM	50	0	19.94	19.62	19.57	20.0	1.0
20	256QAM	50	28	19.66	19.82	19.70		
20	256QAM	50	56	19.75	19.69	19.96		
20	256QAM	100	0	19.97	19.88	19.78	20.0	1.0
Channel				166300	167300	167800	Tune-up limit	MPR
Frequency (MHz)				831.5	836.5	841.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	20.51	20.99	20.63	21.0	0.0
Channel				165800	167300	168200	Tune-up limit	MPR
Frequency (MHz)				829	836.5	844	(dBm)	(dB)
10	PI/2 BPSK	1	1	20.86	20.64	20.70	21.0	0.0
Channel				165300	167300	168700	Tune-up limit	MPR
Frequency (MHz)				826.5	836.5	846.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	20.53	20.61	20.76	21.0	0.0

<n7 Ant0>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				502000	507000	512000	Tune-up limit	MPR
Frequency (MHz)				2510	2535	2560	(dBm)	(dB)
20	PI/2 BPSK	1	1	24.19	24.27	24.06	24.5	0.0
20	PI/2 BPSK	1	53	24.14	24.40	24.06		
20	PI/2 BPSK	1	104	24.09	24.38	24.16		
20	PI/2 BPSK	50	0	23.21	23.01	23.17	23.5	1.0
20	PI/2 BPSK	50	28	23.04	22.95	23.02		
20	PI/2 BPSK	50	56	23.37	23.39	23.31		
20	PI/2 BPSK	100	0	23.00	23.37	23.14	23.5	1.0
20	QPSK	1	1	24.38	24.15	24.14	24.5	0.0
20	QPSK	1	53	24.34	24.09	24.05		
20	QPSK	1	104	24.02	24.00	24.00		
20	QPSK	50	0	23.21	23.04	22.91	23.5	1.0
20	QPSK	50	28	22.95	23.16	23.19		
20	QPSK	50	56	23.30	23.35	23.29		
20	QPSK	100	0	23.06	23.39	22.94	23.5	1.0
20	16QAM	1	1	24.16	23.93	23.99	24.5	0.0
20	16QAM	1	53	23.90	24.32	23.97		
20	16QAM	1	104	24.27	24.22	24.23		
20	16QAM	50	0	23.33	22.98	23.28	23.5	1.0
20	16QAM	50	28	23.35	23.14	23.40		
20	16QAM	50	56	23.03	23.06	23.10		
20	16QAM	100	0	23.28	22.99	23.37	23.5	1.0
20	64QAM	1	1	24.00	23.97	24.37	24.5	0.0
20	64QAM	1	53	24.24	23.91	24.36		
20	64QAM	1	104	24.03	24.09	24.16		
20	64QAM	50	0	23.17	23.16	23.10	23.5	1.0
20	64QAM	50	28	23.20	22.96	23.37		
20	64QAM	50	56	23.00	23.07	23.01		
20	64QAM	100	0	23.05	23.30	22.95	23.5	1.0
20	256QAM	1	1	24.29	24.22	24.19	24.5	0.0
20	256QAM	1	53	24.05	24.08	24.08		
20	256QAM	1	104	24.14	24.25	24.10		
20	256QAM	50	0	23.40	22.98	23.05	23.5	1.0
20	256QAM	50	28	23.22	22.91	23.12		
20	256QAM	50	56	23.23	23.35	23.10		
20	256QAM	100	0	23.17	23.13	22.93	23.5	1.0
Channel				501500	507000	511500	Tune-up limit	MPR
Frequency (MHz)				2507.5	2535	2562.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	24.33	24.29	24.02	24.5	0.0
Channel				501000	507000	511000	Tune-up limit	MPR
Frequency (MHz)				2505	2535	2565	(dBm)	(dB)
10	PI/2 BPSK	1	1	24.28	24.04	23.93	24.5	0.0
Channel				500500	507000	510500	Tune-up limit	MPR
Frequency (MHz)				2502.5	2535	2567.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	24.31	23.92	24.29	24.5	0.0

<n12 Ant0>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
				141300	141500	141700	Tune-up limit	MPR
Channel				141300	141500	141700	Tune-up limit	MPR
Frequency (MHz)				706.5	707.5	708.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	23.83	23.65	23.72	24.0	0.0
15	PI/2 BPSK	1	40	23.54	23.57	23.92		
15	PI/2 BPSK	1	78	23.99	23.64	23.52		
15	PI/2 BPSK	37	0	22.96	22.67	22.95	23.0	1.0
15	PI/2 BPSK	37	21	22.76	22.62	22.58		
15	PI/2 BPSK	37	42	22.87	22.83	22.73		
15	PI/2 BPSK	75	0	22.52	22.96	22.79	23.0	1.0
15	QPSK	1	1	23.83	23.99	23.90	24.0	0.0
15	QPSK	1	40	23.81	23.83	23.80		
15	QPSK	1	78	23.58	23.77	23.68		
15	QPSK	37	0	22.62	22.84	22.82	23.0	1.0
15	QPSK	37	21	22.53	22.72	22.64		
15	QPSK	37	42	22.74	22.86	22.99		
15	QPSK	75	0	22.62	22.78	22.66	23.0	1.0
15	16QAM	1	1	23.72	23.78	23.89	24.0	0.0
15	16QAM	1	40	23.87	23.53	23.96		
15	16QAM	1	78	23.51	23.77	23.67		
15	16QAM	37	0	22.70	22.58	22.68	23.0	1.0
15	16QAM	37	21	22.68	22.61	22.84		
15	16QAM	37	42	22.66	22.97	22.51		
15	16QAM	75	0	22.58	22.69	22.87	23.0	1.0
15	64QAM	1	1	23.88	23.68	23.77	24.0	0.0
15	64QAM	1	40	23.54	23.94	23.57		
15	64QAM	1	78	23.97	23.71	23.70		
15	64QAM	37	0	22.69	22.63	22.77	23.0	1.0
15	64QAM	37	21	22.53	22.57	22.99		
15	64QAM	37	42	22.92	22.65	22.67		
15	64QAM	75	0	22.79	22.90	22.51	23.0	1.0
15	256QAM	1	1	23.84	23.66	23.76	24.0	0.0
15	256QAM	1	40	23.81	23.59	23.54		
15	256QAM	1	78	23.83	23.68	23.99		
15	256QAM	37	0	22.94	22.56	22.51	23.0	1.0
15	256QAM	37	21	22.61	22.96	22.97		
15	256QAM	37	42	22.91	22.81	22.62		
15	256QAM	75	0	22.61	22.91	22.86	23.0	1.0
Channel				140920	141500	142080	Tune-up limit	MPR
Frequency (MHz)				704.6	707.5	710.4	(dBm)	(dB)
10	PI/2 BPSK	1	1	23.88	23.88	23.92	24.0	0.0
Channel				140560	141500	142440	Tune-up limit	MPR
Frequency (MHz)				702.8	707.5	712.2	(dBm)	(dB)
5	PI/2 BPSK	1	1	23.77	23.65	23.57	24.0	0.0

<n25 Ant0>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				372000	376500	381000	Tune-up limit	MPR
Frequency (MHz)				1860	1882.5	1905	(dBm)	(dB)
20	PI/2 BPSK	1	1	23.88	23.83	23.92	24.5	0.0
20	PI/2 BPSK	1	53	24.08	24.30	24.15		
20	PI/2 BPSK	1	104	24.09	23.81	23.95		
20	PI/2 BPSK	50	0	23.23	23.21	23.19	23.5	1.0
20	PI/2 BPSK	50	28	23.26	23.03	23.17		
20	PI/2 BPSK	50	56	23.21	22.87	23.27		
20	PI/2 BPSK	100	0	23.20	23.11	22.83	23.5	1.0
20	QPSK	1	1	23.97	23.84	24.10	24.5	0.0
20	QPSK	1	53	23.81	23.89	23.95		
20	QPSK	1	104	24.14	23.97	24.05		
20	QPSK	50	0	22.83	23.21	23.13	23.5	1.0
20	QPSK	50	28	22.86	22.87	22.87		
20	QPSK	50	56	23.14	23.02	23.29		
20	QPSK	100	0	22.95	23.13	23.00	23.5	1.0
20	16QAM	1	1	23.91	24.26	23.97	24.5	0.0
20	16QAM	1	53	24.30	24.09	23.82		
20	16QAM	1	104	23.89	23.93	24.06		
20	16QAM	50	0	22.98	23.15	22.90	23.5	1.0
20	16QAM	50	28	23.11	22.90	22.96		
20	16QAM	50	56	23.06	22.93	23.18		
20	16QAM	100	0	22.80	23.15	23.16	23.5	1.0
20	64QAM	1	1	23.83	23.87	24.05	24.5	0.0
20	64QAM	1	53	23.85	24.29	23.81		
20	64QAM	1	104	23.98	24.16	24.07		
20	64QAM	50	0	23.12	23.09	22.98	23.5	1.0
20	64QAM	50	28	23.26	22.88	22.94		
20	64QAM	50	56	22.81	22.91	23.02		
20	64QAM	100	0	22.85	23.25	22.87	23.5	1.0
20	256QAM	1	1	24.15	23.82	24.26	24.5	0.0
20	256QAM	1	53	23.88	23.81	24.26		
20	256QAM	1	104	24.05	24.18	24.23		
20	256QAM	50	0	23.04	23.22	22.92	23.5	1.0
20	256QAM	50	28	23.30	23.23	22.82		
20	256QAM	50	56	23.08	22.88	23.08		
20	256QAM	100	0	23.17	22.95	23.17	23.5	1.0
Channel				371500	376500	381500	Tune-up limit	MPR
Frequency (MHz)				1857.5	1882.5	1907.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	23.97	23.84	24.15	24.5	0.0
Channel				371000	376500	382000	Tune-up limit	MPR
Frequency (MHz)				1855	1882.5	1910	(dBm)	(dB)
10	PI/2 BPSK	1	1	23.84	24.12	24.20	24.5	0.0
Channel				370500	376500	382500	Tune-up limit	MPR
Frequency (MHz)				1852.5	1882.5	1912.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	24.27	23.96	24.00	24.5	0.0

<n38 Ant8>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				516000	519000	522000	Tune-up limit	MPR
Frequency (MHz)				2580	2595	2610	(dBm)	(dB)
20	PI/2 BPSK	1	1	24.04	24.09	23.98	24.5	0.0
20	PI/2 BPSK	1	53	23.85	24.20	23.86		
20	PI/2 BPSK	1	104	23.77	23.93	24.12		
20	PI/2 BPSK	50	0	22.73	22.90	23.06	23.5	1.0
20	PI/2 BPSK	50	28	23.20	22.90	23.19		
20	PI/2 BPSK	50	56	23.10	22.84	23.03		
20	PI/2 BPSK	100	0	23.01	22.97	23.13	23.5	1.0
20	QPSK	1	1	24.04	23.90	23.89	24.5	0.0
20	QPSK	1	53	23.78	24.12	24.06		
20	QPSK	1	104	24.18	24.16	24.10		
20	QPSK	50	0	22.83	23.20	22.87	23.5	1.0
20	QPSK	50	28	22.81	22.74	23.09		
20	QPSK	50	56	23.15	23.06	22.89		
20	QPSK	100	0	22.77	22.83	22.87	23.5	1.0
20	16QAM	1	1	23.93	23.71	23.78	24.5	0.0
20	16QAM	1	53	24.02	23.84	23.83		
20	16QAM	1	104	23.87	24.02	23.87		
20	16QAM	50	0	23.19	22.94	23.03	23.5	1.0
20	16QAM	50	28	22.85	23.05	23.07		
20	16QAM	50	56	23.05	23.16	23.19		
20	16QAM	100	0	22.82	22.93	23.03	23.5	1.0
20	64QAM	1	1	24.19	24.06	23.75	24.5	0.0
20	64QAM	1	53	23.84	23.88	24.04		
20	64QAM	1	104	23.72	23.77	24.17		
20	64QAM	50	0	22.83	22.87	22.84	23.5	1.0
20	64QAM	50	28	23.09	22.95	22.99		
20	64QAM	50	56	23.12	23.03	23.16		
20	64QAM	100	0	23.11	23.05	22.73	23.5	1.0
20	256QAM	1	1	23.71	23.83	24.10	24.5	0.0
20	256QAM	1	53	24.11	23.73	23.99		
20	256QAM	1	104	24.02	24.02	23.91		
20	256QAM	50	0	23.15	23.13	22.86	23.5	1.0
20	256QAM	50	28	23.03	23.19	22.90		
20	256QAM	50	56	22.75	22.77	23.13		
20	256QAM	100	0	23.05	22.82	22.74	23.5	1.0
Channel				515500	519000	522500	Tune-up limit	MPR
Frequency (MHz)				2577.5	2595	2612.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	23.93	23.93	23.71	24.5	0.0
Channel				515000	519000	523000	Tune-up limit	MPR
Frequency (MHz)				2575	2595	2615	(dBm)	(dB)
10	PI/2 BPSK	1	1	24.06	23.87	23.79	24.5	0.0
Channel				514500	519000	523500	Tune-up limit	MPR
Frequency (MHz)				2572.5	2595	2617.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	23.98	23.92	23.89	24.5	0.0

<n41 PC3 Ant8>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				501200	518601	536000	Tune-up limit	MPR
Frequency (MHz)				2506	2593	2680	(dBm)	(dB)
20	PI/2 BPSK	1	1	24.00	23.99	23.81	24.5	0.0
20	PI/2 BPSK	1	53	23.90	24.30	23.89		
20	PI/2 BPSK	1	104	23.88	24.08	24.02		
20	PI/2 BPSK	50	0	22.85	23.17	22.94	23.5	1.0
20	PI/2 BPSK	50	28	23.18	23.16	23.29		
20	PI/2 BPSK	50	56	22.95	23.07	23.15		
20	PI/2 BPSK	100	0	23.14	22.91	23.20	23.5	1.0
20	QPSK	1	1	23.90	24.16	24.01	24.5	0.0
20	QPSK	1	53	24.02	23.98	23.90		
20	QPSK	1	104	24.05	24.01	24.29		
20	QPSK	50	0	23.27	22.95	23.07	23.5	1.0
20	QPSK	50	28	23.29	23.16	22.90		
20	QPSK	50	56	23.18	23.02	23.26		
20	QPSK	100	0	23.11	23.11	23.23	23.5	1.0
20	16QAM	1	1	24.22	24.02	24.25	24.5	0.0
20	16QAM	1	53	24.07	23.97	23.87		
20	16QAM	1	104	23.85	23.81	24.03		
20	16QAM	50	0	23.09	23.25	23.30	23.5	1.0
20	16QAM	50	28	23.02	22.85	23.27		
20	16QAM	50	56	23.13	23.24	22.88		
20	16QAM	100	0	23.03	22.80	22.85	23.5	1.0
20	64QAM	1	1	24.12	24.21	23.99	24.5	0.0
20	64QAM	1	53	24.24	24.27	24.28		
20	64QAM	1	104	24.18	24.28	24.12		
20	64QAM	50	0	23.13	22.90	22.94	23.5	1.0
20	64QAM	50	28	23.13	22.87	22.81		
20	64QAM	50	56	23.25	23.06	23.27		
20	64QAM	100	0	23.11	23.14	23.14	23.5	1.0
20	256QAM	1	1	23.86	23.96	24.07	24.5	0.0
20	256QAM	1	53	23.87	24.21	23.98		
20	256QAM	1	104	24.16	23.96	24.24		
20	256QAM	50	0	22.88	23.26	22.96	23.5	1.0
20	256QAM	50	28	22.86	22.87	22.95		
20	256QAM	50	56	22.93	22.99	23.28		
20	256QAM	100	0	22.81	22.95	22.87	23.5	1.0
Channel				500700	518601	536500	Tune-up limit	MPR
Frequency (MHz)				2503.5	2593	2682.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	24.29	24.08	24.15	24.5	0.0
Channel				500200	518601	537000	Tune-up limit	MPR
Frequency (MHz)				2501	2593	2685	(dBm)	(dB)
10	PI/2 BPSK	1	1	24.19	23.83	24.02	24.5	0.0
Channel				499700	518601	537500	Tune-up limit	MPR
Frequency (MHz)				2498.5	2593	2687.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	23.86	23.93	24.18	24.5	0.0



<n41 PC2 Ant8>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				501200	518601	536000	Tune-up limit	MPR
Frequency (MHz)				2506	2593	2680	(dBm)	(dB)
20	PI/2 BPSK	1	1	26.75	27.14	26.98	27.5	0.0
20	PI/2 BPSK	1	53	27.03	27.20	27.11		
20	PI/2 BPSK	1	104	27.12	26.81	27.03		
20	PI/2 BPSK	50	0	25.72	25.78	25.89	26.5	1.0
20	PI/2 BPSK	50	28	26.18	25.74	26.02		
20	PI/2 BPSK	50	56	25.83	26.09	25.87		
20	PI/2 BPSK	100	0	26.09	26.17	26.05	26.5	1.0
20	QPSK	1	1	27.15	26.90	27.16	27.5	0.0
20	QPSK	1	53	26.72	27.00	26.94		
20	QPSK	1	104	27.08	26.88	26.83		
20	QPSK	50	0	26.08	25.89	25.87	26.5	1.0
20	QPSK	50	28	26.17	25.74	25.75		
20	QPSK	50	56	26.02	25.72	26.04		
20	QPSK	100	0	25.94	26.02	26.09	26.5	1.0
20	16QAM	1	1	26.89	27.05	26.96	27.5	0.0
20	16QAM	1	53	27.19	27.06	27.15		
20	16QAM	1	104	26.88	26.86	27.09		
20	16QAM	50	0	25.79	25.91	26.15	26.5	1.0
20	16QAM	50	28	25.99	26.09	25.78		
20	16QAM	50	56	25.77	26.07	26.18		
20	16QAM	100	0	25.97	25.89	26.17	26.5	1.0
20	64QAM	1	1	26.84	26.88	27.14	27.5	0.0
20	64QAM	1	53	26.89	26.80	26.85		
20	64QAM	1	104	27.07	27.16	26.88		
20	64QAM	50	0	25.84	25.97	25.72	26.5	1.0
20	64QAM	50	28	25.90	25.72	26.16		
20	64QAM	50	56	25.85	26.08	26.09		
20	64QAM	100	0	26.07	25.82	26.04	26.5	1.0
20	256QAM	1	1	27.09	26.76	26.74	27.5	0.0
20	256QAM	1	53	26.80	26.94	27.07		
20	256QAM	1	104	26.93	26.91	27.00		
20	256QAM	50	0	25.72	25.80	25.91	26.5	1.0
20	256QAM	50	28	26.14	25.71	25.75		
20	256QAM	50	56	25.93	26.06	25.92		
20	256QAM	100	0	26.11	25.83	26.07	26.5	1.0
Channel				500700	518601	536500	Tune-up limit	MPR
Frequency (MHz)				2503.5	2593	2682.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	27.17	26.93	27.10	27.5	0.0
Channel				500200	518601	537000	Tune-up limit	MPR
Frequency (MHz)				2501	2593	2685	(dBm)	(dB)
10	PI/2 BPSK	1	1	27.00	27.03	26.89	27.5	0.0
Channel				499700	518601	537500	Tune-up limit	MPR
Frequency (MHz)				2498.5	2593	2687.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	26.81	26.84	26.83	27.5	0.0

<n66 Ant0>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
				344000	349000	354000	Tune-up limit	MPR
				1720	1745	1770	(dBm)	(dB)
20	PI/2 BPSK	1	1	23.76	23.96	23.86	24.5	0.0
20	PI/2 BPSK	1	53	24.08	24.20	24.16		
20	PI/2 BPSK	1	104	24.16	24.07	24.07		
20	PI/2 BPSK	50	0	23.18	22.85	23.10	23.5	1.0
20	PI/2 BPSK	50	28	22.76	22.80	23.14		
20	PI/2 BPSK	50	56	22.70	22.81	23.17		
20	PI/2 BPSK	100	0	22.81	23.03	22.97	23.5	1.0
20	QPSK	1	1	24.09	24.14	24.09	24.5	0.0
20	QPSK	1	53	23.81	24.05	23.96		
20	QPSK	1	104	24.08	23.91	24.07		
20	QPSK	50	0	22.94	22.78	23.10	23.5	1.0
20	QPSK	50	28	22.85	22.91	22.94		
20	QPSK	50	56	22.99	22.83	22.88		
20	QPSK	100	0	22.79	23.02	22.90	23.5	1.0
20	16QAM	1	1	23.86	23.93	24.04	24.5	0.0
20	16QAM	1	53	24.04	23.80	23.91		
20	16QAM	1	104	24.13	23.93	24.08		
20	16QAM	50	0	22.89	23.14	22.93	23.5	1.0
20	16QAM	50	28	22.80	22.85	23.07		
20	16QAM	50	56	22.80	22.74	22.94		
20	16QAM	100	0	22.96	22.85	22.98	23.5	1.0
20	64QAM	1	1	24.09	23.91	23.94	24.5	0.0
20	64QAM	1	53	23.96	23.71	24.01		
20	64QAM	1	104	23.98	23.82	23.95		
20	64QAM	50	0	23.10	22.75	22.78	23.5	1.0
20	64QAM	50	28	23.07	22.82	22.93		
20	64QAM	50	56	22.84	22.83	23.07		
20	64QAM	100	0	22.76	22.77	22.79	23.5	1.0
20	256QAM	1	1	23.90	24.06	23.95	24.5	0.0
20	256QAM	1	53	23.77	23.98	24.02		
20	256QAM	1	104	24.20	23.97	24.20		
20	256QAM	50	0	23.07	22.98	22.90	23.5	1.0
20	256QAM	50	28	23.11	23.17	23.18		
20	256QAM	50	56	22.90	23.14	22.91		
20	256QAM	100	0	22.92	22.98	22.75	23.5	1.0
				343500	349000	354500	Tune-up limit	MPR
				1717.5	1745	1772.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	23.83	24.02	23.97	24.5	0.0
				343000	349000	355000	Tune-up limit	MPR
				1715	1745	1775	(dBm)	(dB)
10	PI/2 BPSK	1	1	23.90	23.75	24.20	24.5	0.0
				342500	349000	355500	Tune-up limit	MPR
				1712.5	1745	1777.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	23.87	23.79	23.96	24.5	0.0

<n66 Ant8>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				344000	349000	354000	Tune-up limit	MPR
Frequency (MHz)				1720	1745	1770	(dBm)	(dB)
20	PI/2 BPSK	1	1	20.55	20.74	20.92	21.0	0.0
20	PI/2 BPSK	1	53	20.89	20.95	20.76		
20	PI/2 BPSK	1	104	20.81	20.61	20.82		
20	PI/2 BPSK	50	0	19.58	19.72	19.72	20.0	1.0
20	PI/2 BPSK	50	28	19.76	19.69	19.98		
20	PI/2 BPSK	50	56	19.60	19.66	19.82		
20	PI/2 BPSK	100	0	19.68	19.75	19.81	20.0	1.0
20	QPSK	1	1	20.55	20.57	20.97	21.0	0.0
20	QPSK	1	53	20.55	20.90	20.77		
20	QPSK	1	104	20.64	20.76	20.89		
20	QPSK	50	0	19.76	19.54	19.73	20.0	1.0
20	QPSK	50	28	19.71	19.53	19.82		
20	QPSK	50	56	19.91	19.77	19.74		
20	QPSK	100	0	19.97	19.71	19.51	20.0	1.0
20	16QAM	1	1	20.71	20.97	20.87	21.0	0.0
20	16QAM	1	53	20.53	20.61	20.58		
20	16QAM	1	104	20.74	20.71	20.61		
20	16QAM	50	0	19.92	19.61	19.95	20.0	1.0
20	16QAM	50	28	19.89	19.79	19.80		
20	16QAM	50	56	19.78	19.51	19.98		
20	16QAM	100	0	19.54	19.97	19.97	20.0	1.0
20	64QAM	1	1	20.73	20.70	20.58	21.0	0.0
20	64QAM	1	53	20.92	20.71	20.97		
20	64QAM	1	104	20.95	20.61	20.93		
20	64QAM	50	0	19.80	19.97	19.88	20.0	1.0
20	64QAM	50	28	19.80	19.74	19.70		
20	64QAM	50	56	19.67	19.61	19.96		
20	64QAM	100	0	19.80	19.92	19.80	20.0	1.0
20	256QAM	1	1	20.62	20.79	20.57	21.0	0.0
20	256QAM	1	53	20.93	20.90	20.60		
20	256QAM	1	104	20.54	20.64	20.63		
20	256QAM	50	0	19.68	19.64	19.55	20.0	1.0
20	256QAM	50	28	19.96	19.76	19.71		
20	256QAM	50	56	19.88	19.81	19.54		
20	256QAM	100	0	19.70	19.99	19.64	20.0	1.0
Channel				343500	349000	354500	Tune-up limit	MPR
Frequency (MHz)				1717.5	1745	1772.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	20.51	20.62	20.54	21.0	0.0
Channel				343000	349000	355000	Tune-up limit	MPR
Frequency (MHz)				1715	1745	1775	(dBm)	(dB)
10	PI/2 BPSK	1	1	20.58	20.76	20.56	21.0	0.0
Channel				342500	349000	355500	Tune-up limit	MPR
Frequency (MHz)				1712.5	1745	1777.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	20.73	20.81	20.57	21.0	0.0

<n71 Ant0>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				134600	136100	137600	Tune-up limit	MPR
Frequency (MHz)				673	680.5	688	(dBm)	(dB)
20	PI/2 BPSK	1	1	23.64	23.79	23.91	24.0	0.0
20	PI/2 BPSK	1	53	23.66	23.55	23.64		
20	PI/2 BPSK	1	104	23.74	23.54	23.73		
20	PI/2 BPSK	50	0	22.70	22.94	22.54	23.0	1.0
20	PI/2 BPSK	50	28	22.84	22.82	22.69		
20	PI/2 BPSK	50	56	22.95	22.58	22.85		
20	PI/2 BPSK	100	0	22.88	22.75	22.93	23.0	1.0
20	QPSK	1	1	23.96	23.55	23.57	24.0	0.0
20	QPSK	1	53	23.76	23.83	23.70		
20	QPSK	1	104	23.88	23.93	23.89		
20	QPSK	50	0	22.53	22.68	22.96	23.0	1.0
20	QPSK	50	28	22.61	22.82	22.59		
20	QPSK	50	56	22.74	22.86	22.90		
20	QPSK	100	0	22.74	22.99	22.89	23.0	1.0
20	16QAM	1	1	23.90	23.86	23.74	24.0	0.0
20	16QAM	1	53	23.80	23.62	23.70		
20	16QAM	1	104	23.60	23.87	23.93		
20	16QAM	50	0	22.79	22.68	22.68	23.0	1.0
20	16QAM	50	28	22.50	22.75	22.69		
20	16QAM	50	56	22.51	22.57	22.88		
20	16QAM	100	0	22.98	22.76	22.52	23.0	1.0
20	64QAM	1	1	23.54	23.52	23.88	24.0	0.0
20	64QAM	1	53	23.71	23.70	23.66		
20	64QAM	1	104	23.68	23.85	23.88		
20	64QAM	50	0	22.88	22.66	22.52	23.0	1.0
20	64QAM	50	28	22.95	22.60	22.71		
20	64QAM	50	56	22.83	22.84	22.54		
20	64QAM	100	0	22.83	22.94	22.94	23.0	1.0
20	256QAM	1	1	23.90	23.86	23.85	24.0	0.0
20	256QAM	1	53	24.00	23.86	23.88		
20	256QAM	1	104	23.64	23.53	23.92		
20	256QAM	50	0	22.79	22.83	22.95	23.0	1.0
20	256QAM	50	28	22.78	22.99	22.86		
20	256QAM	50	56	22.83	22.66	22.66		
20	256QAM	100	0	22.83	22.89	22.50	23.0	1.0
Channel				134100	136100	138100	Tune-up limit	MPR
Frequency (MHz)				670.5	680.5	690.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	23.96	23.59	23.93	24.0	0.0
Channel				133600	136100	138600	Tune-up limit	MPR
Frequency (MHz)				668	680.5	693	(dBm)	(dB)
10	PI/2 BPSK	1	1	23.73	23.83	23.55	24.0	0.0
Channel				133100	136100	139100	Tune-up limit	MPR
Frequency (MHz)				665.5	680.5	685.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	23.75	23.91	23.92	24.0	0.0

<n78 PC3 Ant4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				620666	636667	652666	Tune-up limit	MPR
Frequency (MHz)				3310	3550	3790	(dBm)	(dB)
20	PI/2 BPSK	1	1	23.86	24.26	24.06	24.5	0.0
20	PI/2 BPSK	1	53	24.22	24.30	24.14		
20	PI/2 BPSK	1	104	23.83	24.11	24.12		
20	PI/2 BPSK	50	0	22.95	23.06	22.87	23.5	1.0
20	PI/2 BPSK	50	28	23.21	22.88	23.27		
20	PI/2 BPSK	50	56	22.94	23.09	23.02		
20	PI/2 BPSK	100	0	23.24	23.02	23.00	23.5	1.0
20	QPSK	1	1	23.97	24.12	23.86	24.5	0.0
20	QPSK	1	53	24.11	23.95	24.28		
20	QPSK	1	104	24.10	23.85	24.11		
20	QPSK	50	0	23.01	23.05	23.26	23.5	1.0
20	QPSK	50	28	23.07	23.25	22.96		
20	QPSK	50	56	23.13	23.13	22.83		
20	QPSK	100	0	23.08	22.97	23.22	23.5	1.0
20	16QAM	1	1	24.08	24.02	24.14	24.5	0.0
20	16QAM	1	53	24.14	24.13	24.15		
20	16QAM	1	104	23.95	23.85	24.10		
20	16QAM	50	0	23.16	23.30	22.96	23.5	1.0
20	16QAM	50	28	23.29	22.95	23.15		
20	16QAM	50	56	22.92	22.86	23.20		
20	16QAM	100	0	23.05	23.08	23.00	23.5	1.0
20	64QAM	1	1	23.89	24.08	24.29	24.5	0.0
20	64QAM	1	53	24.11	23.81	24.03		
20	64QAM	1	104	24.13	23.95	24.11		
20	64QAM	50	0	23.12	23.21	23.15	23.5	1.0
20	64QAM	50	28	22.88	23.10	22.86		
20	64QAM	50	56	22.93	23.03	22.95		
20	64QAM	100	0	22.90	23.26	23.15	23.5	1.0
20	256QAM	1	1	24.27	24.11	23.89	24.5	0.0
20	256QAM	1	53	23.94	23.91	23.93		
20	256QAM	1	104	23.95	23.91	24.09		
20	256QAM	50	0	23.24	22.98	23.00	23.5	1.0
20	256QAM	50	28	23.19	23.00	23.10		
20	256QAM	50	56	23.04	22.93	23.02		
20	256QAM	100	0	23.23	23.01	23.28	23.5	1.0
Channel				620166	376000	653166	Tune-up limit	MPR
Frequency (MHz)				3307.5	1880	3792.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	24.15	24.16	24.07	24.5	0.0
Channel				619666	376000	653666	Tune-up limit	MPR
Frequency (MHz)				3305	1880	3795	(dBm)	(dB)
10	PI/2 BPSK	1	1	24.00	23.99	23.91	24.5	0.0
Channel				619166	376000	654166	Tune-up limit	MPR
Frequency (MHz)				3302.5	1880	3797.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	24.22	23.82	24.14	24.5	0.0

<n78 PC3 Ant6>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				620666	636667	652666	Tune-up limit	MPR
Frequency (MHz)				3310	3550	3790	(dBm)	(dB)
20	PI/2 BPSK	1	1	21.38	21.24	21.11	21.5	0.0
20	PI/2 BPSK	1	53	21.28	21.08	21.29		
20	PI/2 BPSK	1	104	21.42	21.13	21.10		
20	PI/2 BPSK	50	0	20.32	20.00	20.24	20.5	1.0
20	PI/2 BPSK	50	28	20.04	20.26	20.13		
20	PI/2 BPSK	50	56	20.19	20.47	20.42		
20	PI/2 BPSK	100	0	20.13	20.35	20.40	20.5	1.0
20	QPSK	1	1	21.02	21.01	21.36	21.5	0.0
20	QPSK	1	53	21.44	21.19	21.25		
20	QPSK	1	104	21.17	21.44	21.33		
20	QPSK	50	0	20.19	20.46	20.02	20.5	1.0
20	QPSK	50	28	20.22	20.31	20.11		
20	QPSK	50	56	20.36	20.00	20.33		
20	QPSK	100	0	20.05	20.19	20.04	20.5	1.0
20	16QAM	1	1	21.49	21.21	21.47	21.5	0.0
20	16QAM	1	53	21.44	21.18	21.45		
20	16QAM	1	104	21.22	21.19	21.20		
20	16QAM	50	0	20.04	20.06	20.43	20.5	1.0
20	16QAM	50	28	20.43	20.20	20.04		
20	16QAM	50	56	20.01	20.40	20.40		
20	16QAM	100	0	20.20	20.29	20.15	20.5	1.0
20	64QAM	1	1	21.45	21.05	21.47	21.5	0.0
20	64QAM	1	53	21.25	21.08	21.42		
20	64QAM	1	104	21.04	21.06	21.44		
20	64QAM	50	0	20.38	20.48	20.45	20.5	1.0
20	64QAM	50	28	20.19	20.44	20.36		
20	64QAM	50	56	20.12	20.45	20.00		
20	64QAM	100	0	20.07	20.30	20.23	20.5	1.0
20	256QAM	1	1	21.37	21.05	21.09	21.5	0.0
20	256QAM	1	53	21.35	21.20	21.30		
20	256QAM	1	104	21.40	21.22	21.20		
20	256QAM	50	0	20.47	20.19	20.42	20.5	1.0
20	256QAM	50	28	20.21	20.47	20.45		
20	256QAM	50	56	20.15	20.34	20.32		
20	256QAM	100	0	20.02	20.31	20.34	20.5	1.0
Channel				620166	376000	653166	Tune-up limit	MPR
Frequency (MHz)				3307.5	1880	3792.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	21.11	21.08	21.03	21.5	0.0
Channel				619666	376000	653666	Tune-up limit	MPR
Frequency (MHz)				3305	1880	3795	(dBm)	(dB)
10	PI/2 BPSK	1	1	21.26	21.41	21.08	21.5	0.0
Channel				619166	376000	654166	Tune-up limit	MPR
Frequency (MHz)				3302.5	1880	3797.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	21.38	21.34	21.20	21.5	0.0

<n78 PC2 Ant4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				620666	636667	652666	Tune-up limit	MPR
Frequency (MHz)				3310	3550	3790	(dBm)	(dB)
20	PI/2 BPSK	1	1	25.67	25.67	25.68	26.0	0.0
20	PI/2 BPSK	1	53	25.78	25.90	25.61		
20	PI/2 BPSK	1	104	25.60	25.76	25.66		
20	PI/2 BPSK	50	0	24.56	24.52	24.66	25.0	1.0
20	PI/2 BPSK	50	28	24.67	24.88	24.60		
20	PI/2 BPSK	50	56	24.57	24.65	24.51		
20	PI/2 BPSK	100	0	24.76	24.80	24.48	25.0	1.0
20	QPSK	1	1	25.55	25.75	25.71	26.0	0.0
20	QPSK	1	53	25.53	25.74	25.67		
20	QPSK	1	104	25.81	25.40	25.85		
20	QPSK	50	0	24.47	24.48	24.88	25.0	1.0
20	QPSK	50	28	24.42	24.68	24.77		
20	QPSK	50	56	24.81	24.75	24.84		
20	QPSK	100	0	24.46	24.66	24.68	25.0	1.0
20	16QAM	1	1	25.63	25.58	25.41	26.0	0.0
20	16QAM	1	53	25.61	25.86	25.52		
20	16QAM	1	104	25.90	25.87	25.82		
20	16QAM	50	0	24.56	24.56	24.76	25.0	1.0
20	16QAM	50	28	24.50	24.77	24.74		
20	16QAM	50	56	24.61	24.59	24.55		
20	16QAM	100	0	24.78	24.41	24.45	25.0	1.0
20	64QAM	1	1	25.86	25.74	25.40	26.0	0.0
20	64QAM	1	53	25.63	25.73	25.67		
20	64QAM	1	104	25.61	25.58	25.75		
20	64QAM	50	0	24.50	24.82	24.63	25.0	1.0
20	64QAM	50	28	24.87	24.80	24.75		
20	64QAM	50	56	24.82	24.60	24.47		
20	64QAM	100	0	24.78	24.42	24.75	25.0	1.0
20	256QAM	1	1	25.54	25.62	25.78	26.0	0.0
20	256QAM	1	53	25.81	25.81	25.40		
20	256QAM	1	104	25.83	25.53	25.86		
20	256QAM	50	0	24.45	24.63	24.46	25.0	1.0
20	256QAM	50	28	24.76	24.75	24.62		
20	256QAM	50	56	24.76	24.41	24.86		
20	256QAM	100	0	24.89	24.47	24.87	25.0	1.0
Channel				620166	376000	653166	Tune-up limit	MPR
Frequency (MHz)				3307.5	1880	3792.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	25.68	25.48	25.73	26.0	0.0
Channel				619666	376000	653666	Tune-up limit	MPR
Frequency (MHz)				3305	1880	3795	(dBm)	(dB)
10	PI/2 BPSK	1	1	25.73	25.83	25.49	26.0	0.0
Channel				619166	376000	654166	Tune-up limit	MPR
Frequency (MHz)				3302.5	1880	3797.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	25.88	25.76	25.87	26.0	0.0

<n78 PC2 Ant6>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				620666	636667	652666	Tune-up limit	MPR
Frequency (MHz)				3310	3550	3790	(dBm)	(dB)
20	PI/2 BPSK	1	1	22.62	22.87	22.61	23.0	0.0
20	PI/2 BPSK	1	53	22.57	22.51	22.52		
20	PI/2 BPSK	1	104	22.91	22.93	22.58		
20	PI/2 BPSK	50	0	21.54	21.60	21.90	22.0	1.0
20	PI/2 BPSK	50	28	21.56	21.55	21.86		
20	PI/2 BPSK	50	56	21.84	21.92	21.61		
20	PI/2 BPSK	100	0	21.52	21.68	21.81	22.0	1.0
20	QPSK	1	1	22.73	22.88	22.81	23.0	0.0
20	QPSK	1	53	22.77	22.57	22.55		
20	QPSK	1	104	22.70	22.96	22.80		
20	QPSK	50	0	21.58	21.87	21.77	22.0	1.0
20	QPSK	50	28	21.60	21.81	21.61		
20	QPSK	50	56	21.99	21.53	21.86		
20	QPSK	100	0	21.98	21.70	21.75	22.0	1.0
20	16QAM	1	1	22.94	22.94	22.58	23.0	0.0
20	16QAM	1	53	22.74	22.81	22.66		
20	16QAM	1	104	22.80	22.54	22.70		
20	16QAM	50	0	21.93	22.00	21.84	22.0	1.0
20	16QAM	50	28	21.50	21.66	22.00		
20	16QAM	50	56	21.69	21.57	21.59		
20	16QAM	100	0	21.59	21.98	21.91	22.0	1.0
20	64QAM	1	1	22.93	22.73	22.62	23.0	0.0
20	64QAM	1	53	22.63	22.74	22.82		
20	64QAM	1	104	22.70	22.88	22.84		
20	64QAM	50	0	21.69	21.80	21.98	22.0	1.0
20	64QAM	50	28	21.56	21.62	21.92		
20	64QAM	50	56	21.76	21.57	21.91		
20	64QAM	100	0	21.86	21.66	21.62	22.0	1.0
20	256QAM	1	1	22.63	22.72	22.57	23.0	0.0
20	256QAM	1	53	22.62	22.83	22.57		
20	256QAM	1	104	22.81	22.53	22.85		
20	256QAM	50	0	21.50	21.96	21.62	22.0	1.0
20	256QAM	50	28	21.96	21.93	21.96		
20	256QAM	50	56	21.53	21.65	21.87		
20	256QAM	100	0	21.89	21.80	21.93	22.0	1.0
Channel				620166	376000	653166	Tune-up limit	MPR
Frequency (MHz)				3307.5	1880	3792.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	22.55	22.89	22.56	23.0	0.0
Channel				619666	376000	653666	Tune-up limit	MPR
Frequency (MHz)				3305	1880	3795	(dBm)	(dB)
10	PI/2 BPSK	1	1	22.71	22.59	22.73	23.0	0.0
Channel				619166	376000	654166	Tune-up limit	MPR
Frequency (MHz)				3302.5	1880	3797.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	22.60	22.51	22.72	23.0	0.0



**Table 9.2 FR1 Backoff Power Measurements**

&lt;n2 Ant0&gt;

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
				372000	376000	380000	Tune-up limit	MPR
				1860	1880	1900	(dBm)	(dB)
20	PI/2 BPSK	1	1	17.27	17.28	16.87	17.5	0.0
20	PI/2 BPSK	1	53	17.21	17.30	17.16		
20	PI/2 BPSK	1	104	16.90	17.07	17.14		
20	PI/2 BPSK	50	0	16.28	15.90	16.22	16.5	1.0
20	PI/2 BPSK	50	28	16.00	15.84	16.10		
20	PI/2 BPSK	50	56	15.98	15.83	15.90		
20	PI/2 BPSK	100	0	15.94	15.92	15.88	16.5	1.0
20	QPSK	1	1	17.09	17.12	16.81	17.5	0.0
20	QPSK	1	53	17.27	16.84	16.86		
20	QPSK	1	104	17.09	17.29	17.10		
20	QPSK	50	0	15.81	16.08	16.00	16.5	1.0
20	QPSK	50	28	16.11	16.14	15.91		
20	QPSK	50	56	15.81	15.81	16.28		
20	QPSK	100	0	16.11	15.86	15.92	16.5	1.0
20	16QAM	1	1	17.21	17.14	17.24	17.5	0.0
20	16QAM	1	53	17.01	16.86	17.10		
20	16QAM	1	104	17.10	17.02	17.12		
20	16QAM	50	0	16.09	15.81	16.25	16.5	1.0
20	16QAM	50	28	15.92	15.91	15.94		
20	16QAM	50	56	15.95	16.23	16.22		
20	16QAM	100	0	15.98	15.91	15.96	16.5	1.0
20	64QAM	1	1	16.86	16.91	16.96	17.5	0.0
20	64QAM	1	53	17.23	17.03	17.13		
20	64QAM	1	104	17.14	17.10	17.09		
20	64QAM	50	0	15.85	15.98	16.10	16.5	1.0
20	64QAM	50	28	15.96	15.80	16.22		
20	64QAM	50	56	16.28	15.87	16.16		
20	64QAM	100	0	16.29	15.96	16.20	16.5	1.0
20	256QAM	1	1	17.11	17.23	17.17	17.5	0.0
20	256QAM	1	53	17.14	17.12	16.84		
20	256QAM	1	104	16.85	16.82	17.00		
20	256QAM	50	0	15.91	16.00	15.96	16.5	1.0
20	256QAM	50	28	16.12	16.17	15.88		
20	256QAM	50	56	16.17	15.84	15.85		
20	256QAM	100	0	16.01	16.28	16.10	16.5	1.0
				371500	376000	380500	Tune-up limit	MPR
				1857.5	1880	1902.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	16.89	16.96	16.99	17.5	0.0
				371000	376000	381000	Tune-up limit	MPR
				1855	1880	1905	(dBm)	(dB)
10	PI/2 BPSK	1	1	17.03	17.26	16.89	17.5	0.0
				370500	376000	381500	Tune-up limit	MPR
				1852.5	1880	1907.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	17.04	16.96	16.98	17.5	0.0

<n2 Ant8>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				372000	376000	380000	Tune-up limit	MPR
Frequency (MHz)				1860	1880	1900	(dBm)	(dB)
20	PI/2 BPSK	1	1	14.01	14.08	14.09	14.5	0.0
20	PI/2 BPSK	1	53	14.35	14.23	14.45		
20	PI/2 BPSK	1	104	14.20	14.12	14.20		
20	PI/2 BPSK	50	0	13.07	13.27	13.29	13.5	1.0
20	PI/2 BPSK	50	28	13.27	13.49	13.25		
20	PI/2 BPSK	50	56	13.24	13.04	13.00		
20	PI/2 BPSK	100	0	13.11	13.30	13.45	13.5	1.0
20	QPSK	1	1	14.07	14.47	14.07	14.5	0.0
20	QPSK	1	53	14.17	14.22	14.24		
20	QPSK	1	104	14.31	14.47	14.47		
20	QPSK	50	0	13.49	13.48	13.15	13.5	1.0
20	QPSK	50	28	13.28	13.26	13.05		
20	QPSK	50	56	13.11	13.35	13.43		
20	QPSK	100	0	13.17	13.34	13.13	13.5	1.0
20	16QAM	1	1	14.23	14.22	14.34	14.5	0.0
20	16QAM	1	53	14.01	14.40	14.42		
20	16QAM	1	104	14.19	14.20	14.37		
20	16QAM	50	0	13.17	13.12	13.29	13.5	1.0
20	16QAM	50	28	13.28	13.37	13.08		
20	16QAM	50	56	13.24	13.50	13.34		
20	16QAM	100	0	13.26	13.28	13.39	13.5	1.0
20	64QAM	1	1	14.33	14.44	14.33	14.5	0.0
20	64QAM	1	53	14.28	14.43	14.23		
20	64QAM	1	104	14.39	14.21	14.12		
20	64QAM	50	0	13.14	13.05	13.39	13.5	1.0
20	64QAM	50	28	13.14	13.17	13.12		
20	64QAM	50	56	13.37	13.17	13.48		
20	64QAM	100	0	13.36	13.00	13.42	13.5	1.0
20	256QAM	1	1	14.35	14.21	14.35	14.5	0.0
20	256QAM	1	53	14.27	14.13	14.32		
20	256QAM	1	104	14.12	14.09	14.00		
20	256QAM	50	0	13.02	13.35	13.12	13.5	1.0
20	256QAM	50	28	13.38	13.07	13.19		
20	256QAM	50	56	13.46	13.29	13.19		
20	256QAM	100	0	13.06	13.49	13.15	13.5	1.0
Channel				371500	376000	380500	Tune-up limit	MPR
Frequency (MHz)				1857.5	1880	1902.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	14.21	14.00	14.08	14.5	0.0
Channel				371000	376000	381000	Tune-up limit	MPR
Frequency (MHz)				1855	1880	1905	(dBm)	(dB)
10	PI/2 BPSK	1	1	14.43	14.45	14.26	14.5	0.0
Channel				370500	376000	381500	Tune-up limit	MPR
Frequency (MHz)				1852.5	1880	1907.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	14.09	14.31	14.01	14.5	0.0

<n7 Ant0>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				502000	507000	512000	Tune-up limit	MPR
Frequency (MHz)				2510	2535	2560	(dBm)	(dB)
20	PI/2 BPSK	1	1	18.85	18.94	18.85	19.5	0.0
20	PI/2 BPSK	1	53	18.99	19.20	19.08		
20	PI/2 BPSK	1	104	18.87	18.75	19.19		
20	PI/2 BPSK	50	0	18.06	18.19	17.91	18.5	1.0
20	PI/2 BPSK	50	28	17.85	17.74	17.91		
20	PI/2 BPSK	50	56	18.15	17.87	17.96		
20	PI/2 BPSK	100	0	17.83	17.88	17.76	18.5	1.0
20	QPSK	1	1	19.01	19.05	18.88	19.5	0.0
20	QPSK	1	53	19.11	18.84	19.18		
20	QPSK	1	104	18.87	18.97	18.96		
20	QPSK	50	0	18.17	17.97	18.05	18.5	1.0
20	QPSK	50	28	17.78	17.72	18.03		
20	QPSK	50	56	18.14	17.70	17.75		
20	QPSK	100	0	18.16	17.97	18.13	18.5	1.0
20	16QAM	1	1	18.91	19.01	18.78	19.5	0.0
20	16QAM	1	53	19.16	18.94	19.07		
20	16QAM	1	104	19.17	18.93	18.71		
20	16QAM	50	0	18.01	18.14	17.86	18.5	1.0
20	16QAM	50	28	17.84	18.19	17.89		
20	16QAM	50	56	18.03	18.11	17.90		
20	16QAM	100	0	17.74	17.93	18.11	18.5	1.0
20	64QAM	1	1	18.83	19.08	19.05	19.5	0.0
20	64QAM	1	53	18.88	18.87	18.78		
20	64QAM	1	104	19.14	18.86	18.79		
20	64QAM	50	0	17.82	18.05	17.75	18.5	1.0
20	64QAM	50	28	18.02	18.13	17.93		
20	64QAM	50	56	18.15	18.04	18.18		
20	64QAM	100	0	18.08	17.88	17.91	18.5	1.0
20	256QAM	1	1	19.06	19.14	19.14	19.5	0.0
20	256QAM	1	53	19.18	19.06	19.17		
20	256QAM	1	104	19.06	18.78	18.94		
20	256QAM	50	0	18.18	18.09	17.91	18.5	1.0
20	256QAM	50	28	17.88	18.00	17.77		
20	256QAM	50	56	18.05	18.07	18.09		
20	256QAM	100	0	17.96	17.93	17.85	18.5	1.0
Channel				501500	507000	511500	Tune-up limit	MPR
Frequency (MHz)				2507.5	2535	2562.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	18.73	18.73	18.97	19.5	0.0
Channel				501000	507000	511000	Tune-up limit	MPR
Frequency (MHz)				2505	2535	2565	(dBm)	(dB)
10	PI/2 BPSK	1	1	18.95	18.80	18.97	19.5	0.0
Channel				500500	507000	510500	Tune-up limit	MPR
Frequency (MHz)				2502.5	2535	2567.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	19.02	18.82	19.03	19.5	0.0

<n25 Ant0>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				372000	376500	381000	Tune-up limit	MPR
Frequency (MHz)				1860	1882.5	1905	(dBm)	(dB)
20	PI/2 BPSK	1	1	16.95	17.09	16.93	17.5	0.0
20	PI/2 BPSK	1	53	17.26	17.30	17.17		
20	PI/2 BPSK	1	104	17.27	16.86	17.25		
20	PI/2 BPSK	50	0	16.18	16.08	16.22	16.5	1.0
20	PI/2 BPSK	50	28	15.91	16.23	16.10		
20	PI/2 BPSK	50	56	16.25	16.27	16.28		
20	PI/2 BPSK	100	0	16.17	15.80	15.85	16.5	1.0
20	QPSK	1	1	16.86	16.90	17.15	17.5	0.0
20	QPSK	1	53	16.86	17.03	17.25		
20	QPSK	1	104	16.90	16.85	16.97		
20	QPSK	50	0	16.19	16.12	16.14	16.5	1.0
20	QPSK	50	28	15.81	16.04	16.24		
20	QPSK	50	56	16.26	16.02	15.82		
20	QPSK	100	0	15.84	16.21	16.25	16.5	1.0
20	16QAM	1	1	17.18	17.09	16.97	17.5	0.0
20	16QAM	1	53	17.09	16.95	17.12		
20	16QAM	1	104	16.86	16.85	17.12		
20	16QAM	50	0	16.13	16.10	15.84	16.5	1.0
20	16QAM	50	28	15.98	16.23	16.10		
20	16QAM	50	56	16.15	16.21	16.08		
20	16QAM	100	0	16.15	15.80	15.86	16.5	1.0
20	64QAM	1	1	17.14	17.29	17.06	17.5	0.0
20	64QAM	1	53	16.88	16.84	17.14		
20	64QAM	1	104	17.03	17.05	17.06		
20	64QAM	50	0	15.81	16.02	15.88	16.5	1.0
20	64QAM	50	28	16.06	16.06	15.97		
20	64QAM	50	56	15.91	15.81	16.06		
20	64QAM	100	0	15.98	15.97	16.24	16.5	1.0
20	256QAM	1	1	16.81	16.88	16.80	17.5	0.0
20	256QAM	1	53	16.83	17.17	16.82		
20	256QAM	1	104	16.97	17.06	16.97		
20	256QAM	50	0	16.16	16.19	16.21	16.5	1.0
20	256QAM	50	28	16.19	16.22	15.94		
20	256QAM	50	56	16.17	16.10	16.08		
20	256QAM	100	0	16.13	15.90	16.18	16.5	1.0
Channel				371500	376500	381500	Tune-up limit	MPR
Frequency (MHz)				1857.5	1882.5	1907.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	17.21	17.28	17.05	17.5	0.0
Channel				371000	376500	382000	Tune-up limit	MPR
Frequency (MHz)				1855	1882.5	1910	(dBm)	(dB)
10	PI/2 BPSK	1	1	16.90	16.98	16.83	17.5	0.0
Channel				370500	376500	382500	Tune-up limit	MPR
Frequency (MHz)				1852.5	1882.5	1912.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	16.82	17.26	17.06	17.5	0.0

<n38 Ant8>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				516000	519000	522000	Tune-up limit	MPR
Frequency (MHz)				2580	2595	2610	(dBm)	(dB)
20	PI/2 BPSK	1	1	19.00	19.01	19.18	19.5	0.0
20	PI/2 BPSK	1	53	19.04	19.30	19.23		
20	PI/2 BPSK	1	104	19.18	19.12	18.90		
20	PI/2 BPSK	50	0	17.89	18.25	18.00	18.5	1.0
20	PI/2 BPSK	50	28	18.01	18.04	17.95		
20	PI/2 BPSK	50	56	17.96	18.04	18.26		
20	PI/2 BPSK	100	0	17.97	17.92	18.20	18.5	1.0
20	QPSK	1	1	18.87	19.16	19.01	19.5	0.0
20	QPSK	1	53	19.02	18.93	19.02		
20	QPSK	1	104	19.27	18.89	19.22		
20	QPSK	50	0	18.19	18.02	18.20	18.5	1.0
20	QPSK	50	28	18.22	18.09	17.85		
20	QPSK	50	56	17.88	17.81	18.22		
20	QPSK	100	0	18.22	17.85	18.07	18.5	1.0
20	16QAM	1	1	19.25	18.95	18.87	19.5	0.0
20	16QAM	1	53	19.01	19.05	18.88		
20	16QAM	1	104	19.18	18.93	19.25		
20	16QAM	50	0	17.87	18.30	18.03	18.5	1.0
20	16QAM	50	28	17.84	17.88	18.08		
20	16QAM	50	56	18.09	17.84	18.30		
20	16QAM	100	0	17.97	17.81	18.21	18.5	1.0
20	64QAM	1	1	19.22	19.22	19.18	19.5	0.0
20	64QAM	1	53	18.92	18.97	19.20		
20	64QAM	1	104	19.23	19.00	18.84		
20	64QAM	50	0	18.00	18.00	17.86	18.5	1.0
20	64QAM	50	28	18.06	18.13	17.88		
20	64QAM	50	56	18.15	17.93	18.04		
20	64QAM	100	0	18.29	17.85	18.01	18.5	1.0
20	256QAM	1	1	19.08	18.94	18.84	19.5	0.0
20	256QAM	1	53	19.16	18.92	19.06		
20	256QAM	1	104	18.89	18.83	18.99		
20	256QAM	50	0	17.94	18.24	17.98	18.5	1.0
20	256QAM	50	28	18.15	18.28	18.20		
20	256QAM	50	56	17.99	17.85	18.30		
20	256QAM	100	0	18.16	17.93	17.87	18.5	1.0
Channel				515500	519000	522500	Tune-up limit	MPR
Frequency (MHz)				2577.5	2595	2612.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	18.88	18.90	18.96	19.5	0.0
Channel				515000	519000	523000	Tune-up limit	MPR
Frequency (MHz)				2575	2595	2615	(dBm)	(dB)
10	PI/2 BPSK	1	1	18.80	19.24	19.01	19.5	0.0
Channel				514500	519000	523500	Tune-up limit	MPR
Frequency (MHz)				2572.5	2595	2617.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	18.97	19.22	19.02	19.5	0.0

<n41 PC2 & PC3 Ant8>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				501200	518601	536000	Tune-up limit	MPR
Frequency (MHz)				2506	2593	2680	(dBm)	(dB)
20	PI/2 BPSK	1	1	19.09	19.12	19.04	19.5	0.0
20	PI/2 BPSK	1	53	19.00	19.20	19.16		
20	PI/2 BPSK	1	104	18.77	18.98	18.92		
20	PI/2 BPSK	50	0	17.86	18.08	17.72	18.5	1.0
20	PI/2 BPSK	50	28	17.79	17.75	18.13		
20	PI/2 BPSK	50	56	18.15	17.94	18.15		
20	PI/2 BPSK	100	0	18.05	18.01	18.02	18.5	1.0
20	QPSK	1	1	18.72	18.94	19.08	19.5	0.0
20	QPSK	1	53	19.18	19.16	18.86		
20	QPSK	1	104	18.70	18.89	18.79		
20	QPSK	50	0	17.86	17.94	17.96	18.5	1.0
20	QPSK	50	28	18.09	17.97	17.92		
20	QPSK	50	56	17.99	18.00	18.10		
20	QPSK	100	0	17.84	17.75	18.04	18.5	1.0
20	16QAM	1	1	18.71	18.83	18.76	19.5	0.0
20	16QAM	1	53	18.75	18.77	18.83		
20	16QAM	1	104	18.82	18.98	18.76		
20	16QAM	50	0	17.98	17.85	17.92	18.5	1.0
20	16QAM	50	28	18.05	17.70	18.02		
20	16QAM	50	56	17.93	17.90	17.91		
20	16QAM	100	0	18.08	17.79	18.06	18.5	1.0
20	64QAM	1	1	19.16	18.94	18.88	19.5	0.0
20	64QAM	1	53	19.18	18.73	18.77		
20	64QAM	1	104	18.71	18.84	18.93		
20	64QAM	50	0	18.18	17.87	17.76	18.5	1.0
20	64QAM	50	28	18.02	18.12	17.90		
20	64QAM	50	56	17.94	18.08	17.80		
20	64QAM	100	0	18.13	18.00	17.92	18.5	1.0
20	256QAM	1	1	19.00	19.05	18.71	19.5	0.0
20	256QAM	1	53	19.05	18.87	18.75		
20	256QAM	1	104	19.08	18.89	18.75		
20	256QAM	50	0	17.95	18.15	17.78	18.5	1.0
20	256QAM	50	28	18.15	17.73	17.84		
20	256QAM	50	56	17.87	18.04	17.78		
20	256QAM	100	0	17.98	17.82	18.05	18.5	1.0
Channel				500700	518601	536500	Tune-up limit	MPR
Frequency (MHz)				2503.5	2593	2682.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	19.08	19.11	18.88	19.5	0.0
Channel				500200	518601	537000	Tune-up limit	MPR
Frequency (MHz)				2501	2593	2685	(dBm)	(dB)
10	PI/2 BPSK	1	1	18.97	19.01	19.09	19.5	0.0
Channel				499700	518601	537500	Tune-up limit	MPR
Frequency (MHz)				2498.5	2593	2687.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	18.89	19.04	19.10	19.5	0.0

<n41 PC2 & PC3 Ant0>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				501200	518601	536000	Tune-up limit	MPR
Frequency (MHz)				2506	2593	2680	(dBm)	(dB)
20	PI/2 BPSK	1	1	16.08	16.02	16.50	16.5	0.0
20	PI/2 BPSK	1	53	16.41	16.05	16.12		
20	PI/2 BPSK	1	104	16.02	16.42	16.10		
20	PI/2 BPSK	50	0	15.12	15.23	15.29	15.5	1.0
20	PI/2 BPSK	50	28	15.02	15.42	15.48		
20	PI/2 BPSK	50	56	15.04	15.26	15.34		
20	PI/2 BPSK	100	0	15.07	15.25	15.27	15.5	1.0
20	QPSK	1	1	16.46	16.45	16.25	16.5	0.0
20	QPSK	1	53	16.06	16.29	16.27		
20	QPSK	1	104	16.10	16.46	16.12		
20	QPSK	50	0	15.46	15.42	15.41	15.5	1.0
20	QPSK	50	28	15.04	15.41	15.07		
20	QPSK	50	56	15.41	15.33	15.16		
20	QPSK	100	0	15.48	15.30	15.10	15.5	1.0
20	16QAM	1	1	16.48	16.20	16.11	16.5	0.0
20	16QAM	1	53	16.33	16.32	16.04		
20	16QAM	1	104	16.06	16.31	16.45		
20	16QAM	50	0	15.41	15.29	15.42	15.5	1.0
20	16QAM	50	28	15.34	15.15	15.31		
20	16QAM	50	56	15.41	15.31	15.01		
20	16QAM	100	0	15.19	15.03	15.47	15.5	1.0
20	64QAM	1	1	16.31	16.34	16.06	16.5	0.0
20	64QAM	1	53	16.16	16.33	16.26		
20	64QAM	1	104	16.19	16.05	16.17		
20	64QAM	50	0	15.22	15.32	15.23	15.5	1.0
20	64QAM	50	28	15.34	15.29	15.31		
20	64QAM	50	56	15.30	15.27	15.38		
20	64QAM	100	0	15.49	15.01	15.08	15.5	1.0
20	256QAM	1	1	16.28	16.47	16.45	16.5	0.0
20	256QAM	1	53	16.43	16.23	16.37		
20	256QAM	1	104	16.50	16.30	16.09		
20	256QAM	50	0	15.29	15.10	15.35	15.5	1.0
20	256QAM	50	28	15.42	15.23	15.42		
20	256QAM	50	56	15.13	15.00	15.19		
20	256QAM	100	0	15.21	15.31	15.07	15.5	1.0
Channel				500700	518601	536500	Tune-up limit	MPR
Frequency (MHz)				2503.5	2593	2682.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	16.27	16.36	16.27	16.5	0.0
Channel				500200	518601	537000	Tune-up limit	MPR
Frequency (MHz)				2501	2593	2685	(dBm)	(dB)
10	PI/2 BPSK	1	1	16.36	16.41	16.07	16.5	0.0
Channel				499700	518601	537500	Tune-up limit	MPR
Frequency (MHz)				2498.5	2593	2687.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	16.32	16.01	16.26	16.5	0.0

<n66 Ant0>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
				344000	349000	354000	Tune-up limit	MPR
				1720	1745	1770	(dBm)	(dB)
20	PI/2 BPSK	1	1	19.02	18.68	18.62	19.5	0.0
20	PI/2 BPSK	1	53	18.99	19.10	18.95		
20	PI/2 BPSK	1	104	18.96	18.72	18.69		
20	PI/2 BPSK	50	0	18.06	17.96	18.00	18.5	1.0
20	PI/2 BPSK	50	28	17.96	18.06	17.84		
20	PI/2 BPSK	50	56	17.85	17.88	17.78		
20	PI/2 BPSK	100	0	17.63	17.77	18.00	18.5	1.0
20	QPSK	1	1	19.05	18.95	18.77	19.5	0.0
20	QPSK	1	53	18.89	18.93	19.07		
20	QPSK	1	104	19.05	18.66	18.83		
20	QPSK	50	0	17.92	17.78	18.08	18.5	1.0
20	QPSK	50	28	17.72	18.01	17.90		
20	QPSK	50	56	17.75	17.99	17.74		
20	QPSK	100	0	17.63	17.91	17.94	18.5	1.0
20	16QAM	1	1	18.91	18.89	18.93	19.5	0.0
20	16QAM	1	53	18.71	18.67	18.99		
20	16QAM	1	104	19.04	19.07	19.03		
20	16QAM	50	0	17.72	17.99	17.85	18.5	1.0
20	16QAM	50	28	17.80	17.90	18.00		
20	16QAM	50	56	17.95	17.84	17.99		
20	16QAM	100	0	18.09	17.69	17.96	18.5	1.0
20	64QAM	1	1	19.03	18.91	19.05	19.5	0.0
20	64QAM	1	53	19.09	18.93	18.95		
20	64QAM	1	104	18.72	18.75	18.79		
20	64QAM	50	0	17.87	17.70	17.84	18.5	1.0
20	64QAM	50	28	17.89	17.69	17.72		
20	64QAM	50	56	18.03	17.82	18.09		
20	64QAM	100	0	17.96	17.66	17.82	18.5	1.0
20	256QAM	1	1	18.97	18.98	19.06	19.5	0.0
20	256QAM	1	53	19.09	19.00	19.01		
20	256QAM	1	104	18.99	18.85	18.91		
20	256QAM	50	0	17.64	17.89	18.10	18.5	1.0
20	256QAM	50	28	17.90	17.61	17.80		
20	256QAM	50	56	17.95	17.88	17.81		
20	256QAM	100	0	17.76	18.01	17.74	18.5	1.0
				343500	349000	354500	Tune-up limit	MPR
				1717.5	1745	1772.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	18.77	19.05	18.97	19.5	0.0
				343000	349000	355000	Tune-up limit	MPR
				1715	1745	1775	(dBm)	(dB)
10	PI/2 BPSK	1	1	18.61	18.82	18.99	19.5	0.0
				342500	349000	355500	Tune-up limit	MPR
				1712.5	1745	1777.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	18.63	18.68	19.08	19.5	0.0



<n66 Ant8>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				344000	349000	354000	Tune-up limit	MPR
Frequency (MHz)				1720	1745	1770	(dBm)	(dB)
20	PI/2 BPSK	1	1	16.34	16.19	16.02	16.5	0.0
20	PI/2 BPSK	1	53	16.34	16.10	16.19		
20	PI/2 BPSK	1	104	16.16	16.23	16.33		
20	PI/2 BPSK	50	0	15.20	15.48	15.24	15.5	1.0
20	PI/2 BPSK	50	28	15.22	15.33	15.33		
20	PI/2 BPSK	50	56	15.09	15.45	15.33		
20	PI/2 BPSK	100	0	15.08	15.40	15.23	15.5	1.0
20	QPSK	1	1	16.29	16.17	16.03	16.5	0.0
20	QPSK	1	53	16.16	16.24	16.27		
20	QPSK	1	104	16.38	16.04	16.12		
20	QPSK	50	0	15.05	15.28	15.13	15.5	1.0
20	QPSK	50	28	15.37	15.25	15.13		
20	QPSK	50	56	15.37	15.04	15.12		
20	QPSK	100	0	15.43	15.19	15.46	15.5	1.0
20	16QAM	1	1	16.11	16.44	16.36	16.5	0.0
20	16QAM	1	53	16.22	16.05	16.22		
20	16QAM	1	104	16.32	16.44	16.37		
20	16QAM	50	0	15.27	15.34	15.17	15.5	1.0
20	16QAM	50	28	15.04	15.43	15.47		
20	16QAM	50	56	15.43	15.47	15.41		
20	16QAM	100	0	15.09	15.17	15.16	15.5	1.0
20	64QAM	1	1	16.00	16.40	16.26	16.5	0.0
20	64QAM	1	53	16.21	16.37	16.44		
20	64QAM	1	104	16.39	16.40	16.47		
20	64QAM	50	0	15.41	15.39	15.48	15.5	1.0
20	64QAM	50	28	15.38	15.01	15.35		
20	64QAM	50	56	15.38	15.46	15.15		
20	64QAM	100	0	15.44	15.21	15.42	15.5	1.0
20	256QAM	1	1	16.04	16.22	16.20	16.5	0.0
20	256QAM	1	53	16.13	16.13	16.07		
20	256QAM	1	104	16.03	16.23	16.25		
20	256QAM	50	0	15.30	15.18	15.38	15.5	1.0
20	256QAM	50	28	15.31	15.17	15.36		
20	256QAM	50	56	15.25	15.09	15.28		
20	256QAM	100	0	15.08	15.06	15.35	15.5	1.0
Channel				343500	349000	354500	Tune-up limit	MPR
Frequency (MHz)				1717.5	1745	1772.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	16.19	16.30	16.27	16.5	0.0
Channel				343000	349000	355000	Tune-up limit	MPR
Frequency (MHz)				1715	1745	1775	(dBm)	(dB)
10	PI/2 BPSK	1	1	16.14	16.32	16.17	16.5	0.0
Channel				342500	349000	355500	Tune-up limit	MPR
Frequency (MHz)				1712.5	1745	1777.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	16.10	16.35	16.28	16.5	0.0

<n78 PC2 & PC3 Ant4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				620666	636667	652666	Tune-up limit	MPR
Frequency (MHz)				3310	3550	3790	(dBm)	(dB)
20	PI/2 BPSK	1	1	20.88	20.84	20.81	21.5	0.0
20	PI/2 BPSK	1	53	21.10	21.30	21.02		
20	PI/2 BPSK	1	104	20.85	20.84	21.25		
20	PI/2 BPSK	50	0	20.00	20.17	20.15	20.5	1.0
20	PI/2 BPSK	50	28	19.95	20.18	19.92		
20	PI/2 BPSK	50	56	19.95	19.97	19.96		
20	PI/2 BPSK	100	0	20.24	20.13	19.94	20.5	1.0
20	QPSK	1	1	21.05	21.21	20.85	21.5	0.0
20	QPSK	1	53	20.89	20.85	21.10		
20	QPSK	1	104	21.30	21.00	20.85		
20	QPSK	50	0	19.95	20.08	19.87	20.5	1.0
20	QPSK	50	28	20.11	20.12	19.88		
20	QPSK	50	56	19.91	19.82	20.29		
20	QPSK	100	0	19.85	20.12	20.11	20.5	1.0
20	16QAM	1	1	21.06	21.28	21.30	21.5	0.0
20	16QAM	1	53	21.14	21.20	20.89		
20	16QAM	1	104	21.20	21.06	20.93		
20	16QAM	50	0	19.92	19.98	19.97	20.5	1.0
20	16QAM	50	28	19.98	20.22	19.98		
20	16QAM	50	56	19.94	19.95	20.09		
20	16QAM	100	0	19.80	20.08	19.90	20.5	1.0
20	64QAM	1	1	20.97	20.87	21.19	21.5	0.0
20	64QAM	1	53	21.21	21.17	21.30		
20	64QAM	1	104	20.85	21.00	20.94		
20	64QAM	50	0	19.82	19.86	20.26	20.5	1.0
20	64QAM	50	28	19.96	20.13	20.17		
20	64QAM	50	56	19.98	20.02	20.20		
20	64QAM	100	0	20.07	20.18	19.95	20.5	1.0
20	256QAM	1	1	21.11	21.16	20.98	21.5	0.0
20	256QAM	1	53	20.84	21.29	21.13		
20	256QAM	1	104	20.84	21.04	21.28		
20	256QAM	50	0	20.28	20.21	20.07	20.5	1.0
20	256QAM	50	28	19.85	20.23	19.95		
20	256QAM	50	56	19.85	19.81	19.80		
20	256QAM	100	0	20.29	19.94	20.26	20.5	1.0
Channel				620166	376000	653166	Tune-up limit	MPR
Frequency (MHz)				3307.5	1880	3792.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	21.05	21.07	20.97	21.5	0.0
Channel				619666	376000	653666	Tune-up limit	MPR
Frequency (MHz)				3305	1880	3795	(dBm)	(dB)
10	PI/2 BPSK	1	1	20.97	20.96	20.93	21.5	0.0
Channel				619166	376000	654166	Tune-up limit	MPR
Frequency (MHz)				3302.5	1880	3797.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	20.81	20.86	20.86	21.5	0.0

<n78 PC2 & PC3 Ant6>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low	Power Middle	Power High	Tune-up limit	MPR
				Ch. / Freq.	Ch. / Freq.	Ch. / Freq.	(dBm)	(dB)
Channel				620666	636667	652666	Tune-up limit	MPR
Frequency (MHz)				3310	3550	3790	(dBm)	(dB)
20	PI/2 BPSK	1	1	18.32	18.14	18.49	18.5	0.0
20	PI/2 BPSK	1	53	18.44	18.21	18.41		
20	PI/2 BPSK	1	104	18.00	18.07	18.07		
20	PI/2 BPSK	50	0	17.15	17.12	17.28	17.5	1.0
20	PI/2 BPSK	50	28	17.02	17.23	17.41		
20	PI/2 BPSK	50	56	17.40	17.23	17.07		
20	PI/2 BPSK	100	0	17.18	17.24	17.00	17.5	1.0
20	QPSK	1	1	18.50	18.09	18.20	18.5	0.0
20	QPSK	1	53	18.09	18.02	18.21		
20	QPSK	1	104	18.37	18.22	18.33		
20	QPSK	50	0	17.28	17.05	17.41	17.5	1.0
20	QPSK	50	28	17.23	17.32	17.13		
20	QPSK	50	56	17.18	17.38	17.35		
20	QPSK	100	0	17.12	17.50	17.05	17.5	1.0
20	16QAM	1	1	18.16	18.14	18.49	18.5	0.0
20	16QAM	1	53	18.49	18.04	18.40		
20	16QAM	1	104	18.47	18.06	18.43		
20	16QAM	50	0	17.19	17.41	17.46	17.5	1.0
20	16QAM	50	28	17.08	17.17	17.32		
20	16QAM	50	56	17.32	17.06	17.23		
20	16QAM	100	0	17.18	17.13	17.11	17.5	1.0
20	64QAM	1	1	18.01	18.26	18.34	18.5	0.0
20	64QAM	1	53	18.12	18.41	18.38		
20	64QAM	1	104	18.22	18.23	18.05		
20	64QAM	50	0	17.21	17.06	17.03	17.5	1.0
20	64QAM	50	28	17.09	17.20	17.22		
20	64QAM	50	56	17.48	17.12	17.47		
20	64QAM	100	0	17.49	17.22	17.35	17.5	1.0
20	256QAM	1	1	18.25	18.12	18.12	18.5	0.0
20	256QAM	1	53	18.34	18.10	18.01		
20	256QAM	1	104	18.06	18.10	18.19		
20	256QAM	50	0	17.09	17.19	17.11	17.5	1.0
20	256QAM	50	28	17.44	17.35	17.23		
20	256QAM	50	56	17.44	17.02	17.03		
20	256QAM	100	0	17.07	17.39	17.12	17.5	1.0
Channel				620166	376000	653166	Tune-up limit	MPR
Frequency (MHz)				3307.5	1880	3792.5	(dBm)	(dB)
15	PI/2 BPSK	1	1	18.35	18.19	18.43	18.5	0.0
Channel				619666	376000	653666	Tune-up limit	MPR
Frequency (MHz)				3305	1880	3795	(dBm)	(dB)
10	PI/2 BPSK	1	1	18.22	18.46	18.17	18.5	0.0
Channel				619166	376000	654166	Tune-up limit	MPR
Frequency (MHz)				3302.5	1880	3797.5	(dBm)	(dB)
5	PI/2 BPSK	1	1	18.15	18.00	18.22	18.5	0.0

## 9. SAR Test Results

### General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
  - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg.

### FR1 Note:

1. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
  - a. SAR testing start with the largest channel bandwidth and measure SAR for PI/2 BPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
  - b. 50% RB allocation for PI/2 BPSK SAR testing follows 1RB PI/2 BPSK allocation procedure
  - c. PI/2 BPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
  - d. QPSK/16QAM/64QAM/256QAM output powers are not  $\frac{1}{2}$  dB higher than the same configuration in PI/2 BPSK, also reported SAR for the PI/2 BPSK configuration is less than 1.45 W/kg, QPSK/16QAM/64QAM/256QAM SAR testing are not required.
  - e. Smaller bandwidth output power for each RB allocation configuration for this device will not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg, smaller bandwidth SAR testing is not required for this device
  - f. For 5G FR1 n5/n12/n41/n71 the maximum bandwidth does not support three non-overlapping channels, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
2. Due to test setup limitations, SAR testing for NR was performed using Factory Test Mode software to establish the connection and perform SAR with 100% duty cycle. The Qualcomm QRCT program was used to establish the connection.

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
1	FR1 Band 5_Ant 1	10M	BPSK	1	53	Side C	10mm	167300	836.5	20.66	21.00	0.436	0.47
2	FR1 Band 7_Ant 0	20M	BPSK	1	53	Side F	10mm	507000	2535	19.20	19.50	0.829	0.89
	FR1 Band 7_Ant 0	20M	BPSK	1	49	Side F	20mm	507000	2535	24.40	24.50	0.722	0.74
3	FR1 Band 12_Ant 0	15M	BPSK	1	53	Side A	10mm	141500	707.5	23.57	24.00	0.312	0.34
4	FR1 Band 25_Ant 0	20M	QPSK	1	53	Side F	10mm	376500	1882.5	17.30	17.50	0.791	0.83
	FR1 Band 25_Ant 0	20M	QPSK	50	28	Side F	20mm	376500	1882.5	24.30	24.50	0.722	0.76
5	FR1 Band 41_Ant 8	20M	BPSK	1	53	Side A	10mm	518601	2593	19.20	19.50	0.729	0.78
	FR1 Band 41_Ant 8	20M	BPSK	1	53	Side A	20mm	518601	2593	27.20	27.50	0.614	0.66
6	FR1 Band 66_Ant 0	20M	BPSK	1	53	Side F	10mm	349000	1745	19.10	19.50	0.816	0.89
	FR1 Band 66_Ant 0	20M	BPSK	1	53	Side F	20mm	349000	1745	24.20	24.50	0.746	0.80
7	FR1 Band 71_Ant 0	20M	BPSK	1	53	Side A	10mm	136100	680.5	23.55	24.00	0.397	0.44
8	FR1 Band 77_Ant 4	20M	BPSK	1	53	Side B	10mm	636667	3550	21.30	21.50	0.705	0.74
	FR1 Band 77_Ant 4	20M	BPSK	1	53	Side B	20mm	636667	3550	25.90	26.00	0.709	0.73

## 10. Simultaneous Transmission Analysis

The 3G/4G/WiFi data are located in report number SAR.20221205. The data listed in the tables below was extracted from the reports filed with this report.

### Sim-Tx configuration

No.	Simultaneous Transmission Configuration	Exposure Positions
		Body
1	UMTS + 2.4 GHz Wifi 0 + 2.4 GHz WiFi 1	Yes
2	UMTS + 5 GHz Wifi 0 + 5 GHz WiFi 1	Yes
3	LTE + 2.4 GHz Wifi 0 + 2.4 GHz WiFi 1	Yes
4	LTE + 5 GHz Wifi 0 + 5 GHz WiFi 1	Yes
5	FR1 + 2.4 GHz Wifi 0 + 2.4 GHz WiFi 1	Yes
6	FR1 + 5 GHz Wifi 0 + 5 GHz WiFi 1	Yes

#### General Note:

1. The worst case WLAN reported SAR for each configuration was used for SAR summation, regardless of whether the WLAN channel has Hotspot capability. Therefore, the following summations represent the absolute worst cases for simultaneous transmission with WLAN.
2. The Scaled SAR summation is calculated based on the same configuration and test position.
3. Due to this report having only reference data measured, the simultaneous evaluation could not be done for the configurations. The WiFi configurations tested did not allow for an evaluation to be conducted as it was only tested on Side D and no testing for the cellular bands were tested on Side D.

# 11. Test Equipment List

**Table 11.1 Equipment Specifications**

Type	Calibration Due Date	Calibration Done Date	Serial Number
Staubli Robot TX60L	N/A	N/A	F07/55M6A1/A/01
Measurement Controller CS8c	N/A	N/A	1012
ELI5 Flat Phantom	N/A	N/A	1251
Device Holder	N/A	N/A	N/A
Data Acquisition Electronics 4	08/16/2023	08/16/2022	759
SPEAG E-Field Probe EX3DV4	08/28/2023	08/28/2022	3693
Speag Validation Dipole D750V2	06/04/2023	06/04/2021	1053
Speag Validation Dipole D900V2	06/04/2023	06/04/2021	1d128
Speag Validation Dipole D1750V2	06/03/2023	06/03/2021	1061
Speag Validation Dipole D1900V2	06/04/2023	06/04/2021	5d147
Speag Validation Dipole D2550V2	06/03/2023	06/03/2021	1003
Speag Validation Dipole D3500V2	04/13/2023	04/13/2021	1061
Agilent N1911A Power Meter	03/16/2023	03/16/2022	GB45100254
Agilent N1922A Power Sensor	03/17/2023	03/17/2022	MY45240464
Agilent (HP) 8561E Spectrum Analyzer	03/17/2023	03/17/2022	31720068
Agilent (HP) 83752A Synthesized Sweeper	03/17/2023	03/17/2022	3610A01048
Agilent (HP) 8753C Vector Network Analyzer	03/17/2023	03/17/2022	3135A01724
Agilent (HP) 85047A S-Parameter Test Set	03/16/2023	03/16/2022	2904A00595
Anritsu MT8821C	N/A	N/A	6201381721
Apri Dielectric Probe Assembly	N/A	N/A	0011
Head Equivalent Matter (600 MHz)	N/A	N/A	N/A
Head Equivalent Matter (750 MHz)	N/A	N/A	N/A
Head Equivalent Matter (900 MHz)	N/A	N/A	N/A
Head Equivalent Matter (1750 MHz)	N/A	N/A	N/A
Head Equivalent Matter (1900 MHz)	N/A	N/A	N/A
Head Equivalent Matter (2450 MHz)	N/A	N/A	N/A
Head Equivalent Matter (2550 MHz)	N/A	N/A	N/A
Head Equivalent Matter (3-6 GHz)	N/A	N/A	N/A

## 12. Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC/IC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body is a very complex phenomena that depends on the mass, shape, and size of the body; the orientation of the body with respect to the field vectors; and, the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.



## 13. References

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio Frequency Radiation, August 1996
- [2] ANSI/IEEE C95.1 – 1992, American National Standard Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 300kHz to 100GHz, New York: IEEE, 1992.
- [3] ANSI/IEEE C95.3 – 1992, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, 1992.
- [4] International Electrotechnical Commission, IEC 62209-2 (Edition 1.0), Human Exposure to radio frequency fields from hand-held and body mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), March 2010.
- [5] IEEE Standard 1528 – 2013, IEEE Recommended Practice for Determining the Peak-Spatial Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques, June 2013.
- [6] Industry Canada, RSS – 102 Issue 5, Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), March 2015.
- [7] Health Canada, Safety Code 6, Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz, 2009.

# Appendix A – System Validation Plots and Data

\*\*\*\*\*

Test Result for UIM Dielectric Parameter  
Tue 22/Nov/2022  
Freq Frequency(GHz)  
FCC\_eH Limits for Head Epsilon  
FCC\_sH Limits for Head Sigma  
Test\_e Epsilon of UIM  
Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.5800	42.82	0.88	41.58	0.88
0.5900	42.77	0.88	41.52	0.89
0.6000	42.72	0.88	41.47	0.89
0.6100	42.67	0.88	41.42	0.90
0.6200	42.62	0.88	41.37	0.90
0.6300	42.56	0.88	41.30	0.90
0.6400	42.51	0.88	41.24	0.90
0.6500	42.46	0.88	41.18	0.90
0.6600	42.41	0.88	41.12	0.91
0.6700	42.36	0.89	41.06	0.91
0.6800	42.31	0.89	41.00	0.91
0.6805	42.307	0.89	40.997	0.911*
0.6900	42.25	0.89	40.94	0.92
0.7000	42.20	0.89	40.88	0.92

\* value interpolated

\*\*\*\*\*

Test Result for UIM Dielectric Parameter  
Tue 22/Nov/2022  
Freq Frequency(GHz)  
FCC\_eH Limits for Head Epsilon  
FCC\_sH Limits for Head Sigma  
Test\_e Epsilon of UIM  
Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.7000	42.20	0.89	41.49	0.88
0.7075	42.163	0.89	41.438	0.888*
0.7100	42.15	0.89	41.42	0.89
0.7200	42.10	0.89	41.37	0.90
0.7300	42.05	0.89	41.30	0.91
0.7400	41.99	0.89	41.24	0.91
0.7500	41.94	0.89	41.19	0.92
0.7600	41.89	0.89	41.13	0.93
0.7700	41.84	0.89	41.07	0.94
0.7800	41.79	0.90	41.01	0.94
0.7900	41.73	0.90	40.95	0.95
0.8000	41.68	0.90	40.91	0.95

\* value interpolated

\*\*\*\*\*

Test Result for UIM Dielectric Parameter  
Tue 22/Nov/2022  
Freq Frequency(GHz)  
eH Limits for Head Epsilon  
sH Limits for Head Sigma  
Test\_e Epsilon of UIM  
Test\_s Sigma of UIM

\*\*\*\*\*

Freq	eH	sH	Test_e	Test_s
0.8000	41.68	0.90	40.96	0.90
0.8100	41.63	0.90	40.91	0.91
0.8200	41.58	0.90	40.85	0.92
0.8300	41.53	0.90	40.90	0.92
0.8365	41.511	0.907	40.881	0.927*
0.8400	41.50	0.91	40.87	0.93
0.8500	41.50	0.92	40.85	0.94
0.8600	41.50	0.93	40.83	0.95
0.8700	41.50	0.94	40.81	0.96
0.8800	41.50	0.95	40.80	0.97
0.8900	41.50	0.96	40.79	0.98
0.9000	41.50	0.97	40.78	0.99
0.9100	41.50	0.98	40.77	1.00
0.9200	41.49	0.98	40.76	1.00

\* value interpolated

\*\*\*\*\*

Test Result for UIM Dielectric Parameter  
Mon 21/Nov/2022  
Freq Frequency(GHz)  
eH Limits for Head Epsilon  
sH Limits for Head Sigma  
Test\_e Epsilon of UIM  
Test\_s Sigma of UIM

\*\*\*\*\*

Freq	eH	sH	Test_e	Test_s
1.7000	40.16	1.34	39.45	1.34
1.7100	40.14	1.35	39.43	1.35
1.7200	40.13	1.35	39.41	1.36
1.7300	40.11	1.36	39.39	1.36
1.7400	40.09	1.37	39.37	1.37
1.7450	40.085	1.37	39.36	1.375*
1.7500	40.08	1.37	39.35	1.38
1.7600	40.06	1.38	39.33	1.39
1.7700	40.05	1.38	39.31	1.40
1.7800	40.03	1.39	39.29	1.40
1.7900	40.02	1.39	39.27	1.41

\* value interpolated

\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Mon 21/Nov/2022

Freq Frequency(GHz)

eH Limits for Head Epsilon

sH Limits for Head Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	eH	sH	Test_e	Test_s
1.8500	40.00	1.40	39.54	1.41
1.8600	40.00	1.40	39.52	1.42
1.8700	40.00	1.40	39.50	1.42
1.8800	40.00	1.40	39.48	1.43
1.8825	40.00	1.40	39.475	1.43*
1.8900	40.00	1.40	39.46	1.43
1.9000	40.00	1.40	39.44	1.43
1.9100	40.00	1.40	39.42	1.44
1.9200	40.00	1.40	39.41	1.45

\* value interpolated

\*\*\*\*\*

Test Result for UIM Dielectric Parameter

Wed 23/Nov/2022

Freq Frequency(GHz)

FCC\_eH Limits for Head Epsilon

FCC\_sH Limits for Head Sigma

Test\_e Epsilon of UIM

Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eH	FCC_sH	Test_e	Test_s
2.4900	39.15	1.84	39.02	1.86
2.5000	39.14	1.85	39.00	1.87
2.5100	39.12	1.87	38.97	1.88
2.5200	39.11	1.88	38.95	1.90
2.5300	39.10	1.89	38.93	1.91
2.5350	39.095	1.895	38.915	1.915*
2.5400	39.09	1.90	38.90	1.92
2.5500	39.07	1.91	38.88	1.94
2.5600	39.06	1.92	38.86	1.95
2.5700	39.05	1.93	38.83	1.96
2.5800	39.03	1.94	38.81	1.98
2.5900	39.02	1.95	38.78	1.99
2.5930	39.017	1.953	38.783	1.99*
2.6000	39.01	1.96	38.79	1.99
2.6100	39.00	1.97	38.77	2.00
2.6200	38.98	1.99	38.76	2.01
2.6300	38.97	2.00	38.74	2.02
2.6400	38.96	2.01	38.72	2.03
2.6500	38.95	2.02	38.70	2.04
2.6600	38.93	2.03	38.69	2.05
2.6700	38.92	2.04	38.67	2.06
2.6800	38.91	2.05	38.65	2.07
2.6900	38.89	2.06	38.63	2.08
2.7000	38.88	2.07	38.62	2.09

\* value interpolated

\*\*\*\*\*

Test Result for UIM Dielectric Parameter  
Wed 23/Nov/2022  
Freq Frequency(GHz)  
FCC\_eH Limits for Head Epsilon  
FCC\_sH Limits for Head Sigma  
Test\_e Epsilon of UIM  
Test\_s Sigma of UIM

\*\*\*\*\*

Freq	FCC_eH	FCC_sH	Test_e	Test_s
3.4000	38.05	2.80	37.79	2.85
3.4200	38.02	2.82	37.76	2.87
3.4400	38.00	2.85	37.74	2.90
3.4600	37.98	2.87	37.72	2.92
3.4800	37.95	2.89	37.69	2.94
3.5000	37.93	2.91	37.67	2.96
3.5200	37.91	2.93	37.65	2.98
3.5400	37.88	2.95	37.62	3.00
3.5500	37.87	2.96	37.61	3.01*
3.5600	37.86	2.97	37.60	3.02
3.5800	37.84	2.99	37.58	3.04
3.6000	37.81	3.02	37.55	3.07

\* value interpolated

# RF Exposure Lab

## Plot 1

**DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN 1053**


Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1  
Medium: HSL750; Medium parameters used (interpolated):  $f = 750 \text{ MHz}$ ;  $\sigma = 0.92 \text{ S/m}$ ;  $\epsilon_r = 41.19$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section

Test Date: Date: 11/22/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C  
Probe: EX3DV4 – SN3693; ConvF(10.46, 10.46, 10.46); Calibrated: 8/28/2022;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn759; Calibrated: 8/16/2022  
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**750 MHz Head/Verification/Area Scan (41x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 0.871 W/kg

**750 MHz Head/Verification /Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 33.964 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 1.72 mW/g  
 $P_{in} = 100 \text{ mW}$   
**SAR(1 g) = 0.861 mW/g; SAR(10 g) = 0.556 mW/g**  
Maximum value of SAR (measured) = 0.885 W/kg

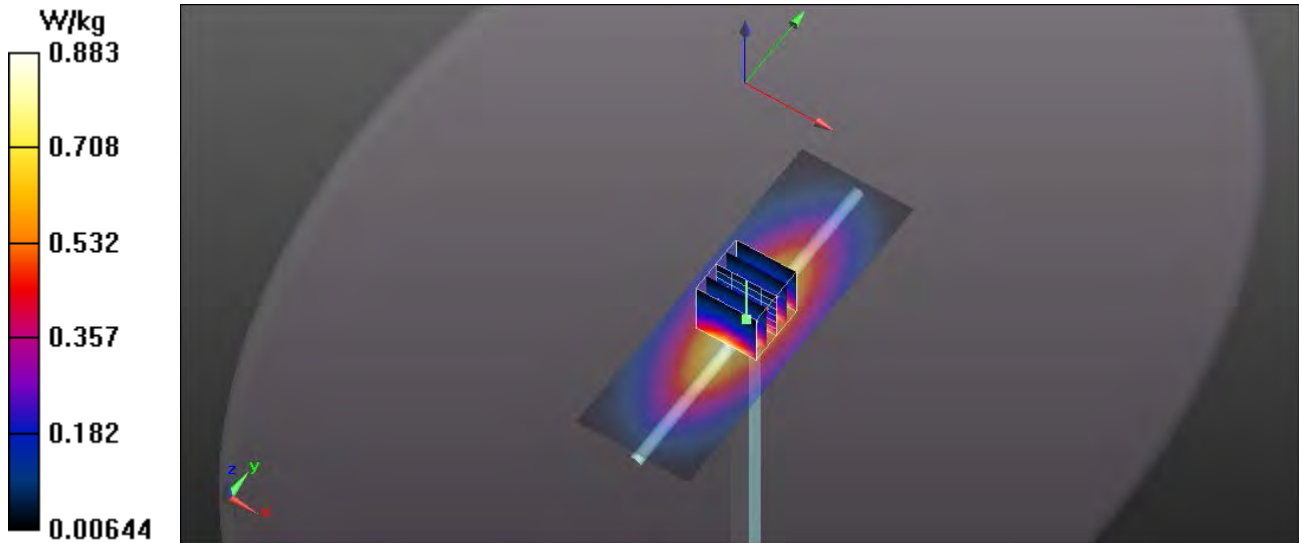

# RF Exposure Lab

## Plot 2

**DUT: Dipole 900 MHz D900V2; Type: D900V2; Serial: D900V2 - SN:1d128**


Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1  
Medium: HSL900; Medium parameters used:  $f = 900$  MHz;  $\sigma = 0.99$  S/m;  $\epsilon_r = 40.78$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 11/22/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C  
Probe: EX3DV4 – SN3693; ConvF(9.99, 9.99, 9.99); Calibrated: 8/28/2022;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn759; Calibrated: 8/16/2022  
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**900 MHz Head/Verification/Area Scan (5x11x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 1.26 W/kg

**900 MHz Head/Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 30.579 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 1.51 W/kg  
 $P_{in} = 100$  mW  
**SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.723 W/kg**  
Maximum value of SAR (measured) = 1.21 W/kg

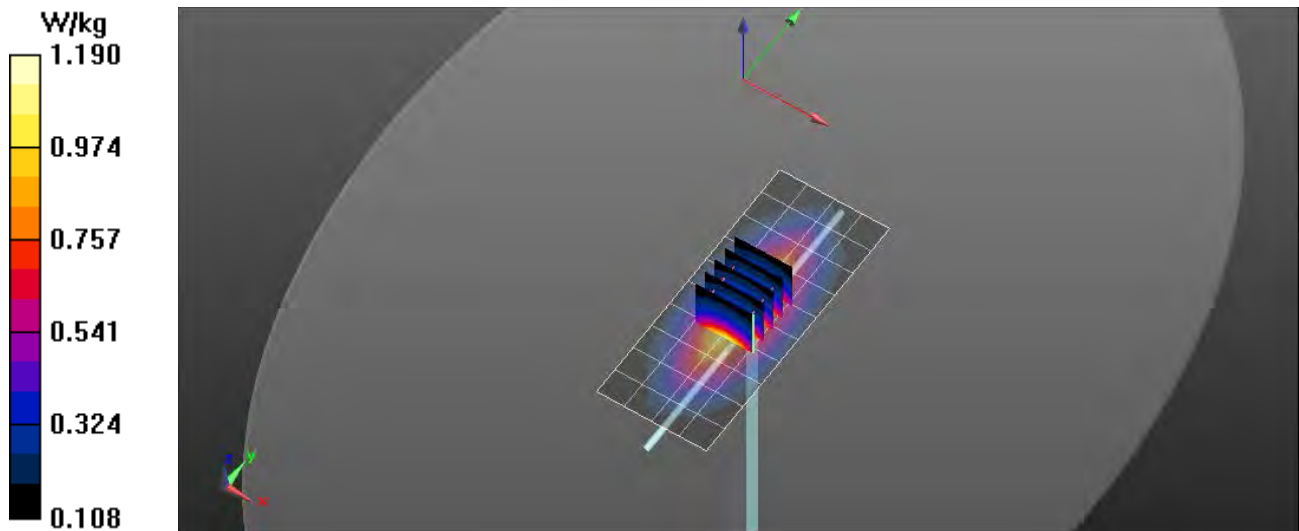

# RF Exposure Lab

## Plot 3

**DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1061**


Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1  
Medium: HSL1750; Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.38$  S/m;  $\epsilon_r = 39.35$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 11/21/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C  
Probe: EX3DV4 – SN3693; ConvF(8.83, 8.83, 8.83); Calibrated: 8/28/2022;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn759; Calibrated: 8/16/2022  
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**1750 MHz Head/Verification/Area Scan (5x7x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 5.41 W/kg

**1750 MHz Head/Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 34.269 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 6.91 W/kg  
 $P_{in} = 100$  mW  
**SAR(1 g) = 3.82 W/kg; SAR(10 g) = 2.01 W/kg**  
Maximum value of SAR (measured) = 5.49 W/kg

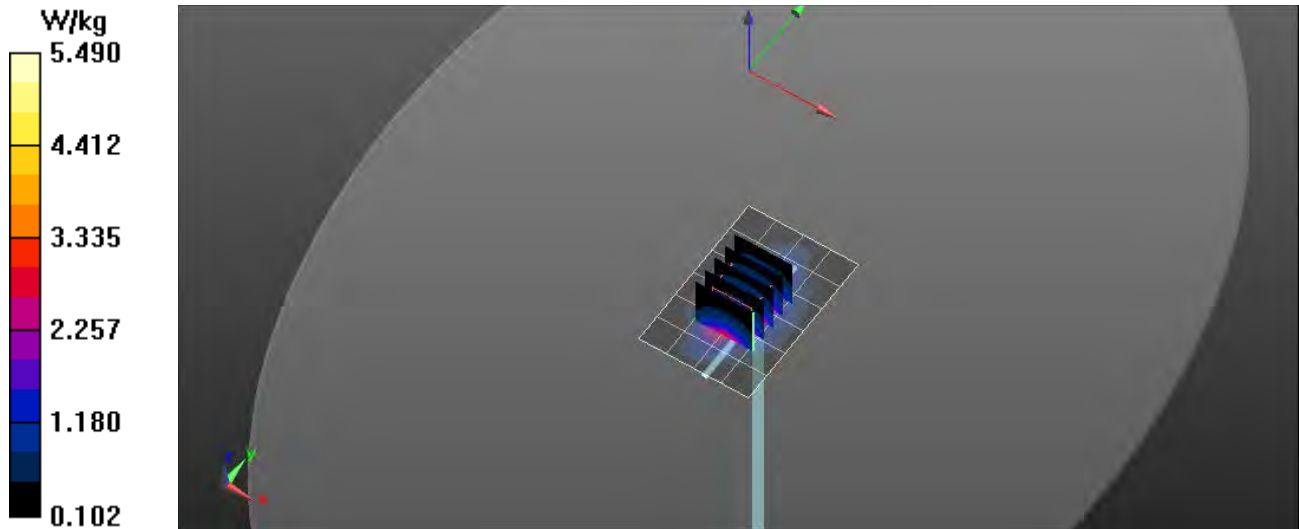



# RF Exposure Lab

## Plot 4

**DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN: 5d147**


Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1  
 Medium: HSL1900; Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.43$  S/m;  $\epsilon_r = 39.44$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

Test Date: Date: 11/21/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C  
 Probe: EX3DV4 – SN3693; ConvF(8.43, 8.43, 8.43); Calibrated: 8/28/2022;  
 Sensor-Surface: 2mm (Mechanical Surface Detection)  
 Electronics: DAE4 Sn759; Calibrated: 8/16/2022  
 Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251  
 Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**1900 MHz Head/Verification/Area Scan (5x7x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 5.75 W/kg

**1900 MHz Head/Verification/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 35.267 V/m; Power Drift = -0.03 dB  
 Peak SAR (extrapolated) = 7.22 W/kg  
 $P_{in} = 100$  mW  
**SAR(1 g) = 4.15 W/kg; SAR(10 g) = 2.15 W/kg**  
 Maximum value of SAR (measured) = 5.77 W/kg

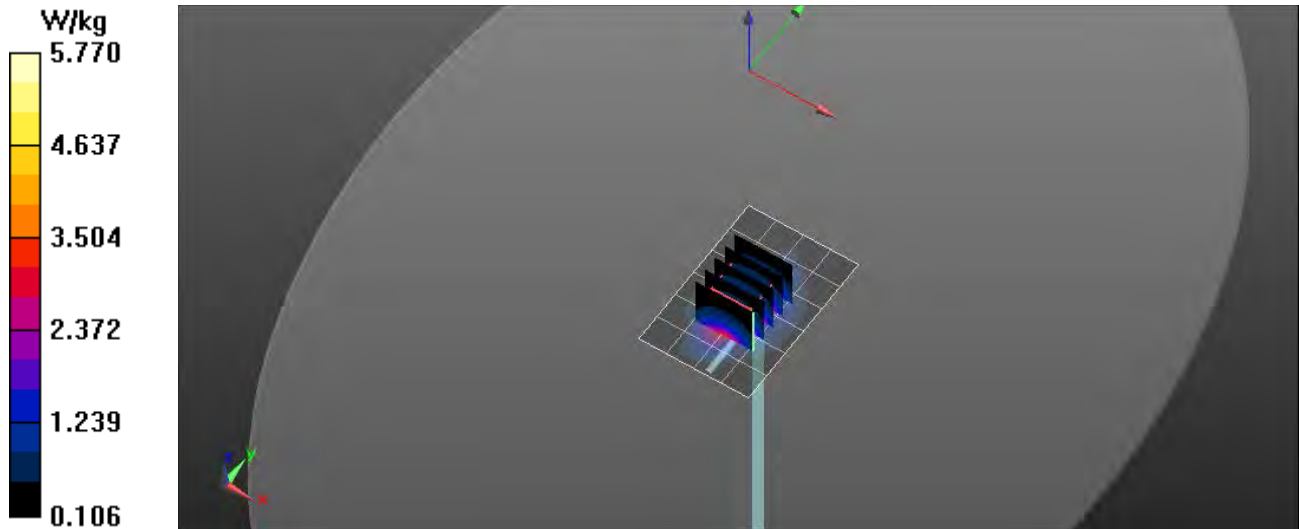

# RF Exposure Lab

## Plot 5

**DUT: Dipole 2550 MHz D2550V2; Type: D2550V2; Serial: D2550V2 - SN:1003**


Communication System: CW; Frequency: 2550 MHz; Duty Cycle: 1:1  
Medium: HSL2550; Medium parameters used:  $f = 2550$  MHz;  $\sigma = 1.94$  S/m;  $\epsilon_r = 38.88$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 11/23/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C  
Probe: EX3DV4 – SN3693; ConvF(7.71, 7.71, 7.71); Calibrated: 8/28/2022;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn759; Calibrated: 8/16/2022  
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**2550 MHz Head/Verification/Area Scan (61x81x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 9.16 W/kg

**2550 MHz Head/Verification/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 56.394 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 11.9 W/kg  
 $P_{in} = 100$  mW  
**SAR(1 g) = 5.69 W/kg; SAR(10 g) = 2.48 W/kg**  
Maximum value of SAR (measured) = 9.17 W/kg

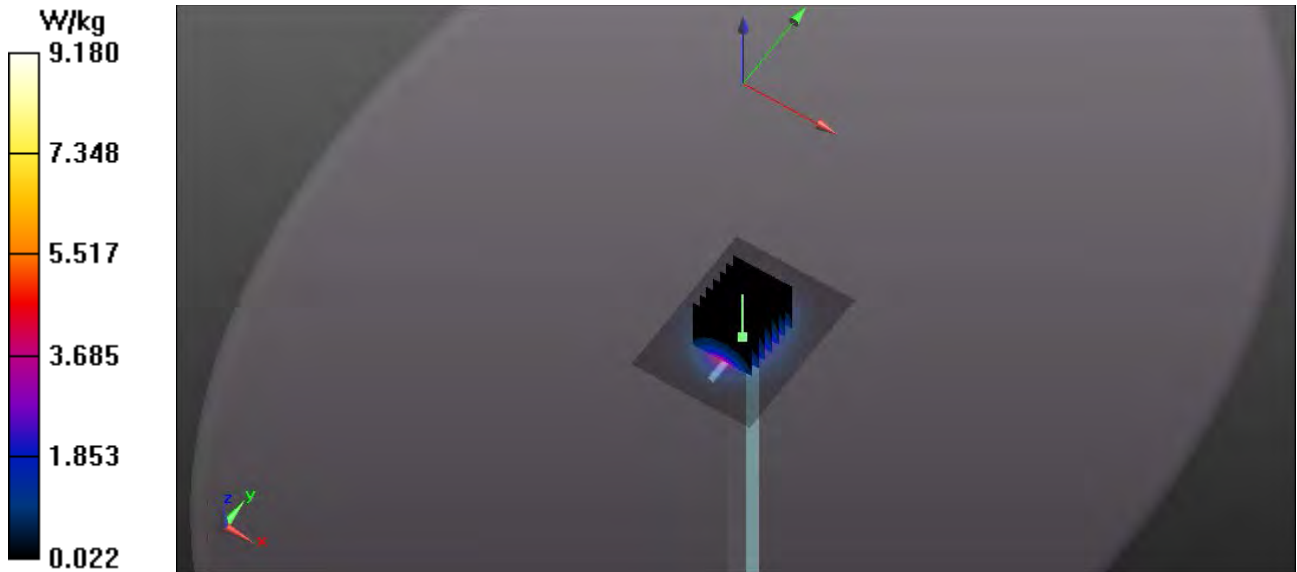

# RF Exposure Lab

## Plot 6

**DUT: Dipole D3500V2; Type: D3500V2; Serial: D3500V2 - SN: 1061**

Communication System: CW; Frequency: 3500 MHz; Duty Cycle: 1:1  
Medium: HSL 3-6 GHz; Medium parameters used:  $f = 3500$  MHz;  $\sigma = 2.96$  S/m;  $\epsilon_r = 37.67$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section


Test Date: Date: 11/23/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C  
Probe: EX3DV4 – SN3693; ConvF(6.98, 6.98, 6.98); Calibrated: 8/28/2022;  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn759; Calibrated: 8/16/2022  
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**3500 MHz Head/Verification/Area Scan (7x9x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (measured) = 1.68 W/kg

**3500 MHz Head/Verification/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=4mm  
Reference Value = 22.773 V/m; Power Drift = -0.01 dB  
Peak SAR (extrapolated) = 3.74 W/kg  
 $P_{in} = 10$  mW

**SAR(1 g) = 0.694 W/kg; SAR(10 g) = 0.263 W/kg**  
Maximum value of SAR (measured) = 1.71 W/kg

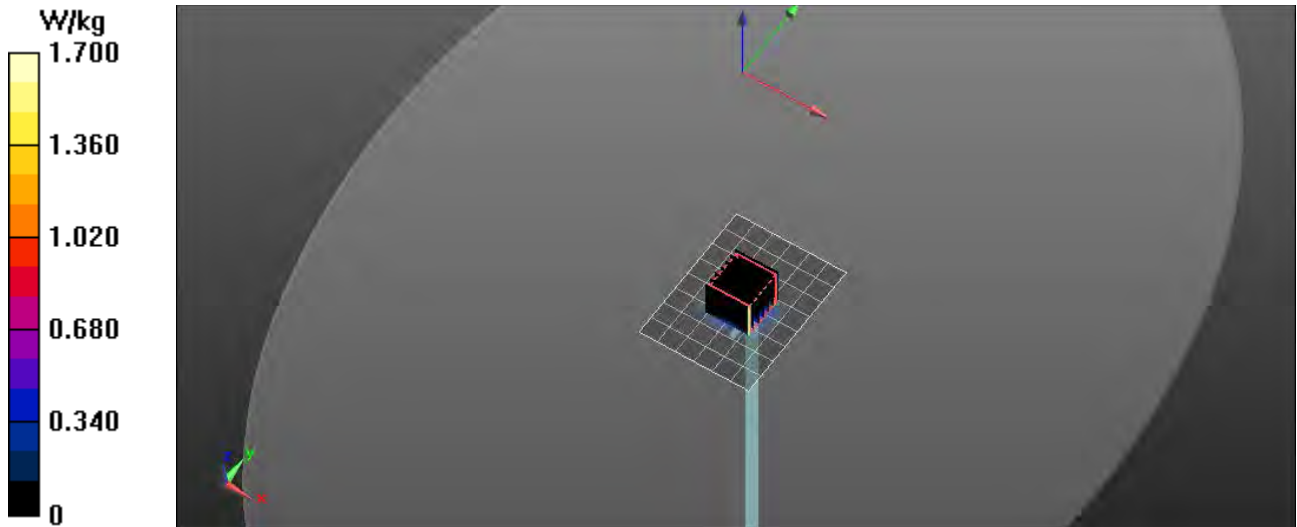

## Appendix B – SAR Test Data Plots

# RF Exposure Lab

## Plot 1

**DUT: M3000D; Type: Hotspot; IMEI: 990018850002639**

Communication System: FR1 (NR, 1 RB, 20 MHz, BPSK); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium: HSL750; Medium parameters used (extrapolated):  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.927 \text{ S/m}$ ;  $\epsilon_r = 40.881$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section

Test Date: Date: 11/22/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(9.99, 9.99, 9.99); Calibrated: 8/28/2022  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn759; Calibrated: 8/16/2022  
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**Band n5 FR1/Side C 1 RB 49 Offset Ant 0 Mid/Area Scan (7x15x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Extrapolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.646 W/kg

**Band n5 FR1/Side C 1 RB 49 Offset Ant 0 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 19.06 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.785 W/kg

**SAR(1 g) = 0.436 W/kg**

[Info: Extrapolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.647 W/kg

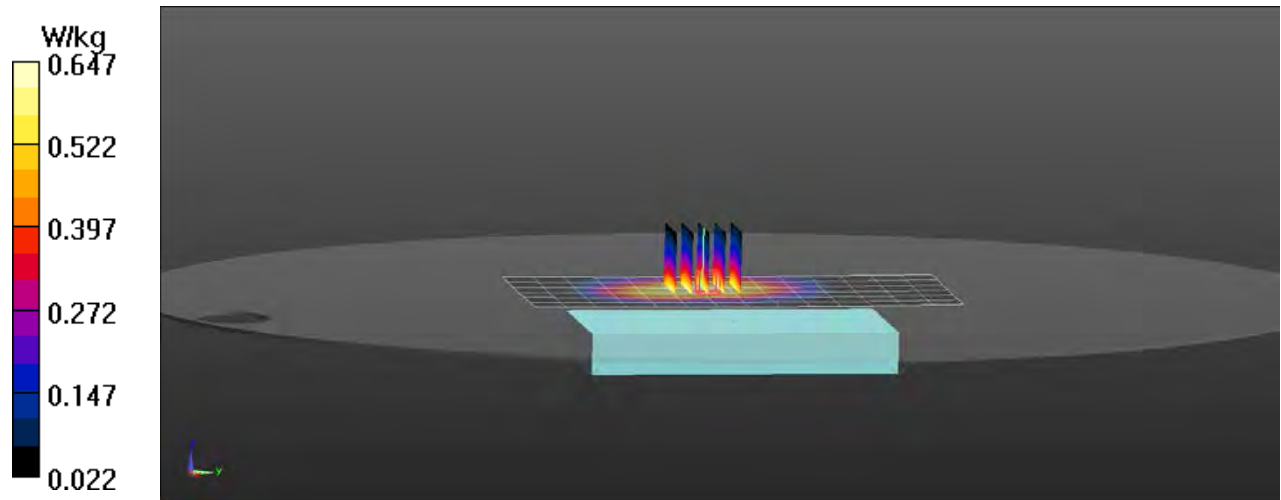

# RF Exposure Lab

## Plot 2

**DUT: M3000D; Type: Hotspot; IMEI: 990018850002639**

Communication System: FR1 (NR, 1 RB, 20 MHz, BPSK); Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium: HSL2550; Medium parameters used (interpolated):  $f = 2535$  MHz;  $\sigma = 1.915$  S/m;  $\epsilon_r = 38.915$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 11/23/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.71, 7.71, 7.71); Calibrated: 8/28/2022  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn759; Calibrated: 8/16/2022  
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


### Procedure Notes:

**Band n7 FR1/Side F 1 RB 49 Offset Ant 0 Mid/Area Scan (7x13x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)  
Maximum value of SAR (measured) = 1.09 W/kg

**Band n7 FR1/Side F 1 RB 49 Offset Ant 0 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 16.45 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 1.71 W/kg  
**SAR(1 g) = 0.829 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)  
Maximum value of SAR (measured) = 0.876 W/kg

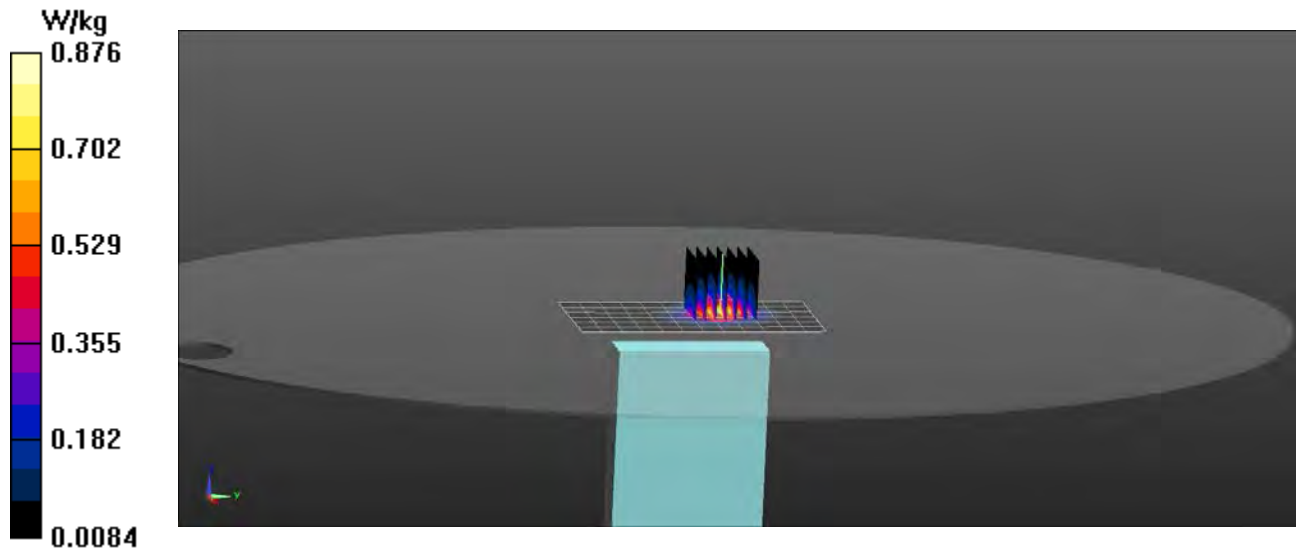

# RF Exposure Lab

## Plot 3

**DUT: M3000D; Type: Hotspot; IMEI: 990018850002639**

Communication System: FR1 (NR, 1 RB, 15 MHz, BPSK); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium: HSL750; Medium parameters used (interpolated):  $f = 707.5$  MHz;  $\sigma = 0.888$  S/m;  $\epsilon_r = 41.438$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 11/22/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(10.46, 10.46, 10.46); Calibrated: 8/28/2022  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn759; Calibrated: 8/16/2022  
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


### Procedure Notes:

**Band n12 FR1/Side A 1 RB 37 Offset Ant 0 Mid/Area Scan (7x15x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)  
Maximum value of SAR (measured) = 0.389 W/kg

**Band n12 FR1/Side A 1 RB 37 Offset Ant 0 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 24.00 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 0.447 W/kg  
**SAR(1 g) = 0.312 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)  
Maximum value of SAR (measured) = 0.397 W/kg

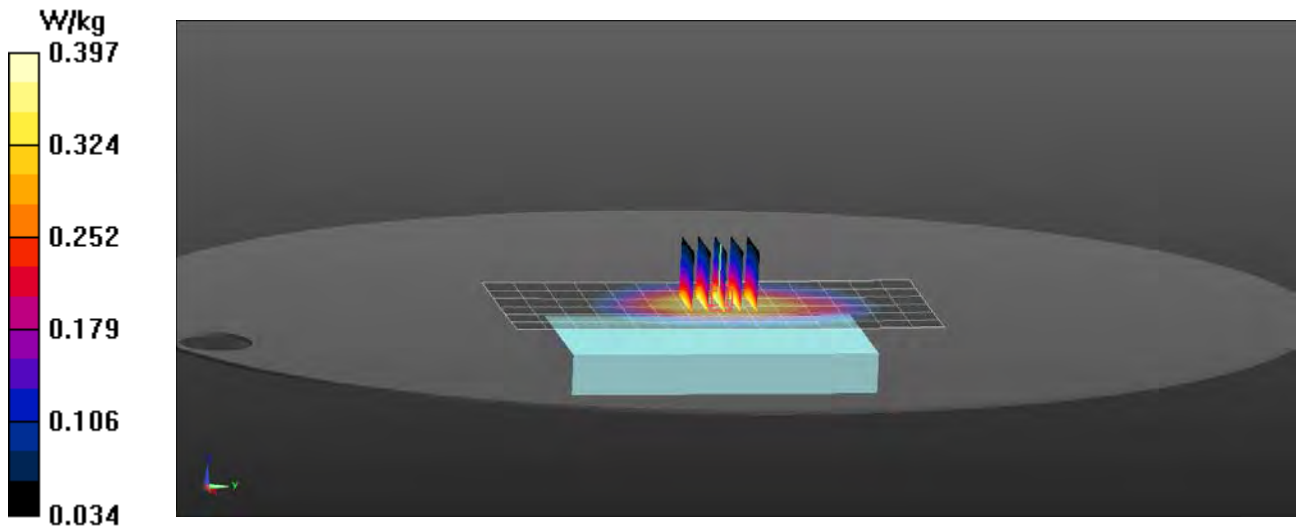

# RF Exposure Lab

## Plot 4

**DUT: M3000D; Type: Hotspot; IMEI: 990018850002639**

Communication System: FR1 (NR, 1 RB, 20 MHz, BPSK); Frequency: 1882.5 MHz; Duty Cycle: 1:1  
Medium: HSL1900; Medium parameters used (interpolated):  $f = 1882.5$  MHz;  $\sigma = 1.43$  S/m;  $\epsilon_r = 39.475$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 11/21/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(8.43, 8.43, 8.43); Calibrated: 8/28/2022  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn759; Calibrated: 8/16/2022  
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


### Procedure Notes:

**Band n25 FR1/Side F 1 RB 49 Offset Ant 0 Mid/Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)  
Maximum value of SAR (measured) = 1.10 W/kg

**Band n25 FR1/Side F 1 RB 49 Offset Ant 0 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 21.31 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 1.72 W/kg  
**SAR(1 g) = 0.791 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)  
Maximum value of SAR (measured) = 1.19 W/kg

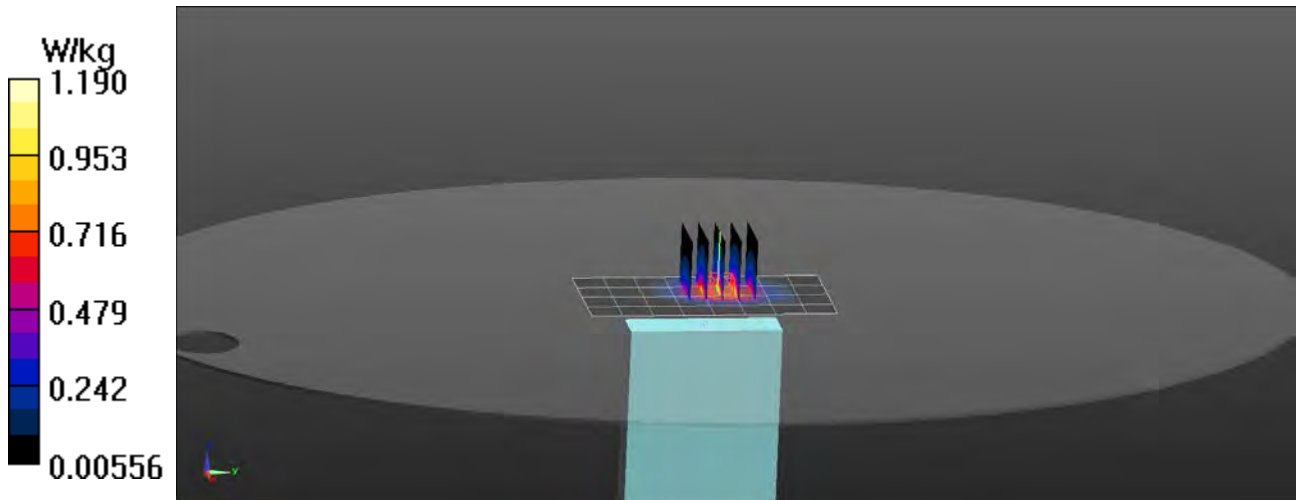



# RF Exposure Lab

## Plot 5

**DUT: M3000D; Type: Hotspot; IMEI: 990018850002639**

Communication System: FR1 (NR, 1 RB, 20 MHz, BPSK); Frequency: 2593 MHz; Duty Cycle: 1:1  
Medium: HSL2550; Medium parameters used (interpolated):  $f = 2593$  MHz;  $\sigma = 1.99$  S/m;  $\epsilon_r = 38.783$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 11/23/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.71, 7.71, 7.71); Calibrated: 8/28/2022  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn759; Calibrated: 8/16/2022  
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


### Procedure Notes:

**Band n41 FR1/Side A 1 RB 49 Offset Ant 0 Mid/Area Scan (10x22x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)  
Maximum value of SAR (measured) = 0.999 W/kg

**Band n41 FR1/Side A 1 RB 49 Offset Ant 0 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 2.556 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 1.33 W/kg  
**SAR(1 g) = 0.729 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)  
Maximum value of SAR (measured) = 1.02 W/kg

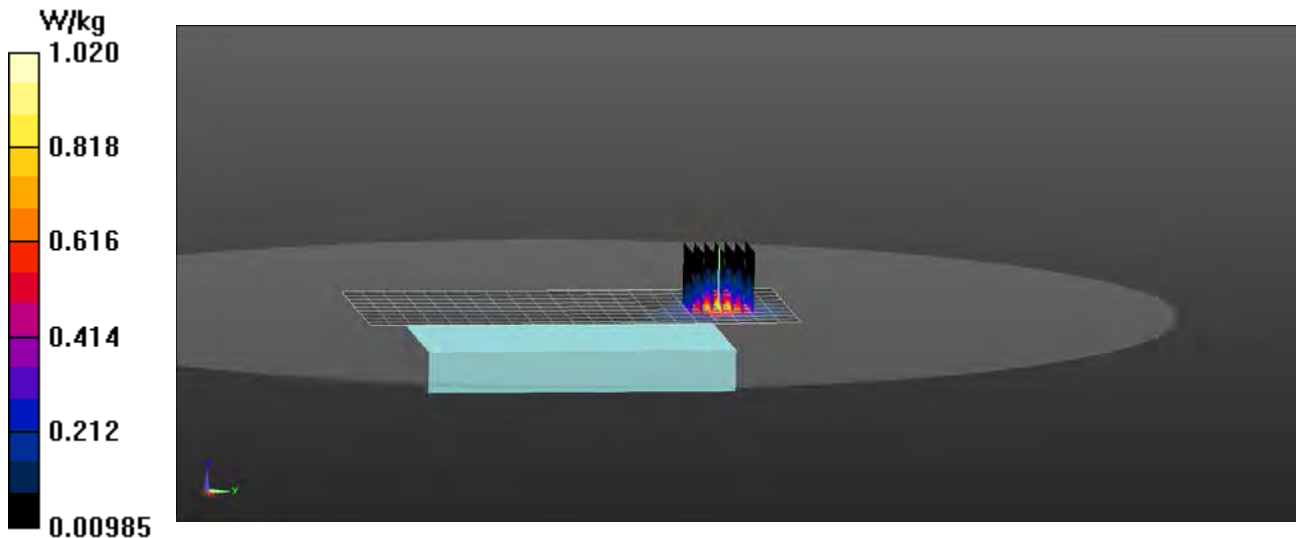

# RF Exposure Lab

## Plot 6

**DUT: M3000D; Type: Hotspot; IMEI: 990018850002639**

Communication System: FR1 (NR, 1 RB, 20 MHz, BPSK); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium: HSL1750; Medium parameters used (interpolated):  $f = 1745$  MHz;  $\sigma = 1.375$  S/m;  $\epsilon_r = 39.36$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 11/21/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(8.83, 8.83, 8.83); Calibrated: 8/28/2022  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn759; Calibrated: 8/16/2022  
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)


### Procedure Notes:

**Band n66 FR1/Side F 1 RB 49 Offset Ant 0 Mid/Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)  
Maximum value of SAR (measured) = 1.11 W/kg

**Band n66 FR1/Side F 1 RB 49 Offset Ant 0 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 31.68 V/m; Power Drift = -0.04 dB  
Peak SAR (extrapolated) = 1.75 W/kg  
**SAR(1 g) = 0.816 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)  
Maximum value of SAR (measured) = 1.08 W/kg

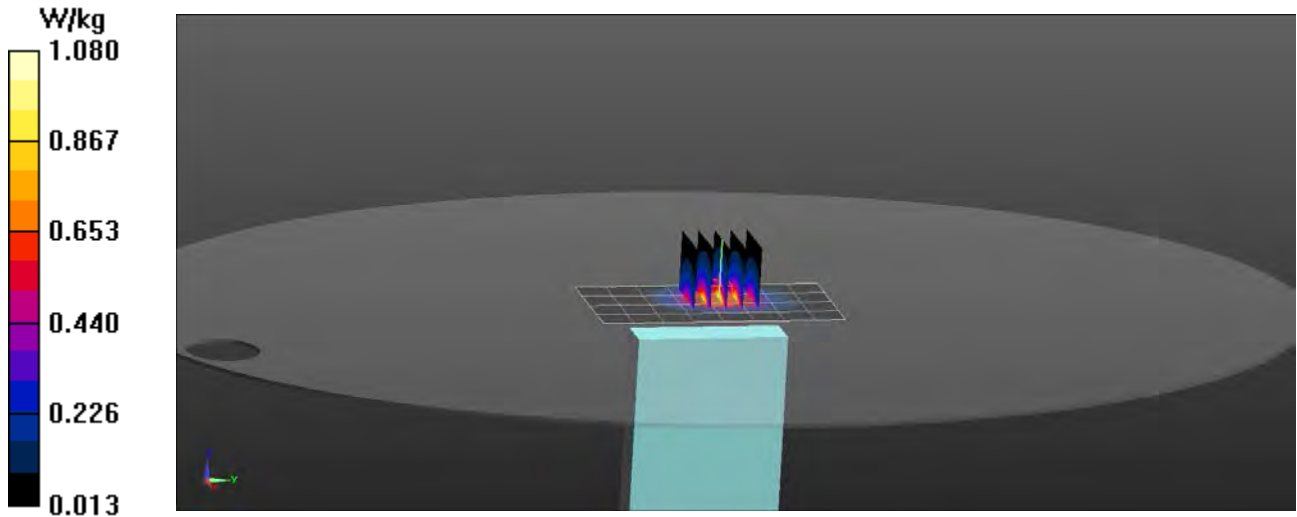

# RF Exposure Lab

## Plot 7

**DUT: M3000D; Type: Hotspot; IMEI: 990018850002639**

Communication System: FR1 (NR, 1 RB, 20 MHz, BPSK); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium: HSL600; Medium parameters used (interpolated):  $f = 680.5$  MHz;  $\sigma = 0.911$  S/m;  $\epsilon_r = 40.997$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 11/22/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(10.46, 10.46, 10.46); Calibrated: 8/28/2022  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn759; Calibrated: 8/16/2022  
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**Band n71 FR1/Side A 1 RB 49 Offset Ant 0 Mid/Area Scan (7x15x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.367 W/kg

**Band n71 FR1/Side A 1 RB 49 Offset Ant 0 Mid/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.28 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.473 W/kg

**SAR(1 g) = 0.397 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.363 W/kg

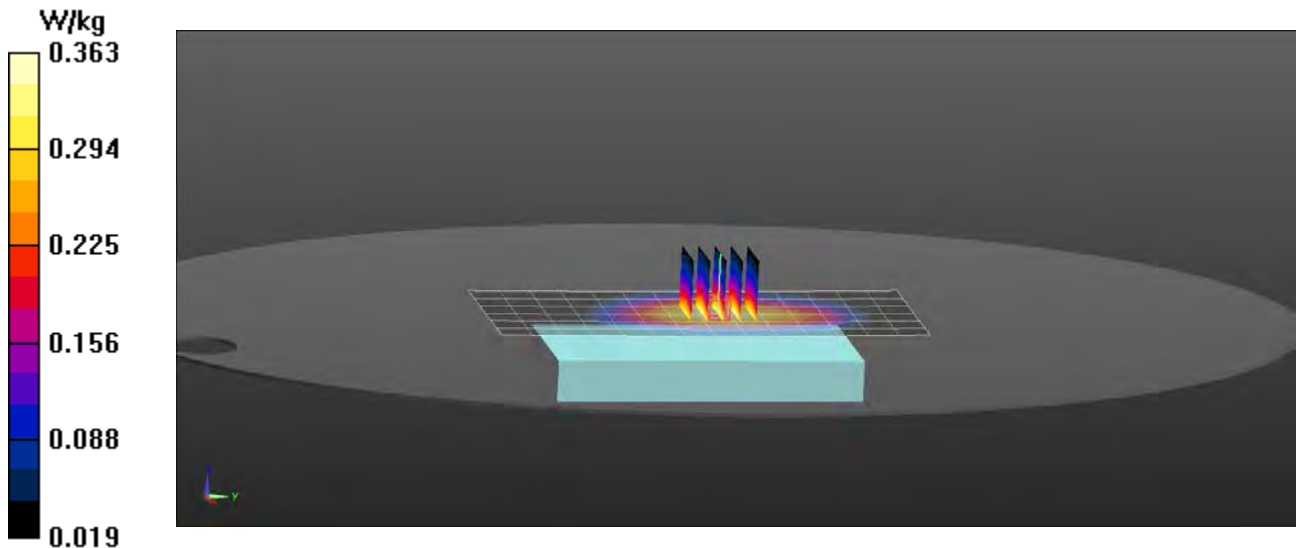

# RF Exposure Lab

## Plot 8

**DUT: M3000D; Type: Hotspot; IMEI: 990018850002639**

Communication System: FR1 (NR, 1 RB, 20 MHz, BPSK); Frequency: 3500 MHz; Duty Cycle: 1:1  
Medium: HSL3-6GHz; Medium parameters used (interpolated):  $f = 3550$  MHz;  $\sigma = 3.01$  S/m;  $\epsilon_r = 37.61$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Test Date: Date: 11/23/2022; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 – SN3693; ConvF(6.98, 6.98, 6.98); Calibrated: 8/28/2022  
Sensor-Surface: 2mm (Mechanical Surface Detection)  
Electronics: DAE4 Sn759; Calibrated: 8/16/2022  
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251  
Measurement SW: DASY52, Version 52.10 (0); SEMCAD X Version 14.6.10 (7417)

### Procedure Notes:

**Band n78 FR1/Side B 1 RB 49 Offset Ant 4 Mid/Area Scan (7x22x1):** Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.59 W/kg

**Band n78 FR1/Side B 1 RB 49 Offset Ant 4 Mid/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=4mm

Reference Value = 9.619 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.77 W/kg

**SAR(1 g) = 0.722 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.52 W/kg

**Band n78 FR1/Side B 1 RB 49 Offset Ant 4 Mid/Zoom Scan (7x7x7)/Cube 1:** Measurement grid: dx=4mm, dy=4mm, dz=4mm



Reference Value = 9.619 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.52 W/kg

**SAR(1 g) = 0.705 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.46 W/kg

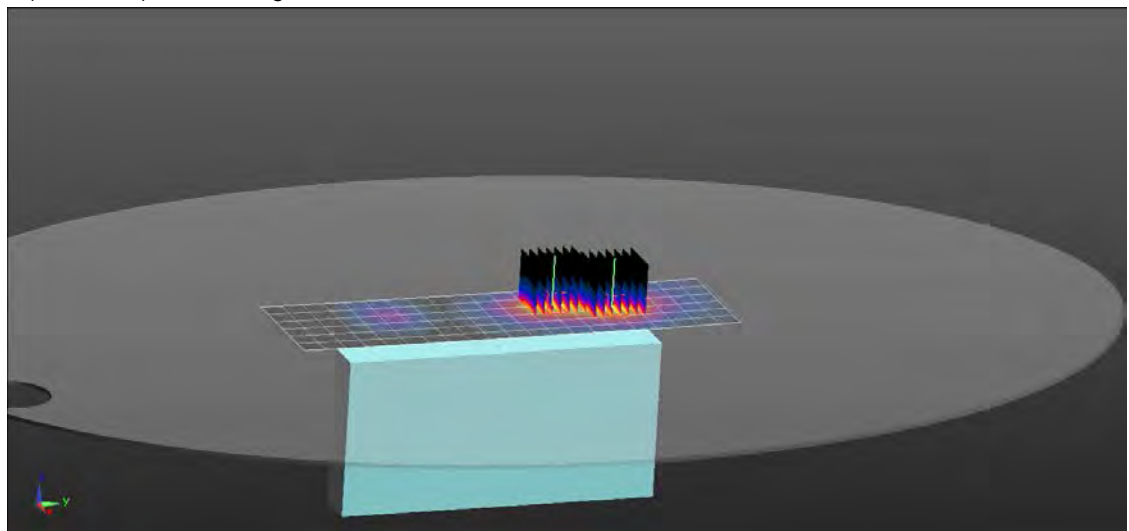

**Appendix C – SAR Test Setup Photos**



**Test Position Side A 10 mm Gap**



**Test Position Side B 10 mm Gap**



**Test Position Side C 10 mm Gap**



**Test Position Side D 10 mm Gap**






**Test Position Side E 10 mm Gap**



**Test Position Side F 10 mm Gap**

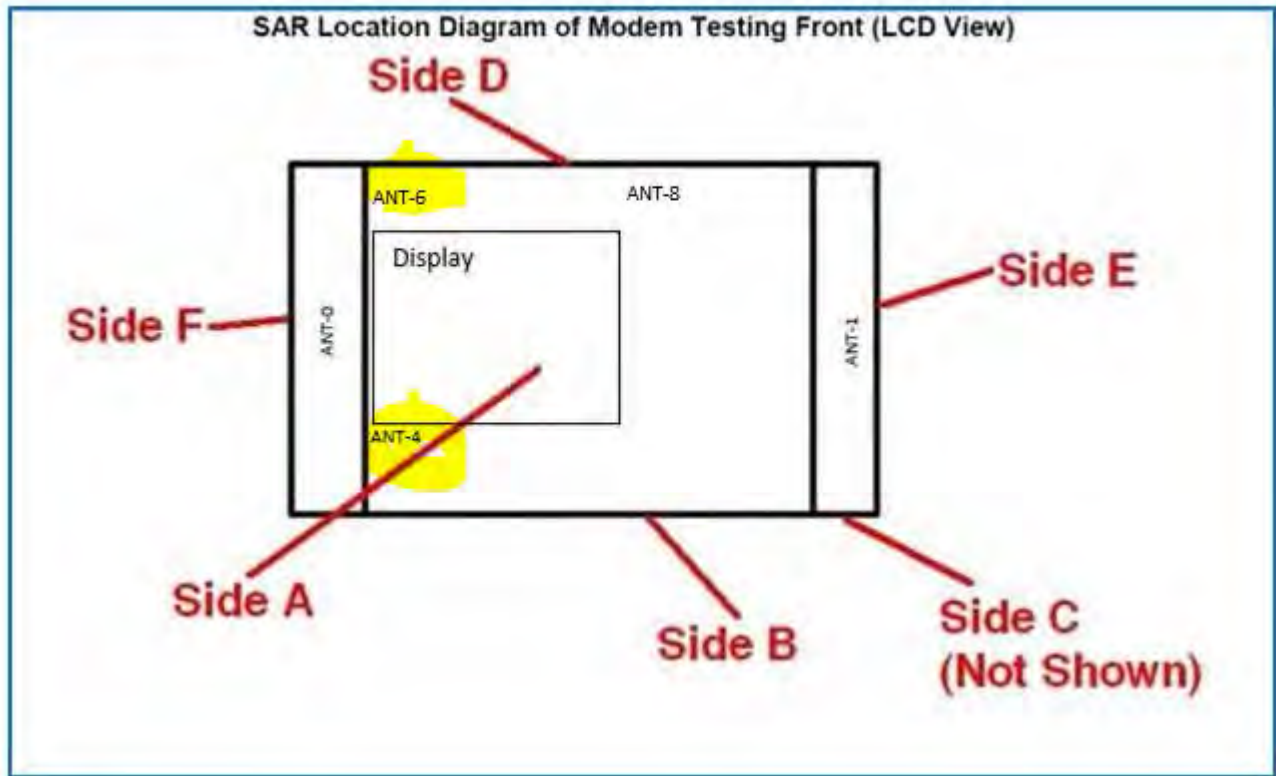

**Test Positions**


**Side C Not  
Shown**

**Side F**

**Side B**

**Side D**

**Side A Shown**

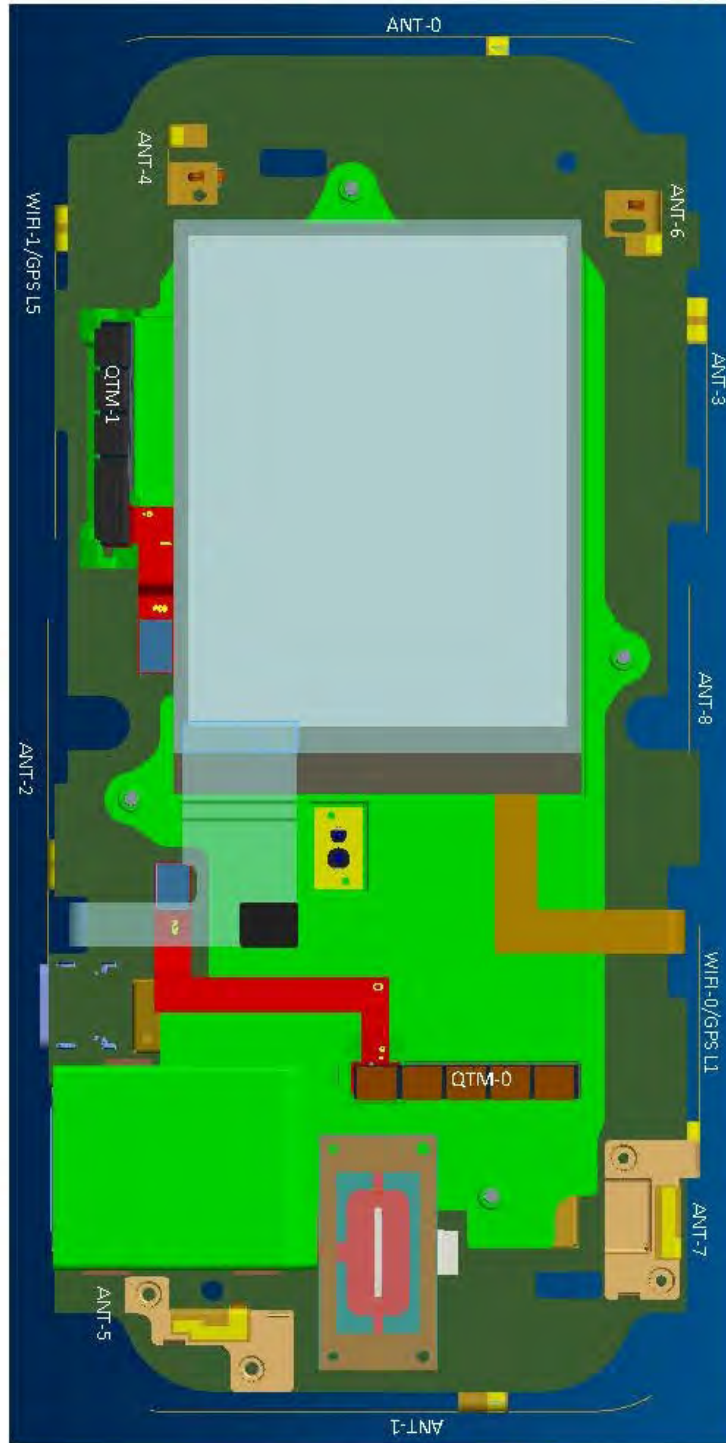

**Side E**

**Antenna Locations**



**Front of Device**



**Back of Device**

## Appendix D – Probe Calibration Data Sheets



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client

**RF Exposure Lab**

Certificate No

**EX-3693\_Aug22**

**CALIBRATION CERTIFICATE**

Object **EX3DV4 - SN:3693**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v6, QA CAL-23.v5, QA CAL-25.v7**  
**Calibration procedure for dosimetric E-field probes**

Calibration date **August 28, 2022**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3) °C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-22 (No. 217-03525/03524)	Apr-23
Power sensor NRP-Z91	SN: 103244	04-Apr-22 (No. 217-03524)	Apr-23
OCP DAK-3.5 (weighted)	SN: 1249	20-Oct-21 (OCP-DAK3.5-1249_Oct21)	Oct-22
OCP DAK-12	SN: 1016	20-Oct-21 (OCP-DAK12-1016_Oct21)	Oct-22
Reference 20 dB Attenuator	SN: CC2552 (20x)	04-Apr-22 (No. 217-03527)	Apr-23
DAE4	SN: 660	13-Oct-21 (No. DAE4-660_Oct21)	Oct-22
Reference Probe ES3DV2	SN: 3013	27-Dec-21 (No. ES3-3013_Dec21)	Dec-22

Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-22)	In house check: Jun-24
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-22

	Name	Function	Signature
Calibrated by	Jeton Kastrati	Laboratory Technician	
Approved by	Sven Kühn	Technical Manager	

Issued: August 30, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.





Accredited by the Swiss Accreditation Service (SAS)

**The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates**Accreditation No.: **SCS 0108**

## Glossary

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

## Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices – Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal. DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

## Parameters of Probe: EX3DV4 - SN:3693

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc ( $k = 2$ )
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	0.50	0.51	0.44	$\pm 10.1\%$
DCP (mV) <sup>B</sup>	96.8	100.6	102.1	$\pm 4.7\%$

### Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Max dev.	Max Unc <sup>E</sup> $k = 2$
0	CW	X	0.00	0.00	1.00	0.00	157.5	$\pm 3.3\%$	$\pm 4.7\%$
		Y	0.00	0.00	1.00		162.3		
		Z	0.00	0.00	1.00		173.8		
10352	Pulse Waveform (200Hz, 10%)	X	1.41	60.41	5.97	10.00	60.0	$\pm 3.8\%$	$\pm 9.6\%$
		Y	1.41	60.24	5.80		60.0		
		Z	1.64	61.43	6.72		60.0		
10353	Pulse Waveform (200Hz, 20%)	X	0.78	60.00	4.53	6.99	80.0	$\pm 3.1\%$	$\pm 9.6\%$
		Y	0.84	60.00	4.65		80.0		
		Z	0.78	60.00	4.79		80.0		
10354	Pulse Waveform (200Hz, 40%)	X	0.63	121.42	0.66	3.98	95.0	$\pm 2.3\%$	$\pm 9.6\%$
		Y	0.55	60.00	3.37		95.0		
		Z	0.01	128.58	0.01		95.0		
10355	Pulse Waveform (200Hz, 60%)	X	0.24	159.99	0.04	2.22	120.0	$\pm 1.9\%$	$\pm 9.6\%$
		Y	0.00	153.68	44.28		120.0		
		Z	1.46	156.36	11.83		120.0		
10387	QPSK Waveform, 1 MHz	X	0.56	63.72	12.01	1.00	150.0	$\pm 4.3\%$	$\pm 9.6\%$
		Y	0.79	69.94	15.81		150.0		
		Z	0.52	65.18	12.85		150.0		
10388	QPSK Waveform, 10 MHz	X	1.46	66.67	14.46	0.00	150.0	$\pm 1.0\%$	$\pm 9.6\%$
		Y	1.59	68.83	15.76		150.0		
		Z	1.35	66.91	14.30		150.0		
10396	64-QAM Waveform, 100 kHz	X	1.50	63.12	15.74	3.01	150.0	$\pm 1.8\%$	$\pm 9.6\%$
		Y	1.77	66.13	18.52		150.0		
		Z	1.75	66.34	18.52		150.0		
10399	64-QAM Waveform, 40 MHz	X	2.93	66.43	15.36	0.00	150.0	$\pm 2.9\%$	$\pm 9.6\%$
		Y	2.92	66.89	15.72		150.0		
		Z	2.80	66.46	15.34		150.0		
10414	WLAN CCDF, 64-QAM, 40 MHz	X	3.97	65.99	15.53	0.00	150.0	$\pm 4.8\%$	$\pm 9.6\%$
		Y	4.04	66.85	15.99		150.0		
		Z	3.92	66.75	15.78		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Linearization parameter uncertainty for maximum specified field strength.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## Parameters of Probe: EX3DV4 - SN:3693

### Sensor Model Parameters

	C1 fF	C2 fF	$\alpha$ $V^{-1}$	T1 $msV^{-2}$	T2 $msV^{-1}$	T3 ms	T4 $V^{-2}$	T5 $V^{-1}$	T6
x	11.5	88.41	37.23	3.25	0.00	4.93	0.00	0.01	1.00
y	10.4	77.87	35.87	6.20	0.00	4.90	0.00	0.00	1.02
z	9.3	70.28	36.51	2.81	0.00	4.96	0.00	0.00	1.02

### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle	-146.9°
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

**Note:** Measurement distance from surface can be increased to 3–4 mm for an *Area Scan* job.

## Parameters of Probe: EX3DV4 - SN:3693

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity <sup>F</sup> (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k = 2)
13	55.0	0.75	14.97	14.97	14.97	0.00	1.00	±13.3%
30	55.0	0.75	14.21	14.21	14.21	0.00	1.00	±13.3%
750	41.9	0.89	10.46	10.46	10.46	0.43	0.80	±12.0%
900	41.5	0.97	9.99	9.99	9.99	0.36	0.86	±12.0%
1300	40.8	1.14	9.50	9.50	9.50	0.25	1.22	±12.0%
1750	40.1	1.37	8.83	8.83	8.83	0.34	0.80	±12.0%
1900	40.0	1.40	8.43	8.43	8.43	0.31	0.84	±12.0%
2300	39.5	1.67	8.24	8.24	8.24	0.33	0.90	±12.0%
2450	39.2	1.80	8.06	8.06	8.06	0.25	0.90	±12.0%
2600	39.0	1.96	7.71	7.71	7.71	0.35	0.90	±12.0%
3300	38.2	2.71	7.02	7.02	7.02	0.30	1.35	±13.1%
3500	37.9	2.91	6.98	6.98	6.98	0.30	1.35	±13.1%
3700	37.7	3.12	6.95	6.95	6.95	0.30	1.35	±13.1%
3900	37.5	3.32	6.40	6.40	6.40	0.40	1.50	±13.1%
4200	37.1	3.63	6.18	6.18	6.18	0.40	1.70	±13.1%
4600	36.7	4.04	5.99	5.99	5.99	0.40	1.70	±13.1%
4950	36.3	4.40	5.77	5.77	5.77	0.40	1.80	±13.1%
5250	35.9	4.71	5.30	5.30	5.30	0.40	1.80	±13.1%
5600	35.5	5.07	4.63	4.63	4.63	0.40	1.80	±13.1%
5750	35.4	5.22	4.70	4.70	4.70	0.40	1.80	±13.1%

<sup>C</sup> Frequency validity above 300 MHz of ±100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ±50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4–9 MHz, and ConvF assessed at 13 MHz is 9–19 MHz. Above 5 GHz frequency validity can be extended to ±110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz and below ±2% for frequencies between 3–6 GHz at any distance larger than half the probe tip diameter from the boundary.

## Parameters of Probe: EX3DV4 - SN:3693

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity <sup>F</sup> (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k = 2)
6500	34.5	6.07	4.80	4.80	4.80	0.20	2.50	±18.6%


<sup>C</sup> Frequency validity at 6.5 GHz is -600/+700 MHz, and ±700 MHz at or above 7 GHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

<sup>F</sup> At frequencies 6–10 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz; below ±2% for frequencies between 3–6 GHz; and below ±4% for frequencies between 6–10 GHz at any distance larger than half the probe tip diameter from the boundary.



### Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide:R22)

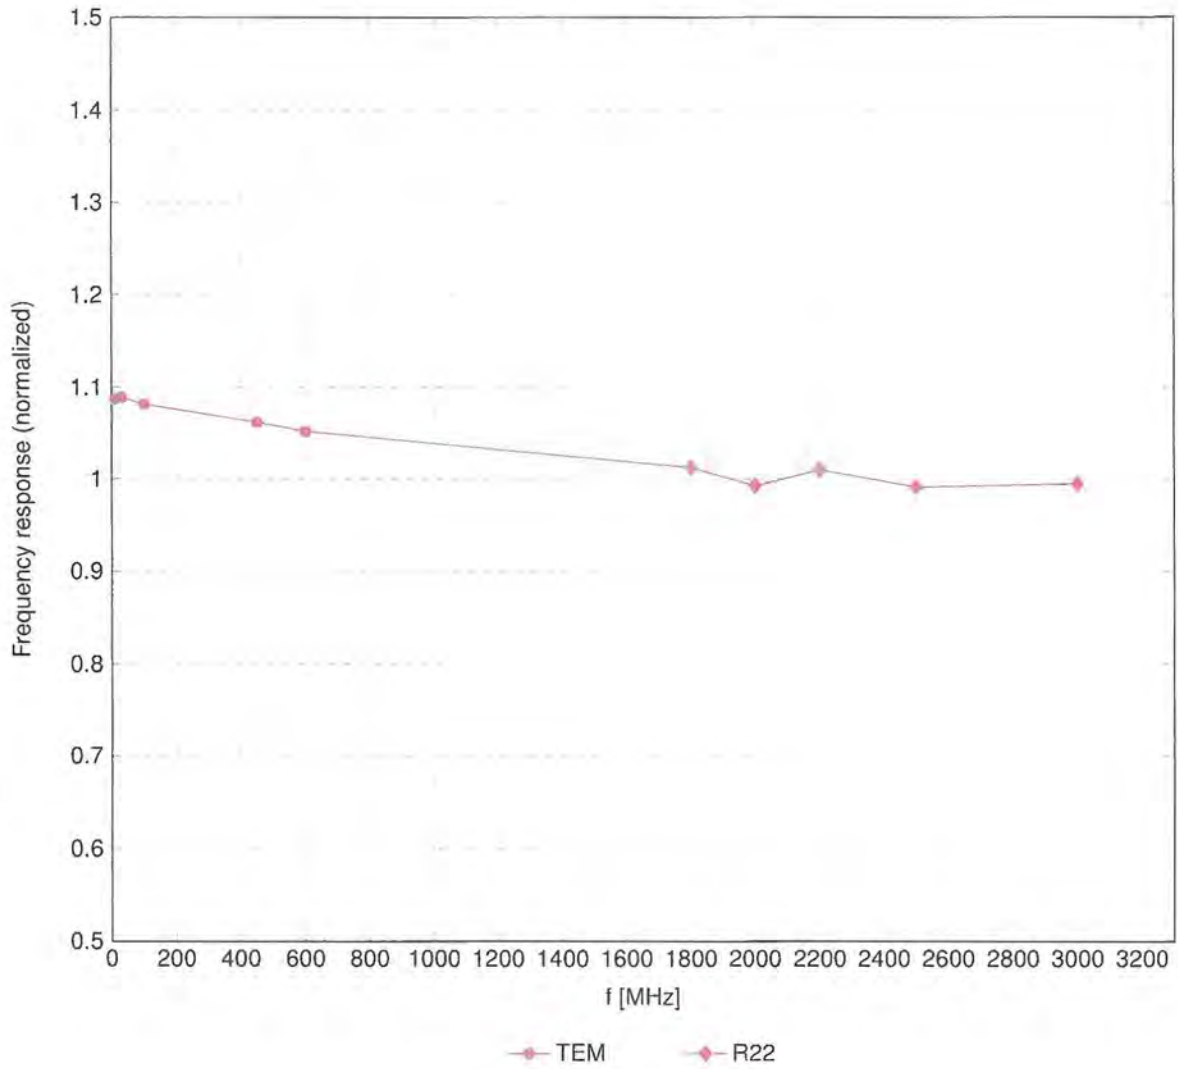

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )



### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

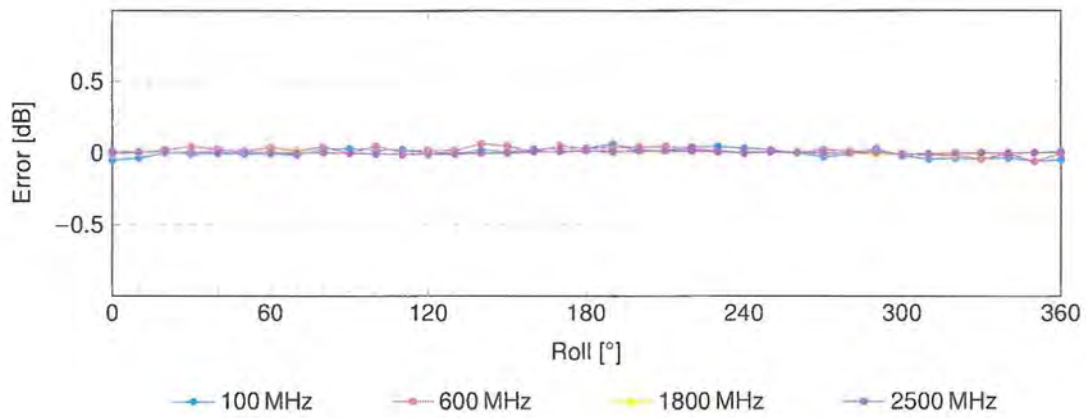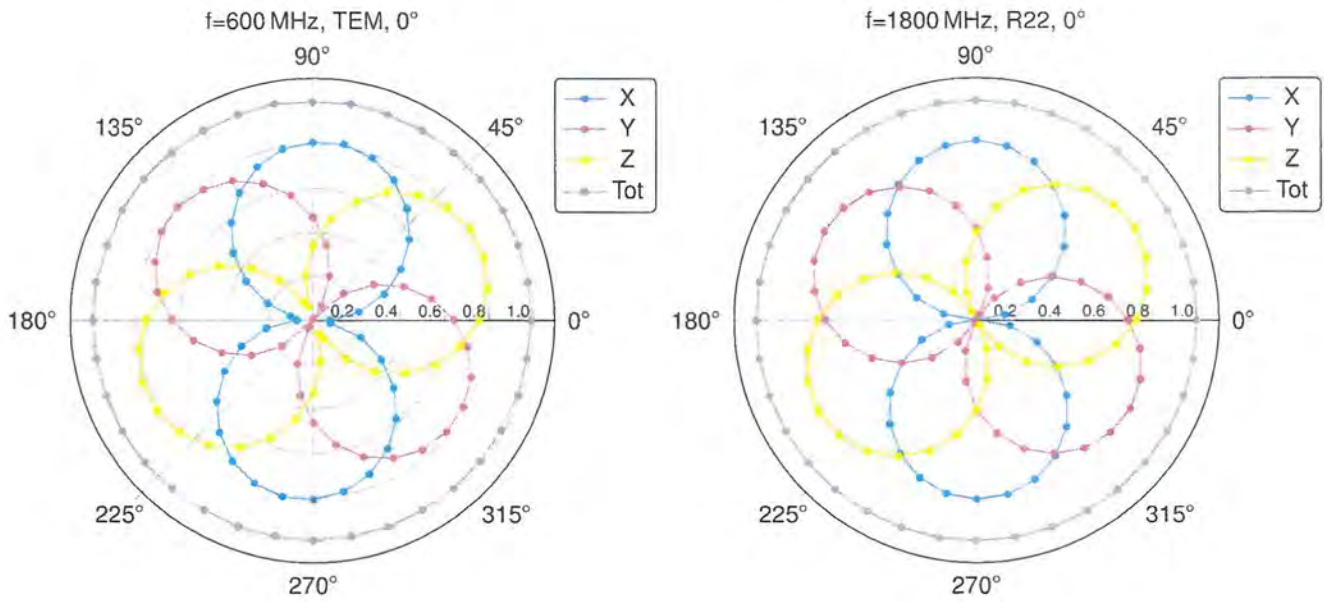

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

### Dynamic Range f(SAR<sub>head</sub>)


(TEM cell,  $f_{eval} = 1900\text{MHz}$ )

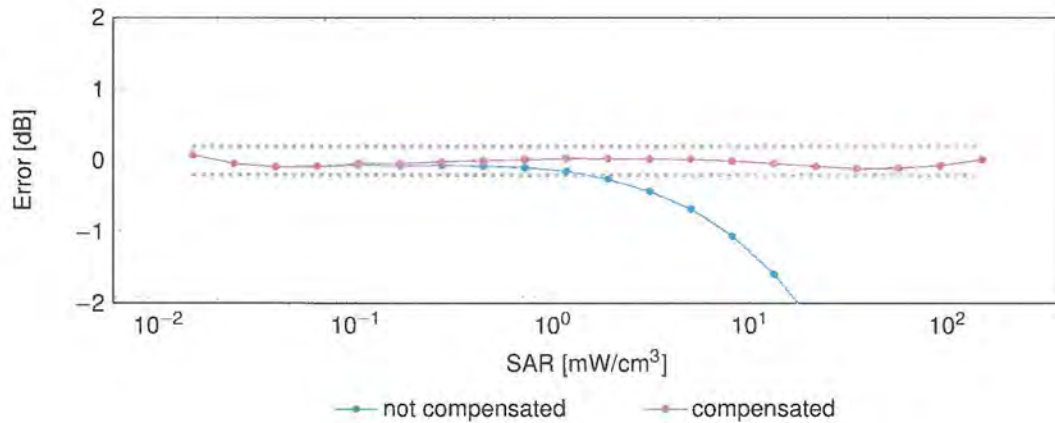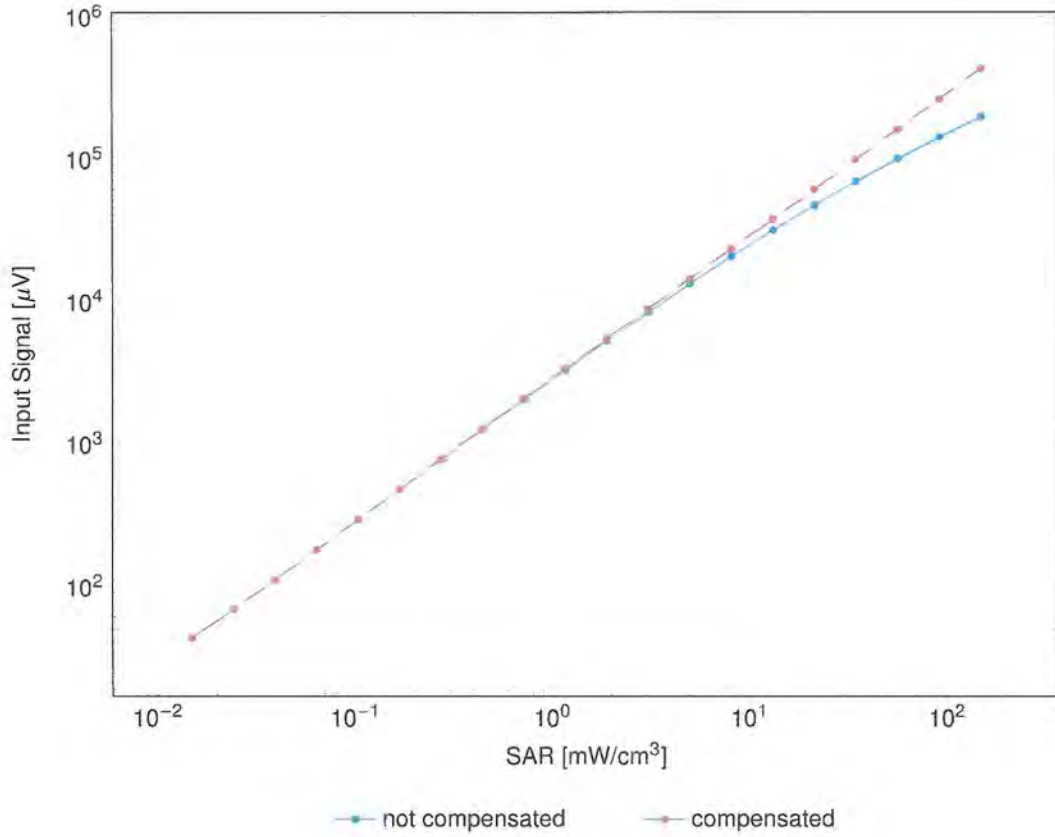

Uncertainty of Linearity Assessment: ±0.6% (k=2)




### Conversion Factor Assessment

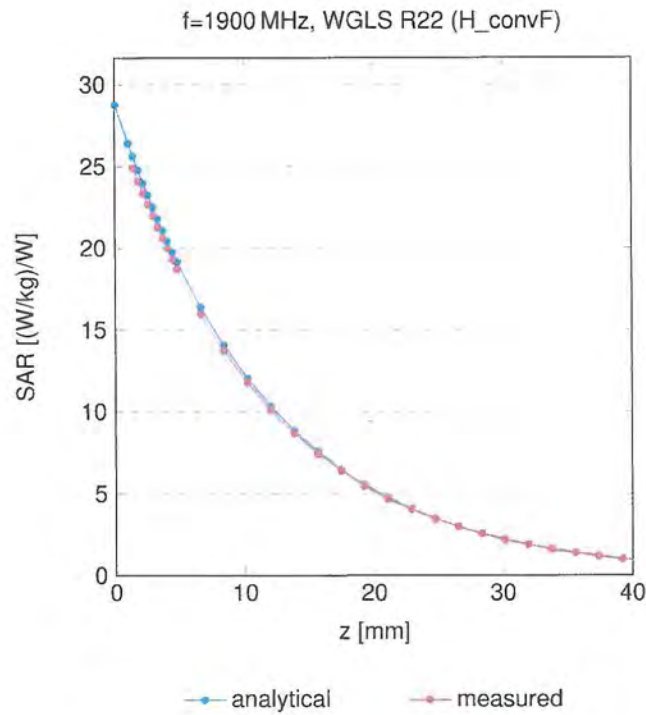

### Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ), f = 900 MHz

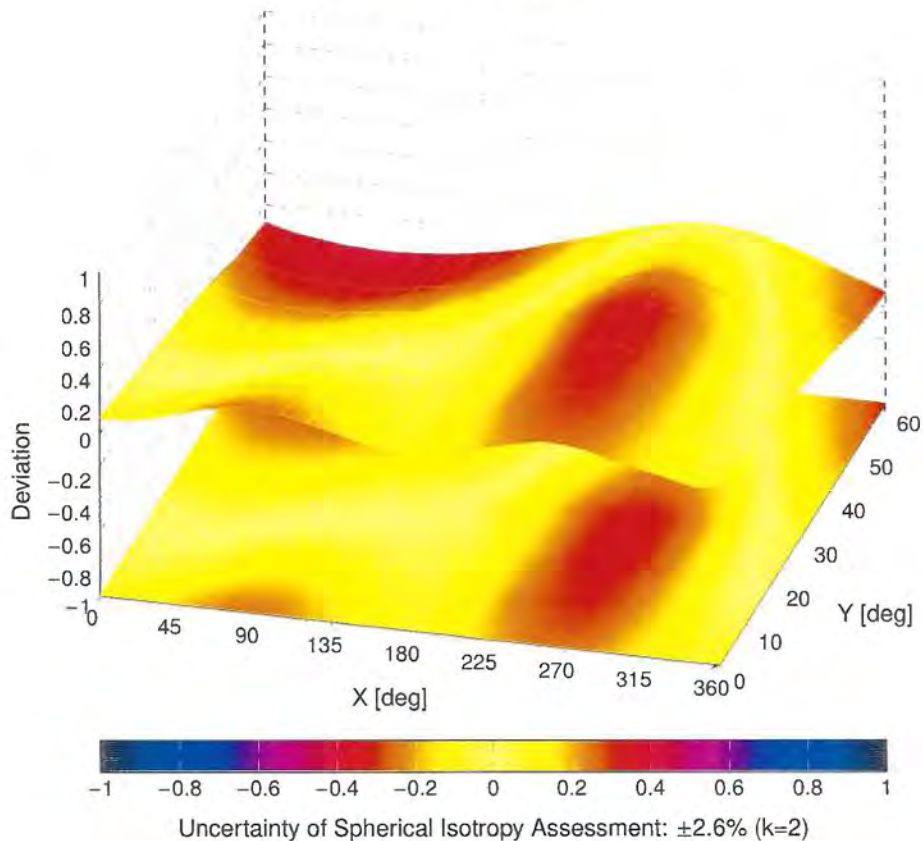

## Appendix: Modulation Calibration Parameters

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
0		CW	CW	0.00	±4.7
10010	CAA	SAR Validation (Square, 100 ms, 10 ms)	Test	10.00	±9.6
10011	CAB	UMTS-FDD (WCDMA)	WCDMA	2.91	±9.6
10012	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	WLAN	1.87	±9.6
10013	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	WLAN	9.46	±9.6
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	±9.6
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.57	±9.6
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	6.56	±9.6
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	GSM	12.62	±9.6
10026	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	GSM	9.55	±9.6
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	4.80	±9.6
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	3.55	±9.6
10029	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	GSM	7.78	±9.6
10030	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	±9.6
10031	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	±9.6
10032	CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	±9.6
10033	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	Bluetooth	7.74	±9.6
10034	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	Bluetooth	4.53	±9.6
10035	CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	Bluetooth	3.83	±9.6
10036	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	±9.6
10037	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	±9.6
10038	CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	Bluetooth	4.10	±9.6
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	±9.6
10042	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	AMPS	7.78	±9.6
10044	CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	AMPS	0.00	±9.6
10048	CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13.80	±9.6
10049	CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	±9.6
10056	CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	TD-SCDMA	11.01	±9.6
10058	DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	GSM	6.52	±9.6
10059	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	WLAN	2.12	±9.6
10060	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	WLAN	2.83	±9.6
10061	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	WLAN	3.60	±9.6
10062	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	WLAN	8.68	±9.6
10063	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	WLAN	8.63	±9.6
10064	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	WLAN	9.09	±9.6
10065	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	WLAN	9.00	±9.6
10066	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	WLAN	9.38	±9.6
10067	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	WLAN	10.12	±9.6
10068	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	WLAN	10.24	±9.6
10069	CAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	WLAN	10.56	±9.6
10071	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	WLAN	9.83	±9.6
10072	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	WLAN	9.62	±9.6
10073	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	WLAN	9.94	±9.6
10074	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	WLAN	10.30	±9.6
10075	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	WLAN	10.77	±9.6
10076	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	WLAN	10.94	±9.6
10077	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	WLAN	11.00	±9.6
10081	CAB	CDMA2000 (1xRTT, RC3)	CDMA2000	3.97	±9.6
10082	CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	AMPS	4.77	±9.6
10090	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	±9.6
10097	CAC	UMTS-FDD (HSDPA)	WCDMA	3.98	±9.6
10098	DAC	UMTS-FDD (HSUPA, Subtest 2)	WCDMA	3.98	±9.6
10099	CAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	GSM	9.55	±9.6
10100	CAC	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-FDD	5.67	±9.6
10101	CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	±9.6
10102	CAB	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10103	DAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	LTE-TDD	9.29	±9.6
10104	CAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	LTE-TDD	9.97	±9.6
10105	CAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	LTE-TDD	10.01	±9.6
10108	CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-FDD	5.80	±9.6
10109	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10110	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-FDD	5.75	±9.6
10111	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-FDD	6.44	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10112	CAG	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-FDD	6.59	±9.6
10113	CAG	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-FDD	6.62	±9.6
10114	CAG	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	WLAN	8.10	±9.6
10115	CAG	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	WLAN	8.46	±9.6
10116	CAG	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	WLAN	8.15	±9.6
10117	CAG	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	WLAN	8.07	±9.6
10118	CAD	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	WLAN	8.59	±9.6
10119	CAD	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	WLAN	8.13	±9.6
10140	CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-FDD	6.49	±9.6
10141	CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	6.53	±9.6
10142	CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-FDD	5.73	±9.6
10143	CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-FDD	6.35	±9.6
10144	CAC	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-FDD	6.65	±9.6
10145	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.76	±9.6
10146	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.41	±9.6
10147	CAC	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.72	±9.6
10149	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-FDD	6.42	±9.6
10150	CAE	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10151	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	9.28	±9.6
10152	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	LTE-TDD	9.92	±9.6
10153	CAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-TDD	10.05	±9.6
10154	CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-FDD	5.75	±9.6
10155	CAF	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.43	±9.6
10156	CAF	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-FDD	5.79	±9.6
10157	CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-FDD	6.49	±9.6
10158	CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-FDD	6.62	±9.6
10159	CAG	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-FDD	6.56	±9.6
10160	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-FDD	5.82	±9.6
10161	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-FDD	6.43	±9.6
10162	CAG	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-FDD	6.58	±9.6
10166	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-FDD	5.46	±9.6
10167	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.21	±9.6
10168	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.79	±9.6
10169	CAG	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-FDD	5.73	±9.6
10170	CAG	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10171	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-FDD	6.49	±9.6
10172	CAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	LTE-TDD	9.21	±9.6
10173	CAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10174	CAF	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10175	CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-FDD	5.72	±9.6
10176	CAF	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10177	CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-FDD	5.73	±9.6
10178	CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10179	AAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10180	CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10181	CAG	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-FDD	5.72	±9.6
10182	CAG	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10183	CAG	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10184	CAG	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-FDD	5.73	±9.6
10185	CAI	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-FDD	6.51	±9.6
10186	CAG	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10187	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-FDD	5.73	±9.6
10188	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-FDD	6.52	±9.6
10189	CAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-FDD	6.50	±9.6
10193	CAE	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	WLAN	8.09	±9.6
10194	AAD	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	WLAN	8.12	±9.6
10195	CAE	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	WLAN	8.21	±9.6
10196	CAE	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	WLAN	8.10	±9.6
10197	AAE	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	WLAN	8.13	±9.6
10198	CAF	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	WLAN	8.27	±9.6
10219	CAF	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	WLAN	8.03	±9.6
10220	AAF	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	WLAN	8.13	±9.6
10221	CAC	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	WLAN	8.27	±9.6
10222	CAC	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	WLAN	8.06	±9.6
10223	CAD	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	WLAN	8.48	±9.6
10224	CAD	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	WLAN	8.08	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10225	CAD	UMTS-FDD (HSPA+)	WCDMA	5.97	±9.6
10226	CAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.49	±9.6
10227	CAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.26	±9.6
10228	CAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.22	±9.6
10229	DAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10230	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10231	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.19	±9.6
10232	CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10233	CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10234	CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-TDD	9.21	±9.6
10235	CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10236	CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10237	CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	±9.6
10238	CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TDD	9.48	±9.6
10239	CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-TDD	10.25	±9.6
10240	CAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.21	±9.6
10241	CAB	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.82	±9.6
10242	CAD	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-TDD	9.86	±9.6
10243	CAD	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.46	±9.6
10244	CAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-TDD	10.06	±9.6
10245	CAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.06	±9.6
10246	CAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	9.30	±9.6
10247	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-TDD	9.91	±9.6
10248	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-TDD	10.09	±9.6
10249	CAG	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-TDD	9.29	±9.6
10250	CAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.81	±9.6
10251	CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-TDD	10.17	±9.6
10252	CAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TDD	9.24	±9.6
10253	CAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9.90	±9.6
10254	CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-TDD	10.14	±9.6
10255	CAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-TDD	9.20	±9.6
10256	CAB	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.96	±9.6
10257	CAD	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.08	±9.6
10258	CAD	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.34	±9.6
10259	CAD	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TDD	9.98	±9.6
10260	CAG	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-TDD	9.97	±9.6
10261	CAG	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TDD	9.24	±9.6
10262	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-TDD	9.83	±9.6
10263	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-TDD	10.16	±9.6
10264	CAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	9.23	±9.6
10265	CAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TDD	9.92	±9.6
10266	CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TDD	10.07	±9.6
10267	CAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TDD	9.30	±9.6
10268	CAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.06	±9.6
10269	CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.13	±9.6
10270	CAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	±9.6
10274	CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	WCDMA	4.87	±9.6
10275	CAD	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	WCDMA	3.96	±9.6
10277	CAD	PHS (QPSK)	PHS	11.81	±9.6
10278	CAD	PHS (QPSK, BW 884 MHz, Roll-off 0.5)	PHS	11.81	±9.6
10279	CAG	PHS (QPSK, BW 884 MHz, Roll-off 0.38)	PHS	12.18	±9.6
10290	CAG	CDMA2000, RC1, SO55, Full Rate	CDMA2000	3.91	±9.6
10291	CAG	CDMA2000, RC3, SO55, Full Rate	CDMA2000	3.46	±9.6
10292	CAG	CDMA2000, RC3, SO32, Full Rate	CDMA2000	3.39	±9.6
10293	CAG	CDMA2000, RC3, SO3, Full Rate	CDMA2000	3.50	±9.6
10295	CAG	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	CDMA2000	12.49	±9.6
10297	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	5.81	±9.6
10298	CAF	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-FDD	5.72	±9.6
10299	CAF	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-FDD	6.39	±9.6
10300	CAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.60	±9.6
10301	CAC	IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC)	WiMAX	12.03	±9.6
10302	CAB	IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, QPSK, PUSC, 3CTRL)	WiMAX	12.57	±9.6
10303	CAB	IEEE 802.16e WiMAX (31:15, 5 ms, 10 MHz, 64QAM, PUSC)	WiMAX	12.52	±9.6
10304	CAA	IEEE 802.16e WiMAX (29:18, 5 ms, 10 MHz, 64QAM, PUSC)	WiMAX	11.86	±9.6
10305	CAA	IEEE 802.16e WiMAX (31:15, 10 ms, 10 MHz, 64QAM, PUSC)	WiMAX	15.24	±9.6
10306	CAA	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, 64QAM, PUSC)	WiMAX	14.67	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10307	AAB	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, QPSK, PUSC)	WiMAX	14.49	±9.6
10308	AAB	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, 16QAM, PUSC)	WiMAX	14.46	±9.6
10309	AAB	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, 16QAM, AMC 2x3)	WiMAX	14.58	±9.6
10310	AAB	IEEE 802.16e WiMAX (29:18, 10 ms, 10 MHz, QPSK, AMC 2x3)	WiMAX	14.57	±9.6
10311	AAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-FDD	6.06	±9.6
10313	AAD	iDEN 1:3	iDEN	10.51	±9.6
10314	AAD	iDEN 1:6	iDEN	13.48	±9.6
10315	AAD	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc dc)	WLAN	1.71	±9.6
10316	AAD	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc dc)	WLAN	8.36	±9.6
10317	AAA	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc dc)	WLAN	8.36	±9.6
10352	AAA	Pulse Waveform (200 Hz, 10%)	Generic	10.00	±9.6
10353	AAA	Pulse Waveform (200 Hz, 20%)	Generic	6.99	±9.6
10354	AAA	Pulse Waveform (200 Hz, 40%)	Generic	3.98	±9.6
10355	AAA	Pulse Waveform (200 Hz, 60%)	Generic	2.22	±9.6
10356	AAA	Pulse Waveform (200 Hz, 80%)	Generic	0.97	±9.6
10387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	±9.6
10388	AAA	QPSK Waveform, 10 MHz	Generic	5.22	±9.6
10396	AAA	64-QAM Waveform, 100 kHz	Generic	6.27	±9.6
10399	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	±9.6
10400	AAD	IEEE 802.11ac WiFi (20 MHz, 64-QAM, 99pc dc)	WLAN	8.37	±9.6
10401	AAA	IEEE 802.11ac WiFi (40 MHz, 64-QAM, 99pc dc)	WLAN	8.60	±9.6
10402	AAA	IEEE 802.11ac WiFi (80 MHz, 64-QAM, 99pc dc)	WLAN	8.53	±9.6
10403	AAB	CDMA2000 (1xEV-DO, Rev. 0)	CDMA2000	3.76	±9.6
10404	AAB	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	±9.6
10406	AAD	CDMA2000, RC3, SO32, SCH0, Full Rate	CDMA2000	5.22	±9.6
10410	AAA	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub=2,3,4,7,8,9)	LTE-TDD	7.82	±9.6
10414	AAA	WLAN CCDF, 64-QAM, 40 MHz	Generic	8.54	±9.6
10415	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc dc)	WLAN	1.54	±9.6
10416	AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc dc)	WLAN	8.23	±9.6
10417	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc dc)	WLAN	8.23	±9.6
10418	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc, Long)	WLAN	8.14	±9.6
10419	AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc, Short)	WLAN	8.19	±9.6
10422	AAA	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	WLAN	8.32	±9.6
10423	AAA	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	WLAN	8.47	±9.6
10424	AAE	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	±9.6
10425	AAE	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	8.41	±9.6
10426	AAE	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	WLAN	8.45	±9.6
10427	AAB	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8.41	±9.6
10430	AAB	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	LTE-FDD	8.28	±9.6
10431	AAC	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	LTE-FDD	8.38	±9.6
10432	AAB	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	LTE-FDD	8.34	±9.6
10433	AAC	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	8.34	±9.6
10434	AAG	W-CDMA (BS Test Model 1, 64 DPCH)	WCDMA	8.60	±9.6
10435	AAA	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.82	±9.6
10447	AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.56	±9.6
10448	AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.53	±9.6
10449	AAC	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.51	±9.6
10450	AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.48	±9.6
10451	AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	WCDMA	7.59	±9.6
10453	AAC	Validation (Square, 10 ms, 1 ms)	Test	10.00	±9.6
10456	AAC	IEEE 802.11ac WiFi (160 MHz, 64-QAM, 99pc dc)	WLAN	8.63	±9.6
10457	AAC	UMTS-FDD (DC-HSDPA)	WCDMA	6.62	±9.6
10458	AAC	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.55	±9.6
10459	AAC	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	8.25	±9.6
10460	AAC	UMTS-FDD (WCDMA, AMR)	WCDMA	2.39	±9.6
10461	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.82	±9.6
10462	AAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.30	±9.6
10463	AAD	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.56	±9.6
10464	AAD	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.82	±9.6
10465	AAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	±9.6
10466	AAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	±9.6
10467	AAA	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.82	±9.6
10468	AAF	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	±9.6
10469	AAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.56	±9.6
10470	AAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.82	±9.6
10471	AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10472	AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	±9.6
10473	AAA	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.82	±9.6
10474	AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	±9.6
10475	AAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	±9.6
10477	AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	±9.6
10478	AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.57	±9.6
10479	AAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.74	±9.6
10480	AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.18	±9.6
10481	AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.45	±9.6
10482	AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.71	±9.6
10483	AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, Sub)	LTE-TDD	8.39	±9.6
10484	AAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.47	±9.6
10485	AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.59	±9.6
10486	AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.38	±9.6
10487	AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.60	±9.6
10488	AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.70	±9.6
10489	AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.31	±9.6
10490	AAF	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	±9.6
10491	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.74	±9.6
10492	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.41	±9.6
10493	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.55	±9.6
10494	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.74	±9.6
10495	AAF	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.37	±9.6
10496	AAE	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	±9.6
10497	AAE	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.67	±9.6
10498	AAE	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.40	±9.6
10499	AAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.68	±9.6
10500	AAF	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.67	±9.6
10501	AAF	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Sub)	LTE-TDD	8.44	±9.6
10502	AAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.52	±9.6
10503	AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Sub)	LTE-TDD	7.72	±9.6
10504	AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Sub)	LTE-TDD	8.31	±9.6
10505	AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	±9.6
10506	AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Sub)	LTE-TDD	7.74	±9.6
10507	AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Sub)	LTE-TDD	8.36	±9.6
10508	AAF	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Sub)	LTE-TDD	8.55	±9.6
10509	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Sub)	LTE-TDD	7.99	±9.6
10510	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Sub)	LTE-TDD	8.49	±9.6
10511	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Sub)	LTE-TDD	8.51	±9.6
10512	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Sub)	LTE-TDD	7.74	±9.6
10513	AAF	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Sub)	LTE-TDD	8.42	±9.6
10514	AAE	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Sub)	LTE-TDD	8.45	±9.6
10515	AAE	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc dc)	WLAN	1.58	±9.6
10516	AAE	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc dc)	WLAN	1.57	±9.6
10517	AAF	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc dc)	WLAN	1.58	±9.6
10518	AAF	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc dc)	WLAN	8.23	±9.6
10519	AAF	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc dc)	WLAN	8.39	±9.6
10520	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc dc)	WLAN	8.12	±9.6
10521	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc dc)	WLAN	7.97	±9.6
10522	AAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc dc)	WLAN	8.45	±9.6
10523	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc dc)	WLAN	8.08	±9.6
10524	AAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc dc)	WLAN	8.27	±9.6
10525	AAC	IEEE 802.11ac WiFi (20 MHz, MCS0, 99pc dc)	WLAN	8.36	±9.6
10526	AAF	IEEE 802.11ac WiFi (20 MHz, MCS1, 99pc dc)	WLAN	8.42	±9.6
10527	AAF	IEEE 802.11ac WiFi (20 MHz, MCS2, 99pc dc)	WLAN	8.21	±9.6
10528	AAF	IEEE 802.11ac WiFi (20 MHz, MCS3, 99pc dc)	WLAN	8.36	±9.6
10529	AAF	IEEE 802.11ac WiFi (20 MHz, MCS4, 99pc dc)	WLAN	8.36	±9.6
10531	AAF	IEEE 802.11ac WiFi (20 MHz, MCS6, 99pc dc)	WLAN	8.43	±9.6
10532	AAF	IEEE 802.11ac WiFi (20 MHz, MCS7, 99pc dc)	WLAN	8.29	±9.6
10533	AAE	IEEE 802.11ac WiFi (20 MHz, MCS8, 99pc dc)	WLAN	8.38	±9.6
10534	AAE	IEEE 802.11ac WiFi (40 MHz, MCS0, 99pc dc)	WLAN	8.45	±9.6
10535	AAE	IEEE 802.11ac WiFi (40 MHz, MCS1, 99pc dc)	WLAN	8.45	±9.6
10536	AAF	IEEE 802.11ac WiFi (40 MHz, MCS2, 99pc dc)	WLAN	8.32	±9.6
10537	AAF	IEEE 802.11ac WiFi (40 MHz, MCS3, 99pc dc)	WLAN	8.44	±9.6
10538	AAF	IEEE 802.11ac WiFi (40 MHz, MCS4, 99pc dc)	WLAN	8.54	±9.6
10540	AAA	IEEE 802.11ac WiFi (40 MHz, MCS6, 99pc dc)	WLAN	8.39	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10541	AAA	IEEE 802.11ac WiFi (40 MHz, MCS7, 99pc dc)	WLAN	8.46	±9.6
10542	AAA	IEEE 802.11ac WiFi (40 MHz, MCS8, 99pc dc)	WLAN	8.65	±9.6
10543	AAC	IEEE 802.11ac WiFi (40 MHz, MCS9, 99pc dc)	WLAN	8.65	±9.6
10544	AAC	IEEE 802.11ac WiFi (80 MHz, MCS0, 99pc dc)	WLAN	8.47	±9.6
10545	AAC	IEEE 802.11ac WiFi (80 MHz, MCS1, 99pc dc)	WLAN	8.55	±9.6
10546	AAC	IEEE 802.11ac WiFi (80 MHz, MCS2, 99pc dc)	WLAN	8.35	±9.6
10547	AAC	IEEE 802.11ac WiFi (80 MHz, MCS3, 99pc dc)	WLAN	8.49	±9.6
10548	AAC	IEEE 802.11ac WiFi (80 MHz, MCS4, 99pc dc)	WLAN	8.37	±9.6
10550	AAC	IEEE 802.11ac WiFi (80 MHz, MCS6, 99pc dc)	WLAN	8.38	±9.6
10551	AAC	IEEE 802.11ac WiFi (80 MHz, MCS7, 99pc dc)	WLAN	8.50	±9.6
10552	AAC	IEEE 802.11ac WiFi (80 MHz, MCS8, 99pc dc)	WLAN	8.42	±9.6
10553	AAC	IEEE 802.11ac WiFi (80 MHz, MCS9, 99pc dc)	WLAN	8.45	±9.6
10554	AAC	IEEE 802.11ac WiFi (160 MHz, MCS0, 99pc dc)	WLAN	8.48	±9.6
10555	AAC	IEEE 802.11ac WiFi (160 MHz, MCS1, 99pc dc)	WLAN	8.47	±9.6
10556	AAC	IEEE 802.11ac WiFi (160 MHz, MCS2, 99pc dc)	WLAN	8.50	±9.6
10557	AAC	IEEE 802.11ac WiFi (160 MHz, MCS3, 99pc dc)	WLAN	8.52	±9.6
10558	AAC	IEEE 802.11ac WiFi (160 MHz, MCS4, 99pc dc)	WLAN	8.61	±9.6
10560	AAC	IEEE 802.11ac WiFi (160 MHz, MCS6, 99pc dc)	WLAN	8.73	±9.6
10561	AAC	IEEE 802.11ac WiFi (160 MHz, MCS7, 99pc dc)	WLAN	8.56	±9.6
10562	AAC	IEEE 802.11ac WiFi (160 MHz, MCS8, 99pc dc)	WLAN	8.69	±9.6
10563	AAC	IEEE 802.11ac WiFi (160 MHz, MCS9, 99pc dc)	WLAN	8.77	±9.6
10564	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc dc)	WLAN	8.25	±9.6
10565	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc dc)	WLAN	8.45	±9.6
10566	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc dc)	WLAN	8.13	±9.6
10567	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc dc)	WLAN	8.00	±9.6
10568	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc dc)	WLAN	8.37	±9.6
10569	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc dc)	WLAN	8.10	±9.6
10570	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc dc)	WLAN	8.30	±9.6
10571	AAC	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc dc)	WLAN	1.99	±9.6
10572	AAC	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc dc)	WLAN	1.99	±9.6
10573	AAC	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc dc)	WLAN	1.98	±9.6
10574	AAC	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc dc)	WLAN	1.98	±9.6
10575	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc dc)	WLAN	8.59	±9.6
10576	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc dc)	WLAN	8.60	±9.6
10577	AAC	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc dc)	WLAN	8.70	±9.6
10578	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc dc)	WLAN	8.49	±9.6
10579	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc dc)	WLAN	8.36	±9.6
10580	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc dc)	WLAN	8.76	±9.6
10581	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc dc)	WLAN	8.35	±9.6
10582	AAD	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc dc)	WLAN	8.67	±9.6
10583	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc dc)	WLAN	8.59	±9.6
10584	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc dc)	WLAN	8.60	±9.6
10585	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc dc)	WLAN	8.70	±9.6
10586	AAD	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc dc)	WLAN	8.49	±9.6
10587	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc dc)	WLAN	8.36	±9.6
10588	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc dc)	WLAN	8.76	±9.6
10589	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc dc)	WLAN	8.35	±9.6
10590	AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc dc)	WLAN	8.67	±9.6
10591	AAA	IEEE 802.11n (HT Mixed, 20 MHz, MCS0, 90pc dc)	WLAN	8.63	±9.6
10592	AAA	IEEE 802.11n (HT Mixed, 20 MHz, MCS1, 90pc dc)	WLAN	8.79	±9.6
10593	AAA	IEEE 802.11n (HT Mixed, 20 MHz, MCS2, 90pc dc)	WLAN	8.64	±9.6
10594	AAA	IEEE 802.11n (HT Mixed, 20 MHz, MCS3, 90pc dc)	WLAN	8.74	±9.6
10595	AAA	IEEE 802.11n (HT Mixed, 20 MHz, MCS4, 90pc dc)	WLAN	8.74	±9.6
10596	AAA	IEEE 802.11n (HT Mixed, 20 MHz, MCS5, 90pc dc)	WLAN	8.71	±9.6
10597	AAA	IEEE 802.11n (HT Mixed, 20 MHz, MCS6, 90pc dc)	WLAN	8.72	±9.6
10598	AAA	IEEE 802.11n (HT Mixed, 20 MHz, MCS7, 90pc dc)	WLAN	8.50	±9.6
10599	AAA	IEEE 802.11n (HT Mixed, 40 MHz, MCS0, 90pc dc)	WLAN	8.79	±9.6
10600	AAA	IEEE 802.11n (HT Mixed, 40 MHz, MCS1, 90pc dc)	WLAN	8.88	±9.6
10601	AAA	IEEE 802.11n (HT Mixed, 40 MHz, MCS2, 90pc dc)	WLAN	8.82	±9.6
10602	AAA	IEEE 802.11n (HT Mixed, 40 MHz, MCS3, 90pc dc)	WLAN	8.94	±9.6
10603	AAA	IEEE 802.11n (HT Mixed, 40 MHz, MCS4, 90pc dc)	WLAN	9.03	±9.6
10604	AAA	IEEE 802.11n (HT Mixed, 40 MHz, MCS5, 90pc dc)	WLAN	8.76	±9.6
10605	AAA	IEEE 802.11n (HT Mixed, 40 MHz, MCS6, 90pc dc)	WLAN	8.97	±9.6
10606	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS7, 90pc dc)	WLAN	8.82	±9.6
10607	AAC	IEEE 802.11ac WiFi (20 MHz, MCS0, 90pc dc)	WLAN	8.64	±9.6
10608	AAC	IEEE 802.11ac WiFi (20 MHz, MCS1, 90pc dc)	WLAN	8.77	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10609	AAC	IEEE 802.11ac WiFi (20 MHz, MCS2, 90pc dc)	WLAN	8.57	±9.6
10610	AAC	IEEE 802.11ac WiFi (20 MHz, MCS3, 90pc dc)	WLAN	8.78	±9.6
10611	AAC	IEEE 802.11ac WiFi (20 MHz, MCS4, 90pc dc)	WLAN	8.70	±9.6
10612	AAC	IEEE 802.11ac WiFi (20 MHz, MCS5, 90pc dc)	WLAN	8.77	±9.6
10613	AAC	IEEE 802.11ac WiFi (20 MHz, MCS6, 90pc dc)	WLAN	8.94	±9.6
10614	AAC	IEEE 802.11ac WiFi (20 MHz, MCS7, 90pc dc)	WLAN	8.59	±9.6
10615	AAC	IEEE 802.11ac WiFi (20 MHz, MCS8, 90pc dc)	WLAN	8.82	±9.6
10616	AAC	IEEE 802.11ac WiFi (40 MHz, MCS0, 90pc dc)	WLAN	8.82	±9.6
10617	AAC	IEEE 802.11ac WiFi (40 MHz, MCS1, 90pc dc)	WLAN	8.81	±9.6
10618	AAC	IEEE 802.11ac WiFi (40 MHz, MCS2, 90pc dc)	WLAN	8.58	±9.6
10619	AAC	IEEE 802.11ac WiFi (40 MHz, MCS3, 90pc dc)	WLAN	8.86	±9.6
10620	AAC	IEEE 802.11ac WiFi (40 MHz, MCS4, 90pc dc)	WLAN	8.87	±9.6
10621	AAC	IEEE 802.11ac WiFi (40 MHz, MCS5, 90pc dc)	WLAN	8.77	±9.6
10622	AAC	IEEE 802.11ac WiFi (40 MHz, MCS6, 90pc dc)	WLAN	8.68	±9.6
10623	AAC	IEEE 802.11ac WiFi (40 MHz, MCS7, 90pc dc)	WLAN	8.82	±9.6
10624	AAC	IEEE 802.11ac WiFi (40 MHz, MCS8, 90pc dc)	WLAN	8.96	±9.6
10625	AAC	IEEE 802.11ac WiFi (40 MHz, MCS9, 90pc dc)	WLAN	8.96	±9.6
10626	AAC	IEEE 802.11ac WiFi (80 MHz, MCS0, 90pc dc)	WLAN	8.83	±9.6
10627	AAC	IEEE 802.11ac WiFi (80 MHz, MCS1, 90pc dc)	WLAN	8.88	±9.6
10628	AAC	IEEE 802.11ac WiFi (80 MHz, MCS2, 90pc dc)	WLAN	8.71	±9.6
10629	AAC	IEEE 802.11ac WiFi (80 MHz, MCS3, 90pc dc)	WLAN	8.85	±9.6
10630	AAC	IEEE 802.11ac WiFi (80 MHz, MCS4, 90pc dc)	WLAN	8.72	±9.6
10631	AAC	IEEE 802.11ac WiFi (80 MHz, MCS5, 90pc dc)	WLAN	8.81	±9.6
10632	AAC	IEEE 802.11ac WiFi (80 MHz, MCS6, 90pc dc)	WLAN	8.74	±9.6
10633	AAC	IEEE 802.11ac WiFi (80 MHz, MCS7, 90pc dc)	WLAN	8.83	±9.6
10634	AAC	IEEE 802.11ac WiFi (80 MHz, MCS8, 90pc dc)	WLAN	8.80	±9.6
10635	AAC	IEEE 802.11ac WiFi (80 MHz, MCS9, 90pc dc)	WLAN	8.81	±9.6
10636	AAC	IEEE 802.11ac WiFi (160 MHz, MCS0, 90pc dc)	WLAN	8.83	±9.6
10637	AAC	IEEE 802.11ac WiFi (160 MHz, MCS1, 90pc dc)	WLAN	8.79	±9.6
10638	AAC	IEEE 802.11ac WiFi (160 MHz, MCS2, 90pc dc)	WLAN	8.86	±9.6
10639	AAC	IEEE 802.11ac WiFi (160 MHz, MCS3, 90pc dc)	WLAN	8.85	±9.6
10640	AAC	IEEE 802.11ac WiFi (160 MHz, MCS4, 90pc dc)	WLAN	8.98	±9.6
10641	AAC	IEEE 802.11ac WiFi (160 MHz, MCS5, 90pc dc)	WLAN	9.06	±9.6
10642	AAC	IEEE 802.11ac WiFi (160 MHz, MCS6, 90pc dc)	WLAN	9.06	±9.6
10643	AAC	IEEE 802.11ac WiFi (160 MHz, MCS7, 90pc dc)	WLAN	8.89	±9.6
10644	AAC	IEEE 802.11ac WiFi (160 MHz, MCS8, 90pc dc)	WLAN	9.05	±9.6
10645	AAC	IEEE 802.11ac WiFi (160 MHz, MCS9, 90pc dc)	WLAN	9.11	±9.6
10646	AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Sub=2,7)	LTE-TDD	11.96	±9.6
10647	AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Sub=2,7)	LTE-TDD	11.96	±9.6
10648	AAC	CDMA2000 (1x Advanced)	CDMA2000	3.45	±9.6
10652	AAC	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.91	±9.6
10653	AAC	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.42	±9.6
10654	AAC	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.96	±9.6
10655	AAC	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.21	±9.6
10658	AAC	Pulse Waveform (200 Hz, 10%)	Test	10.00	±9.6
10659	AAC	Pulse Waveform (200 Hz, 20%)	Test	6.99	±9.6
10660	AAC	Pulse Waveform (200 Hz, 40%)	Test	3.98	±9.6
10661	AAC	Pulse Waveform (200 Hz, 60%)	Test	2.22	±9.6
10662	AAC	Pulse Waveform (200 Hz, 80%)	Test	0.97	±9.6
10670	AAC	Bluetooth Low Energy	Bluetooth	2.19	±9.6
10671	AAD	IEEE 802.11ax (20 MHz, MCS0, 90pc dc)	WLAN	9.09	±9.6
10672	AAD	IEEE 802.11ax (20 MHz, MCS1, 90pc dc)	WLAN	8.57	±9.6
10673	AAD	IEEE 802.11ax (20 MHz, MCS2, 90pc dc)	WLAN	8.78	±9.6
10674	AAD	IEEE 802.11ax (20 MHz, MCS3, 90pc dc)	WLAN	8.74	±9.6
10675	AAD	IEEE 802.11ax (20 MHz, MCS4, 90pc dc)	WLAN	8.90	±9.6
10676	AAD	IEEE 802.11ax (20 MHz, MCS5, 90pc dc)	WLAN	8.77	±9.6
10677	AAD	IEEE 802.11ax (20 MHz, MCS6, 90pc dc)	WLAN	8.73	±9.6
10678	AAD	IEEE 802.11ax (20 MHz, MCS7, 90pc dc)	WLAN	8.78	±9.6
10679	AAD	IEEE 802.11ax (20 MHz, MCS8, 90pc dc)	WLAN	8.89	±9.6
10680	AAD	IEEE 802.11ax (20 MHz, MCS9, 90pc dc)	WLAN	8.80	±9.6
10681	AAG	IEEE 802.11ax (20 MHz, MCS10, 90pc dc)	WLAN	8.62	±9.6
10682	AAF	IEEE 802.11ax (20 MHz, MCS11, 90pc dc)	WLAN	8.83	±9.6
10683	AAA	IEEE 802.11ax (20 MHz, MCS0, 99pc dc)	WLAN	8.42	±9.6
10684	AAC	IEEE 802.11ax (20 MHz, MCS1, 99pc dc)	WLAN	8.26	±9.6
10685	AAC	IEEE 802.11ax (20 MHz, MCS2, 99pc dc)	WLAN	8.33	±9.6
10686	AAC	IEEE 802.11ax (20 MHz, MCS3, 99pc dc)	WLAN	8.28	±9.6



UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10687	AAE	IEEE 802.11ax (20 MHz, MCS4, 99pc dc)	WLAN	8.45	±9.6
10688	AAE	IEEE 802.11ax (20 MHz, MCS5, 99pc dc)	WLAN	8.29	±9.6
10689	AAD	IEEE 802.11ax (20 MHz, MCS6, 99pc dc)	WLAN	8.55	±9.6
10690	AAE	IEEE 802.11ax (20 MHz, MCS7, 99pc dc)	WLAN	8.29	±9.6
10691	AAB	IEEE 802.11ax (20 MHz, MCS8, 99pc dc)	WLAN	8.25	±9.6
10692	AAA	IEEE 802.11ax (20 MHz, MCS9, 99pc dc)	WLAN	8.29	±9.6
10693	AAA	IEEE 802.11ax (20 MHz, MCS10, 99pc dc)	WLAN	8.25	±9.6
10694	AAA	IEEE 802.11ax (20 MHz, MCS11, 99pc dc)	WLAN	8.57	±9.6
10695	AAA	IEEE 802.11ax (40 MHz, MCS0, 90pc dc)	WLAN	8.78	±9.6
10696	AAA	IEEE 802.11ax (40 MHz, MCS1, 90pc dc)	WLAN	8.91	±9.6
10697	AAA	IEEE 802.11ax (40 MHz, MCS2, 90pc dc)	WLAN	8.61	±9.6
10698	AAA	IEEE 802.11ax (40 MHz, MCS3, 90pc dc)	WLAN	8.89	±9.6
10699	AAA	IEEE 802.11ax (40 MHz, MCS4, 90pc dc)	WLAN	8.82	±9.6
10700	AAA	IEEE 802.11ax (40 MHz, MCS5, 90pc dc)	WLAN	8.73	±9.6
10701	AAA	IEEE 802.11ax (40 MHz, MCS6, 90pc dc)	WLAN	8.86	±9.6
10702	AAA	IEEE 802.11ax (40 MHz, MCS7, 90pc dc)	WLAN	8.70	±9.6
10703	AAA	IEEE 802.11ax (40 MHz, MCS8, 90pc dc)	WLAN	8.82	±9.6
10704	AAA	IEEE 802.11ax (40 MHz, MCS9, 90pc dc)	WLAN	8.56	±9.6
10705	AAA	IEEE 802.11ax (40 MHz, MCS10, 90pc dc)	WLAN	8.69	±9.6
10706	AAC	IEEE 802.11ax (40 MHz, MCS11, 90pc dc)	WLAN	8.66	±9.6
10707	AAC	IEEE 802.11ax (40 MHz, MCS0, 99pc dc)	WLAN	8.32	±9.6
10708	AAC	IEEE 802.11ax (40 MHz, MCS1, 99pc dc)	WLAN	8.55	±9.6
10709	AAC	IEEE 802.11ax (40 MHz, MCS2, 99pc dc)	WLAN	8.33	±9.6
10710	AAC	IEEE 802.11ax (40 MHz, MCS3, 99pc dc)	WLAN	8.29	±9.6
10711	AAC	IEEE 802.11ax (40 MHz, MCS4, 99pc dc)	WLAN	8.39	±9.6
10712	AAC	IEEE 802.11ax (40 MHz, MCS5, 99pc dc)	WLAN	8.67	±9.6
10713	AAC	IEEE 802.11ax (40 MHz, MCS6, 99pc dc)	WLAN	8.33	±9.6
10714	AAC	IEEE 802.11ax (40 MHz, MCS7, 99pc dc)	WLAN	8.26	±9.6
10715	AAC	IEEE 802.11ax (40 MHz, MCS8, 99pc dc)	WLAN	8.45	±9.6
10716	AAC	IEEE 802.11ax (40 MHz, MCS9, 99pc dc)	WLAN	8.30	±9.6
10717	AAC	IEEE 802.11ax (40 MHz, MCS10, 99pc dc)	WLAN	8.48	±9.6
10718	AAC	IEEE 802.11ax (40 MHz, MCS11, 99pc dc)	WLAN	8.24	±9.6
10719	AAC	IEEE 802.11ax (80 MHz, MCS0, 90pc dc)	WLAN	8.81	±9.6
10720	AAC	IEEE 802.11ax (80 MHz, MCS1, 90pc dc)	WLAN	8.87	±9.6
10721	AAC	IEEE 802.11ax (80 MHz, MCS2, 90pc dc)	WLAN	8.76	±9.6
10722	AAC	IEEE 802.11ax (80 MHz, MCS3, 90pc dc)	WLAN	8.55	±9.6
10723	AAC	IEEE 802.11ax (80 MHz, MCS4, 90pc dc)	WLAN	8.70	±9.6
10724	AAC	IEEE 802.11ax (80 MHz, MCS5, 90pc dc)	WLAN	8.90	±9.6
10725	AAC	IEEE 802.11ax (80 MHz, MCS6, 90pc dc)	WLAN	8.74	±9.6
10726	AAC	IEEE 802.11ax (80 MHz, MCS7, 90pc dc)	WLAN	8.72	±9.6
10727	AAC	IEEE 802.11ax (80 MHz, MCS8, 90pc dc)	WLAN	8.66	±9.6
10728	AAC	IEEE 802.11ax (80 MHz, MCS9, 90pc dc)	WLAN	8.65	±9.6
10729	AAC	IEEE 802.11ax (80 MHz, MCS10, 90pc dc)	WLAN	8.64	±9.6
10730	AAC	IEEE 802.11ax (80 MHz, MCS11, 90pc dc)	WLAN	8.67	±9.6
10731	AAC	IEEE 802.11ax (80 MHz, MCS0, 99pc dc)	WLAN	8.42	±9.6
10732	AAC	IEEE 802.11ax (80 MHz, MCS1, 99pc dc)	WLAN	8.46	±9.6
10733	AAC	IEEE 802.11ax (80 MHz, MCS2, 99pc dc)	WLAN	8.40	±9.6
10734	AAC	IEEE 802.11ax (80 MHz, MCS3, 99pc dc)	WLAN	8.25	±9.6
10735	AAC	IEEE 802.11ax (80 MHz, MCS4, 99pc dc)	WLAN	8.33	±9.6
10736	AAC	IEEE 802.11ax (80 MHz, MCS5, 99pc dc)	WLAN	8.27	±9.6
10737	AAC	IEEE 802.11ax (80 MHz, MCS6, 99pc dc)	WLAN	8.36	±9.6
10738	AAC	IEEE 802.11ax (80 MHz, MCS7, 99pc dc)	WLAN	8.42	±9.6
10739	AAC	IEEE 802.11ax (80 MHz, MCS8, 99pc dc)	WLAN	8.29	±9.6
10740	AAC	IEEE 802.11ax (80 MHz, MCS9, 99pc dc)	WLAN	8.48	±9.6
10741	AAC	IEEE 802.11ax (80 MHz, MCS10, 99pc dc)	WLAN	8.40	±9.6
10742	AAC	IEEE 802.11ax (80 MHz, MCS11, 99pc dc)	WLAN	8.43	±9.6
10743	AAC	IEEE 802.11ax (160 MHz, MCS0, 90pc dc)	WLAN	8.94	±9.6
10744	AAC	IEEE 802.11ax (160 MHz, MCS1, 90pc dc)	WLAN	9.16	±9.6
10745	AAC	IEEE 802.11ax (160 MHz, MCS2, 90pc dc)	WLAN	8.93	±9.6
10746	AAC	IEEE 802.11ax (160 MHz, MCS3, 90pc dc)	WLAN	9.11	±9.6
10747	AAC	IEEE 802.11ax (160 MHz, MCS4, 90pc dc)	WLAN	9.04	±9.6
10748	AAC	IEEE 802.11ax (160 MHz, MCS5, 90pc dc)	WLAN	8.93	±9.6
10749	AAC	IEEE 802.11ax (160 MHz, MCS6, 90pc dc)	WLAN	8.90	±9.6
10750	AAC	IEEE 802.11ax (160 MHz, MCS7, 90pc dc)	WLAN	8.79	±9.6
10751	AAC	IEEE 802.11ax (160 MHz, MCS8, 90pc dc)	WLAN	8.82	±9.6
10752	AAC	IEEE 802.11ax (160 MHz, MCS9, 90pc dc)	WLAN	8.81	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10753	AAC	IEEE 802.11ax (160 MHz, MCS10, 90pc dc)	WLAN	9.00	±9.6
10754	AAC	IEEE 802.11ax (160 MHz, MCS11, 90pc dc)	WLAN	8.94	±9.6
10755	AAC	IEEE 802.11ax (160 MHz, MCS0, 99pc dc)	WLAN	8.64	±9.6
10756	AAC	IEEE 802.11ax (160 MHz, MCS1, 99pc dc)	WLAN	8.77	±9.6
10757	AAC	IEEE 802.11ax (160 MHz, MCS2, 99pc dc)	WLAN	8.77	±9.6
10758	AAC	IEEE 802.11ax (160 MHz, MCS3, 99pc dc)	WLAN	8.69	±9.6
10759	AAC	IEEE 802.11ax (160 MHz, MCS4, 99pc dc)	WLAN	8.58	±9.6
10760	AAC	IEEE 802.11ax (160 MHz, MCS5, 99pc dc)	WLAN	8.49	±9.6
10761	AAC	IEEE 802.11ax (160 MHz, MCS6, 99pc dc)	WLAN	8.58	±9.6
10762	AAC	IEEE 802.11ax (160 MHz, MCS7, 99pc dc)	WLAN	8.49	±9.6
10763	AAC	IEEE 802.11ax (160 MHz, MCS8, 99pc dc)	WLAN	8.53	±9.6
10764	AAC	IEEE 802.11ax (160 MHz, MCS9, 99pc dc)	WLAN	8.54	±9.6
10765	AAC	IEEE 802.11ax (160 MHz, MCS10, 99pc dc)	WLAN	8.54	±9.6
10766	AAC	IEEE 802.11ax (160 MHz, MCS11, 99pc dc)	WLAN	8.51	±9.6
10767	AAC	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	7.99	±9.6
10768	AAC	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	±9.6
10769	AAC	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.01	±9.6
10770	AAC	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±9.6
10771	AAC	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±9.6
10772	AAC	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.23	±9.6
10773	AAC	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.03	±9.6
10774	AAC	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.02	±9.6
10775	AAC	5G NR (CP-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	±9.6
10776	AAC	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.30	±9.6
10777	AAC	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.30	±9.6
10778	AAC	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.34	±9.6
10779	AAC	5G NR (CP-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.42	±9.6
10780	AAC	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	±9.6
10781	AAC	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.38	±9.6
10782	AAC	5G NR (CP-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.43	±9.6
10783	AAC	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.31	±9.6
10784	AAC	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.29	±9.6
10785	AAC	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.40	±9.6
10786	AAC	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.35	±9.6
10787	AAC	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.44	±9.6
10788	AAC	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	±9.6
10789	AAC	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.37	±9.6
10790	AAC	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	8.39	±9.6
10791	AAC	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.83	±9.6
10792	AAC	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.92	±9.6
10793	AAC	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.95	±9.6
10794	AAC	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	±9.6
10795	AAC	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.84	±9.6
10796	AAC	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.82	±9.6
10797	AAC	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.01	±9.6
10798	AAC	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.89	±9.6
10799	AAC	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	±9.6
10801	AAC	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.89	±9.6
10802	AAC	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.87	±9.6
10803	AAE	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	7.93	±9.6
10805	AAD	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10806	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.37	±9.6
10809	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10810	AAD	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10812	AAD	5G NR (CP-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	±9.6
10817	AAD	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.35	±9.6
10818	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.34	±9.6
10819	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.33	±9.6
10820	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.30	±9.6
10821	AAC	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±9.6
10822	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±9.6
10823	AAC	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.36	±9.6
10824	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.39	±9.6
10825	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.41	±9.6
10827	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.42	±9.6
10828	AAE	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.43	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10829	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	8.40	±9.6
10830	AAD	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.63	±9.6
10831	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.73	±9.6
10832	AAD	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.74	±9.6
10833	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
10834	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.75	±9.6
10835	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
10836	AAE	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.66	±9.6
10837	AAD	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.68	±9.6
10839	AAD	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±9.6
10840	AAD	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.67	±9.6
10841	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.71	±9.6
10843	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.49	±9.6
10844	AAD	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±9.6
10846	AAD	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10854	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±9.6
10855	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	±9.6
10856	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	±9.6
10857	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.35	±9.6
10858	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.36	±9.6
10859	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±9.6
10860	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10861	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.40	±9.6
10863	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10864	AAE	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	±9.6
10865	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±9.6
10866	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10868	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.89	±9.6
10869	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	±9.6
10870	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.86	±9.6
10871	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	5.75	±9.6
10872	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.52	±9.6
10873	AAD	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	±9.6
10874	AAD	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	±9.6
10875	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	±9.6
10876	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.39	±9.6
10877	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	7.95	±9.6
10878	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.41	±9.6
10879	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.12	±9.6
10880	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.38	±9.6
10881	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.75	±9.6
10882	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	5.96	±9.6
10883	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.57	±9.6
10884	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	6.53	±9.6
10885	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.61	±9.6
10886	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	6.65	±9.6
10887	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	7.78	±9.6
10888	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 120 kHz)	5G NR FR2 TDD	8.35	±9.6
10889	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.02	±9.6
10890	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, 16QAM, 120 kHz)	5G NR FR2 TDD	8.40	±9.6
10891	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.13	±9.6
10892	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, 64QAM, 120 kHz)	5G NR FR2 TDD	8.41	±9.6
10897	AAD	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.66	±9.6
10898	AAD	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	±9.6
10899	AAD	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.67	±9.6
10900	AAD	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10901	AAD	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10902	AAD	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10903	AAD	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10904	AAD	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10905	AAD	5G NR (DFT-s-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10906	AAD	5G NR (DFT-s-OFDM, 1 RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.68	±9.6
10907	AAD	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.78	±9.6
10908	AAD	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	±9.6
10909	AAD	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.96	±9.6
10910	AAD	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> k = 2
10911	AAD	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.93	±9.6
10912	AAD	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10913	AAD	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10914	AAD	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.85	±9.6
10915	AAD	5G NR (DFT-s-OFDM, 50% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	±9.6
10916	AAD	5G NR (DFT-s-OFDM, 50% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	±9.6
10917	AAD	5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	±9.6
10918	AAD	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	±9.6
10919	AAD	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	±9.6
10920	AAD	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	±9.6
10921	AAD	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10922	AAD	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.82	±9.6
10923	AAD	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10924	AAD	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10925	AAD	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.95	±9.6
10926	AAD	5G NR (DFT-s-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±9.6
10927	AAD	5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.94	±9.6
10928	AAD	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6
10929	AAD	5G NR (DFT-s-OFDM, 1 RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6
10930	AAD	5G NR (DFT-s-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.52	±9.6
10931	AAD	5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10932	AAB	5G NR (DFT-s-OFDM, 1 RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10933	AAA	5G NR (DFT-s-OFDM, 1 RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10934	AAA	5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10935	AAA	5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.51	±9.6
10936	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	±9.6
10937	AAB	5G NR (DFT-s-OFDM, 50% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.77	±9.6
10938	AAB	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.90	±9.6
10939	AAB	5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.82	±9.6
10940	AAB	5G NR (DFT-s-OFDM, 50% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.89	±9.6
10941	AAB	5G NR (DFT-s-OFDM, 50% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	±9.6
10942	AAB	5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	±9.6
10943	AAB	5G NR (DFT-s-OFDM, 50% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.95	±9.6
10944	AAB	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.81	±9.6
10945	AAB	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	±9.6
10946	AAC	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	±9.6
10947	AAB	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	±9.6
10948	AAB	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	±9.6
10949	AAB	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	±9.6
10950	AAB	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.94	±9.6
10951	AAB	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.92	±9.6
10952	AAB	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.25	±9.6
10953	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.15	±9.6
10954	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.23	±9.6
10955	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.42	±9.6
10956	AAB	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.14	±9.6
10957	AAC	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.31	±9.6
10958	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.61	±9.6
10959	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.33	±9.6
10960	AAB	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.32	±9.6
10961	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.36	±9.6
10962	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.40	±9.6
10963	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.55	±9.6
10964	AAB	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.29	±9.6
10965	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.37	±9.6
10966	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.55	±9.6
10967	AAB	5G NR DL (CP-OFDM, TM 3.1, 20 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.42	±9.6
10968	AAB	5G NR DL (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.49	±9.6
10972	AAB	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	11.59	±9.6
10973	AAB	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	9.06	±9.6
10974	AAB	5G NR (CP-OFDM, 100% RB, 100 MHz, 256-QAM, 30 kHz)	5G NR FR1 TDD	10.28	±9.6
10978	AAA	ULLA BDR	ULLA	2.23	±9.6
10979	AAA	ULLA HDR4	ULLA	7.02	±9.6
10980	AAA	ULLA HDR8	ULLA	8.82	±9.6
10981	AAA	ULLA HDRp4	ULLA	1.50	±9.6
10982	AAA	ULLA HDRp8	ULLA	1.44	±9.6

UID	Rev	Communication System Name	Group	PAR (dB)	Unc <sup>E</sup> $k = 2$
10983	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.31	±9.6
10984	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.42	±9.6
10985	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.54	±9.6
10986	AAA	5G NR DL (CP-OFDM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.50	±9.6
10987	AAA	5G NR DL (CP-OFDM, TM 3.1, 60 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.53	±9.6
10988	AAA	5G NR DL (CP-OFDM, TM 3.1, 70 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.38	±9.6
10989	AAA	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.33	±9.6
10990	AAA	5G NR DL (CP-OFDM, TM 3.1, 90 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.52	±9.6

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## Appendix E – Dipole Calibration Data Sheets

gm

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
**The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates**

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **D750V3-1053\_Jun21**

## CALIBRATION CERTIFICATE

Object **D750V3 - SN:1053**

Calibration procedure(s) **QA CAL-05.v11  
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **June 04, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03291/03292)	Apr-22
Power sensor NRP-Z91	SN: 103244	09-Apr-21 (No. 217-03291)	Apr-22
Power sensor NRP-Z91	SN: 103245	09-Apr-21 (No. 217-03292)	Apr-22
Reference 20 dB Attenuator	SN: BH9394 (20k)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 310982 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Reference Probe EX3DV4	SN: 7349	28-Dec-20 (No. EX3-7349_Dec20)	Dec-21
DAE4	SN: 601	02-Nov-20 (No. DAE4-601_Nov20)	Nov-21
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB39512475	30-Oct-14 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-20)	In house check: Oct-22
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-20)	In house check: Oct-22
Network Analyzer Agilent E8358A	SN: US41080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

Calibrated by: **Michael Weber**      Name: Michael Weber      Function: Laboratory Technician

Signature:

Approved by: **Katja Pokovic**      Name: Katja Pokovic      Function: Technical Manager

Signature:

Issued: June 8, 2021

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.10.4
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom	
<b>Distance Dipole Center - TSL</b>	15 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	750 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	<b>Temperature</b>	<b>Permittivity</b>	<b>Conductivity</b>
<b>Nominal Head TSL parameters</b>	22.0 °C	41.9	0.89 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	42.7 $\pm$ 6 %	0.91 mho/m $\pm$ 6 %
<b>Head TSL temperature change during test</b>	< 0.5 °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	2.17 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>8.57 W/kg <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	1.41 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	<b>5.58 W/kg <math>\pm</math> 16.5 % (k=2)</b>

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	56.5 $\Omega$ + 0.1 j $\Omega$
Return Loss	- 24.3 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.035 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

#### Extended Calibration

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (<-20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB Publication 865664 D01 v01r04.

D750V3 SN: 1053 - Head						
Date of Measurement	Return Loss (dB)	$\Delta\%$	Impedance Real ( $\Omega$ )	$\Delta\Omega$	Impedance Imaginary (j $\Omega$ )	$\Delta\Omega$
6/4/2021	-24.3		56.5		0.1	
6/4/2022	-26.2	7.8	57.9	1.4	0.3	0.2