


FCC SAR Test Report


APPLICANT : Inseego Corp.
EQUIPMENT : UMTS/LTE USB Modem
BRAND NAME : Inseego
MODEL NAME : MC800
FCC ID : PKRISGMC800
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

The product was received on Apr. 24, 2019 and testing was started from Jun. 05, 2019 and completed on Jun. 16, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

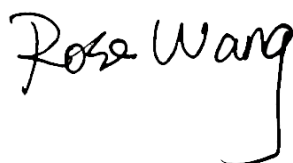

Reviewed by: Rose Wang / Supervisor

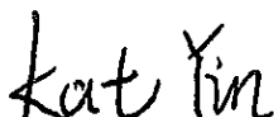

Approved by: Kat Yin / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



Table of Contents

1. Statement of Compliance 4
2. Administration Data 5
3. Guidance Applied..... 6
4. Equipment Under Test (EUT) Information..... 7
4.1 General Information 7
4.2 General LTE SAR Test and Reporting Considerations 8
5. Proximity Sensor Triggering Test.....11
6. RF Exposure Limits.....16
6.1 Uncontrolled Environment.....16
6.2 Controlled Environment.....16
7. Specific Absorption Rate (SAR).....17
7.1 Introduction17
7.2 SAR Definition.....17
8. System Description and Setup18
8.1 E-Field Probe19
8.2 Data Acquisition Electronics (DAE)19
8.3 Phantom.....20
8.4 Device Holder.....21
9. Measurement Procedures22
9.1 Spatial Peak SAR Evaluation22
9.2 Power Reference Measurement.....23
9.3 Area Scan23
9.4 Zoom Scan.....24
9.5 Volume Scan Procedures.....24
9.6 Power Drift Monitoring.....24
10. Test Equipment List.....25
11. System Verification26
11.1 Tissue Simulating Liquids26
11.2 Tissue Verification27
11.3 System Performance Check Results28
12. RF Exposure Positions29
12.1 SAR Testing for USB Dongle.....29
13. Conducted RF Output Power (Unit: dBm).....30
14. Antenna Location86
15. SAR Test Results87
15.1 Body SAR89
15.2 Repeated SAR Measurement96
16. Uncertainty Assessment97
17. References98
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Test Setup Photos



History of this test report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA942417	Rev. 01	Initial issue of report	Jul. 10, 2019



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for Inseego Corp., UMTS/LTE USB Modem, MC800, are as follows.

Highest 1g SAR Summary			
Equipment Class	Frequency Band	Body 1g SAR (W/kg)	
Licensed	WCDMA	Band V	1.19
		Band IV	1.18
		Band II	1.13
	LTE	Band 12/17	1.19
		Band 13	1.19
		Band 14	1.10
		Band 5	1.12
		Band 66/4	1.14
		Band 2	1.19
		Band 30	1.17
		Band 7	1.08
Date of Testing:		2019/6/5 ~ 2019/6/16	
Remark: This device supports LTE B4/17 and B66/12. Since the supported frequency span for LTE B4/17 falls completely within the supports frequency span for LTE B66/12, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B66/12.			

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.



2. Administration Data

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory		
Test Firm	Sporton International (Kunshan) Inc.	
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958	
Test Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CN1257	314309

Applicant	
Company Name	Inseego Corp.
Address	9605 Scranton Road, Suite 300, San Diego, CA 92121, United States of America



3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 447498 D02 SAR Procedures for Dongle Xmtr v02r01
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02



4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	UMTS/LTE USB Modem
Brand Name	Inseego
Model Name	MC800
FCC ID	PKRISGMC800
IMEI Code	990013100005250
Wireless Technology and Frequency Range	WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 14: 790.5 MHz ~ 795.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 30: 2307.5 MHz ~ 2312.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz
Mode	RMC 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink) LTE: QPSK, 16QAM, 64QAM
HW Version	V1.02
SW Version	1.30.0.3
EUT Stage	Identical Prototype
Remark:	
1. The device employs proximity sensor that detect the presence of the user's body also a finger or hand at the Horizontal Down or Up faces, Vertical Back or Front or Tip Side faces of the device. When Horizontal Down or Up faces, Vertical Back or Front or Tip Side faces of body condition is detected, all WWAN bands reduced power will be active.	



4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																															
FCC ID	PKRISGMC800																																																														
Equipment Name	UMTS/LTE USB Modem																																																														
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850.7 MHz ~ 1909.3 MHz LTE Band 4: 1710.7 MHz ~ 1754.3 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 12: 699.7 MHz ~ 715.3 MHz LTE Band 13: 779.5 MHz ~ 784.5 MHz LTE Band 14: 790.5 MHz ~ 795.5 MHz LTE Band 17: 706.5 MHz ~ 713.5 MHz LTE Band 30: 2307.5 MHz ~ 2312.5 MHz LTE Band 66: 1710.7 MHz ~ 1779.3 MHz																																																														
Channel Bandwidth	LTE Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12: 1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 14: 5MHz, 10MHz LTE Band 17: 5MHz, 10MHz LTE Band 30: 5MHz, 10MHz LTE Band 66: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz																																																														
uplink modulations used	QPSK / 16QAM / 64QAM																																																														
LTE Voice / Data requirements	Data only																																																														
LTE Release Version	R13, Cat13																																																														
CA Support	Supported, Downlink only																																																														
LTE MPR permanently built-in by design	<p>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (N_{RB})</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 2</td> </tr> <tr> <td>64 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 3</td> </tr> <tr> <td>256 QAM</td> <td colspan="6">≥ 1</td> <td>≤ 5</td> </tr> </tbody> </table>	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3	256 QAM	≥ 1						≤ 5
Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)																																																								
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																									
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																																								
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																																								
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																																								
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2																																																								
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3																																																								
256 QAM	≥ 1						≤ 5																																																								
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																														
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																														
Power reduction applied to satisfy SAR compliance	Yes, Proximity Sensor. Power reduction will be active at all WWAN bands.																																																														
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power verification please referred to section 13.																																																														
LTE Carrier Aggregation Additional Information	This device supports maximum of 5 carriers in the downlink. Additional following LTE Release features are not supported: Relay, HetNet, Enhanced MIMO, eICI, WiFi Offloading, MDH, eMBMA, Cross-Carrier Scheduling, Enhanced SC-FDMA.																																																														



Transmission (H, M, L) channel numbers and frequencies in each LTE band																
LTE Band 2																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860				
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880				
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900				
LTE Band 4																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720				
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5				
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745				
LTE Band 5																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20407	824.7	20415	825.5	20425	826.5	20450	829	20450	829	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844	20600	844	20600	844				
LTE Band 7																
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510	20850	2510	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560	21350	2560	21350	2560				
LTE Band 12																
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)				
L	23017	699.7	23025	700.5	23035	701.5	23060	704	23060	704	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711	23130	711	23130	711				
LTE Band 13																
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23205		779.5		23230		782		23255		784.5		23280		787	
M	23230		782		23255		784.5		23280		787		23305		789.5	
H	23255		784.5		23280		787		23305		789.5		23330		792	
LTE Band 14																
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz			
	Channel #		Channel #		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	23305		790.5		23330		793		23355		795.5		23380		798	
M	23330		793		23355		795.5		23380		798		23405		800.5	
H	23355		795.5		23380		798		23405		800.5		23430		803	
LTE Band 17																
	Bandwidth 5 MHz				Bandwidth 10 MHz				Bandwidth 15 MHz				Bandwidth 20 MHz			
	Channel #		Freq.(MHz)		Channel #		Freq. (MHz)		Channel #		Freq. (MHz)		Channel #		Freq. (MHz)	
L	23755		706.5		23780		709		23805		711.5		23830		714	
M	23790		710		23815		713		23840		715.5		23865		718	
H	23825		713.5		23850		716		23875		718.5		23900		721	




LTE Band 30												
	Bandwidth 5 MHz						Bandwidth 10 MHz					
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)		Channel #		Freq.(MHz)	
L	27685		2307.5		27710		2310					
M	27710		2310									
H	27735		2312.5									
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

5. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance (KDB 616217 D04 section 6.2)>

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (WWAN 2600MHz) and lowest (WWAN 700MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensor placed coincident with WWAN antenna, utilized to trigger reduced power when the device comes in proximity of the user's body at the Horizontal Up or Down, Vertical Front or Back or Tip Side of the device.
3. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
4. When the sensor is active, power reduction will be active at all WWAN bands.
5. The sensors used to detect the proximity of the user's body and device use a detection threshold distance. The data shown in the sections below shows the distance(s).

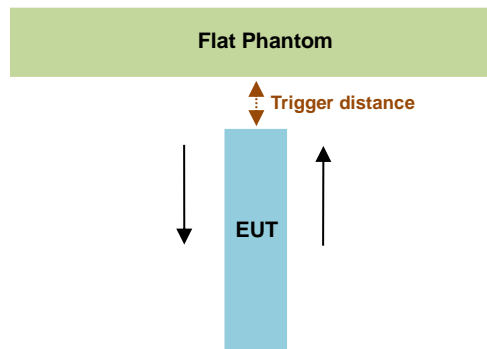

<WWAN Frequency Bands>

Proximity Sensor Triggering Distance (mm)						
Position	Horizontal –Up & Down		Vertical Front & Back		Tip Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	25	28	20	22	23	25



Proximity sensor power reduction



Exposure Position / wireless mode	Horizontal Up & Down	Vertical Front & Back	Tip Side
WCDMA V	2.0 dB	2.0 dB	2.0 dB
WCDMA IV	4.0 dB	4.0 dB	4.0 dB
WCDMA II	4.0 dB	4.0 dB	4.0 dB
LTE Band2	4.0 dB	4.0 dB	4.0 dB
LTE Band4	4.5 dB	4.5 dB	4.5 dB
LTE Band5	2.0 dB	2.0 dB	2.0 dB
LTE Band7	9.5 dB	9.5 dB	9.5 dB
LTE Band12	2.0 dB	2.0 dB	2.0 dB
LTE Band13	2.0 dB	2.0 dB	2.0 dB
LTE Band14	1.0 dB	1.0 dB	1.0 dB
LTE Band17	2.0 dB	2.0 dB	2.0 dB
LTE Band30	8.0 dB	8.0 dB	8.0 dB
LTE Band66	4.5 dB	4.5 dB	4.5 dB



Remark:

- Tests were performed in accordance with KDB 616217 D04 section 6.2 and compliant results are shown and described in exhibit "P-Sensor operational description"
- For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed:
 - Horizontal Up & Down & Tip Side n: 20 mm(manufacturer declared)
 - Vertical Front & Back: 15 mm(manufacturer declared)

Power Measurement during Sensor Trigger distance testing

Band/Mode	Ch #	Measured power reduction (dBm)		Reduction Levels
		w/o power back-off	w/ power back-off	(dB)
WCDMA Band V (RMC 12.2Kbps)	4182	22.96	20.88	2.08
WCDMA Band IV (RMC 12.2Kbps)	1312	23.25	19.88	3.37
WCDMA Band II (RMC 12.2Kbps)	9538	23.35	19.91	3.44
LTE Band 2 20MHz 1RB 0offset	19100	23.25	19.64	3.61
LTE Band 4 20MHz 1RB 0offset	20300	23.09	18.71	4.38
LTE Band 5 10MHz 1RB 0offset	20450	22.99	20.52	2.47
LTE Band7 20MHz 1RB 0offset	21100	23.20	13.41	9.79
LTE Band12 10MHz 1RB 49offset	23095	22.97	21.66	1.31
LTE Band 13 10MHz 1RB 0 offset	23230	23.09	21.38	1.71
LTE Band14 10MHz 1RB 0 offset	23330	22.79	21.38	1.41
LTE Band17 10MHz 1RB 0 offset	23790	22.86	21.62	1.24
LTE Band30 10MHz 1RB 0 offset	27710	22.89	15.80	7.09
LTE Band66 20MHz 1RB 0 offset	132322	23.19	18.89	4.30

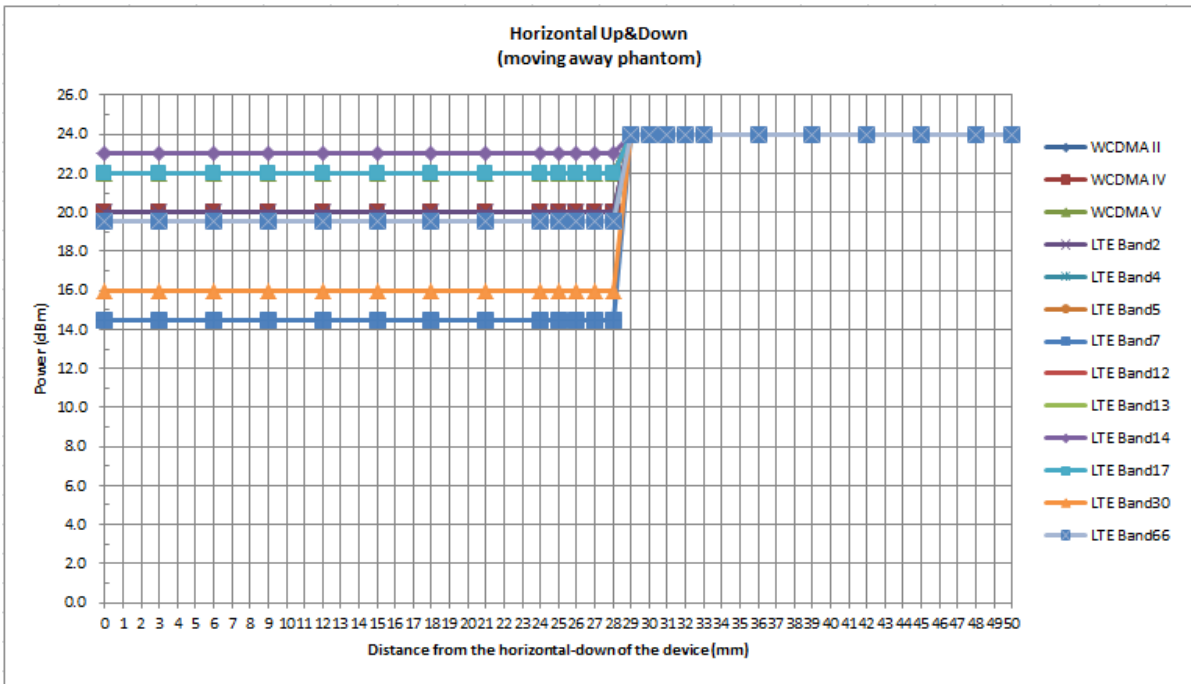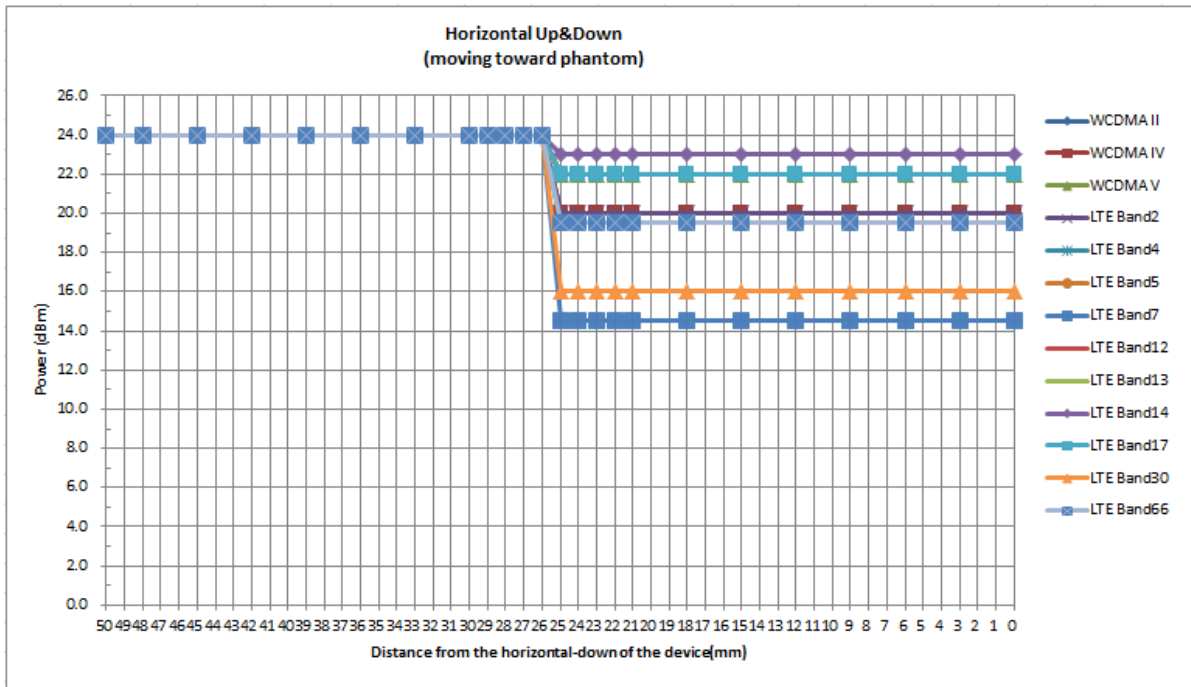

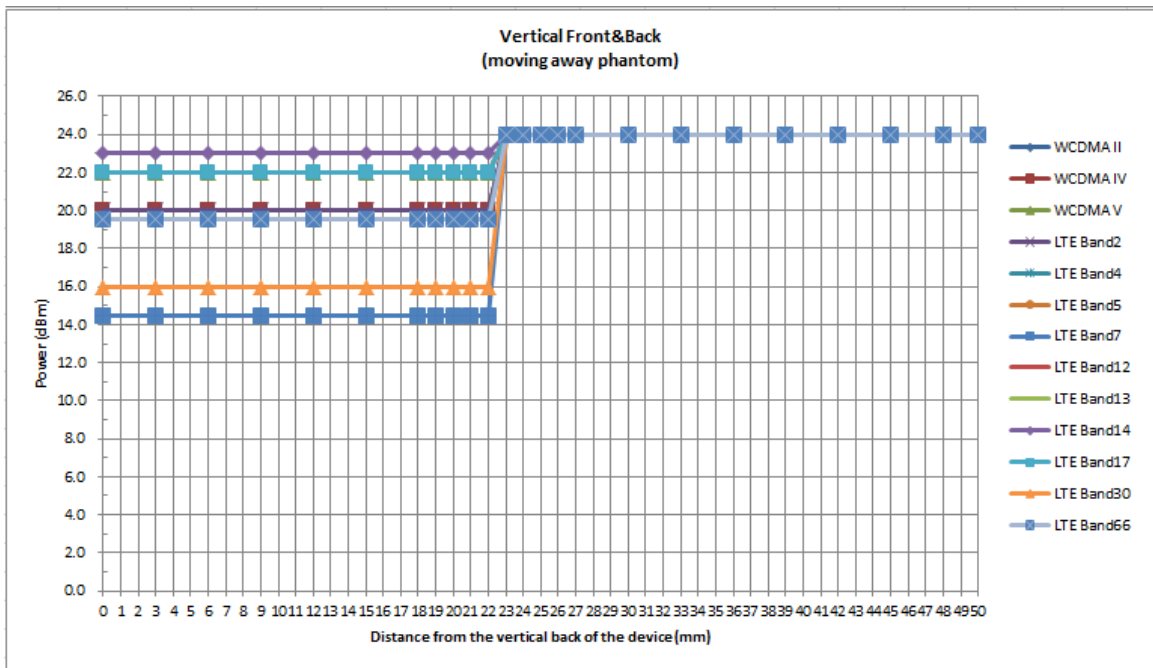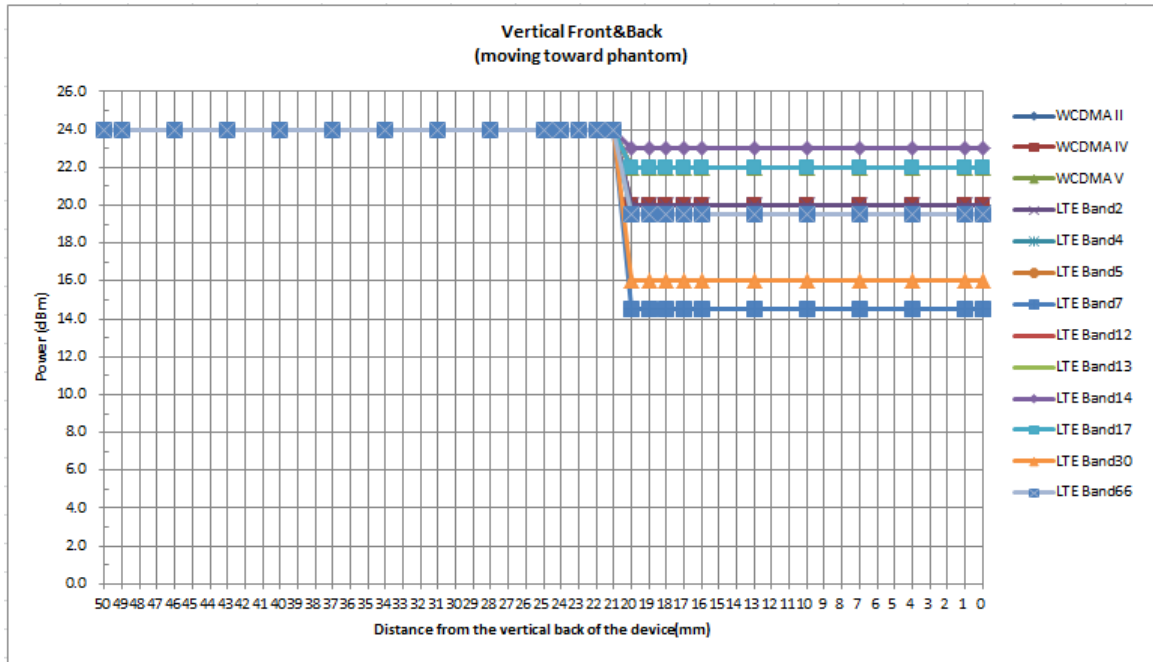

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

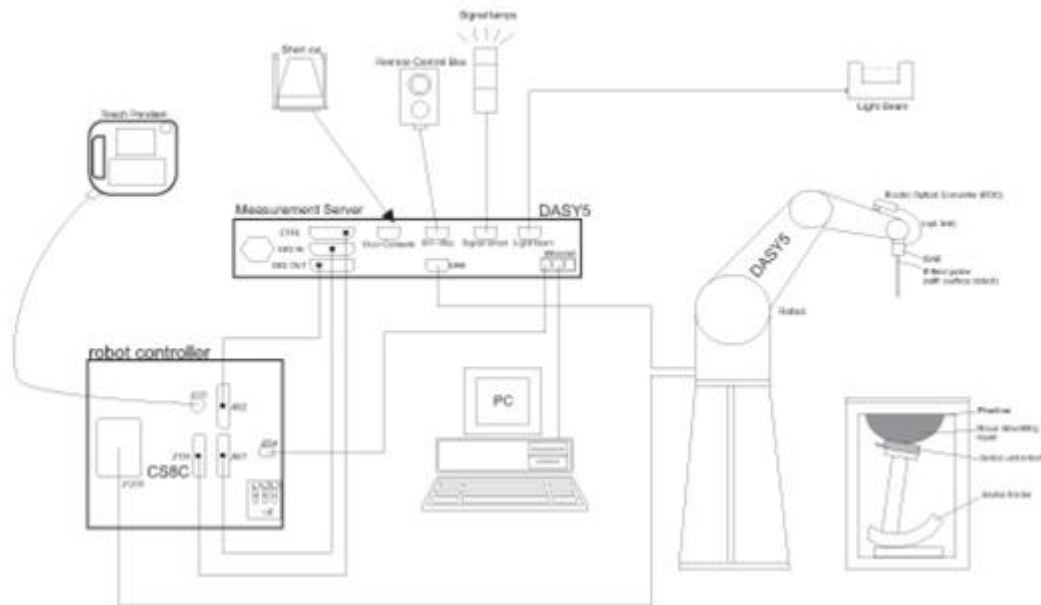


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ±0.2 dB (30 MHz – 6 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.




Photo of DAE

8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Hand, Right Hand, Flat Phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)
Filling Volume	Approx. 30 liters
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm



The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1087	2019/3/27	2020/3/26
SPEAG	835MHz System Validation Kit	D835V2	4d151	2019/3/27	2020/3/26
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2019/3/27	2020/3/26
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	2019/3/26	2020/3/25
SPEAG	2300MHz System Validation Kit	D2300V2	1055	2018/9/20	2019/9/19
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2018/12/7	2019/12/6
SPEAG	Data Acquisition Electronics	DAE4	1279	2018/10/22	2019/10/21
SPEAG	Dosimetric E-Field Probe	EX3DV4	3843	2018/9/27	2019/9/26
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1754	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1503	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8821C	6201432831	2019/4/17	2020/4/16
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2019/4/17	2020/4/16
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2019/4/17	2020/4/16
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	2018/11/20	2019/11/19
Anritsu	Vector Signal Generator	MG3710A	6201682672	2019/1/14	2020/1/13
Rohde & Schwarz	Power Meter	NRVD	102081	2018/8/20	2019/8/19
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2018/8/20	2019/8/19
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2018/8/20	2019/8/19
Testo	Hygrometer	608-H1	1241332126	2018/8/21	2019/8/20
FLUKE	DIGITAC THERMOMETER	51II	97240029	2018/8/8	2019/8/7
R&S	CBT BLUETOOTH TESTER	CBT	101641	2019/1/14	2020/1/13
EXA	Spectrum Analyzer	FSV7	101631	2019/1/14	2020/1/13
ARRA	Power Divider	A3200-2	N/A	Note	
MCL	Attenuation1	BW-S10W5+	N/A	Note	
MCL	Attenuation2	BW-S10W5+	N/A	Note	
MCL	Attenuation3	BW-S10W5+	N/A	Note	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note	
Agilent	Dual Directional Coupler	778D	20500	Note	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note	

Note: Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid.. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1

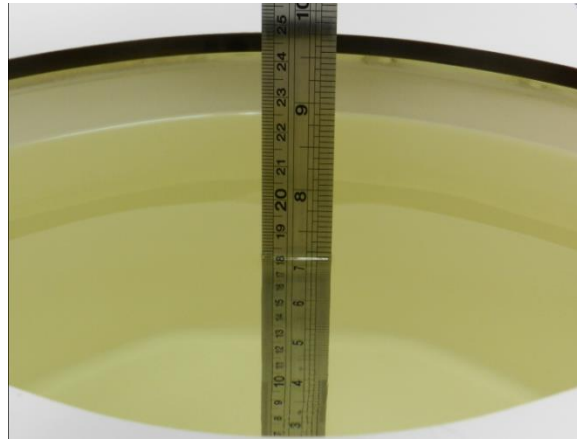


Fig 11.1 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	Head	22.6	0.900	41.538	0.89	41.90	1.12	-0.86	±5	2019/6/8
835	Head	22.6	0.911	42.060	0.90	41.50	1.22	1.35	±5	2019/6/9
1750	Head	22.8	1.349	40.850	1.37	40.10	-1.53	1.87	±5	2019/6/10
1900	Head	22.6	1.424	38.837	1.40	40.00	1.71	-2.91	±5	2019/6/5
2300	Head	22.6	1.690	39.535	1.67	39.50	1.20	0.09	±5	2019/6/11
2600	Head	22.7	2.028	38.274	1.96	39.00	3.47	-1.86	±5	2019/6/16

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2019/6/8	750	Head	250	1087	3843	1279	2.01	8.36	8.04	-3.83
2019/6/9	835	Head	250	4d151	3843	1279	2.25	9.30	9.00	-3.23
2019/6/10	1750	Head	250	1090	3843	1279	9.14	36.40	36.56	0.44
2019/6/5	1900	Head	250	5d170	3843	1279	9.60	39.00	38.40	-1.54
2019/6/11	2300	Head	250	1055	3843	1279	11.80	48.70	47.20	-3.08
2019/6/16	2600	Head	250	1061	3843	1279	14.50	57.70	58.00	0.52

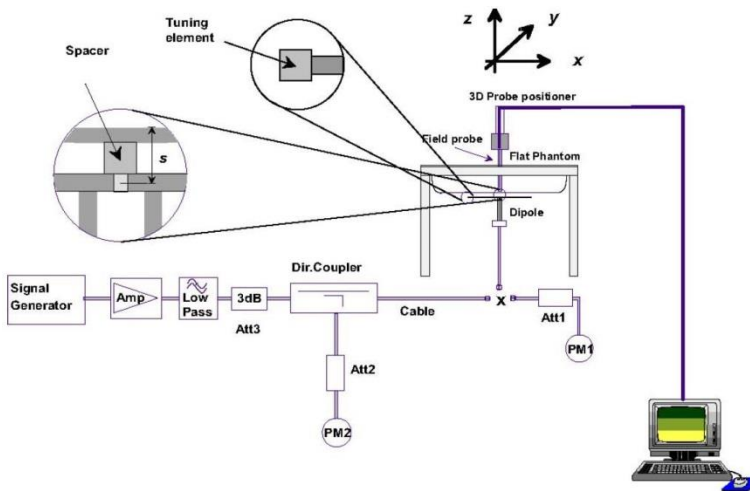


Fig 11.3.1 System Performance Check Setup







Fig 11.3.2 Setup Photo

12. RF Exposure Positions

This EUT was tested in four different USB configurations. They are “direct laptop plug-in for configuration 1 and 3”, “USB cable plug-in for configuration 2 and 4”, and “USB cable plug-in for Tip Mode (the tip of the EUT)” shown as below. Both direct laptop plug-in and USB cable plug-in test configurations are tested with 5 cm separation between the particular dongle orientation and the flat phantom. Please refer to Appendix D for the test setup photos.

12.1 SAR Testing for USB Dongle

Test all USB orientations [see figure below: (A) Horizontal-Up, (B) Horizontal-Down, (C) Vertical-Front, and (D) Vertical-Back] with a device-to-phantom separation distance of 5 mm or less, according to KDB Publication 447498 D02 requirements. These test orientations are intended for the exposure conditions found in typical laptop/notebook/netbook or tablet computers with either horizontal or vertical USB connector configurations at various locations in the keyboard section of the computer. Current generation portable host computers should be used to establish the required SAR measurement separation distance. The same test separation distance must be used to test all frequency bands and modes in each USB orientation. The typical Horizontal-Up USB connection (A), found in the majority of host computers, must be tested using an appropriate host computer. A host computer with either Vertical-Front (C) or Vertical Back (D) USB connection should be used to test one of the vertical USB orientations. If a suitable host computer is not available for testing the Horizontal-Down (B) or the remaining Vertical USB orientation, a high quality USB cable, 12 inches or less, may be used for testing these other orientations. It must be documented that the USB cable does not influence the radiating characteristics and output power of the transmitter.

			
<p>Configuration 1 (Horizontal Up)</p>	<p>Configuration 2 (Horizontal Down)</p>	<p>Configuration 3 (Vertical Front)</p>	<p>Configuration 4 (Vertical Back)</p>

13. Conducted RF Output Power (Unit: dBm)

<WCDMA Conducted Power>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

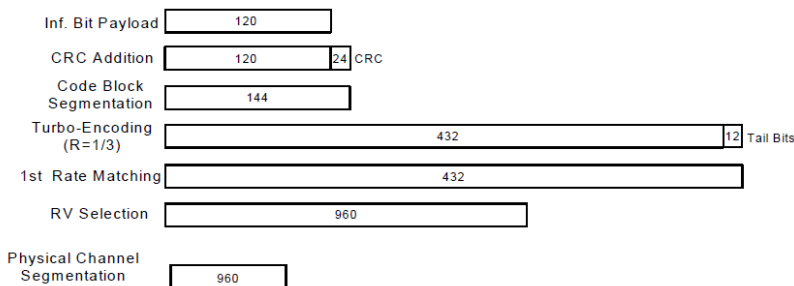


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
 - iii. Set Channel Parm
 - iv. Set Cell Power = -86 dBm
 - v. Set Channel Type = HSPA
 - vi. Set UE Target Power =21 dBm
 - vii. Power Ctrl Mode= All Up Bits
 - viii. Set Manual Uplink DPCH Bc/Bd = Manual
 - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
 - x. Set HSPA Conn DL Channel Levels
 - xi. Set HS-SCCH Configs
 - xii. Set RB Test Mode Setup
 - xiii. Set Common HSUPA Parameters
 - xiv. Set Serving Grant
 - xv. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note3)	β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

Setup Configuration



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA, HSPA+) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

<Full Power Mode>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938	1537	1638	1738	4357	4407	4458			
Frequency (MHz)		1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6			
3GPP Rel 99	RMC 12.2Kbps	23.26	23.34	23.35	24.00	23.25	23.07	23.09	24.00	22.74	22.96	22.92	24.00
3GPP Rel 6	HSDPA Subtest-1	22.09	22.09	22.15	23.00	22.04	21.96	21.89	23.00	21.72	21.89	21.90	23.00
3GPP Rel 6	HSDPA Subtest-2	22.07	22.09	22.25	23.00	22.02	21.95	21.97	23.00	21.76	22.00	21.96	23.00
3GPP Rel 6	HSDPA Subtest-3	21.58	21.64	21.70	22.50	21.54	21.46	21.42	22.50	21.23	21.44	21.44	22.50
3GPP Rel 6	HSDPA Subtest-4	21.56	21.62	21.74	22.50	21.51	21.43	21.45	22.50	21.25	21.43	21.43	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	22.04	22.03	22.11	23.00	22.01	21.92	21.86	23.00	21.70	21.85	21.87	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	22.02	22.02	22.20	23.00	22.00	21.91	21.95	23.00	21.72	21.97	21.92	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	21.53	21.60	21.71	22.50	21.52	21.42	21.40	22.50	21.20	21.40	21.42	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	21.51	21.59	21.70	22.50	21.53	21.41	21.42	22.50	21.23	21.41	21.42	22.50
3GPP Rel 6	HSUPA Subtest-1	22.07	22.04	22.20	23.00	22.02	21.94	21.92	23.00	21.63	21.78	21.73	23.00
3GPP Rel 6	HSUPA Subtest-2	20.04	20.10	20.13	21.00	19.98	19.92	19.96	21.00	19.64	19.83	19.75	21.00
3GPP Rel 6	HSUPA Subtest-3	20.98	21.07	21.16	22.00	21.02	20.87	20.89	22.00	20.68	20.84	20.66	22.00
3GPP Rel 6	HSUPA Subtest-4	20.01	20.11	20.12	21.00	19.96	19.90	19.89	21.00	19.64	19.84	19.77	21.00
3GPP Rel 6	HSUPA Subtest-5	22.08	22.10	22.10	23.00	22.00	21.90	21.90	23.00	21.70	21.80	21.73	23.00
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	19.30	19.13	19.42	20.50	19.31	19.14	19.03	20.50	19.06	19.21	19.11	20.50




<Reduced Power Mode for P-Sensor On>

Band		WCDMA II			Tune-up Limit (dBm)	WCDMA IV			Tune-up Limit (dBm)	WCDMA V			Tune-up Limit (dBm)
TX Channel		9262	9400	9538		1312	1413	1513		4132	4182	4233	
Rx Channel		9662	9800	9938		1537	1638	1738		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	RMC 12.2Kbps	19.76	19.88	19.91	20.00	19.88	19.71	19.82	20.00	20.80	20.88	20.84	22.00
3GPP Rel 6	HSDPA Subtest-1	18.73	18.83	18.85	19.00	18.79	18.72	18.82	19.00	20.03	20.03	19.97	21.00
3GPP Rel 6	HSDPA Subtest-2	18.83	18.89	18.87	19.00	18.75	18.74	18.77	19.00	20.08	20.12	20.08	21.00
3GPP Rel 6	HSDPA Subtest-3	18.32	18.43	18.39	18.50	18.23	18.26	18.28	18.50	19.53	19.54	19.59	20.50
3GPP Rel 6	HSDPA Subtest-4	18.30	18.42	18.40	18.50	18.25	18.22	18.26	18.50	19.56	19.53	19.55	20.50
3GPP Rel 8	DC-HSDPA Subtest-1	18.75	18.80	18.84	19.00	18.76	18.68	18.77	19.00	19.98	19.99	19.94	21.00
3GPP Rel 8	DC-HSDPA Subtest-2	18.85	18.86	18.86	19.00	18.72	18.70	18.72	19.00	20.03	20.08	20.05	21.00
3GPP Rel 8	DC-HSDPA Subtest-3	18.34	18.40	18.38	18.50	18.20	18.22	18.23	18.50	19.48	19.50	19.56	20.50
3GPP Rel 8	DC-HSDPA Subtest-4	18.32	18.39	18.39	18.50	18.22	18.18	18.21	18.50	19.51	19.49	19.52	20.50
3GPP Rel 6	HSUPA Subtest-1	18.55	18.73	18.78	19.00	18.61	18.58	18.65	19.00	20.10	19.99	19.87	21.00
3GPP Rel 6	HSUPA Subtest-2	16.72	16.79	16.83	17.00	16.52	16.59	16.63	17.00	18.07	18.04	17.89	19.00
3GPP Rel 6	HSUPA Subtest-3	17.69	17.78	17.80	18.00	17.52	17.59	17.60	18.00	19.05	19.05	18.80	20.00
3GPP Rel 6	HSUPA Subtest-4	16.69	16.82	16.82	17.00	16.48	16.55	16.64	17.00	18.02	18.05	17.91	19.00
3GPP Rel 6	HSUPA Subtest-5	18.69	18.79	18.79	19.00	18.49	18.59	18.59	19.00	20.00	20.01	19.87	21.00
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	16.43	16.48	16.46	16.50	16.25	16.31	16.26	16.50	17.61	17.56	17.54	18.50


<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B5 / B12 / B17 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE band 4/17 SAR test was covered by Band 66/12; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

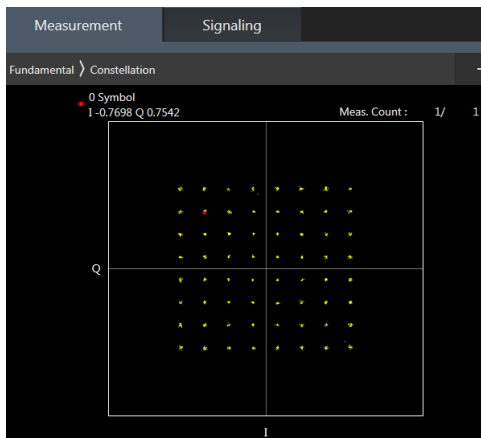

64QAM

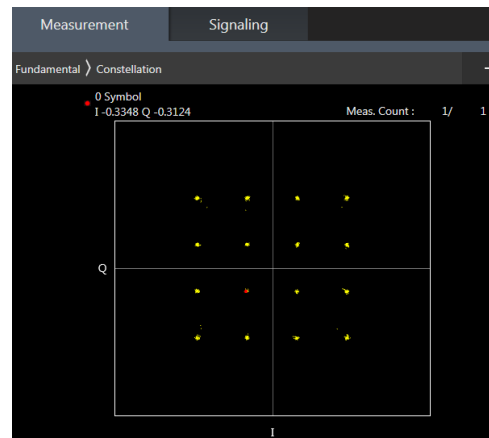

16QAM



<Full Power Mode>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	23.00	23.03	23.25	24	0
20	QPSK	1	49	22.89	22.85	23.06		
20	QPSK	1	99	22.83	22.91	22.95		
20	QPSK	50	0	22.07	21.99	22.16	23	1
20	QPSK	50	24	21.94	21.95	22.22		
20	QPSK	50	50	21.82	21.87	22.11		
20	QPSK	100	0	21.96	21.96	22.08	23	1
20	16QAM	1	0	22.26	22.40	22.45		
20	16QAM	1	49	22.19	22.28	22.44		
20	16QAM	1	99	22.11	21.97	22.19	22	2
20	16QAM	50	0	21.15	21.15	21.21		
20	16QAM	50	24	21.00	21.08	21.36		
20	16QAM	50	50	20.96	20.97	21.23	22	2
20	16QAM	100	0	21.01	21.02	21.14		
20	64QAM	1	0	21.03	21.26	21.25		
20	64QAM	1	49	20.93	21.15	21.22	22	2
20	64QAM	1	99	20.94	20.94	21.00		
20	64QAM	50	0	20.00	20.06	20.10		
20	64QAM	50	24	19.91	19.94	20.16	21	3
20	64QAM	50	50	19.87	19.86	20.12		
20	64QAM	100	0	19.92	19.92	20.05		
Channel				18675	18900	19125		
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	22.97	23.10	23.21	24	0
15	QPSK	1	37	22.77	22.88	23.18		
15	QPSK	1	74	22.83	22.81	23.16		
15	QPSK	36	0	21.93	22.00	22.38	23	1
15	QPSK	36	20	21.94	21.92	22.30		
15	QPSK	36	39	21.96	21.90	22.22		
15	QPSK	75	0	21.93	21.94	22.28	23	1
15	16QAM	1	0	22.25	22.37	22.44		
15	16QAM	1	37	22.05	22.20	22.31		
15	16QAM	1	74	22.14	22.13	22.29	22	2
15	16QAM	36	0	21.01	21.15	21.41		
15	16QAM	36	20	21.00	21.04	21.42		
15	16QAM	36	39	21.01	20.99	21.31	22	2
15	16QAM	75	0	21.04	21.04	21.37		
15	64QAM	1	0	21.02	21.32	21.39		
15	64QAM	1	37	20.91	21.04	21.30	22	2
15	64QAM	1	74	20.93	20.89	21.09		
15	64QAM	36	0	19.89	20.02	20.31		
15	64QAM	36	20	19.87	19.93	20.30	21	3
15	64QAM	36	39	19.81	19.88	20.21		
15	64QAM	75	0	19.91	19.93	20.23		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	22.92	22.99	23.10	24	0
10	QPSK	1	25	22.83	22.86	23.16		
10	QPSK	1	49	22.82	22.77	23.06		
10	QPSK	25	0	21.93	21.95	22.30	23	1
10	QPSK	25	12	21.91	21.91	22.27		
10	QPSK	25	25	21.91	21.87	22.22		
10	QPSK	50	0	21.97	21.91	22.24	23	1
10	16QAM	1	0	22.25	22.30	22.47		
10	16QAM	1	25	21.99	22.23	22.42		
10	16QAM	1	49	22.15	22.10	22.33	22	2
10	16QAM	25	0	20.97	21.09	21.40		
10	16QAM	25	12	20.96	21.08	21.37		
10	16QAM	25	25	20.96	20.97	21.26	22	2
10	16QAM	50	0	21.02	21.01	21.37		
10	64QAM	1	0	20.98	21.09	21.28		
10	64QAM	1	25	20.78	21.03	21.27	22	2
10	64QAM	1	49	20.90	20.90	21.07		
10	64QAM	25	0	19.88	19.97	20.30		
10	64QAM	25	12	19.83	19.89	20.26	21	3
10	64QAM	25	25	19.84	19.86	20.13		
10	64QAM	50	0	19.88	19.89	20.23		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	22.87	22.89	23.23	24	0
5	QPSK	1	12	22.81	22.90	23.15		
5	QPSK	1	24	22.77	22.79	23.06		
5	QPSK	12	0	21.88	21.92	22.27	23	1
5	QPSK	12	7	21.92	21.91	22.21		
5	QPSK	12	13	21.83	21.86	22.18		
5	QPSK	25	0	21.89	21.89	22.20	23	1
5	16QAM	1	0	22.15	22.31	22.49		
5	16QAM	1	12	22.12	22.25	22.38		
5	16QAM	1	24	22.07	22.16	22.28	22	2
5	16QAM	12	0	20.92	21.02	21.34		
5	16QAM	12	7	20.95	21.03	21.29		
5	16QAM	12	13	20.87	20.99	21.24	22	2
5	16QAM	25	0	20.91	21.00	21.23		
5	64QAM	1	0	20.94	21.01	21.20		
5	64QAM	1	12	20.89	21.02	21.23	22	2
5	64QAM	1	24	20.81	20.91	21.12		
5	64QAM	12	0	19.81	19.90	20.21		
5	64QAM	12	7	19.82	19.91	20.21	21	3
5	64QAM	12	13	19.75	19.87	20.12		
5	64QAM	25	0	19.81	19.89	20.13		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	22.76	22.81	23.15	24	0
3	QPSK	1	8	22.73	22.82	23.07		
3	QPSK	1	14	22.72	22.80	23.05		
3	QPSK	8	0	21.85	21.90	22.14	23	1
3	QPSK	8	4	21.80	21.89	22.17		
3	QPSK	8	7	21.79	21.84	22.15		
3	QPSK	15	0	21.80	21.85	22.19	23	1
3	16QAM	1	0	22.07	22.21	22.41		
3	16QAM	1	8	22.08	22.12	22.24		
3	16QAM	1	14	21.96	22.17	22.22	22	2
3	16QAM	8	0	20.94	21.01	21.25		
3	16QAM	8	4	20.90	21.06	21.23		
3	16QAM	8	7	20.89	20.99	21.21	22	2
3	16QAM	15	0	20.89	20.96	21.23		
3	64QAM	1	0	20.84	20.90	21.18		
3	64QAM	1	8	20.78	20.98	21.15	22	2
3	64QAM	1	14	20.80	20.91	21.02		
3	64QAM	8	0	19.78	19.86	20.11		
3	64QAM	8	4	19.80	19.91	20.08	21	3
3	64QAM	8	7	19.72	19.90	20.08		
3	64QAM	15	0	19.78	19.84	20.09		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	22.83	22.88	23.19	24	0
1.4	QPSK	1	3	22.79	22.87	23.06		
1.4	QPSK	1	5	22.82	22.86	23.08		
1.4	QPSK	3	0	22.88	22.92	22.49		
1.4	QPSK	3	1	22.81	22.95	22.49		
1.4	QPSK	3	3	22.85	22.87	22.48		
1.4	QPSK	6	0	21.87	21.88	22.22	23	1
1.4	16QAM	1	0	22.10	22.25	22.41	23	1
1.4	16QAM	1	3	22.04	22.30	22.34		
1.4	16QAM	1	5	22.02	22.18	22.21		
1.4	16QAM	3	0	21.36	21.09	21.26		
1.4	16QAM	3	1	21.32	21.08	21.27		
1.4	16QAM	3	3	21.39	21.03	21.24		
1.4	16QAM	6	0	20.96	21.01	21.25	22	2
1.4	64QAM	1	0	20.98	21.10	21.30	22	2
1.4	64QAM	1	3	20.96	20.98	21.16		
1.4	64QAM	1	5	20.83	20.99	21.13		
1.4	64QAM	3	0	20.68	20.72	20.54		
1.4	64QAM	3	1	20.64	20.68	20.62		
1.4	64QAM	3	3	20.67	20.67	20.67		
1.4	64QAM	6	0	19.50	19.56	19.46	21	3



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	23.03	23.03	23.09	24	0
20	QPSK	1	49	22.80	22.87	22.90		
20	QPSK	1	99	22.86	22.89	22.91		
20	QPSK	50	0	22.03	22.04	22.01	23	1
20	QPSK	50	24	21.92	21.95	22.01		
20	QPSK	50	50	21.91	21.85	21.91		
20	QPSK	100	0	21.93	21.94	21.98	23	1
20	16QAM	1	0	22.31	22.33	22.41		
20	16QAM	1	49	22.13	22.28	22.15		
20	16QAM	1	99	22.22	22.19	22.16	22	2
20	16QAM	50	0	21.08	21.15	21.07		
20	16QAM	50	24	20.99	21.04	21.08		
20	16QAM	50	50	21.06	20.95	20.99	22	2
20	16QAM	100	0	20.98	21.03	21.05		
20	64QAM	1	0	21.18	21.09	21.26		
20	64QAM	1	49	20.87	21.09	21.04	22	2
20	64QAM	1	99	20.94	21.03	20.98		
20	64QAM	50	0	19.99	20.04	19.95		
20	64QAM	50	24	19.90	19.94	19.94	21	3
20	64QAM	50	50	19.93	19.84	19.84		
20	64QAM	100	0	19.90	19.93	19.97		
Channel				20025	20175	20325		
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	23.05	23.03	23.07	24	0
15	QPSK	1	37	22.92	22.91	22.91		
15	QPSK	1	74	22.88	22.95	22.97		
15	QPSK	36	0	22.05	22.07	22.08	23	1
15	QPSK	36	20	22.00	21.99	21.98		
15	QPSK	36	39	21.89	21.90	21.91		
15	QPSK	75	0	21.99	22.00	22.01	23	1
15	16QAM	1	0	22.40	22.35	22.50		
15	16QAM	1	37	22.16	22.23	22.11		
15	16QAM	1	74	22.13	22.34	22.24	22	2
15	16QAM	36	0	21.09	21.12	21.15		
15	16QAM	36	20	21.05	21.08	21.08		
15	16QAM	36	39	20.98	20.98	20.98	22	2
15	16QAM	75	0	21.04	21.07	21.05		
15	64QAM	1	0	21.19	21.10	21.39		
15	64QAM	1	37	21.01	21.06	20.99	22	2
15	64QAM	1	74	21.02	21.07	21.09		
15	64QAM	36	0	19.99	20.01	20.06		
15	64QAM	36	20	19.92	19.91	19.92	21	3
15	64QAM	36	39	19.85	19.87	19.86		
15	64QAM	75	0	19.91	19.92	19.96		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	22.86	23.03	23.06	24	0
10	QPSK	1	25	22.72	22.88	22.97		
10	QPSK	1	49	22.80	22.93	23.00		
10	QPSK	25	0	21.81	21.98	22.02	23	1
10	QPSK	25	12	21.91	21.94	21.96		
10	QPSK	25	25	21.86	21.91	22.03		
10	QPSK	50	0	21.89	21.94	21.98	23	1
10	16QAM	1	0	22.21	22.30	22.36		
10	16QAM	1	25	21.97	22.22	22.33		
10	16QAM	1	49	22.06	22.39	22.26	22	2
10	16QAM	25	0	20.92	21.08	21.04		
10	16QAM	25	12	20.96	21.04	21.04		
10	16QAM	25	25	20.90	20.98	21.11	22	2
10	16QAM	50	0	20.98	21.04	21.03		
10	64QAM	1	0	20.89	21.14	21.21		
10	64QAM	1	25	20.82	20.97	21.08	22	2
10	64QAM	1	49	20.90	21.15	21.09		
10	64QAM	25	0	19.76	19.92	19.97		
10	64QAM	25	12	19.87	19.93	19.91	21	3
10	64QAM	25	25	19.80	19.91	19.94		
10	64QAM	50	0	19.85	19.90	19.92		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	22.79	22.96	23.08	24	0
5	QPSK	1	12	22.74	22.88	22.98		
5	QPSK	1	24	22.75	22.90	22.96		
5	QPSK	12	0	21.81	21.96	22.04	23	1
5	QPSK	12	7	21.85	21.97	22.07		
5	QPSK	12	13	21.74	21.95	21.99		
5	QPSK	25	0	21.77	21.91	22.06	23	1
5	16QAM	1	0	22.11	22.34	22.37		
5	16QAM	1	12	22.04	22.26	22.35		
5	16QAM	1	24	22.01	22.18	22.32	22	2
5	16QAM	12	0	20.90	21.03	21.16		
5	16QAM	12	7	20.90	21.03	21.12		
5	16QAM	12	13	20.87	21.01	21.05	22	2
5	16QAM	25	0	20.81	21.05	21.13		
5	64QAM	1	0	20.91	21.08	21.15		
5	64QAM	1	12	20.84	21.03	21.11	22	2
5	64QAM	1	24	20.78	21.10	21.09		
5	64QAM	12	0	19.74	19.92	20.00		
5	64QAM	12	7	19.77	19.94	19.96	21	3
5	64QAM	12	13	19.75	19.92	19.97		
5	64QAM	25	0	19.70	19.88	20.01		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	22.78	22.94	22.99	24	0
3	QPSK	1	8	22.76	22.86	22.97		
3	QPSK	1	14	22.71	22.85	22.92		
3	QPSK	8	0	21.81	21.89	22.02	23	1
3	QPSK	8	4	21.82	21.97	22.00		
3	QPSK	8	7	21.78	21.93	21.94		
3	QPSK	15	0	21.76	21.91	22.01		
3	16QAM	1	0	22.01	22.31	22.21	23	1
3	16QAM	1	8	22.11	22.26	22.27		
3	16QAM	1	14	22.03	22.17	22.21		
3	16QAM	8	0	20.94	21.01	21.12	22	2
3	16QAM	8	4	20.98	21.11	21.13		
3	16QAM	8	7	20.87	21.05	21.08		
3	16QAM	15	0	20.88	21.01	21.11		
3	64QAM	1	0	20.91	20.99	21.11	22	2
3	64QAM	1	8	20.80	20.99	21.09		
3	64QAM	1	14	20.79	21.05	21.07		
3	64QAM	8	0	19.83	19.88	19.96	21	3
3	64QAM	8	4	19.77	19.92	19.96		
3	64QAM	8	7	19.75	19.87	19.92		
3	64QAM	15	0	19.74	19.87	19.95		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	22.58	22.71	22.82	24	0
1.4	QPSK	1	3	22.66	22.79	22.88		
1.4	QPSK	1	5	22.58	22.70	22.81		
1.4	QPSK	3	0	22.63	22.76	22.88		
1.4	QPSK	3	1	22.62	22.80	22.91		
1.4	QPSK	3	3	22.61	22.78	22.84		
1.4	QPSK	6	0	21.62	21.80	21.88	23	1
1.4	16QAM	1	0	21.87	22.07	22.14	23	1
1.4	16QAM	1	3	21.94	22.16	22.22		
1.4	16QAM	1	5	21.81	22.02	22.08		
1.4	16QAM	3	0	21.74	21.88	21.93		
1.4	16QAM	3	1	21.68	21.90	21.97		
1.4	16QAM	3	3	21.68	21.85	21.88		
1.4	16QAM	6	0	20.78	20.95	20.93	22	2
1.4	64QAM	1	0	20.74	20.84	21.03	22	2
1.4	64QAM	1	3	20.72	20.92	20.94		
1.4	64QAM	1	5	20.72	20.85	20.97		
1.4	64QAM	3	0	20.64	20.81	20.84		
1.4	64QAM	3	1	20.66	20.79	20.89		
1.4	64QAM	3	3	20.60	20.76	20.83		
1.4	64QAM	6	0	19.57	19.71	19.73	21	3



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.99	22.77	22.78	24	0
10	QPSK	1	25	22.95	22.68	22.77		
10	QPSK	1	49	22.68	22.56	22.72		
10	QPSK	25	0	21.54	21.80	21.77	23	1
10	QPSK	25	12	21.65	21.80	21.89		
10	QPSK	25	25	21.71	21.69	21.86		
10	QPSK	50	0	21.71	21.77	21.75		
10	16QAM	1	0	22.14	21.94	22.07	23	1
10	16QAM	1	25	21.92	21.97	22.14		
10	16QAM	1	49	21.98	21.85	22.01		
10	16QAM	25	0	20.84	20.96	20.91	22	2
10	16QAM	25	12	20.94	20.95	20.96		
10	16QAM	25	25	20.92	20.89	20.89		
10	16QAM	50	0	20.91	20.97	20.86		
10	64QAM	1	0	20.85	20.91	20.86	22	2
10	64QAM	1	25	20.68	20.76	20.82		
10	64QAM	1	49	20.73	20.78	20.79		
10	64QAM	25	0	19.76	19.87	19.78	21	3
10	64QAM	25	12	19.83	19.83	19.85		
10	64QAM	25	25	19.77	19.78	19.81		
10	64QAM	50	0	19.81	19.81	19.73		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.97	22.94	22.93	24	0
5	QPSK	1	12	22.89	22.90	22.92		
5	QPSK	1	24	22.90	22.89	22.88		
5	QPSK	12	0	22.03	22.00	22.00	23	1
5	QPSK	12	7	22.01	21.98	22.02		
5	QPSK	12	13	21.95	21.97	21.93		
5	QPSK	25	0	21.97	21.99	22.02		
5	16QAM	1	0	22.28	22.16	22.15	23	1
5	16QAM	1	12	22.27	22.12	22.14		
5	16QAM	1	24	22.17	22.14	22.10		
5	16QAM	12	0	21.10	21.04	21.06	22	2
5	16QAM	12	7	21.12	21.06	21.03		
5	16QAM	12	13	21.07	21.05	20.97		
5	16QAM	25	0	21.05	21.07	21.05		
5	64QAM	1	0	21.08	20.94	21.06	22	2
5	64QAM	1	12	21.04	20.97	20.92		
5	64QAM	1	24	20.96	20.89	20.90		
5	64QAM	12	0	19.96	19.90	19.95	21	3
5	64QAM	12	7	20.01	19.92	19.91		
5	64QAM	12	13	19.91	19.88	19.88		
5	64QAM	25	0	19.95	19.94	19.93		



Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.96	22.83	22.90	24	0
3	QPSK	1	8	22.92	22.83	22.88		
3	QPSK	1	14	22.89	22.76	22.88		
3	QPSK	8	0	22.08	21.83	21.89	23	1
3	QPSK	8	4	22.10	21.90	21.95		
3	QPSK	8	7	22.07	21.84	21.92		
3	QPSK	15	0	22.11	21.86	21.95		
3	16QAM	1	0	22.30	22.03	22.05	23	1
3	16QAM	1	8	22.30	22.05	22.07		
3	16QAM	1	14	22.24	22.04	22.04		
3	16QAM	8	0	21.20	20.94	20.97	22	2
3	16QAM	8	4	21.22	20.97	21.02		
3	16QAM	8	7	21.16	20.88	20.99		
3	16QAM	15	0	21.18	20.93	20.98		
3	64QAM	1	0	21.13	20.90	20.93	22	2
3	64QAM	1	8	21.15	20.91	20.77		
3	64QAM	1	14	21.10	20.85	20.87		
3	64QAM	8	0	20.06	19.80	19.82	21	3
3	64QAM	8	4	20.06	19.81	19.86		
3	64QAM	8	7	19.97	19.77	19.84		
3	64QAM	15	0	20.04	19.81	19.83		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.89	22.86	22.83	24	0
1.4	QPSK	1	3	22.91	22.91	22.95		
1.4	QPSK	1	5	22.84	22.80	22.84		
1.4	QPSK	3	0	22.97	22.91	22.84		
1.4	QPSK	3	1	22.95	22.92	22.93		
1.4	QPSK	3	3	22.89	22.87	22.88		
1.4	QPSK	6	0	21.94	21.90	21.92	23	1
1.4	16QAM	1	0	22.17	22.11	22.01	23	1
1.4	16QAM	1	3	22.28	22.15	22.14		
1.4	16QAM	1	5	22.16	22.02	21.98		
1.4	16QAM	3	0	22.00	21.89	21.86		
1.4	16QAM	3	1	22.05	21.95	21.96		
1.4	16QAM	3	3	21.94	21.87	21.84	22	2
1.4	16QAM	6	0	21.11	21.03	21.01		
1.4	64QAM	1	0	21.01	20.86	20.85		
1.4	64QAM	1	3	21.02	20.92	20.92		
1.4	64QAM	1	5	20.89	20.79	20.86		
1.4	64QAM	3	0	20.91	20.81	20.81		
1.4	64QAM	3	1	20.99	20.84	20.85		
1.4	64QAM	3	3	20.96	20.81	20.79		
1.4	64QAM	6	0	19.93	19.85	19.84	21	3



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	23.10	23.20	23.03	24	0
20	QPSK	1	49	22.93	23.04	22.90		
20	QPSK	1	99	22.99	23.13	22.90		
20	QPSK	50	0	22.07	22.17	21.95	23	1
20	QPSK	50	24	22.05	22.11	22.00		
20	QPSK	50	50	22.01	22.12	21.94		
20	QPSK	100	0	22.04	22.05	22.00		
20	16QAM	1	0	22.37	22.44	22.32	23	1
20	16QAM	1	49	22.30	22.27	22.25		
20	16QAM	1	99	22.32	22.33	22.24		
20	16QAM	50	0	21.15	21.16	21.02	22	2
20	16QAM	50	24	21.09	21.12	21.08		
20	16QAM	50	50	21.08	21.04	20.96		
20	16QAM	100	0	21.07	21.19	21.02		
20	64QAM	1	0	21.19	21.33	21.11	22	2
20	64QAM	1	49	21.12	21.00	21.00		
20	64QAM	1	99	21.16	21.14	21.00		
20	64QAM	50	0	20.01	20.12	19.91	21	3
20	64QAM	50	24	19.97	20.07	19.93		
20	64QAM	50	50	19.95	20.02	19.81		
20	64QAM	100	0	19.99	20.10	19.95		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	23.01	23.07	23.01	24	0
15	QPSK	1	37	22.89	23.03	22.94		
15	QPSK	1	74	22.89	23.12	22.84		
15	QPSK	36	0	21.97	22.11	21.96	23	1
15	QPSK	36	20	21.94	22.13	21.91		
15	QPSK	36	39	21.81	22.06	21.92		
15	QPSK	75	0	21.93	22.08	21.89		
15	16QAM	1	0	22.30	22.49	22.33	23	1
15	16QAM	1	37	22.20	22.28	22.24		
15	16QAM	1	74	22.17	22.39	22.13		
15	16QAM	36	0	20.99	21.22	21.02	22	2
15	16QAM	36	20	21.00	21.17	20.99		
15	16QAM	36	39	20.95	21.12	20.96		
15	16QAM	75	0	20.97	21.15	20.94		
15	64QAM	1	0	21.19	21.46	21.20	22	2
15	64QAM	1	37	21.02	21.29	21.07		
15	64QAM	1	74	21.03	21.28	21.00		
15	64QAM	36	0	19.97	20.06	19.99	21	3
15	64QAM	36	20	20.02	20.02	19.93		
15	64QAM	36	39	19.93	19.94	19.94		
15	64QAM	75	0	19.97	19.98	19.91		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.98	22.98	22.90	24	0
10	QPSK	1	25	22.95	22.95	22.86		
10	QPSK	1	49	22.95	22.85	22.81		
10	QPSK	25	0	22.03	21.96	21.92	23	1
10	QPSK	25	12	22.01	21.98	21.94		
10	QPSK	25	25	22.02	21.95	21.89		
10	QPSK	50	0	22.00	21.98	21.84	23	1
10	16QAM	1	0	22.31	22.37	22.24		
10	16QAM	1	25	22.37	22.26	22.21		
10	16QAM	1	49	22.29	22.18	22.15	22	2
10	16QAM	25	0	21.09	21.07	20.94		
10	16QAM	25	12	21.09	21.04	21.03		
10	16QAM	25	25	21.02	21.00	20.91	22	2
10	16QAM	50	0	21.06	21.01	20.87		
10	64QAM	1	0	21.06	21.15	20.95		
10	64QAM	1	25	21.07	21.07	20.97	22	2
10	64QAM	1	49	20.98	21.06	20.91		
10	64QAM	25	0	19.96	19.94	19.85		
10	64QAM	25	12	19.94	19.95	19.89	21	3
10	64QAM	25	25	19.92	19.86	19.85		
10	64QAM	50	0	19.92	19.89	19.79		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.89	22.91	22.88	24	0
5	QPSK	1	12	22.84	22.94	22.83		
5	QPSK	1	24	22.83	22.90	22.80		
5	QPSK	12	0	21.89	21.96	21.93	23	1
5	QPSK	12	7	21.94	22.02	21.94		
5	QPSK	12	13	21.91	21.94	21.88		
5	QPSK	25	0	21.92	21.94	21.87	23	1
5	16QAM	1	0	22.20	22.23	22.19		
5	16QAM	1	12	22.22	22.26	22.14		
5	16QAM	1	24	22.11	22.24	22.08	22	2
5	16QAM	12	0	20.98	21.05	20.97		
5	16QAM	12	7	20.98	21.03	21.00		
5	16QAM	12	13	20.95	21.01	20.93	22	2
5	16QAM	25	0	20.97	21.01	20.95		
5	64QAM	1	0	20.93	21.05	20.90		
5	64QAM	1	12	20.98	21.04	20.91	22	2
5	64QAM	1	24	20.95	21.02	20.83		
5	64QAM	12	0	19.83	19.91	19.83		
5	64QAM	12	7	19.88	19.94	19.83	21	3
5	64QAM	12	13	19.86	19.87	19.81		
5	64QAM	25	0	19.86	19.91	19.83		



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	22.73	22.82	22.85	24	0
10	QPSK	1	25	22.78	22.83	22.79		
10	QPSK	1	49	22.77	22.97	22.89		
10	QPSK	25	0	21.70	21.75	21.75	23	1
10	QPSK	25	12	21.72	21.76	21.74		
10	QPSK	25	25	21.66	21.72	21.68		
10	QPSK	50	0	21.66	21.75	21.70		
10	16QAM	1	0	21.62	21.78	21.85	23	1
10	16QAM	1	25	21.80	21.80	21.82		
10	16QAM	1	49	21.76	22.00	21.97		
10	16QAM	25	0	20.70	20.78	20.74	22	2
10	16QAM	25	12	20.73	20.80	20.77		
10	16QAM	25	25	20.68	20.79	20.73		
10	16QAM	50	0	20.73	20.78	20.77		
10	64QAM	1	0	20.47	20.67	20.66	22	2
10	64QAM	1	25	20.63	20.64	20.56		
10	64QAM	1	49	20.60	20.78	20.73		
10	64QAM	25	0	19.62	19.66	19.64	21	3
10	64QAM	25	12	19.60	19.69	19.62		
10	64QAM	25	25	19.59	19.64	19.60		
10	64QAM	50	0	19.60	19.67	19.63		
Channel				23035	23095	23155	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	22.71	22.74	22.81	24	0
5	QPSK	1	12	22.71	22.73	22.85		
5	QPSK	1	24	22.70	22.74	22.82		
5	QPSK	12	0	21.62	21.82	21.81	23	1
5	QPSK	12	7	21.67	21.81	21.97		
5	QPSK	12	13	21.75	21.78	21.97		
5	QPSK	25	0	21.78	21.84	21.86		
5	16QAM	1	0	21.89	21.96	22.03	23	1
5	16QAM	1	12	21.94	22.01	21.98		
5	16QAM	1	24	21.85	21.94	21.98		
5	16QAM	12	0	20.74	20.83	20.87	22	2
5	16QAM	12	7	20.77	20.83	20.96		
5	16QAM	12	13	20.81	20.82	20.94		
5	16QAM	25	0	20.76	20.87	20.87		
5	64QAM	1	0	20.65	20.76	20.81	22	2
5	64QAM	1	12	20.70	20.69	20.92		
5	64QAM	1	24	20.66	20.74	20.89		
5	64QAM	12	0	19.63	19.71	19.72	21	3
5	64QAM	12	7	19.65	19.72	19.85		
5	64QAM	12	13	19.61	19.70	19.85		
5	64QAM	25	0	19.70	19.71	19.77		



Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	22.85	22.85	22.88	24	0
3	QPSK	1	8	22.81	22.82	22.82		
3	QPSK	1	14	22.79	22.84	22.82		
3	QPSK	8	0	21.86	21.87	21.86	23	1
3	QPSK	8	4	21.86	21.88	21.88		
3	QPSK	8	7	21.84	21.88	21.92		
3	QPSK	15	0	21.86	21.92	21.91		
3	16QAM	1	0	21.85	21.99	22.00	23	1
3	16QAM	1	8	21.93	22.02	21.98		
3	16QAM	1	14	21.97	22.03	21.99		
3	16QAM	8	0	20.81	20.93	20.92	22	2
3	16QAM	8	4	20.90	20.92	20.97		
3	16QAM	8	7	20.89	20.95	20.95		
3	16QAM	15	0	20.88	20.91	20.98		
3	64QAM	1	0	20.72	20.86	20.83	22	2
3	64QAM	1	8	20.73	20.80	20.86		
3	64QAM	1	14	20.79	20.84	20.82		
3	64QAM	8	0	19.72	19.78	19.77	21	3
3	64QAM	8	4	19.75	19.78	19.81		
3	64QAM	8	7	19.69	19.77	19.79		
3	64QAM	15	0	19.78	19.79	19.82		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	22.66	22.64	22.68	24	0
1.4	QPSK	1	3	22.64	22.71	22.71		
1.4	QPSK	1	5	22.61	22.61	22.64		
1.4	QPSK	3	0	22.61	22.61	22.72		
1.4	QPSK	3	1	22.72	22.73	22.73		
1.4	QPSK	3	3	22.65	22.66	22.61		
1.4	QPSK	6	0	21.81	21.86	21.79	23	1
1.4	16QAM	1	0	21.94	22.03	21.92	23	1
1.4	16QAM	1	3	22.06	22.06	22.01		
1.4	16QAM	1	5	21.99	22.00	21.96		
1.4	16QAM	3	0	21.78	21.82	21.77		
1.4	16QAM	3	1	21.85	21.92	21.83		
1.4	16QAM	3	3	21.79	21.87	21.74	22	2
1.4	16QAM	6	0	20.99	21.03	20.90		
1.4	64QAM	1	0	20.71	20.87	20.71		
1.4	64QAM	1	3	20.89	20.92	20.89		
1.4	64QAM	1	5	20.80	20.87	20.78		
1.4	64QAM	3	0	20.74	20.79	20.69		
1.4	64QAM	3	1	20.73	20.81	20.75		
1.4	64QAM	3	3	20.73	20.76	20.77		
1.4	64QAM	6	0	19.76	19.83	19.76	21	3



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		23.09		24	0
10	QPSK	1	25		23.05			
10	QPSK	1	49		22.98			
10	QPSK	25	0		22.06		23	1
10	QPSK	25	12		22.03			
10	QPSK	25	25		21.95			
10	QPSK	50	0		22.00		23	1
10	16QAM	1	0		22.13			
10	16QAM	1	25		22.23			
10	16QAM	1	49		22.16		22	2
10	16QAM	25	0		21.14			
10	16QAM	25	12		21.06			
10	16QAM	25	25		21.03		22	2
10	16QAM	50	0		21.09			
10	64QAM	1	0		20.98			
10	64QAM	1	25		20.99		22	2
10	64QAM	1	49		21.06			
10	64QAM	25	0		20.02			
10	64QAM	25	12		19.97		21	3
10	64QAM	25	25		19.87			
10	64QAM	50	0		19.97			
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	22.83	22.89	22.87	24	0
5	QPSK	1	12	22.88	22.77	22.98		
5	QPSK	1	24	22.87	22.83	22.89		
5	QPSK	12	0	21.92	21.87	21.91	23	1
5	QPSK	12	7	21.90	21.86	21.97		
5	QPSK	12	13	21.87	21.73	21.97		
5	QPSK	25	0	21.91	21.72	21.89	23	1
5	16QAM	1	0	22.06	22.09	22.09		
5	16QAM	1	12	22.07	22.05	22.11		
5	16QAM	1	24	22.05	22.08	22.12	22	2
5	16QAM	12	0	20.92	20.89	20.96		
5	16QAM	12	7	20.96	20.83	21.04		
5	16QAM	12	13	20.92	20.77	20.99	22	2
5	16QAM	25	0	20.92	20.88	20.93		
5	64QAM	1	0	20.87	20.94	20.84		
5	64QAM	1	12	20.95	20.80	21.00	22	2
5	64QAM	1	24	20.86	20.89	20.97		
5	64QAM	12	0	19.75	19.78	19.78		
5	64QAM	12	7	19.74	19.80	19.92	21	3
5	64QAM	12	13	19.82	19.75	19.85		
5	64QAM	25	0	19.86	19.76	19.80		



<LTE Band 14>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23330				
Frequency (MHz)				793				
10	QPSK	1	0		22.79		24	0
10	QPSK	1	25		22.65			
10	QPSK	1	49		22.58			
10	QPSK	25	0		21.74		23	1
10	QPSK	25	12		21.74			
10	QPSK	25	25		21.64			
10	QPSK	50	0		21.73		23	1
10	16QAM	1	0		21.93			
10	16QAM	1	25		22.08			
10	16QAM	1	49		21.88		22	2
10	16QAM	25	0		20.83			
10	16QAM	25	12		20.80			
10	16QAM	25	25		20.79		22	2
10	16QAM	50	0		20.82			
10	64QAM	1	0		20.73			
10	64QAM	1	25		20.78		22	2
10	64QAM	1	49		20.76			
10	64QAM	25	0		19.74			
10	64QAM	25	12		19.73		21	3
10	64QAM	25	25		19.66			
10	64QAM	50	0		19.67			
Channel				23305	23330	23355	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				790.5	793	795.5		
5	QPSK	1	0	22.77	22.77	22.65	24	0
5	QPSK	1	12	22.78	22.76	22.64		
5	QPSK	1	24	22.75	22.69	22.78		
5	QPSK	12	0	21.85	21.79	21.86	23	1
5	QPSK	12	7	21.88	21.79	21.88		
5	QPSK	12	13	21.79	21.80	21.87		
5	QPSK	25	0	21.87	21.77	21.82	23	1
5	16QAM	1	0	22.08	22.03	22.16		
5	16QAM	1	12	22.02	22.04	22.19		
5	16QAM	1	24	22.00	22.05	22.06	22	2
5	16QAM	12	0	20.97	20.94	20.99		
5	16QAM	12	7	20.96	20.97	21.02		
5	16QAM	12	13	20.91	20.86	20.98	22	2
5	16QAM	25	0	20.91	20.87	20.97		
5	64QAM	1	0	20.85	20.82	20.96		
5	64QAM	1	12	20.86	20.89	20.96	22	2
5	64QAM	1	24	20.77	20.81	20.85		
5	64QAM	12	0	19.81	19.82	19.85		
5	64QAM	12	7	19.86	19.87	19.87	21	3
5	64QAM	12	13	19.78	19.74	19.83		
5	64QAM	25	0	19.83	19.77	19.85		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	22.78	22.86	22.70	24	0
10	QPSK	1	25	22.69	22.72	22.69		
10	QPSK	1	49	22.70	22.67	22.64		
10	QPSK	25	0	21.79	21.78	21.78	23	1
10	QPSK	25	12	21.81	21.82	21.79		
10	QPSK	25	25	21.78	21.77	21.76		
10	QPSK	50	0	21.79	21.78	21.79	23	1
10	16QAM	1	0	21.97	21.91	21.91		
10	16QAM	1	25	21.99	21.92	21.95		
10	16QAM	1	49	21.84	21.84	21.90	22	2
10	16QAM	25	0	20.84	20.83	20.82		
10	16QAM	25	12	20.82	20.84	20.82		
10	16QAM	25	25	20.80	20.80	20.82	22	2
10	16QAM	50	0	20.83	20.78	20.81		
10	64QAM	1	0	20.76	20.80	20.70		
10	64QAM	1	25	20.73	20.74	20.79	21	3
10	64QAM	1	49	20.66	20.72	20.69		
10	64QAM	25	0	19.70	19.66	19.68		
10	64QAM	25	12	19.69	19.69	19.71	21	3
10	64QAM	25	25	19.73	19.71	19.67		
10	64QAM	50	0	19.71	19.70	19.66		
Channel				23755	23790	23825	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				706.5	710	713.5		
5	QPSK	1	0	22.85	22.80	22.77	24	0
5	QPSK	1	12	22.84	22.80	22.77		
5	QPSK	1	24	22.84	22.77	22.67		
5	QPSK	12	0	21.89	21.85	21.79	23	1
5	QPSK	12	7	21.88	21.86	21.78		
5	QPSK	12	13	21.92	21.82	21.77		
5	QPSK	25	0	21.85	21.85	21.81	23	1
5	16QAM	1	0	22.01	22.08	21.98		
5	16QAM	1	12	22.02	22.03	21.95		
5	16QAM	1	24	22.07	21.98	21.94	22	2
5	16QAM	12	0	20.92	20.86	20.79		
5	16QAM	12	7	20.93	20.88	20.84		
5	16QAM	12	13	20.91	20.87	20.75	22	2
5	16QAM	25	0	20.92	20.88	20.83		
5	64QAM	1	0	20.89	20.84	20.82		
5	64QAM	1	12	20.81	20.78	20.78	21	3
5	64QAM	1	24	20.87	20.86	20.67		
5	64QAM	12	0	19.82	19.76	19.69		
5	64QAM	12	7	19.83	19.75	19.71	21	3
5	64QAM	12	13	19.79	19.74	19.67		
5	64QAM	25	0	19.83	19.76	19.70		



<LTE Band 30>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710				
Frequency (MHz)				2310				
10	QPSK	1	0		22.89		24	0
10	QPSK	1	25		22.74			
10	QPSK	1	49		22.83			
10	QPSK	25	0		21.32		23	1
10	QPSK	25	12		21.30			
10	QPSK	25	25		21.28			
10	QPSK	50	0		21.08		23	1
10	16QAM	1	0		21.70			
10	16QAM	1	25		22.11			
10	16QAM	1	49		22.04		22	2
10	16QAM	25	0		20.77			
10	16QAM	25	12		20.54			
10	16QAM	25	25		20.59		22	2
10	16QAM	50	0		20.51			
10	64QAM	1	0		20.46			
10	64QAM	1	25		20.60		22	2
10	64QAM	1	49		20.92			
10	64QAM	25	0		19.57			
10	64QAM	25	12		19.47		21	3
10	64QAM	25	25		19.46			
10	64QAM	50	0		19.38			
Channel				27685	27710	27735	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2307.5	2310	2312.5		
5	QPSK	1	0	22.29	22.31	22.28	24	0
5	QPSK	1	12	22.57	22.60	22.78		
5	QPSK	1	24	22.41	22.53	22.71		
5	QPSK	12	0	21.27	21.37	21.48	23	1
5	QPSK	12	7	21.21	21.23	21.53		
5	QPSK	12	13	21.09	21.21	21.51		
5	QPSK	25	0	21.19	21.14	21.45	23	1
5	16QAM	1	0	21.81	21.83	21.99		
5	16QAM	1	12	21.86	21.92	22.24		
5	16QAM	1	24	21.83	22.00	22.21	22	2
5	16QAM	12	0	20.62	20.77	20.83		
5	16QAM	12	7	20.47	20.52	20.84		
5	16QAM	12	13	20.43	20.50	20.66	22	2
5	16QAM	25	0	20.28	20.45	20.62		
5	64QAM	1	0	20.48	20.64	20.84		
5	64QAM	1	12	20.69	20.65	20.83	22	2
5	64QAM	1	24	20.61	20.70	20.93		
5	64QAM	12	0	19.29	19.64	19.78		
5	64QAM	12	7	19.36	19.46	19.75	21	3
5	64QAM	12	13	19.32	19.48	19.73		
5	64QAM	25	0	19.22	19.35	19.68		



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	23.04	23.19	23.13	24	0
20	QPSK	1	49	22.85	22.98	22.89		
20	QPSK	1	99	22.88	22.91	22.79		
20	QPSK	50	0	22.05	22.19	22.08	23	1
20	QPSK	50	24	22.06	22.07	21.98		
20	QPSK	50	50	21.96	22.00	21.90		
20	QPSK	100	0	22.04	22.11	22.01	23	1
20	16QAM	1	0	22.35	22.54	22.56		
20	16QAM	1	49	22.19	22.33	22.43		
20	16QAM	1	99	22.29	22.20	22.09	22	2
20	16QAM	50	0	21.08	21.29	21.23		
20	16QAM	50	24	21.16	21.17	21.12		
20	16QAM	50	50	21.04	21.09	20.97	22	2
20	16QAM	100	0	21.11	21.15	21.11		
20	64QAM	1	0	21.23	21.35	21.34		
20	64QAM	1	49	20.95	21.10	21.12	22	2
20	64QAM	1	99	21.09	21.04	20.87		
20	64QAM	50	0	20.00	20.15	20.10		
20	64QAM	50	24	20.00	20.07	19.98	21	3
20	64QAM	50	50	19.91	19.95	19.85		
20	64QAM	100	0	20.01	20.07	19.99		
Channel				132047	132322	132597		
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	23.03	23.16	23.08	24	0
15	QPSK	1	37	22.90	22.98	22.82		
15	QPSK	1	74	22.97	22.96	22.78		
15	QPSK	36	0	22.07	22.14	22.00	23	1
15	QPSK	36	20	22.01	22.07	21.94		
15	QPSK	36	39	22.04	22.01	21.86		
15	QPSK	75	0	22.02	22.09	21.90	23	1
15	16QAM	1	0	22.39	22.54	22.39		
15	16QAM	1	37	22.16	22.33	22.26		
15	16QAM	1	74	22.30	22.29	22.09	22	2
15	16QAM	36	0	21.11	21.25	21.10		
15	16QAM	36	20	21.04	21.19	21.04		
15	16QAM	36	39	21.01	21.07	20.93	22	2
15	16QAM	75	0	20.97	21.14	21.00		
15	64QAM	1	0	21.14	21.32	21.24		
15	64QAM	1	37	20.93	21.09	20.96	22	2
15	64QAM	1	74	21.04	21.01	20.84		
15	64QAM	36	0	19.89	20.13	20.03		
15	64QAM	36	20	19.86	20.02	19.95	21	3
15	64QAM	36	39	19.85	19.96	19.83		
15	64QAM	75	0	19.84	20.04	19.91		



Channel				132022	132322	132622	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	22.91	23.00	23.00	24	0
10	QPSK	1	25	22.82	22.97	22.87		
10	QPSK	1	49	22.84	22.91	22.79		
10	QPSK	25	0	21.90	22.08	21.98	23	1
10	QPSK	25	12	21.97	22.03	21.92		
10	QPSK	25	25	21.92	21.95	21.90		
10	QPSK	50	0	21.96	22.03	21.95	23	1
10	16QAM	1	0	22.30	22.32	22.48		
10	16QAM	1	25	22.10	22.32	22.15		
10	16QAM	1	49	22.25	22.30	22.14	22	2
10	16QAM	25	0	20.98	21.16	21.12		
10	16QAM	25	12	21.07	21.09	21.03		
10	16QAM	25	25	20.98	21.05	20.97	21	3
10	16QAM	50	0	21.03	21.14	21.04		
10	64QAM	1	0	21.08	21.08	21.20		
10	64QAM	1	25	20.94	21.14	21.06	22	2
10	64QAM	1	49	20.92	21.06	20.89		
10	64QAM	25	0	19.93	20.05	20.01		
10	64QAM	25	12	19.97	20.05	19.93	21	3
10	64QAM	25	25	19.92	19.97	19.87		
10	64QAM	50	0	19.92	19.98	19.95		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	22.92	22.95	22.79	24	0
5	QPSK	1	12	22.87	22.83	22.75		
5	QPSK	1	24	22.83	22.94	22.76		
5	QPSK	12	0	21.95	21.94	21.81	23	1
5	QPSK	12	7	21.83	21.99	21.91		
5	QPSK	12	13	21.91	21.91	21.85		
5	QPSK	25	0	21.88	21.93	21.83	23	1
5	16QAM	1	0	22.49	22.11	22.10		
5	16QAM	1	12	22.04	22.37	22.35		
5	16QAM	1	24	22.15	22.21	22.06	22	2
5	16QAM	12	0	21.00	21.16	21.04		
5	16QAM	12	7	20.88	21.04	20.90		
5	16QAM	12	13	21.02	21.05	20.96	22	2
5	16QAM	25	0	20.87	21.05	20.98		
5	64QAM	1	0	20.93	21.16	21.33		
5	64QAM	1	12	20.99	20.96	20.92	22	2
5	64QAM	1	24	20.96	21.28	20.89		
5	64QAM	12	0	19.87	19.89	19.97		
5	64QAM	12	7	19.82	19.95	19.84	21	3
5	64QAM	12	13	19.81	19.87	19.79		
5	64QAM	25	0	19.83	19.95	19.72		



Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	22.85	22.96	22.80	24	0
3	QPSK	1	8	22.79	22.95	22.75		
3	QPSK	1	14	22.80	22.94	22.68		
3	QPSK	8	0	21.84	21.99	21.81	23	1
3	QPSK	8	4	21.87	22.01	21.80		
3	QPSK	8	7	21.84	21.99	21.75		
3	QPSK	15	0	21.86	22.01	21.76		
3	16QAM	1	0	22.18	22.22	22.08	23	1
3	16QAM	1	8	22.14	22.35	22.08		
3	16QAM	1	14	22.15	22.29	21.97		
3	16QAM	8	0	20.96	21.16	20.91	22	2
3	16QAM	8	4	21.02	21.13	20.94		
3	16QAM	8	7	20.94	21.10	20.88		
3	16QAM	15	0	20.95	21.13	20.88		
3	64QAM	1	0	20.87	21.12	20.94	22	2
3	64QAM	1	8	20.99	21.12	20.84		
3	64QAM	1	14	20.99	21.11	20.83		
3	64QAM	8	0	19.85	20.02	19.79	21	3
3	64QAM	8	4	19.86	20.01	19.76		
3	64QAM	8	7	19.82	19.96	19.72		
3	64QAM	15	0	19.79	19.98	19.76		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	22.53	22.70	22.54	24	0
1.4	QPSK	1	3	22.61	22.80	22.53		
1.4	QPSK	1	5	22.50	22.69	22.33		
1.4	QPSK	3	0	22.60	22.76	22.49		
1.4	QPSK	3	1	22.62	22.77	22.48		
1.4	QPSK	3	3	22.57	22.75	22.36		
1.4	QPSK	6	0	21.55	21.76	21.37	23	1
1.4	16QAM	1	0	21.84	22.07	21.70	23	1
1.4	16QAM	1	3	21.93	22.07	21.63		
1.4	16QAM	1	5	21.85	22.04	21.62		
1.4	16QAM	3	0	21.88	21.93	21.60		
1.4	16QAM	3	1	21.93	21.90	21.54		
1.4	16QAM	3	3	21.87	21.95	21.59	22	2
1.4	16QAM	6	0	20.72	20.95	20.61		
1.4	64QAM	1	0	20.69	20.62	20.52	22	2
1.4	64QAM	1	3	20.78	20.76	20.53		
1.4	64QAM	1	5	20.65	20.69	20.42		
1.4	64QAM	3	0	20.65	20.62	20.27		
1.4	64QAM	3	1	20.60	20.67	20.32		
1.4	64QAM	3	3	20.57	20.63	20.31		
1.4	64QAM	6	0	19.54	19.54	19.32	21	3



<Reduced Power Mode for P-Sensor On>

<LTE Band 2>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				18700	18900	19100		
Frequency (MHz)				1860	1880	1900		
20	QPSK	1	0	19.45	19.45	19.64	20	0
20	QPSK	1	49	19.38	19.25	19.44		
20	QPSK	1	99	19.21	19.15	19.49		
20	QPSK	50	0	19.49	19.41	19.57	20	0
20	QPSK	50	24	19.40	19.36	19.70		
20	QPSK	50	50	19.28	19.36	19.59		
20	QPSK	100	0	19.38	19.43	19.56	20	0
20	16QAM	1	0	19.68	19.71	19.72		
20	16QAM	1	49	19.68	19.62	19.88		
20	16QAM	1	99	19.55	19.42	19.82	20	0
20	16QAM	50	0	19.56	19.64	19.71		
20	16QAM	50	24	19.47	19.49	19.76		
20	16QAM	50	50	19.44	19.41	19.70	20	0
20	16QAM	100	0	19.52	19.56	19.63		
20	64QAM	1	0	19.70	19.65	19.76		
20	64QAM	1	49	19.54	19.45	19.70	20	0
20	64QAM	1	99	19.52	19.38	19.72		
20	64QAM	50	0	19.60	19.59	19.68		
20	64QAM	50	24	19.54	19.46	19.84	20	0
20	64QAM	50	50	19.48	19.43	19.71		
20	64QAM	100	0	19.55	19.54	19.67		
Channel				18675	18900	19125	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1857.5	1880	1902.5		
15	QPSK	1	0	19.50	19.52	19.69	20	0
15	QPSK	1	37	19.30	19.33	19.62		
15	QPSK	1	74	19.29	19.30	19.67		
15	QPSK	36	0	19.39	19.45	19.80	20	0
15	QPSK	36	20	19.39	19.38	19.78		
15	QPSK	36	39	19.35	19.34	19.68		
15	QPSK	75	0	19.47	19.38	19.68	20	0
15	16QAM	1	0	19.97	19.95	19.92		
15	16QAM	1	37	19.83	19.73	19.71		
15	16QAM	1	74	19.83	19.73	19.99	20	0
15	16QAM	36	0	19.50	19.58	19.89		
15	16QAM	36	20	19.59	19.47	19.87		
15	16QAM	36	39	19.45	19.42	19.83	20	0
15	16QAM	75	0	19.52	19.44	19.83		
15	64QAM	1	0	19.75	19.73	19.80		
15	64QAM	1	37	19.51	19.61	19.78	20	0
15	64QAM	1	74	19.65	19.50	19.71		
15	64QAM	36	0	19.45	19.49	19.87		
15	64QAM	36	20	19.54	19.47	19.83	20	0
15	64QAM	36	39	19.44	19.42	19.82		
15	64QAM	75	0	19.54	19.49	19.84		



Channel				18650	18900	19150	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1855	1880	1905		
10	QPSK	1	0	19.36	19.39	19.67	20	0
10	QPSK	1	25	19.27	19.27	19.57		
10	QPSK	1	49	19.31	19.28	19.46		
10	QPSK	25	0	19.31	19.44	19.75	20	0
10	QPSK	25	12	19.33	19.32	19.67		
10	QPSK	25	25	19.33	19.31	19.68		
10	QPSK	50	0	19.33	19.36	19.70		
10	16QAM	1	0	19.68	19.80	19.97	20	0
10	16QAM	1	25	19.56	19.60	19.76		
10	16QAM	1	49	19.79	19.51	19.82		
10	16QAM	25	0	19.44	19.55	19.88	20	0
10	16QAM	25	12	19.43	19.50	19.80		
10	16QAM	25	25	19.52	19.46	19.76		
10	16QAM	50	0	19.53	19.50	19.84		
10	64QAM	1	0	19.61	19.54	19.97	20	0
10	64QAM	1	25	19.60	19.58	19.88		
10	64QAM	1	49	19.54	19.60	19.93		
10	64QAM	25	0	19.42	19.50	19.85	20	0
10	64QAM	25	12	19.43	19.45	19.83		
10	64QAM	25	25	19.45	19.35	19.74		
10	64QAM	50	0	19.52	19.48	19.83		
Channel				18625	18900	19175	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1852.5	1880	1907.5		
5	QPSK	1	0	19.38	19.33	19.75	20	0
5	QPSK	1	12	19.33	19.35	19.66		
5	QPSK	1	24	19.34	19.31	19.60		
5	QPSK	12	0	19.42	19.41	19.72	20	0
5	QPSK	12	7	19.38	19.36	19.70		
5	QPSK	12	13	19.33	19.37	19.66		
5	QPSK	25	0	19.38	19.35	19.71		
5	16QAM	1	0	19.81	19.71	19.79	20	0
5	16QAM	1	12	19.97	19.64	19.72		
5	16QAM	1	24	19.47	19.73	19.70		
5	16QAM	12	0	19.53	19.51	19.79	20	0
5	16QAM	12	7	19.45	19.49	19.79		
5	16QAM	12	13	19.41	19.44	19.72		
5	16QAM	25	0	19.46	19.37	19.81		
5	64QAM	1	0	19.60	19.52	19.72	20	0
5	64QAM	1	12	19.64	19.55	19.81		
5	64QAM	1	24	19.54	19.47	19.83		
5	64QAM	12	0	19.48	19.44	19.78	20	0
5	64QAM	12	7	19.43	19.52	19.85		
5	64QAM	12	13	19.48	19.49	19.74		
5	64QAM	25	0	19.40	19.49	19.76		



Channel				18615	18900	19185	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1851.5	1880	1908.5		
3	QPSK	1	0	19.46	19.32	19.61	20	0
3	QPSK	1	8	19.35	19.33	19.57		
3	QPSK	1	14	19.28	19.29	19.59		
3	QPSK	8	0	19.34	19.33	19.69	20	0
3	QPSK	8	4	19.37	19.37	19.68		
3	QPSK	8	7	19.34	19.35	19.69		
3	QPSK	15	0	19.36	19.33	19.71		
3	16QAM	1	0	19.63	19.85	19.90	20	0
3	16QAM	1	8	19.77	19.64	19.91		
3	16QAM	1	14	19.64	19.65	19.83		
3	16QAM	8	0	19.55	19.51	19.85	20	0
3	16QAM	8	4	19.49	19.50	19.90		
3	16QAM	8	7	19.50	19.48	19.83		
3	16QAM	15	0	19.42	19.43	19.72		
3	64QAM	1	0	19.50	19.45	19.86	20	0
3	64QAM	1	8	19.50	19.51	19.84		
3	64QAM	1	14	19.43	19.57	19.72		
3	64QAM	8	0	19.49	19.51	19.72	20	0
3	64QAM	8	4	19.49	19.49	19.73		
3	64QAM	8	7	19.46	19.49	19.78		
3	64QAM	15	0	19.36	19.47	19.73		
Channel				18607	18900	19193	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1850.7	1880	1909.3		
1.4	QPSK	1	0	19.28	19.26	19.57	20	0
1.4	QPSK	1	3	19.31	19.29	19.57		
1.4	QPSK	1	5	19.22	19.18	19.56		
1.4	QPSK	3	0	19.27	19.24	19.64		
1.4	QPSK	3	1	19.32	19.34	19.70		
1.4	QPSK	3	3	19.29	19.26	19.61		
1.4	QPSK	6	0	19.35	19.27	19.56	20	0
1.4	16QAM	1	0	19.56	19.57	19.99	20	0
1.4	16QAM	1	3	19.66	19.60	19.82		
1.4	16QAM	1	5	19.59	19.68	19.97		
1.4	16QAM	3	0	19.39	19.42	19.67		
1.4	16QAM	3	1	19.44	19.39	19.68		
1.4	16QAM	3	3	19.33	19.39	19.70	20	0
1.4	16QAM	6	0	19.43	19.44	19.77	20	0
1.4	64QAM	1	0	19.46	19.51	19.70	20	0
1.4	64QAM	1	3	19.42	19.55	19.78		
1.4	64QAM	1	5	19.41	19.41	19.72		
1.4	64QAM	3	0	19.31	19.50	19.77		
1.4	64QAM	3	1	19.42	19.43	19.66		
1.4	64QAM	3	3	19.34	19.49	19.64		
1.4	64QAM	6	0	19.36	19.48	19.72	20	0



<LTE Band 4>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20050	20175	20300		
Frequency (MHz)				1720	1732.5	1745		
20	QPSK	1	0	18.76	18.77	18.71	19.5	0
20	QPSK	1	49	18.56	18.47	18.60		
20	QPSK	1	99	18.43	18.49	18.58		
20	QPSK	50	0	18.63	18.69	18.60	19.5	0
20	QPSK	50	24	18.65	18.57	18.70		
20	QPSK	50	50	18.59	18.52	18.63		
20	QPSK	100	0	18.65	18.59	18.71	19.5	0
20	16QAM	1	0	18.94	18.93	18.88		
20	16QAM	1	49	18.91	18.82	18.82		
20	16QAM	1	99	18.78	18.81	18.86	19.5	0
20	16QAM	50	0	18.76	18.78	18.77		
20	16QAM	50	24	18.78	18.69	18.70		
20	16QAM	50	50	18.67	18.61	18.71	19.5	0
20	16QAM	100	0	18.72	18.75	18.75		
20	64QAM	1	0	18.89	18.92	18.98		
20	64QAM	1	49	18.64	18.83	18.72	19.5	0
20	64QAM	1	99	18.63	18.82	18.91		
20	64QAM	50	0	18.75	18.78	18.72		
20	64QAM	50	24	18.76	18.74	18.73	19.5	0
20	64QAM	50	50	18.67	18.67	18.67		
20	64QAM	100	0	18.80	18.71	18.73		
Channel				20025	20175	20325	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1732.5	1747.5		
15	QPSK	1	0	18.72	18.70	18.73	19.5	0
15	QPSK	1	37	18.50	18.53	18.40		
15	QPSK	1	74	18.60	18.59	18.58		
15	QPSK	36	0	18.71	18.68	18.60	19.5	0
15	QPSK	36	20	18.56	18.54	18.53		
15	QPSK	36	39	18.59	18.51	18.48		
15	QPSK	75	0	18.70	18.63	18.61	19.5	0
15	16QAM	1	0	18.83	18.89	18.88		
15	16QAM	1	37	18.68	18.72	18.71		
15	16QAM	1	74	18.77	18.84	18.77	19.5	0
15	16QAM	36	0	18.73	18.78	18.71		
15	16QAM	36	20	18.70	18.74	18.63		
15	16QAM	36	39	18.75	18.66	18.57	19.5	0
15	16QAM	75	0	18.76	18.72	18.65		
15	64QAM	1	0	18.87	18.99	18.87		
15	64QAM	1	37	18.73	18.67	18.70	19.5	0
15	64QAM	1	74	18.75	18.79	18.71		
15	64QAM	36	0	18.69	18.80	18.71		
15	64QAM	36	20	18.67	18.69	18.63	19.5	0
15	64QAM	36	39	18.65	18.56	18.65		
15	64QAM	75	0	18.69	18.67	18.63		



Channel				20000	20175	20350	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1732.5	1750		
10	QPSK	1	0	18.53	18.56	18.65	19.5	0
10	QPSK	1	25	18.52	18.50	18.67		
10	QPSK	1	49	18.35	18.51	18.60		
10	QPSK	25	0	18.59	18.56	18.64	19.5	0
10	QPSK	25	12	18.52	18.57	18.62		
10	QPSK	25	25	18.41	18.53	18.63		
10	QPSK	50	0	18.49	18.54	18.64		
10	16QAM	1	0	18.84	18.82	18.85	19.5	0
10	16QAM	1	25	18.77	18.70	18.82		
10	16QAM	1	49	18.75	18.91	18.88		
10	16QAM	25	0	18.57	18.68	18.73	19.5	0
10	16QAM	25	12	18.57	18.89	18.72		
10	16QAM	25	25	18.47	18.64	18.75		
10	16QAM	50	0	18.59	18.69	18.68		
10	64QAM	1	0	18.70	18.78	18.79	19.5	0
10	64QAM	1	25	18.72	18.87	18.86		
10	64QAM	1	49	18.53	18.96	18.90		
10	64QAM	25	0	18.62	18.72	18.74	19.5	0
10	64QAM	25	12	18.64	18.71	18.71		
10	64QAM	25	25	18.58	18.58	18.73		
10	64QAM	50	0	18.61	18.64	18.66		
Channel				19975	20175	20375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1732.5	1752.5		
5	QPSK	1	0	18.54	18.58	18.64	19.5	0
5	QPSK	1	12	18.47	18.44	18.60		
5	QPSK	1	24	18.43	18.47	18.64		
5	QPSK	12	0	18.48	18.55	18.69	19.5	0
5	QPSK	12	7	18.52	18.59	18.72		
5	QPSK	12	13	18.47	18.47	18.63		
5	QPSK	25	0	18.52	18.54	18.64		
5	16QAM	1	0	18.91	18.89	18.87	19.5	0
5	16QAM	1	12	18.61	18.72	18.87		
5	16QAM	1	24	18.67	18.82	18.88		
5	16QAM	12	0	18.59	18.67	18.75	19.5	0
5	16QAM	12	7	18.57	18.65	18.72		
5	16QAM	12	13	18.52	18.66	18.75		
5	16QAM	25	0	18.62	18.65	18.77		
5	64QAM	1	0	18.91	18.94	18.86	19.5	0
5	64QAM	1	12	18.85	18.86	18.83		
5	64QAM	1	24	18.68	18.75	18.91		
5	64QAM	12	0	18.67	18.72	18.77	19.5	0
5	64QAM	12	7	18.68	18.68	18.86		
5	64QAM	12	13	18.61	18.68	18.75		
5	64QAM	25	0	18.64	18.60	18.73		



Channel				19965	20175	20385	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1732.5	1753.5		
3	QPSK	1	0	18.53	18.53	18.60	19.5	0
3	QPSK	1	8	18.53	18.55	18.64		
3	QPSK	1	14	18.48	18.49	18.56		
3	QPSK	8	0	18.51	18.51	18.59	19.5	0
3	QPSK	8	4	18.45	18.56	18.62		
3	QPSK	8	7	18.46	18.48	18.66		
3	QPSK	15	0	18.64	18.51	18.59		
3	16QAM	1	0	18.82	18.66	18.88	19.5	0
3	16QAM	1	8	18.78	18.90	18.81		
3	16QAM	1	14	18.67	18.59	18.75		
3	16QAM	8	0	18.61	18.67	18.67	19.5	0
3	16QAM	8	4	18.68	18.67	18.73		
3	16QAM	8	7	18.56	18.69	18.71		
3	16QAM	15	0	18.61	18.63	18.65		
3	64QAM	1	0	18.79	18.79	18.85	19.5	0
3	64QAM	1	8	18.69	18.84	18.79		
3	64QAM	1	14	18.76	18.73	18.82		
3	64QAM	8	0	18.67	18.63	18.76	19.5	0
3	64QAM	8	4	18.61	18.71	18.80		
3	64QAM	8	7	18.64	18.60	18.84		
3	64QAM	15	0	18.62	18.64	18.78		
Channel				19957	20175	20393	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1732.5	1754.3		
1.4	QPSK	1	0	18.47	18.46	18.55	19.5	0
1.4	QPSK	1	3	18.54	18.53	18.59		
1.4	QPSK	1	5	18.39	18.48	18.59		
1.4	QPSK	3	0	18.53	18.44	18.60		
1.4	QPSK	3	1	18.46	18.58	18.62		
1.4	QPSK	3	3	18.53	18.55	18.55		
1.4	QPSK	6	0	18.46	18.48	18.59	19.5	0
1.4	16QAM	1	0	18.85	18.78	18.76	19.5	0
1.4	16QAM	1	3	18.73	18.81	18.98		
1.4	16QAM	1	5	18.79	18.79	18.86		
1.4	16QAM	3	0	18.61	18.55	18.56		
1.4	16QAM	3	1	18.54	18.58	18.67		
1.4	16QAM	3	3	18.47	18.55	18.66		
1.4	16QAM	6	0	18.58	18.69	18.68	19.5	0
1.4	64QAM	1	0	18.56	18.75	18.73	19.5	0
1.4	64QAM	1	3	18.71	18.73	18.74		
1.4	64QAM	1	5	18.58	18.65	18.76		
1.4	64QAM	3	0	18.68	18.47	18.76		
1.4	64QAM	3	1	18.70	18.69	18.74		
1.4	64QAM	3	3	18.68	18.56	18.75		
1.4	64QAM	6	0	18.59	18.64	18.76	19.5	0



<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600		
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	20.52	20.50	20.56	22	0
10	QPSK	1	25	20.52	20.46	20.48		
10	QPSK	1	49	20.48	20.50	20.52		
10	QPSK	25	0	20.44	20.39	20.33	22	0
10	QPSK	25	12	20.48	20.36	20.38		
10	QPSK	25	25	20.47	20.25	20.35		
10	QPSK	50	0	20.43	20.35	20.26	22	0
10	16QAM	1	0	20.69	20.54	20.64		
10	16QAM	1	25	20.62	20.58	20.57		
10	16QAM	1	49	20.67	20.52	20.53	22	0
10	16QAM	25	0	20.56	20.46	20.36		
10	16QAM	25	12	20.51	20.45	20.49		
10	16QAM	25	25	20.56	20.40	20.39	22	0
10	16QAM	50	0	20.50	20.41	20.31		
10	64QAM	1	0	20.56	20.46	20.52		
10	64QAM	1	25	20.52	20.52	20.53	22	0
10	64QAM	1	49	20.55	20.42	20.39		
10	64QAM	25	0	19.52	19.46	19.36		
10	64QAM	25	12	19.50	19.45	19.44	21	1
10	64QAM	25	25	19.56	19.40	19.34		
10	64QAM	50	0	19.49	19.41	19.30		
Channel				20425	20525	20625	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	20.45	20.37	20.41	22	0
5	QPSK	1	12	20.41	20.27	20.37		
5	QPSK	1	24	20.50	20.26	20.32		
5	QPSK	12	0	20.45	20.35	20.43	22	0
5	QPSK	12	7	20.58	20.33	20.44		
5	QPSK	12	13	20.57	20.33	20.36		
5	QPSK	25	0	20.56	20.35	20.41	22	0
5	16QAM	1	0	20.48	20.33	20.41		
5	16QAM	1	12	20.41	20.32	20.33		
5	16QAM	1	24	20.42	20.25	20.31	22	0
5	16QAM	12	0	20.55	20.42	20.49		
5	16QAM	12	7	20.65	20.40	20.45		
5	16QAM	12	13	20.57	20.39	20.45	22	0
5	16QAM	25	0	20.62	20.40	20.47		
5	64QAM	1	0	20.73	20.53	20.64		
5	64QAM	1	12	20.66	20.49	20.55	22	0
5	64QAM	1	24	20.67	20.51	20.54		
5	64QAM	12	0	19.54	19.42	19.46		
5	64QAM	12	7	19.62	19.41	19.45	21	1
5	64QAM	12	13	19.57	19.38	19.46		
5	64QAM	25	0	19.63	19.40	19.49		



FCC SAR TEST REPORT

Report No. : FA942417

Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	20.43	20.32	20.42	22	0
3	QPSK	1	8	20.38	20.28	20.33		
3	QPSK	1	14	20.39	20.26	20.34		
3	QPSK	8	0	20.45	20.31	20.39	22	0
3	QPSK	8	4	20.49	20.37	20.43		
3	QPSK	8	7	20.45	20.31	20.37		
3	QPSK	15	0	20.46	20.36	20.41	22	0
3	16QAM	1	0	20.75	20.59	20.61		
3	16QAM	1	8	20.72	20.56	20.64		
3	16QAM	1	14	20.70	20.54	20.63	22	0
3	16QAM	8	0	20.57	20.42	20.48		
3	16QAM	8	4	20.59	20.45	20.52		
3	16QAM	8	7	20.55	20.43	20.49	22	0
3	16QAM	15	0	20.55	20.44	20.50		
3	64QAM	1	0	20.69	20.53	20.59		
3	64QAM	1	8	20.66	20.49	20.55	22	0
3	64QAM	1	14	20.60	20.48	20.56		
3	64QAM	8	0	19.53	19.37	19.41		
3	64QAM	8	4	19.56	19.41	19.48	21	1
3	64QAM	8	7	19.49	19.40	19.43		
3	64QAM	15	0	19.53	19.41	19.49		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	20.26	20.19	20.27	22	0
1.4	QPSK	1	3	20.30	20.30	20.34		
1.4	QPSK	1	5	20.23	20.22	20.25		
1.4	QPSK	3	0	20.28	20.28	20.32	22	0
1.4	QPSK	3	1	20.35	20.30	20.40		
1.4	QPSK	3	3	20.29	20.25	20.32		
1.4	QPSK	6	0	20.30	20.26	20.35	22	0
1.4	16QAM	1	0	20.59	20.56	20.59	22	0
1.4	16QAM	1	3	20.72	20.53	20.65		
1.4	16QAM	1	5	20.64	20.52	20.56		
1.4	16QAM	3	0	20.49	20.32	20.39	22	0
1.4	16QAM	3	1	20.51	20.35	20.42		
1.4	16QAM	3	3	20.46	20.29	20.39		
1.4	16QAM	6	0	20.54	20.42	20.50	22	0
1.4	64QAM	1	0	20.61	20.49	20.50	22	0
1.4	64QAM	1	3	20.67	20.47	20.57		
1.4	64QAM	1	5	20.55	20.40	20.50		
1.4	64QAM	3	0	20.53	20.35	20.42	22	0
1.4	64QAM	3	1	20.53	20.35	20.46		
1.4	64QAM	3	3	20.49	20.35	20.42		
1.4	64QAM	6	0	19.46	19.35	19.44	21	1



<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	13.09	13.41	13.34	14.5	0
20	QPSK	1	49	13.07	13.40	13.12		
20	QPSK	1	99	13.17	13.27	13.20		
20	QPSK	50	0	13.11	13.26	13.16	14.5	0
20	QPSK	50	24	13.21	13.20	13.17		
20	QPSK	50	50	13.13	13.14	13.12		
20	QPSK	100	0	13.15	13.16	13.16		
20	16QAM	1	0	13.10	13.16	13.06	14.5	0
20	16QAM	1	49	13.28	13.27	13.24		
20	16QAM	1	99	13.26	13.22	13.29		
20	16QAM	50	0	13.16	13.30	13.13	14.5	0
20	16QAM	50	24	13.18	13.19	13.16		
20	16QAM	50	50	13.13	13.12	13.13		
20	16QAM	100	0	13.16	13.19	13.11		
20	64QAM	1	0	13.34	13.25	13.27	14.5	0
20	64QAM	1	49	13.40	13.26	13.41		
20	64QAM	1	99	13.36	13.40	13.29		
20	64QAM	50	0	13.13	13.27	13.10	14.5	0
20	64QAM	50	24	13.16	13.24	13.15		
20	64QAM	50	50	13.10	13.07	13.08		
20	64QAM	100	0	13.13	13.14	13.11		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	13.26	13.35	13.30	14.5	0
15	QPSK	1	37	13.05	13.04	13.10		
15	QPSK	1	74	13.26	13.33	13.17		
15	QPSK	36	0	13.16	13.28	13.26	14.5	0
15	QPSK	36	20	13.24	13.22	13.19		
15	QPSK	36	39	13.22	13.17	13.17		
15	QPSK	75	0	13.23	13.24	13.15		
15	16QAM	1	0	13.15	13.06	13.05	14.5	0
15	16QAM	1	37	13.11	13.32	13.33		
15	16QAM	1	74	13.23	13.30	13.31		
15	16QAM	36	0	12.87	12.96	12.98	14.5	0
15	16QAM	36	20	12.93	12.97	12.91		
15	16QAM	36	39	12.85	12.89	12.91		
15	16QAM	75	0	12.89	12.91	12.87		
15	64QAM	1	0	13.12	13.30	13.38	14.5	0
15	64QAM	1	37	13.00	13.28	13.09		
15	64QAM	1	74	13.15	13.19	13.14		
15	64QAM	36	0	12.89	13.01	12.93	14.5	0
15	64QAM	36	20	12.91	12.95	12.90		
15	64QAM	36	39	12.90	12.91	12.93		
15	64QAM	75	0	12.93	12.96	12.92		



Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	13.13	13.22	13.13	14.5	0
10	QPSK	1	25	13.11	13.26	13.24		
10	QPSK	1	49	13.03	13.09	13.04		
10	QPSK	25	0	13.04	13.21	13.14	14.5	0
10	QPSK	25	12	13.05	13.16	13.19		
10	QPSK	25	25	13.02	13.08	13.12		
10	QPSK	50	0	13.04	13.06	13.12	14.5	0
10	16QAM	1	0	12.99	13.10	12.93		
10	16QAM	1	25	13.31	13.28	13.34		
10	16QAM	1	49	13.05	13.27	13.18	14.5	0
10	16QAM	25	0	12.74	12.90	12.82		
10	16QAM	25	12	12.79	12.85	12.89		
10	16QAM	25	25	12.76	12.82	12.86	14.5	0
10	16QAM	50	0	12.78	12.84	12.82		
10	64QAM	1	0	12.97	13.21	13.13		
10	64QAM	1	25	13.13	13.17	13.14	14.5	0
10	64QAM	1	49	12.81	13.04	13.02		
10	64QAM	25	0	12.76	12.91	12.78		
10	64QAM	25	12	12.76	12.83	12.86	14.5	0
10	64QAM	25	25	12.73	12.77	12.83		
10	64QAM	50	0	12.74	12.81	12.72		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	13.08	13.14	13.17	14.5	0
5	QPSK	1	12	13.04	13.10	13.17		
5	QPSK	1	24	13.03	13.11	13.10		
5	QPSK	12	0	13.09	13.23	13.17	14.5	0
5	QPSK	12	7	13.14	13.28	13.27		
5	QPSK	12	13	13.07	13.18	13.19		
5	QPSK	25	0	13.01	13.12	13.10	14.5	0
5	16QAM	1	0	13.03	12.95	13.00		
5	16QAM	1	12	13.13	13.25	13.30		
5	16QAM	1	24	13.20	13.21	13.16	14.5	0
5	16QAM	12	0	13.18	13.23	13.18		
5	16QAM	12	7	12.89	12.93	12.96		
5	16QAM	12	13	12.89	12.98	12.91	14.5	0
5	16QAM	25	0	12.80	12.94	12.91		
5	64QAM	1	0	12.77	12.80	12.83		
5	64QAM	1	12	13.06	13.18	13.13	14.5	0
5	64QAM	1	24	12.99	13.10	13.15		
5	64QAM	12	0	12.97	13.02	13.18		
5	64QAM	12	7	12.78	12.97	12.92	14.5	0
5	64QAM	12	13	12.95	12.94	12.95		
5	64QAM	25	0	12.81	12.86	12.90		



<LTE Band 12>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23060	23095	23130		
Frequency (MHz)				704	707.5	711		
10	QPSK	1	0	21.61	21.54	21.40	22	0
10	QPSK	1	25	21.49	21.43	21.31		
10	QPSK	1	49	21.31	21.70	21.20		
10	QPSK	25	0	21.59	21.53	21.38	22	0
10	QPSK	25	12	21.56	21.60	21.35		
10	QPSK	25	25	21.48	21.41	21.25		
10	QPSK	50	0	21.49	21.50	21.33	22	0
10	16QAM	1	0	21.74	21.83	21.75		
10	16QAM	1	25	21.71	21.64	21.41		
10	16QAM	1	49	21.63	21.66	21.53	22	0
10	16QAM	25	0	21.16	21.13	20.84		
10	16QAM	25	12	21.09	21.11	20.87		
10	16QAM	25	25	21.06	20.99	20.72	22	0
10	16QAM	50	0	21.11	21.08	20.78		
10	64QAM	1	0	21.28	21.18	21.10		
10	64QAM	1	25	21.17	21.17	20.86	22	0
10	64QAM	1	49	21.05	21.03	20.84		
10	64QAM	25	0	20.15	20.09	19.86		
10	64QAM	25	12	20.14	20.03	19.86	21	1
10	64QAM	25	25	20.02	20.01	19.75		
10	64QAM	50	0	20.13	20.11	19.83		
Channel				23035	23095	23155	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				701.5	707.5	713.5		
5	QPSK	1	0	21.59	21.48	21.41	22	0
5	QPSK	1	12	21.46	21.40	21.41		
5	QPSK	1	24	21.37	21.37	21.38		
5	QPSK	12	0	21.55	21.45	21.41	22	0
5	QPSK	12	7	21.52	21.44	21.53		
5	QPSK	12	13	21.40	21.41	21.44		
5	QPSK	25	0	21.54	21.40	21.35	22	0
5	16QAM	1	0	21.63	21.82	21.70		
5	16QAM	1	12	21.72	21.71	21.75		
5	16QAM	1	24	21.62	21.55	21.68	22	0
5	16QAM	12	0	20.94	20.95	20.94		
5	16QAM	12	7	21.04	20.96	20.99		
5	16QAM	12	13	20.97	20.89	20.88	22	0
5	16QAM	25	0	21.07	20.95	20.88		
5	64QAM	1	0	21.08	21.03	21.05		
5	64QAM	1	12	21.06	21.17	20.98	22	0
5	64QAM	1	24	21.03	21.00	20.93		
5	64QAM	12	0	20.03	20.04	19.97		
5	64QAM	12	7	20.02	20.07	20.08	21	1
5	64QAM	12	13	20.05	19.97	19.98		
5	64QAM	25	0	20.02	19.98	19.92		



Channel				23025	23095	23165	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				700.5	707.5	714.5		
3	QPSK	1	0	21.48	21.49	21.35	22	0
3	QPSK	1	8	21.40	21.37	21.32		
3	QPSK	1	14	21.43	21.35	21.31		
3	QPSK	8	0	21.48	21.42	21.38	22	0
3	QPSK	8	4	21.53	21.46	21.36		
3	QPSK	8	7	21.52	21.40	21.41		
3	QPSK	15	0	21.53	21.45	21.41		
3	16QAM	1	0	21.77	21.67	21.72	22	0
3	16QAM	1	8	21.75	21.75	21.63		
3	16QAM	1	14	21.74	21.61	21.63		
3	16QAM	8	0	21.11	21.07	20.89	22	0
3	16QAM	8	4	21.10	21.11	20.92		
3	16QAM	8	7	21.11	21.05	20.84		
3	16QAM	15	0	21.13	21.01	20.93		
3	64QAM	1	0	21.22	21.14	20.97	22	0
3	64QAM	1	8	21.16	21.09	20.92		
3	64QAM	1	14	21.18	21.05	20.96		
3	64QAM	8	0	20.16	20.12	19.93	21	1
3	64QAM	8	4	20.17	20.11	19.94		
3	64QAM	8	7	20.14	20.04	19.86		
3	64QAM	15	0	20.05	20.03	19.95		
Channel				23017	23095	23173	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				699.7	707.5	715.3		
1.4	QPSK	1	0	21.39	21.28	21.20	22	0
1.4	QPSK	1	3	21.53	21.38	21.33		
1.4	QPSK	1	5	21.41	21.31	21.24		
1.4	QPSK	3	0	21.49	21.38	21.27		
1.4	QPSK	3	1	21.45	21.38	21.30		
1.4	QPSK	3	3	21.37	21.36	21.30		
1.4	QPSK	6	0	21.51	21.36	21.26	22	0
1.4	16QAM	1	0	21.72	21.63	21.45	22	0
1.4	16QAM	1	3	21.55	21.69	21.61		
1.4	16QAM	1	5	21.58	21.73	21.50		
1.4	16QAM	3	0	21.46	21.48	21.34		
1.4	16QAM	3	1	21.48	21.45	21.40		
1.4	16QAM	3	3	21.32	21.35	21.35		
1.4	16QAM	6	0	21.11	20.97	20.88	22	0
1.4	64QAM	1	0	20.98	20.97	20.96	22	0
1.4	64QAM	1	3	21.11	21.02	20.90		
1.4	64QAM	1	5	21.05	20.89	20.85		
1.4	64QAM	3	0	21.09	20.90	20.92		
1.4	64QAM	3	1	21.11	21.00	20.88		
1.4	64QAM	3	3	21.03	20.93	20.85		
1.4	64QAM	6	0	20.02	19.79	19.77	21	1



<LTE Band 13>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23230				
Frequency (MHz)				782				
10	QPSK	1	0		21.38		22	0
10	QPSK	1	25		21.19			
10	QPSK	1	49		21.14			
10	QPSK	25	0		21.36		22	0
10	QPSK	25	12		21.29			
10	QPSK	25	25		21.16			
10	QPSK	50	0		21.24		22	0
10	16QAM	1	0		21.64			
10	16QAM	1	25		21.43			
10	16QAM	1	49		21.47		22	0
10	16QAM	25	0		20.42			
10	16QAM	25	12		20.39			
10	16QAM	25	25		20.28		22	0
10	16QAM	50	0		20.38			
10	64QAM	1	0		20.54			
10	64QAM	1	25		20.39		22	0
10	64QAM	1	49		20.40			
10	64QAM	25	0		19.44			
10	64QAM	25	12		19.43		21	1
10	64QAM	25	25		19.33			
10	64QAM	50	0		19.33			
Channel				23205	23230	23255	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				779.5	782	784.5		
5	QPSK	1	0	21.36	21.31	21.27	22	0
5	QPSK	1	12	21.28	21.20	21.37		
5	QPSK	1	24	21.14	21.25	21.24		
5	QPSK	12	0	21.37	21.34	21.30	22	0
5	QPSK	12	7	21.39	21.28	21.42		
5	QPSK	12	13	21.27	21.24	21.31		
5	QPSK	25	0	21.33	21.23	21.30	22	0
5	16QAM	1	0	21.60	21.66	21.61		
5	16QAM	1	12	21.56	21.61	21.63		
5	16QAM	1	24	21.49	21.45	21.71	22	0
5	16QAM	12	0	20.40	20.39	20.45		
5	16QAM	12	7	20.52	20.45	20.49		
5	16QAM	12	13	20.40	20.34	20.45	22	0
5	16QAM	25	0	20.41	20.38	20.40		
5	64QAM	1	0	20.53	20.55	20.60		
5	64QAM	1	12	20.58	20.40	20.67	22	0
5	64QAM	1	24	20.54	20.46	20.56		
5	64QAM	12	0	19.53	19.49	19.50		
5	64QAM	12	7	19.49	19.49	19.55	21	1
5	64QAM	12	13	19.48	19.40	19.52		
5	64QAM	25	0	19.43	19.42	19.40		



<LTE Band 14>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23330				
Frequency (MHz)				793				
10	QPSK	1	0		21.38		23	0
10	QPSK	1	25		21.23			
10	QPSK	1	49		21.13			
10	QPSK	25	0		21.36		23	0
10	QPSK	25	12		21.29			
10	QPSK	25	25		21.28			
10	QPSK	50	0		21.29		23	0
10	16QAM	1	0		21.55			
10	16QAM	1	25		21.52			
10	16QAM	1	49		21.41		22	1
10	16QAM	25	0		20.67			
10	16QAM	25	12		20.69			
10	16QAM	25	25		20.56		22	1
10	16QAM	50	0		20.68			
10	64QAM	1	0		20.87			
10	64QAM	1	25		20.79		22	1
10	64QAM	1	49		20.62			
10	64QAM	25	0		19.69			
10	64QAM	25	12		19.72		21	2
10	64QAM	25	25		19.61			
10	64QAM	50	0		19.67			
Channel				23305	23330	23355		
Frequency (MHz)				790.5	793	795.5		
5	QPSK	1	0	21.33	21.27	21.40	23	0
5	QPSK	1	12	21.33	21.34	21.27		
5	QPSK	1	24	21.25	21.21	21.30		
5	QPSK	12	0	21.36	21.33	21.45	23	0
5	QPSK	12	7	21.36	21.32	21.42		
5	QPSK	12	13	21.33	21.31	21.34		
5	QPSK	25	0	21.39	21.30	21.34	23	0
5	16QAM	1	0	21.66	21.55	21.73		
5	16QAM	1	12	21.64	21.64	21.63		
5	16QAM	1	24	21.60	21.52	21.65	22	1
5	16QAM	12	0	20.65	20.64	20.69		
5	16QAM	12	7	20.71	20.67	20.77		
5	16QAM	12	13	20.59	20.58	20.61	22	1
5	16QAM	25	0	20.65	20.60	20.70		
5	64QAM	1	0	20.84	20.82	20.91		
5	64QAM	1	12	20.72	20.66	20.77	22	1
5	64QAM	1	24	20.79	20.72	20.78		
5	64QAM	12	0	19.71	19.71	19.82		
5	64QAM	12	7	19.72	19.71	19.80	21	2
5	64QAM	12	13	19.69	19.71	19.77		
5	64QAM	25	0	19.70	19.68	19.70		



<LTE Band 17>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				23780	23790	23800		
Frequency (MHz)				709	710	711		
10	QPSK	1	0	21.53	21.62	21.51		
10	QPSK	1	25	21.49	21.49	21.46	22	0
10	QPSK	1	49	21.43	21.43	21.43		
10	QPSK	25	0	21.60	21.58	21.56		
10	QPSK	25	12	21.58	21.59	21.58	22	0
10	QPSK	25	25	21.56	21.57	21.54		
10	QPSK	50	0	21.53	21.55	21.55		
10	16QAM	1	0	21.34	21.36	21.43	22	0
10	16QAM	1	25	21.39	21.40	21.36		
10	16QAM	1	49	21.36	21.33	21.34		
10	16QAM	25	0	20.32	20.31	20.31	22	0
10	16QAM	25	12	20.33	20.30	20.31		
10	16QAM	25	25	20.28	20.25	20.25		
10	16QAM	50	0	20.30	20.30	20.29	22	0
10	64QAM	1	0	20.33	20.34	20.35		
10	64QAM	1	25	20.31	20.29	20.25		
10	64QAM	1	49	20.22	20.22	20.24	21	1
10	64QAM	25	0	19.33	19.30	19.30		
10	64QAM	25	12	19.31	19.31	19.29		
10	64QAM	25	25	19.27	19.24	19.24	21	1
10	64QAM	50	0	19.28	19.28	19.28		
Channel				23755	23790	23825		
Frequency (MHz)				706.5	710	713.5	22	0
5	QPSK	1	0	21.30	21.50	21.50		
5	QPSK	1	12	21.52	21.49	21.45		
5	QPSK	1	24	21.50	21.45	21.43	22	0
5	QPSK	12	0	21.32	21.53	21.34		
5	QPSK	12	7	21.37	21.36	21.54		
5	QPSK	12	13	21.34	21.52	21.49	22	0
5	QPSK	25	0	21.38	21.35	21.51		
5	16QAM	1	0	21.37	21.40	21.41		
5	16QAM	1	12	21.34	21.41	21.31	22	0
5	16QAM	1	24	21.33	21.36	21.31		
5	16QAM	12	0	20.31	20.27	20.23		
5	16QAM	12	7	20.32	20.27	20.22	22	0
5	16QAM	12	13	20.30	20.26	20.19		
5	16QAM	25	0	20.32	20.28	20.25		
5	64QAM	1	0	20.36	20.31	20.32	22	0
5	64QAM	1	12	20.35	20.27	20.24		
5	64QAM	1	24	20.35	20.25	20.26		
5	64QAM	12	0	19.32	19.22	19.19	21	1
5	64QAM	12	7	19.30	19.28	19.20		
5	64QAM	12	13	19.26	19.24	19.14		
5	64QAM	25	0	19.30	19.29	19.21		



<LTE Band 30>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				27710			16	0
Frequency (MHz)				2310				
10	QPSK	1	0		15.80		16	0
10	QPSK	1	25		15.68			
10	QPSK	1	49		15.69			
10	QPSK	25	0		15.55		16	0
10	QPSK	25	12		15.50			
10	QPSK	25	25		15.37			
10	QPSK	50	0		15.49		16	0
10	16QAM	1	0		15.79			
10	16QAM	1	25		15.75			
10	16QAM	1	49		15.64		16	0
10	16QAM	25	0		15.63			
10	16QAM	25	12		15.60			
10	16QAM	25	25		15.47		16	0
10	16QAM	50	0		15.57			
10	64QAM	1	0		15.74			
10	64QAM	1	25		15.68		16	0
10	64QAM	1	49		15.56			
10	64QAM	25	0		15.65			
10	64QAM	25	12		15.59		16	0
10	64QAM	25	25		15.49			
10	64QAM	50	0		15.55			
Channel				27685	27710	27735	16	0
Frequency (MHz)				2307.5	2310	2312.5		
5	QPSK	1	0	15.52	15.43	15.59	16	0
5	QPSK	1	12	15.39	15.45	15.46		
5	QPSK	1	24	15.44	15.39	15.42		
5	QPSK	12	0	15.48	15.53	15.56	16	0
5	QPSK	12	7	15.55	15.51	15.54		
5	QPSK	12	13	15.48	15.45	15.45		
5	QPSK	25	0	15.50	15.49	15.51	16	0
5	16QAM	1	0	15.70	15.76	15.71		
5	16QAM	1	12	15.67	15.79	15.74		
5	16QAM	1	24	15.78	15.69	15.76	16	0
5	16QAM	12	0	15.54	15.62	15.63		
5	16QAM	12	7	15.62	15.58	15.60		
5	16QAM	12	13	15.55	15.53	15.54	16	0
5	16QAM	25	0	15.60	15.55	15.58		
5	64QAM	1	0	15.73	15.65	15.70		
5	64QAM	1	12	15.66	15.68	15.70	16	0
5	64QAM	1	24	15.69	15.59	15.66		
5	64QAM	12	0	15.55	15.54	15.60		
5	64QAM	12	7	15.63	15.54	15.58	16	0
5	64QAM	12	13	15.54	15.49	15.53		
5	64QAM	25	0	15.59	15.53	15.59		



<LTE Band 66>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				132072	132322	132572		
Frequency (MHz)				1720	1745	1770		
20	QPSK	1	0	18.75	18.89	18.86	19.5	0
20	QPSK	1	49	18.56	18.60	18.65		
20	QPSK	1	99	18.64	18.60	18.69		
20	QPSK	50	0	18.78	18.85	18.83	19.5	0
20	QPSK	50	24	18.67	18.70	18.71		
20	QPSK	50	50	18.73	18.60	18.62		
20	QPSK	100	0	18.75	18.77	18.76		
20	16QAM	1	0	19.12	19.25	19.25	19.5	0
20	16QAM	1	49	18.84	18.81	19.09		
20	16QAM	1	99	18.82	18.85	18.86		
20	16QAM	50	0	18.83	18.92	18.88	19.5	0
20	16QAM	50	24	18.74	18.82	18.85		
20	16QAM	50	50	18.75	18.67	18.77		
20	16QAM	100	0	18.72	18.78	18.79		
20	64QAM	1	0	19.12	19.00	19.15	19.5	0
20	64QAM	1	49	18.89	18.85	18.95		
20	64QAM	1	99	18.88	18.86	18.87		
20	64QAM	50	0	18.93	18.88	18.92	19.5	0
20	64QAM	50	24	18.82	18.78	18.84		
20	64QAM	50	50	18.80	18.68	18.73		
20	64QAM	100	0	18.81	18.78	18.79		
Channel				132047	132322	132597	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1717.5	1745	1772.5		
15	QPSK	1	0	18.82	18.79	18.84	19.5	0
15	QPSK	1	37	18.64	18.62	18.76		
15	QPSK	1	74	18.60	18.58	18.62		
15	QPSK	36	0	18.79	18.79	18.78	19.5	0
15	QPSK	36	20	18.72	18.71	18.69		
15	QPSK	36	39	18.64	18.63	18.76		
15	QPSK	75	0	18.69	18.68	18.68		
15	16QAM	1	0	19.13	19.06	19.15	19.5	0
15	16QAM	1	37	18.94	18.84	19.06		
15	16QAM	1	74	18.82	18.71	18.97		
15	16QAM	36	0	18.83	18.88	18.86	19.5	0
15	16QAM	36	20	18.79	18.79	18.77		
15	16QAM	36	39	18.69	18.72	18.80		
15	16QAM	75	0	18.79	18.75	18.80		
15	64QAM	1	0	18.98	19.05	19.06	19.5	0
15	64QAM	1	37	18.88	18.82	18.95		
15	64QAM	1	74	18.81	18.83	18.81		
15	64QAM	36	0	18.95	18.84	18.92	19.5	0
15	64QAM	36	20	18.83	18.82	18.83		
15	64QAM	36	39	18.79	18.71	18.87		
15	64QAM	75	0	18.81	18.78	18.85		



Channel				132022	132322	132622	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1715	1745	1775		
10	QPSK	1	0	18.71	18.75	18.76	19.5	0
10	QPSK	1	25	18.63	18.63	18.72		
10	QPSK	1	49	18.66	18.57	18.60		
10	QPSK	25	0	18.66	18.73	18.69	19.5	0
10	QPSK	25	12	18.77	18.73	18.75		
10	QPSK	25	25	18.68	18.62	18.77		
10	QPSK	50	0	18.79	18.70	18.71	19.5	0
10	16QAM	1	0	18.97	19.19	19.18		
10	16QAM	1	25	18.89	18.94	19.01		
10	16QAM	1	49	18.87	18.81	19.01	19.5	0
10	16QAM	25	0	18.74	18.82	18.81		
10	16QAM	25	12	18.80	18.75	18.82		
10	16QAM	25	25	18.74	18.68	18.79	19.5	0
10	16QAM	50	0	18.78	18.81	18.73		
10	64QAM	1	0	18.98	19.08	19.00		
10	64QAM	1	25	18.82	18.90	18.90	19.5	0
10	64QAM	1	49	18.94	18.86	18.87		
10	64QAM	25	0	18.77	18.86	18.81		
10	64QAM	25	12	18.89	18.77	18.85	19.5	0
10	64QAM	25	25	18.84	18.71	18.80		
10	64QAM	50	0	18.88	18.77	18.77		
Channel				131997	132322	132647	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1712.5	1745	1777.5		
5	QPSK	1	0	18.66	18.70	18.76	19.5	0
5	QPSK	1	12	18.67	18.62	18.65		
5	QPSK	1	24	18.63	18.60	18.64		
5	QPSK	12	0	18.72	18.69	18.79	19.5	0
5	QPSK	12	7	18.66	18.70	18.76		
5	QPSK	12	13	18.64	18.66	18.73		
5	QPSK	25	0	18.61	18.64	18.75	19.5	0
5	16QAM	1	0	19.04	18.97	19.09		
5	16QAM	1	12	18.88	19.00	18.96		
5	16QAM	1	24	18.94	18.87	18.92	19.5	0
5	16QAM	12	0	18.77	18.76	18.85		
5	16QAM	12	7	18.76	18.75	18.80		
5	16QAM	12	13	18.73	18.74	18.74	19.5	0
5	16QAM	25	0	18.73	18.73	18.77		
5	64QAM	1	0	19.04	18.87	19.01		
5	64QAM	1	12	18.81	18.92	18.82	19.5	0
5	64QAM	1	24	18.75	18.82	18.94		
5	64QAM	12	0	18.80	18.82	18.89		
5	64QAM	12	7	18.81	18.83	18.85	19.5	0
5	64QAM	12	13	18.72	18.72	18.81		
5	64QAM	25	0	18.73	18.74	18.78		



Channel				131987	132322	132657	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1711.5	1745	1778.5		
3	QPSK	1	0	18.64	18.64	18.77	19.5	0
3	QPSK	1	8	18.62	18.65	18.68		
3	QPSK	1	14	18.60	18.60	18.71		
3	QPSK	8	0	18.67	18.69	18.74	19.5	0
3	QPSK	8	4	18.62	18.71	18.78		
3	QPSK	8	7	18.65	18.70	18.72		
3	QPSK	15	0	18.60	18.65	18.74		
3	16QAM	1	0	18.93	18.83	18.93	19.5	0
3	16QAM	1	8	18.86	18.89	19.06		
3	16QAM	1	14	18.73	18.79	18.82		
3	16QAM	8	0	18.77	18.81	18.80	19.5	0
3	16QAM	8	4	18.75	18.80	18.88		
3	16QAM	8	7	18.72	18.76	18.78		
3	16QAM	15	0	18.73	18.69	18.85		
3	64QAM	1	0	18.84	18.88	19.04	19.5	0
3	64QAM	1	8	18.83	18.86	18.87		
3	64QAM	1	14	18.79	18.92	18.90		
3	64QAM	8	0	18.81	18.79	18.82	19.5	0
3	64QAM	8	4	18.78	18.82	18.86		
3	64QAM	8	7	18.77	18.75	18.79		
3	64QAM	15	0	18.73	18.73	18.79		
Channel				131979	132322	132665	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				1710.7	1745	1779.3		
1.4	QPSK	1	0	18.47	18.48	18.48	19.5	0
1.4	QPSK	1	3	18.55	18.56	18.61		
1.4	QPSK	1	5	18.46	18.48	18.45		
1.4	QPSK	3	0	18.53	18.54	18.56		
1.4	QPSK	3	1	18.54	18.55	18.58		
1.4	QPSK	3	3	18.53	18.46	18.59		
1.4	QPSK	6	0	18.47	18.54	18.51	19.5	0
1.4	16QAM	1	0	18.76	18.83	18.69	19.5	0
1.4	16QAM	1	3	18.83	18.90	18.83		
1.4	16QAM	1	5	18.63	18.82	18.60		
1.4	16QAM	3	0	18.56	18.53	18.55		
1.4	16QAM	3	1	18.53	18.53	18.59		
1.4	16QAM	3	3	18.53	18.56	18.56		
1.4	16QAM	6	0	18.64	18.68	18.70	19.5	0
1.4	64QAM	1	0	18.77	18.66	18.83	19.5	0
1.4	64QAM	1	3	18.70	18.85	18.85		
1.4	64QAM	1	5	18.60	18.68	18.69		
1.4	64QAM	3	0	18.66	18.71	18.70		
1.4	64QAM	3	1	18.69	18.78	18.77		
1.4	64QAM	3	3	18.67	18.73	18.71		
1.4	64QAM	6	0	18.59	18.61	18.66	19.5	0



<LTE Carrier Aggregation combinations>

General Note:

1. This device supports carrier aggregation on uplink and downlink for inter and intra band. For the device supports combination bands and configurations are according to 3GPP and the combinations list as below table.
2. The gray color table is covered by other combinations and no need to verify power.
3. All permutations exist. No restrictions on Pcell & Scell combinations. Only LTE Band 29 is limited to Scell.

2CC Downlink Carrier Aggregation				3CC Downlink Carrier Aggregation			
Number	Combination	Restriction	Covered by Measurement Superset	Number	Combination	Restriction	Covered by Measurement Superset
1	CA_2A-2A			1	CA_2A-2A-4A		
2	CA_2A-4A			2	CA_2A-2A-5A		
3	CA_2A-5A			3	CA_2A-2A-12A		
4	CA_2A-7A			4	CA_2A-2A-14A		
5	CA_2A-12A			5	CA_2A-2A-66A		
6	CA_2A-14A			6	CA_2A-4A-4A		
7	CA_2A-17A			7	CA_2A-4A-5A		
8	CA_2A-29A			8	CA_2A-4A-7A		
9	CA_2A-30A			9	CA_2A-4A-12A		
10	CA_2A-66A			10	CA_2A-4A-29A		
11	CA_2C			11	CA_2A-4A-30A		
12	CA_4A-4A			12	CA_2A-5A-30A		
13	CA_4A-5A			13	CA_2A-5A-66A		
14	CA_4A-7A			14	CA_2A-7A-7A		
15	CA_4A-12A			15	CA_2A-7A-12A		
16	CA_4A-17A			16	CA_2A-7A-66A		
17	CA_4A-29A			17	CA_2A-12A-30A		
18	CA_4A-30A			18	CA_2A-12A-66A		
19	CA_5A-7A			19	CA_2A-12B		
20	CA_5A-30A			20	CA_2A-12B		
21	CA_5A-66A			21	CA_2A-14A-30A		
22	CA_5B			22	CA_2A-14A-66A		
23	CA_7A_66A			23	CA_2A-29A-30A		
24	CA_7A-7A			24	CA_2A-30A-66A		
25	CA_7A-12A			25	CA_2A-66A-66A		
26	CA_12A-30A			26	CA_2A-66C		
27	CA_12A-66A			27	CA_4A-4A-7A		
28	CA_12B			28	CA_4A-4A-12A		
29	CA_14A-30A			29	CA_4A-5A-30A		
30	CA_14A-66A			30	CA_4A-7A-7A		
31	CA_29A-30A			31	CA_4A-7A-12A		
32	CA_29A-66A			32	CA_4A-12A-30A		
33	CA_30A-66A			33	CA_4A-12B		
34	CA_66A-66A			34	CA_4A-29A-30A		
35	CA_66B			35	CA_5A-7A-7A		
36	CA_66C			36	CA_5A-30A-66A		
				37	CA_5A-66A-66A		
				38	CA_7A-66A-66A		
				39	CA_12A-30A-66A		
				40	CA_12A-66A-66A		
				41	CA_12A-66C		
				42	CA_14A-30A-66A		
				43	CA_14A-66A-66A		
				44	CA_30A-66A-66A		



4CC Downlink Carrier Aggregation				5CC Downlink Carrier Aggregation			
Number	Combination	Restriction	Covered by Measurement Superset	Number	Combination	Restriction	Covered by Measurement Superset
1	CA_2A-2A-5A-30A			1	CA_2A-5B-30A-66A		
2	CA_2A-2A-5A-66A			2	CA_2A-5B-66A-66A		
3	CA_2A-2A-12A-30A						
4	CA_2A-2A-12A-66A						
5	CA_2A-2A-12B						
6	CA_2A-2A-14A-66A						
7	CA_2A-2A-29A-30A						
8	CA_2A-2A-66A-66A						
9	CA_2A-2A-66C						
10	CA_2A-4A-4A-12A						
11	CA_2A-4A-5A-30A						
12	CA_2A-4A-7A_7A						
13	CA_2A-4A-7A-12A						
14	CA_2A-4A-7C						
15	CA_2A-4A-12A-30A						
16	CA_2A-4A-12B						
17	CA_2A-4A-29A-30A						
18	CA_2A-5A-30A-66A						
19	CA_2A-5A-66A-66A						
20	CA_2A-5B-30A						
21	CA_2A-5B-66A						
22	CA_2A-12A-30A-66A						
23	CA_2A-12A-66A-66A						
24	CA_2A-14A-30A-66A						
25	CA_2A-14A-66A-66A						
26	CA_2A-29A-30A-66A						
27	CA_2C-66A-66A						
28	CA_4A-4A-12A-30A						
29	CA_5B-30A-66A						
30	CA_5B-66A-66A						
31	CA_12A-30A-66A-66A						
32	CA_14A-30A-66A-66A						
33	CA_29A-30A-66A-66A						

<Power verification when LTE Carrier Aggregation Active>

General Note:

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vi. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

<Full Power Mode>

<Two Carrier power verification>

Configure	CA Configuration (BCS)	PCC							SCC				Full Power	
		LTE	BW	UL	UL	Mod.	UL#	UL	LTE	BW	DL	DL	With CA	Without CA
		Band	(MHz)	Freq.	Channel		RB	Offset	Band	(MHz)	Freq.	Channel	Tx. Power (dBm)	Tx. Power (dBm)
				(MHz)							(MHz)			
Inter-Band	CA_2A-17A	Band 2	10M	1905	19150	QPSK	1	25	Band 17	10M	740	5790	22.52	23.16
		Band 17	10M	710	23790	QPSK	1	0	Band 2	10M	1960	900	22.63	22.86
	CA_4A-17A	Band 4	10M	1750	20350	QPSK	1	0	Band 17	10M	740	5790	22.64	23.06
		Band 17	10M	710	23790	QPSK	1	0	Band 4	10M	2132.5	2175	22.67	22.86



<Three Carrier power verification>(two bands)

Configure		PCC							SCC1				SCC2				Power	
		LTE	BW	UL	UL	Mod.	UL#	UL	LTE	BW	DL	DL	LTE	BW	DL	DL	With CA	Without CA
		Band	(MHz)	Freq. (MHz)	Channel		RB	Offset	Band	(MHz)	Freq. (MHz)	Channel	Band	(MHz)	Freq. (MHz)	Channel	Tx. Power (dBm)	Tx. Power (dBm)
Inter-Band	CA_2A-2A-4A	2	20M	1900	19100	QPSK	1	0	2	5M	1932.5	625	4	20M	2132.5	2175	22.6	23.25
		4	20M	1745	20300	QPSK	1	0	2	20M	1960	900	2	5M	1987.5	1175	22.7	23.09
	CA_4A-4A-7A	4	20M	1745	20300	QPSK	1	0	4	5M	2112.5	1975	7	20M	2655	3100	22.56	23.09
		7	20M	2535	21100	QPSK	1	0	4	20M	2132.5	2175	4	5M	2152.5	2375	22.57	23.2
	CA_5A-7A-7A	5	10M	829	20450	QPSK	1	0	7	20M	2630	2850	7	20	2680	3350	22.97	22.99
		7	20M	2535	21100	QPSK	1	0	7	20M	2680	3350	5	10M	881.5	2525	22.51	23.2
CA_12A-66C	12	10M	707.5	23095	QPSK	1	49	66	20M	2155	66886	66	20M	2174.8	67084	22.4	22.97	
	66	20M	1745	132322	QPSK	1	0	66	20M	2174.8	67084	12	10M	737.5	5095	22.4	23.19	

<Three Carrier power verification>(three bands)

Configure		PCC							SCC1				SCC2				Power	
		LTE	BW	UL	UL	Mod.	UL#	UL	LTE	BW	DL	DL	LTE	BW	DL	DL	With CA	Without CA
		Band	(MHz)	Freq. (MHz)	Channel		RB	Offset	Band	(MHz)	Freq. (MHz)	Channel	Band	(MHz)	Freq. (MHz)	Channel	Tx. Power (dBm)	Tx. Power (dBm)
Inter-Band	CA_2A-7A-66A	Band 2	20M	1900	19100	QPSK	1	0	Band 7	20M	2655	3100	Band 66	20M	2155	66886	23.28	23.25
		Band 7	20M	2535	21100	QPSK	1	0	Band 66	20M	2155	66886	Band 2	20M	1960	900	23.36	23.2
		Band 66	20M	1745	132322	QPSK	1	0	Band 2	20M	1960	900	Band 7	20M	2655	3100	22.87	23.19



< Four Carrier power verification>(three bands)

Configure		PCC						SCC1				SCC2				SCC3				Power	
		LTE	BW	UL	UL	UL#	UL	LTE	BW	DL	DL	LTE	BW	DL	DL	LTE	BW	DL	DL	With CA	Without CA
		Band	(MHz)	Freq.	Channel	Mod.	RB	Offset	Band	(MHz)	Freq.	Channel	Band	(MHz)	Freq.	Channel	Band	(MHz)	Freq.	Channel	Tx. Power
			(MHz)					(MHz)	(MHz)			(MHz)	(MHz)			(MHz)	(MHz)		(dBm)	(dBm)	
CA_2A-2A-5A-30A	2	20M	1900	19100	QPSK	1	0	2	5M	1932.5	625	5	10M	881.5	2525	30	10M	2355	9820	22.44	23.25
	5	10M	829	20450	QPSK	1	0	2	20M	1960	900	2	5M	1987.5	1175	30	10M	2355	9820	22.57	22.99
	30	10M	2310	27710	QPSK	1	0	2	20M	1960	900	2	5M	1987.5	1175	5	10M	881.5	2525	22.64	22.89
CA_2A-2A-5A-66A	2	20M	1900	19100	QPSK	1	0	2	5M	1932.5	625	5	10M	881.5	2525	66	20M	2155	66886	22.28	23.25
	5	10M	829	20450	QPSK	1	0	2	20M	1960	900	2	5M	1987.5	1175	66	20M	2155	66886	22.49	22.99
	66	20M	1745	132322	QPSK	1	0	2	20M	1960	900	2	5M	1987.5	1175	5	10M	881.5	2525	22.72	23.19
CA_2A-2A-12A-30A	2	20M	1900	19100	QPSK	1	0	2	5M	1932.5	625	12	10M	737.5	5095	30	10M	2355	9820	22.5	23.25
	12	10M	707.5	23095	QPSK	1	49	2	20M	1960	900	2	5M	1987.5	1175	30	10M	2355	9820	22.55	22.97
	30	10M	2310	27710	QPSK	1	0	2	20M	1960	900	2	5M	1987.5	1175	12	10M	737.5	5095	22.36	22.89
CA_2A-2A-12A-66A	2	20M	1900	19100	QPSK	1	0	2	5M	1932.5	625	12	10M	737.5	5095	66	20M	2155	66886	22.34	23.25
	12	10M	707.5	23095	QPSK	1	49	2	20M	1960	900	2	5M	1987.5	1175	66	20M	2155	66886	22.51	22.97
	66	20M	1745	132322	QPSK	1	0	2	20M	1960	900	2	5M	1987.5	1175	12	10M	737.5	5095	22.45	23.19
CA_2A-2A-12B	2	20M	1900	19100	QPSK	1	0	2	5M	1932.5	625	12	5M	732.8	5048	12	10M	740	5120	22.56	23.25
	12	5M	703.8	23058	QPSK	1	12	12	10M	741	5130	2	20M	1960	900	2	5M	1987.5	1175	22.34	22.85
CA_2A-2A-14A-66A	2	20M	1900	19100	QPSK	1	0	2	5M	1932.5	625	14	10M	763	5330	66	20M	2155	66886	22.35	23.25
	14	10M	793	23330	QPSK	1	0	2	20M	1960	900	2	5M	1987.5	1175	66	20M	2155	66886	22.6	22.79
	66	20M	1745	132322	QPSK	1	0	2	20M	1960	900	2	5M	1987.5	1175	14	10M	763	5330	22.18	23.19
CA_2A-2A-29A-30A	2	20M	1900	19100	QPSK	1	0	2	5M	1932.5	625	29	10M	722.5	9715	30	10M	2355	9820	22.54	23.25
	30	10M	2310	27710	QPSK	1	0	2	20M	1960	900	2	5M	1987.5	1175	29	10M	722.5	9715	22.45	22.89
CA_2A-2A-66A-66A	2	20M	1900	19100	QPSK	1	0	2	5M	1932.5	625	66	20M	2155	66886	66	5M	2197.5	67311	22.62	23.25
	66	20M	1745	132322	QPSK	1	0	66	5M	2197.5	67311	2	20M	1960	900	2	5M	1987.5	1175	22.5	23.19
CA_2A-2A-66C	2	20M	1900	19100	QPSK	1	0	2	5M	1932.5	625	66	20M	2155	66886	66	20M	2174.8	67084	22.35	23.25
	66	20M	1745	132322	QPSK	1	0	66	20M	2174.8	67084	2	20M	1960	900	2	5M	1987.5	1175	22.47	23.19
CA_2A-4A-4A-12A	2	20M	1900	19100	QPSK	1	0	4	20M	2132.5	2175	4	5M	2152.5	2375	12	10M	744.7	5167	22.56	23.25
	4	20M	1745	20300	QPSK	1	0	4	5M	2112.5	1975	2	20M	1960	900	12	10M	737.5	5095	22.54	23.09
	12	10M	707.5	23095	QPSK	1	49	4	20M	2132.5	2175	4	5M	2152.5	2375	2	20M	1960	900	22.48	22.97
CA_2A-4A-7A-7A	4	20M	1745	20300	QPSK	1	0	7	20M	2655	3100	7	5M	2687.5	3425	2	20M	1960	900	22.57	23.09
	2	20M	1900	19100	QPSK	1	0	7	20M	2655	3100	7	5M	2687.5	3425	4	20M	2132.5	2175	23.06	23.25
CA_2A-4A-7C	7	20M	2535	21100	QPSK	1	0	7	5M	2687.5	3425	4	20M	2132.5	2175	2	20M	1960	900	22.34	23.2
	4	20M	1745	20300	QPSK	1	0	7	20M	2655	3100	7	20M	2674.8	3298	2	20M	1960	900	22.23	23.09
CA_2A-4A-12B	2	20M	1900	19100	QPSK	1	0	7	20M	2655	3100	7	20M	2674.8	3298	4	20M	2132.5	2175	22.54	23.25
	7	20M	2535	21100	QPSK	1	0	7	20M	2674.8	3298	4	20M	2132.5	2175	2	20M	1960	900	22.54	23.2
	4	20M	1745	20300	QPSK	1	0	12	5M	732.8	5048	12	10M	740	5120	2	20M	1960	900	22.19	23.09
CA_2A-12A-66A-66A	2	20M	1900	19100	QPSK	1	0	12	5M	732.8	5048	12	10M	740	5120	4	20M	2132.5	2175	22.19	23.25
	12	5M	703.8	23058	QPSK	1	12	12	10M	741	5130	4	20M	2132.5	2175	2	20M	1960	900	22.25	22.85
	12	10M	707.5	23095	QPSK	1	49	66	20M	2155	66886	66	5M	2197.5	67311	2	20M	1960	900	22.67	22.97
CA_2A-14A-66A-66A	2	20M	1900	19100	QPSK	1	0	66	20M	2155	66886	66	5M	2197.5	67311	12	10M	737.5	5095	22.52	23.25
	66	20M	1745	132322	QPSK	1	0	66	5M	2197.5	67311	12	10M	744.7	5167	2	20M	1960	900	22.22	23.19
	14	10M	793	23330	QPSK	1	0	66	20M	2155	66886	66	5M	2197.5	67311	2	20M	1960	900	22.7	22.79
CA_2C-66A-66A	2	20M	1900	19100	QPSK	1	0	66	20M	2155	66886	66	5M	2197.5	67311	14	10M	763	5330	22.16	23.25
	66	20M	1745	132322	QPSK	1	0	66	5M	2197.5	67311	14	10M	763	5330	2	20M	1960	900	22.79	23.19



	CA_4A-4A-12A-30A	66	20M	1745	132322	QPSK	1	0	66	5M	2197.5	67311	2	20M	1960	900	2	20M	1979.8	1098	22.76	23.19
		4	20M	1745	20300	QPSK	1	0	4	5M	2112.5	1975	12	10M	737.5	5095	30	10M	2355	9820	22.65	23.09
		12	10M	707.5	23095	QPSK	1	49	4	20M	2132.5	2175	4	5M	2152.5	2375	30	10M	2355	9820	22.42	22.97
		30	10M	2310	27710	QPSK	1	0	4	20M	2132.5	2175	4	5M	2152.5	2375	12	10M	737.5	5095	22.33	22.89
	CA_12A-30A-66A-66A	66	20M	1745	132322	QPSK	1	0	66	5M	2197.5	67311	12	10M	737.5	5095	30	10M	2355	9820	22.67	23.19
		12	10M	707.5	23095	QPSK	1	49	66	20M	2155	66886	66	5M	2197.5	67311	30	10M	2355	9820	22.43	22.97
		30	10M	2310	27710	QPSK	1	0	66	20M	2155	66886	66	5M	2197.5	67311	12	10M	737.5	5095	22.87	22.89
	CA_14A-30A-66A-66A	66	20M	1745	132322	QPSK	1	0	66	5M	2197.5	67311	14	10M	763	5330	30	10M	2355	9820	22.53	23.19
		14	10M	793	23330	QPSK	1	0	66	20M	2155	66886	66	5M	2197.5	67311	30	10M	2355	9820	22.77	22.79
		30	10M	2310	27710	QPSK	1	0	66	20M	2155	66886	66	5M	2197.5	67311	14	10M	763	5330	22.83	22.89
	CA_29A-30A-66A-66A	66	20M	1745	132322	QPSK	1	0	66	5M	2197.5	67311	29	10M	722.5	9715	30	10M	2355	9820	22.7	23.19
		30	10M	2310	27710	QPSK	1	0	66	20M	2155	66886	66	5M	2197.5	67311	29	10M	722.5	9715	22.45	22.89

< Four Carrier power verification > (four bands)

Configure	PCC										SCC1				SCC2				SCC3				Power	
	LTE	BW	UL	UL	Mod.	UL#	UL	LTE	BW	DL	DL	LTE	BW	DL	DL	LTE	BW	DL	DL	With CA	Without CA			
	Band	(MHz)	Freq. (MHz)	Channel		RB	RB Offset	Band	(MHz)	Freq. (MHz)	Channel	Band	(MHz)	Freq. (MHz)	Channel	Band	(MHz)	Freq. (MHz)	Channel	Tx. Power (dBm)	Tx. Power (dBm)			
Inter-Band	CA_2A-4A-5A-30A	2	20M	1900	19100	QPSK	1	0	4	20M	2132.5	2175	5	10M	881.5	2525	30	10M	2355	9820	22.78	23.25		
		4	20M	1745	20300	QPSK	1	0	5	10M	881.5	2525	2	20M	1960	900	30	10M	2355	9820	22.55	23.09		
		5	10M	829	20450	QPSK	1	0	2	20M	1960	900	4	20M	2132.5	2175	30	10M	2355	9820	22.48	22.99		
		30	10M	2310	27710	QPSK	1	0	2	20M	1960	900	4	20M	2132.5	2175	5	10M	881.5	2525	22.78	22.89		
	CA_2A-4A-7A-12A	2	20M	1900	19100	QPSK	1	0	4	20M	2132.5	2175	7	20M	2655	3100	12	10M	737.5	5095	22.55	23.25		
		4	20M	1745	20300	QPSK	1	0	7	20M	2655	3100	2	20M	1960	900	12	10M	737.5	5095	22.49	23.09		
		7	20M	2535	21100	QPSK	1	0	2	20M	1960	900	4	20M	2132.5	2175	12	10M	737.5	5095	22.58	23.2		
	CA_2A-4A-12A-30A	12	10M	707.5	23095	QPSK	1	49	2	20M	1960	900	4	20M	2132.5	2175	7	20M	2655	3100	22.77	22.97		
		2	20M	1900	19100	QPSK	1	0	4	20M	2132.5	2175	12	10M	737.5	5095	30	10M	2355	9820	22.73	23.25		
		4	20M	1745	20300	QPSK	1	0	12	10M	737.5	5095	2	20M	1960	900	30	10M	2355	9820	22.45	23.09		
		12	10M	707.5	23095	QPSK	1	49	2	20M	1960	900	4	20M	2132.5	2175	30	10M	2355	9820	22.71	22.97		
	CA_2A-4A-29A-30A	30	10M	2310	27710	QPSK	1	0	2	20M	1960	900	4	20M	2132.5	2175	12	10M	737.5	5095	22.79	22.89		
		2	20M	1900	19100	QPSK	1	0	4	20M	2132.5	2175	30	10M	2355	9820	29	10M	722.5	9715	22.46	23.25		
		4	20M	1745	20300	QPSK	1	0	30	10M	2355	9820	2	20M	1960	900	29	10M	722.5	9715	22.31	23.09		
	CA_2A-12A-30A-66A	30	10M	2310	27710	QPSK	1	0	2	20M	1960	900	4	20M	2132.5	2175	29	10M	722.5	9715	22.39	22.89		
		2	20M	1900	19100	QPSK	1	0	66	20M	2155	66886	12	10M	737.5	5095	30	10M	2355	9820	22.53	23.25		
		66	20M	1745	132322	QPSK	1	0	12	10M	737.5	5095	2	20M	1960	900	30	10M	2355	9820	22.31	23.19		
		12	10M	707.5	23095	QPSK	1	49	2	20M	1960	900	66	20M	2155	66886	30	10M	2355	9820	22.76	22.97		
	CA_2A-14A-30A-66A	30	10M	2310	27710	QPSK	1	0	2	20M	1960	900	66	20M	2155	66886	12	10M	737.5	5095	22.62	22.89		
		2	20M	1900	19100	QPSK	1	0	66	20M	2155	66886	14	10M	763	5330	30	10M	2355	9820	22.53	23.25		
		66	20M	1745	132322	QPSK	1	0	14	10M	763	5330	2	20M	1960	900	30	10M	2355	9820	22.31	23.19		
		14	10M	793	23330	QPSK	1	0	2	20M	1960	900	66	20M	2155	66886	30	10M	2355	9820	22.74	22.79		
	CA_2A-29A-30A-66A	30	10M	2310	27710	QPSK	1	0	2	20M	1960	900	66	20M	2155	66886	14	10M	763	5330	22.55	22.89		
		2	20M	1900	19100	QPSK	1	0	66	20M	2155	66886	29	10M	722.5	9715	30	10M	2355	9820	22.8	23.25		
66		20M	1745	132322	QPSK	1	0	29	10M	722.5	9715	2	20M	1960	900	30	10M	2355	9820	22.36	23.19			
	CA_2A-29A-30A-66A	30	10M	2310	27710	QPSK	1	0	2	20M	1960	900	66	20M	2155	66886	29	10M	722.5	9715	22.78	22.89		



< Five Carrier power verification >

Configure		PCC						SCC1				SCC2				SCC3				SCC4				Power		
		LTE	BW	UL	UL	UL#	UL	LTE	BW	DL	DL	LTE	BW	DL	DL	LTE	BW	DL	DL	LTE	BW	DL	DL	With CA	Without CA	
		Band (MHz)	Band (MHz)	Freq. (MHz)	Channel	Mod.	RB	RB Offset	Band (MHz)	Band (MHz)	Freq. (MHz)	Channel	Band (MHz)	Band (MHz)	Freq. (MHz)	Channel	Band (MHz)	Band (MHz)	Freq. (MHz)	Channel	Band (MHz)	Band (MHz)	Freq. (MHz)	Channel	Tx. Power (dBm)	Tx. Power (dBm)
Inter-Band	CA_2A-5B-30A-66A	2	20M	1900	19100	QPSK	1	0	5	5M	876.8	2478	5	10M	884	2550	30	10M	2355	9820	66	10M	2155	66886	23.05	23.25
		5	5M	826.8	20428	QPSK	1	0	5	10M	879	2500	66	20M	2155	66886	30	10M	2355	9820	2	20M	1960	900	22.89	22.99
		66	20M	1745	132322	QPSK	1	0	5	5M	876.8	2478	5	10M	884	2550	30	10M	2355	9820	2	20M	1960	900	22.96	23.19
		30	10M	2310	27710	QPSK	1	0	5	5M	876.8	2478	5	10M	884	2550	66	20M	2155	66886	2	20M	1960	900	22.56	22.89
	CA_2A-5B-66A-66A	2	20M	1900	19100	QPSK	1	0	5	5M	876.8	2478	5	10M	884	2550	66	20M	2155	66886	66	5M	2198	67311	23.05	23.25
		5	5M	826.8	20428	QPSK	1	0	5	10M	879	2500	66	20M	2155	66886	66	5M	2197.5	67311	2	20M	1960	900	22.77	22.99
		66	20M	1745	132322	QPSK	1	0	66	5M	2197.5	67311	5	5M	876.8	2478	5	10M	884	2550	2	20M	1960	900	22.16	23.19

<Reduced Power for P-Sensor On>

<Two Carrier power verification>

Configure	CA List	PCC							SCC				Power	
		LTE	BW	UL	UL	Mod.	UL#	UL	LTE	BW	DL	DL	With CA	Without CA
		Band	(MHz)	Freq.	Channel		RB	RB	Band	(MHz)	Freq.	Channel	Tx. Power	Tx. Power
				(MHz)				Offset			(MHz)		(dBm)	(dBm)
Inter-Band	CA_2A-17A	2	10M	1905	19150	64QAM	1	0	17	10M	740	5790	19.50	19.97
		17	10M	710	23790	QPSK	1	0	2	10M	1960	900	21.44	21.62
	CA_4A-17A	4	10M	1732.5	20175	64QAM	1	49	17	10M	740	5790	18.56	18.96
		17	10M	710	23790	QPSK	1	0	4	10M	2132.5	2175	21.31	21.62

<Three Carrier power verification>(two bands)

Configure		PCC							SCC1				SCC2				Power	
		LTE	BW	UL	UL	Mod.	UL#	UL	LTE	BW	DL	DL	LTE	BW	DL	DL	With CA	Without CA
		Band	(MHz)	Freq.	Channel		RB	RB	Band	(MHz)	Freq.	Channel	Band	(MHz)	Freq.	Channel	Tx. Power	Tx. Power
				(MHz)				Offset			(MHz)				(MHz)		(dBm)	(dBm)
Inter-Band	CA_2A-2A-4A	2	20M	1900	19100	16QAM	1	49	2	5M	1932.5	625	4	20M	2132.5	2175	19.46	19.88
		4	20M	1745	20300	64QAM	1	0	2	20M	1960	900	2	5M	1987.5	1175	18.7	18.98
	CA_4A-4A-7A	4	20M	1745	20300	64QAM	1	0	4	5M	2112.5	1975	7	20M	2655	3100	19.66	18.98
		7	20M	2535	21100	QPSK	1	0	4	20M	2132.5	2175	4	5M	2152.5	2375	13.3	13.41
	CA_5A-7A-7A	5	10M	829	20450	16QAM	1	0	7	20M	2630	2850	7	20	2680	3350	20.12	20.69
		7	20M	2535	21100	QPSK	1	0	7	20M	2680	3350	5	10M	881.5	2525	13.14	13.41
	CA_12A-66C	12	10M	707.5	23095	16QAM	1	0	66	20M	2155	66886	66	20M	2174.8	67084	21.33	21.83
		66	20M	1745	132322	16QAM	1	0	66	20M	2174.8	67084	12	10M	737.5	5095	19.17	19.26

<Three Carrier power verification>(three bands)

Configure		PCC							SCC1				SCC2				Power	
		LTE	BW	UL	UL	Mod.	UL#	UL	LTE	BW	DL	DL	LTE	BW	DL	DL	With CA	Without CA
		Band	(MHz)	Freq.	Channel		RB	RB	Band	(MHz)	Freq.	Channel	Band	(MHz)	Freq.	Channel	Tx. Power	Tx. Power
				(MHz)				Offset			(MHz)				(MHz)		(dBm)	(dBm)
Inter-Band	CA_2A-7A-66A	2	20M	1900	19100	16QAM	1	49	7	20M	2655	3100	66	20M	2155	66886	19.12	19.88
		7	20M	2535	21100	QPSK	1	0	66	20M	2155	66886	2	20M	1960	900	13.22	13.41
		66	20M	1745	132322	16QAM	1	0	2	20M	1960	900	7	20M	2655	3100	19.03	19.25



< Four Carrier power verification > (three bands)

Configure	PCC								SCC1				SCC2				SCC3				Power	
	LTE	BW	UL	UL	Mod.	UL#	UL	LTE	BW	DL	DL	LTE	BW	DL	DL	LTE	BW	DL	DL	With CA	Without CA	
	Band	(MHz)	Freq.	Channel		RB	RB	Band	(MHz)	Freq.	Channel	Band	(MHz)	Freq.	Channel	Band	(MHz)	Freq.	Channel	Tx. Power	Tx. Power	
		(MHz)				Offset			(MHz)					(MHz)			(MHz)			(dBm)	(dBm)	
CA_2A-2A-5A-30A	2	20M	1900	19100	16QAM	1	49	2	5M	1932.5	625	5	10M	881.5	2525	30	10M	2355	9820	19.36	19.88	
	5	10M	829	20450	16QAM	1	0	2	20M	1960	900	2	5M	1987.5	1175	30	10M	2355	9820	20.42	20.69	
	30	10M	2310	27710	QPSK	1	0	2	20M	1960	900	2	5M	1987.5	1175	5	10M	881.5	2525	15.39	15.8	
CA_2A-2A-5A-66A	2	20M	1900	19100	16QAM	1	49	2	5M	1932.5	625	5	10M	881.5	2525	66	20M	2155	66886	19.52	19.88	
	5	10M	829	20450	16QAM	1	0	2	20M	1960	900	2	5M	1987.5	1175	66	20M	2155	66886	20.42	20.69	
	66	20M	1745	132322	16QAM	1	0	2	20M	1960	900	2	5M	1987.5	1175	5	10M	881.5	2525	18.92	19.25	
CA_2A-2A-12A-30A	2	20M	1900	19100	16QAM	1	49	2	5M	1932.5	625	12	10M	737.5	5095	30	10M	2355	9820	19.55	19.88	
	12	10M	707.5	23095	QPSK	1	0	2	20M	1960	900	2	5M	1987.5	1175	30	10M	2355	9820	21.49	21.83	
	30	10M	2310	27710	QPSK	1	0	2	20M	1960	900	2	5M	1987.5	1175	12	10M	737.5	5095	15.38	15.8	
CA_2A-2A-12A-66A	2	20M	1900	19100	16QAM	1	49	2	5M	1932.5	625	12	10M	737.5	5095	66	20M	2155	66886	18.5	19.88	
	12	10M	707.5	23095	16QAM	1	0	2	20M	1960	900	2	5M	1987.5	1175	66	20M	2155	66886	21.42	21.83	
	66	20M	1745	132322	16QAM	1	0	2	20M	1960	900	2	5M	1987.5	1175	12	10M	737.5	5095	19	19.25	
CA_2A-2A-12B	2	20M	1900	19100	16QAM	1	0	Band 2	5M	1932.5	625	12	5M	732.8	5048	12	10M	740	5120	19.62	19.88	
	12	5M	703.8	23058	16QAM	1	0	Band 12	10M	741	5130	2	20M	1960	900	2	5M	1987.5	1175	21.32	21.75	
CA_2A-2A-14A-66A	2	20M	1900	19100	16QAM	1	49	2	5M	1932.5	625	14	10M	763	5330	66	20M	2155	66886	19.56	19.88	
	14	10M	793	23330	16QAM	1	0	2	20M	1960	900	2	5M	1987.5	1175	66	20M	2155	66886	21.05	21.55	
	66	20M	1745	132322	16QAM	1	0	2	20M	1960	900	2	5M	1987.5	1175	14	10M	763	5330	18.92	19.25	
CA_2A-2A-29A-30A	2	20M	1900	19100	16QAM	1	49	2	5M	1932.5	625	29	10M	722.5	9715	30	10M	2355	9820	19.65	19.88	
	30	10M	2310	27710	QPSK	1	0	2	20M	1960	900	2	5M	1987.5	1175	29	10M	722.5	9715	15.73	15.8	
CA_2A-2A-66A-66A	2	20M	1900	19100	16QAM	1	49	2	5M	1932.5	625	66	20M	2155	66886	66	5M	2197.5	67311	19.8	19.88	
	66	20M	1745	132322	16QAM	1	0	66	5M	2197.5	67311	2	20M	1960	900	2	5M	1987.5	1175	18.72	19.25	
CA_2A-2A-66C	2	20M	1900	19100	16QAM	1	49	2	5M	1932.5	625	66	20M	2155	66886	66	20M	2174.8	67084	19.61	19.88	
	66	20M	1745	132322	16QAM	1	0	66	20M	2174.8	67084	2	20M	1960	900	2	5M	1987.5	1175	19.05	19.25	
CA_2A-4A-4A-12A	2	20M	1900	19100	16QAM	1	49	4	20M	2132.5	2175	4	5M	2152.5	2375	12	10M	744.7	5167	19.83	19.88	
	4	20M	1745	20300	64QAM	1	0	4	5M	2112.5	1975	2	20M	1960	900	12	10M	737.5	5095	18.9	18.98	
	12	10M	707.5	23095	16QAM	1	0	4	20M	2132.5	2175	4	5M	2152.5	2375	2	20M	1960	900	21.54	21.83	
CA_2A-4A-7A-7A	4	20M	1745	20300	64QAM	1	0	7	20M	2655	3100	7	5M	2687.5	3425	2	20M	1960	900	18.91	18.98	
	2	20M	1900	19100	16QAM	1	49	7	20M	2655	3100	7	5M	2687.5	3425	4	20M	2132.5	2175	19.84	19.88	
	7	20M	2535	21100	QPSK	1	0	7	5M	2687.5	3425	4	20M	2132.5	2175	2	20M	1960	900	13.42	13.41	
CA_2A-4A-7C	4	20M	1745	20300	64QAM	1	0	7	20M	2655	3100	7	20M	2674.8	3298	2	20M	1960	900	18.56	18.98	
	2	20M	1900	19100	16QAM	1	49	7	20M	2655	3100	7	20M	2674.8	3298	4	20M	2132.5	2175	19.87	19.88	
	7	20M	2535	21100	QPSK	1	0	7	20M	2674.8	3298	4	20M	2132.5	2175	2	20M	1960	900	13.16	13.41	
CA_2A-4A-12B	4	20M	1745	20300	64QAM	1	0	12	5M	732.8	5048	12	10M	740	5120	2	20M	1960	900	18.58	18.98	
	2	20M	1900	19100	16QAM	1	49	12	5M	732.8	5048	12	10M	740	5120	4	20M	2132.5	2175	19.47	19.88	
	12	5M	703.8	23058	16QAM	1	0	12	10M	741	5130	4	20M	2132.5	2175	2	20M	1960	900	21.38	21.75	
CA_2A-12A-66A-66A	12	10M	707.5	23095	16QAM	1	0	66	20M	2155	66886	66	5M	2197.5	67311	2	20M	1960	900	21.62	21.83	
	2	20M	1900	19100	16QAM	1	49	66	20M	2155	66886	66	5M	2197.5	67311	12	10M	737.5	5095	19.51	19.88	
	66	20M	1745	132322	16QAM	1	0	66	5M	2197.5	67311	12	10M	744.7	5167	2	20M	1960	900	19.21	19.25	
CA_2A-14A-66A-66A	14	10M	793	23330	16QAM	1	0	66	20M	2155	66886	66	5M	2197.5	67311	2	20M	1960	900	21.65	21.55	
	2	20M	1900	19100	16QAM	1	49	66	20M	2155	66886	66	5M	2197.5	67311	14	10M	763	5330	19.4	19.88	
	66	20M	1745	132322	16QAM	1	0	66	5M	2197.5	67311	14	10M	763	5330	2	20M	1960	900	18.95	19.25	



CA_2C-66A-66A	2	20M	1900	19100	16QAM	1	49	2	20M	1960.2	902	66	20M	2155	66886	66	5M	2197.5	67311	18.71	19.88
	66	20M	1745	132322	16QAM	1	0	66	5M	2197.5	67311	2	20M	1960	900	2	20M	1979.8	1098	18.73	19.25
CA_4A-4A-12A-30A	4	20M	1745	20300	64QAM	1	0	4	5M	2112.5	1975	12	10M	737.5	5095	30	10M	2355	9820	18.42	18.98
	12	10M	707.5	23095	16QAM	1	49	4	20M	2132.5	2175	4	5M	2152.5	2375	30	10M	2355	9820	21.58	21.83
CA_12A-30A-66A-66A	30	10M	2310	27710	QPSK	1	0	4	20M	2132.5	2175	4	5M	2152.5	2375	12	10M	737.5	5095	15.17	15.8
	66	20M	1745	132322	16QAM	1	0	66	5M	2197.5	67311	12	10M	737.5	5095	30	10M	2355	9820	19.15	19.25
	12	10M	707.5	23095	16QAM	1	0	66	20M	2155	66886	66	5M	2197.5	67311	30	10M	2355	9820	21.88	21.83
CA_14A-30A-66A-66A	30	10M	2310	27710	QPSK	1	0	66	20M	2155	66886	66	5M	2197.5	67311	12	10M	737.5	5095	15.81	15.8
	66	20M	1745	132322	16QAM	1	0	66	5M	2197.5	67311	14	10M	763	5330	30	10M	2355	9820	19.17	19.25
	14	10M	793	23330	16QAM	1	0	66	20M	2155	66886	66	5M	2197.5	67311	30	10M	2355	9820	21.45	21.55
CA_29A-30A-66A-66A	30	10M	2310	27710	QPSK	1	0	66	20M	2155	66886	66	5M	2197.5	67311	14	10M	763	5330	15.8	15.8
	66	20M	1745	132322	16QAM	1	0	66	5M	2197.5	67311	29	10M	722.5	9715	30	10M	2355	9820	19.21	19.25
CA_29A-30A-66A-66A	30	10M	2310	27710	QPSK	1	0	66	20M	2155	66886	66	5M	2197.5	67311	29	10M	722.5	9715	15.45	15.8

< Four Carrier power verification>(four bands)


Configure	PCC								SCC1				SCC2				SCC3				Power		
	LTE	BW	UL	UL	Mod.	UL#	UL	RB	Offset	LTE	BW	DL	DL	LTE	BW	DL	DL	LTE	BW	DL	DL	With CA	Without CA
	Band	(MHz)	Freq. (MHz)	Channel		RB	Band			(MHz)	Freq. (MHz)	Channel	Band	(MHz)	Freq. (MHz)	Channel	Band	(MHz)	Freq. (MHz)	Channel	Tx. Power (dBm)	Tx. Power (dBm)	
Inter-Band	CA_2A-4A-5A-30A	2	20M	1900	19100	16QAM	1	49	4	20M	2132.5	2175	5	10M	881.5	2525	30	10M	2355	9820	19.35	19.88	
		4	20M	1745	20300	64QAM	1	0	5	10M	881.5	2525	2	20M	1960	900	30	10M	2355	9820	18.61	18.98	
		5	10M	829	20450	16QAM	1	0	2	20M	1960	900	4	20M	2132.5	2175	30	10M	2355	9820	20.43	20.69	
		30	10M	2310	27710	QPSK	1	0	2	20M	1960	900	4	20M	2132.5	2175	5	10M	881.5	2525	15.23	15.8	
	CA_2A-4A-7A-12A	2	20M	1900	19100	16QAM	1	49	4	20M	2132.5	2175	7	20M	2655	3100	12	10M	737.5	5095	19.5	19.88	
		4	20M	1745	20300	64QAM	1	0	7	20M	2655	3100	2	20M	1960	900	12	10M	737.5	5095	18.72	18.98	
		7	20M	2535	21100	QPSK	1	0	2	20M	1960	900	4	20M	2132.5	2175	12	10M	737.5	5095	13.2	13.41	
		12	10M	707.5	23095	16QAM	1	0	2	20M	1960	900	4	20M	2132.5	2175	7	20M	2655	3100	21.61	21.83	
	CA_2A-4A-12A-30A	2	20M	1900	19100	16QAM	1	49	4	20M	2132.5	2175	12	10M	737.5	5095	30	10M	2355	9820	19.23	19.88	
		4	20M	1745	20300	64QAM	1	0	12	10M	737.5	5095	2	20M	1960	900	30	10M	2355	9820	18.65	18.98	
		12	10M	707.5	23095	16QAM	1	0	2	20M	1960	900	4	20M	2132.5	2175	30	10M	2355	9820	21.67	21.83	
		30	10M	2310	27710	QPSK	1	0	2	20M	1960	900	4	20M	2132.5	2175	12	10M	737.5	5095	15.4	15.8	
CA_2A-4A-29A-30A	2	20M	1900	19100	16QAM	1	49	4	20M	2132.5	2175	30	10M	2355	9820	29	10M	722.5	9715	19.43	19.88		
	4	20M	1745	20300	64QAM	1	0	30	10M	2355	9820	2	20M	1960	900	29	10M	722.5	9715	18.81	18.98		
	30	10M	2310	27710	QPSK	1	0	2	20M	1960	900	4	20M	2132.5	2175	29	10M	722.5	9715	15.3	15.8		
	2	20M	1900	19100	16QAM	1	49	66	20M	2155	66886	12	10M	737.5	5095	30	10M	2355	9820	19.34	19.88		
CA_2A-12A-30A-66A	66	20M	1745	132322	16QAM	1	0	12	10M	737.5	5095	2	20M	1960	900	30	10M	2355	9820	19.17	19.25		
	12	10M	707.5	23095	16QAM	1	0	2	20M	1960	900	66	20M	2155	66886	30	10M	2355	9820	21.67	21.83		
	30	10M	2310	27710	QPSK	1	0	2	20M	1960	900	66	20M	2155	66886	12	10M	737.5	5095	15.43	15.8		
	2	20M	1900	19100	16QAM	1	49	66	20M	2155	66886	14	10M	763	5330	30	10M	2355	9820	19.43	19.88		
CA_2A-14A-30A-66A	66	20M	1745	132322	16QAM	1	0	14	10M	763	5330	2	20M	1960	900	30	10M	2355	9820	19.32	19.25		
	14	10M	793	23330	16QAM	1	0	2	20M	1960	900	66	20M	2155	66886	30	10M	2355	9820	21.35	21.55		
	30	10M	2310	27710	QPSK	1	0	2	20M	1960	900	66	20M	2155	66886	14	10M	763	5330	15.63	15.8		
	2	20M	1900	19100	16QAM	1	49	66	20M	2155	66886	29	10M	722.5	9715	30	10M	2355	9820	19.34	19.88		
CA_2A-29A-30A-66A	66	20M	1745	132322	16QAM	1	0	29	10M	722.5	9715	2	20M	1960	900	30	10M	2355	9820	19.08	19.25		
	30	10M	2310	27710	QPSK	1	0	2	20M	1960	900	66	20M	2155	66886	29	10M	722.5	9715	15.45	15.8		



< Five Carrier power verification >

Configure		PCC						SCC1				SCC2				SCC3				SCC4				Power		
		LTE	BW	UL	UL		UL#	UL	LTE	BW	DL	DL	LTE	BW	DL	DL	LTE	BW	DL	DL	LTE	BW	DL	DL	With CA	Without CA
		Band (MHz)	Freq. (MHz)	Channel	Mod.	RB	RB Offset	Band (MHz)	Freq. (MHz)	Channel	Band (MHz)	Freq. (MHz)	Channel	Band (MHz)	Freq. (MHz)	Channel	Band (MHz)	Freq. (MHz)	Channel	Tx. Power (dBm)	Tx. Power (dBm)					
Inter-Band	CA_2A-5B-30A-66A	2	20M	1900	19100	16QAM	1	49	5	5M	876.8	2478	5	10M	884	2550	30	10M	2355	9820	66	10M	2155	66886	19.82	19.88
		5	5M	826.8	20428	64QAM	1	0	5	10M	879	2500	66	20M	2155	66886	30	10M	2355	9820	2	20M	1960	900	20.35	20.69
		66	20M	1745	132322	16QAM	1	0	5	5M	876.8	2478	5	10M	884	2550	30	10M	2355	9820	2	20M	1960	900	18.9	19.25
	CA_2A-5B-66A-66A	30	10M	2310	27710	QPSK	1	0	5	5M	876.8	2478	5	10M	884	2550	66	20M	2155	66886	2	20M	1960	900	15.71	15.8
		2	20M	1900	19100	16QAM	1	49	5	5M	876.8	2478	5	10M	884	2550	66	20M	2155	66886	66	5M	2197.5	67311	19.72	19.88
		5	5M	826.8	20428	64QAM	1	0	5	10M	879	2500	66	20M	2155	66886	66	5M	2197.5	67311	2	20M	1960	900	20.45	20.69
		66	20M	1745	132322	16QAM	1	0	66	5M	2197.5	67311	5	5M	876.8	2478	5	10M	884	2550	2	20M	1960	900	19.14	19.25

14. Antenna Location

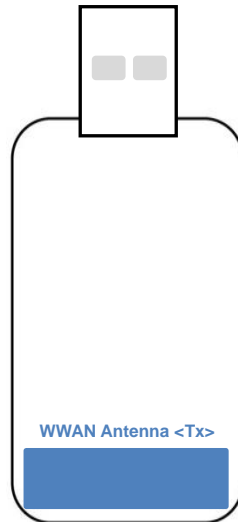

Front View

Antennas	DUT Test Position				
	Horizontal Up	Horizontal Down	Vertical Front	Vertical Back	Tip Mode
WWAN Main Antenna	Yes	Yes	Yes	Yes	Yes



15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. The device employs proximity sensor that detect the presence of the user's body also a finger or hand at the Horizontal Down or Up faces, Vertical Back or Front or Tip Side faces of the device. When Horizontal Down or Up faces, Vertical Back or Front or Tip Side faces of body condition is detected, all WWAN bands reduced power will be active.
5. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance was performed:
 - Horizontal Up & Down and Tip Side : 20 mm(manufacturer declared)
 - Vertical Front & Back: 15 mm(manufacturer declared)

**WCDMA Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSUPA, HSDPA, DC-HSDPA, HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B12 / B5 /17 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE band 4/17 SAR test was covered by Band 66/12; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.



15.1 Body SAR

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Horizontal Down	5	Reduced	4182	836.4	20.88	22.00	1.294	0.02	0.609	0.788
	WCDMA Band V	RMC 12.2Kbps	Horizontal Up	5	Reduced	4182	836.4	20.88	22.00	1.294	-0.02	0.907	1.174
	WCDMA Band V	RMC 12.2Kbps	Horizontal Up	5	Reduced	4132	826.4	20.80	22.00	1.318	-0.02	0.877	1.156
01	WCDMA Band V	RMC 12.2Kbps	Horizontal Up	5	Reduced	4233	846.6	20.84	22.00	1.306	0.03	0.911	1.190
	WCDMA Band V	RMC 12.2Kbps	Vertical Back	5	Reduced	4182	836.4	20.88	22.00	1.294	-0.19	0.305	0.395
	WCDMA Band V	RMC 12.2Kbps	Vertical Front	5	Reduced	4182	836.4	20.88	22.00	1.294	0.06	0.350	0.453
	WCDMA Band V	RMC 12.2Kbps	Tip Side	5	Reduced	4182	836.4	20.88	22.00	1.294	0.02	0.203	0.263
	WCDMA Band V	RMC 12.2Kbps	Horizontal Down	20	Full	4182	836.4	22.96	24.00	1.271	0.06	0.244	0.310
	WCDMA Band V	RMC 12.2Kbps	Horizontal Up	20	Full	4182	836.4	22.96	24.00	1.271	-0.01	0.453	0.576
	WCDMA Band V	RMC 12.2Kbps	Vertical Back	15	Full	4182	836.4	22.96	24.00	1.271	0.07	0.189	0.240
	WCDMA Band V	RMC 12.2Kbps	Vertical Front	15	Full	4182	836.4	22.96	24.00	1.271	-0.13	0.125	0.159
	WCDMA Band V	RMC 12.2Kbps	Tip Side	20	Full	4182	836.4	22.96	24.00	1.271	0.05	0.034	0.043
	WCDMA Band IV	RMC 12.2Kbps	Horizontal Down	5	Reduced	1312	1712.4	19.88	20.00	1.028	0.01	1.070	1.100
	WCDMA Band IV	RMC 12.2Kbps	Horizontal Down	5	Reduced	1413	1732.6	19.71	20.00	1.069	0.03	1.100	1.176
02	WCDMA Band IV	RMC 12.2Kbps	Horizontal Down	5	Reduced	1513	1752.6	19.82	20.00	1.042	0.02	1.130	1.178
	WCDMA Band IV	RMC 12.2Kbps	Horizontal Up	5	Reduced	1312	1712.4	19.88	20.00	1.028	0.03	1.030	1.059
	WCDMA Band IV	RMC 12.2Kbps	Horizontal Up	5	Reduced	1413	1732.6	19.71	20.00	1.069	0.01	1.070	1.144
	WCDMA Band IV	RMC 12.2Kbps	Horizontal Up	5	Reduced	1513	1752.6	19.82	20.00	1.042	-0.07	1.050	1.094
	WCDMA Band IV	RMC 12.2Kbps	Vertical Back	5	Reduced	1312	1712.4	19.88	20.00	1.028	0.06	0.572	0.588
	WCDMA Band IV	RMC 12.2Kbps	Vertical Front	5	Reduced	1312	1712.4	19.88	20.00	1.028	-0.1	0.507	0.521
	WCDMA Band IV	RMC 12.2Kbps	Tip Side	5	Reduced	1312	1712.4	19.88	20.00	1.028	0.03	0.387	0.398
	WCDMA Band IV	RMC 12.2Kbps	Horizontal Down	20	Full	1312	1712.4	23.25	24.00	1.189	-0.06	0.374	0.444
	WCDMA Band IV	RMC 12.2Kbps	Horizontal Up	20	Full	1312	1712.4	23.25	24.00	1.189	-0.1	0.712	0.846
	WCDMA Band IV	RMC 12.2Kbps	Horizontal Up	20	Full	1413	1732.6	23.07	24.00	1.239	-0.13	0.711	0.881
	WCDMA Band IV	RMC 12.2Kbps	Horizontal Up	20	Full	1513	1752.6	23.09	24.00	1.233	0.05	0.683	0.842
	WCDMA Band IV	RMC 12.2Kbps	Vertical Back	15	Full	1312	1712.4	23.25	24.00	1.189	0.01	0.326	0.387
	WCDMA Band IV	RMC 12.2Kbps	Vertical Front	15	Full	1312	1712.4	23.25	24.00	1.189	-0.01	0.351	0.417
	WCDMA Band IV	RMC 12.2Kbps	Tip Side	20	Full	1312	1712.4	23.25	24.00	1.189	0.05	0.069	0.082
	WCDMA Band II	RMC 12.2Kbps	Horizontal Down	5	Reduced	9538	1907.6	19.91	20.00	1.021	-0.03	1.080	1.103
	WCDMA Band II	RMC 12.2Kbps	Horizontal Down	5	Reduced	9262	1852.4	19.76	20.00	1.057	-0.08	1.010	1.067
03	WCDMA Band II	RMC 12.2Kbps	Horizontal Down	5	Reduced	9400	1880	19.88	20.00	1.028	-0.05	1.100	1.131
	WCDMA Band II	RMC 12.2Kbps	Horizontal Up	5	Reduced	9538	1907.6	19.91	20.00	1.021	0.02	1.050	1.072
	WCDMA Band II	RMC 12.2Kbps	Horizontal Up	5	Reduced	9262	1852.4	19.76	20.00	1.057	0.01	0.951	1.005
	WCDMA Band II	RMC 12.2Kbps	Horizontal Up	5	Reduced	9400	1880	19.88	20.00	1.028	0.05	1.020	1.049
	WCDMA Band II	RMC 12.2Kbps	Vertical Back	5	Reduced	9538	1907.6	19.91	20.00	1.021	0.1	0.420	0.429
	WCDMA Band II	RMC 12.2Kbps	Vertical Front	5	Reduced	9538	1907.6	19.91	20.00	1.021	-0.18	0.593	0.605
	WCDMA Band II	RMC 12.2Kbps	Tip Side	5	Reduced	9538	1907.6	19.91	20.00	1.021	0.03	0.496	0.506
	WCDMA Band II	RMC 12.2Kbps	Horizontal Down	20	Full	9538	1907.6	23.35	24.00	1.161	0.06	0.350	0.407
	WCDMA Band II	RMC 12.2Kbps	Horizontal Up	20	Full	9538	1907.6	23.35	24.00	1.161	-0.01	0.753	0.875
	WCDMA Band II	RMC 12.2Kbps	Horizontal Up	20	Full	9262	1852.4	23.26	24.00	1.186	0.05	0.727	0.862
	WCDMA Band II	RMC 12.2Kbps	Horizontal Up	20	Full	9400	1880	23.34	24.00	1.164	0.09	0.729	0.849
	WCDMA Band II	RMC 12.2Kbps	Vertical Back	15	Full	9538	1907.6	23.35	24.00	1.161	0.05	0.293	0.340
	WCDMA Band II	RMC 12.2Kbps	Vertical Front	15	Full	9538	1907.6	23.35	24.00	1.161	0.07	0.531	0.617
	WCDMA Band II	RMC 12.2Kbps	Tip Side	20	Full	9538	1907.6	23.35	24.00	1.161	-0.06	0.131	0.152



<LTE SAR>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 12	10M	QPSK	1	49	Horizontal Down	5	Reduced	23095	707.5	21.70	22.00	1.072	-0.08	0.635	0.680
	LTE Band 12	10M	QPSK	25	12	Horizontal Down	5	Reduced	23095	707.5	21.60	22.00	1.096	-0.03	0.664	0.728
04	LTE Band 12	10M	QPSK	1	49	Horizontal Up	5	Reduced	23095	707.5	21.70	22.00	1.072	0.07	1.110	1.189
	LTE Band 12	10M	QPSK	25	12	Horizontal Up	5	Reduced	23095	707.5	21.60	22.00	1.096	0.06	0.891	0.977
	LTE Band 12	10M	QPSK	50	0	Horizontal Up	5	Reduced	23095	707.5	21.50	22.00	1.122	0.12	0.888	0.996
	LTE Band 12	10M	QPSK	1	49	Vertical Back	5	Reduced	23095	707.5	21.70	22.00	1.072	-0.03	0.293	0.314
	LTE Band 12	10M	QPSK	25	12	Vertical Back	5	Reduced	23095	707.5	21.60	22.00	1.096	-0.06	0.302	0.331
	LTE Band 12	10M	QPSK	1	49	Vertical Front	5	Reduced	23095	707.5	21.70	22.00	1.072	-0.05	0.284	0.304
	LTE Band 12	10M	QPSK	25	12	Vertical Front	5	Reduced	23095	707.5	21.60	22.00	1.096	-0.03	0.264	0.289
	LTE Band 12	10M	QPSK	1	49	Tip Side	5	Reduced	23095	707.5	21.70	22.00	1.072	0.01	0.267	0.286
	LTE Band 12	10M	QPSK	25	12	Tip Side	5	Reduced	23095	707.5	21.60	22.00	1.096	0.01	0.219	0.240
	LTE Band 12	10M	QPSK	1	49	Horizontal Down	20	Full	23095	707.5	22.97	24.00	1.268	-0.09	0.608	0.771
	LTE Band 12	10M	QPSK	25	12	Horizontal Down	20	Full	23095	707.5	21.76	23.00	1.330	0.07	0.504	0.671
	LTE Band 12	10M	QPSK	1	49	Horizontal Up	20	Full	23095	707.5	22.97	24.00	1.268	-0.09	0.430	0.545
	LTE Band 12	10M	QPSK	25	12	Horizontal Up	20	Full	23095	707.5	21.76	23.00	1.330	-0.16	0.364	0.484
	LTE Band 12	10M	QPSK	1	49	Vertical Back	15	Full	23095	707.5	22.97	24.00	1.268	0.03	0.183	0.232
	LTE Band 12	10M	QPSK	25	12	Vertical Back	15	Full	23095	707.5	21.76	23.00	1.330	0.02	0.151	0.201
	LTE Band 12	10M	QPSK	1	49	Vertical Front	15	Full	23095	707.5	22.97	24.00	1.268	0.03	0.163	0.207
	LTE Band 12	10M	QPSK	25	12	Vertical Front	15	Full	23095	707.5	21.76	23.00	1.330	-0.07	0.135	0.180
	LTE Band 12	10M	QPSK	1	49	Tip Side	20	Full	23095	707.5	22.97	24.00	1.268	0.06	0.098	0.124
	LTE Band 12	10M	QPSK	25	12	Tip Side	20	Full	23095	707.5	21.76	23.00	1.330	-0.03	0.085	0.113
	LTE Band 13	10M	QPSK	1	0	Horizontal Down	5	Reduced	23230	782	21.38	22.00	1.153	-0.04	0.733	0.845
	LTE Band 13	10M	QPSK	25	0	Horizontal Down	5	Reduced	23230	782	21.36	22.00	1.159	-0.03	0.740	0.857
	LTE Band 13	10M	QPSK	50	0	Horizontal Down	5	Reduced	23230	782	21.24	22.00	1.191	-0.09	0.723	0.861
05	LTE Band 13	10M	QPSK	1	0	Horizontal Up	5	Reduced	23230	782	21.38	22.00	1.153	-0.16	1.030	1.188
	LTE Band 13	10M	QPSK	25	0	Horizontal Up	5	Reduced	23230	782	21.36	22.00	1.159	0.1	0.801	0.928
	LTE Band 13	10M	QPSK	50	0	Horizontal Up	5	Reduced	23230	782	21.24	22.00	1.191	0.05	0.888	1.058
	LTE Band 13	10M	QPSK	1	0	Vertical Back	5	Reduced	23230	782	21.38	22.00	1.153	0.01	0.639	0.737
	LTE Band 13	10M	QPSK	25	0	Vertical Back	5	Reduced	23230	782	21.36	22.00	1.159	0.01	0.541	0.627
	LTE Band 13	10M	QPSK	1	0	Vertical Front	5	Reduced	23230	782	21.38	22.00	1.153	0.02	0.399	0.460
	LTE Band 13	10M	QPSK	25	0	Vertical Front	5	Reduced	23230	782	21.36	22.00	1.159	-0.01	0.318	0.368
	LTE Band 13	10M	QPSK	1	0	Tip Side	5	Reduced	23230	782	21.38	22.00	1.153	0.06	0.214	0.247
	LTE Band 13	10M	QPSK	25	0	Tip Side	5	Reduced	23230	782	21.36	22.00	1.159	0.16	0.174	0.202
	LTE Band 13	10M	QPSK	1	0	Horizontal Down	20	Full	23230	782	23.09	24.00	1.233	-0.07	0.458	0.565
	LTE Band 13	10M	QPSK	25	0	Horizontal Down	20	Full	23230	782	22.06	23.00	1.242	0.02	0.390	0.484
	LTE Band 13	10M	QPSK	1	0	Horizontal Up	20	Full	23230	782	23.09	24.00	1.233	-0.08	0.520	0.641
	LTE Band 13	10M	QPSK	25	0	Horizontal Up	20	Full	23230	782	22.06	23.00	1.242	0.01	0.413	0.513
	LTE Band 13	10M	QPSK	1	0	Vertical Back	15	Full	23230	782	23.09	24.00	1.233	0.01	0.202	0.249
	LTE Band 13	10M	QPSK	25	0	Vertical Back	15	Full	23230	782	22.06	23.00	1.242	0.04	0.160	0.199
	LTE Band 13	10M	QPSK	1	0	Vertical Front	15	Full	23230	782	23.09	24.00	1.233	0.06	0.188	0.232
	LTE Band 13	10M	QPSK	25	0	Vertical Front	15	Full	23230	782	22.06	23.00	1.242	-0.04	0.149	0.185
	LTE Band 13	10M	QPSK	1	0	Tip Side	20	Full	23230	782	23.09	24.00	1.233	-0.01	0.048	0.059
	LTE Band 13	10M	QPSK	25	0	Tip Side	20	Full	23230	782	22.06	23.00	1.242	0.06	0.036	0.045



FCC SAR TEST REPORT

Report No. : FA942417

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 14	10M	QPSK	1	0	Horizontal Down	5	Reduced	23330	793	21.38	23.00	1.452	-0.02	0.744	1.080
	LTE Band 14	10M	QPSK	25	0	Horizontal Down	5	Reduced	23330	793	21.36	23.00	1.459	-0.07	0.733	1.069
	LTE Band 14	10M	QPSK	50	0	Horizontal Down	5	Reduced	23330	793	21.29	23.00	1.483	-0.05	0.731	1.084
	LTE Band 14	10M	QPSK	1	0	Horizontal Up	5	Reduced	23330	793	21.38	23.00	1.452	0.04	0.736	1.069
06	LTE Band 14	10M	QPSK	25	0	Horizontal Up	5	Reduced	23330	793	21.36	23.00	1.459	-0.09	0.753	1.098
	LTE Band 14	10M	QPSK	50	0	Horizontal Up	5	Reduced	23330	793	21.29	23.00	1.483	-0.04	0.630	0.934
	LTE Band 14	10M	QPSK	1	0	Vertical Back	5	Reduced	23330	793	21.38	23.00	1.452	0.01	0.610	0.886
	LTE Band 14	10M	QPSK	25	0	Vertical Back	5	Reduced	23330	793	21.36	23.00	1.459	-0.04	0.569	0.830
	LTE Band 14	10M	QPSK	50	0	Vertical Back	5	Reduced	23330	793	21.29	23.00	1.483	0.06	0.613	0.909
	LTE Band 14	10M	QPSK	1	0	Vertical Front	5	Reduced	23330	793	21.38	23.00	1.452	0.01	0.419	0.608
	LTE Band 14	10M	QPSK	25	0	Vertical Front	5	Reduced	23330	793	21.36	23.00	1.459	0.04	0.420	0.613
	LTE Band 14	10M	QPSK	1	0	Tip Side	5	Reduced	23330	793	21.38	23.00	1.452	-0.08	0.200	0.290
	LTE Band 14	10M	QPSK	25	0	Tip Side	5	Reduced	23330	793	21.36	23.00	1.459	0.02	0.181	0.264
	LTE Band 14	10M	QPSK	1	0	Horizontal Down	20	Full	23330	793	22.79	24.00	1.321	-0.02	0.465	0.614
	LTE Band 14	10M	QPSK	25	0	Horizontal Down	20	Full	23330	793	21.74	23.00	1.337	0.06	0.372	0.497
	LTE Band 14	10M	QPSK	1	0	Horizontal Up	20	Full	23330	793	22.79	24.00	1.321	0.09	0.460	0.608
	LTE Band 14	10M	QPSK	25	0	Horizontal Up	20	Full	23330	793	21.74	23.00	1.337	-0.03	0.355	0.474
	LTE Band 14	10M	QPSK	1	0	Vertical Back	15	Full	23330	793	22.79	24.00	1.321	0.02	0.190	0.251
	LTE Band 14	10M	QPSK	25	0	Vertical Back	15	Full	23330	793	21.74	23.00	1.337	0.02	0.152	0.203
	LTE Band 14	10M	QPSK	1	0	Vertical Front	15	Full	23330	793	22.79	24.00	1.321	0.07	0.172	0.227
	LTE Band 14	10M	QPSK	25	0	Vertical Front	15	Full	23330	793	21.74	23.00	1.337	-0.11	0.130	0.174
	LTE Band 14	10M	QPSK	1	0	Tip Side	20	Full	23330	793	22.79	24.00	1.321	-0.05	0.035	0.046
	LTE Band 14	10M	QPSK	25	0	Tip Side	20	Full	23330	793	21.74	23.00	1.337	-0.12	0.026	0.035
	LTE Band 5	10M	QPSK	1	0	Horizontal Down	5	Reduced	20525	836.5	20.50	22.00	1.413	0.05	0.608	0.859
	LTE Band 5	10M	QPSK	25	12	Horizontal Down	5	Reduced	20525	836.5	20.36	22.00	1.459	-0.08	0.720	1.050
	LTE Band 5	10M	QPSK	50	0	Horizontal Down	5	Reduced	20525	836.5	20.35	22.00	1.462	-0.09	0.602	0.880
07	LTE Band 5	10M	QPSK	1	0	Horizontal Up	5	Reduced	20525	836.5	20.50	22.00	1.413	-0.01	0.793	1.120
	LTE Band 5	10M	QPSK	25	12	Horizontal Up	5	Reduced	20525	836.5	20.36	22.00	1.459	0.09	0.759	1.107
	LTE Band 5	10M	QPSK	50	0	Horizontal Up	5	Reduced	20525	836.5	20.35	22.00	1.462	0.13	0.766	1.120
	LTE Band 5	10M	QPSK	1	0	Vertical Back	5	Reduced	20525	836.5	20.50	22.00	1.413	0.01	0.503	0.711
	LTE Band 5	10M	QPSK	25	12	Vertical Back	5	Reduced	20525	836.5	20.36	22.00	1.459	0.04	0.481	0.702
	LTE Band 5	10M	QPSK	1	0	Vertical Front	5	Reduced	20525	836.5	20.50	22.00	1.413	0.06	0.555	0.784
	LTE Band 5	10M	QPSK	25	12	Vertical Front	5	Reduced	20525	836.5	20.36	22.00	1.459	0.04	0.416	0.607
	LTE Band 5	10M	QPSK	1	0	Tip Side	5	Reduced	20525	836.5	20.50	22.00	1.413	0.01	0.218	0.308
	LTE Band 5	10M	QPSK	25	12	Tip Side	5	Reduced	20525	836.5	20.36	22.00	1.459	0.05	0.185	0.270
	LTE Band 5	10M	QPSK	1	0	Horizontal Down	20	Full	20525	836.5	22.77	24.00	1.327	-0.15	0.526	0.698
	LTE Band 5	10M	QPSK	25	12	Horizontal Down	20	Full	20525	836.5	21.80	23.00	1.318	0.04	0.417	0.550
	LTE Band 5	10M	QPSK	1	0	Horizontal Up	20	Full	20525	836.5	22.77	24.00	1.327	0.03	0.528	0.701
	LTE Band 5	10M	QPSK	25	12	Horizontal Up	20	Full	20525	836.5	21.80	23.00	1.318	0.04	0.437	0.576
	LTE Band 5	10M	QPSK	1	0	Vertical Back	15	Full	20525	836.5	22.77	24.00	1.327	0.03	0.223	0.296
	LTE Band 5	10M	QPSK	25	12	Vertical Back	15	Full	20525	836.5	21.80	23.00	1.318	0.02	0.174	0.229
	LTE Band 5	10M	QPSK	1	0	Vertical Front	15	Full	20525	836.5	22.77	24.00	1.327	-0.05	0.207	0.275
	LTE Band 5	10M	QPSK	25	12	Vertical Front	15	Full	20525	836.5	21.80	23.00	1.318	0.06	0.161	0.212
	LTE Band 5	10M	QPSK	1	0	Tip Side	20	Full	20525	836.5	22.77	24.00	1.327	-0.03	0.029	0.039
	LTE Band 5	10M	QPSK	25	12	Tip Side	20	Full	20525	836.5	21.80	23.00	1.318	-0.05	0.245	0.323



FCC SAR TEST REPORT

Report No. : FA942417

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 66	20M	QPSK	1	0	Horizontal Down	5	Reduced	132322	1745	18.89	19.50	1.151	0.09	0.914	1.052
	LTE Band 66	20M	QPSK	1	0	Horizontal Down	5	Reduced	132072	1720	18.75	19.50	1.189	0.08	0.832	0.989
	LTE Band 66	20M	QPSK	1	0	Horizontal Down	5	Reduced	132572	1770	18.86	19.50	1.159	0.06	0.970	1.124
	LTE Band 66	20M	QPSK	50	0	Horizontal Down	5	Reduced	132322	1745	18.85	19.50	1.161	0.09	0.943	1.095
	LTE Band 66	20M	QPSK	50	0	Horizontal Down	5	Reduced	132072	1720	18.78	19.50	1.180	0.02	0.857	1.012
	LTE Band 66	20M	QPSK	50	0	Horizontal Down	5	Reduced	132572	1770	18.83	19.50	1.167	-0.19	0.958	1.118
	LTE Band 66	20M	QPSK	100	0	Horizontal Down	5	Reduced	132322	1745	18.77	19.50	1.183	0.04	0.930	1.100
08	LTE Band 66	20M	QPSK	1	0	Horizontal Up	5	Reduced	132322	1745	18.89	19.50	1.151	0.05	0.994	1.144
	LTE Band 66	20M	QPSK	1	0	Horizontal Up	5	Reduced	132072	1720	18.75	19.50	1.189	0.03	0.816	0.970
	LTE Band 66	20M	QPSK	1	0	Horizontal Up	5	Reduced	132572	1770	18.86	19.50	1.159	0.05	0.961	1.114
	LTE Band 66	20M	QPSK	50	0	Horizontal Up	5	Reduced	132322	1745	18.85	19.50	1.161	-0.15	0.847	0.984
	LTE Band 66	20M	QPSK	50	0	Horizontal Up	5	Reduced	132072	1720	18.78	19.50	1.180	-0.04	0.781	0.922
	LTE Band 66	20M	QPSK	50	0	Horizontal Up	5	Reduced	132572	1770	18.83	19.50	1.167	-0.07	0.824	0.961
	LTE Band 66	20M	QPSK	100	0	Horizontal Up	5	Reduced	132322	1745	18.77	19.50	1.183	-0.08	0.794	0.939
	LTE Band 66	20M	QPSK	1	0	Vertical Back	5	Reduced	132322	1745	18.89	19.50	1.151	-0.03	0.365	0.420
	LTE Band 66	20M	QPSK	50	0	Vertical Back	5	Reduced	132322	1745	18.85	19.50	1.161	-0.09	0.395	0.459
	LTE Band 66	20M	QPSK	1	0	Vertical Front	5	Reduced	132322	1745	18.89	19.50	1.151	0.02	0.436	0.502
	LTE Band 66	20M	QPSK	50	0	Vertical Front	5	Reduced	132322	1745	18.85	19.50	1.161	0.03	0.447	0.519
	LTE Band 66	20M	QPSK	1	0	Tip Side	5	Reduced	132322	1745	18.89	19.50	1.151	0.012	0.354	0.407
	LTE Band 66	20M	QPSK	50	0	Tip Side	5	Reduced	132322	1745	18.85	19.50	1.161	0.03	0.369	0.429
	LTE Band 66	20M	QPSK	1	0	Horizontal Down	20	Full	132322	1745	23.19	24.00	1.205	0.11	0.351	0.423
	LTE Band 66	20M	QPSK	50	0	Horizontal Down	20	Full	132322	1745	22.19	23.00	1.205	-0.19	0.281	0.339
	LTE Band 66	20M	QPSK	1	0	Horizontal Up	20	Full	132322	1745	23.19	24.00	1.205	0.02	0.356	0.429
	LTE Band 66	20M	QPSK	50	0	Horizontal Up	20	Full	132322	1745	22.19	23.00	1.205	0.02	0.287	0.346
	LTE Band 66	20M	QPSK	1	0	Vertical Back	15	Full	132322	1745	23.19	24.00	1.205	0.12	0.275	0.331
	LTE Band 66	20M	QPSK	50	0	Vertical Back	15	Full	132322	1745	22.19	23.00	1.205	-0.16	0.214	0.258
	LTE Band 66	20M	QPSK	1	0	Vertical Front	15	Full	132322	1745	23.19	24.00	1.205	0.06	0.338	0.407
	LTE Band 66	20M	QPSK	50	0	Vertical Front	15	Full	132322	1745	22.19	23.00	1.205	0.01	0.273	0.329
	LTE Band 66	20M	QPSK	1	0	Tip Side	20	Full	132322	1745	23.19	24.00	1.205	0.09	0.063	0.076
	LTE Band 66	20M	QPSK	50	0	Tip Side	20	Full	132322	1745	22.19	23.00	1.205	0.03	0.059	0.071



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 2	20M	QPSK	1	0	Horizontal Down	5	Reduced	19100	1900	19.64	20.00	1.086	0.17	0.989	1.074
	LTE Band 2	20M	QPSK	1	0	Horizontal Down	5	Reduced	18900	1880	19.45	20.00	1.135	0.13	1.050	1.192
	LTE Band 2	20M	QPSK	1	0	Horizontal Down	5	Reduced	18700	1860	19.45	20.00	1.135	0.17	1.020	1.158
	LTE Band 2	20M	QPSK	50	24	Horizontal Down	5	Reduced	19100	1900	19.70	20.00	1.072	0.11	1.060	1.136
09	LTE Band 2	20M	QPSK	50	24	Horizontal Down	5	Reduced	18700	1860	19.40	20.00	1.148	0.09	1.040	1.194
	LTE Band 2	20M	QPSK	50	24	Horizontal Down	5	Reduced	18900	1880	19.36	20.00	1.159	-0.06	0.972	1.126
	LTE Band 2	20M	QPSK	100	0	Horizontal Down	5	Reduced	19100	1900	19.56	20.00	1.107	0.12	1.070	1.184
	LTE Band 2	20M	QPSK	1	0	Horizontal Up	5	Reduced	19100	1900	19.64	20.00	1.086	0.16	0.989	1.074
	LTE Band 2	20M	QPSK	1	0	Horizontal Up	5	Reduced	18900	1880	19.45	20.00	1.135	0.02	0.954	1.083
	LTE Band 2	20M	QPSK	1	0	Horizontal Up	5	Reduced	18700	1860	19.45	20.00	1.135	0.02	0.858	0.974
	LTE Band 2	20M	QPSK	50	24	Horizontal Up	5	Reduced	19100	1900	19.70	20.00	1.072	-0.1	0.947	1.015
	LTE Band 2	20M	QPSK	50	24	Horizontal Up	5	Reduced	18700	1860	19.40	20.00	1.148	0.03	0.870	0.999
	LTE Band 2	20M	QPSK	50	24	Horizontal Up	5	Reduced	18900	1880	19.36	20.00	1.159	0.13	0.850	0.985
	LTE Band 2	20M	QPSK	100	0	Horizontal Up	5	Reduced	19100	1900	19.56	20.00	1.107	-0.04	0.916	1.014
	LTE Band 2	20M	QPSK	1	0	Vertical Back	5	Reduced	19100	1900	19.64	20.00	1.086	0.01	0.472	0.513
	LTE Band 2	20M	QPSK	50	24	Vertical Back	5	Reduced	19100	1900	19.70	20.00	1.072	0.11	0.383	0.410
	LTE Band 2	20M	QPSK	1	0	Vertical Front	5	Reduced	19100	1900	19.64	20.00	1.086	0.05	0.623	0.677
	LTE Band 2	20M	QPSK	50	24	Vertical Front	5	Reduced	19100	1900	19.70	20.00	1.072	0.02	0.569	0.610
	LTE Band 2	20M	QPSK	1	0	Tip Side	5	Reduced	19100	1900	19.64	20.00	1.086	0.05	0.389	0.423
	LTE Band 2	20M	QPSK	50	24	Tip Side	5	Reduced	19100	1900	19.70	20.00	1.072	-0.05	0.480	0.514
	LTE Band 2	20M	QPSK	1	0	Horizontal Down	20	Full	19100	1900	23.25	24.00	1.189	-0.05	0.201	0.239
	LTE Band 2	20M	QPSK	50	24	Horizontal Down	20	Full	19100	1900	22.22	23.00	1.197	0.09	0.174	0.208
	LTE Band 2	20M	QPSK	1	0	Horizontal Up	20	Full	19100	1900	23.25	24.00	1.189	0.01	0.428	0.509
	LTE Band 2	20M	QPSK	50	24	Horizontal Up	20	Full	19100	1900	22.22	23.00	1.197	0.02	0.333	0.399
	LTE Band 2	20M	QPSK	1	0	Vertical Back	15	Full	19100	1900	23.25	24.00	1.189	-0.12	0.281	0.334
	LTE Band 2	20M	QPSK	50	24	Vertical Back	15	Full	19100	1900	22.22	23.00	1.197	0.15	0.209	0.250
	LTE Band 2	20M	QPSK	1	0	Vertical Front	15	Full	19100	1900	23.25	24.00	1.189	-0.08	0.527	0.626
	LTE Band 2	20M	QPSK	50	24	Vertical Front	15	Full	19100	1900	22.22	23.00	1.197	0.16	0.396	0.474
	LTE Band 2	20M	QPSK	1	0	Tip Side	20	Full	19100	1900	23.25	24.00	1.189	-0.03	0.140	0.166
	LTE Band 2	20M	QPSK	50	24	Tip Side	20	Full	19100	1900	22.22	23.00	1.197	-0.09	0.111	0.133



FCC SAR TEST REPORT

Report No. : FA942417

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 30	10M	QPSK	1	0	Horizontal Down	5	Reduced	27710	2310	15.80	16.00	1.047	-0.08	1.030	1.079
	LTE Band 30	10M	QPSK	25	0	Horizontal Down	5	Reduced	27710	2310	15.55	16.00	1.109	-0.02	1.050	1.165
10	LTE Band 30	10M	QPSK	50	0	Horizontal Down	5	Reduced	27710	2310	15.49	16.00	1.125	-0.09	1.040	1.170
	LTE Band 30	10M	QPSK	1	0	Horizontal Up	5	Reduced	27710	2310	15.80	16.00	1.047	0.08	0.516	0.540
	LTE Band 30	10M	QPSK	25	0	Horizontal Up	5	Reduced	27710	2310	15.55	16.00	1.109	0.01	0.514	0.570
	LTE Band 30	10M	QPSK	1	0	Vertical Back	5	Reduced	27710	2310	15.80	16.00	1.047	0.02	0.053	0.055
	LTE Band 30	10M	QPSK	25	0	Vertical Back	5	Reduced	27710	2310	15.55	16.00	1.109	0.06	0.052	0.058
	LTE Band 30	10M	QPSK	1	0	Vertical Front	5	Reduced	27710	2310	15.80	16.00	1.047	0.02	0.190	0.199
	LTE Band 30	10M	QPSK	25	0	Vertical Front	5	Reduced	27710	2310	15.55	16.00	1.109	0.06	0.183	0.203
	LTE Band 30	10M	QPSK	1	0	Tip Side	5	Reduced	27710	2310	15.80	16.00	1.047	0.05	0.564	0.591
	LTE Band 30	10M	QPSK	25	0	Tip Side	5	Reduced	27710	2310	15.55	16.00	1.109	0.09	0.568	0.630
	LTE Band 30	10M	QPSK	1	0	Horizontal Down	20	Full	27710	2310	22.89	24.00	1.291	0.03	0.516	0.666
	LTE Band 30	10M	QPSK	25	0	Horizontal Down	20	Full	27710	2310	21.32	23.00	1.472	0.01	0.409	0.602
	LTE Band 30	10M	QPSK	1	0	Horizontal Up	20	Full	27710	2310	22.89	24.00	1.291	0.06	0.671	0.866
	LTE Band 30	10M	QPSK	25	0	Horizontal Up	20	Full	27710	2310	21.32	23.00	1.472	-0.05	0.476	0.701
	LTE Band 30	10M	QPSK	50	0	Horizontal Up	20	Full	27710	2310	21.08	23.00	1.556	0.05	0.336	0.523
	LTE Band 30	10M	QPSK	1	0	Vertical Back	15	Full	27710	2310	22.89	24.00	1.291	0.01	0.366	0.473
	LTE Band 30	10M	QPSK	25	0	Vertical Back	15	Full	27710	2310	21.32	23.00	1.472	-0.12	0.281	0.414
	LTE Band 30	10M	QPSK	1	0	Vertical Front	15	Full	27710	2310	22.89	24.00	1.291	0.06	0.069	0.089
	LTE Band 30	10M	QPSK	25	0	Vertical Front	15	Full	27710	2310	21.32	23.00	1.472	0.01	0.056	0.083
	LTE Band 30	10M	QPSK	1	0	Tip Side	20	Full	27710	2310	22.89	24.00	1.291	0.07	0.350	0.452
	LTE Band 30	10M	QPSK	25	0	Tip Side	20	Full	27710	2310	21.32	23.00	1.472	0.05	0.273	0.402



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 7	20M	QPSK	1	0	Horizontal Down	5	Reduced	21100	2535	13.41	14.50	1.285	0.05	0.791	1.017
11	LTE Band 7	20M	QPSK	1	0	Horizontal Down	5	Reduced	20850	2510	13.09	14.50	1.384	0.01	0.779	1.078
	LTE Band 7	20M	QPSK	1	0	Horizontal Down	5	Reduced	21350	2560	13.34	14.50	1.306	0.06	0.763	0.997
	LTE Band 7	20M	QPSK	50	0	Horizontal Down	5	Reduced	21100	2535	13.26	14.50	1.330	0.1	0.773	1.028
	LTE Band 7	20M	QPSK	50	0	Horizontal Down	5	Reduced	20850	2510	13.11	14.50	1.377	0.18	0.745	1.026
	LTE Band 7	20M	QPSK	50	0	Horizontal Down	5	Reduced	21350	2560	13.16	14.50	1.361	0.16	0.725	0.987
	LTE Band 7	20M	QPSK	100	0	Horizontal Down	5	Reduced	21100	2535	13.16	14.50	1.361	0.02	0.757	1.031
	LTE Band 7	20M	QPSK	1	0	Horizontal Up	5	Reduced	21100	2535	13.41	14.50	1.285	-0.06	0.397	0.510
	LTE Band 7	20M	QPSK	50	0	Horizontal Up	5	Reduced	21100	2535	13.26	14.50	1.330	-0.09	0.382	0.508
	LTE Band 7	20M	QPSK	1	0	Vertical Back	5	Reduced	21100	2535	13.41	14.50	1.285	0.01	0.145	0.186
	LTE Band 7	20M	QPSK	50	0	Vertical Back	5	Reduced	21100	2535	13.26	14.50	1.330	0.01	0.147	0.196
	LTE Band 7	20M	QPSK	1	0	Vertical Front	5	Reduced	21100	2535	13.41	14.50	1.285	0.02	0.061	0.079
	LTE Band 7	20M	QPSK	50	0	Vertical Front	5	Reduced	21100	2535	13.26	14.50	1.330	0.04	0.059	0.078
	LTE Band 7	20M	QPSK	1	0	Tip Side	5	Reduced	21100	2535	13.41	14.50	1.285	0.01	0.681	0.875
	LTE Band 7	20M	QPSK	1	0	Tip Side	5	Reduced	21350	2560	13.09	14.50	1.384	0.01	0.744	1.029
	LTE Band 7	20M	QPSK	1	0	Tip Side	5	Reduced	20850	2510	13.34	14.50	1.306	-0.09	0.630	0.823
	LTE Band 7	20M	QPSK	50	0	Tip Side	5	Reduced	21100	2535	13.26	14.50	1.330	0.03	0.711	0.946
	LTE Band 7	20M	QPSK	50	0	Tip Side	5	Reduced	20850	2510	13.11	14.50	1.377	0.01	0.631	0.869
	LTE Band 7	20M	QPSK	50	0	Tip Side	5	Reduced	21350	2560	13.16	14.50	1.361	0.01	0.703	0.957
	LTE Band 7	20M	QPSK	100	0	Tip Side	5	Reduced	21350	2560	13.16	14.50	1.361	0.03	0.699	0.952
	LTE Band 7	20M	QPSK	1	0	Horizontal Down	20	Full	21100	2535	23.20	24.00	1.202	0.06	0.655	0.787
	LTE Band 7	20M	QPSK	50	0	Horizontal Down	20	Full	21100	2535	22.17	23.00	1.211	-0.05	0.547	0.662
	LTE Band 7	20M	QPSK	1	0	Horizontal Up	20	Full	21100	2535	23.20	24.00	1.202	-0.01	0.511	0.614
	LTE Band 7	20M	QPSK	50	0	Horizontal Up	20	Full	21100	2535	22.17	23.00	1.211	0.06	0.407	0.493
	LTE Band 7	20M	QPSK	1	0	Vertical Back	15	Full	21100	2535	23.20	24.00	1.202	0.03	0.262	0.315
	LTE Band 7	20M	QPSK	50	0	Vertical Back	15	Full	21100	2535	22.17	23.00	1.211	0.09	0.223	0.270
	LTE Band 7	20M	QPSK	1	0	Vertical Front	15	Full	21100	2535	23.20	24.00	1.202	-0.05	0.333	0.400
	LTE Band 7	20M	QPSK	50	0	Vertical Front	15	Full	21100	2535	22.17	23.00	1.211	0.05	0.275	0.333
	LTE Band 7	20M	QPSK	1	0	Tip Side	20	Full	21100	2535	23.20	24.00	1.202	-0.08	0.577	0.694
	LTE Band 7	20M	QPSK	50	0	Tip Side	20	Full	21100	2535	22.17	23.00	1.211	0.01	0.465	0.563

15.2 Repeated SAR Measurement

No.	Band	Mode	BW (MHz)	Modulation	RB Size	RB Offset	Test Position	Gap (mm)	Power Mode	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WCDMA Band V	RMC 12.2Kbps	-	-	-	-	Horizontal Up	5mm	Reduced	4233	846.6	20.84	22.00	1.306	0.03	0.911	1	1.190
2nd	WCDMA Band V	RMC 12.2Kbps	-	-	-	-	Horizontal Up	5mm	Reduced	4233	846.6	20.84	22.00	1.306	-0.09	0.899	1.013	1.174
1st	WCDMA Band IV	RMC 12.2Kbps	-	-	-	-	Horizontal Down	5mm	Reduced	1513	1752.6	19.82	20.00	1.042	0.02	1.130	1	1.178
2nd	WCDMA Band IV	RMC 12.2Kbps	-	-	-	-	Horizontal Down	5mm	Reduced	1513	1752.6	19.82	20.00	1.042	0.08	1.090	1.037	1.136
1st	WCDMA Band II	RMC 12.2Kbps	-	-	-	-	Horizontal Down	5mm	Reduced	9400	1880	19.88	20.00	1.028	-0.05	1.100	1	1.131
2nd	WCDMA Band II	RMC 12.2Kbps	-	-	-	-	Horizontal Down	5mm	Reduced	9400	1880	19.88	20.00	1.028	0.07	1.030	1.068	1.059
1st	LTE Band 12	-	10M	QPSK	1	49	Horizontal Up	5mm	Reduced	23095	707.5	21.70	22.00	1.072	0.07	1.110	1	1.189
2nd	LTE Band 12	-	10M	QPSK	1	49	Horizontal Up	5mm	Reduced	23095	707.5	21.70	22.00	1.072	-0.11	1.080	1.028	1.157
1st	LTE Band 30	-	10M	QPSK	25	0	Horizontal Down	5mm	Reduced	27710	2310	15.55	16.00	1.109	-0.02	1.050	1	1.165
2nd	LTE Band 30	-	10M	QPSK	25	0	Horizontal Down	5mm	Reduced	27710	2310	15.55	16.00	1.109	0.08	1.010	1.040	1.120

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/kg$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/kg$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

Test Engineer : Nick Hu, Yuan Zhao, Jiaying Chang, Yuankai Kong



16. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg. Therefore, the measurement uncertainty table is not required in this report.



17. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015
- [6] FCC KDB 447498 D02 v02r01, “SAR Measurement Procedures for USB Dongle Transmitters”, Oct 2015.
- [7] FCC KDB 941225 D01 v03r01, “3G SAR MEAUREMENT PROCEDURES”, Oct 2015
- [8] FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 2015
- [9] FCC KDB 941225 D05A v01r02, “Rel. 10 LTE SAR Test Guidance and KDB Inquiries”, Oct 2015
- [10] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [11] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Head_750MHz

DUT: D750V3 - SN:1087


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium: HSL_750 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.9 \text{ S/m}$; $\epsilon_r = 41.538$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(9.27, 9.27, 9.27); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.10.22
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 2.52 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 47.68 V/m ; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 2.98 W/kg
SAR(1 g) = 2.01 W/kg ; SAR(10 g) = 1.33 W/kg
Maximum value of SAR (measured) = 2.54 W/kg

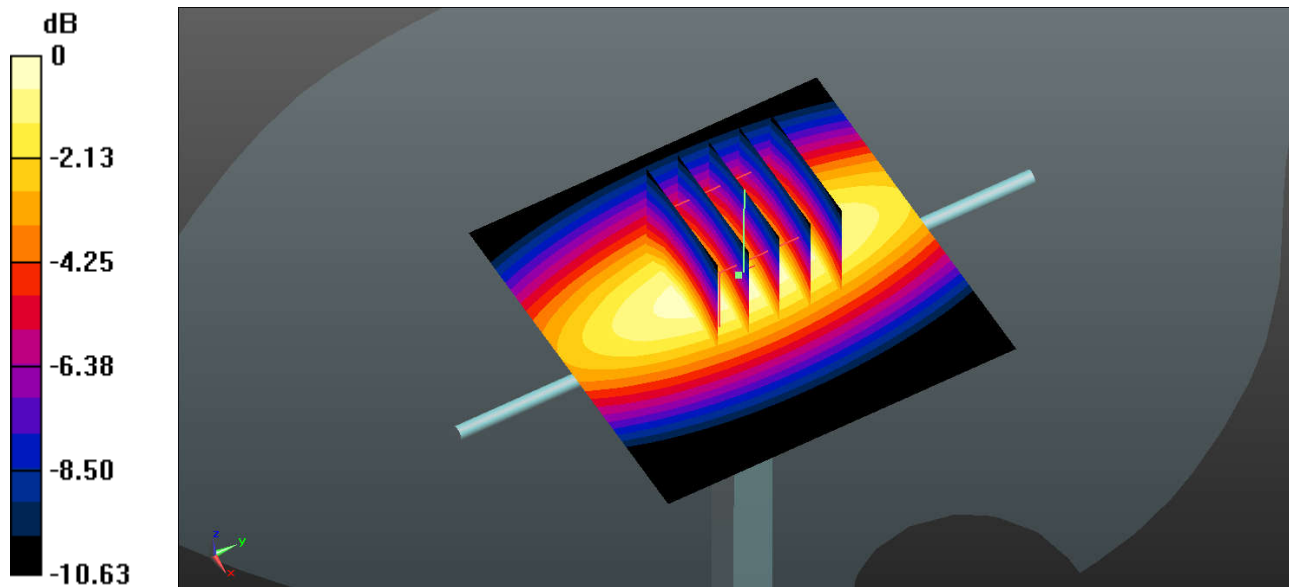

0 dB = 2.54 W/kg = 1.05 dBW/kg

System Check_Head_835MHz

DUT: D835V2 - SN:4d151


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
 Medium: HSL_835 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.911 \text{ S/m}$; $\epsilon_r = 42.06$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(9.01, 9.01, 9.01); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.10.22
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 2.86 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 54.78 V/m ; Power Drift = -0.09 dB
 Peak SAR (extrapolated) = 3.42 W/kg
SAR(1 g) = 2.25 W/kg ; SAR(10 g) = 1.47 W/kg
 Maximum value of SAR (measured) = 2.88 W/kg

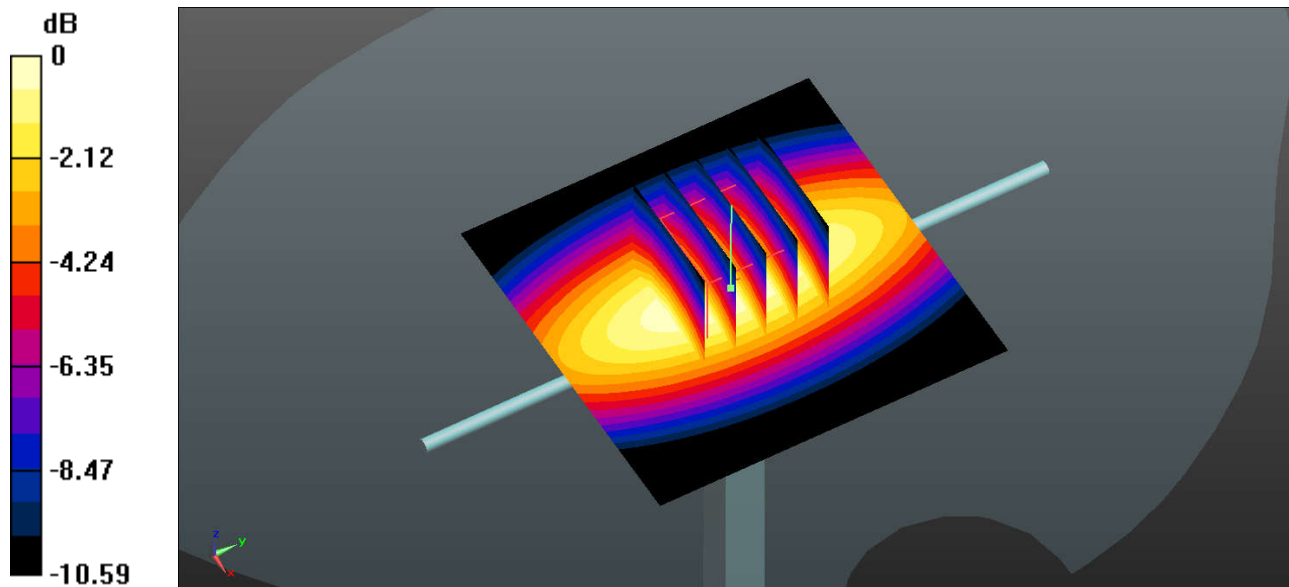

0 dB = 2.88 W/kg = 4.59 dBW/kg

System Check_Head_1750MHz

DUT: D1750V2 - SN:1090

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL_1750 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.349$ S/m; $\epsilon_r = 40.85$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.79, 7.79, 7.79); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.10.22
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.0 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 84.92 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 15.6 W/kg

SAR(1 g) = 9.14 W/kg; SAR(10 g) = 5 W/kg

Maximum value of SAR (measured) = 12.6 W/kg

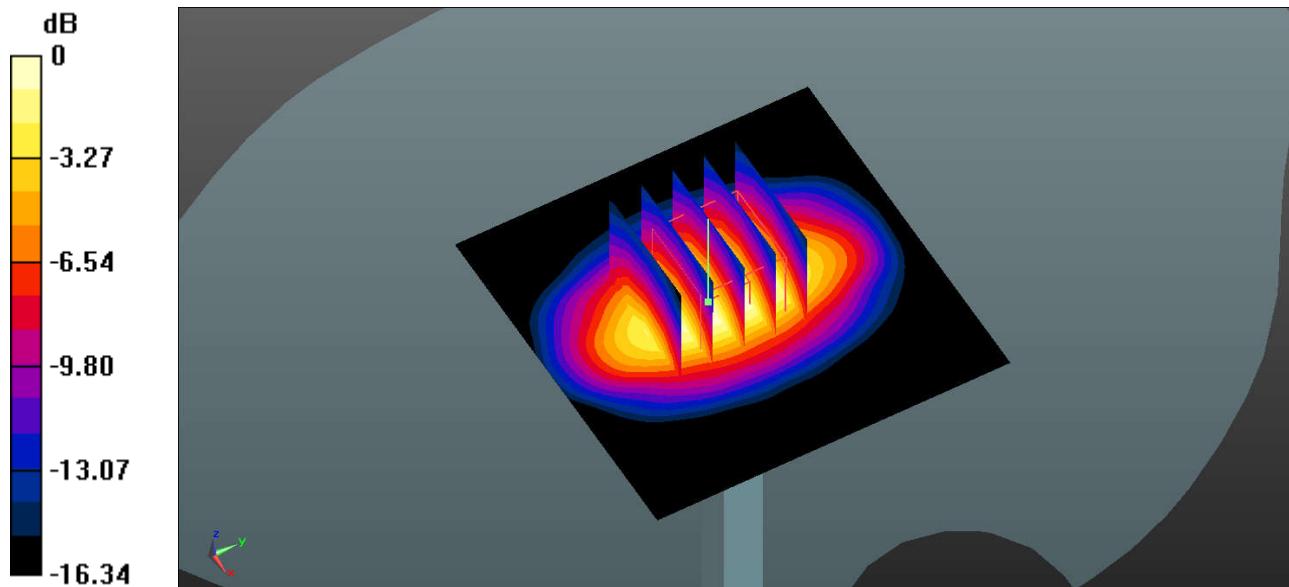

0 dB = 12.6 W/kg = 11.00 dBW/kg

System Check_Head_1900MHz

DUT: D1900V2 - SN:5d170


Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: HSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.424$ S/m; $\epsilon_r = 38.837$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.4, 7.4, 7.4); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.10.22
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 13.7 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 85.47 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 17.3 W/kg
SAR(1 g) = 9.6 W/kg; SAR(10 g) = 5.07 W/kg
Maximum value of SAR (measured) = 13.7 W/kg

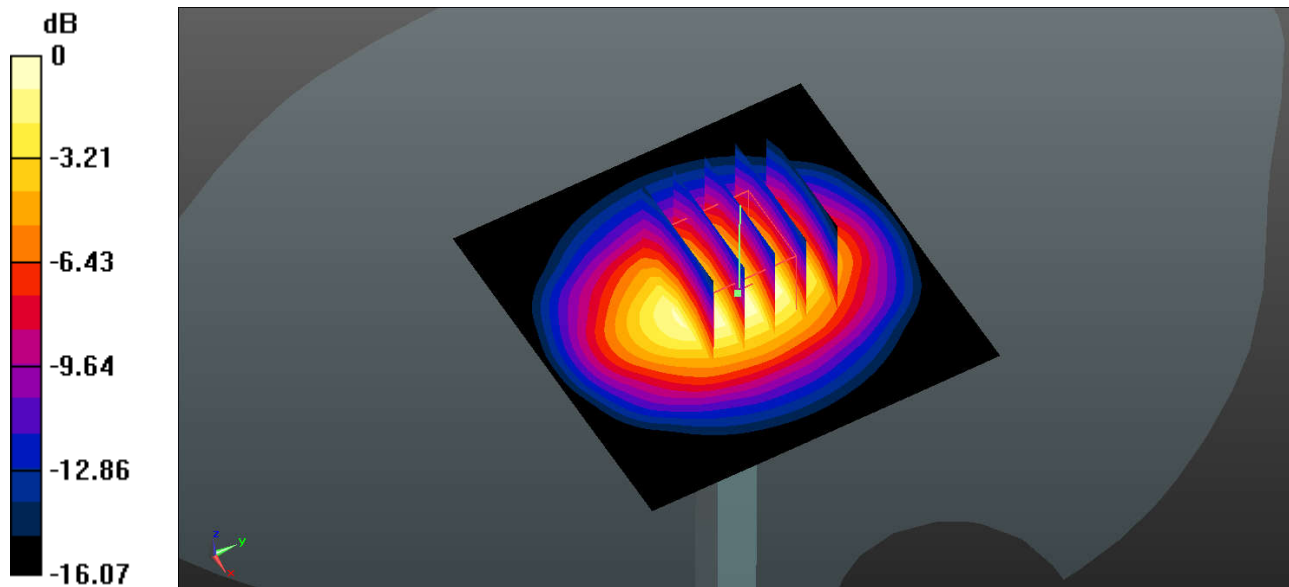

0 dB = 13.7 W/kg = 11.37 dBW/kg

System Check_Head_2300MHz

DUT: D2300V2 - SN:1055


Communication System: UID 0, CW (0); Frequency: 2300 MHz;Duty Cycle: 1:1
Medium: HSL_2300 Medium parameters used: $f = 2300$ MHz; $\sigma = 1.69$ S/m; $\epsilon_r = 39.535$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.31, 7.31, 7.31); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.10.22
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 17.7 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 88.28 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 22.2 W/kg
SAR(1 g) = 11.8 W/kg; SAR(10 g) = 5.79 W/kg
Maximum value of SAR (measured) = 17.3 W/kg

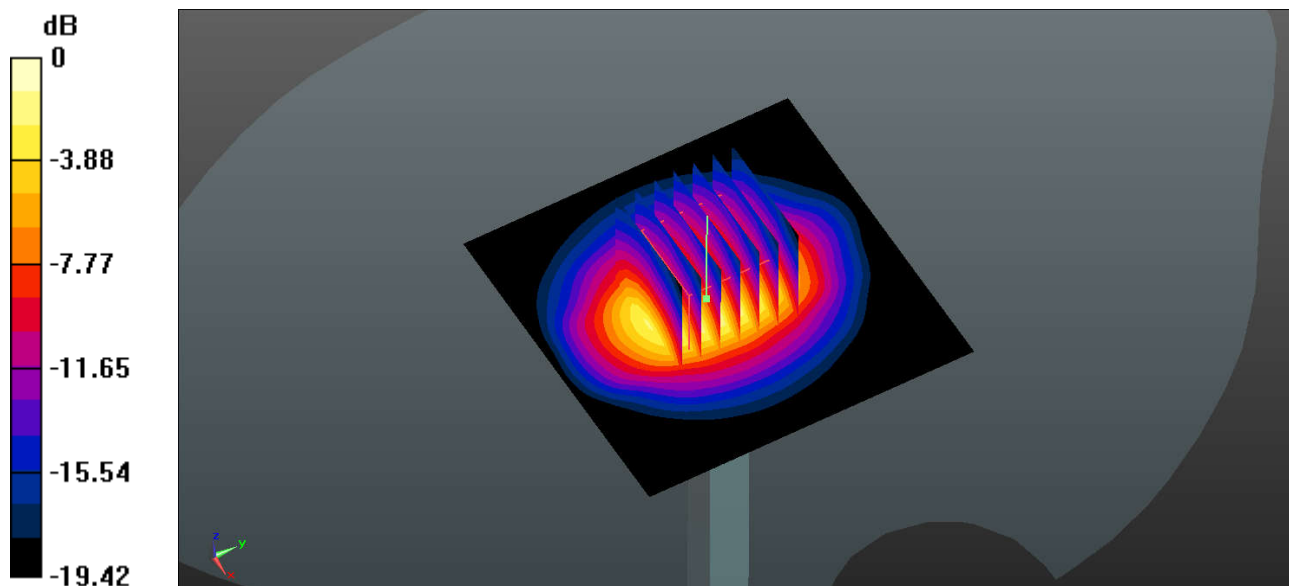

0 dB = 17.3 W/kg = 12.38 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2 - SN:1061

Communication System: UID 0, CW (0); Frequency: 2600 MHz;Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.028$ S/m; $\epsilon_r = 38.274$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(6.86, 6.86, 6.86); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.10.22
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 12.1 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.04 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 31.6 W/kg

SAR(1 g) = 14.5 W/kg; SAR(10 g) = 6.42 W/kg

Maximum value of SAR (measured) = 23.0 W/kg

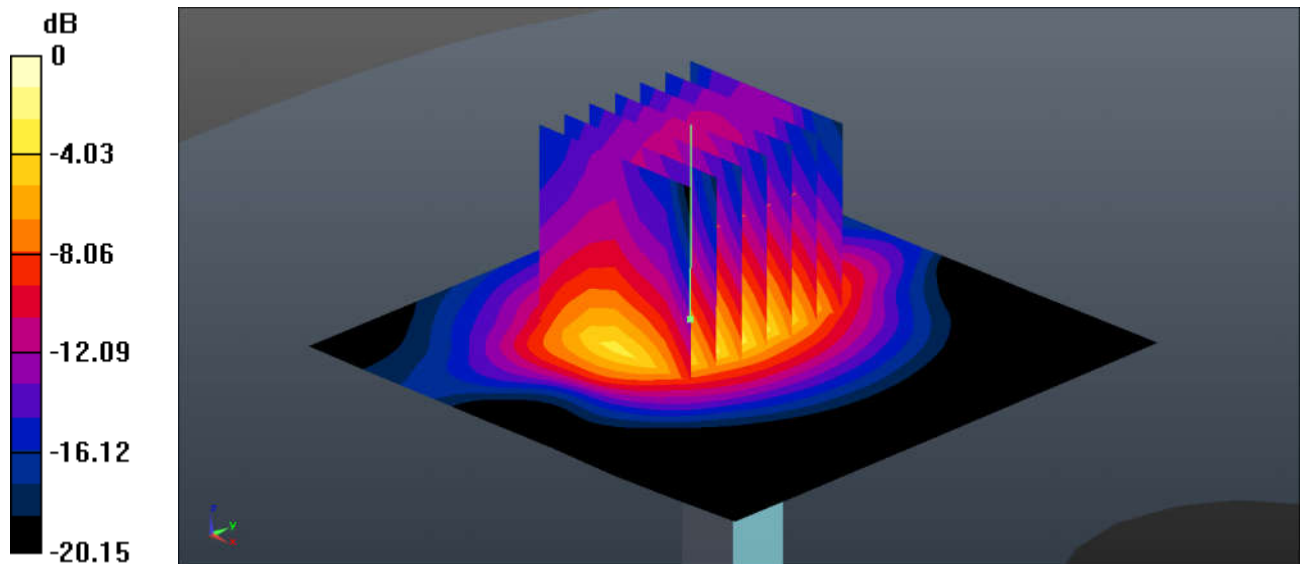

0 dB = 23.0 W/kg = 13.62 dBW/kg



Appendix B. Plots of SAR Measurement

The plots are shown as follows.

01_WCDMA V_RMC 12.2Kbps_Horizontal Up_5mm_Sensor On_Ch4233


Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium: HSL_835 Medium parameters used: $f = 847 \text{ MHz}$; $\sigma = 0.922 \text{ S/m}$; $\epsilon_r = 41.918$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(9.01, 9.01, 9.01); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.10.22
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Ch4233/Area Scan (41x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 1.20 W/kg

Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 28.06 V/m ; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.73 W/kg
SAR(1 g) = 0.911 W/kg ; SAR(10 g) = 0.577 W/kg
Maximum value of SAR (measured) = 1.27 W/kg

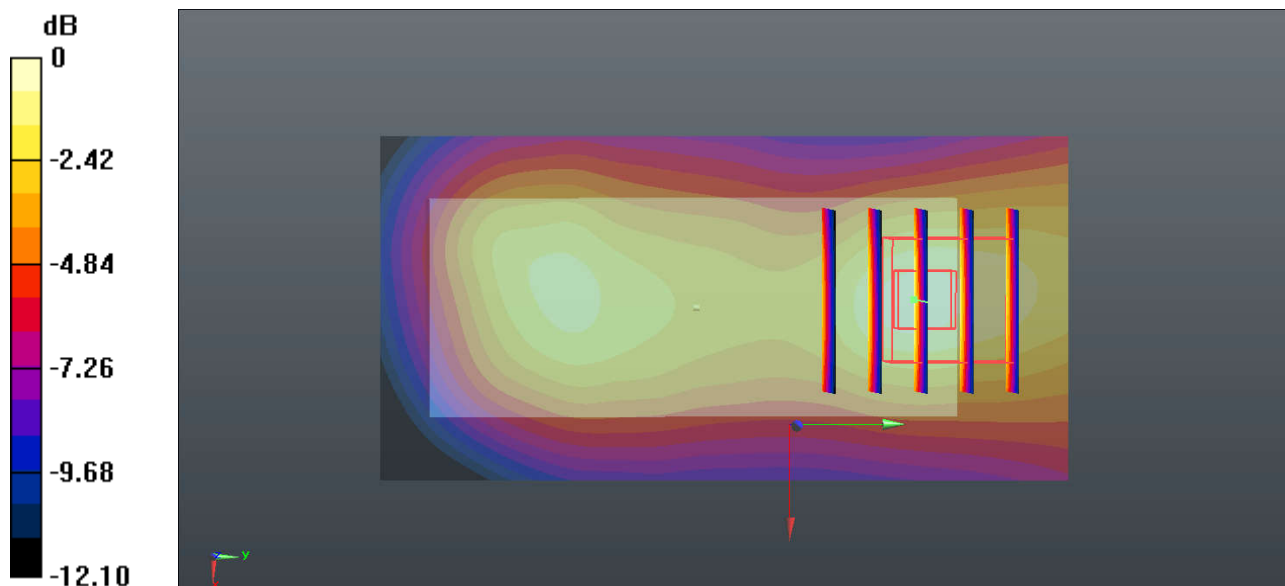

0 dB = 1.27 W/kg = 1.04 dBW/kg

02_WCDMA IV_RMC 12.2Kbps_Horizontal Down_5mm_Sensor On_Ch1513


Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
 Medium: HSL_1750 Medium parameters used: $f = 1753 \text{ MHz}$; $\sigma = 1.352 \text{ S/m}$; $\epsilon_r = 40.837$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.8 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.79, 7.79, 7.79); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.10.22
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Ch1513/Area Scan (51x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.70 W/kg

Ch1513/Zoom Scan (5x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 25.00 V/m ; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 2.15 W/kg
SAR(1 g) = 1.13 W/kg ; SAR(10 g) = 0.644 W/kg
 Maximum value of SAR (measured) = 1.45 W/kg

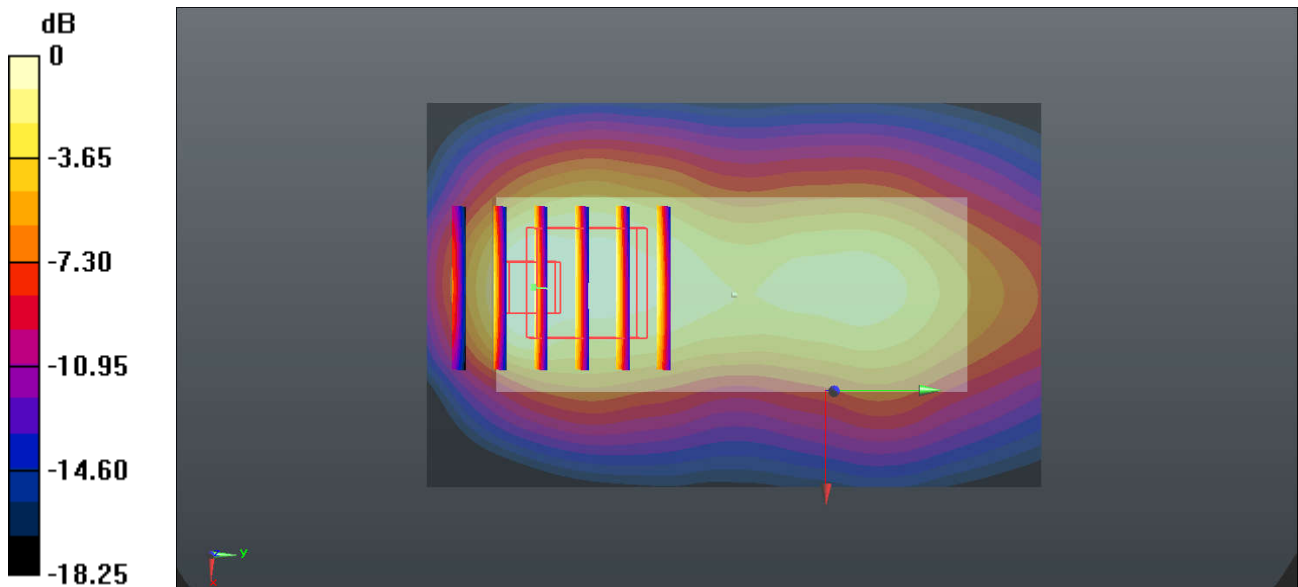

0 dB = 1.45 W/kg = 1.61 dBW/kg

03_WCDMA II_RMC 12.2Kbps_Horizontal Down_5mm_Sensor On_Ch9400


Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL_1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 38.93$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.4, 7.4, 7.4); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.10.22
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Ch9400/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.66 W/kg

Ch9400/Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 25.24 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 2.21 W/kg
SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.578 W/kg
Maximum value of SAR (measured) = 1.43 W/kg

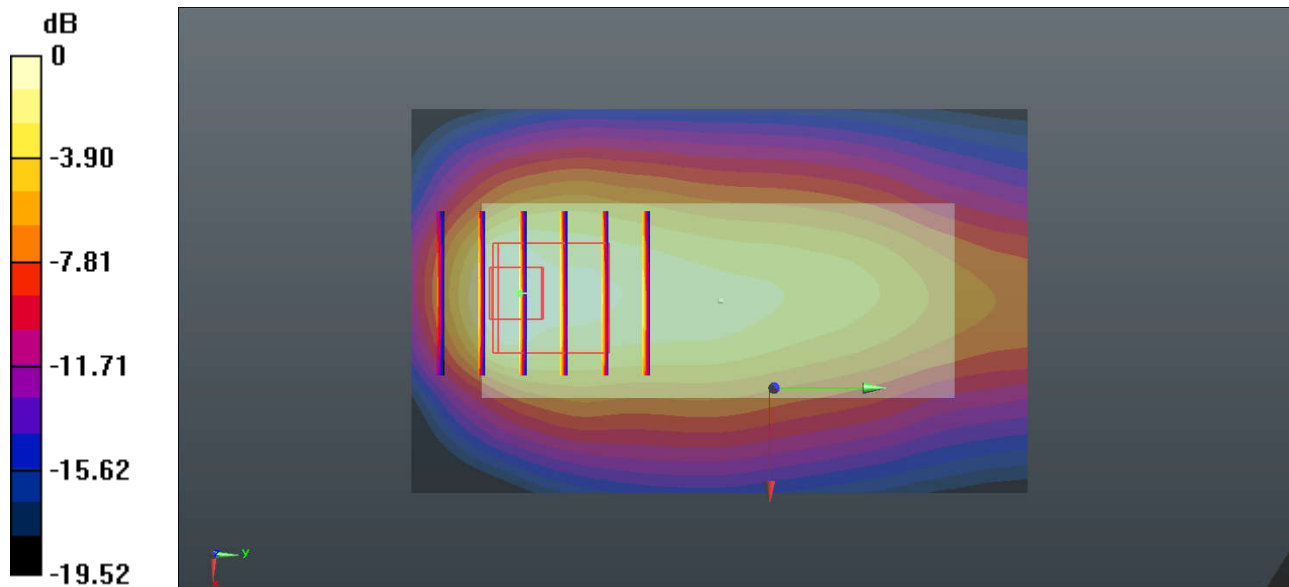

0 dB = 1.43 W/kg = 1.55 dBW/kg

04_LTE Band 12_10M_QPSK_1RB_49Offset_Horizontal Up_5mm_Sensor On_Ch23095


Communication System: UID 0, FDD_LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL_750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.861$ S/m; $\epsilon_r = 42.097$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(9.27, 9.27, 9.27); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.10.22
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Ch23095/Area Scan (51x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.25 W/kg

Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 27.47 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 1.89 W/kg
SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.685 W/kg
Maximum value of SAR (measured) = 1.38 W/kg

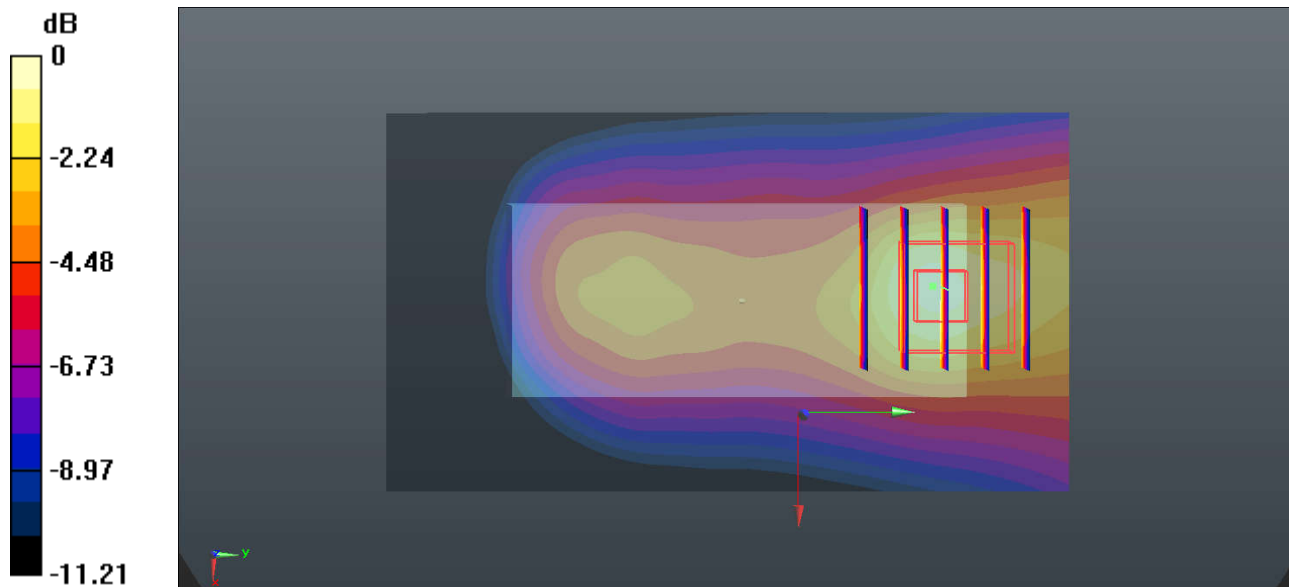

0 dB = 1.38 W/kg = 1.40 dBW/kg

05_LTE Band 13_10M_QPSK_1RB_0Offset_Horizontal Up_5mm_Sensor On_Ch23230


Communication System: UID 0, FDD_LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium: HSL_750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.931 \text{ S/m}$; $\epsilon_r = 41.111$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(9.27, 9.27, 9.27); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.10.22
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Ch23230/Area Scan (41x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 1.24 W/kg

Ch23230/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 2.991 V/m ; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 1.84 W/kg
SAR(1 g) = 1.03 W/kg ; SAR(10 g) = 0.624 W/kg
Maximum value of SAR (measured) = 1.32 W/kg

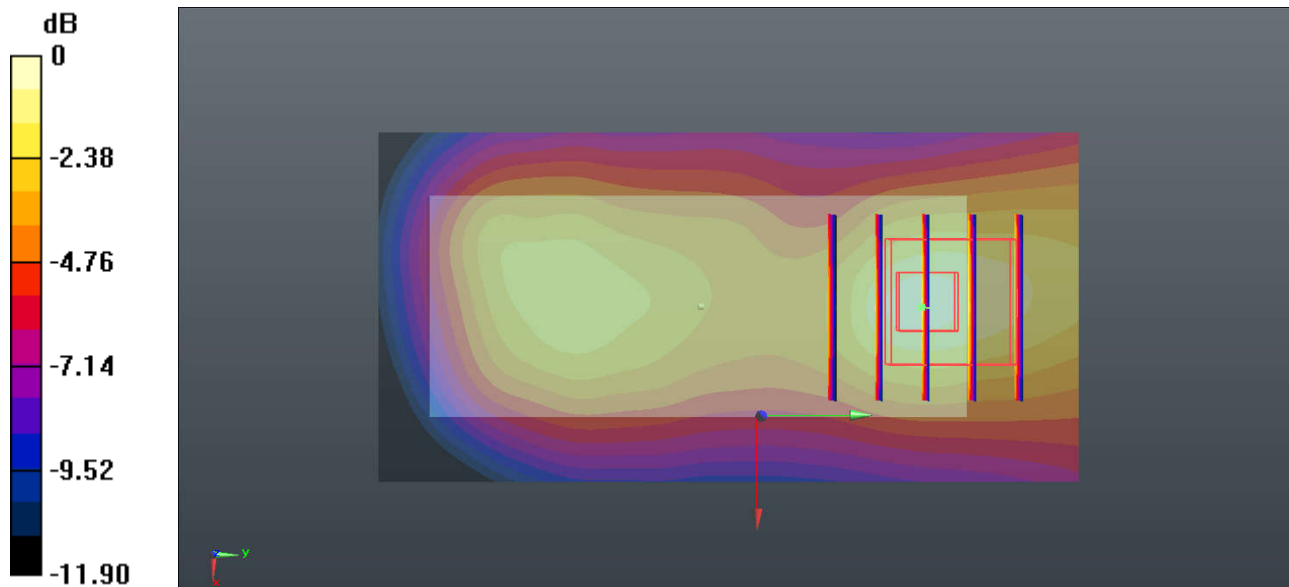

0 dB = 1.32 W/kg = 1.21 dBW/kg

06_LTE Band 14_10M_QPSK_25RB_0Offset_Horizontal Up_5mm_Sensor On_Ch23330


Communication System: UID 0, FDD_LTE (0); Frequency: 793 MHz; Duty Cycle: 1:1
Medium: HSL_750 Medium parameters used: $f = 793 \text{ MHz}$; $\sigma = 0.941 \text{ S/m}$; $\epsilon_r = 40.969$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(9.27, 9.27, 9.27); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.10.22
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Ch23330/Area Scan (41x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.970 W/kg

Ch23330/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 27.82 V/m ; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.16 W/kg
SAR(1 g) = 0.753 W/kg ; SAR(10 g) = 0.485 W/kg
Maximum value of SAR (measured) = 0.877 W/kg

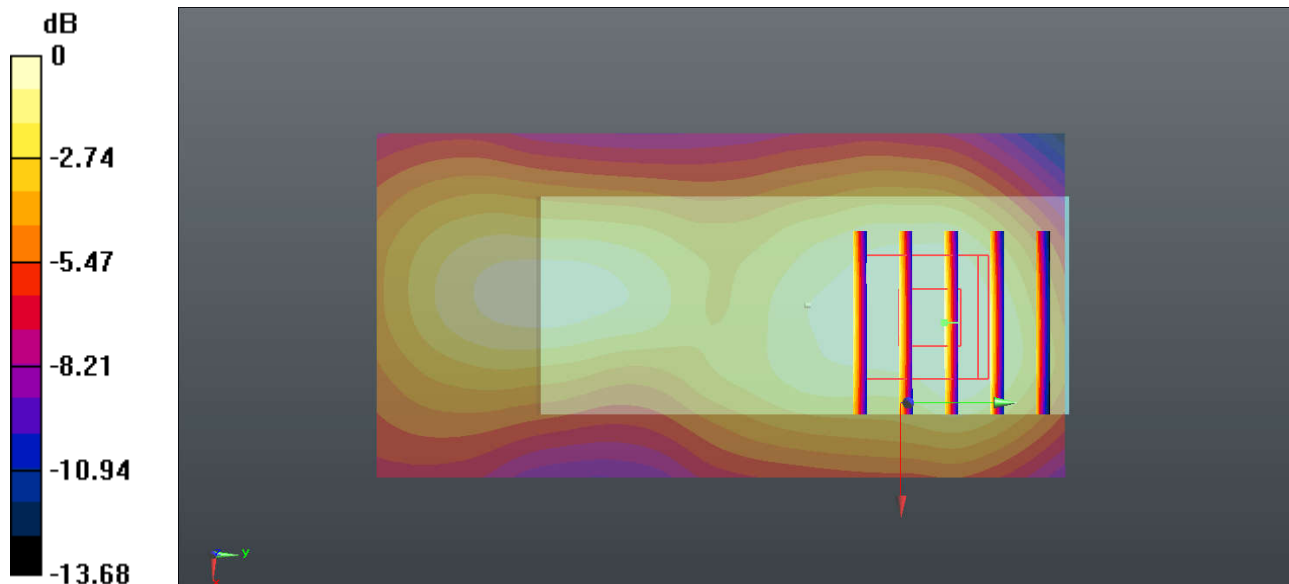

0 dB = 0.877 W/kg = -0.57 dBW/kg

07_LTE Band 5_10M_QPSK_1RB_0Offset_Horizontal up_5mm_Sensor On_Ch20525


Communication System: UID 0, LTE-FDD (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL_835 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 42.041$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(9.01, 9.01, 9.01); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.10.22
- Phantom: SAM2; Type: SAM; Serial: TP-1754
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Ch20525/Area Scan (51x91x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.00 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 21.17 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.49 W/kg
SAR(1 g) = 0.793 W/kg; SAR(10 g) = 0.456 W/kg
Maximum value of SAR (measured) = 1.04 W/kg

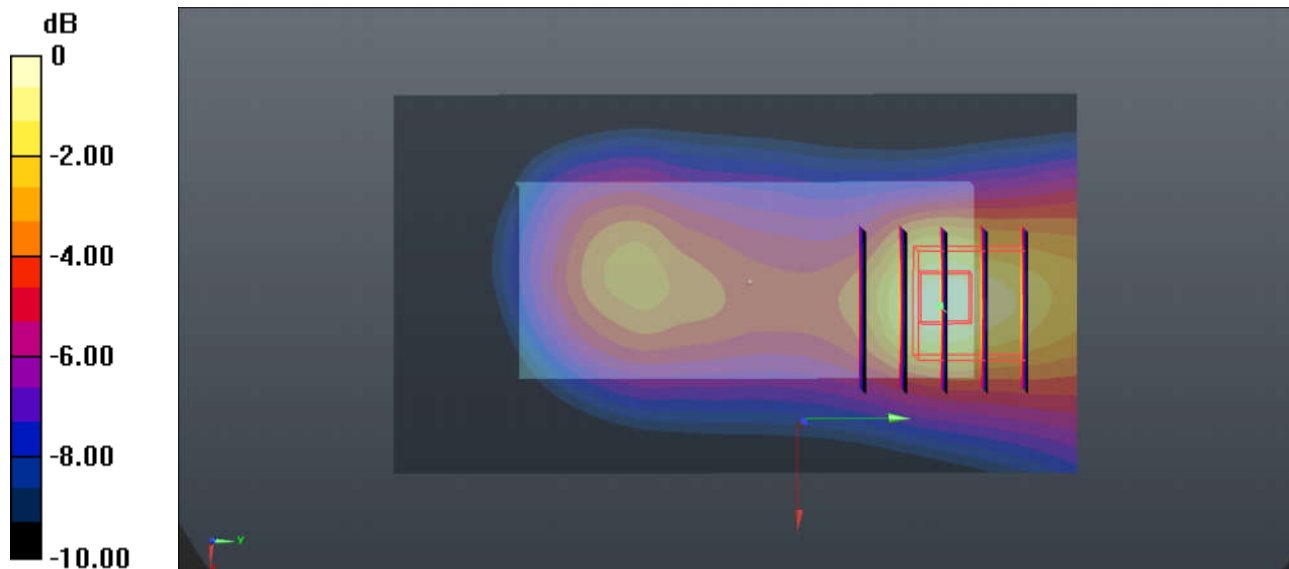

0 dB = 1.04 W/kg = 0.17 dBW/kg

08_LTE Band 66_20M_QPSK_1RB_0Offset_Back_5mm_Sensor On_Ch132322

Communication System: UID 0, FDD_LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1
 Medium: HSL_1750 Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.344 \text{ S/m}$; $\epsilon_r = 40.864$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.8 \text{ }^\circ\text{C}$


DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.79, 7.79, 7.79); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.10.22
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Ch132322/Area Scan (41x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.26 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 15.99 V/m ; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 1.73 W/kg
SAR(1 g) = 0.994 W/kg ; SAR(10 g) = 0.560 W/kg
 Maximum value of SAR (measured) = 1.22 W/kg

Ch132322/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 15.99 V/m ; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 1.48 W/kg
SAR(1 g) = 0.909 W/kg ; SAR(10 g) = 0.515 W/kg
 Maximum value of SAR (measured) = 1.13 W/kg

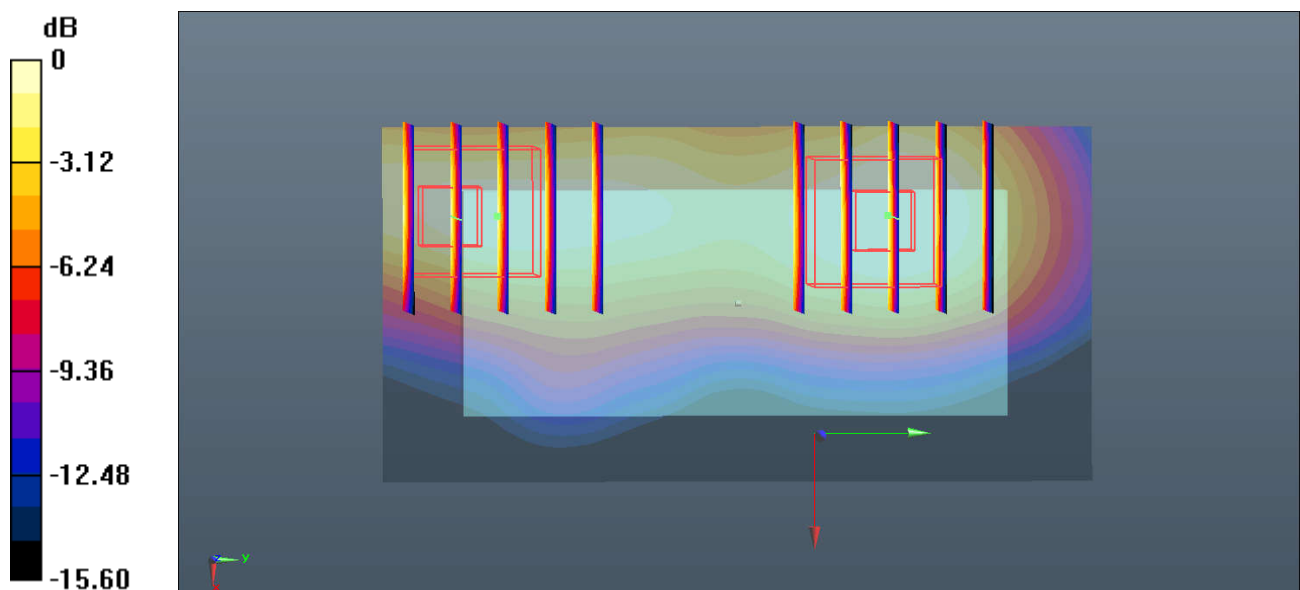

0 dB = $1.13 \text{ W/kg} = 0.53 \text{ dBW/kg}$

09_LTE Band 2_20M_QPSK_50RB_24Offset_Horizontal Down_5mm_Sensor On_Ch18700


Communication System: UID 0, FDD_LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium: HSL_1900 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 39.019$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.4, 7.4, 7.4); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.10.22
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Ch18700/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.47 W/kg

Ch18700/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 25.30 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 2.26 W/kg
SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.546 W/kg
Maximum value of SAR (measured) = 1.35 W/kg

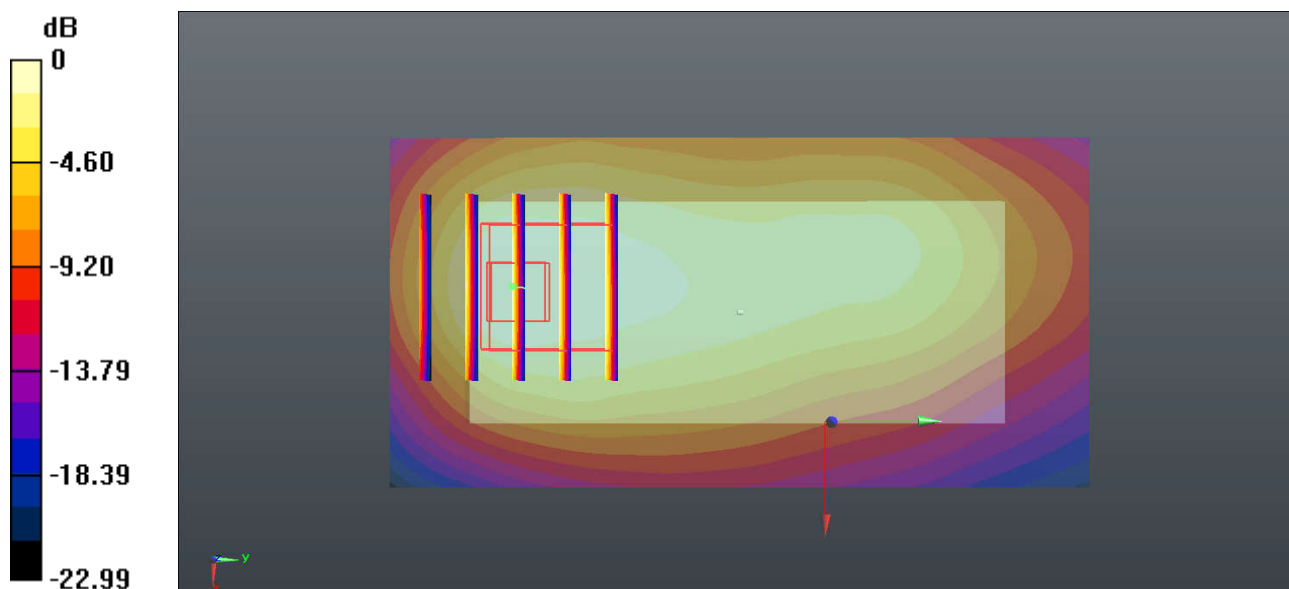

0 dB = 1.35 W/kg = 1.30 dBW/kg

10_LTE Band 30_10M_QPSK_50RB_0Offset_Horizontal Down_5mm_Sensor On_Ch27710


Communication System: UID 0, FDD_LTE (0); Frequency: 2310 MHz; Duty Cycle: 1:1
Medium: HSL_2300 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.702$ S/m; $\epsilon_r = 39.489$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(7.31, 7.31, 7.31); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.10.22
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Ch27710/Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.41 W/kg

Ch27710/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 7.026 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 2.42 W/kg
SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.453 W/kg
Maximum value of SAR (measured) = 1.45 W/kg

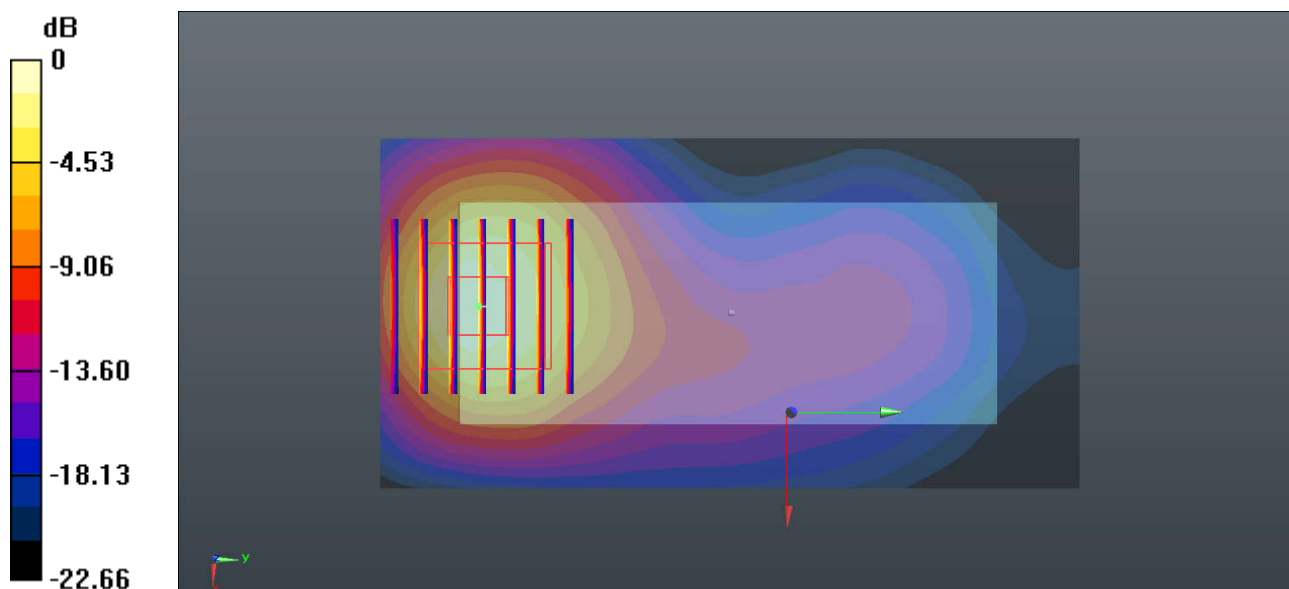

0 dB = 1.45 W/kg = 1.61 dBW/kg

11_LTE Band 7_20M_QPSK_1RB_0Offset_Horizontal Down_5mm_Sensor On_Ch20850


Communication System: UID 0, FDD_LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1
Medium: HSL_2600 Medium parameters used: $f = 2510$ MHz; $\sigma = 1.922$ S/m; $\epsilon_r = 38.652$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3843; ConvF(6.86, 6.86, 6.86); Calibrated: 2018.9.27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2018.10.22
- Phantom: SAM2; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7372)

Ch20850/Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.09 W/kg

Ch20850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.848 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.82 W/kg
SAR(1 g) = 0.779 W/kg; SAR(10 g) = 0.335 W/kg
Maximum value of SAR (measured) = 1.07 W/kg

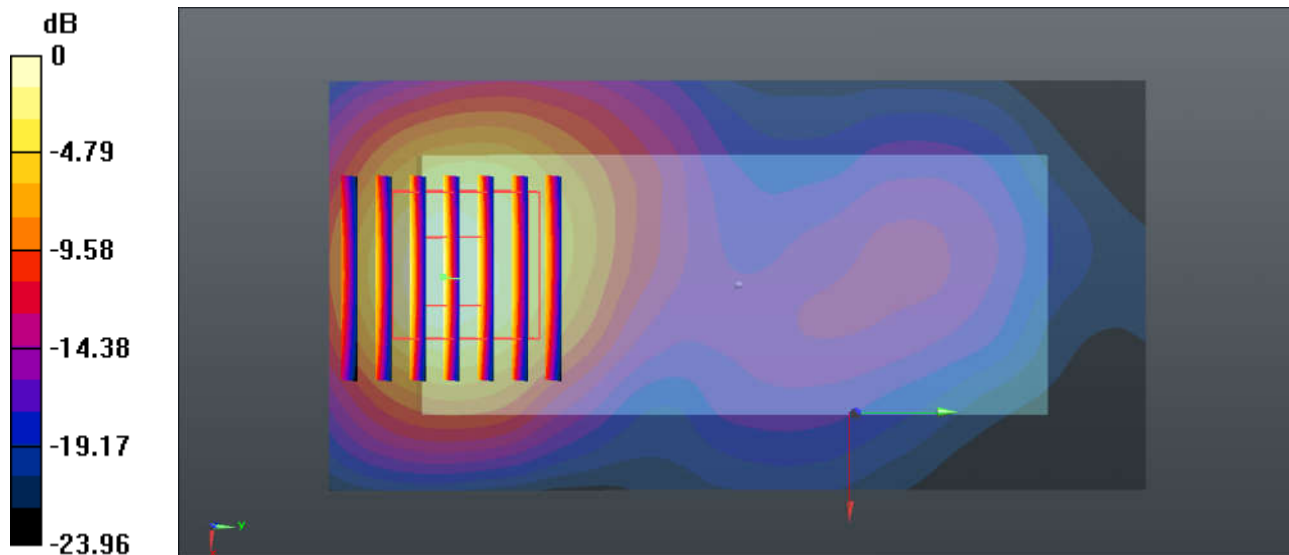

0 dB = 1.07 W/kg = 0.29 dBW/kg



Appendix C. DASYS Calibration Certificate

The DASYS calibration certificates are shown as follows.



In Collaboration with
s p e a g
CALIBRATION LABORATORY



中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Client **Sporton**

Certificate No: **Z19-60081**

CALIBRATION CERTIFICATE

Object **D750V3 - SN: 1087**

Calibration Procedure(s) **FF-Z11-003-01**
Calibration Procedures for dipole validation kits

Calibration date: **March 27, 2019**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	20-Aug-18 (CTTL, No.J18X06862)	Aug-19
Power sensor NRP8S	104291	20-Aug-18 (CTTL, No.J18X06862)	Aug-19
Reference Probe EX3DV4	SN 3617	31-Jan-19(SPEAG,No.EX3-3617_Jan19)	Jan-20
DAE4	SN 1331	06-Feb-19(SPEAG,No.DAE4-1331_Feb19)	Feb-20
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	23-Jan-19 (CTTL, No.J19X00336)	Jan-20
NetworkAnalyzer E5071C	MY46110673	24-Jan-19 (CTTL, No.J19X00547)	Jan-20

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: March 29, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



In Collaboration with

s p e a g
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM _{x,y,z}
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices- Part 1: Device used next to the ear (Frequency range of 300MHz to 6GHz)", July 2016
- IEC 62209-2, "Procedure to measure the Specific Absorption Rate (SAR) For wireless communication devices used in close proximity to the human body (frequency range of 30MHz to 6GHz)", March 2010
- KDB865664, SAR Measurement Requirements for 100 MHz to 6 GHz

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.10.2.1495
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	43.0 ± 6 %	0.90 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.10 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.36 W/kg ± 18.8 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.42 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.65 W/kg ± 18.7 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	56.9 ± 6 %	0.94 mho/m ± 6 %
Body TSL temperature change during test	<1.0 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.09 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.58 W/kg ± 18.8 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	1.41 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.75 W/kg ± 18.7 % (k=2)



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.4Ω- 2.59jΩ
Return Loss	- 29.3dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	51.6Ω- 3.86jΩ
Return Loss	- 27.7dB

General Antenna Parameters and Design

Electrical Delay (one direction)	0.898 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

DASY5 Validation Report for Head TSL

Date: 03.26.2019

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1087

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 43.01$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3617; ConvF(10.03, 10.03, 10.03) @ 750 MHz; Calibrated: 1/31/2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1331; Calibrated: 2/6/2019
- Phantom: MFP_V5.1C ; Type: QD 000 P51CA; Serial: 1062
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)


Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.05 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.00 W/kg

SAR(1 g) = 2.1 W/kg; SAR(10 g) = 1.42 W/kg

Maximum value of SAR (measured) = 2.72 W/kg

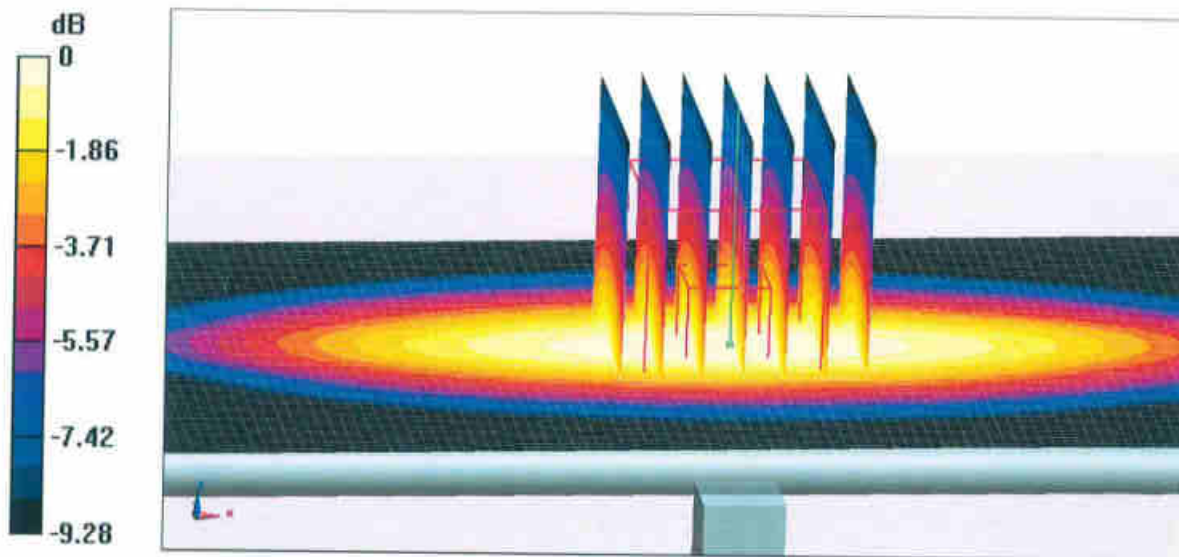

0 dB = 2.72 W/kg = 4.35 dBW/kg



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2079 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com http://www.chinattl.cn

Impedance Measurement Plot for Head TSL

