



FCC Test Report

APPLICANT : Inseego Corp.
EQUIPMENT : UMTS/LTE USB Modem
BRAND NAME : Inseego
MODEL NAME : MC800
FCC ID : PKRISGMC800
STANDARD : 47 CFR Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Apr. 24, 2019 and testing was completed on May 06, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Jason Jia

Reviewed by: Jason Jia / Supervisor

James Huang

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant..... 5

 1.2. Product Feature of Equipment Under Test 5

 1.3. Product Specification of Equipment Under Test 6

 1.4. Modification of EUT 6

 1.5. Test Location 7

 1.6. Applicable Standards 7

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1. Test Mode 8

 2.2. Connection Diagram of Test System 9

 2.3. Support Unit used in test configuration and system 9

 2.4. EUT Operation Test Setup 10

3. TEST RESULT 11

 3.1. Test of AC Conducted Emission Measurement 11

 3.2. Test of Radiated Emission Measurement 15

4. LIST OF MEASURING EQUIPMENT 20

5. UNCERTAINTY OF EVALUATION 21

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FC942417	Rev. 01	Initial issue of report	Jul. 10, 2019



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 12.67 dB at 0.444 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 5.72 dB at 46.490 MHz



1. General Description

1.1. Applicant

Inseego Corp.

9605 Scranton Road, Suite 300, San Diego, CA 92121, United States of America

1.2. Product Feature of Equipment Under Test

Product Feature	
Equipment	UMTS/LTE USB Modem
Brand Name	Inseego
Model Name	MC800
FCC ID	PKRISGMC800
EUT supports Radios application	WCDMA/HSPA/DC-HSDPA/HSPA+ LTE/GNSS
IMEI Code	Conduction: 990013100004444 Radiation: 990013100004584
HW Version	V1.02
SW Version	1.30.0.3
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.3. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz LTE Band 14 : 790.5 MHz ~ 795.5 MHz LTE Band 17 : 706.5 MHz ~ 713.5 MHz LTE Band 30 : 2307.5 MHz ~ 2312.5 MHz LTE Band 66 : 1710.7 MHz ~ 1779.3 MHz
Rx Frequency	WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5 MHz ~ 2687.5 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 13 : 748.5 MHz ~ 753.5 MHz LTE Band 14 : 760.5 MHz ~ 765.5 MHz LTE Band 17 : 736.5 MHz ~ 743.5 MHz LTE Band 29 : 718.5 MHz ~ 726.5 MHz LTE Band 30 : 2352.5 MHz ~ 2357.5 MHz LTE Band 66 : 2110.7 MHz~ 2199.3 MHz GNSS : 1559 MHz ~ 1610 MHz
Antenna Type	WWAN : Internal Antenna GNSS: Internal Antenna
Type of Modulation	WCDMA : BPSK HSDPA/DC-HSDPA : QPSK HSUPA : QPSK HSPA+ : 16QAM DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM GNSS : BPSK

1.4. Modification of EUT

No modifications are made to the EUT during all test items.



1.5. Test Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH02-KS	CN1257	314309

1.6. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test


2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: WCDMA Band V Rx(Middle) + GNSS Rx + Powered by Notebook Mode 2: WCDMA Band II Rx + GNSS Rx + Powered by Notebook Mode 3: LTE Band 13 Rx(High) + GNSS Rx + Powered by Notebook Mode 4: LTE Band 14 Rx(High) + GNSS Rx + Powered by Notebook Mode 5: LTE Band 12 Rx(Middle) + GNSS Rx + Powered by Notebook Mode 6: LTE Band 17 Rx(Middle) + GNSS Rx + Powered by Notebook
Radiated Emissions	Mode 1: WCDMA Band V Rx(Middle) + GNSS Rx + Powered by Notebook Mode 2: WCDMA Band II Rx + GNSS Rx + Powered by Notebook Mode 3: LTE Band 13 Rx(High) + GNSS Rx + Powered by Notebook Mode 4: LTE Band 14 Rx(High) + GNSS Rx + Powered by Notebook Mode 5: LTE Band 12 Rx(Middle) + GNSS Rx + Powered by Notebook Mode 6: LTE Band 17 Rx(Middle) + GNSS Rx + Powered by Notebook
Remark: <ol style="list-style-type: none"> 1. The worst case of AC is mode 1; only the test data of this mode is reported. 2. The worst case of RE is mode 3; only the test data of this mode is reported. 3. Pre-scanned Low/Middle/High channel for WCDMA Band V/LTE Band 12/13/14/17, the worst channel was recorded in this report. 	

2.2. Connection Diagram of Test System

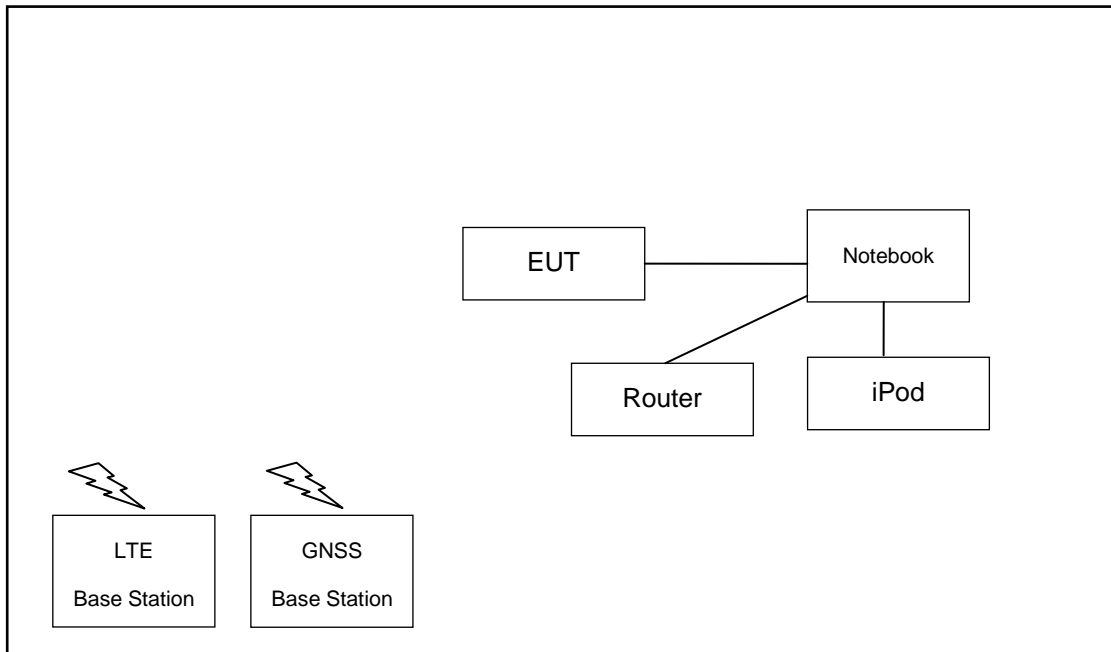

2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	MT320	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
2.	WLAN AP	D-link	DIR-855	KA2DIR855A2	N/A	Unshielded,1.8m
3.	iPod	Apple	A1199	N/A	N/A	N/A
4.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
5.	GNSS Station	R&S	GSS7000	NA	NA	Unshielded,1.8m
6.	Notebook	Lenovo	G480	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
7.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	shielded cable DC O/P1.8m , Unshielded AC I/P1.8m



2.4. EUT Operation Test Setup

The EUT was in WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

1. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test Setup

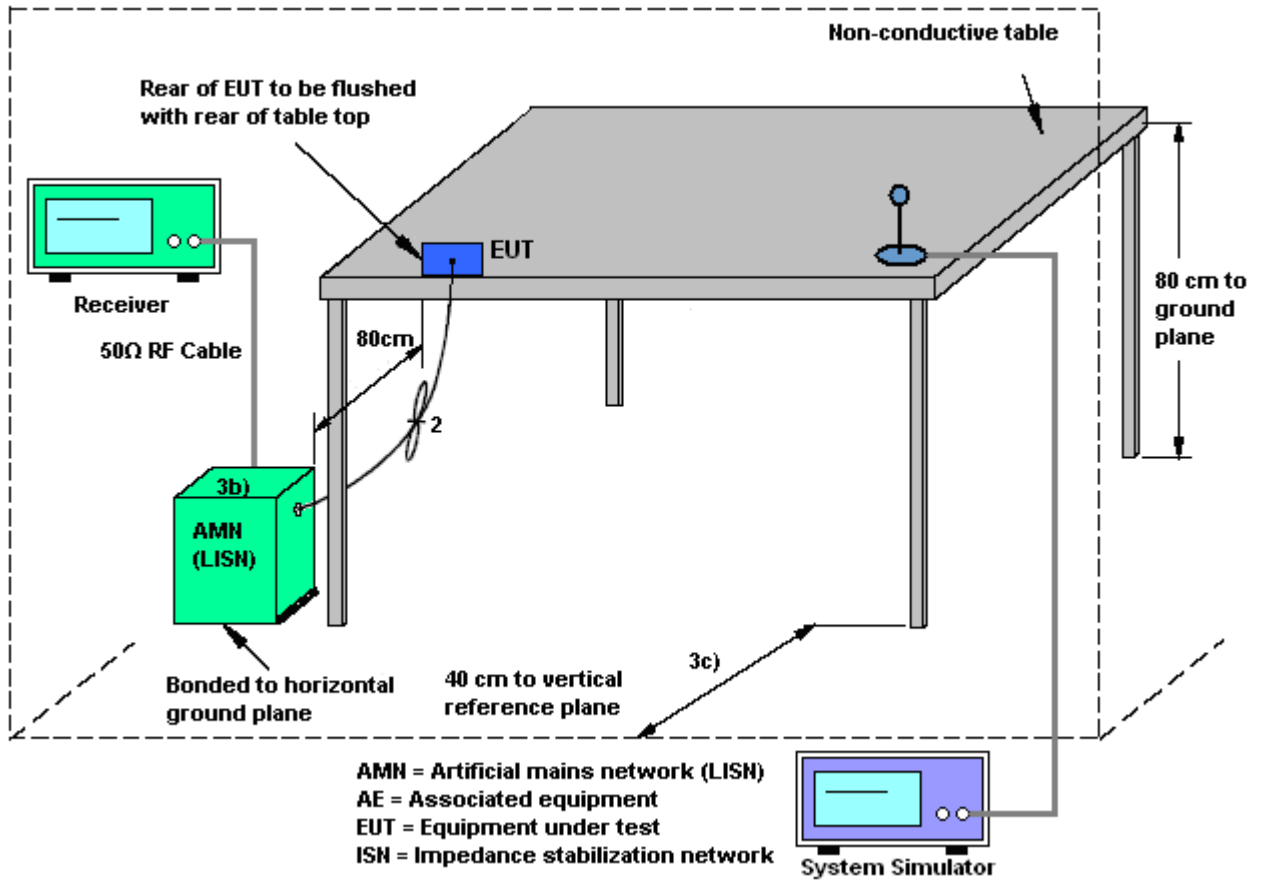




3.1.5 Test Result of AC Conducted Emission

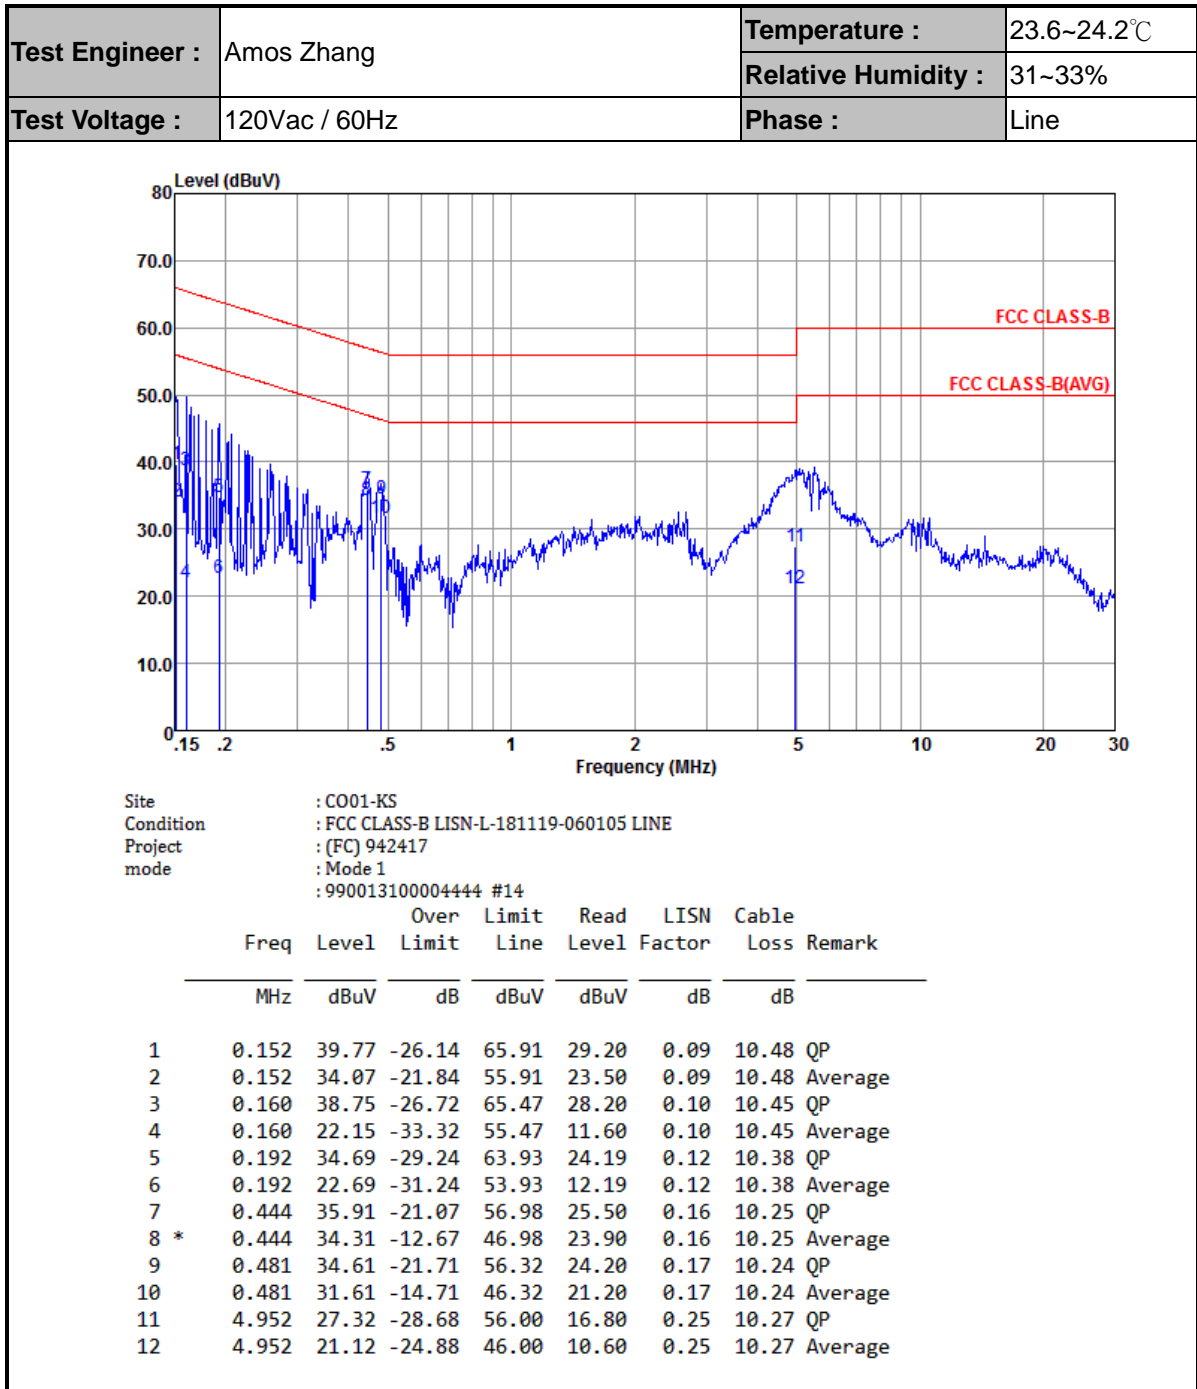



Test Engineer :	Amos Zhang	Temperature :	23.6~24.2°C
		Relative Humidity :	31~33%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral

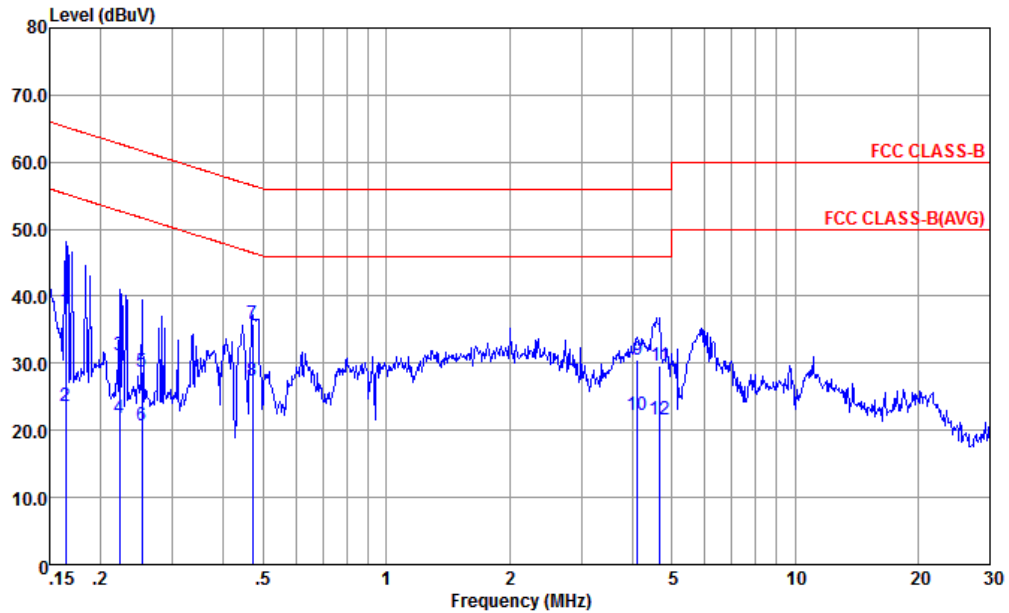

Site : CO01-KS
 Condition : FCC CLASS-B LISN-N-181119-060105 NEUTRAL
 Project : (FC) 942417
 mode : Mode 1
 : 990013100004444 #14

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.164	37.82	-27.43	65.25	27.20	0.18	10.44	QP
2	0.164	23.52	-31.73	55.25	12.90	0.18	10.44	Average
3	0.222	31.12	-31.62	62.74	20.60	0.17	10.35	QP
4	0.222	21.82	-30.92	52.74	11.30	0.17	10.35	Average
5	0.252	28.70	-32.99	61.69	18.20	0.17	10.33	QP
6	0.252	20.70	-30.99	51.69	10.20	0.17	10.33	Average
7	0.471	35.89	-20.60	56.49	25.50	0.15	10.24	QP
8 *	0.471	27.49	-19.00	46.49	17.10	0.15	10.24	Average
9	4.114	30.63	-25.37	56.00	20.21	0.17	10.25	QP
10	4.114	22.33	-23.67	46.00	11.91	0.17	10.25	Average
11	4.672	29.64	-26.36	56.00	19.19	0.18	10.27	QP
12	4.672	21.64	-24.36	46.00	11.19	0.18	10.27	Average



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.



3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz




For radiated emissions above 1GHz

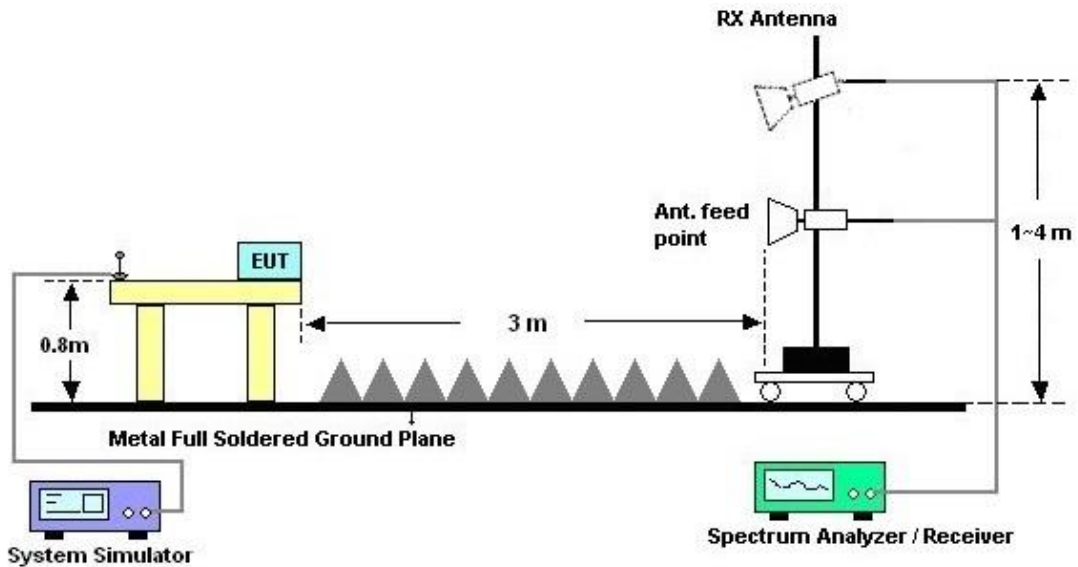



3.2.5. Test Result of Radiated Emission

Test Engineer :	Jack Guo	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Horizontal
Remark :	#6 is system simulator signal which can be ignored.		

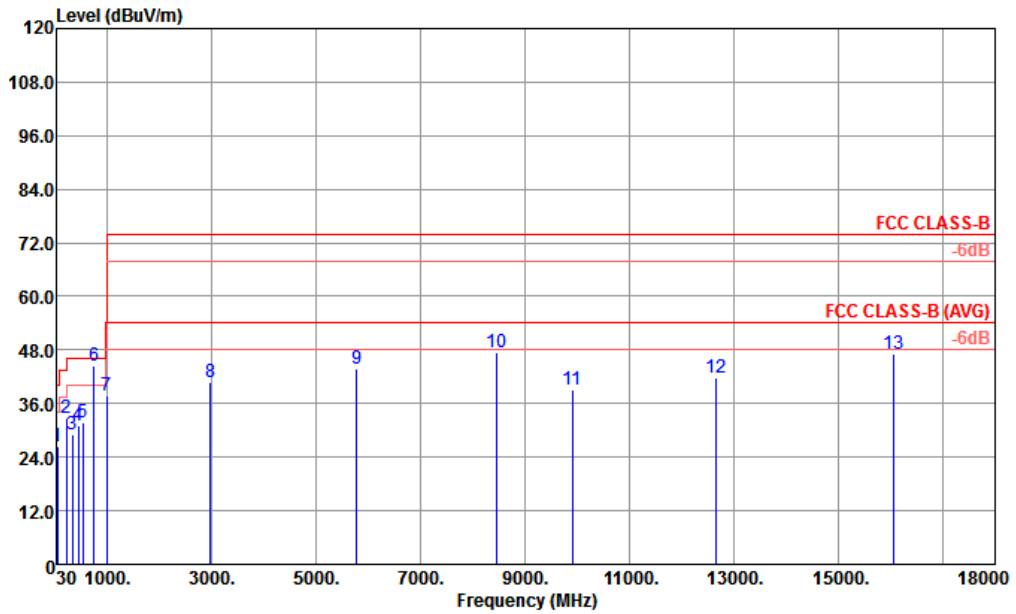


Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 23182-3M HORIZONTAL

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	46.49	26.34	-13.66	40.00	42.66	14.83	0.79	31.94	---	Peak
2	226.91	32.88	-13.12	46.00	46.19	16.86	1.76	31.93	100	Peak
3	332.64	28.92	-17.08	46.00	38.99	19.92	2.06	32.05	---	Peak
4	453.89	31.08	-14.92	46.00	38.26	22.65	2.39	32.22	---	Peak
5	532.46	31.84	-14.16	46.00	37.14	24.40	2.61	32.31	---	Peak
6 !	751.68	44.49			47.69	25.90	3.15	32.25	---	Peak
7	995.15	37.72	-16.28	54.00	37.05	27.65	3.59	30.57	---	Peak
8	2984.00	40.64	-33.36	74.00	33.79	32.76	6.30	32.21	---	Peak
9	5784.00	43.84	-30.16	74.00	31.33	34.82	8.98	31.29	---	Peak
10	8456.00	47.39	-26.61	74.00	31.71	36.47	11.17	31.96	---	Peak
11	9909.00	39.25	-34.75	74.00	21.44	36.82	12.46	31.47	---	Peak
12	12654.00	41.67	-32.33	74.00	20.67	38.61	14.17	31.78	---	Peak
13	16065.00	47.22	-26.78	74.00	20.87	41.25	16.87	31.77	---	Peak



Test Engineer :	Jack Guo	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical
Remark :	#5 is system simulator signal which can be ignored.		

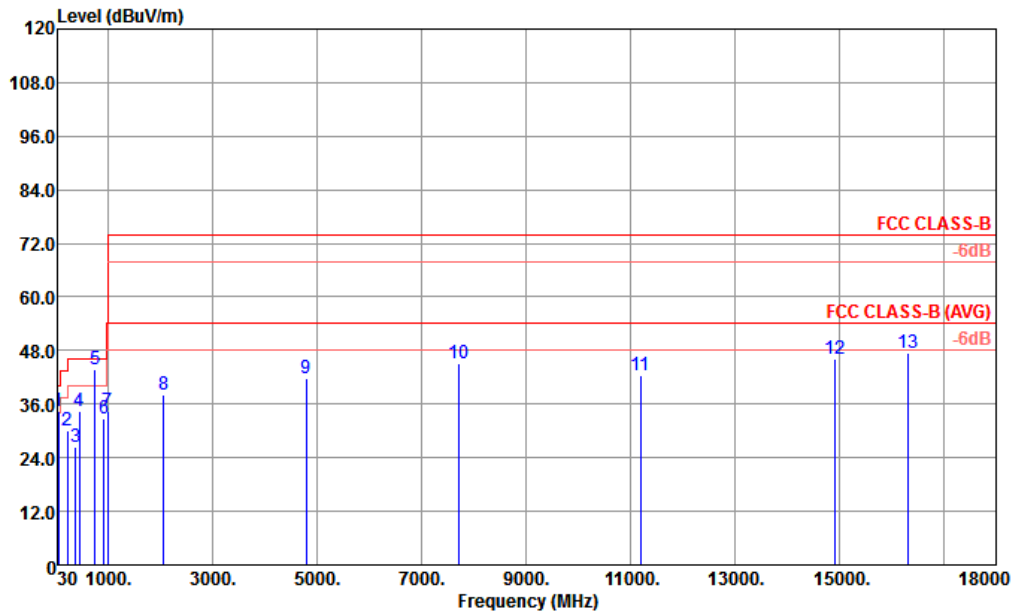

Site : 03CH02-KS
 Condition : FCC CLASS-B 3m LF 23182-3M VERTICAL

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 !	46.49	34.28	-5.72	40.00	50.60	14.83	0.79	31.94	100	0 Peak
2	226.91	30.17	-15.83	46.00	43.48	16.86	1.76	31.93	---	Peak
3	379.20	26.33	-19.67	46.00	35.12	21.12	2.19	32.10	---	Peak
4	451.95	34.42	-11.58	46.00	41.62	22.63	2.39	32.22	---	Peak
5 !	751.68	43.92			47.12	25.90	3.15	32.25	---	Peak
6	923.37	32.69	-13.31	46.00	33.44	26.99	3.50	31.24	---	Peak
7	995.15	34.35	-19.65	54.00	33.68	27.65	3.59	30.57	---	Peak
8	2064.00	38.08	-35.92	74.00	34.98	30.97	5.21	33.08	---	Peak
9	4800.00	41.69	-32.31	74.00	31.30	33.70	8.09	31.40	---	Peak
10	7704.00	45.23	-28.77	74.00	30.48	36.16	10.60	32.01	---	Peak
11	11187.00	42.40	-31.60	74.00	23.76	37.51	13.46	32.33	---	Peak
12	14913.00	45.98	-28.02	74.00	21.97	40.15	15.61	31.75	---	Peak
13	16326.00	47.48	-26.52	74.00	21.37	41.06	16.76	31.71	---	Peak



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 16, 2019	May 06, 2019	Apr. 15, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 12, 2018	May 06, 2019	Oct. 11, 2019	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Nov. 19, 2018	May 06, 2019	Nov. 18, 2019	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2018	May 06, 2019	Oct. 11, 2019	Conduction (CO01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max x 30dBm	Aug. 06, 2018	May 01, 2019	Aug. 05, 2019	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz-44G,MAX 30dB	Apr. 15, 2019	May 01, 2019	Apr. 16, 2020	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	23182	30MHz-2GHz	Dec. 29, 2018	May 01, 2019	Dec. 28, 2019	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 27, 2019	May 01, 2019	Jan. 26, 2020	Radiation (03CH02-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2019	May 01, 2019	Jan. 04, 2020	Radiation (03CH02-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18~40GHz	Jan. 14, 2019	May 01, 2019	Jan. 13, 2020	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	Aug. 06, 2018	May 01, 2019	Aug. 05, 2019	Radiation (03CH02-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Apr. 15, 2019	May 01, 2019	Apr. 14, 2020	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	May 01, 2019	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	May 01, 2019	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	May 01, 2019	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.9dB
-------------------------------------------------------------------------	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9dB
-------------------------------------------------------------------------	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
-------------------------------------------------------------------------	-------