



FCC RF Test Report

APPLICANT : Inseego Corp.
EQUIPMENT : 5G Enterprise Gateway
BRAND NAME : Inseego
MODEL NAME : S2000e-3
FCC ID : PKRISGS2000E3
STANDARD : 47 CFR Part 2, 22(H), 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on Dec. 16, 2020 and completely tested on Jan. 25, 2021. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

This product installed a RF module (Brand Name: Inseego, Model Name: MD2000, FCC ID: PKRISGMD2000) during the test, only RSE test items are tested in this report, all the other test results are quoted in module RF report.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Reviewed by: Jason Jia / Supervisor

Approved by: Alex Wang / Manager



Sporton International (Kunshan) Inc.

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant..... 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test 6

 1.5 Modification of EUT 6

 1.6 Testing Location 7

 1.7 Test Software 7

 1.8 Applicable Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Test Mode..... 8

 2.2 Connection Diagram of Test System 8

 2.3 Support Unit used in test configuration 9

 2.4 Frequency List of Low/Middle/High Channels 9

3 RADIATED TEST ITEMS 10

 3.1 Measuring Instruments..... 10

 3.2 Test Setup 10

 3.3 Test Result of Radiated Test..... 10

 3.4 Field Strength of Spurious Radiation Measurement 11

4 LIST OF MEASURING EQUIPMENT 12

5 UNCERTAINTY OF EVALUATION 13

APPENDIX A. TEST RESULTS OF RADIATED TEST

APPENDIX B. TEST SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description | Limit | Result | Remark |
|----------------|--|---|------------------------|--------|--|
| - | §2.1046 | Conducted Output Power | Reporting Only | PASS | 1 |
| | §22.913(a)(5) | Effective Radiated Power | < 7 Watts | PASS | 1 |
| | §24.232(c) | Equivalent Isotropic Radiated Power | < 2 Watts | PASS | 1 |
| | §27.50(d)(4) | Equivalent Isotropic Radiated Power | < 1 Watts | PASS | 1 |
| - | §24.232(d) | Peak-to-Average Ratio | < 13 dB | PASS | 1 |
| - | §2.1049 | Occupied Bandwidth | Reporting Only | PASS | 1 |
| - | §2.1051 §22.917(a) §24.238(a) §27.53(h) | Band Edge Measurement | < 43+10log10(P[Watts]) | PASS | 1 |
| - | §2.1051 §22.917(a) §24.238(a) §27.53(h) | Conducted Emission | < 43+10log10(P[Watts]) | PASS | 1 |
| - | §2.1055 §22.355 | Frequency Stability for Temperature & Voltage | < 2.5 ppm for Part 22 | PASS | 1 |
| | §2.1055 §24.235 §27.54 | | Within Authorized Band | | |
| 3.4 | §2.1053; §22.917(a); §24.238(a); §27.53(h) | Field Strength of Spurious Radiation | < 43+10log10(P[Watts]) | PASS | Under limit 36.17 dB at 7524.00 MHz |

Remark 1: Test items were leveraged from module RF report which can refer to Sporton Report No. "FG090125A"

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Inseego Corp.
9710 Scranton Road, Suite 200 San Diego, CA 92121

1.2 Manufacturer

MeiG Smart Technology Co., Ltd
Floor 2, Office Building No.5, Lingxia Road, Fenghuang Community, Fuyong Street, Bao 'an District, Shenzhen

1.3 Product Feature of Equipment Under Test

| Product Feature | |
|---------------------------------|-----------------------|
| Equipment | 5G Enterprise Gateway |
| Brand Name | Inseego |
| Model Name | S2000e-3 |
| FCC ID | PKRISGS2000E3 |
| EUT supports Radios application | WCDMA/LTE/5G NR/GNSS |
| IMEI Code | Radiation: N/A |
| HW Version | 1.01 |
| SW Version | 2.37 |
| EUT Stage | Identical Prototype |

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

| Standards-related Product Specification | |
|---|---|
| Tx Frequency | WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV : 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz |
| Rx Frequency | WCDMA Band II: 1930 MHz ~ 1990 MHz WCDMA Band IV : 2110 MHz ~ 2155 MHz WCDMA Band V: 869 MHz ~ 894 MHz |
| Antenna Type | Fixed External Antenna |
| Type of Modulation | WCDMA : BPSK HSDPA : QPSK HSUPA : QPSK HSPA+ : 16QAM (16QAM uplink is not supported) DC-HSDPA : 64QAM |

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

<FCC>-KS

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

| | | | |
|---------------------------|--|----------------------------|---------------------------------------|
| Test Firm | Sporton International (Kunshan) Inc. | | |
| Test Site Location | No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958 | | |
| Test Site No. | Sporton Site No. | FCC Designation No. | FCC Test Firm Registration No. |
| | 03CH06-KS | CN1257 | 314309 |

1.7 Test Software

| Item | Site | Manufacture | Name | Version |
|------|-----------|-------------|------|---------------|
| 1. | 03CH06-KS | AUDIX | E3 | 6.2009-8-24al |

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27(L)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 10th for WCDMA Band V/IV/II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

| Test Modes | |
|---------------|-------------------|
| Band | Radiated TCs |
| WCDMA Band V | RMC 12.2Kbps Link |
| WCDMA Band II | RMC 12.2Kbps Link |
| WCDMA Band IV | RMC 12.2Kbps Link |

2.2 Connection Diagram of Test System

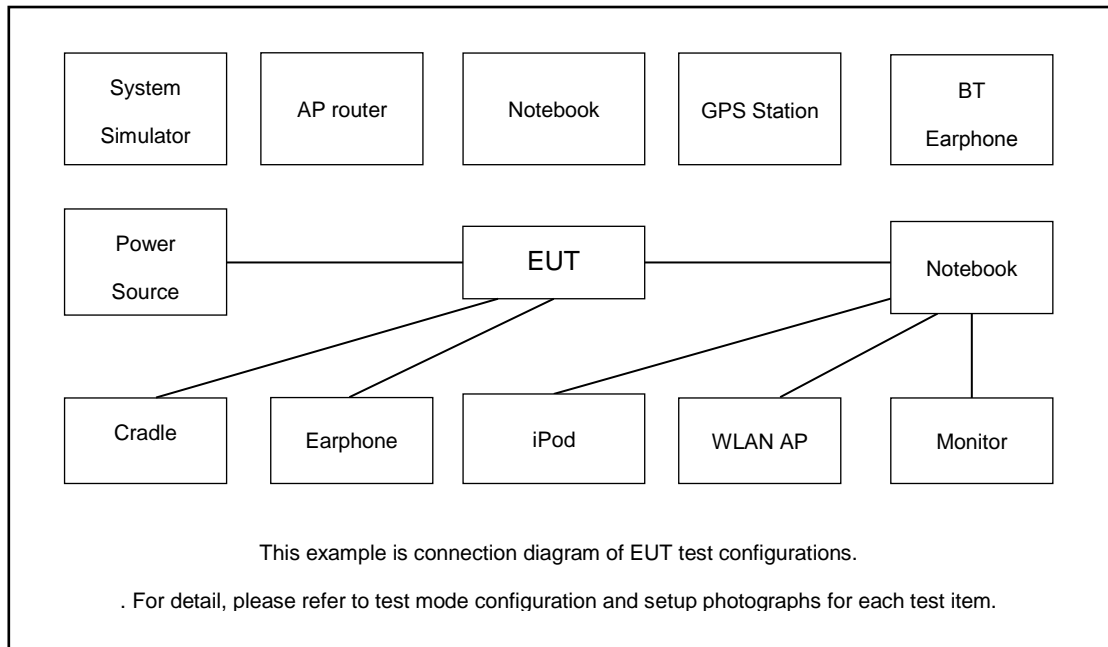



2.3 Support Unit used in test configuration

| Item | Equipment | Trade Name | Model No. | FCC ID | Data Cable | Power Cord |
|------|------------------|------------|---------------|--------|------------|-----------------|
| 1. | LTE Base Station | Anritsu | MT8820C/8821C | N/A | N/A | Unshielded,1.8m |
| 2. | Power Supply | GWINSTEK | PSS-2002 | N/A | N/A | Unshielded,1.8m |

2.4 Frequency List of Low/Middle/High Channels

| Frequency List | | | | |
|------------------|------------------------|--------|--------|---------|
| Band | Channel/Frequency(MHz) | Lowest | Middle | Highest |
| WCDMA Band V | Channel | 4132 | 4182 | 4233 |
| | Frequency | 826.4 | 836.4 | 846.6 |
| WCDMA Band II | Channel | 9262 | 9400 | 9538 |
| | Frequency | 1852.4 | 1880.0 | 1907.6 |
| WCDMA Band IV | Channel | 1312 | 1413 | 1513 |
| | Frequency | 1712.4 | 1732.6 | 1752.6 |


3 Radiated Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 For radiated test from 30MHz to 1GHz

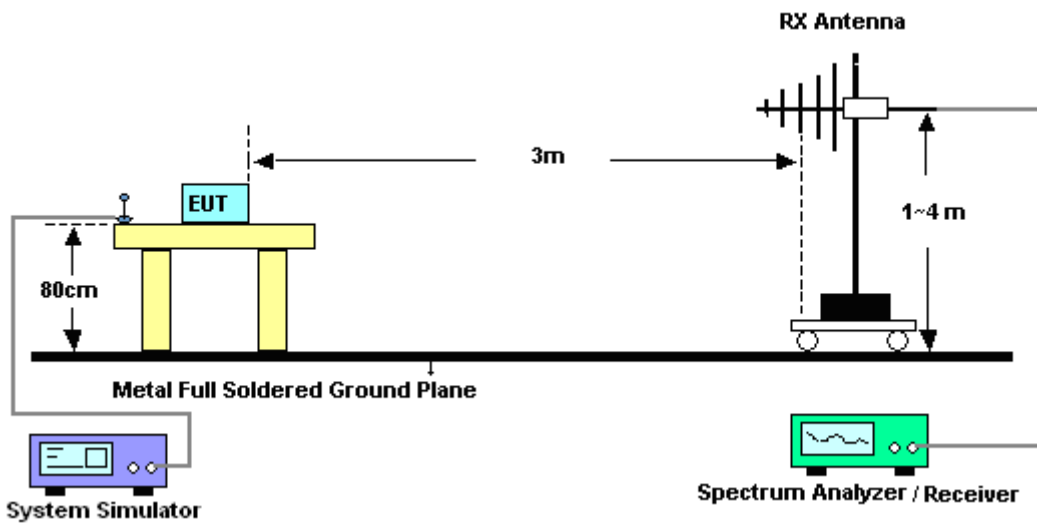

3.2.2 For radiated test above 1GHz

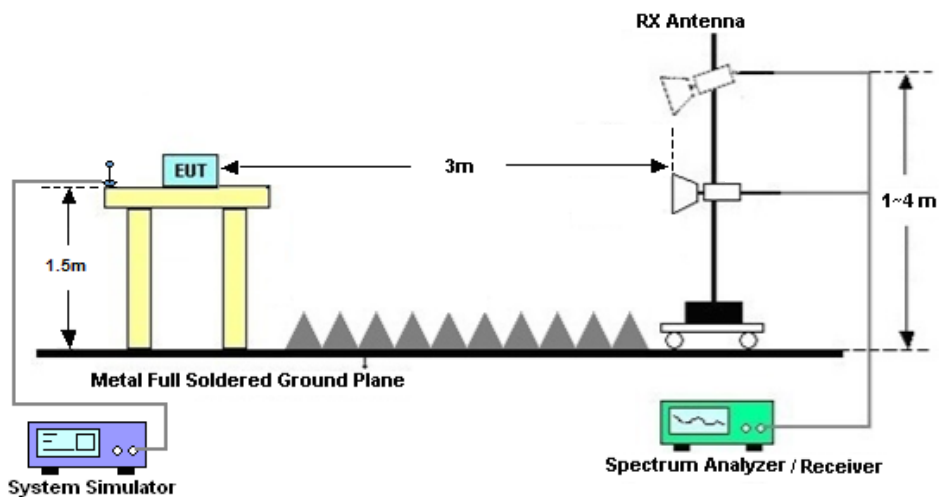

3.3 Test Result of Radiated Test

Please refer to Appendix A.



3.4 Field Strength of Spurious Radiation Measurement

3.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12. $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



4 List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|---------------------------|--------------|------------------------|------------|-----------------|------------------|---------------|---------------|-----------------------|
| EXA Spectrum Analyzer | Keysight | N9010A | MY55150208 | 10Hz-44GHz | Apr. 14, 2020 | Jan. 25, 2021 | Apr. 13, 2021 | Radiation (03CH06-KS) |
| Bilog Antenna | TeseQ | CBL6111D | 49921 | 30MHz-1GHz | May. 29, 2020 | Jan. 25, 2021 | May. 28, 2021 | Radiation (03CH06-KS) |
| Double Ridge Horn Antenna | ETS-Lindgren | 3117 | 00218652 | 1GHz~18GHz | Apr. 27, 2020 | Jan. 25, 2021 | Apr. 26, 2021 | Radiation (03CH06-KS) |
| SHF-EHF Horn | Com-power | AH-840 | 101115 | 18GHz~40GHz | Nov. 06, 2020 | Jan. 25, 2021 | Nov. 05, 2021 | Radiation (03CH06-KS) |
| Amplifier | SONOMA | 310N | 187289 | 9KHz ~1GHZ | Apr. 14, 2020 | Jan. 25, 2021 | Apr. 13, 2021 | Radiation (03CH06-KS) |
| Amplifier | MITEQ | EM18G40G GA | 060728 | 18~40GHz | Jan. 07, 2021 | Jan. 25, 2021 | Jan. 06, 2022 | Radiation (03CH06-KS) |
| high gain Amplifier | MITEQ | AMF-7D-00101800-30-10P | 2025788 | 1Ghz-18Ghz | Jan. 06, 2021 | Jan. 25, 2021 | Jan. 05, 2022 | Radiation (03CH06-KS) |
| Amplifier | Keysight | 83017A | MY53270203 | 500MHz~26.5GHz | Apr. 15, 2020 | Jan. 25, 2021 | Apr. 14, 2021 | Radiation (03CH06-KS) |
| AC Power Source | Chroma | 61601 | F104090004 | N/A | NCR | Jan. 25, 2021 | NCR | Radiation (03CH06-KS) |
| Turn Table | ChamPro | EM 1000-T | 060762-T | 0~360 degree | NCR | Jan. 25, 2021 | NCR | Radiation (03CH06-KS) |
| Antenna Mast | ChamPro | EM 1000-A | 060762-A | 1 m~4 m | NCR | Jan. 25, 2021 | NCR | Radiation (03CH06-KS) |

NCR: No Calibration Required



5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 2.5dB |
|---|-------|

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

| | |
|---|-------|
| Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y)) | 2.1dB |
|---|-------|



Appendix A. Test Results of Radiated Test

Radiated Spurious Emission

| WCDMA Band V(RMC 12.2Kbps) | | | | | | | | |
|----------------------------|-------------------|-------------|---------------|-------------------|--------------------|----------------------|-----------------------|--------------------|
| Channel | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Over Limit (dB) | S.G. Power (dBm) | TX Cable loss (dB) | TX Antenna Gain (dBi) | Polarization (H/V) |
| Middle | 1672 | -63.04 | -13 | -50.04 | -70.01 | 1.58 | 10.70 | H |
| | 2510 | -59.04 | -13 | -46.04 | -67.29 | 2.10 | 12.50 | H |
| | 3348 | -57.59 | -13 | -44.59 | -66.48 | 2.86 | 13.90 | H |
| | 1672 | -63.13 | -13 | -50.13 | -70.10 | 1.58 | 10.70 | V |
| | 2510 | -58.74 | -13 | -45.74 | -66.99 | 2.10 | 12.50 | V |
| | 3348 | -56.94 | -13 | -43.94 | -65.83 | 2.86 | 13.90 | V |

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

| WCDMA Band II(RMC 12.2Kbps) | | | | | | | | |
|-----------------------------|-------------------|-------------|---------------|-------------------|--------------------|----------------------|-----------------------|--------------------|
| Channel | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Over Limit (dB) | S.G. Power (dBm) | TX Cable loss (dB) | TX Antenna Gain (dBi) | Polarization (H/V) |
| Middle | 3759 | -53.98 | -13 | -40.98 | -66.24 | 2.64 | 14.90 | H |
| | 5640 | -51.86 | -13 | -38.86 | -63.72 | 2.94 | 14.80 | H |
| | 7524 | -49.17 | -13 | -36.17 | -58.94 | 3.39 | 13.16 | H |
| | 3759 | -54.15 | -13 | -41.15 | -66.41 | 2.64 | 14.90 | V |
| | 5640 | -51.57 | -13 | -38.57 | -63.43 | 2.94 | 14.80 | V |
| | 7524 | -49.56 | -13 | -36.56 | -59.33 | 3.39 | 13.16 | V |

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

| WCDMA Band IV(RMC 12.2Kbps) | | | | | | | | |
|-----------------------------|-------------------|-------------|---------------|-------------------|--------------------|----------------------|-----------------------|--------------------|
| Channel | Frequency (MHz) | ERP (dBm) | Limit (dBm) | Over Limit (dB) | S.G. Power (dBm) | TX Cable loss (dB) | TX Antenna Gain (dBi) | Polarization (H/V) |
| Middle | 3465 | -56.75 | -13 | -43.75 | -67.49 | 2.60 | 13.34 | H |
| | 5199 | -51.50 | -13 | -38.50 | -62.01 | 3.01 | 13.52 | H |
| | 6936 | -51.27 | -13 | -38.27 | -61.47 | 3.27 | 13.47 | H |
| | 3465 | -56.22 | -13 | -43.22 | -66.96 | 2.60 | 13.34 | V |
| | 5199 | -50.95 | -13 | -37.95 | -61.46 | 3.01 | 13.52 | V |
| | 6936 | -51.42 | -13 | -38.42 | -61.62 | 3.27 | 13.47 | V |

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.