

**MFA** **M. Flom Associates, Inc. - Global Compliance Center**  
3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176  
www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

---

Date of Report: August 10, 2001  
Date of Submission: August 16, 2001

Federal Communications Commission  
Via: Electronic Filing

Attention: Authorization & Evaluation Division

Applicant: Novatel Wireless Inc.  
Equipment: NVW-C201  
FCC ID: PKRNVWC201  
FCC Rules: 24, Confidentiality

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

Filing fees are attached.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,



Morton Flom, P. Eng.

enclosure(s)  
cc: Applicant  
MF/cvr

LIST OF EXHIBITS  
 (FCC **CERTIFICATION** (PCS TRANSMITTERS) - REVISED 9/28/98)

APPLICANT: Novatel Wireless Inc.

FCC ID: PKRNVWC201

BY APPLICANT:

- 1. LETTER OF AUTHORIZATION x
- 2. IDENTIFICATION DRAWINGS, 2.1033(c)(11)
  - x   ID LABEL
  - x   LOCATION OF LABEL
  - x   COMPLIANCE STATEMENT
  - x   LOCATION OF COMPLIANCE STATEMENT
- 3. PHOTOGRAPHS, 2.1033(c)(12) x
- 4. CONFIDENTIALITY REQUEST: 0.457 and 0.459 x
- 5. DOCUMENTATION: 2.1033(c)
  - (3) USER MANUAL x
  - (9) TUNE UP INFO x
  - (10) SCHEMATIC DIAGRAM x
  - (10) CIRCUIT DESCRIPTION x
  - BLOCK DIAGRAM x
  - PARTS LIST x
  - ACTIVE DEVICES x

BY M.F.A. INC.

- A. TESTIMONIAL & STATEMENT OF CERTIFICATION
- B. STATEMENT OF QUALIFICATIONS

**MFA** **M. Flom Associates, Inc. - Global Compliance Center**  
3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176  
www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

---

T R A N S M I T T E R     C E R T I F I C A T I O N

of

FCC ID: PKRNVWC201  
MODEL: NVW-C201

to

FEDERAL COMMUNICATIONS COMMISSION

Rule Parts 24, Confidentiality

DATE OF REPORT: August 10, 2001

ON THE BEHALF OF THE APPLICANT:

Novatel Wireless Inc.

AT THE REQUEST OF:

P.O. NWS04403

Applicant:

Novatel Wireless Inc.  
9360 Towne Centre Dr., Suite 110  
San Diego, CA 92121

Attention of:

Patrick O'Bright, CDMA Program Manager  
888-888-9231; 858-320-8800; FAX:-2888  
Email: pobright@novatelwireless.com  
and/or John Ross  
858-812-0614; FAX:-2888  
Email: jross@novatelwireless.com



SUPERVISED BY:

Morton Flom, P. Eng.

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.


Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c)(14)	Rule Summary	5
	Standard Test Conditions and Engineering Practices	6
2.1046(a), 24.232(b)		
	Carrier Output Power (Radiated)	7
2.1051, 2.1049(c), 24, 24.238(b)		
	Transmitter Conducted Measurements	9
2.1053(a)	Field Strength of Spurious Radiation	17
2.1055(a)(1), 24.235		
	Frequency Stability (Temperature Variation)	21
2.1055(b)(1)	Frequency Stability (Voltage Variation)	21
2.202(g)	Necessary Bandwidth and Emission Bandwidth	24

PAGE NO. 1 of 24.

*Required information per ISO/IEC Guide 25-1990, paragraph 13.2:*

- a) TEST REPORT
- b) Laboratory: M. Flom Associates, Inc.  
 (FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107  
 (Canada: IC 2044) Chandler, AZ 85225
- c) Report Number: d0180034
- d) Client: Novatel Wireless Inc.  
 9360 Towne Centre Dr., Suite 110  
 San Diego, CA 92121
- e) Identification: NVW-C201  
 Description: FCC ID: PKRNVWC201  
 CDMA PCMCIA Card
- f) EUT Condition: Not required unless specified in individual tests.
- g) Report Date: August 10, 2001  
 EUT Received: August 1, 2001
- h, j, k): As indicated in individual tests.
- i) Sampling method: No sampling procedure used.
- l) Uncertainty: In accordance with MFA internal quality manual.
- m) Supervised by:   
 Morton Flom, P. Eng.
- n) Results: The results presented in this report relate only to the item tested.
- o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO. 2 of 24.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATION

IN ACCORDANCE WITH FCC RULES AND REGULATIONS,  
VOLUME II, PART 2 AND TO

24, Confidentiality

Sub-part 2.1033

(c)(1): NAME AND ADDRESS OF APPLICANT:

Novatel Wireless Inc.  
9360 Towne Centre Dr., Suite 110  
San Diego, CA 92121

MANUFACTURER:

Applicant

(c)(2): FCC ID: PKRNVWC201

MODEL NO: NVW-C201

(c)(3): INSTRUCTION MANUAL(S):

PLEASE SEE ATTACHED EXHIBITS

(c)(4): TYPE OF EMISSION: 1M25F9W

(c)(5): FREQUENCY RANGE, MHz: 1850 to 1910

(c)(6): POWER RATING, Watts: 0.30 EIRP  
     Switchable      Variable   x   N/A

(c)(7): MAXIMUM POWER RATING, Watts: 1

PAGE NO. 3 of 24.

Subpart 2.1033 (continued)

(c)(8): VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE, INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual  
 COLLECTOR VOLTAGE, Vdc = per manual  
 SUPPLY VOLTAGE, Vdc = 5

(c)(9): TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c)(10): CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

PLEASE SEE ATTACHED EXHIBITS

(c)(11): LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c)(12): PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c)(13): DIGITAL MODULATION DESCRIPTION:


     ATTACHED EXHIBITS  
  x   N/A

(c)(14): TEST AND MEASUREMENT DATA:

FOLLOWS



M. Flom Associates, Inc. is accredited by the American Association for Laboratory Association (A2LA) as shown in the scope below.



**THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION**

**ACCREDITED LABORATORY**

A2LA has accredited

**M. FLOM ASSOCIATES, INC.**  
Chandler, AZ

for technical competence in the field of

**Electrical (EMC) Testing**


The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC 17025 - 1999 "General Requirements for the Competence of Testing and Calibration Laboratories" and any additional program requirements in the identified field of testing. Testing and calibration laboratories that comply with this International Standard also operate in accordance with ISO 9001 or ISO 9002.

Presented this 2<sup>nd</sup> day of March, 2001.



*Peter Abney*  
President  
For the Accreditation Council  
Certificate Number 1008.01  
Valid to December 31, 2002

For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical (EMC) Scope of Accreditation



**American Association for Laboratory Accreditation**

SCOPE OF ACCREDITATION TO ISO/IEC 17025-1999

M. FLOM ASSOCIATES, INC.  
Electronic Testing Laboratory  
3356 North San Marcos Place, Suite 107  
Chandler, AZ 85223  
Morton Flom Phone: 480 926 3100

**ELECTRICAL (EMC)**

Valid to: December 31, 2002 Certificate Number: 1008-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following electromagnetic compatibility tests:

Tests	Standard(s)
RF Emissions	FCC Part 15 (Subparts B and C) using ANSI C63.4-1992; CISPR 11; CISPR 13; CISPR 14; CISPR 22; EN 55011; EN 55013; EN 55014; EN 55022; EN 50081-1; EN 50081-2; ICES-003; AS/NZS 1044; AS/NZS 1053; AS/NZS 3548; AS/NZS 4251.1; CNS 13438
Harmonic Currents	EN 61000-3-2
Fluctuation and Flicker	EN 61000-3-3
RF Immunity	EN: 50082-1, 50082-2 (both excluding "Power Frequency Magnetic Field Immunity" and "Voltage Dips, Short Interruptions, and Line Voltage Variations"); AS/NZS 4251.1
Radiated Susceptibility	EN 61000-4-3; ENV 50140; ENV 50204; IEC 1000-4-3; IEC 801-3
EFT	EN 61000-4-4; IEC 1000-4-4; IEC 801-4
Surge	EN 61000-4-5; ENV 50142; IEC 1000-4-5; IEC 801-5
47 CFR (FCC)	2, 21, 22, 23, 24, 74, 80, 87, 90, 95, 97

*Peter Abney*

5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8373 • Phone: 301-644 3248 • Fax: 301-662 2974

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not covered by this laboratory's A2LA accreditation.

PAGE NO.

5 of 24.

Sub-part  
2.1033(c)(14):TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- \_\_\_\_\_ 21 - Domestic Public Fixed Radio Services
- \_\_\_\_\_ 22 - Public Mobile Services
- \_\_\_\_\_ 22 Subpart H - Cellular Radiotelephone Service
- \_\_\_\_\_ 22.901(d) - Alternative technologies and auxiliary services
- \_\_\_\_\_ 23 - International Fixed Public Radiocommunication services
- x\_\_\_\_\_ 24 - Personal Communications Services
- \_\_\_\_\_ 74 Subpart H - Low Power Auxiliary Stations
- \_\_\_\_\_ 80 - Stations in the Maritime Services
- \_\_\_\_\_ 80 Subpart E - General Technical Standards
- \_\_\_\_\_ 80 Subpart F - Equipment Authorization for Compulsory Ships
- \_\_\_\_\_ 80 Subpart K - Private Coast Stations and Marine Utility Stations
- \_\_\_\_\_ 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- \_\_\_\_\_ 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- \_\_\_\_\_ 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- \_\_\_\_\_ 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- \_\_\_\_\_ 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- \_\_\_\_\_ 80 Subpart X - Voluntary Radio Installations
- \_\_\_\_\_ 87 - Aviation Services
- \_\_\_\_\_ 90 - Private Land Mobile Radio Services
- \_\_\_\_\_ 94 - Private Operational-Fixed Microwave Service
- \_\_\_\_\_ 95 Subpart A - General Mobile Radio Service (GMRS)
- \_\_\_\_\_ 95 Subpart C - Radio Control (R/C) Radio Service
- \_\_\_\_\_ 95 Subpart D - Citizens Band (CB) Radio Service
- \_\_\_\_\_ 95 Subpart E - Family Radio Service
- \_\_\_\_\_ 95 Subpart F - Interactive Video and Data Service (IVDS)
- \_\_\_\_\_ 97 - Amateur Radio Service
- \_\_\_\_\_ 101 - Fixed Microwave Services

PAGE NO.

6 of 24.

STANDARD TEST CONDITIONS  
and  
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000 Draft, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

FOR PCS EQUIPMENT:

Pursuant to Section 24.51(d), the EUT complies with IEEE C95.1-1991, "IEEE Standards for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz."

The EUT uses digital modulation, as such, measurements of the modulation characteristics are not applicable. The applicant has provided a description of the modulation particular to the EUT.

Pursuant to Section 24.238(c), the EUT was tested at it's lowest and highest possible tuned frequencies.

GUIDES:

This device was tested using the following Guide(s):

N/A

PAGE NO. 7 of 24.  
NAME OF TEST: Carrier Output Power (Radiated)  
SPECIFICATION: 47 CFR 2.1046(a), 24.232(b)  
GUIDE: As indicated on page 6  
TEST EQUIPMENT: As per attached page


MEASUREMENT PROCEDURE (RADIATED)

1. The EUT was placed on an open-field site and its radiated field strength at a known distance was measured by means of a spectrum analyzer. Equivalent loading was calculated from the equation  $P_t = ((E \times R)^2 / 30)$  watts, where  $R = 3m$ .
2. Measurement accuracy is  $\pm 1.5$  dB.


MEASUREMENT RESULTS

<u>FREQUENCY TUNED, MHz</u>	<u>FREQUENCY EMISSION, MHz</u>	<u>METER, dBuV/m</u>	<u>CF, dB</u>	<u>EIRP, dBm</u>	<u>EIRP, Watts</u>
1851.250000	1851.046000	89.67	30.28	24.7	$\leq 0.30$
1880.000000	1879.796000	89.5	30.39	24.7	$\leq 0.30$
1908.750000	1908.474000	88.83	30.48	24.1	$\leq 0.30$

PERFORMED BY:

  
 Doug Noble, B.A.S. E.E.T.

TRANSMITTER RADIATED MEASUREMENTS

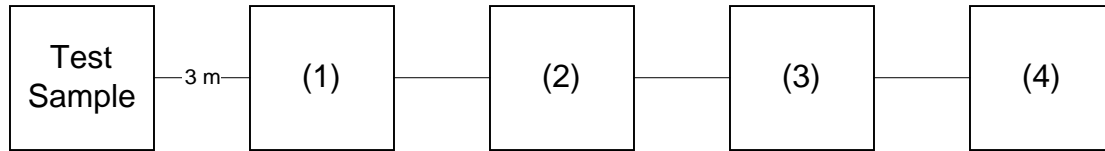

Transmitter Radiated Measurements


Asset Description (as applicable)	s/n
(1) <u>TRANSDUCER</u>	
i00091 Emco 3115	001469
i00089 Aprel Log Periodic	001500
(2) <u>HIGH PASS FILTER</u>	
i00 Narda $\mu$ PAD (In-Band Only)	
i00 Trilithic (Out-Of-Band Only)	
(3) <u>PREAMP</u>	
i00028 HP 8449 (+30 dB)	2749A00121
(4) <u>SPECTRUM ANALYZER</u>	
i00048 HP 8566B	2511A01467
i00043 HP 8558B	2004A02076
i00057 HP 8557A	1531A00191
i00029 HP 8563E	3213A00104

PAGE NO. 9 of 24.  
NAME OF TEST: Transmitter Conducted Measurements  
SPECIFICATION: 47 CFR 2.1051: Unwanted (spurious) Emissions  
2.1049(c), 24.238(b): Occupied Bandwidth  
24: Emissions at Band Edges  
GUIDE: As indicated on page 6  
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE


1. The EUT and test equipment were set up as shown on the following page with the Spectrum Analyzer connected.
2. The low and high channels for all RF powers within the designated frequency block(s) were measured.
3. MEASUREMENT RESULTS: ATTACHED

PERFORMED BY:

  
Doug Noble, B.A.S. E.E.T.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)  
 TEST B. OUT-OF-BAND SPURIOUS

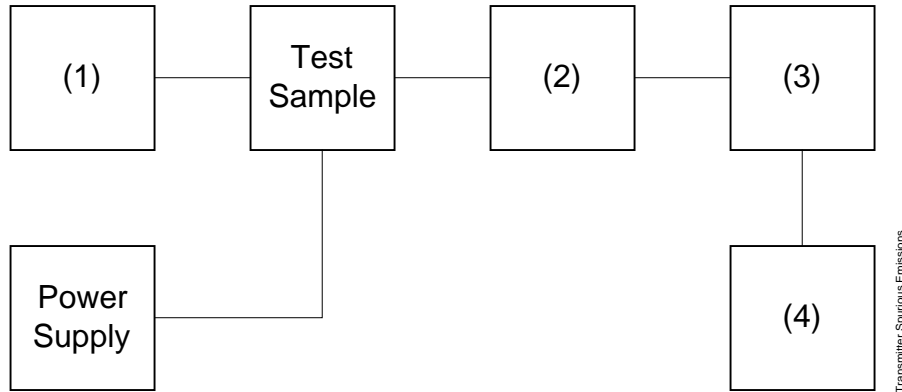

Asset Description (as applicable)	s/n
(1) <u>AUDIO OSCILLATOR/GENERATOR</u>	
i00010 HP 204D	1105A04683
i00017 HP 8903A	2216A01753
i00012 HP 3312A	1432A11250
(2) <u>COAXIAL ATTENUATOR</u>	
i00122 Narda 766-10	7802
i00123 Narda 766-10	7802A
i00069 Bird 8329 (30 dB)	1006
i00113 Sierra 661A-3D	1059
(3) <u>FILTERS; NOTCH, HP, LP, BP</u>	
i00126 Eagle TNF-1	100-250
i00125 Eagle TNF-1	50-60
i00124 Eagle TNF-1	250-850
(4) <u>SPECTRUM ANALYZER</u>	
i00048 HP 8566B	2511A01467
i00029 HP 8563E	3213A00104

PAGE NO. 11 of 24.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)  
 g0180014: 2001-Aug-01 Wed 10:05:00  
 STATE: 1:Low Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
1851.250000	3702.410000	-84.1	-79.6	-71.1
1880.000000	3759.989000	-83.5	-79	-70.5
1908.750000	3817.679000	-84.1	-79.6	-71.1
1851.250000	5554.087000	-83.3	-78.8	-70.3
1880.000000	5639.879000	-81.8	-77.3	-68.8
1908.750000	5726.288000	-83.3	-78.8	-70.3
1851.250000	7405.393000	-77.8	-73.3	-64.8
1880.000000	7520.461000	-76.8	-72.3	-63.8
1908.750000	7634.819000	-76.7	-72.2	-63.7
1851.250000	9256.403000	-77.4	-72.9	-64.4
1880.000000	9399.869000	-78.4	-73.9	-65.4
1908.750000	9543.334000	-77.8	-73.3	-64.8
1851.250000	11107.495000	-76.4	-71.9	-63.4
1880.000000	11280.063000	-77	-72.5	-64
1908.750000	11452.734000	-76.7	-72.2	-63.7
1851.250000	12958.831000	-71.9	-67.4	-58.9
1880.000000	13159.763000	-73.2	-68.7	-60.2
1908.750000	13361.607000	-73.1	-68.6	-60.1
1851.250000	14809.574000	-72.2	-67.7	-59.2
1880.000000	15039.702000	-71.7	-67.2	-58.7
1908.750000	15269.857000	-70.9	-66.4	-57.9
1851.250000	16661.312000	-71.2	-66.7	-58.2
1880.000000	16920.391000	-71.2	-66.7	-58.2
1908.750000	17178.978000	-70.8	-66.3	-57.8
1851.250000	18512.918000	-71	-66.5	-58
1880.000000	18800.294000	-67	-62.5	-54
1908.750000	19087.354000	-66.3	-61.8	-53.3
1851.250000	20363.980000	-63.3	-58.8	-50.3
1880.000000	20680.439000	-63.9	-59.4	-50.9
1908.750000	20996.257000	-63.8	-59.3	-50.8




PAGE NO. 12 of 24.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)  
 g0180013: 2001-Aug-01 Wed 10:03:00  
 STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
1851.250000	3702.508000	-50.7	-74.4	-37.7
1880.000000	3760.130000	-48.7	-72.4	-35.7
1908.750000	3817.027000	-51.9	-75.6	-38.9
1851.250000	5553.999000	-51.9	-75.6	-38.9
1880.000000	5639.875000	-49.4	-73.1	-36.4
1908.750000	5725.929000	-52.1	-75.8	-39.1
1851.250000	7405.292000	-47.6	-71.3	-34.6
1880.000000	7520.058000	-46.7	-70.4	-33.7
1908.750000	7635.211000	-48.3	-72	-35.3
1851.250000	9255.873000	-47	-70.7	-34
1880.000000	9399.549000	-48.7	-72.4	-35.7
1908.750000	9544.014000	-46.7	-70.4	-33.7
1851.250000	11107.720000	-47.4	-71.1	-34.4
1880.000000	11280.142000	-47.6	-71.3	-34.6
1908.750000	11452.185000	-46.8	-70.5	-33.8
1851.250000	12958.436000	-42.9	-66.6	-29.9
1880.000000	13160.061000	-41.5	-65.2	-28.5
1908.750000	13361.690000	-42.2	-65.9	-29.2
1851.250000	14810.016000	-41.9	-65.6	-28.9
1880.000000	15040.257000	-41.7	-65.4	-28.7
1908.750000	15269.627000	-41.5	-65.2	-28.5
1851.250000	16660.909000	-42.4	-66.1	-29.4
1880.000000	16919.703000	-40.8	-64.5	-27.8
1908.750000	17178.618000	-40.6	-64.3	-27.6
1851.250000	18512.435000	-40	-63.7	-27
1880.000000	18800.091000	-35.7	-59.4	-22.7
1908.750000	19087.478000	-36.8	-60.5	-23.8
1851.250000	20363.460000	-33.7	-57.4	-20.7
1880.000000	20680.220000	-34.6	-58.3	-21.6
1908.750000	20996.318000	-34.1	-57.8	-21.1

PAGE NO. 13 of 24.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g0180012: 2001-Aug-01 Wed 09:48:00  
STATE: 1:Low Power

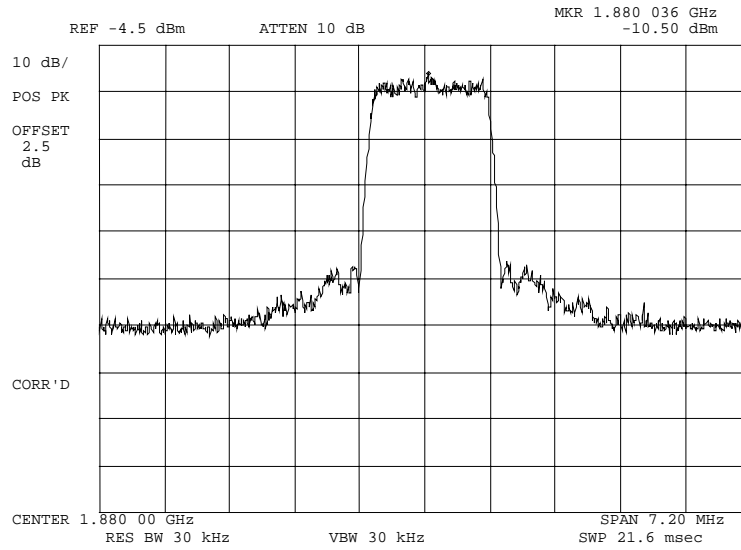


POWER: LOW  
MODULATION: CDMA

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 14 of 24.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g0180011: 2001-Aug-01 Wed 09:46:00  
STATE: 2:High Power

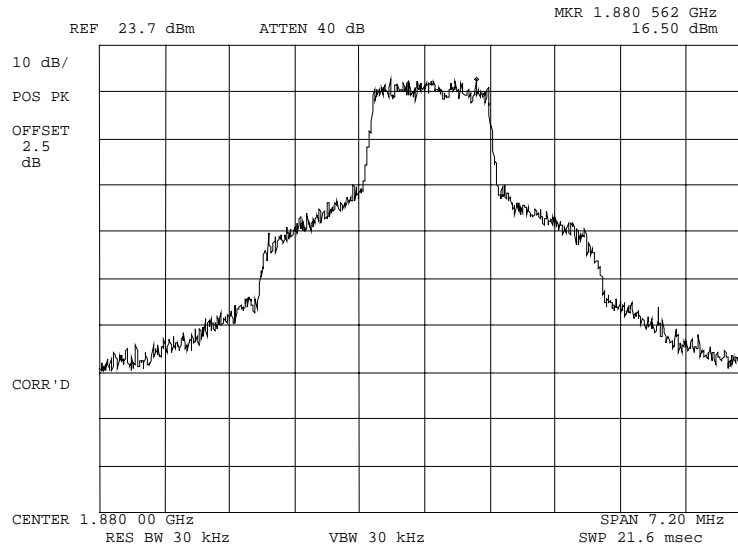


POWER: HIGH  
MODULATION: CDMA

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 15 of 24.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g0180009: 2001-Aug-01 Wed 09:44:00  
STATE: 2:High Power

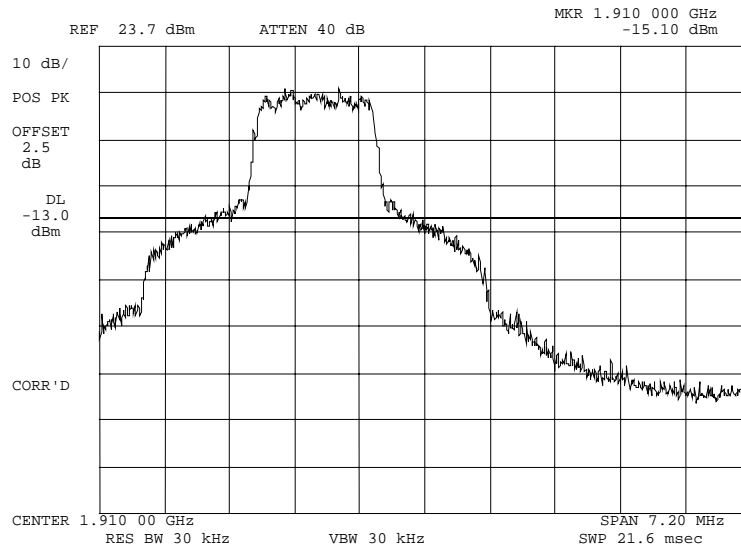


POWER: HIGH  
MODULATION: CDMA  
UPPER BANDEDGE CH 1175

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 16 of 24.

NAME OF TEST: Emission Masks (Occupied Bandwidth)  
g0180010: 2001-Aug-01 Wed 09:45:00  
STATE: 2:High Power

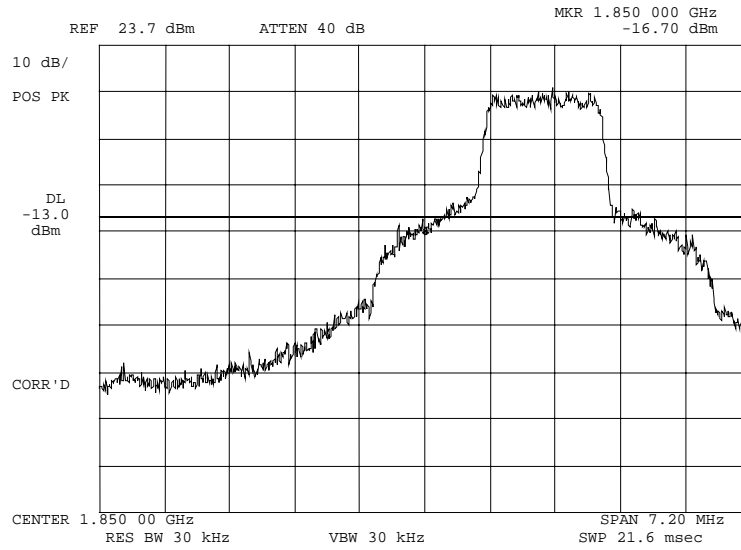

POWER: HIGH  
MODULATION: CDMA  
LOWER BANDEDGE CH 025

PERFORMED BY:

Doug Noble, B.A.S. E.E.T.

PAGE NO. 17 of 24.

NAME OF TEST: Field Strength of Spurious Radiation

SPECIFICATION: 47 CFR 2.1053(a)


GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 1.2.12

MEASUREMENT PROCEDURE

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

1.2.12.2 Method of Measurement


- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
- 1) Resolution Bandwidth  $\leq 3$  kHz.
  - 2) Video Bandwidth  $\geq 10$  kHz
  - 3) Sweep Speed  $\leq 2000$  Hz/second
  - 4) Detector Mode = Positive Peak
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

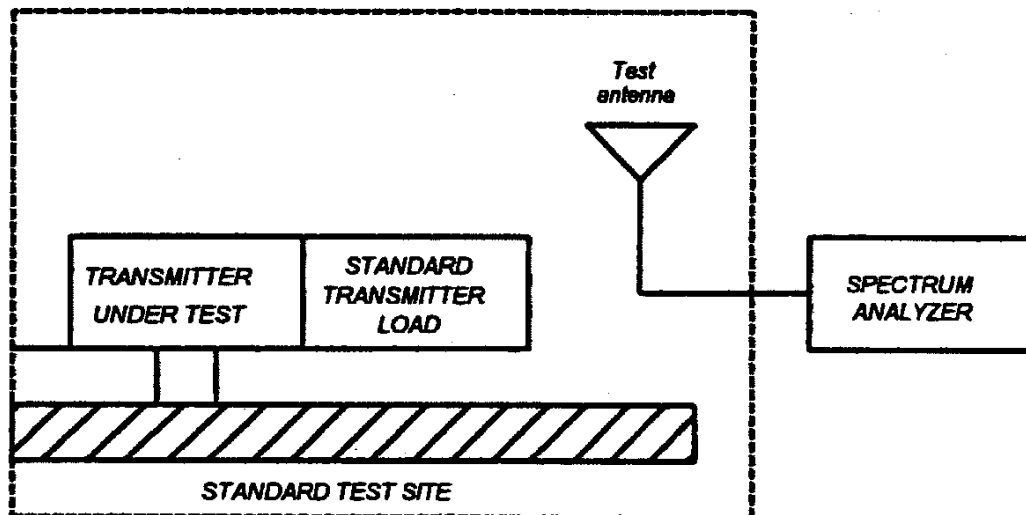

PAGE NO. 18 of 24.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

- D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to  $\pm$  the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

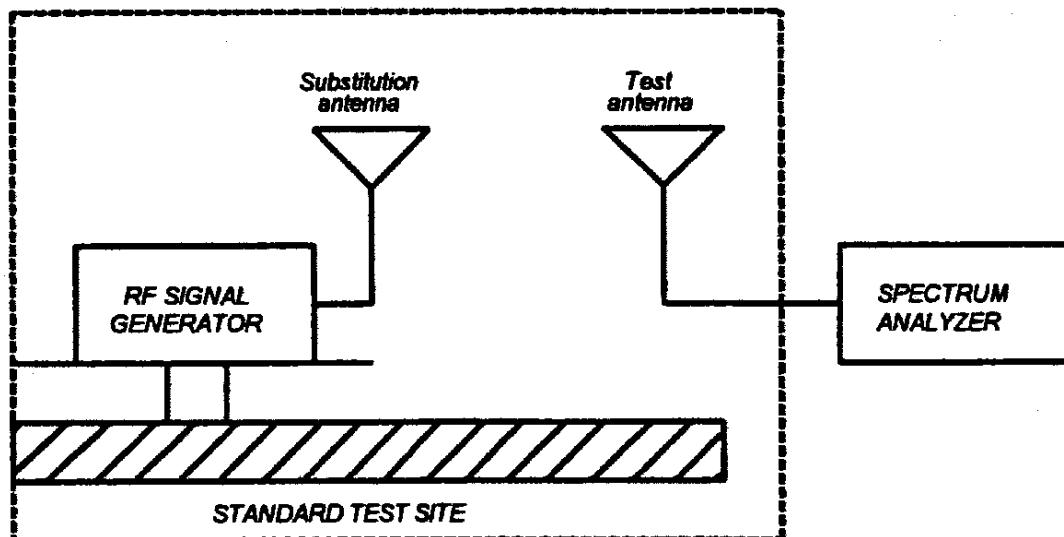

- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in step B).
- I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

PAGE NO. 19 of 24.

NAME OF TEST: Field Strength of Spurious Radiation (Cont.)

- J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.
- K) Repeat step J) with both antennas vertically polarized for each spurious frequency.
- L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.
- M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

Radiated spurious emissions dB =  
 $10 \log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step l)}$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment:

Asset Description (as applicable)	s/n	Cycle	Last Cal
<u>TRANSDUCER</u>			
i00088 EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-00
i00065 EMCO 3301-B Active Monopole	2635	12 mo.	Sep-00
i00089 Aprel 2001 200MHZ-1GHz	001500	12 mo.	Sep-00
i00103 EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Sep-00
<u>AMPLIFIER</u>			
i00028 HP 8449A	2749A00121	12 mo.	Mar-01
<u>SPECTRUM ANALYZER</u>			
i00029 HP 8563E	3213A00104	12 mo.	Aug-01
i00033 HP 85462A	3625A00357	12 mo.	May-01
i00048 HP 8566B	2511AD1467	6 mo.	May-01

Per ANSI C63.4-1992/2000 Draft, 10.1.4



PAGE NO. 20 of 24.

NAME OF TEST: Field Strength of Spurious Radiation  
 g0180016: 2001-Aug-02 Thu 09:50:00  
 STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV	CF, dB	EIRP, dBm	MARGIN, dB
1851.250000	3703.033333	47	6.5	-41.7	-28.7
1880.000000	3760.791667	52.17	6.63	-36.4	-23.4
1908.750000	3816.725000	42.5	6.73	-46	-33
1851.250000	5553.758333	40.83	10.25	-44.1	-31.1
1880.000000	5640.275000	43.5	10.4	-41.3	-28.3
1908.750000	5726.183333	34.5	10.56	-50.2	-37.1
1851.250000	7405.008333	39.17	13.31	-42.7	-29.7
1880.000000	7520.008333	38.33	13.49	-43.4	-30.4
1908.750000	7635.058333	31	13.67	-50.6	-37.5
1851.250000	9256.225000	41.17	15.39	-38.7	-25.6
1880.000000	9400.008333	41.17	15.51	-38.5	-25.5
1908.750000	9543.808333	32.33	15.63	-47.3	-34.2
1851.250000	11107.541667	40.5	17.35	-37.4	-24.4
1880.000000	11279.991667	43	17.4	-34.8	-21.8
1908.750000	11452.558333	31	17.45	-46.8	-33.8
1851.250000	12958.791667	40.17	17.36	-37.7	-24.7
1880.000000	13159.991667	38.83	17.62	-38.8	-25.8
1908.750000	13361.025000	32.5	17.87	-44.9	-31.8
1851.250000	14810.041667	40.17	18.29	-36.8	-23.7
1880.000000	15039.991667	40.33	18.19	-36.7	-23.7
1908.750000	15269.966667	31.67	18.1	-45.5	-32.4
1851.250000	16661.291667	39.83	19.14	-36.3	-23.2
1880.000000	16919.991667	38.33	19.65	-37.2	-24.2
1908.750000	17178.716667	28.5	20.28	-46.4	-33.4

PAGE NO. 21 of 24.

NAME OF TEST: Frequency Stability (Temperature Variation)

SPECIFICATION: 47 CFR 2.1055(a)(1), 24.235

GUIDE: As indicated on page 6

TEST CONDITIONS: As Indicated

TEST EQUIPMENT: As attached page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

NAME OF TEST: Frequency Stability (Voltage Variation)

SPECIFICATION: 47 CFR 2.1055(b)(1)

GUIDE: As indicated on page 6


TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at 25±5°C and connected as for "Frequency Stability - Temperature Variation"
2. The powersupply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.
4. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP

- TEST A. OPERATIONAL STABILITY
- TEST B. CARRIER FREQUENCY STABILITY
- TEST C. OPERATIONAL PERFORMANCE STABILITY
- TEST D. HUMIDITY
- TEST E. VIBRATION
- TEST F. ENVIRONMENTAL TEMPERATURE
- TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION
- TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

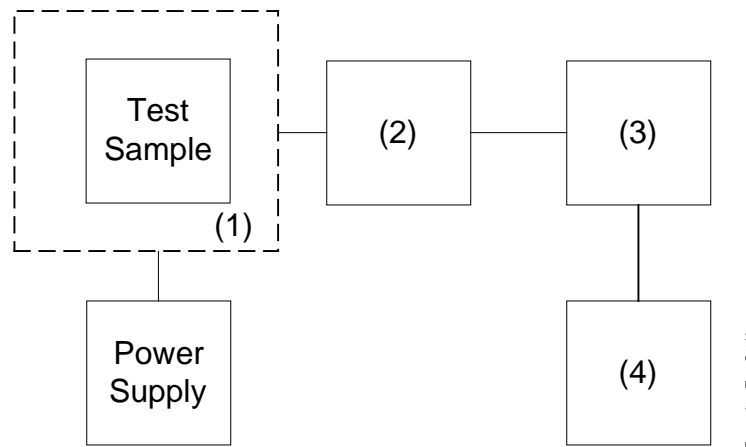

Transmitter Test Set-Up

Asset Description s/n  
(as applicable)

(1)	<u>TEMPERATURE, HUMIDITY, VIBRATION</u>	
i00027	Tenney Temp. Chamber	9083-765-234
i00	Weber Humidity Chamber	
i00	L.A.B. RVH 18-100	
(2)	<u>COAXIAL ATTENUATOR</u>	
i00122	NARDA 766-10	7802
i00123	NARDA 766-10	7802A
i00113	SIERRA 661A-3D	1059
i00069	BIRD 8329 (30 dB)	10066
(3)	<u>R.F. POWER</u>	
i00014	HP 435A POWER METER	1733A05839
i00039	HP 436A POWER METER	2709A26776
i00020	HP 8901A POWER MODE	2105A01087
(4)	<u>FREQUENCY COUNTER</u>	
i00042	HP 5383A	1628A00959
i00019	HP 5334B	2704A00347
i00020	HP 8901A	2105A01087

PAGE NO. 23 of 24.

NAME OF TEST: Frequency Stability (Temperature Variation)

Operating Frequency:	188000000	Hz
Channel:	600	
Reference Voltage:	5.0	VDC
Deviation Limit:	± 0.00025/2.5	%/ppm

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Deviation (%)
100%	5.0	+20 (Ref)	1,880,000,047	0.0000000%
100%		-30	1,879,999,940	-0.0000057%
100%		-20	1,880,000,069	0.0000012%
100%		-10	1,880,000,028	-0.0000010%
100%		0	1,880,000,038	-0.0000005%
100%		+10	1,880,000,045	-0.0000001%
100%		+20	1,880,000,047	0.0000000%
100%		+25	1,879,999,950	-0.0000051%
100%		+30	1,879,999,934	-0.0000060%
100%		+40	1,880,000,052	0.0000003%
100%		+50	1,880,000,054	0.0000004%
100%		+60	1,880,000,062	0.0000008%
85%		4.25	+20	1,879,999,932
115%	5.75	+20	1,879,999,940	-0.0000057%

PAGE NO. 24 of 24.

NAME OF TEST: Necessary Bandwidth and Emission Bandwidth

SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 1M25F9W

NECESSARY BANDWIDTH:

NECESSARY BANDWIDTH ( $B_N$ ), kHz = 125,000  
(measured at the 99.75% power bandwidth)



PERFORMED BY:  
END

OF

Doug Noble, B.A.S. E.E.T.  
TEST REPORT

TESTIMONIAL  
AND  
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:



Morton Flom, P. Eng.