

**MFA** **M. Flom Associates, Inc. - Global Compliance Center**  
3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176  
www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

---

## Transmitter Certification

of

FCC ID: PKRNVWFB2C  
Model: FB200C

to

### Federal Communications Commission

Rule Part(s) 24E, Confidentiality

**Date Of Report:** November 20, 2003

#### On the Behalf of the Applicant:

Novatel Wireless Inc.

#### At the Request of:

P.O. NWS09386

Novatel Wireless Inc.  
9255 Towne Centre Dr., Suite 225  
San Diego, CA 92121-3030

#### Attention of:

John Ross  
858-812-0614; FAX:-2888  
Email: jross@novatelwireless.com

Supervised By:



Morton Flom, P. Eng.

**List of Exhibits**  
(FCC **Certification** (PCS Transmitters) - Revised 9/28/98)

Applicant: Novatel Wireless Inc.

FCC ID: PKRNVWFB2C

**By Applicant:**

- |   |   |
|---|---|
| 1. Letter of Authorization                  | x |
| 2. Identification Drawings, 2.1033(c)(11)   |   |
| <u>x</u> ID Label                           |   |
| <u>x</u> Location of Label                  |   |
| <u>x</u> Compliance Statement               |   |
| <u>x</u> Location of Compliance Statement   |   |
| 3. Photographs, 2.1033(c)(12)               | x |
| 4. Confidentiality Request: 0.457 And 0.459 | x |
| 5. Documentation: 2.1033(c)                 |   |
| (3) User Manual                             | x |
| (9) Tune Up Info                            | x |
| (10) Schematic Diagram                      | x |
| (10) Circuit Description                    | x |
| Block Diagram                               | x |
| Parts List                                  | x |
| Active Devices                              | x |
| 6. MPE Report                               | x |

**By M.F.A. Inc.**

- A. Testimonial & Statement of Certification

The applicant has been cautioned as to the following:

15.21 Information to User.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) Special Accessories.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.


Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

## Table of Contents

<b>Rule</b>	<b>Description</b>	<b>Page</b>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c)(14)	Rule Summary	5
	Standard Test Conditions and Engineering Practices	6
2.1046(a), 24.232(b)	Carrier Output Power (Conducted)	7
2.1046(a), 24.232(b)	Carrier Output Power (Radiated)	8
2.1051, 2.1049(c), 24, 24.238(b)		
	Transmitter Conducted Measurements	10
2.1053(a)	Field Strength of Spurious Radiation	17
2.1055(a)(1), 24.235		
	Frequency Stability (Temperature Variation)	21
2.1055(d)(1)	Frequency Stability (Voltage Variation)	23
2.202(g)	Necessary Bandwidth and Emission Bandwidth	24

Page Number 1 of 24.

*Required information per ISO/IEC Guide 25-1990, paragraph 13.2:*

- a) **Test Report**
- b) Laboratory: M. Flom Associates, Inc.  
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107  
(Canada: IC 2044) Chandler, AZ 85225
- c) Report Number: d03b0029
- d) Client: Novatel Wireless Inc.  
9255 Towne Centre Dr., Suite 225  
San Diego, CA 92121-3030
- e) Identification: FB200C  
FCC ID: PKRNVWFB2C  
Description: PCS CDMA Modem
- f) EUT Condition: Not required unless specified in individual tests.
- g) Report Date: November 20, 2003  
EUT Received: November 17, 2003
- h, j, k): As indicated in individual tests.
- i) Sampling method: No sampling procedure used.
- l) Uncertainty: In accordance with MFA internal quality manual.
- m) Supervised by:   
Morton Flom, P. Eng.
- n) Results: The results presented in this report relate only to the item tested.
- o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

Accessories Used During Testing:

Test Equipment	1	CDMA Call Box	Supplied by Applicant
Test Equipment	1	RF Interface Cable	Supplied by Applicant

Page Number 2 of 24.

**List of General Information Required for Certification**

In Accordance with FCC Rules and Regulations,  
Volume II, Part 2 and to

24E, Confidentiality

**Sub-Part 2.1033**

**(c)(1): Name and Address of Applicant:**

Novatel Wireless Inc.  
9255 Towne Centre Dr., Suite 225  
San Diego, CA 92121-3030

**Manufacturer:**

Novatel Wireless Inc.  
9255 Towne Centre Dr., Suite 225  
San Diego, CA 92121-3030

(c)(2): **FCC ID:** PKRNVWFB2C

**Model Number:** FB200C

**(c)(3): Instruction Manual(s):**

Please See Attached Exhibits

(c)(4): **Type of Emission:** 1M25F9W

(c)(5): **FREQUENCY RANGE, MHz:** 1850 to 1910

(c)(6): **Power Rating, Watts:** 0.250  
 Switchable       Variable       N/A

FCC Grant Note: BD - The output power is continuously variable from the value listed in this entry to 10%-15% of the value listed.

(c)(7): **Maximum Power Rating, Watts:** 2

Page Number 3 of 24.

**Subpart 2.1033** (continued)

(c)(8): Voltages & Currents in All Elements in Final RF Stage, Including Final Transistor or Solid State Device:

Collector Current, A	=	350 ma
Collector Voltage, Vdc	=	12
Supply Voltage, Vdc	=	12

(c)(9): **Tune-Up Procedure:**

Please See Attached Exhibits

(c)(10): **Circuit Diagram/Circuit Description:**

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

Please See Attached Exhibits

(c)(11): **Label Information:**

Please See Attached Exhibits

(c)(12): **Photographs:**

Please See Attached Exhibits

(c)(13): **Digital Modulation Description:**

Attached Exhibits  
 N/A

(c)(14): **Test and Measurement Data:**

Follows

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Association (A2LA) as shown in the scope below.



**THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION**

**ACCREDITED LABORATORY**

A2LA has accredited

**M. FLOM ASSOCIATES, INC.**  
Chandler, AZ

for technical competence in the field of

**Electrical (EMC) Testing**


The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC 17025 - 1999 "General Requirements for the Competence of Testing and Calibration Laboratories" and any additional program requirements in the identified field of testing. Testing and calibration laboratories that comply with this International Standard also operate in accordance with ISO 9001 or ISO 9002.

Presented this 2<sup>nd</sup> day of March, 2001.



*Pete Almy*  
President  
For the Accreditation Council  
Certificate Number 1008.01  
Valid to December 31, 2002

For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical (EMC) Scope of Accreditation



**American Association for Laboratory Accreditation**

**SCOPE OF ACCREDITATION TO ISO/IEC 17025-1999**

M. FLOM ASSOCIATES, INC.  
Electronic Testing Laboratory  
3356 North San Marcos Place, Suite 107  
Chandler, AZ 85225  
Morton Flom Phone: 480 926 3100

**ELECTRICAL (EMC)**

Valid to: December 31, 2002 Certificate Number: 1008-01

In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following electromagnetic compatibility tests:

Tests	Standard(s)
RF Emissions	FCC Part 15 (Subparts B and C) using ANSI C63.4-1992, CISPR 11; CISPR 13; CISPR 14; CISPR 22; EN 55011; EN 55013; EN 55014; EN 55022; EN 50081-1; EN 50081-2; ICES-003; AS/NZS 1044; AS/NZS 1053; AS/NZS 3548; AS/NZS 4251.1; CNS 13438
Harmonic Currents	EN 61000-3-2
Fluctuation and Flicker	EN 61000-3-3
RF Immunity	EN: 50082-1, 50082-2 (both excluding "Power Frequency Magnetic Field Immunity"), 55024 (excluding Power Frequency Magnetic Field and Conducted Immunity); AS/NZS 4251.1
Electrostatic Discharge (ESD)	EN 61000-4-2
Radiated Susceptibility	EN 61000-4-3; ENV 50140; ENV 50204; IEC 1000-4-3; IEC 801-3
EFT	EN 61000-4-4; IEC 1000-4-4; IEC 801-4
Surge	EN 61000-4-5; ENV 50142; IEC 1000-4-5; IEC 801-5
Voltage Dips, Short Interruptions, and Line Voltage Variations	EN 61000-4-11
47 CFR (FCC)	Part: 2, 18, 21, 22, 23, 24, 25, 26, 27, 74, 80, 87, 90, 95, 97, 101 (excluding SAR Testing)

*Robert M. Robinson*

(A2LA Cert. No. 1008.01) 05/10/02 Page 1 of 1

5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-8373 • Phone: 301-644 3248 • Fax: 301-662 2974

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not covered by this laboratory's A2LA accreditation.



Page Number

5 of 24.

Sub-part

**2.1033(c)(14):****Test and Measurement Data**

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- 21 - Domestic Public Fixed Radio Services
- 22 - Public Mobile Services
- 22 Subpart H - Cellular Radiotelephone Service
- 22.901(d) - Alternative technologies and auxiliary services
- 23 - International Fixed Public Radiocommunication services
- 24 - Personal Communications Services
- 74 Subpart H - Low Power Auxiliary Stations
- 80 - Stations in the Maritime Services
- 80 Subpart E - General Technical Standards
- 80 Subpart F - Equipment Authorization for Compulsory Ships
- 80 Subpart K - Private Coast Stations and Marine Utility Stations
- 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- 80 Subpart V - Emergency Position Indicating Radiobeacons (EPIRB'S)
- 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- 80 Subpart X - Voluntary Radio Installations
- 87 - Aviation Services
- 90 - Private Land Mobile Radio Services
- 94 - Private Operational-Fixed Microwave Service
- 95 Subpart A - General Mobile Radio Service (GMRS)
- 95 Subpart C - Radio Control (R/C) Radio Service
- 95 Subpart D - Citizens Band (CB) Radio Service
- 95 Subpart E - Family Radio Service
- 95 Subpart F - Interactive Video and Data Service (IVDS)
- 97 - Amateur Radio Service
- 101 - Fixed Microwave Services

### **Standard Test Conditions and Engineering Practices**

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992/2000 Draft, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

For PCS Equipment:

Pursuant to Section 24.51(d), the EUT complies with IEEE C95.1-1991, "IEEE Standards for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz."

The EUT uses digital modulation, as such, measurements of the modulation characteristics are not applicable. The applicant has provided a description of the modulation particular to the EUT.

Pursuant to Section 24.238(c), the EUT was tested at it's lowest and highest possible tuned frequencies.

Guides:

This device was tested using the following Guide(s):

TIA/EIA 603-1993

Page Number 7 of 24.

**Name of Test:** Carrier Output Power (Conducted)

**Specification:** 47 CFR 2.1046(a)

**Test Equipment:** As per attached page

### Measurement Procedure

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is  $\pm 3\%$ .


### Measurement Results

Nominal, MHz	Channel	RF Power dBm	Watts
ESN: 5B04D270			
1851.25	025	24.15	0.260
1880.00	600	23.20	0.209
1908.75	1175	21.27	0.148
ESN: 5B04D4FD			
1851.25	025	24.40	0.275
1880.00	600	24.01	0.252
1908.75	1175	21.80	0.151
ESN: 5B049423			
1851.25	025	24.10	0.257
1880.00	600	23.95	0.248
1908.75	1175	22.21	0.166

Page Number 8 of 24.  
**Name of Test:** Carrier Output Power (Radiated)  
**Specification:** 47 CFR 2.1046(a), 24.232(b)  
**Guide:** As indicated on page 6

**Measurement Procedure (Radiated)**

1. Connect the equipment as illustrated. Place the transmitter to be tested on the turntable in the standard test site.

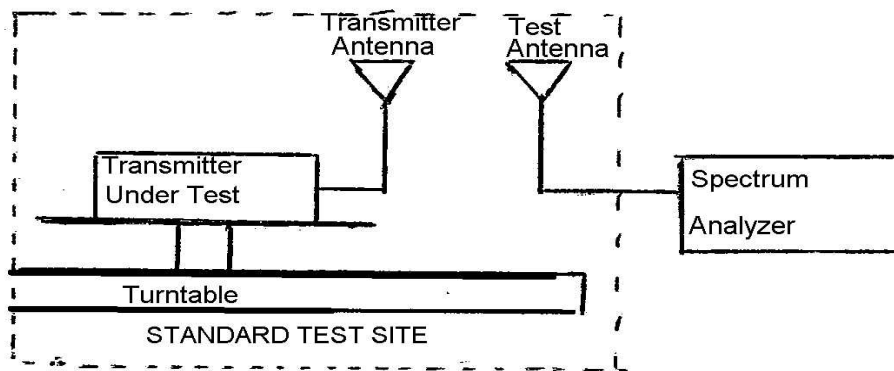

Test Equipment

Asset	Description	s/n		
<b>Transducer</b>				
i00091	Emco 3115	001469		
<b>Spectrum Analyzer</b>				
i00033	HP 85462A	3625A00357	12 mo.	Aug-03

2. Raise and lower the test antenna from 1m to 6 m with the transmitter facing the antenna and record the highest received signal in dB as LVL.
3. Repeat step 2. for seven additional readings at 45° interval positions of the turntable.
4. Replace the transmitter under test with a half-wave or horn vertically polarized antenna. The center of the antenna should be at the same location as the transmitter under test. Connect the antenna to a signal generator with a known output power and record the path loss in dB or LOSS.
5. Calculate the average radiated output power from the readings in step c) and d) by the following:

$$\text{average radiated power} = 10 \log_{10} \Sigma 10(LVL - LOSS)/10 \text{ (dBm)}$$

**Measurement Results (ESN: 5B04D4FD)**

## Path Loss Measurements:

[0dBm signal into antenna with 8.7dBi gain]

Frequency Tuned, MHz	Frequency Emission, MHz	Meter, dBuV/m	CF, dB	EIRP, dBm	Correction Factor, dBm
1851.250000	1851.225000	60.93	42.72	8.4	Add 0.3
1880.000000	1879.975000	60.39	43.05	8.2	Add 0.5
1908.750000	1908.725000	59.4	43.38	7.6	Add 1.1

## CDMA Channel 600

Position Degrees	Frequency Emission, MHz	Meter, dBuV/m	CF, dB	EIRP, dBm	Corrected EIRP, dBm
0	1879.980000	72.62	43.05	20.4	20.90
45	1879.980000	76.64	43.05	24.5	25.00
90	1879.980000	73.01	43.05	20.8	21.30
135	1879.980000	77.01	43.05	24.8	25.30
180	1879.980000	75.74	43.05	23.6	24.10
225	1879.980000	72.55	43.05	20.4	20.90
270	1879.980000	78.28	43.05	26.1	26.60
315	1879.980000	78.89	43.05	26.7	27.20
				Average =	23.91

## CDMA Channel 025

Position Degrees	Frequency Emission, MHz	Meter, dBuV/m	CF, dB	EIRP, dBm	Corrected EIRP, dBm
0	1851.230000	76.78	42.72	24.3	24.60
45	1851.230000	75.21	42.72	22.7	23.00
90	1851.230000	73.06	42.72	20.6	20.90
135	1851.230000	74.84	42.72	22.3	22.60
180	1851.230000	77.95	42.72	25.4	25.70
225	1851.230000	78.37	42.72	25.9	26.20
270	1851.230000	80.53	42.72	28.0	28.30
315	1851.230000	73.01	42.72	20.5	20.80
				Average =	24.01

## CDMA Channel 1175

Position Degrees	Frequency Emission, MHz	Meter, dBuV/m	CF, dB	EIRP, dBm	Corrected EIRP, dBm
0	1908.730000	74.62	43.38	22.8	23.90
45	1908.730000	72.07	43.38	20.2	21.30
90	1908.730000	73.20	43.38	21.4	22.50
135	1908.730000	72.70	43.38	20.9	22.00
180	1908.730000	74.74	43.38	22.9	24.00
225	1908.730000	74.88	43.38	23.0	24.10
270	1908.730000	78.04	43.38	26.2	27.30
315	1908.730000	72.81	43.38	21.0	22.10
				Average =	23.40

Page Number 10 of 24.

**Name of Test:** Transmitter Conducted Measurements

**Specification:** 47 CFR 2.1051: Unwanted (spurious) Emissions  
2.1049(c), 24.238(b): Occupied Bandwidth  
24: Emissions at Band Edges


**Guide:** As indicated on page 6

**Test Equipment:** As per attached page

**Measurement Procedure**

1. The EUT and test equipment were set up as shown on the following page with the Spectrum Analyzer connected.
2. The low and high channels for all RF powers within the designated frequency block(s) were measured.

**Occupied Bandwidth (In-Band Spurious) Test Set Up**

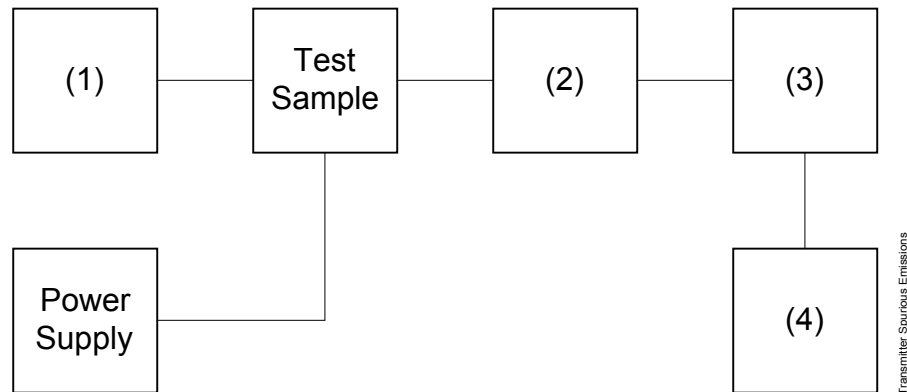


Test Equipment

Asset	Description	s/n
(1)	<b>Audio Oscillator/Generator</b> Not Applicable – Digital Device	
(2)	<b>Coaxial Attenuator</b> S00975 RF Cable Assembly	NSN
(3)	<b>Filters; Notch, HP, LP, BP</b> Not Applicable	
(4)	<b>Spectrum Analyzer</b> i00048 HP 8566B	2511A01467

Page Number 11 of 24.

**Name of Test:** Emission Masks (Occupied Bandwidth)  
g03b0048: 2003-Nov-18 Tue 10:54:00  
State: 2:High Power

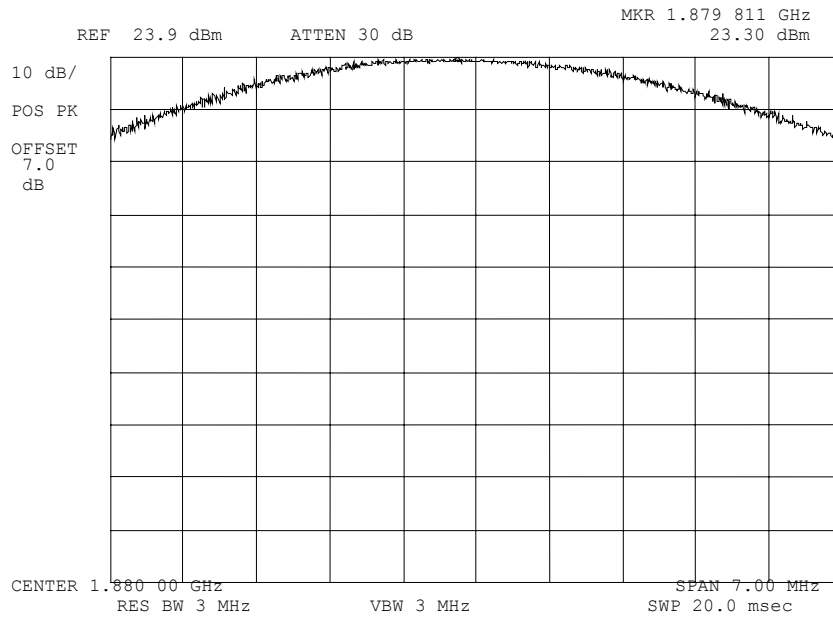

Power:  
Modulation:


HIGH  
BW  $\geq$  1MHz  
MID CHANNEL REFERENCE

Performed by:

  
Daniel M. Dillon, Test Engineer

Page Number 12 of 24.

**Name of Test:** Emission Masks (Occupied Bandwidth)  
g03b0049: 2003-Nov-18 Tue 10:58:00  
State: 2:High Power (ESN: 5B049423)

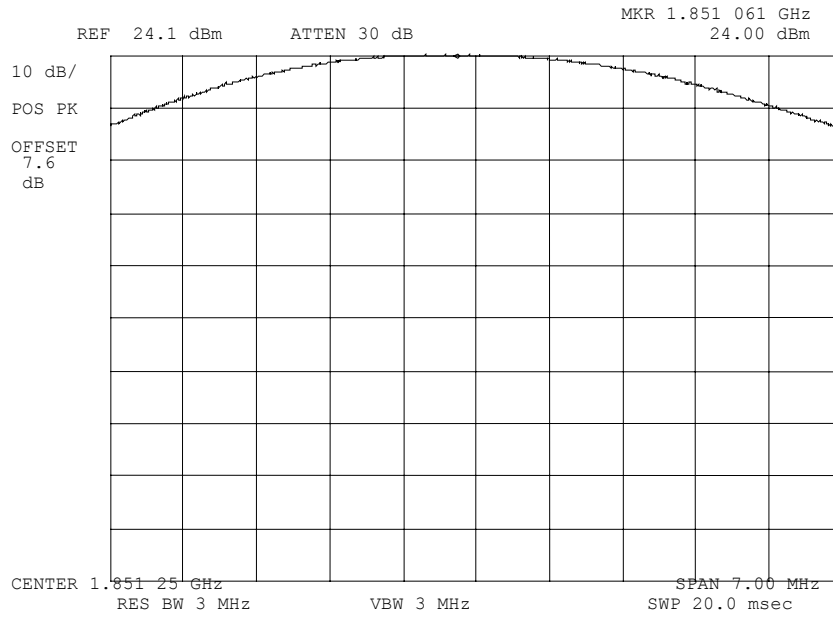

Power:  
Modulation:


HIGH  
BW  $\geq$  1MHz  
LOW CHANNEL REFERENCE

Performed by:

  
Daniel M. Dillon, Test Engineer



**Name of Test:** Emission Masks (Occupied Bandwidth)  
g03b0050: 2003-Nov-18 Tue 11:00:00  
State: 2:High Power (ESN: 5B049423)

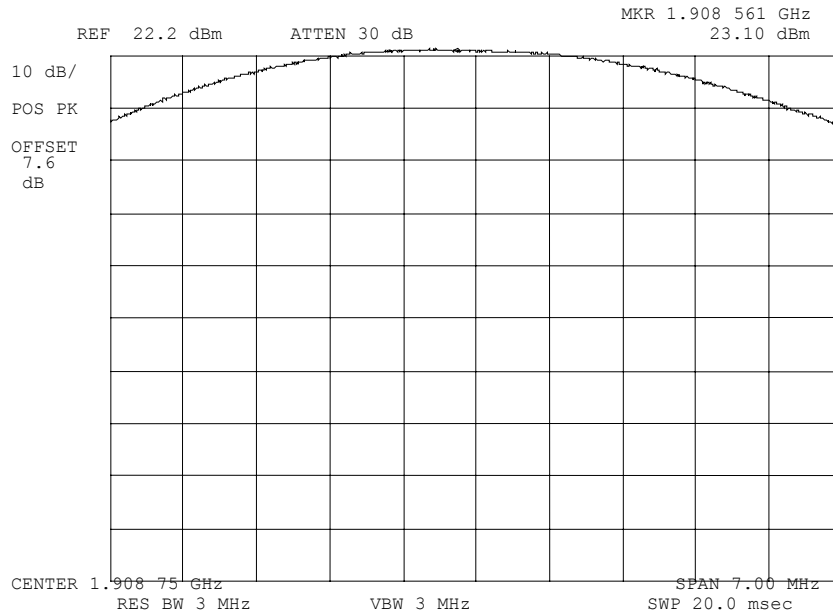

Power:  
Modulation:


HIGH  
BW  $\geq$  1MHz  
HIGH CHANNEL REFERENCE

Performed by:

  
Daniel M. Dillon, Test Engineer

Page Number 14 of 24.

**Name of Test:** Emission Masks (Occupied Bandwidth)  
g03b0051: 2003-Nov-18 Tue 11:02:00  
State: 2:High Power (ESN: 5B049423)

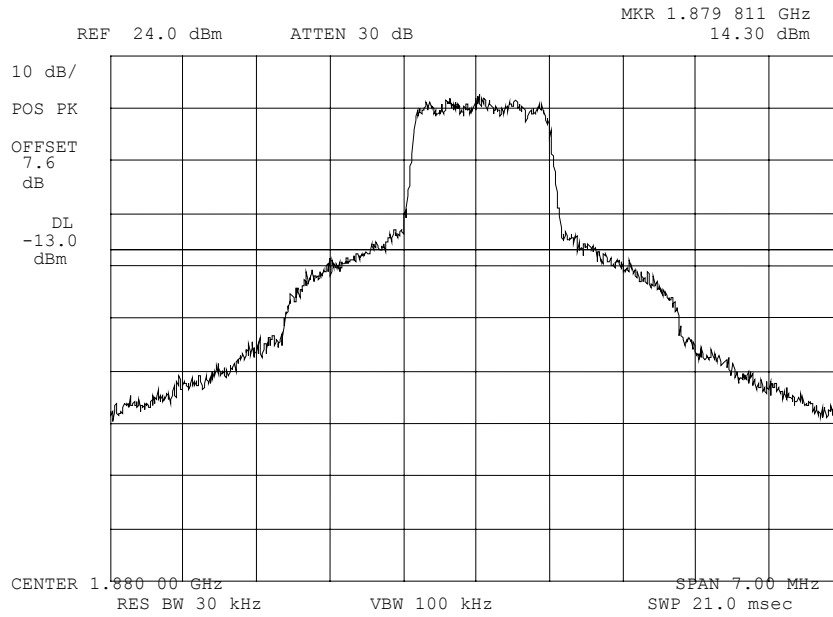

Power:  
Modulation:


HIGH  
CDMA  
MID CHANNEL

Performed by:

Daniel M. Dillon, Test Engineer

Page Number 15 of 24.


**Name of Test:** Emission Masks (Occupied Bandwidth)  
g03b0052: 2003-Nov-18 Tue 11:04:00  
State: 2:High Power (ESN: 5B049423)

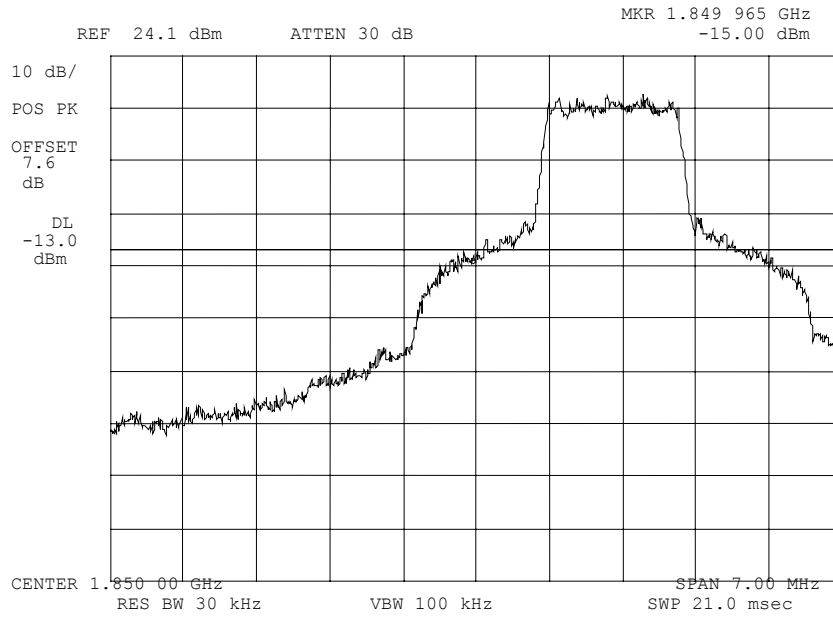

Power:  
Modulation:


HIGH  
CDMA  
LOWER BAND EDGE

Performed by:

  
Daniel M. Dillon, Test Engineer

Page Number 16 of 24.

**Name of Test:** Emission Masks (Occupied Bandwidth)  
 g03b0053: 2003-Nov-18 Tue 11:07:00  
 State: 2:High Power (ESN: 5B049423)

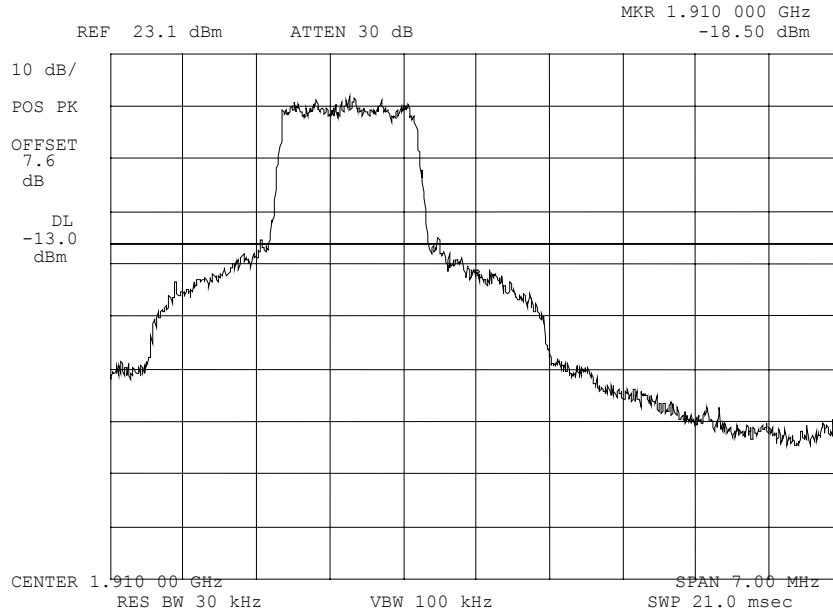

Power:  
 Modulation:

HIGH  
 NONE  
 UPPER BAND EDGE

Performed by:

Daniel M. Dillon, Test Engineer

Page Number 17 of 24.

**Name of Test:** Field Strength of Spurious Radiation

**Specification:** 47 CFR 2.1053(a)


**Guide:** ANSI/TIA/EIA-603-1992/2001, Paragraph 1.2.12 and Table 16, 47 CFR 22.917

### Measurement Procedure

1.2.12.1 Definition: Radiated spurious emissions are emissions from the equipment when transmitting into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to ensure transmission of information of required quality for the class of communications desired.

#### 1.2.12.2 Method of Measurement


- A) Connect the equipment as illustrated
- B) Adjust the spectrum analyzer for the following settings:
  - 1) Resolution Bandwidth 100 kHz (<1 GHz), 1 MHz (> 1GHz).
  - 2) Video Bandwidth  $\geq 3$  times Resolution Bandwidth, or 30 kHz (22.917)
  - 3) Sweep Speed  $\leq 2000$  Hz/second
  - 4) Detector Mode = Mean or Average Power
- C) Place the transmitter to be tested on the turntable in the standard test site. The transmitter is transmitting into a non-radiating load which is placed on the turntable. The RF cable to this load should be of minimum length.

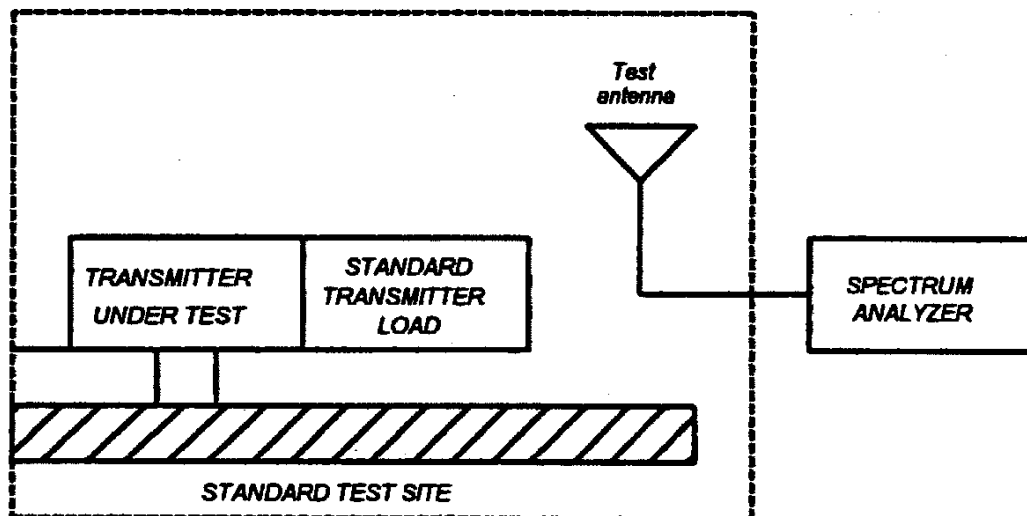

Page Number 18 of 24.

**Name of Test:** Field Strength of Spurious Radiation (Cont.)

- D) For each spurious measurement the test antenna should be adjusted to the correct length for the frequency involved. This length may be determined from a calibration ruler supplied with the equipment. Measurements shall be made from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier, except for the region close to the carrier equal to  $\pm$  the test bandwidth (see section 1.3.4.4).
- E) For each spurious frequency, raise and lower the test antenna from 1 m to 4 m to obtain a maximum reading on the spectrum analyzer with the test antenna at horizontal polarity. Repeat this procedure to obtain the highest possible reading. Record this maximum reading.
- F) Repeat step E) for each spurious frequency with the test antenna polarized vertically.

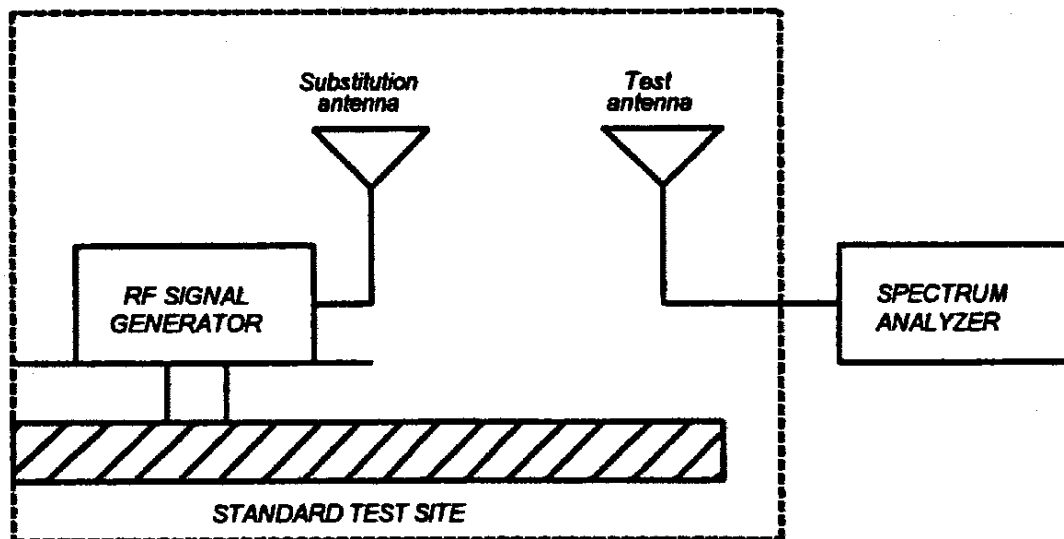

- G) Reconnect the equipment as illustrated.
- H) Keep the spectrum analyzer adjusted as in step B).
- I) Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.

Page Number 19 of 24.

**Name of Test:** Field Strength of Spurious Radiation (Cont.)

- J) Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.
- K) Repeat step J) with both antennas vertically polarized for each spurious frequency.
- L) Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps J) and K) by the power loss in the cable between the generator and the antenna and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna.
- M) The levels recorded in step L) are absolute levels of radiated spurious emissions in dBm. The radiated spurious emissions in dB can be calculated by the following:

$$\text{Radiated spurious emissions dB} = 10\log_{10}(\text{TX power in watts}/0.001) - \text{the levels in step I)}$$

NOTE: It is permissible that other antennas provided can be referenced to a dipole.

Test Equipment:

Asset	Description	s/n	Cycle	Last Cal
<b>Transducer</b>				
i00103	EMCO 3115 1GHz-18GHz	9208-3925	36 mo.	Sep-02
<b>Amplifier</b>				
i00028	HP 8449A	2749A00121	12 mo.	Mar-03
<b>Spectrum Analyzer</b>				
i00029	HP 8563E	3213A00104	12 mo.	Mar-03
i00033	HP 85462A	3625A00357	12 mo.	Aug-03

Page Number 20 of 24.

**Name of Test:** Field Strength of Spurious Radiation  
g03b0046: 2003-Nov-17 Mon 15:34:00  
State: Receive Only (ESN: 5B04D4FD)

Frequency Tuned, MHz	Frequency Emission, MHz	EIRP, dBm	EIRP, dBc
1851.250000	3702.500000	-34.7	≤ -67.1
1880.000000	3760.000000	-46.3	≤ -67.1
1908.750000	3817.500000	-39.1	≤ -67.1
1851.250000	5553.750000	-45.2	≤ -67.1
1880.000000	5640.000000	-43.6	≤ -67.1
1908.750000	5726.250000	-38.4	≤ -67.1
1851.250000	7405.000000	-36.0	≤ -67.1
1880.000000	7520.000000	-38.1	≤ -67.1
1908.750000	7635.000000	-34.5	≤ -67.1
1851.250000	9256.250000	-35.4	≤ -67.1
1880.000000	9400.000000	-34.5	≤ -67.1
1908.750000	9543.750000	-34.1	≤ -67.1
1851.250000	11107.500000	-35.1	≤ -67.1
1880.000000	11280.000000	-37.9	≤ -67.1
1908.750000	11452.500000	-36.6	≤ -67.1
1851.250000	12958.750000	-44.1	≤ -67.1
1880.000000	13160.000000	-42.5	≤ -67.1
1908.750000	13361.250000	-43.0	≤ -67.1
1851.250000	14810.000000	-48.1	≤ -67.1
1880.000000	15040.000000	-44.9	≤ -67.1
1908.750000	15270.000000	-44.7	≤ -67.1
1851.250000	16661.250000	-45.0	≤ -67.1
1880.000000	16920.000000	-42.2	≤ -67.1
1908.750000	17178.750000	-38.7	≤ -67.1

Performed by:



Daniel M. Dillon, Test Engineer



Page Number 21 of 24.

**Name of Test:** Frequency Stability (Temperature Variation)

**Specification:** 47 CFR 2.1055(a)(1), 24.235

**Guide:** As indicated on page 6

**Test Conditions:** As Indicated

**Test Equipment:** As per previous page

### Measurement Procedure

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -20°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The maximum temperature specified for this device is +60°C

Subscriber equipment is synchronized to base station frequency. No variance in transmitter frequency stability observed under any variation of temperature and/or voltage.

Temp°C	-20	-10	+0	+10	+20	+25	+30	+40	+50	+60
± Hz	-3.5	+8.1	-10.0	+3.9	+5.0	-9.7	-6.0	+6.3	-13.1	-4.2

Unit ESN: 5B04D270 used

Limit for network use is  $\pm$  180Hz




Performed By:

David E. Lee

**Transmitter Test Set-Up**

Frequency Stability: Temperature Variation  
 Frequency Stability: Voltage Variation

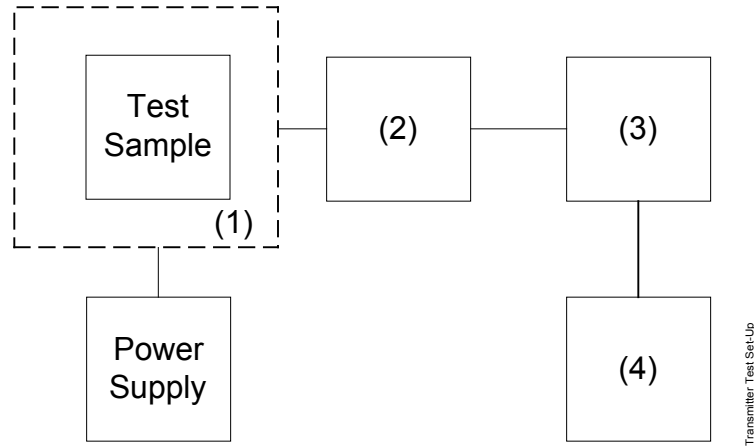

Asset	Description	s/n
(1)	<b>Temperature, Humidity, Vibration</b> i00027 Tenney Temp. Chamber	9083-765-234
(2)	<b>Coaxial Attenuator</b> Not Required	
(3)	<b>RF Power</b> S00968 E8285 CDMA Call Box	V540081850
(4)	<b>Frequency Counter</b> S00968 E8285 CDMA Call Box	V540081850

Page Number 23 of 24.

**Name of Test:** Frequency Stability (Voltage Variation)

**Specification:** 47 CFR 2.1055(d)(1)

**Guide:** As indicated on page 6

**Test Equipment:** As per previous page

### Measurement Procedure

1. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied over the specified voltage range for the device 10V to 18V.

*Note: The variation in frequency was measured for the worst case.*

**Results:** Frequency Stability (Voltage Variation)

Subscriber equipment is synchronized to base station frequency. No variance in transmitter frequency stability observed under any variation of temperature and/or voltage.

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
100.00	12V	1880.000	-9.70	>0.1
83.33	10V	1880.000	-6.60	>0.1
150.00	18V	1880.000	-2.40	>0.1

Unit ESN: 5B04D270 used.

Limit: Must remain within authorized frequency block. Network requires  $\pm 180\text{Hz}$ .



Performed By:

David E. Lee

Page Number 24 of 24.

**Name of Test:** Necessary Bandwidth and Emission Bandwidth

**Specification:** 47 CFR 2.202(g)

Modulation = 1M25F9W


**Necessary Bandwidth:**

Necessary Bandwidth ( $B_N$ ), kHz = N/A

**Name of Test:** Emission Masks (Power Bandwidth)

g03b0054: 2003-Nov-18 Tue 11:08:00

State: 2:High Power (ESN: 5B049423)

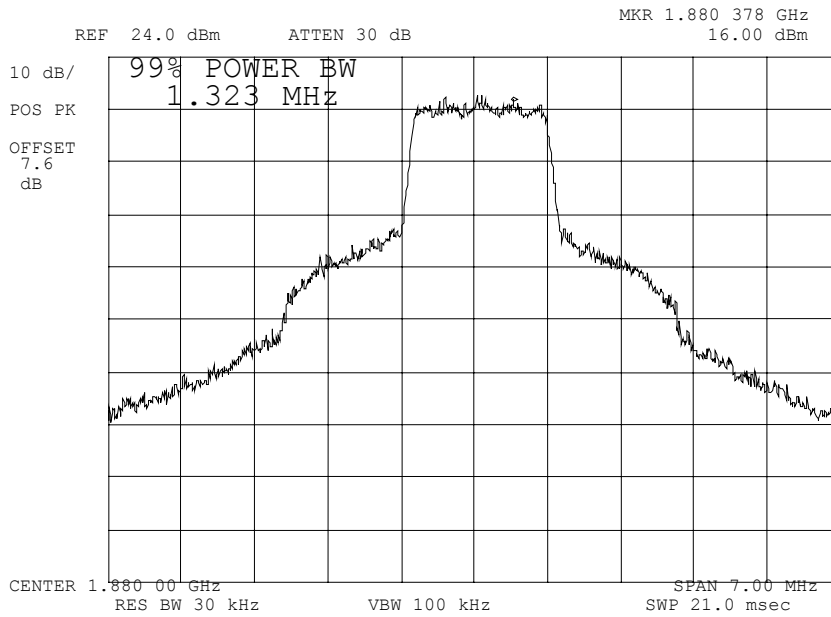

Power:  
Modulation:

HIGH  
CDMA  
POWER BANDWIDTH

Performed by:  
END OF TEST REPORT

*Daniel M. Dillon*  
Daniel M. Dillon, Test Engineer

**Testimonial  
and  
Statement of Certification**

**This is to certify that:**

1. **That** the application was prepared either by, or under the direct supervision of, the undersigned.
2. **That** the technical data supplied with the application was taken under my direction and supervision.
3. **That** the data was obtained on representative units, randomly selected.
4. **That**, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

Certifying Engineer:



Morton Flom, P. Eng.