

RF Exposure Lab

802 N. Twin Oaks Valley Road, Suite 105 • San Marcos, CA 92069 • U.S.A.

TEL (760) 471-2100 • FAX (760) 471-2121

<http://www.rfexposurelab.com>

CERTIFICATE OF COMPLIANCE SAR EVALUATION

Novatel Wireless
9605 Scranton Road, Suite 300
San Diego, CA 92121

Dates of Test: March 22 – 29, 2017
Test Report Number: SAR.20170310
Revision A

FCC ID:	PKRNVWMC730
IC Certificate:	3229A-MC730
Model(s):	MC730
Test Sample:	Engineering Unit Same as Production
FID Number:	Eng 1
Equipment Type:	Wireless USB Modem
Classification:	Portable Transmitter Next to Body
TX Frequency Range:	777 – 787 MHz, 824 – 848 MHz; 1850 – 1910 MHz; 1710 – 1755 MHz
Frequency Tolerance:	± 2.5 ppm
Maximum RF Output:	750 MHz (LTE) – 24.0 dBm, 850 MHz (GSM) – 33.0 dBm, 850 MHz (WCDMA) – 24.0 dBm, 850 MHz (CDMA) – 24.5 dBm, 850 MHz (LTE) – 24.0 dBm, 1900 MHz (GSM) – 31.0 dBm, 1900 MHz (WCDMA) – 23.0 dBm, 1900 MHz (CDMA) – 24.0 dBm 1900 MHz (LTE) – 24.0 dBm, 1750 MHz (LTE) – 23.0 dBm Conducted
Signal Modulation:	WCDMA, GMSK, 8-PSK, CDMA, QPSK, 16QAM
Antenna Type:	WWAN – Novatel Wireless, P/N NVTL 12023208 (Main)
Application Type:	Certification
FCC Rule Parts:	Part 2, 22, 24, 27
KDB Test Methodology:	KDB 447498 D01 v06 & D02 v02r01, KDB 941225 D01 v03r01 & D05 v02r05
Industry Canada:	RSS-102 Issue 5, Safety Code 6
Max. Stand Alone SAR Value:	1.49 W/kg Reported
Separation Distance:	5 mm

This wireless mobile and/or portable device has been shown to be compliant for localized specific absorption rate (SAR) for uncontrolled environment/general exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and IEC 62209-2:2010 (See test report).

I attest to the accuracy of the data. All measurements were performed by myself or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RF Exposure Lab, LLC certifies that no party to this application is subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).



Jay M. Moulton
Vice President



Certificate # 2387.01

Table of Contents

1. Introduction	3
SAR Definition [5]	4
2. SAR Measurement Setup	5
Robotic System	5
System Hardware	5
System Electronics	6
Probe Measurement System	6
3. Probe and Dipole Calibration	14
4. Phantom & Simulating Tissue Specifications	15
Head & Body Simulating Mixture Characterization	15
5. ANSI/IEEE C95.1 – 1992 RF Exposure Limits [2]	16
Uncontrolled Environment	16
Controlled Environment	16
6. Measurement Uncertainty	17
7. System Validation	18
Tissue Verification	18
Test System Verification	18
8. LTE Document Checklist	19
9. SAR Test Data Summary	23
Procedures Used To Establish Test Signal	23
Device Test Condition	23
Figure 10.1	25
10. FCC 3G Measurement Procedures	26
10.1 Procedures Used to Establish RF Signal for SAR	26
10.2 SAR Measurement Conditions for CDMA2000, 1xEV-DO	26
10.3 SAR Measurement Conditions for WCDMA/HSDPA/HSUPA	28
10.4 SAR Measurement Conditions for GSM	28
10.5 SAR Measurement Conditions for LTE Bands	33
SAR Data Summary – 835 MHz Body - CDMA	55
SAR Data Summary – 835 MHz Body - WCDMA	56
SAR Data Summary – 835 MHz Body - GPRS	57
SAR Data Summary – 1900 MHz Body - CDMA	58
SAR Data Summary – 1900 MHz Body - WCDMA	59
SAR Data Summary – 1900 MHz Body - GPRS	60
SAR Data Summary – 1900 MHz Body – LTE Band 2	61
SAR Data Summary – 1750 MHz Body – LTE Band 4	62
SAR Data Summary – 850 MHz Body – LTE Band 5	63
SAR Data Summary – 750 MHz Body – LTE Band 13	64
11. Test Equipment List	65
12. Conclusion	66
13. References	67
Appendix A – System Validation Plots and Data	68
Appendix B – SAR Test Data Plots	78
Appendix C – SAR Test Setup Photos	89
Appendix D – Probe Calibration Data Sheets	97
Appendix E – Dipole Calibration Data Sheets	109
Appendix F – Phantom Calibration Data Sheets	142

1. Introduction

This measurement report shows compliance of the Novatel Wireless Model MC730 FCC ID: PKRNVWMC730 with FCC Part 2, 1093, ET Docket 93-62 Rules for mobile and portable devices and IC Certificate: 3229A-MC730 with RSS102 Issue 5 & Safety Code 6. The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on August 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC regulated portable devices. [1], [6]

The test results recorded herein are based on a single type test of Novatel Wireless Model MC730 and therefore apply only to the tested sample.

The test procedures, as described in ANSI C95.1 – 1999 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [2], ANSI C95.3 – 2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields [3], IEEE Std.1528 – 2013 Recommended Practice [5], and Industry Canada Safety Code 6 Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz were employed.

The following table indicates all the wireless technologies operating in the MC730 wireless modem. The table also shows the tolerance for the power level for each mode.

Band	Technology	Class	3GPP Nominal Power dBm	Calibrated Nominal Power dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
Band 2 – 1900 MHz	LTE	3	23.0	23.0	+1.0/-1.7	21.3	24.0
Band 4 – 1750 MHz	LTE	3	22.0	22.0	+1.0/-0.7	21.3	23.0
Band 5 – 850 MHz	LTE	3	23.0	23.0	+1.0/-1.7	21.3	24.0
Band 13 – 750 MHz	LTE	3	23.0	23.0	+1.0/-1.7	21.3	24.0
Band Class 0 – 835 MHz	CDMA	3	24.0	24.0	+0.5/-1.0	23.0	24.5
Band Class 1 – 1900 MHz	CDMA	3	23.5	23.5	+0.5/-1.0	22.5	24.0
Band 2 – 1900 MHz	WCDMA/HSPA	3	22.0	22.0	±1.0	21.0	23.0
Band 5 – 850 MHz	WCDMA/HSPA	3	23.0	23.0	+1.0/-2.0	21.0	24.0
Band 5 – 850 MHz	GPRS	4	32.0	32.0	±1.0	31.0	33.0
Band 5 – 850 MHz	EDGE	E2	27.0	27.0	+1.0/-2.0	25.0	28.0
Band 2 – 1900 MHz	GPRS	1	30.0	30.0	+1.0/-2.0	28.0	31.0
Band 2 – 1900 MHz	EDGE	E2	26.0	26.0	+1.0/-2.0	24.0	27.0

SAR Definition [5]

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ).

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of watts per kilogram (W/kg). SAR can be related to the electric field at a point by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

where:

σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = rms electric field strength (V/m)

2. SAR Measurement Setup

Robotic System

These measurements are performed using the DASY52 automated dosimetric assessment system. The DASY52 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Intel Core2 computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 2.1).

System Hardware

A cell controller system contains the power supply, robot controller teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the HP Intel Core2 computer with Windows XP system and SAR Measurement Software DASY52, A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

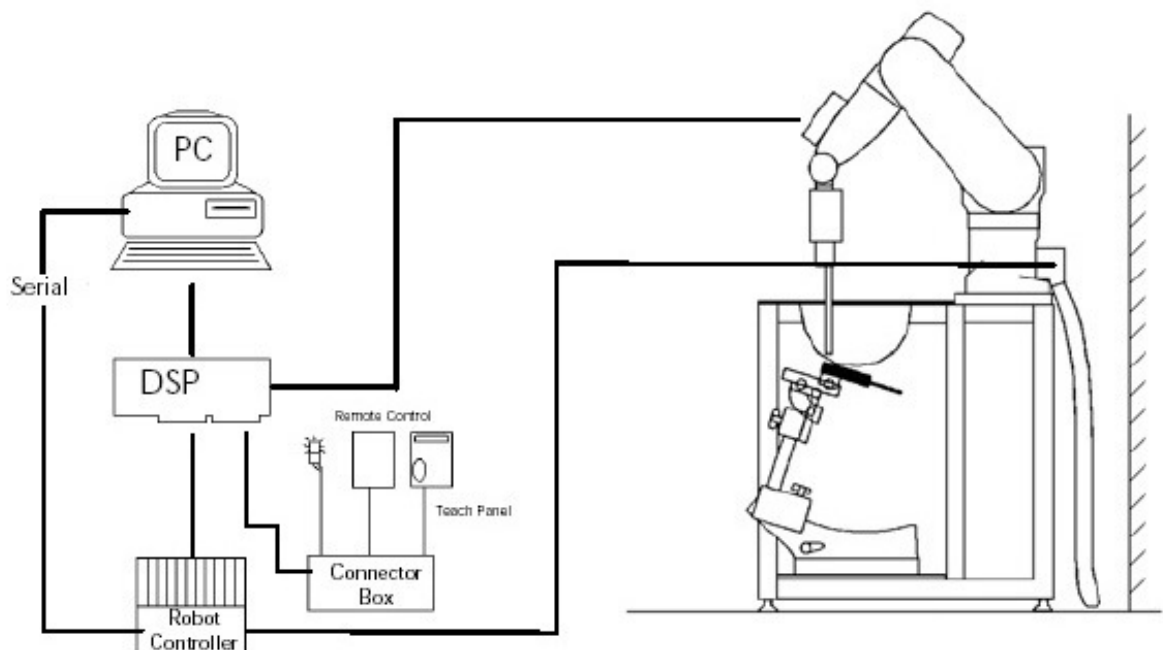


Figure 2.1 SAR Measurement System Setup

System Electronics

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail in.

Probe Measurement System

The SAR measurements were conducted with the dosimetric probe EX3DV4, designed in the classical triangular configuration (see Fig. 2.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi fiber line ending at the front of the probe tip. (see Fig. 2.3) It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY52 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.



DAE System

Probe Specifications

Calibration: In air from 10 MHz to 6.0 GHz
In brain and muscle simulating tissue at Frequencies of 450 MHz, 835 MHz, 1750 MHz, 1900 MHz, 2450 MHz, 2600 MHz, 3500 MHz, 5200 MHz, 5300 MHz, 5600 MHz, 5800 MHz

Frequency: 10 MHz to 6 GHz

Linearity: $\pm 0.2\text{dB}$ (30 MHz to 6 GHz)

Dynamic: 10 mW/kg to 100 W/kg

Range: Linearity: $\pm 0.2\text{dB}$

Dimensions: Overall length: 330 mm

Tip length: 20 mm

Body diameter: 12 mm

Tip diameter: 2.5 mm

Distance from probe tip to sensor center: 1 mm

Application: SAR Dosimetry Testing
Compliance tests of wireless device




Figure 2.2 Triangular Probe Configurations



Figure 2.3 Probe Thick-Film Technique

Probe Calibration Process

Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure described in with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in and found to be better than +/-0.25dB. The sensitivity parameters (Norm X, Norm Y, Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe is tested.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a waveguide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm².

Temperature Assessment *

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium, correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor based temperature probe is used in conjunction with the E-field probe

$$SAR = C \frac{\Delta T}{\Delta t}$$

where:

Δt = exposure time (30 seconds),

C = heat capacity of tissue (brain or muscle),

ΔT = temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

σ = simulated tissue conductivity,

ρ = Tissue density (1.25 g/cm³ for brain tissue)

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place.

Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

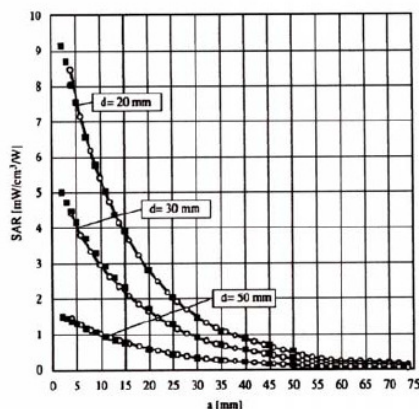


Figure 2.4 E-Field and Temperature Measurements at 900MHz

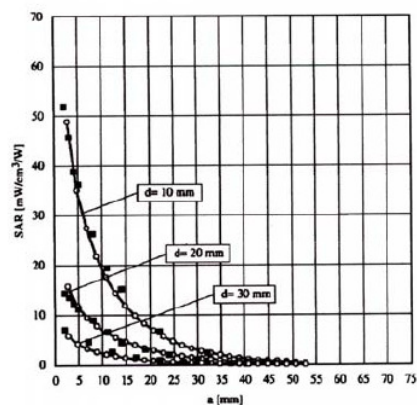


Figure 2.5 E-Field and Temperature Measurements at 1800MHz

Data Extrapolation

The DASY52 software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given like below;

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i (i=x,y,z)
 U_i = input signal of channel i (i=x,y,z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with V_i = compensated signal of channel i (i = x,y,z)
 $Norm_i$ = sensor sensitivity of channel i (i = x,y,z)
 $\mu V/(V/m)^2$ for E-field probes
 $ConvF$ = sensitivity of enhancement in solution
 E_i = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{free} = \frac{E_{tot}^2}{3770}$$

with P_{pwe} = equivalent power density of a plane wave in W/cm²
 E_{tot} = total electric field strength in V/m

Scanning procedure

- The DASY installation includes predefined files with recommended procedures for measurements and system check. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.
- The „reference“ and „drift“ measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. +/- 5 %.
- The highest integrated SAR value is the main concern in compliance test applications. These values can mostly be found at the inner surface of the phantom and cannot be measured directly due to the sensor offset in the probe. To extrapolate the surface values, the measurement distances to the surface must be known accurately. A distance error of 0.5mm could produce SAR errors of 6% at 1800 MHz. Using predefined locations for measurements is not accurate enough. Any shift of the phantom (e.g., slight deformations after filling it with liquid) would produce high uncertainties. For an automatic and accurate detection of the phantom surface, the DASY5 system uses the mechanical surface detection. The detection is always at touch, but the probe will move backward from the surface the indicated distance before starting the measurement.
- The „area scan“ measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The scan uses different grid spacings for different frequency measurements. Standard grid spacing for head measurements in frequency ranges ≤ 2 GHz is 15 mm in x - and y-dimension. For higher frequencies a finer resolution is needed, thus for the grid spacing is reduced according the following table:

Area scan grid spacing for different frequency ranges	
Frequency range	Grid spacing
≤ 2 GHz	≤ 15 mm
2 – 4 GHz	≤ 12 mm
4 – 6 GHz	≤ 10 mm

Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in annex B.

- A „zoom scan” measures the field in a volume around the 2D peak SAR value acquired in the previous „coarse” scan. It uses a fine meshed grid where the robot moves the probe in steps along all the 3 axis (x,y and z-axis) starting at the bottom of the Phantom. The grid spacing for the cube measurement is varied according to the measured frequency range, the dimensions are given in the following table:

Zoom scan grid spacing and volume for different frequency ranges			
Frequency range	Grid spacing for x, y axis	Grid spacing for z axis	Minimum zoom scan volume
≤ 2 GHz	≤ 8 mm	≤ 5 mm	≥ 30 mm
2 – 3 GHz	≤ 5 mm	≤ 5 mm	≥ 28 mm
3 – 4 GHz	≤ 5 mm	≤ 4 mm	≥ 28 mm
4 – 5 GHz	≤ 4 mm	≤ 3 mm	≥ 25 mm
5 – 6 GHz	≤ 4 mm	≤ 2 mm	≥ 22 mm

DASY is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in annex B. Test results relevant for the specified standard (see section 3) are shown in table form in section 7.

Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of all points in the three directions x, y and z. The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 1 to 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

SAM PHANTOM

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 2.6)

Phantom Specification

Phantom:	SAM Twin Phantom (V4.0)
Shell Material:	Vivac Composite
Thickness:	2.0 ± 0.2 mm

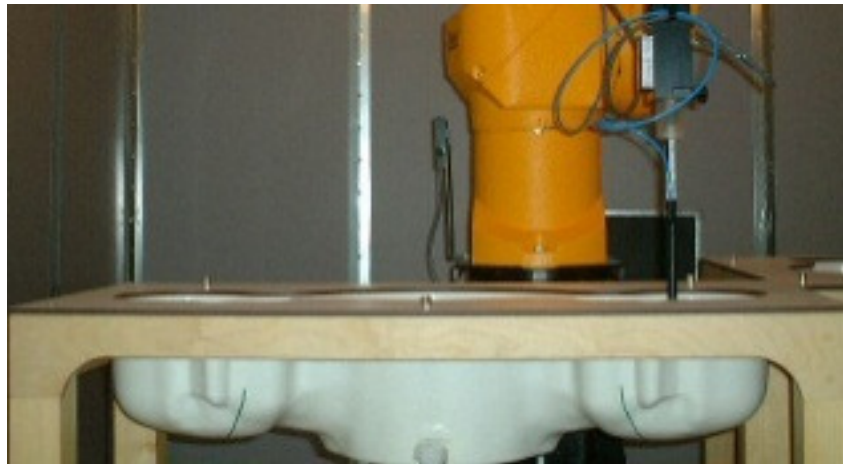


Figure 2.6 SAM Twin Phantom

Device Holder for Transmitters

In combination with the SAM Twin Phantom V4.0 the Mounting Device (see Fig. 2.7), enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation point is the ear opening. The devices can be easily, accurately, and repeatedly positioned according to the FCC, CENELEC, IEC and IEEE specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Figure 2.7 Mounting Device

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.

3. Probe and Dipole Calibration

See Appendix D and E.

4. Phantom & Simulating Tissue Specifications

Head & Body Simulating Mixture Characterization

The head and body mixtures consist of the material based on the table listed below. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. Body tissue parameters that have not been specified in IEEE1528 – 2013 are derived from the issue dielectric parameters computed from the 4-Cole-Cole equations.

Table 4.1 Typical Composition of Ingredients for Tissue

Ingredients		Simulating Tissue			
		750 MHz Body	835 MHz Body	1900 MHz Body	1750 MHz Body
Mixing Percentage					
Water		Proprietary Purchased From Speag	52.50	69.91	Proprietary Purchased From Speag
Sugar			45.00	0.00	
Salt			1.40	0.13	
HEC			1.00	0.00	
Bactericide			0.10	0.00	
DGBE			0.00	29.96	
Dielectric Constant	Target	55.50	55.20	53.30	53.4
Conductivity (S/m)	Target	0.96	0.97	1.52	1.49

5. ANSI/IEEE C95.1 – 1992 RF Exposure Limits [2]

Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 5.1 Human Exposure Limits

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT Professional Population (W/kg) or (mW/g)
SPATIAL PEAK SAR ¹ Head	1.60	8.00
SPATIAL AVERAGE SAR ² Whole Body	0.08	0.40
SPATIAL PEAK SAR ³ Hands, Feet, Ankles, Wrists	4.00	20.00

¹ The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

² The Spatial Average value of the SAR averaged over the whole body.

³ The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

6. Measurement Uncertainty

Exposure Assessment Measurement Uncertainty

Relative DASYS Uncertainty Budget for SAR Tests								
According to IEC62209-2/2010 (30 MHz - 6 GHz range)								
Error Description	Uncertainty Value	Probability Distribution	Divisor	C_i (1g)	C_i (10g)	Standard Uncertainty $\pm \%$, (1g) $\pm \%$, (10g)		v_i^2 or v_{eff}
Measurement System								
Probe calibration	$\pm 6.6\%$	Normal	1	1	1	$\pm 6.6\%$	$\pm 6.6\%$	∞
Axial isotropy	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 1.9\%$	$\pm 1.9\%$	∞
Hemispherical isotropy	$\pm 9.6\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 3.9\%$	$\pm 3.9\%$	∞
Boundary effects	$\pm 2.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2\%$	$\pm 1.2\%$	∞
Probe linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
System detection limits	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Modulation response	$\pm 2.4\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.4\%$	$\pm 1.4\%$	∞
Readout electronics	$\pm 0.3\%$	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
Response time	$\pm 0.8\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.5\%$	$\pm 0.5\%$	∞
Integration time	$\pm 2.6\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5\%$	$\pm 1.5\%$	∞
RF ambient noise	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
RF ambient reflections	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
Probe positioner	$\pm 0.8\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.5\%$	$\pm 0.5\%$	∞
Probe positioning	$\pm 6.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9\%$	$\pm 3.9\%$	∞
Post-processing	$\pm 4.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	∞
Test Sample Related								
Device positioning	$\pm 2.9\%$	Normal	1	1	1	$\pm 2.9\%$	$\pm 2.9\%$	145
Device holder uncertainty	$\pm 3.6\%$	Normal	1	1	1	$\pm 3.6\%$	$\pm 3.6\%$	5
Power drift	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9\%$	$\pm 2.9\%$	∞
Phantom and Setup								
Phantom uncertainty	$\pm 7.9\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 4.6\%$	$\pm 4.6\%$	∞
SAR algorithm correction	$\pm 1.9\%$	Normal	1	1	0.84	$\pm 1.9\%$	$\pm 1.9\%$	∞
Liquid conductivity (meas.)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.1\%$	$\pm 0.1\%$	∞
Liquid permittivity (meas.)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.26	0.26	$\pm 0.1\%$	$\pm 0.1\%$	∞
Temp. Unc. – Conductivity	$\pm 3.4\%$	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 1.5\%$	$\pm 1.5\%$	∞
Temp. Unc. – Permittivity	$\pm 0.4\%$	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.1\%$	$\pm 0.1\%$	∞
Combined Uncertainty						$\pm 12.4\%$	$\pm 12.3\%$	330
Expanded Std. Uncertainty						$\pm 24.8\%$	$\pm 24.6\%$	

Worst case uncertainty budget for DASYS assessed according to IEC62209-2/2010 standard. The budget is valid for the frequency range 30 MHz – 6 GHz and represents a worst-case analysis. For specific tests and configurations, the uncertainty could be considerable smaller.

7. System Validation

Tissue Verification

Table 7.1 Measured Tissue Parameters

		750 MHz Body		835 MHz Body		1750 MHz Body	
Date(s)		Mar. 29, 2017		Mar. 27, 2017		Mar. 22, 2017	
Liquid Temperature (°C)	20.0	Target	Measured	Target	Measured	Target	Measured
Dielectric Constant: ϵ		55.35	55.57	55.20	54.37	53.43	52.68
Conductivity: σ		0.96	0.99	0.97	0.98	1.49	1.56
		1900 MHz Body					
Date(s)		Mar. 23, 2017					
Liquid Temperature (°C)	20.0	Target	Measured				
Dielectric Constant: ϵ		53.30	53.17				
Conductivity: σ		1.52	1.54				

See Appendix A for data printout.

Test System Verification

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at the test frequency by using the system kit. Power is normalized to 1 watt. (Graphic Plots Attached)

Table 7.2 System Dipole Validation Target & Measured

	Test Frequency	Targeted SAR _{1g} (W/kg)	Measure SAR _{1g} (W/kg)	Tissue Used for Verification	Deviation (%)	Plot Number
29-Mar-2017	750 MHz	8.48	8.65	Body	+ 2.00	1
27-Mar-2017	835 MHz	9.28	9.48	Body	+ 2.16	2
22-Mar-2017	1750 MHz	37.70	38.50	Body	+ 2.12	3
23-Mar-2017	1900 MHz	40.40	40.70	Body	+ 0.74	4

See Appendix A for data plots.

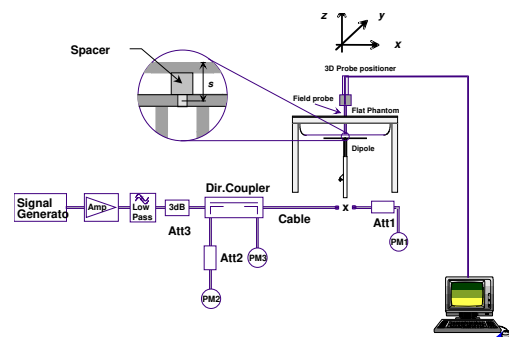


Figure 7.1 Dipole Validation Test Setup

8. LTE Document Checklist

- 1) Identify the operating frequency range of each LTE transmission band used by the device

LTE Operating Band	Uplink (transmit)	Downlink (Receive)	Duplex mode (FDD/TDD)
	Low - high	Low - high	
2	1850-1910	1930-1990	FDD
4	1710-1755	2110-2155	FDD
5	824-849	869-894	FDD
13	777-787	746-756	FDD

- 2) Identify the channel bandwidths used in each frequency band; 1.4, 3, 5, 10, 15, 20 MHz etc

LTE Band Class	Bandwidth (MHz)	Frequency or Freq. Band (MHz)
2	1.4, 3, 5, 10, 15, 20	1850-1910 MHz
4	1.4, 3, 5, 10, 15, 20	1710-1755 MHz
5	3, 5, 10	824-849 MHz
13	5, 10	777-787 MHz

- 3) Identify the high, middle and low (H, M, L) channel numbers and frequencies in each LTE frequency band

LTE Band Class	Bandwidth (MHz)	Frequency (MHz)/Channel #					
		Low		Mid		High	
2	1.4	1850.7	18607	1880.0	18900	1909.3	19193
2	3	1851.5	18615	1880.0	18900	1908.5	19185
2	5	1852.5	18625	1880.0	18900	1907.5	19175
2	10	1855.0	18650	1880.0	18900	1905.0	19150
2	15	1857.5	18675	1880.0	18900	1902.5	19125
2	20	1860.0	18700	1880.0	18900	1900.0	19100
4	1.4	1710.7	19957	1732.5	20175	1754.3	20393
4	3	1711.5	19965	1732.5	20175	1753.5	20385
4	5	1712.5	19975	1732.5	20175	1752.5	20375
4	10	1715.0	20000	1732.5	20175	1750.0	20350
4	15	1717.5	20025	1732.5	20175	1747.5	20325
4	20	1720.0	20050	1732.5	20175	1745.0	20300
5	3	825.5	20415	836.5	20525	847.5	20635
5	5	826.5	20425	836.5	20525	846.5	20625
5	10	829.0	10450	836.5	20525	844.0	20600
13	5	779.5	23205	-	-	784.5	23255
13	10	-	-	782.0	23230	-	-

- 4) Specify the UE category and uplink modulations used:

- UE Category: 3
- Uplink modulations: QPSK and 16QAM

- 5) Include descriptions of the LTE transmitter and antenna implementation; and also identify whether it is a standalone transmitter operating independently of other wireless transmitters in the device or sharing hardware components and/or antenna(s) with other transmitters etc

The MC730 has 2 antennas:

- WWAN Main (Transmit and Receive) Antenna
- Diversity (Receive Only) Antenna with GPS (Receive Only) capabilities

Transmission relationship

- All transmission (TX) is limited to the WWAN (Main) antenna only
- The device is unable to transmit CDMA/EDGE/GPRS/WCDMA/HSPA and LTE simultaneously.
- The Diversity antenna is receive only antenna which is reserved for the WWAN operation.
- Rx is simultaneous on Main and Diversity

Antenna port	CDMA/EDGE/GPRS/WCDMA/HSPA		LTE		GPS
	TX	RX	TX	RX	RX
#1 WWAN Main	Yes	Yes	Yes	Yes	No
#2 (Diversity/GPS)	No	No	No	No	Yes

- 6) Identify the LTE voice/data requirements in each operating mode and exposure condition with respect to head and body test configurations, antenna locations, handset flip-cover or slide positions, antenna diversity conditions etc

The MC730 is a data only USB device. Data mode was tested in each operating mode and exposure condition in the body configuration. See test setup photos to see all configurations tested.

- 7) Identify if Maximum Power Reduction (MPR) is optional or mandatory, i.e. built-in by design:
- a) Only mandatory MPR may be considered during SAR testing, when the maximum output power is permanently limited by the MPR implemented within the UE; and only for the applicable RB (resource block) configurations specified in LTE standards

MPR is mandatory, built-in by design on all production units. It was enabled during testing.

Modulation	Channel Bandwidth/transmission Bandwidth Configuration (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

- b) A-MPR (additional MPR) must be disabled
- c) A-MPR was disabled during testing.

- 8) Include the maximum average conducted output power measured on the required test channels for each channel bandwidth and UL modulation used in each frequency band:

The maximum average conducted output power measured for the testing is listed on pages 34-44 of this report. The below table shows the factory set point with the allowable tolerance.

Band	Technology	Class	3GPP Nominal Power dBm	Calibrated Nominal Power dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
Band 2 – 1900 MHz	LTE	3	23.0	23.0	+1.0/-1.5	21.5	24.0
Band 4 – 1750 MHz	LTE	3	22.0	22.0	+1.0/-0.7	21.3	23.0
Band 5 – 850 MHz	LTE	3	23.0	23.0	+1.0/-1.5	21.5	24.0
Band 13 – 750 MHz	LTE	3	23.0	23.0	+1.0/-1.5	21.5	24.0

- 9) Identify all other U.S. wireless operating modes (3G, Wi-Fi, WiMax, Bluetooth etc), device/exposure configurations (head and body, antenna and handset flip-cover or slide positions, antenna diversity conditions etc.) and frequency bands used for these modes

Other wireless modes:

Band	Technology	Class	3GPP Nominal Power dBm	Calibrated Nominal Power dBm	Tolerance dBm	Lower Tolerance dBm	Upper Tolerance dBm
Band Class 0 – 835 MHz	CDMA	3	24.0	24.0	+0.5/-1.0	23.0	24.5
Band Class 1 – 1900 MHz	CDMA	3	23.5	23.5	±0.5	23.0	24.0
Band 2 – 1900 MHz	WCDMA/HSPA	3	22.0	22.0	+1.0/-0.7	21.3	23.0
Band 5 – 850 MHz	WCDMA/HSPA	3	23.0	23.0	±1.0	22.0	24.0
Band 5 – 850 MHz	GPRS	4	32.0	32.0	±1.0	31.0	33.0
Band 5 – 850 MHz	EDGE	E2	26.0	26.0	±1.0	25.0	27.0
Band 2 – 1900 MHz	GPRS	1	29.0	29.0	±1.0	28.0	30.0
Band 2 – 1900 MHz	EDGE	E2	25.0	25.0	±1.0	24.0	26.0

- 10) Include the maximum average conducted output power measured for the other wireless modes and frequency bands.

The maximum average conducted output power measured for the testing is listed on pages 27-30 of this report. The table in item 9 shows the factory set point with the allowable tolerance.

- 11) Identify the simultaneous transmission conditions for the voice and data configurations supported by all wireless modes, device configurations and frequency bands, for the head and body exposure conditions and device operating configurations (handset flip or cover positions, antenna diversity conditions etc.)

The device is unable to transmit WCDMA/GPRS/EDGE/CDMA and LTE simultaneously.

- 12) When power reduction is applied to certain wireless modes to satisfy SAR compliance for simultaneous transmission conditions, other equipment certification or operating requirements, include the maximum average conducted output power measured in each power reduction mode applicable to the simultaneous voice/data transmission configurations for such wireless configurations and frequency bands; and also include details of the power reduction implementation and measurement setup

Power reduction is not required to satisfy SAR compliance.

- 13) Include descriptions of the test equipment, test software, built-in test firmware etc. required to support testing the device when power reduction is applied to one or more transmitters/antennas for simultaneous voice/data transmission

Power reduction is not required to satisfy SAR compliance.

- 14) When appropriate, include a SAR test plan proposal with respect to the above

Power reduction is not required to satisfy SAR compliance.

- 15) If applicable, include preliminary SAR test data and/or supporting information in laboratory testing inquiries to address specific issues and concerns or for requesting further test reduction considerations appropriate for the device; for example, simultaneous transmission configurations.

Not applicable.

9. SAR Test Data Summary

See Measurement Result Data Pages

See Appendix B for SAR Test Data Plots.
See Appendix C for SAR Test Setup Photos.

Procedures Used To Establish Test Signal

The device was either placed into simulated transmit mode using the manufacturer's test codes or the actual transmission is activated through a base station simulator or similar equipment. See data pages for actual procedure used in measurement.

Device Test Condition

In order to verify that the device was tested at full power, conducted output power measurements were performed before and after each SAR measurement to confirm the output power unless otherwise noted. If a conducted power deviation of more than 5% occurred, the test was repeated. The power drift of each test is measured at the start of the test and again at the end of the test. The drift percentage is calculated by the formula $((\text{end}/\text{start})-1)*100$ and rounded to three decimal places. The drift percentage is calculated into the resultant SAR value on the data sheet for each test.

The testing was conducted on all edges closest to each antenna. Side A, Side B, Side C, Side D and Side E testing was conducted for the WWAN antenna. All further test reductions are shown on pages 31-32 for CDMA/GSM/WCDMA bands and pages 45-54 for LTE bands. All testing was conducted per KDB 447498 D01 v06 and D02 v02r01. See the photo in Appendix C for a pictorial of the setups, labeling of the sides tested and antenna locations.

This device is capable of operating in 850/1900 GPRS/EDGE frequency bands. In GPRS mode, the device is in Class 4 for 850 MHz and Class 1 for 1900 MHz. In EDGE mode, the device is in Class E2 for 850/1900 MHz. The testing was conducted in the GPRS mode. The GPRS mode has 1-slot, 2-slot, 3-slot and 4-slot configurations. The power measured is peak power. The average power in all GPRS Slots calculated and the 2-slot had the highest average power. Therefore, the testing was conducted in 2-Slot. The EDGE mode is >5 dB lower than its equivalent slot configuration for GPRS. Therefore, the device was only tested in the highest power configuration which was 2-slot GPRS.


The WCDMA testing was conducted using 12.2 kbps RMC configured in Test Loop Mode 1. The HSPA testing was conducted with HS-DPCCH, E-DPCCH and E-DPDCH all enabled and a 12.2 kbps RMC. FRC was configured according to HS-DPCCH Sub-Test 1 using H-set 1 and QPSK.

The 1xRTT testing was conducted in RC3 with the device configured using TDSO/SO32 with FCH transmitting at full rate. The power control was set to "All Bits Up." 1xRTT did not require SAR testing due to the measured power being less than 1/4 dB higher than Rev. 0.

The Rev. 0 testing was conducted with the Reverse Data Channel rate of 153.6 kbps. The Forward Traffic Channel data rate is set to the 2-slot version of 307.2 kbps with the ACK Channel transmitting in all slots. The power control was set to "All Bits Up." Other rates were not tested due to the conducted power measured was less than 1/4 dB higher than 153.6 kbps.

The Rev. A Subtype 2 testing was conducted with the Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots. The Forward Traffic Channel data rate is set to the 2-slot version of 307.2 kbps with the ACK Channel transmitting in all slots. The power control was set to "All Bits Up." Rev. A did not require SAR testing due to the measured power being less than 1/4 dB higher than Rev. 0.

Figure 10.1
SAR Location Diagram of Modem Testing

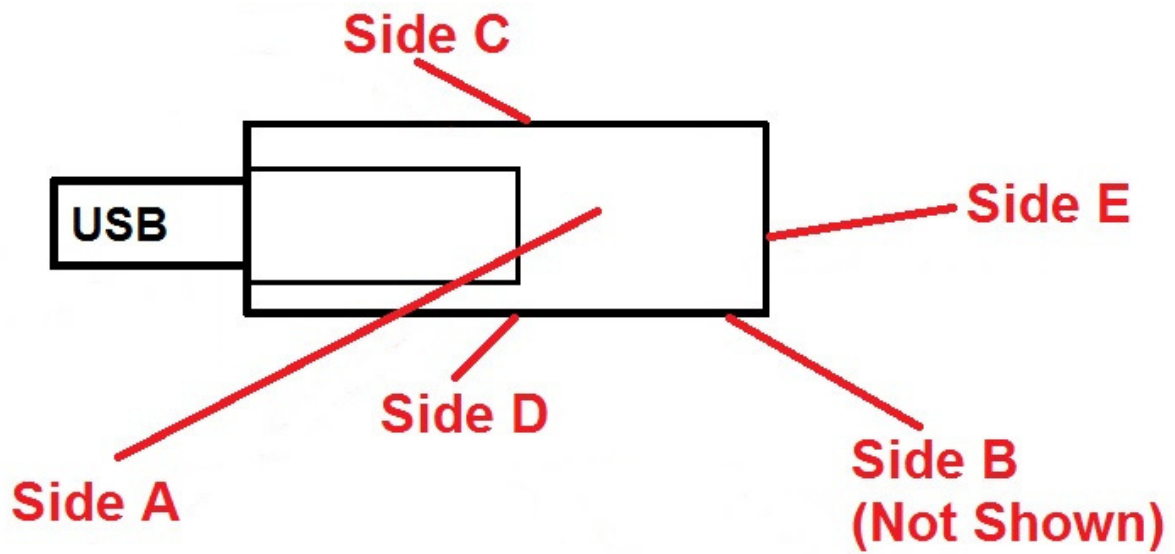

10. FCC 3G Measurement Procedures

Power measurements were performed using a base station simulator under average power.

10.1 Procedures Used to Establish RF Signal for SAR

The device was placed into a simulated call using a base station simulator in a screen room. Such test signals offer a consistent means for testing SAR and recommended for evaluating SAR. The SAR measurement software calculates a reference point at the start and end of the test to check for power drifts. If conducted power deviations of more than 5% occurred, the tests were repeated.

10.2 SAR Measurement Conditions for CDMA2000, 1xEV-DO

10.2.1 Output Power Verification 1xRTT

Use CDMA2000 Rev 6 protocol in the call box.

- 1) Test for RC 3 Reverse FCH, RC3 Reverse SCH0 and demodulation of RC 3, 4 and 5.
 - a. Set up a call using Supplemental Channel Test Mode 3 (RC 3, SO 32) with 9600 bps Fundamental Channel and 9600 bps SCH0 data rate.
 - b. As per C.S0011 or TIA/EIA-98-F Table 4.4.5.2-2, set the test parameters.
 - c. Send alternating '0' and '1' power control bit to the device
 - d. Determine the active channel configuration. If the desired channel configuration is not the active channel configuration, increase $\hat{P}_{or}$ by 1 dB and repeat the verification. Repeat this step until the desired channel configuration becomes active.
 - e. Measure the output power at the device antenna connector.
 - f. Decrease $\hat{P}_{or}$ by 0.5 dB.
 - g. Determine the active channel configuration. If the active channel configuration is the desired channel configuration, measure the output power at the device antenna connector.
 - h. Repeat step f and g until the output power no longer increases or the desired channel configuration is no longer active. Record the highest output power achieved with the desired channel configuration active.
 - i. Repeat step a through h ten times and average the result.

10.2.2 Output Power Verification 1xEvDo

- 1) Use 1xEV-DO Rel 0 protocol in the call box 8960.
 - a. FTAP
 - Select Test Application Protocol to FTAP
 - Set FTAP Rate to 307.2 kbps (2 Slot, QPSK)
 - Generator Info -> Termination Parameters -> Max Forward Packet Duration -> 16 Slots
 - Set $\hat{P}_{or}$ to -60 dBm/1.23 MHz
 - Send continuously '0' power control bits
 - Measure the power at device antenna connector
 - b. RTAP
 - Select Test Application Protocol to RTAP
 - Set RTAP Rate to 9.6 kbps

- Generator Info -> Termination Parameters -> Max Forward Packet Duration -> 16 Slots
 - Set $\hat{I}$ or to -60 dBm/1.23 MHz
 - Send continuously '0' power control bits
 - Measure the power at device antenna connector
 - Repeat above steps for RTAP Rate = 19.2 kbps, 38.4 kbps, 76.8 kbps and 153.6 kbps respectively
- 2) Use 1xEV-DO Rev A protocol in the call box 8960
- a. FETAP
- Select Test Application Protocol to FETAP
 - Set FETAP Rate to 307.2 kbps (2 Slot, QPSK)
 - Generator Info -> Termination Parameters -> Max Forward Packet Duration -> 16 Slots
 - Set $\hat{I}$ or to -60 dBm/1.23 MHz
 - Send continuously '0' power control bits
 - Measure the power at device antenna connector
- b. RETAP
- Select Test Application Protocol to RETAP
 - F-Traffic Format -> 4 (1024, 2, 128) Canonical (307.2k, QPSK) • Set R-Data Pkt Size to 128
 - Protocol Subtype Config -> Release A Physical Layer Subtype -> Subtype 2 -> PL Subtype 2 Access Channel MAC Subtype -> Default (Subtype 0)
 - Generator Info -> Termination Parameters -> Max Forward Packet Duration -> 16 Slots -> ACK R-Data After -> Subpacket 0 (All ACK)
 - Set $\hat{I}$ or to -60 dBm/1.23 MHz
 - Send continuously '0' power control bits
 - Measure the power at device antenna connector
 - Repeat above steps for R-Data Pkt Size = 256, 512, 768, 1024, 1536, 2048, 3072, 4096, 6144, 8192, 12288 respectively.

		IS-2000	1Xev-Do Rev. 0	1Xev-Do Rev. A Subtype 0/1
	Channel	TDSO SO32 RC3	RTAP [dBm]	RTAP [dBm]
Cellular	1013	23.40	23.70	23.22
	384	23.72	24.02	23.56
	777	23.45	23.75	23.31
PCS	25	23.25	23.80	23.06
	600	23.75	23.97	23.53
	1175	22.25	23.07	22.11

CDMA Power Measurements

Power Control was set in "All Bits Up" for all measurements.

10.3 SAR Measurement Conditions for WCDMA/HSDPA/HSUPA

Configure the call box 8960 to support all WCDMA tests in respect to the 3GPP 34.121 (listed in Table below). Measure the power at Ch4132, 4182 and 4233 for US cell; Ch9262, 9400 and 9538 for US PCS band.

For Rel99

- Set a Test Mode 1 loop back with a 12.2kbps Reference Measurement Channel (RMC).
- Set and send continuously Up power control commands to the device
- Measure the power at the device antenna connector using the power meter with average detector.

For HSDPA Rel 6

- Establish a Test Mode 1 loop back with both 1 12.2kbps RMC channel and a H-Set1 Fixed Reference Channel (FRC). With the 8960 this is accomplished by setting the signal Channel Coding to "Fixed Reference Channel" and configuring for HSET-1 QKSP.
- Set beta values and HSDPA settings for HSDPA Subtest1 according to Table below.
- Send continuously Up power control commands to the device
- Measure the power at the device antenna connector using the power meter with modulated average detector.
- Repeat the measurement for the HSDPA Subtest2, 3 and 4 as given in Table below.

For HSUPA Rel 6

- Use UL RMC 12.2kbps and FRC H-Set1 QPSK, Test Mode 1 loop back. With the 8960 this is accomplished by setting the signal Channel Coding to "E-DCH Test Channel" and configuring the equipment category to Cat5_10ms.
- Set the Absolute Grant for HSUPA Subtest1 according to Table below.
- Set the device power to be at least 5dB lower than the Maximum output power
- Send power control bits to give one TPC_cmd = +1 command to the device. If device doesn't send any E-DPCH data with decreased E-TFCI within 500ms, then repeat this process until the decreased E-TFCI is reported.
- Confirm that the E-TFCI transmitted by the device is equal to the target E-TFCI in Table below. If the E-TFCI transmitted by the device is not equal to the target E-TFCI, then send power control bits to give one TPC_cmd = -1 command to the UE. If UE sends any E-DPCH data with decreased E-TFCI within 500 ms, send new power control bits to give one TPC_cmd = -1 command to the UE. Then confirm that the E-TFCI transmitted by the UE is equal to the target E-TFCI in Table below.
- Measure the power using the power meter with modulated average detector.
- Repeat the measurement for the HSUPA Subtest2, 3, 4 and 5 as given in Table below.

10.4 SAR Measurement Conditions for GSM

Configure the 8960 box to support GMSK and 8PSK call respectively, and set one timeslot and two timeslot transmission for GMSK GSM/GPRS and 8PSK EDGE. Measure and record power outputs for both modulations.

3GPP Release Version	Mode	Cellular Band [dBm]			Sub-Test (See Table Below)	MPR
		4132	4183	4233		
99	WCDMA	23.22	23.49	23.54	-	-
6	HSDPA	23.20	23.32	23.45	1	0
6		23.18	23.36	23.49	2	0
6		22.75	23.05	23.03	3	0.5
6		22.71	23.02	23.10	4	0.5
6	HSUPA	23.18	23.38	23.62	1	0
6		21.41	21.56	21.59	2	2
6		22.36	22.68	22.68	3	1
6		21.31	21.64	21.49	4	2
6		23.29	23.69	23.42	5	0

3GPP Release Version	Mode	PCS Band [dBm]			Sub-Test (See Table Below)	MPR
		9262	9400	9538		
99	WCDMA	22.71	22.83	23.00	-	-
6	HSDPA	22.16	22.75	22.99	1	0
6		22.19	22.69	22.97	2	0
6		21.82	22.32	22.61	3	0.5
6		21.85	22.39	22.65	4	0.5
6	HSUPA	22.11	22.77	22.94	1	0
6		20.41	20.84	20.89	2	2
6		21.36	21.93	21.87	3	1
6		20.49	20.82	20.95	4	2
6		22.43	22.79	22.93	5	0

Sub-Test Setup for Release 6 HSDPA

Sub-Test	β_c	β_d	B_c / β_d	β_{hs}
1	2/15	15/15	2/15	4/15
2	12/15	15/15	15/15	24/15
3	15/15	8/15	15/8	30/15
4	15/15	4/15	15/4	30/15
$\Delta_{ack}, \Delta_{nack}$ and $\Delta_{cqi} = 8$				

Sub-Test Setup for Release 6 HSUPA

Sub-Test	β_c	β_d	B_c / β_d	β_{hs}	B_{ec}	B_{ed}	MPR	AG Index	E-TFCI
1	11/15	15/15	11/15	22/15	209/225	1039/225	0.0	20	75
2	6/15	15/15	6/15	12/15	12/15	94/75	2.0	12	67
3	15/15	9/15	15/9	30/15	30/15	47/15	1.0	15	92
4	2/15	15/15	2/15	4/15	2/15	56/15	2.0	17	71
5	15/15	15/15	15/15	30/15	24/15	134/15	0.0	21	81
$\Delta_{ack}, \Delta_{nack}$ and $\Delta_{cqi} = 8$									

GPRS-GMSK/1 slot			
Band	Channel	Peak Power	Frame Average
Cellular	128	31.0	21.97
	190	31.0	21.97
	251	30.9	21.87
PCS	512	28.1	19.07
	661	28.5	19.47
	810	28.3	19.27

GPRS-GMSK/2 slot			
Band	Channel	Peak Power	Frame Average
Cellular	128	28.8	22.78
	190	28.8	22.78
	251	28.7	22.68
PCS	512	25.8	19.78
	661	25.7	19.68
	810	26.2	20.18

GPRS-GMSK/3 slot			
Band	Channel	Peak Power	Frame Average
Cellular	128	26.7	22.44
	190	26.7	22.44
	251	26.6	22.34
PCS	512	24.2	19.94
	661	23.7	19.44
	810	23.3	19.04

GPRS-GMSK/4 slot			
Band	Channel	Peak Power	Frame Average
Cellular	128	25.1	22.09
	190	25.1	22.09
	251	25.1	22.09
PCS	512	23.0	19.99
	661	22.3	19.29
	810	22.0	18.99

EDGE-8PSK/1 slot			
Band	Channel	Peak Power	Frame Average
Cellular	128	26.96	17.93
	190	27.00	17.97
	251	27.00	17.97
PCS	512	25.94	16.91
	661	25.97	16.94
	810	26.00	16.97

EDGE-8PSK/2 slot			
Band	Channel	Peak Power	Frame Average
Cellular	128	23.88	17.86
	190	23.96	17.94
	251	23.94	17.92
PCS	512	22.91	16.89
	661	22.95	16.93
	810	22.96	16.94

EDGE-8PSK/3 slot			
Band	Channel	Peak Power	Frame Average
Cellular	128	21.79	17.53
	190	21.83	17.57
	251	21.80	17.54
PCS	512	20.95	16.69
	661	20.92	16.66
	810	20.89	16.63

EDGE-8PSK/4 slot			
Band	Channel	Peak Power	Frame Average
Cellular	128	20.85	17.84
	190	20.92	17.91
	251	20.90	17.89
PCS	512	19.85	16.84
	661	19.87	16.86
	810	19.89	16.88

Figure 10.1 Test Reduction Table – 3G 850 MHz

Band/ Frequency (MHz)	Technology	Side	Required Channel	Tested/ Reduced
Band 5 824-849 MHz	CDMA	Side A	1013	Reduced ¹
			384	Tested
			777	Reduced ¹
		Side B	1013	Tested
			384	Tested
			777	Tested
		Side C	1013	Tested
			384	Tested
			777	Tested
		Side D	1013	Reduced ¹
			384	Tested
			777	Reduced ¹
		Side E	1013	Reduced ¹
			384	Tested
			777	Reduced ¹
	GSM	Side A	128	Reduced ¹
			190	Tested
			251	Reduced ¹
		Side B	128	Reduced ¹
			190	Tested
			251	Reduced ¹
		Side C	128	Tested
			190	Tested
			251	Tested
		Side D	128	Reduced ¹
			190	Tested
			251	Reduced ¹
		Side E	128	Reduced ¹
			190	Tested
			251	Reduced ¹
	WCDMA	Side A	4132	Reduced ¹
			4183	Tested
			4233	Reduced ¹
		Side B	4132	Reduced ¹
			4183	Tested
			4233	Reduced ¹
		Side C	4132	Tested
			4183	Tested
			4233	Tested
		Side D	4132	Reduced ¹
			4183	Tested
			4233	Reduced ¹
		Side E	4132	Reduced ¹
			4183	Tested
			4233	Reduced ¹

Reduced¹ – When the mid channel is 3 dB below the limit, the remaining channels are not required per KDB 447498 D01 v06 section 4.3.3 page 14.

Figure 10.2 Test Reduction Table – 3G 1900 MHz

Band/ Frequency (MHz)	Technology	Side	Required Channel	Tested/ Reduced
Band 2 1850-1910 MHz	CDMA	Side A	25	Tested
			600	Tested
			1175	Tested
		Side B	25	Tested
			600	Tested
			1175	Tested
		Side C	25	Tested
			600	Tested
			1175	Tested
		Side D	25	Reduced ¹
			600	Tested
			1175	Reduced ¹
		Side E	25	Reduced ¹
			600	Tested
			1175	Reduced ¹
	GSM	Side A	512	Reduced ¹
			661	Tested
			810	Reduced ¹
		Side B	512	Reduced ¹
			661	Tested
			810	Reduced ¹
		Side C	512	Tested
			661	Tested
			810	Tested
		Side D	512	Reduced ¹
			661	Tested
			810	Reduced ¹
		Side E	512	Reduced ¹
			661	Tested
			810	Reduced ¹
	WCDMA	Side A	9262	Tested
			9400	Tested
			9538	Tested
		Side B	9262	Tested
			9400	Tested
			9538	Tested
		Side C	9262	Reduced ¹
			9400	Tested
			9538	Reduced ¹
		Side D	9262	Reduced ¹
			9400	Tested
			9538	Reduced ¹
		Side E	9262	Reduced ¹
			9400	Tested
			9538	Reduced ¹

Reduced¹ – When the mid channel is 3 dB below the limit, the remaining channels are not required per KDB 447498 D01 v06 section 4.3.3 page 14.

10.5 SAR Measurement Conditions for LTE Bands

10.5.1 LTE Functionality

The follow table identifies all the channel bandwidths in each frequency band supported by this device.

LTE Band Class	Bandwidth (MHz)	Frequency or Freq. Band (MHz)
2	1.4, 3, 5, 10, 15, 20	1850-1910 MHz
4	1.4, 3, 5, 10, 15, 20	1710-1755 MHz
5	3, 5, 10	824-849 MHz
13	5, 10	777-787 MHz

10.5.2 Test Conditions

All SAR measurements for LTE were performed using the Anritsu MT8820C. A closed loop power control setting allowed the UE to transmit at the maximum output power during the SAR measurements. The Figure 11.1 table indicates all the test reduction utilized for this report.

MPR was enabled for this device. A-MPR was disabled for all SAR test measurements.

Table 10.5.1 LTE Power Measurements

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
2	QPSK	1.4 MHz	6	0	18607	1850.7	21.9
					18900	1880	22.4
					19193	1909.3	21.0
			3	1	18607	1850.7	21.4
					18900	1880	22.0
					19193	1909.3	20.2
			1	0	18607	1850.7	21.6
					18900	1880	21.9
					19193	1909.3	20.5
			1	3	18607	1850.7	21.5
					18900	1880	22.1
					19193	1909.3	20.3
		3 MHz	15	0	18615	1851.5	22.0
					18900	1880	22.4
					19185	1908.5	21.2
			8	3	18615	1851.5	22.2
					18900	1880	22.6
					19185	1908.5	21.4
			1	0	18615	1851.5	21.8
					18900	1880	22.3
					19185	1908.5	21.2
			1	7	18615	1851.5	21.8
					18900	1880	22.3
					19185	1908.5	20.9
		5 MHz	25	0	18625	1852.5	21.9
					18900	1880	22.4
					19175	1907.5	21.2
			12	6	18625	1852.5	21.9
					18900	1880	22.4
					19175	1907.5	21.3
			1	0	18625	1852.5	21.0
					18900	1880	21.6
					19175	1907.5	20.4
			1	12	18625	1852.5	21.0
					18900	1880	21.5
					19175	1907.5	20.1

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
2	QPSK	10 MHz	50	0	18650	1855	21.9
					18900	1880	22.4
					19150	1905	21.7
			25	13	18650	1855	22.0
					18900	1880	22.4
					19150	1905	21.7
			1	0	18650	1855	21.0
					18900	1880	21.4
					19150	1905	20.3
			1	24	18650	1855	21.2
					18900	1880	21.7
					19150	1905	20.5
		15 MHz	75	0	18675	1857.5	22.0
					18900	1880	22.3
					19125	1902.5	21.8
			36	19	18675	1857.5	22.0
					18900	1880	22.4
					19125	1902.5	21.9
			1	0	18675	1857.5	22.4
					18900	1880	21.8
					19125	1902.5	20.7
			1	36	18675	1857.5	21.3
					18900	1880	21.7
					19125	1902.5	20.8
		20 MHz	100	0	18625	1852.5	22.2
					18900	1880	22.5
					19175	1907.5	21.9
			50	25	18700	1860	22.2
					18900	1880	22.6
					19100	1900	22.2
			1	0	18700	1860	23.8
					18900	1880	23.7
					19100	1900	23.2
			1	49	18700	1860	23.7
					18900	1880	23.9
					19100	1900	23.8

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
2	16QAM	1.4 MHz	6	0	18607	1850.7	21.4
					18900	1880	21.7
					19193	1909.3	20.9
			3	1	18607	1850.7	20.5
					18900	1880	21.0
					19193	1909.3	19.3
			1	0	18607	1850.7	21.4
					18900	1880	21.8
					19193	1909.3	20.4
			1	3	18607	1850.7	21.3
					18900	1880	21.7
					19193	1909.3	20.3
		3 MHz	15	0	18615	1851.5	21.2
					18900	1880	21.5
					19185	1908.5	20.9
			8	3	18615	1851.5	21.2
					18900	1880	21.6
					19185	1908.5	20.8
			1	0	18615	1851.5	21.3
					18900	1880	21.8
					19185	1908.5	20.6
			1	7	18615	1851.5	21.5
					18900	1880	21.8
					19185	1908.5	20.4
		5 MHz	25	0	18625	1852.5	21.0
					18900	1880	21.5
					19175	1907.5	20.7
			12	6	18625	1852.5	21.1
					18900	1880	21.6
					19175	1907.5	20.8
			1	0	18625	1852.5	20.9
					18900	1880	21.3
					19175	1907.5	20.1
			1	12	18625	1852.5	21.0
					18900	1880	21.3
					19175	1907.5	20.0

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
2	16QAM	10 MHz	50	0	18650	1855	21.1
					18900	1880	21.5
					19150	1905	20.9
			25	12	18650	1855	21.0
					18900	1880	21.5
					19150	1905	20.8
			1	0	18650	1855	20.6
					18900	1880	21.0
					19150	1905	20.3
			1	25	18650	1855	20.9
					18900	1880	21.4
					19150	1905	20.4
		15 MHz	75	0	18675	1857.5	21.1
					18900	1880	21.5
					19125	1902.5	21.1
			36	19	18675	1857.5	21.1
					18900	1880	21.5
					19125	1902.5	21.1
			1	0	18675	1857.5	21.1
					18900	1880	21.5
					19125	1902.5	20.6
			1	37	18675	1857.5	21.0
					18900	1880	21.3
					19125	1902.5	20.6
		20 MHz	100	0	18625	1852.5	21.3
					18900	1880	21.5
					19175	1907.5	21.2
			50	25	18700	1860	21.3
					18900	1880	21.5
					19100	1900	21.4
			1	0	18700	1860	21.7
					18900	1880	22.1
					19100	1900	21.3
			1	49	18700	1860	21.4
					18900	1880	21.8
					19100	1900	20.8

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
4	QPSK	1.4 MHz	6	0	19957	1710.7	20.1
					20175	1732.5	20.9
					20393	1754.3	20.5
			3	1	19957	1710.7	19.9
					20175	1732.5	20.2
					20393	1754.3	19.2
			1	0	19957	1710.7	19.6
					20175	1732.5	19.7
					20393	1754.3	19.2
			1	3	19957	1710.7	19.8
					20175	1732.5	20.1
					20393	1754.3	19.3
		3 MHz	15	0	19965	1711.5	20.1
					20175	1732.5	20.9
					20385	1753.5	20.5
			8	3	19965	1711.5	20.1
					20175	1732.5	21.0
					20385	1753.5	20.6
			1	0	19965	1711.5	19.9
					20175	1732.5	19.9
					20385	1753.5	19.1
			1	7	19965	1711.5	19.8
					20175	1732.5	20.2
					20385	1753.5	19.1
		5 MHz	25	0	19975	1712.5	20.2
					20175	1732.5	20.8
					20375	1752.5	20.5
			12	6	19975	1712.5	20.2
					20175	1732.5	21.0
					20375	1752.5	20.5
			1	0	19975	1712.5	19.9
					20175	1732.5	19.6
					20375	1752.5	19.2
			1	12	19975	1712.5	19.7
					20175	1732.5	20.0
					20375	1752.5	19.1

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
4	QPSK	10 MHz	50	0	20000	1715	20.3
					20175	1732.5	20.8
					20350	1750	20.4
			25	12	20000	1715	20.3
					20175	1732.5	20.8
					20350	1750	20.4
			1	0	20000	1715	19.5
					20175	1732.5	19.3
					20350	1750	19.4
			1	25	20000	1715	19.4
					20175	1732.5	20.1
					20350	1750	19.2
		15 MHz	75	0	20025	1717.5	20.3
					20175	1732.5	20.7
					20325	1747.5	20.4
			36	19	20025	1717.5	20.3
					20175	1732.5	20.8
					20325	1747.5	20.3
			1	0	20025	1717.5	19.8
					20175	1732.5	19.3
					20325	1747.5	19.9
			1	37	20025	1717.5	18.9
					20175	1732.5	19.9
					20325	1747.5	19.4
		20 MHz	100	0	20050	1720	20.5
					20175	1732.5	20.7
					20300	1745	20.4
			50	25	20050	1720	21.6
					20175	1732.5	21.7
					20300	1745	21.4
			1	0	20050	1720	23.0
					20175	1732.5	22.3
					20300	1745	22.1
			1	49	20050	1720	22.9
					20175	1732.5	22.7
					20300	1745	22.7

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
4	16QAM	1.4 MHz	6	0	19957	1710.7	19.3
					20175	1732.5	20.1
					20393	1754.3	19.8
			3	1	19957	1710.7	18.9
					20175	1732.5	19.2
					20393	1754.3	18.2
			1	0	19957	1710.7	19.5
					20175	1732.5	19.9
					20393	1754.3	18.8
			1	3	19957	1710.7	19.5
					20175	1732.5	19.9
					20393	1754.3	19.2
		3 MHz	15	0	19965	1711.5	19.2
					20175	1732.5	20.2
					20385	1753.5	19.8
			8	3	19965	1711.5	19.3
					20175	1732.5	20.1
					20385	1753.5	19.7
			1	0	19965	1711.5	19.7
					20175	1732.5	19.8
					20385	1753.5	19.0
			1	7	19965	1711.5	19.7
					20175	1732.5	20.1
					20385	1753.5	19.0
		5 MHz	25	0	19975	1712.5	19.2
					20175	1732.5	20.0
					20375	1752.5	19.6
			12	6	19975	1712.5	19.3
					20175	1732.5	20.2
					20375	1752.5	19.7
			1	0	19975	1712.5	19.7
					20175	1732.5	19.6
					20375	1752.5	19.2
			1	12	19975	1712.5	19.5
					20175	1732.5	19.8
					20375	1752.5	19.2

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
4	16QAM	10 MHz	50	0	20000	1715	19.4
					20175	1732.5	20.1
					20350	1750	19.6
			25	12	20000	1715	19.3
					20175	1732.5	20.0
					20350	1750	19.5
			1	0	20000	1715	19.5
					20175	1732.5	19.5
					20350	1750	19.6
			1	25	20000	1715	19.3
					20175	1732.5	19.8
					20350	1750	19.5
		15 MHz	75	0	20025	1717.5	19.4
					20175	1732.5	19.9
					20325	1747.5	19.5
			36	19	20025	1717.5	19.4
					20175	1732.5	20.0
					20325	1747.5	19.5
			1	0	20025	1717.5	19.8
					20175	1732.5	19.4
					20325	1747.5	19.9
			1	37	20025	1717.5	19.0
					20175	1732.5	19.9
					20325	1747.5	19.3
		20 MHz	100	0	20050	1720	19.5
					20175	1732.5	19.8
					20300	1745	19.5
			50	25	20050	1720	19.6
					20175	1732.5	19.9
					20300	1745	19.5
			1	0	20050	1720	19.8
					20175	1732.5	19.2
					20300	1745	20.0
			1	49	20050	1720	18.9
					20175	1732.5	19.6
					20300	1745	19.7

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
5	QPSK	3 MHz	15	0	20415	825.5	22.5
					20525	836.5	22.8
					20635	847.5	22.8
			8	3	20415	825.5	22.5
					20525	836.5	22.8
					20635	847.5	23.1
			1	0	20415	825.5	21.3
					20525	836.5	22.4
					20635	847.5	22.9
			1	7	20415	825.5	21.7
					20525	836.5	22.0
					20635	847.5	22.8
		5 MHz	25	0	20425	826.5	23.0
					20525	836.5	23.3
					20625	846.5	23.4
			12	6	20425	826.5	22.9
					20525	836.5	23.1
					20625	846.5	23.6
			1	0	20425	826.5	23.2
					20525	836.5	22.6
					20625	846.5	23.0
			1	12	20425	826.5	22.2
					20525	836.5	22.1
					20625	846.5	22.9
		10 MHz	50	0	20450	829.0	23.4
					20525	836.5	23.2
					20600	844.0	23.5
			25	12	20450	829.0	23.7
					20525	836.5	23.5
					20600	844.0	23.5
			1	0	20450	829.0	23.4
					20525	836.5	24.0
					20600	844.0	23.9
			1	25	20450	829.0	24.0
					20525	836.5	23.8
					20600	844.0	24.0

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
5	16QAM	3 MHz	15	0	20415	825.5	21.6
					20525	836.5	22.0
					20635	847.5	22.3
			8	3	20415	825.5	16.3
					20525	836.5	21.9
					20635	847.5	22.4
			1	0	20415	825.5	22.6
					20525	836.5	21.9
					20635	847.5	22.2
			1	7	20415	825.5	21.1
					20525	836.5	21.4
					20635	847.5	22.1
		5 MHz	25	0	20425	826.5	21.7
					20525	836.5	21.9
					20625	846.5	22.1
			12	6	20425	826.5	21.8
					20525	836.5	21.9
					20625	846.5	22.2
			1	0	20425	826.5	23.7
					20525	836.5	21.9
					20625	846.5	22.1
			1	12	20425	826.5	21.3
					20525	836.5	21.2
					20625	846.5	22.1
		10 MHz	50	0	20450	829.0	22.1
					20525	836.5	22.0
					20600	844.0	22.1
			25	12	20450	829.0	22.7
					20525	836.5	22.0
					20600	844.0	22.2
			1	0	20450	829.0	22.2
					20525	836.5	22.5
					20600	844.0	21.6
			1	24	20450	829.0	22.3
					20525	836.5	21.6
					20600	844.0	22.1

Band	Modulation	Bandwidth	RB Size	RB Offset	Channel	Frequency	Power
13	QPSK	5 MHz	25	0	23205	779.5	21.8
					23255	784.5	21.7
			12	6	23205	779.5	21.8
					23255	784.5	21.8
			1	0	23205	779.5	22.6
					23255	784.5	22.8
			1	12	23205	779.5	22.6
					23255	784.5	22.9
		10 MHz	50	0	23230	782	21.9
			25	12	23230	782	21.7
			1	0	23230	782	23.8
			1	25	23230	782	23.4
	16QAM	5 MHz	25	0	23205	779.5	20.5
					23255	784.5	20.5
			12	6	23205	779.5	20.9
					23255	784.5	21.0
			1	0	23205	779.5	21.7
					23255	784.5	22.0
			1	12	23205	779.5	22.2
					23255	784.5	22.2
		10 MHz	50	0	23230	782	20.6
			25	12	23230	782	20.7
			1	0	23230	782	22.1
			1	25	23230	782	22.0

Table 10.5.2 Test Reduction Table – LTE

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced	
Band 2 1850-1910 MHz	A	18700	20 MHz	QPSK	50	25	Reduced ⁶	
		18900					Tested	
		19100					Reduced ⁶	
		18700			100	0	Reduced ¹	
		18900					Reduced ¹	
		19100					Reduced ¹	
		18700			1	0	Reduced ²	
		18900					Reduced ²	
		19100					Reduced ²	
		18700				49	Reduced ⁶	
		18900					Tested	
		19100					Reduced ⁶	
		18700		16QAM	50	25	Reduced ³	
		18900					Reduced ³	
		19100					Reduced ³	
		18700			100	0	Reduced ¹	
		18900					Reduced ¹	
		19100					Reduced ¹	
		18700			1	0	Reduced ⁴	
		18900					Reduced ⁴	
		19100					Reduced ⁴	
		18700				49	Reduced ⁴	
		18900					Reduced ⁴	
		19100					Reduced ⁴	
	All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)							Reduced ⁵
	B	18700	20 MHz	QPSK	50	25	Tested	
		18900					Tested	
		19100					Tested	
		18700			100	0	Reduced ¹	
		18900					Reduced ¹	
		19100					Reduced ¹	
		18700			1	0	Reduced ²	
		18900					Reduced ²	
		19100					Reduced ²	
		18700				49	Tested	
		18900					Tested	
		19100					Tested	
		18700		16QAM	50	25	Reduced ³	
		18900					Reduced ³	
		19100					Reduced ³	
		18700			100	0	Reduced ¹	
		18900					Reduced ¹	
		19100					Reduced ¹	
		18700			1	0	Reduced ⁴	
		18900					Reduced ⁴	
		19100					Reduced ⁴	
		18700				49	Reduced ⁴	
		18900					Reduced ⁴	
		19100					Reduced ⁴	
	All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)							Reduced ⁵

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² – If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴ – If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵ – If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶ – If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 2 1850-1910 MHz	C	18700	20 MHz	QPSK	50	25	Reduced ⁶
		18900					Tested
		19100					Reduced ⁶
		18700			100	0	Reduced ¹
		18900					Reduced ¹
		19100					Reduced ¹
		18700			1	0	Reduced ²
		18900					Reduced ²
		19100					Reduced ²
		18700				49	Tested
		18900					Tested
		19100					Tested
		18700		16QAM	50	25	Reduced ³
		18900					Reduced ³
		19100					Reduced ³
		18700			100	0	Reduced ¹
		18900					Reduced ¹
		19100					Reduced ¹
		18700			1	0	Reduced ⁴
		18900					Reduced ⁴
		19100					Reduced ⁴
		18700				49	Reduced ⁴
		18900					Reduced ⁴
		19100					Reduced ⁴
		19100		Reduced ⁴			
	All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)						Reduced ⁵
	D	18700	20 MHz	QPSK	50	25	Reduced ⁶
		18900					Tested
		19100					Reduced ⁶
		18700			100	0	Reduced ¹
		18900					Reduced ¹
		19100					Reduced ¹
		18700			1	0	Reduced ²
		18900					Reduced ²
		19100					Reduced ²
		18700				49	Reduced ⁶
		18900					Tested
		19100					Reduced ⁶
		18700		16QAM	50	25	Reduced ³
		18900					Reduced ³
		19100					Reduced ³
		18700			100	0	Reduced ¹
		18900					Reduced ¹
		19100					Reduced ¹
		18700			1	0	Reduced ⁴
		18900					Reduced ⁴
		19100					Reduced ⁴
		18700				49	Reduced ⁴
		18900					Reduced ⁴
		19100					Reduced ⁴
19100		Reduced ⁴					
All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)						Reduced ⁵	

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴ - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵ - If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶ - If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 2 1850-1910 MHz	E	18700	20 MHz	QPSK	50	25	Reduced ⁶
		18900					Tested
		19100				100	0
		18700			Reduced ¹		
		18900			1	0	Reduced ¹
		19100					Reduced ¹
		18700				49	Reduced ²
		18900					Reduced ²
		19100					Reduced ²
		18700					Reduced ⁶
		18900			Tested		
		19100			Reduced ⁶		
		18700		16QAM	50	25	Reduced ³
		18900					Reduced ³
		19100				100	0
		18700			Reduced ¹		
		18900			1	0	Reduced ¹
		19100					Reduced ¹
		18700				49	Reduced ⁴
		18900					Reduced ⁴
		19100					Reduced ⁴
		18700					Reduced ⁴
		18900			Reduced ⁴		
		19100			Reduced ⁴		
All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)							Reduced ⁵

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced/
Band 4 1710-1755 MHz	A	18700	20 MHz	QPSK	50	25	Reduced ⁶
		18900					Tested
		19100					Reduced ⁶
		18700			100	0	Reduced ¹
		18900					Reduced ¹
		19100					Reduced ¹
		18700			1	0	Reduced ²
		18900					Reduced ²
		19100					Reduced ²
		18700				49	Reduced ⁶
		18900					Tested
		19100					Reduced ⁶
		18700		16QAM	50	25	Reduced ³
		18900					Reduced ³
		19100					Reduced ³
		18700			100	0	Reduced ¹
		18900					Reduced ¹
		19100					Reduced ¹
		18700			1	0	Reduced ⁴
		18900					Reduced ⁴
		19100					Reduced ⁴
		18700				49	Reduced ⁴
		18900					Reduced ⁴
		19100					Reduced ⁴
		18700					Reduced ⁴
		18900					Reduced ⁴
	All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)						Reduced ⁵
	B	18700	20 MHz	QPSK	50	25	Tested
		18900					Tested
		19100					Tested
		18700			100	0	Reduced ¹
		18900					Reduced ¹
		19100					Reduced ¹
		18700			1	0	Reduced ²
		18900					Reduced ²
		19100					Reduced ²
		18700				49	Tested
		18900					Tested
		19100					Tested
		18700		16QAM	50	25	Reduced ³
		18900					Reduced ³
		19100					Reduced ³
		18700			100	0	Reduced ¹
		18900					Reduced ¹
		19100					Reduced ¹
		18700			1	0	Reduced ⁴
		18900					Reduced ⁴
		19100					Reduced ⁴
		18700				49	Reduced ⁴
		18900					Reduced ⁴
		19100					Reduced ⁴
		18700					Reduced ⁴
18900		Reduced ⁴					
All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)						Reduced ⁵	

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced					
Band 4 1710-1755 MHz	C	18700	20 MHz	QPSK	50	25	Tested					
		18900					Tested					
		19100					Tested					
		18700			100	0	Reduced ¹					
		18900					Reduced ¹					
		19100					Reduced ¹					
		18700			1	0	Reduced ²					
		18900					Reduced ²					
		19100					Reduced ²					
		18700				49	Tested					
		18900					Tested					
		19100					Tested					
		18700		16QAM	50	25	Reduced ³					
		18900					Reduced ³					
		19100					Reduced ³					
		18700			100	0	Reduced ¹					
		18900					Reduced ¹					
		19100					Reduced ¹					
		18700			1	0	Reduced ⁴					
		18900					Reduced ⁴					
		19100					Reduced ⁴					
		18700				49	Reduced ⁴					
		18900					Reduced ⁴					
		19100					Reduced ⁴					
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)						Reduced ⁵				
	D	18700	20 MHz	QPSK	50	25	Reduced ⁶					
		18900					Tested					
		19100					Reduced ⁶					
		18700			100	0	Reduced ¹					
		18900					Reduced ¹					
		19100					Reduced ¹					
		18700			1	0	Reduced ²					
		18900					Reduced ²					
		19100					Reduced ²					
		18700				49	Reduced ⁶					
		18900					Tested					
		19100					Reduced ⁶					
		18700		16QAM	50	25	Reduced ³					
		18900					Reduced ³					
		19100					Reduced ³					
		18700			100	0	Reduced ¹					
		18900					Reduced ¹					
		19100					Reduced ¹					
		18700			1	0	Reduced ⁴					
		18900					Reduced ⁴					
		19100					Reduced ⁴					
		18700				49	Reduced ⁴					
		18900					Reduced ⁴					
		19100					Reduced ⁴					
		All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)						Reduced ⁵				

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 4 1710-1755 MHz	E	18700	20 MHz	QPSK	50	25	Reduced ⁶
		18900					Tested
		19100					Reduced ⁶
		18700			100	0	Reduced ¹
		18900					Reduced ¹
		19100					Reduced ¹
		18700			1	0	Reduced ²
		18900					Reduced ²
		19100					Reduced ²
		18700				49	Reduced ⁶
		18900					Tested
		19100					Reduced ⁶
		18700		16QAM	50	25	Reduced ³
		18900					Reduced ³
		19100					Reduced ³
		18700			100	0	Reduced ¹
		18900					Reduced ¹
		19100					Reduced ¹
		18700			1	0	Reduced ⁴
		18900					Reduced ⁴
		19100					Reduced ⁴
		18700				49	Reduced ⁴
		18900					Reduced ⁴
		19100					Reduced ⁴
		19100					Reduced ⁴
All lower bandwidths (15 MHz, 10 MHz, 5 MHz, 3 MHz, 1.4 MHz)							Reduced ⁵

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced	
Band 5 824-849 MHz	A	20450	10 MHz	QPSK	25	13	Reduced ⁶	
		20525					Tested	
		20600					Reduced ⁶	
		20450			50	0	Reduced ¹	
		20525					Reduced ¹	
		20600					Reduced ¹	
		20450			1	0	Reduced ²	
		20525					Reduced ²	
		20600					Reduced ²	
		20450			1	25	Reduced ⁶	
		20525					Tested	
		20600					Reduced ⁶	
		20450		16QAM	25	13	Reduced ³	
		20525					Reduced ³	
		20600					Reduced ³	
		20450			50	0	Reduced ¹	
		20525					Reduced ¹	
		20600					Reduced ¹	
		20450			1	0	Reduced ⁴	
		20525					Reduced ⁴	
		20600					Reduced ⁴	
		20450			1	25	Reduced ⁴	
		20525					Reduced ⁴	
		20600					Reduced ⁴	
		All lower bandwidths (5 MHz, 3 MHz, 1.4 MHz)						
	B	10 MHz	20450	10 MHz	QPSK	25	13	Tested
			20525					Tested
			20600					Tested
			20450			50	0	Reduced ¹
			20525					Reduced ¹
			20600					Reduced ¹
			20450			1	0	Tested
			20525					Tested
			20600					Tested
			20450			1	25	Reduced ²
			20525					Reduced ²
			20600					Reduced ²
			20450		16QAM	25	13	Reduced ³
			20525					Reduced ³
			20600					Reduced ³
			20450			50	0	Reduced ¹
			20525					Reduced ¹
			20600					Reduced ¹
			20450			1	0	Reduced ⁴
			20525					Reduced ⁴
			20600					Reduced ⁴
			20450			1	25	Reduced ⁴
			20525					Reduced ⁴
			20600					Reduced ⁴
			All lower bandwidths (5 MHz, 3 MHz, 1.4 MHz)					

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 5 824-849 MHz	C	20450	10 MHz	QPSK	25	13	Reduced ⁶
		20525					Tested
		20600					Reduced ⁶
		20450			50	0	Reduced ¹
		20525					Reduced ¹
		20600					Reduced ¹
		20450			1	0	Tested
		20525					Tested
		20600					Tested
		20450				25	Reduced ²
		20525					Reduced ²
		20600					Reduced ²
		20450		16QAM	25	13	Reduced ³
		20525					Reduced ³
		20600					Reduced ³
		20450			50	0	Reduced ¹
		20525					Reduced ¹
		20600					Reduced ¹
		20450			1	0	Reduced ⁴
		20525					Reduced ⁴
		20600					Reduced ⁴
		20450				25	Reduced ⁴
		20525					Reduced ⁴
		20600					Reduced ⁴
		All lower bandwidths (5 MHz, 3 MHz, 1.4 MHz)					Reduced ⁵
	D	20450	10 MHz	QPSK	25	13	Reduced ⁶
		20525					Tested
		20600					Reduced ⁶
		20450			50	0	Reduced ¹
		20525					Reduced ¹
		20600					Reduced ¹
		20450			1	0	Reduced ²
		20525					Reduced ²
		20600					Reduced ²
		20450				25	Tested
		20525					Tested
		20600					Tested
		20450		16QAM	25	13	Reduced ³
		20525					Reduced ³
		20600					Reduced ³
		20450			50	0	Reduced ¹
		20525					Reduced ¹
		20600					Reduced ¹
		20450			1	0	Reduced ⁴
		20525					Reduced ⁴
		20600					Reduced ⁴
		20450				25	Reduced ⁴
		20525					Reduced ⁴
		20600					Reduced ⁴
		All lower bandwidths (5 MHz, 3 MHz, 1.4 MHz)					Reduced ⁵

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05

4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4)

B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 5 824-849 MHz	E	20450	10 MHz	QPSK	25	13	Reduced ⁶
		20525					Tested
		20600					Reduced ⁶
		20450			50	0	Reduced ¹
		20525					Reduced ¹
		20600					Reduced ¹
		20450			1	0	Reduced ⁶
		20525					Tested
		20600					Reduced ⁶
		20450				25	Reduced ²
		20525					Reduced ²
		20600					Reduced ²
		20450		16QAM	25	13	Reduced ³
		20525					Reduced ³
		20600					Reduced ³
		20450			50	0	Reduced ¹
		20525					Reduced ¹
		20600					Reduced ¹
		20450			1	0	Reduced ⁴
		20525					Reduced ⁴
		20600					Reduced ⁴
		20450				25	Reduced ⁴
		20525					Reduced ⁴
		20600					Reduced ⁴
		20600					Reduced ⁴
All lower bandwidths (5 MHz, 3 MHz, 1.4 MHz)							Reduced ⁵

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3) A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3) B) I) page 4.

Reduced³ - If the SAR value in the 50% RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) A) I) page 4.

Reduced⁴- If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 4) B) I) page 5.

Reduced⁵- If the conducted power is within ± 0.5 dB, all testing where the SAR value is less than 1.45 W/kg is reduced per KDB941225 D05 5) B) I) page 5.

Reduced⁶- If the SAR value measured on the middle channel is less than 0.8 W/kg and the conducted power is within ± 0.5 dB, the remaining channels are reduced per KDB941225 D05 page 4 footnote 2.

Band/ Frequency (MHz)	Side	Required Test Channel	Bandwidth	Modulation	RB Allocation	RB Offset	Tested/ Reduced
Band 13 777-787 MHz	A	23230	10 MHz	QPSK	25	13	Tested
		23230			50	0	Reduced ¹
		23230			1	0	Reduced ¹
		23230			1	49	Tested
		23230		16QAM	25	13	Reduced ¹
		23230			50	0	Reduced ¹
		23230			1	0	Reduced ¹
		23230			1	49	Reduced ¹
	All lower bandwidths (5 MHz)						Reduced ²
	B	23230	10 MHz	QPSK	25	13	Tested
		23230			50	0	Reduced ¹
		23230			1	0	Reduced ¹
		23230			1	49	Tested
		23230		16QAM	25	13	Reduced ¹
		23230			50	0	Reduced ¹
		23230			1	0	Reduced ¹
		23230			1	49	Reduced ¹
	All lower bandwidths (5 MHz)						Reduced ²
	C	23230	10 MHz	QPSK	25	13	Tested
		23230			50	0	Reduced ¹
		23230			1	0	Reduced ¹
		23230			1	49	Tested
		23230		16QAM	25	13	Reduced ¹
		23230			50	0	Reduced ¹
		23230			1	0	Reduced ¹
		23230			1	49	Reduced ¹
	All lower bandwidths (5 MHz)						Reduced ²
	D	23230	10 MHz	QPSK	25	13	Tested
		23230			50	0	Reduced ¹
		23230			1	0	Reduced ¹
		23230			1	49	Tested
		23230		16QAM	25	13	Reduced ¹
		23230			50	0	Reduced ¹
		23230			1	0	Reduced ¹
		23230			1	49	Reduced ¹
	All lower bandwidths (5 MHz)						Reduced ²
	E	23230	10 MHz	QPSK	25	13	Tested
		23230			50	0	Reduced ¹
		23230			1	0	Reduced ¹
		23230			1	49	Tested
		23230		16QAM	25	13	Reduced ¹
		23230			50	0	Reduced ¹
		23230			1	0	Reduced ¹
		23230			1	49	Reduced ¹
	All lower bandwidths (5 MHz)						Reduced ²

Reduced¹ – If the SAR value in the 50% RB testing is less than 1.45 W/kg, the 100% RB testing is reduced per KDB941225 D05 3)

A) I) page 4.

Reduced² - If the SAR value in the 1 RB testing is less than 1.45 W/kg, the remaining channels are reduced per KDB941225 D05 3)

B) I) page 4.

SAR Data Summary – 835 MHz Body - CDMA

MEASUREMENT RESULTS

Gap	Plot	Frequency		Modulation	Position	End Power	Reverse Channel	Forward Channel	Measured SAR (W/kg)	Reported SAR (W/kg)
		MHz	Ch.			(dBm)				
5 mm	----	836.52	384	CDMA	Side A	24.02	153.6 kbps	2 Slot 307.2 kbps	0.715	0.80
	----	824.70	1013	CDMA	Side B	23.70	153.6 kbps	2 Slot 307.2 kbps	1.06	1.27
	----	836.52	384	CDMA		24.02	153.6 kbps	2 Slot 307.2 kbps	1.23	1.37
	1	848.31	777	CDMA		23.75	153.6 kbps	2 Slot 307.2 kbps	1.25	1.49
	----	824.70	1013	CDMA	Side C	23.70	153.6 kbps	2 Slot 307.2 kbps	0.986	1.19
	----	836.52	384	CDMA		24.02	153.6 kbps	2 Slot 307.2 kbps	0.994	1.11
	----	848.31	777	CDMA		23.75	153.6 kbps	2 Slot 307.2 kbps	0.757	0.90
	----	836.52	384	CDMA	Side D	24.02	153.6 kbps	2 Slot 307.2 kbps	0.685	0.77
	----	836.52	384	CDMA	Side E	24.02	153.6 kbps	2 Slot 307.2 kbps	0.153	0.17
	----	848.31	777	CDMA	Repeat	23.75	153.6 kbps	2 Slot 307.2 kbps	1.21	1.44
	----	848.31	777	CDMA	Repeat	23.75	153.6 kbps	2 Slot 307.2 kbps	1.19	1.42
						Body 1.6 W/kg (mW/g) averaged over 1 gram				

1. Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

2. SAR Measurement

Phantom Configuration

☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration

☐ Head

☒ Body

3. Test Signal Call Mode

☐ Test Code

☒ Base Station Simulator

4. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

5. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President


SAR Data Summary – 835 MHz Body - WCDMA

MEASUREMENT RESULTS

Gap	Plot	Frequency		Modulation	Position	End Power	RMC	Test Set Up	Measured SAR (W/kg)	Reported SAR (W/kg)
		MHz	Ch.			(dBm)				
5 mm	----	836.6	4183	WCDMA	Side A	23.49	12.2 kbps	Test Loop 1	0.623	0.70
	----	836.6	4183	WCDMA	Side B	23.49	12.2 kbps	Test Loop 1	0.654	0.74
	----	826.4	4132	WCDMA	Side C	23.22	12.2 kbps	Test Loop 1	0.950	1.14
	2	836.6	4183	WCDMA		23.49	12.2 kbps	Test Loop 1	1.03	1.16
	----	846.6	4233	WCDMA		23.54	12.2 kbps	Test Loop 1	1.01	1.12
	----	836.6	4183	WCDMA	Side D	23.49	12.2 kbps	Test Loop 1	0.62	0.70
	----	836.6	4183	WCDMA	Side E	23.49	12.2 kbps	Test Loop 1	0.159	0.18
	----	836.6	4183	WCDMA	Repeat	23.49	12.2 kbps	Test Loop 1	1.01	1.14

Body
1.6 W/kg (mW/g)
averaged over 1 gram

- Battery is fully charged for all tests.
Power Measured ☒ Conducted ☐ ERP ☐ EIRP
- SAR Measurement
Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
SAR Configuration ☐ Head ☒ Body
- Test Signal Call Mode ☐ Test Code ☒ Base Station Simulator
- Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – 835 MHz Body - GPRS

MEASUREMENT RESULTS

Gap	Plot	Frequency		Rev Level/ Modulation	Position	End Power (dBm)	TX Level	Multislot Configuration	Measured SAR (W/kg)	Reported SAR (W/kg)
		MHz	Ch.							
5 mm	----	836.6	190	GMSK	Side A	28.8	5	2 Slot	0.545	0.72
	----	836.6	190	GMSK	Side B	28.8	5	2 Slot	0.452	0.60
	----	824.2	128	GMSK	Side C	28.8	5	2 Slot	1.07	1.41
	----	836.6	190	GMSK		28.8	5	2 Slot	1.05	1.38
	3	848.8	251	GMSK		28.7	5	2 Slot	1.08	1.46
	----	836.6	190	GMSK	Side D	28.8	5	2 Slot	0.511	0.67
	----	836.6	190	GMSK	Side E	28.8	5	2 Slot	0.108	0.14
	----	848.8	251	GMSK	Repeat	28.7	5	2 Slot	1.06	1.43
	----	848.8	251	GMSK	Repeat	28.7	5	2 Slot	1.05	1.42

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

- Battery is fully charged for all tests.
 Power Measured ☒ Conducted ☐ ERP ☐ EIRP
- SAR Measurement
 Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
 SAR Configuration ☐ Head ☒ Body
- Test Signal Call Mode ☐ Test Code ☒ Base Station Simulator
- Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton
 Vice President

SAR Data Summary – 1900 MHz Body - CDMA

MEASUREMENT RESULTS

Gap	Plot	Frequency		Modulation	Position	End Power (dBm)	Reverse Channel	Forward Channel	Measured SAR (W/kg)	Reported SAR (W/kg)
		MHz	Ch.							
5 mm	-----	1851.25	25	CDMA	Side A	23.80	153.6 kbps	2 Slot 307.2 kbps	0.737	0.77
	-----	1880.00	600	CDMA		23.93	153.6 kbps	2 Slot 307.2 kbps	1.24	1.26
	-----	1909.75	1175	CDMA		23.07	153.6 kbps	2 Slot 307.2 kbps	0.870	1.08
	-----	1851.25	25	CDMA	Side B	23.80	153.6 kbps	2 Slot 307.2 kbps	1.17	1.23
	4	1880.00	600	CDMA		23.93	153.6 kbps	2 Slot 307.2 kbps	1.32	1.34
	-----	1909.75	1175	CDMA		23.07	153.6 kbps	2 Slot 307.2 kbps	0.56	0.69
	-----	1851.25	25	CDMA	Side C	23.80	153.6 kbps	2 Slot 307.2 kbps	0.755	0.79
	-----	1880.00	600	CDMA		23.93	153.6 kbps	2 Slot 307.2 kbps	1.14	1.16
	-----	1909.75	1175	CDMA		23.07	153.6 kbps	2 Slot 307.2 kbps	0.79	0.98
	-----	1880.00	600	CDMA	Side D	23.93	153.6 kbps	2 Slot 307.2 kbps	0.757	0.77
	-----	1880.00	600	CDMA	Side E	23.93	153.6 kbps	2 Slot 307.2 kbps	0.586	0.60
	-----	1880.00	600	CDMA	Repeat	23.93	153.6 kbps	2 Slot 307.2 kbps	1.30	1.32
						Body 1.6 W/kg (mW/g) averaged over 1 gram				

1. Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

2. SAR Measurement

Phantom Configuration

☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration

☐ Head

☒ Body

3. Test Signal Call Mode

☐ Test Code

☒ Base Station Simulator

4. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

5. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – 1900 MHz Body - WCDMA

MEASUREMENT RESULTS

Gap	Plot	Frequency		Rev Level/ Modulation	Position	End Power	RMC	Test Set Up	Measured SAR (W/kg)	Reported SAR (W/kg)
		MHz	Ch.			(dBm)				
5 mm	----	1852.4	9262	WCDMA	Side A	22.71	12.2 kbps	Test Loop 1	0.635	0.68
	----	1880.0	9400	WCDMA		22.83	12.2 kbps	Test Loop 1	0.925	0.96
	5	1907.6	9538	WCDMA		23.00	12.2 kbps	Test Loop 1	1.26	1.26
	----	1852.4	9262	WCDMA	Side B	22.71	12.2 kbps	Test Loop 1	0.55	0.59
	----	1880.0	9400	WCDMA		22.83	12.2 kbps	Test Loop 1	0.855	0.89
	----	1907.6	9538	WCDMA		23.00	12.2 kbps	Test Loop 1	1.02	1.02
	----	1880.0	9400	WCDMA	Side C	22.83	12.2 kbps	Test Loop 1	0.547	0.57
	----	1880.0	9400	WCDMA	Side D	22.83	12.2 kbps	Test Loop 1	0.710	0.74
	----	1880.0	9400	WCDMA	Side E	22.83	12.2 kbps	Test Loop 1	0.461	0.48
	----	1907.6	9538	WCDMA	Repeat	23.00	12.2 kbps	Test Loop 1	1.24	1.24

Body
1.6 W/kg (mW/g)
averaged over 1 gram

1. Battery is fully charged for all tests.

Power Measured

☒ Conducted

☐ ERP

☐ EIRP

2. SAR Measurement

Phantom Configuration

☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration

☐ Head

☒ Body

3. Test Signal Call Mode

☐ Test Code

☒ Base Station Simulator

4. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip ☒ N/A

5. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – 1900 MHz Body - GPRS

MEASUREMENT RESULTS

Gap	Plot	Frequency		Rev Level/ Modulation	Position	End Power (dBm)	TX Level	Multislot Configuration	Measured SAR (W/kg)	Reported SAR (W/kg)
		MHz	Ch.							
5 mm	----	1880.0	661	GMSK	Side A	25.7	0	2 Slot	0.174	0.30
	----	1880.0	661	GMSK	Side B	25.7	0	2 Slot	0.267	0.45
	----	1880.0	661	GMSK	Side C	25.7	0	2 Slot	0.163	0.28
	----	1880.0	661	GMSK	Side D	25.7	0	2 Slot	0.281	0.48
	----	1880.0	661	GMSK	Side E	25.7	0	2 Slot	0.166	0.28

Body
1.6 W/kg (mW/g)
averaged over 1 gram

- Battery is fully charged for all tests.
Power Measured ☒ Conducted ☐ ERP ☐ EIRP
- SAR Measurement
Phantom Configuration ☐ Left Head ☒ Eli4 ☐ Right Head
SAR Configuration ☐ Head ☒ Body
- Test Signal Call Mode ☐ Test Code ☒ Base Station Simulator
- Test Configuration ☐ With Belt Clip ☐ Without Belt Clip ☒ N/A
- Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – 1900 MHz Body – LTE Band 2

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
5 mm	-----	Side A	1880.0	18900	20 MHz/QPSK	1	49	0	23.9	0.749	0.77
	-----		1880.0	18900	20 MHz/QPSK	50	25	1	22.6	0.647	0.71
	-----	Side B	1860.0	18700	20 MHz/QPSK	1	49	0	23.7	1.08	1.16
	7		1880.0	18900	20 MHz/QPSK	1	49	0	23.9	1.36	1.39
	-----		1900.0	19100	20 MHz/QPSK	1	49	0	23.8	0.862	0.90
	-----		1860.0	18700	20 MHz/QPSK	50	25	1	22.2	1.05	1.26
	-----		1880.0	18900	20 MHz/QPSK	50	25	1	22.6	1.03	1.13
	-----		1900.0	19100	20 MHz/QPSK	50	25	1	22.2	0.766	0.92
	-----		1860.0	18700	20 MHz/QPSK	1	49	0	23.7	0.734	0.79
	-----	Side C	1880.0	18900	20 MHz/QPSK	1	49	0	23.9	0.935	0.96
	-----		1900.0	19100	20 MHz/QPSK	1	49	0	23.8	0.813	0.85
	-----		1880.0	18900	20 MHz/QPSK	50	25	1	22.6	0.712	0.78
	-----	Side D	1880.0	18900	20 MHz/QPSK	1	49	0	23.9	0.770	0.79
	-----		1880.0	18900	20 MHz/QPSK	50	25	1	22.6	0.690	0.76
	-----	Side E	1880.0	18900	20 MHz/QPSK	1	49	0	23.9	0.718	0.73
	-----		1880.0	18900	20 MHz/QPSK	50	25	1	22.6	0.649	0.71
	-----	Repeat	1880.0	18900	20 MHz/QPSK	1	49	0	23.9	1.34	1.37
Body 1.6 W/kg (mW/g) averaged over 1 gram											

1. Battery is fully charged for all tests.

Power Measured ☒ Conducted

☐ ERP

☐ EIRP

2. SAR Measurement

Phantom Configuration ☐ Left Head

☒ Eli4

☐ Right Head

SAR Configuration ☐ Head

☒ Body

3. Test Signal Call Mode

☐ Test Code

☒ Base Station Simulator

4. Test Configuration

☐ With Belt Clip

☐ Without Belt Clip

☒ N/A

5. Tissue Depth is at least 15.0 cm



Jay M. Moulton
Vice President

SAR Data Summary – 1750 MHz Body – LTE Band 4

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.					(dBm)		
5 mm	-----	Side A	1732.5	20175	20 MHz/QPSK	1	0	0	22.7	0.651	0.70
	-----		1732.5	20175	20 MHz/QPSK	50	25	1	21.7	0.614	0.66
	-----	Side B	1720.0	20050	20 MHz/QPSK	1	49	0	22.9	0.885	0.91
	-----		1732.5	20175	20 MHz/QPSK	1	49	0	22.7	0.888	0.95
	-----		1745.0	20300	20 MHz/QPSK	1	49	0	22.7	0.818	0.88
	-----		1720.0	20050	20 MHz/QPSK	50	25	1	21.6	0.672	0.74
	-----		1732.5	20175	20 MHz/QPSK	50	25	1	21.7	0.610	0.65
	-----		1745.0	20300	20 MHz/QPSK	50	25	1	21.4	0.729	0.84
	8	Side C	1720.0	20050	20 MHz/QPSK	1	49	0	22.9	1.37	1.40
	-----		1732.5	20175	20 MHz/QPSK	1	49	0	22.7	1.24	1.33
	-----		1745.0	20300	20 MHz/QPSK	1	49	0	22.7	1.13	1.21
	-----		1720.0	20050	20 MHz/QPSK	50	25	1	21.6	1.04	1.14
	-----		1732.5	20175	20 MHz/QPSK	50	25	1	21.7	1.24	1.33
	-----		1745.0	20300	20 MHz/QPSK	50	25	1	21.4	1.19	1.37
	-----	Side D	1732.5	20175	20 MHz/QPSK	1	0	0	22.7	0.498	0.53
	-----		1732.5	20175	20 MHz/QPSK	50	25	1	21.7	0.467	0.50
	-----	Side E	1732.5	20175	20 MHz/QPSK	1	0	0	22.7	0.361	0.39
	-----		1732.5	20175	20 MHz/QPSK	50	25	1	21.7	0.317	0.34
	-----	Repeat	1732.5	20175	20 MHz/QPSK	1	49	0	22.9	1.35	1.38

Body
1.6 W/kg (mW/g)
averaged over 1 gram

- Battery is fully charged for all tests.
Power Measured ☒ Conducted
- SAR Measurement
Phantom Configuration ☐ Left Head
SAR Configuration ☐ Head
- Test Signal Call Mode ☐ Test Code
- Test Configuration ☐ With Belt Clip
- Tissue Depth is at least 15.0 cm

- ☐ ERP ☐ EIRP
- ☒ Eli4 ☐ Right Head
- ☒ Body
- ☒ Base Station Simulator
- ☐ Without Belt Clip ☒ N/A



Jay M. Moulton
Vice President

SAR Data Summary – 850 MHz Body – LTE Band 5

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
5 mm	-----	Side A	836.5	20525	10 MHz/QPSK	1	25	0	23.8	0.753	0.79
	-----		836.5	20525	10 MHz/QPSK	25	13	1	23.5	0.485	0.54
	-----	Side B	829.0	20450	10 MHz/QPSK	1	25	0	24.0	1.05	1.05
	9		836.5	20525	10 MHz/QPSK	1	25	0	23.8	1.37	1.44
	-----		844.0	20600	10 MHz/QPSK	1	25	0	24.0	1.18	1.18
	-----		829.0	20450	10 MHz/QPSK	25	13	1	23.7	1.04	1.11
	-----		836.5	20525	10 MHz/QPSK	25	13	1	23.5	1.26	1.41
	-----		844.0	20600	10 MHz/QPSK	25	13	1	23.5	1.14	1.28
	-----	Side C	829.0	20450	10 MHz/QPSK	1	25	0	24.0	0.840	0.84
	-----		836.5	20525	10 MHz/QPSK	1	25	0	23.8	0.846	0.89
	-----		844.0	20600	10 MHz/QPSK	1	25	0	24.0	0.675	0.68
	-----		836.5	20525	10 MHz/QPSK	25	13	1	23.5	0.633	0.71
	-----	Side D	829.0	20450	10 MHz/QPSK	1	25	0	24.0	0.741	0.74
	-----		836.5	20525	10 MHz/QPSK	1	25	0	23.8	0.939	0.98
	-----		844.0	20600	10 MHz/QPSK	1	25	0	24.0	0.712	0.71
	-----		836.5	20525	10 MHz/QPSK	25	13	1	23.5	0.579	0.65
	-----	Side E	836.5	20525	10 MHz/QPSK	1	25	0	23.8	0.165	0.17
	-----		836.5	20525	10 MHz/QPSK	25	13	1	23.5	0.141	0.16
	-----	Repeat	836.5	20525	10 MHz/QPSK	1	25	0	23.8	1.36	1.42

Body
1.6 W/kg (mW/g)
 averaged over 1 gram

- Battery is fully charged for all tests.
 Power Measured ☒ Conducted
- SAR Measurement
 Phantom Configuration ☐ Left Head
 SAR Configuration ☐ Head
- Test Signal Call Mode ☐ Test Code
- Test Configuration ☐ With Belt Clip
- Tissue Depth is at least 15.0 cm

- ☐ ERP ☐ EIRP
- ☒ Eli4 ☐ Right Head
- ☒ Body
- ☒ Base Station Simulator
- ☐ Without Belt Clip ☒ N/A



Jay M. Moulton
 Vice President

SAR Data Summary – 750 MHz Body – LTE Band 13

MEASUREMENT RESULTS											
Gap	Plot	Position	Frequency		BW/ Modulation	RB Size	RB Offset	MPR Target	End Power (dBm)	Measured SAR (W/kg)	Reported SAR (W/kg)
			MHz	Ch.							
5 mm	-----	Side A	782	23230	10 MHz/QPSK	1	25	0	23.4	0.674	0.77
	-----		782	23230	10 MHz/QPSK	25	13	1	21.7	0.559	0.75
	-----	Side B	782	23230	10 MHz/QPSK	1	25	0	23.4	0.380	0.44
	-----		782	23230	10 MHz/QPSK	25	13	1	21.7	0.322	0.43
	10	Side C	782	23230	10 MHz/QPSK	1	25	0	23.4	0.892	1.02
	-----		782	23230	10 MHz/QPSK	25	13	1	21.7	0.756	1.02
	-----	Side D	782	23230	10 MHz/QPSK	1	25	0	23.4	0.519	0.60
	-----		782	23230	10 MHz/QPSK	25	13	1	21.7	0.425	0.57
	-----	Side E	782	23230	10 MHz/QPSK	1	25	0	23.4	0.168	0.19
	-----		782	23230	10 MHz/QPSK	25	13	1	21.7	0.136	0.18
	-----	Repeat	782	23230	10 MHz/QPSK	1	25	0	23.4	0.865	0.99

Body
1.6 W/kg (mW/g)
averaged over 1 gram

- Battery is fully charged for all tests.
Power Measured ☒ Conducted
- SAR Measurement
Phantom Configuration ☐ Left Head
SAR Configuration ☐ Head
- Test Signal Call Mode ☐ Test Code
- Test Configuration ☐ With Belt Clip
- Tissue Depth is at least 15.0 cm

☐ ERP

☐ EIRP

☒ Eli4

☐ Right Head

☒ Body

☒ Base Station Simulator

☐ Without Belt Clip

☒ N/A



Jay M. Moulton
Vice President

11. Test Equipment List

Table 11.1 Equipment Specifications

Type	Calibration Due Date	Calibration Done Date	Serial Number
Staubli Robot TX60L	N/A	N/A	F07/55M6A1/A/01
Measurement Controller CS8c	N/A	N/A	1012
ELI4 Flat Phantom	N/A	N/A	1065
Device Holder	N/A	N/A	N/A
Data Acquisition Electronics 4	08/17/2017	08/17/2016	759
Data Acquisition Electronics 4	04/15/2017	04/15/2016	1416
SPEAG E-Field Probe EX3DV4	08/31/2017	08/31/2016	3693
Speag Validation Dipole D750V2	08/10/2017	08/10/2015	1053
Speag Validation Dipole D835V2	08/10/2017	08/10/2015	4d131
Speag Validation Dipole D1750V2	08/13/2017	08/13/2015	1061
Speag Validation Dipole D1900V2	08/13/2017	08/13/2015	5d147
Agilent N1911A Power Meter	05/20/2019	03/20/2017	GB45100254
Agilent N1922A Power Sensor	06/25/2017	06/25/2015	MY45240464
Advantest R3261A Spectrum Analyzer	03/26/2019	03/20/2017	31720068
Agilent (HP) 8350B Signal Generator	03/26/2019	03/20/2017	2749A10226
Agilent (HP) 83525A RF Plug-In	03/26/2019	03/20/2017	2647A01172
Agilent (HP) 8753C Vector Network Analyzer	03/26/2019	03/20/2017	3135A01724
Agilent (HP) 85047A S-Parameter Test Set	03/26/2019	03/20/2017	2904A00595
Agilent (HP) 8960 Base Station Sim.	03/31/2017	03/31/2015	MY48360364
Anritsu MT8820C	07/28/2017	07/28/2015	6201176199
Apriel Dielectric Probe Assembly	N/A	N/A	0011
Body Equivalent Matter (750 MHz)	N/A	N/A	N/A
Body Equivalent Matter (835 MHz)	N/A	N/A	N/A
Body Equivalent Matter (1750 MHz)	N/A	N/A	N/A
Body Equivalent Matter (1900 MHz)	N/A	N/A	N/A

12. Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC/IC. These measurements are taken to simulate the RF effects exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body is a very complex phenomena that depends on the mass, shape, and size of the body; the orientation of the body with respect to the field vectors; and, the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

13. References

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radio Frequency Radiation, August 1996
- [2] ANSI/IEEE C95.1 – 1992, American National Standard Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 300kHz to 100GHz, New York: IEEE, 1992.
- [3] ANSI/IEEE C95.3 – 2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave, New York: IEEE, 2002.
- [4] International Electrotechnical Commission, IEC 62209-2 (Edition 1.0), Human Exposure to radio frequency fields from hand-held and body mounted wireless communication devices – Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), March 2010.
- [5] IEEE Standard 1528 – 2013, IEEE Recommended Practice for Determining the Peak-Spatial Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communication Devices: Measurement Techniques, June 2013.
- [6] Industry Canada, RSS – 102 Issue 5, Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), March 2010.
- [7] Health Canada, Safety Code 6, Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3kHz to 300 GHz, 2009.

Appendix A – System Validation Plots and Data

Test Result for UIM Dielectric Parameter

Wed 29/Mar/2017

Freq Frequency (GHz)

FCC_eH Limits for Head Epsilon

FCC_sH Limits for Head Sigma

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.7000	55.73	0.96	55.72	0.97
0.7100	55.69	0.96	55.69	0.98
0.7200	55.65	0.96	55.66	0.98
0.7300	55.61	0.96	55.63	0.98
0.7400	55.57	0.96	55.60	0.99
0.7500	55.53	0.96	55.57	0.99
0.7600	55.49	0.96	55.54	0.99
0.7700	55.45	0.96	55.50	1.00
0.7800	55.41	0.97	55.46	1.00
0.7820	55.404	0.97	55.452	1.00*
0.7900	55.38	0.97	55.42	1.00
0.8000	55.34	0.97	55.38	1.01

* value interpolated

Test Result for UIM Dielectric Parameter

Mon 27/Mar/2017

Freq Frequency (GHz)

FCC_eH Limits for Head Epsilon

FCC_sH Limits for Head Sigma

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.8050	55.32	0.97	54.24	0.94
0.8150	55.28	0.97	54.28	0.95
0.8242	55.243	0.97	54.326	0.959*
0.8247	55.241	0.97	54.329	0.96*
0.8250	55.24	0.97	54.33	0.96
0.8264	55.234	0.97	54.336	0.963*
0.8290	55.224	0.97	54.346	0.968*
0.8350	55.20	0.97	54.37	0.98
0.83552	55.198	0.971	54.372	0.981*
0.8365	55.196	0.972	54.375	0.982*
0.8366	55.195	0.972	54.375	0.982*
0.8440	55.173	0.979	54.397	0.989*
0.8450	55.17	0.98	54.40	0.99
0.8466	55.165	0.982	54.406	0.995*
0.84831	55.16	0.983	54.413	1.00*
0.8488	55.159	0.984	54.415	1.001*
0.8550	55.14	0.99	54.44	1.02
0.8650	55.11	1.01	54.48	1.04

* value interpolated

Test Result for UIM Dielectric Parameter

Wed 22/Mar/2017

Freq Frequency (GHz)

FCC_eH Limits for Head Epsilon

FCC_sH Limits for Head Sigma

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
1.6900	53.59	1.45	52.89	1.51
1.7000	53.56	1.46	52.85	1.52
1.7100	53.54	1.46	52.81	1.53
1.7200	53.51	1.47	52.78	1.54
1.7300	53.48	1.48	52.74	1.55
1.7325	53.475	1.48	52.73	1.55*
1.7400	53.46	1.48	52.70	1.55
1.7450	53.445	1.485	52.69	1.555*
1.7500	53.43	1.49	52.68	1.56
1.7600	53.41	1.49	52.66	1.56
1.7700	53.38	1.50	52.65	1.57
1.7800	53.35	1.51	52.61	1.58
1.7900	53.33	1.51	52.58	1.59

* value interpolated

Test Result for UIM Dielectric Parameter

Thu 23/Mar/2017

Freq Frequency (GHz)

FCC_eH Limits for Head Epsilon

FCC_sH Limits for Head Sigma

FCC_eB Limits for Body Epsilon

FCC_sB Limits for Body Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
1.8500	53.30	1.52	53.27	1.49
1.8502	53.30	1.52	53.27	1.49*
1.8513	53.30	1.52	53.267	1.491*
1.8524	53.30	1.52	53.265	1.492*
1.8600	53.30	1.52	53.25	1.50
1.8700	53.30	1.52	53.23	1.51
1.8800	53.30	1.52	53.21	1.52
1.8900	53.30	1.52	53.19	1.53
1.9000	53.30	1.52	53.17	1.54
1.9076	53.30	1.52	53.155	1.548*
1.9088	53.30	1.52	53.152	1.549*
1.9098	53.30	1.52	53.15	1.55*
1.9100	53.30	1.52	53.15	1.55
1.9200	53.30	1.52	53.14	1.57
1.9300	53.30	1.52	53.12	1.58

* value interpolated

RF Exposure Lab

Plot 1

DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN:1053

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1
Medium: MSL750; Medium parameters used: $f = 750$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 55.57$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 3/29/2017; Ambient Temp: 23 °C; Tissue Temp: 21 °C


Probe: EX3DV4 - SN3693; ConvF(9.08, 9.08, 9.08); Calibrated: 8/31/2016;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/15/2016
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Procedure Notes:

750 MHz/Verification/Area Scan (5x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.08 W/kg

750 MHz/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 31.227 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 1.30 W/kg
SAR(1 g) = 0.865 W/kg; SAR(10 g) = 0.569 W/kg
 $P_{IN}=100$ mW
Maximum value of SAR (measured) = 1.10 W/kg

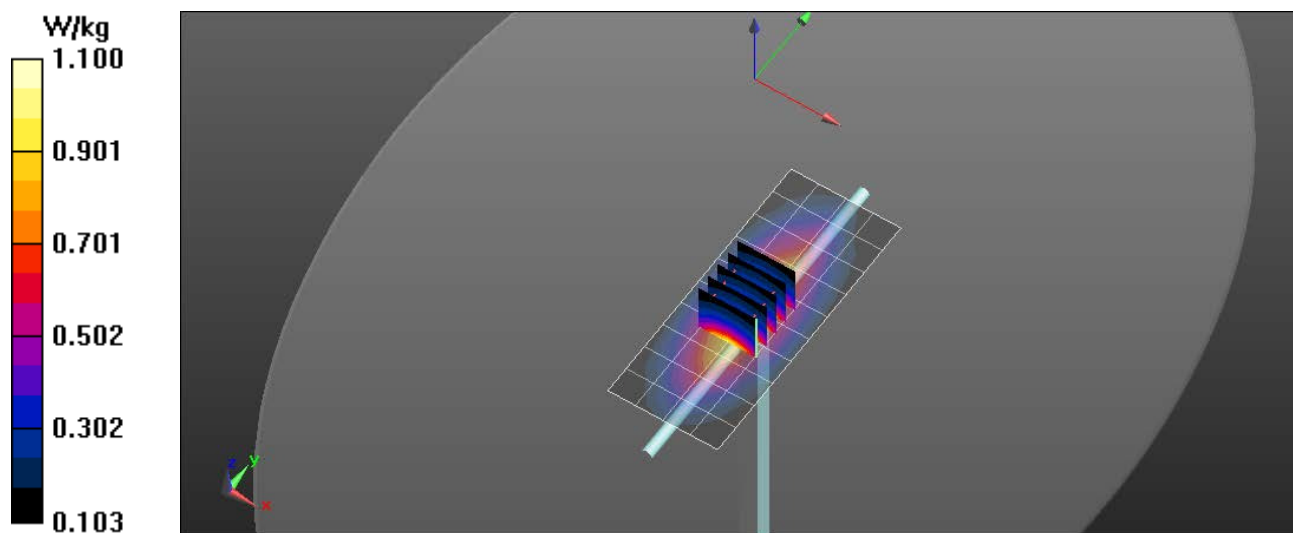

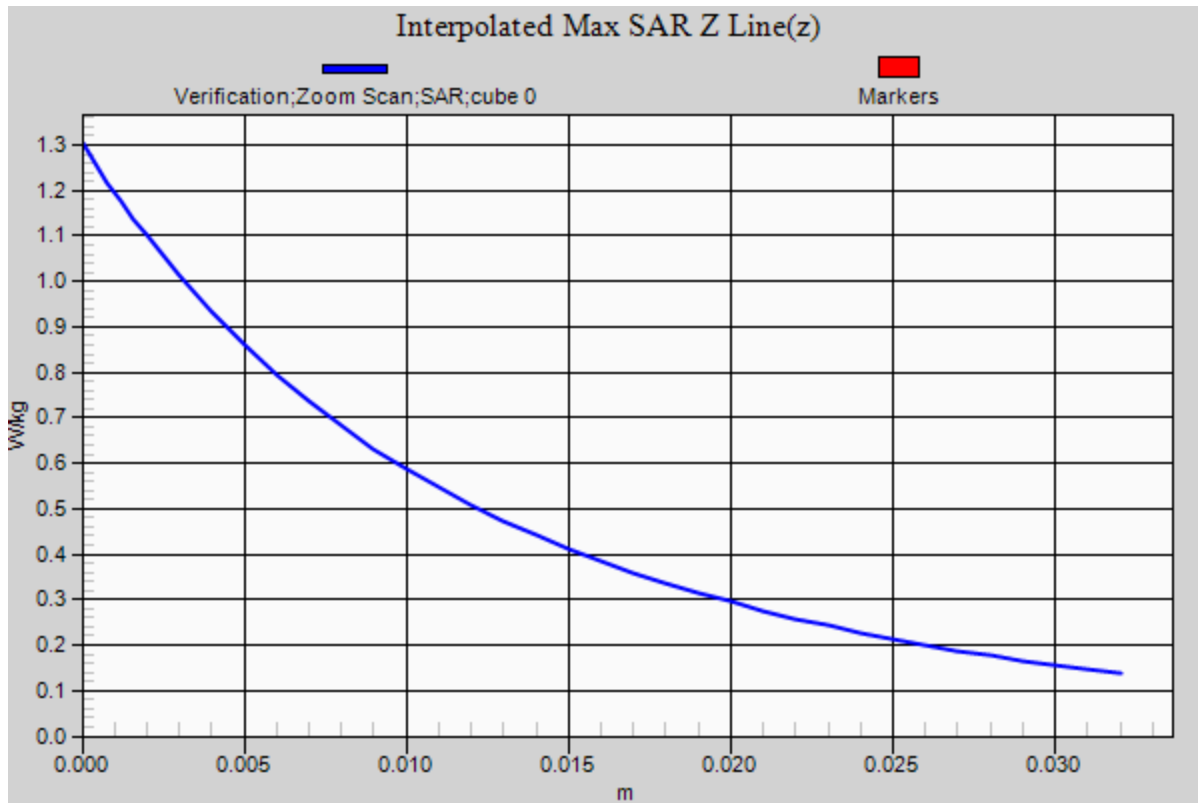

RF Exposure Lab

Plot 2

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d131

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium: MSL835; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.98 \text{ S/m}$; $\epsilon_r = 54.37$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

Test Date: Date: 3/27/2017; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(9.08, 9.08, 9.08); Calibrated: 8/31/2016;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/15/2016
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)


Procedure Notes:


835 MHz/Verification/Area Scan (5x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 1.19 W/kg

835 MHz/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 31.164 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.45 W/kg
SAR(1 g) = 0.948 W/kg; SAR(10 g) = 0.616 W/kg
 $P_{IN}=100 \text{ mW}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.20 W/kg

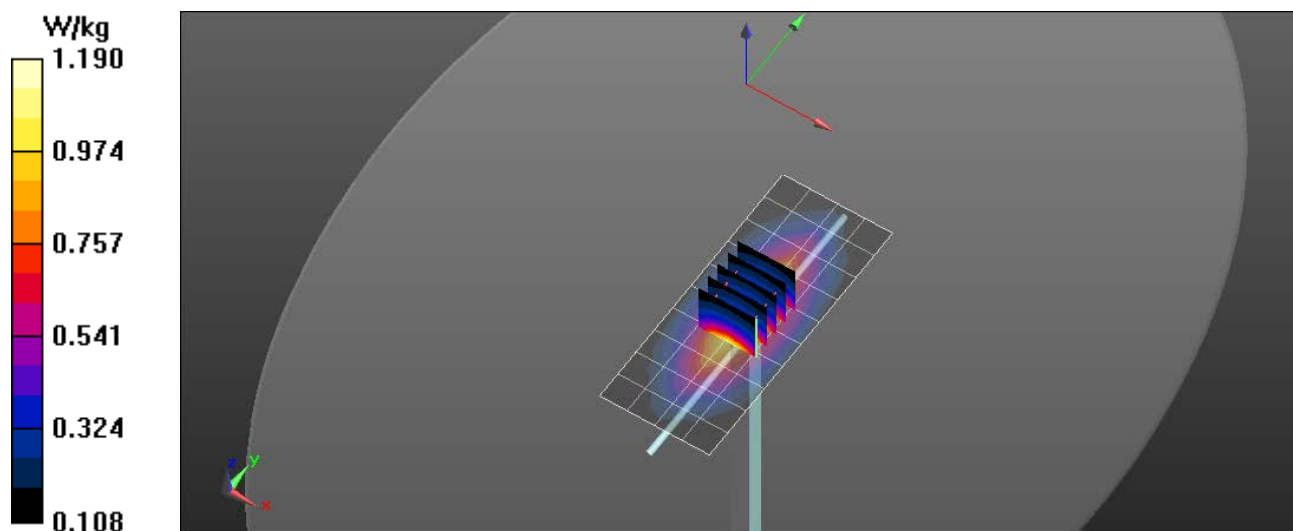

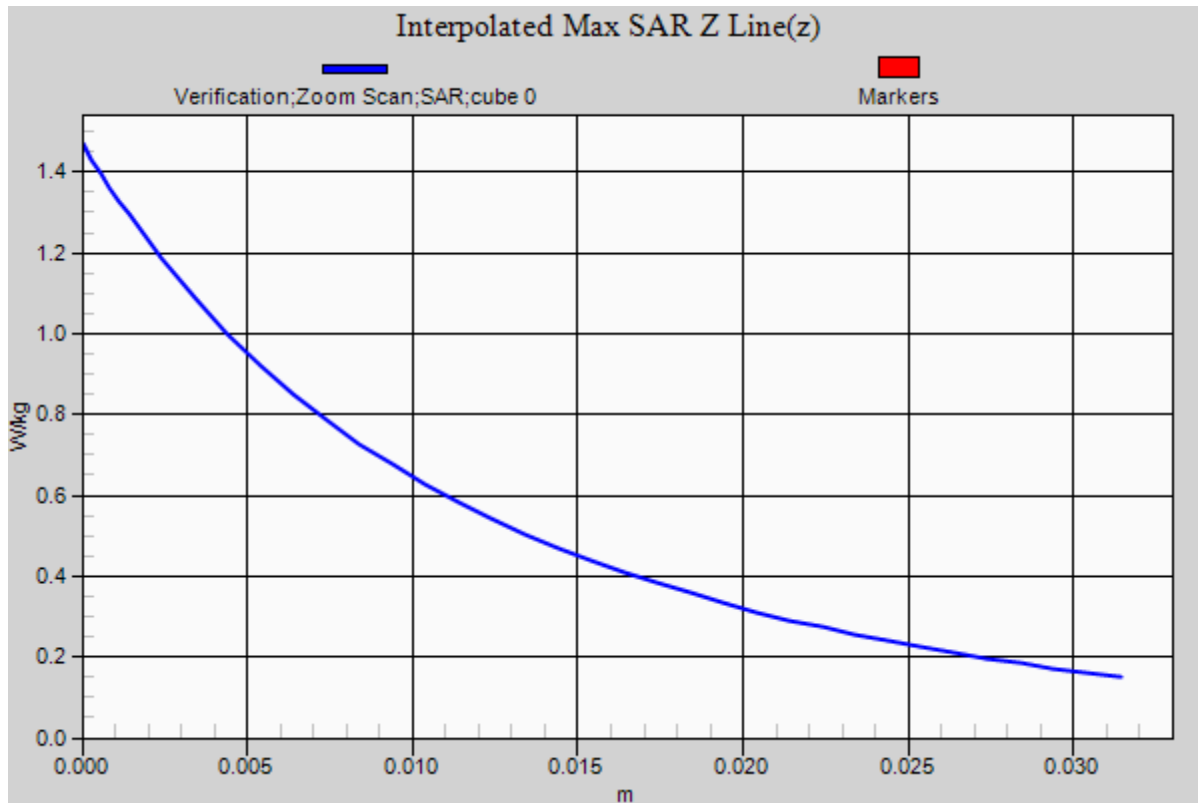

RF Exposure Lab

Plot 3

DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1061

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1
Medium: MSL1750; Medium parameters used: $f = 1750$ MHz; $\sigma = 1.56$ S/m; $\epsilon_r = 52.68$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 3/22/2017; Ambient Temp: 23 °C; Tissue Temp: 21 °C


Probe: EX3DV4 - SN3693; ConvF(7.72, 7.72, 7.72); Calibrated: 8/31/2016;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/17/2016
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Procedure Notes:

1750 MHz/Verification/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 5.33 W/kg

1750 MHz/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 31.227 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 6.89 W/kg
SAR(1 g) = 3.85 W/kg; SAR(10 g) = 2.03 W/kg
 $P_{IN}=100$ mW
Maximum value of SAR (measured) = 5.49 W/kg

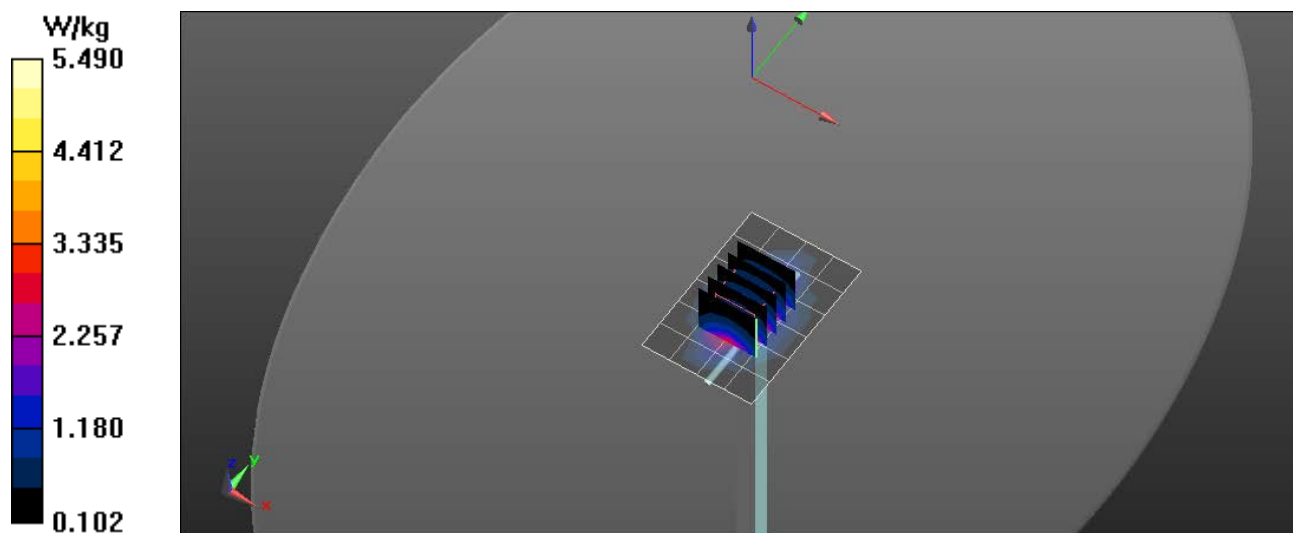

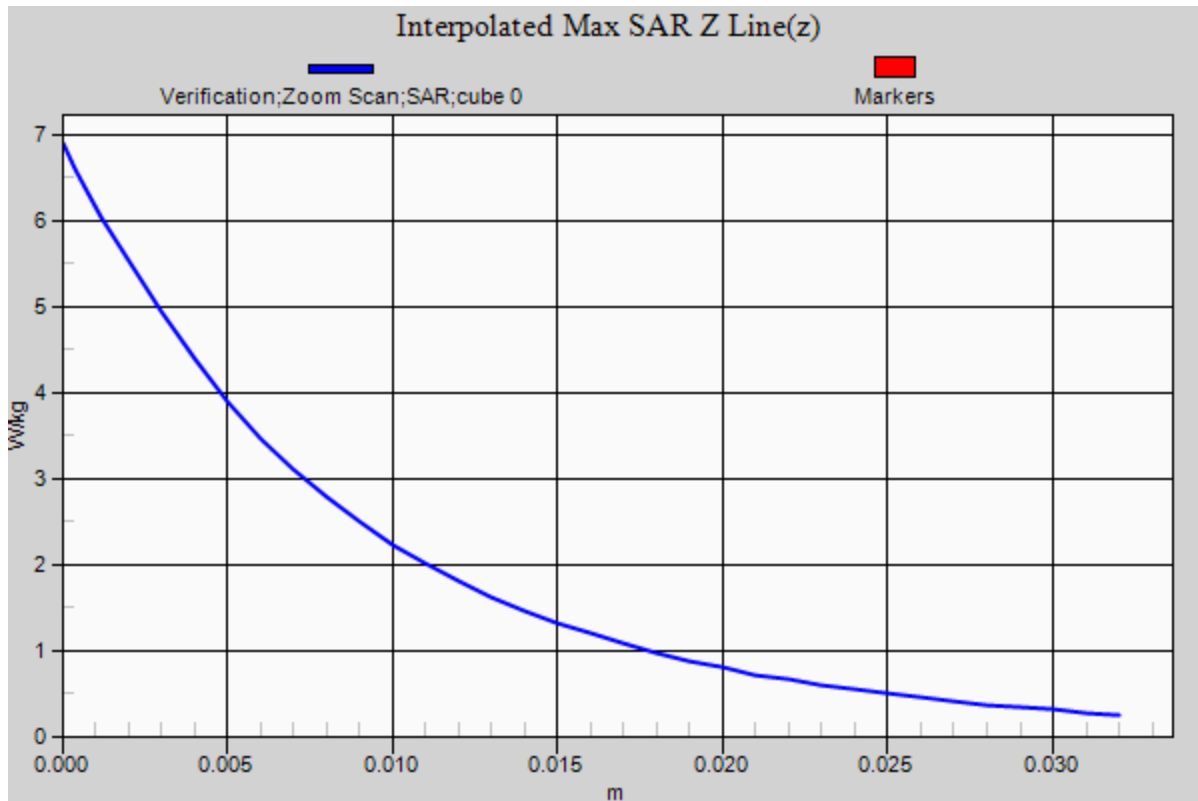

RF Exposure Lab

Plot 4

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d147

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: MSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 53.17$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 3/23/2017; Ambient Temp: 23 °C; Tissue Temp: 21 °C


Probe: EX3DV4 - SN3693; ConvF(7.47, 7.47, 7.47); Calibrated: 8/31/2016;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/15/2016
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Procedure Notes:

1900 MHz/Verification/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 5.52 W/kg

1900 MHz/Verification/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 31.453 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 7.23 W/kg
SAR(1 g) = 4.07 W/kg; SAR(10 g) = 2.13 W/kg
 $P_{IN}=100$ mW
Maximum value of SAR (measured) = 5.76 W/kg

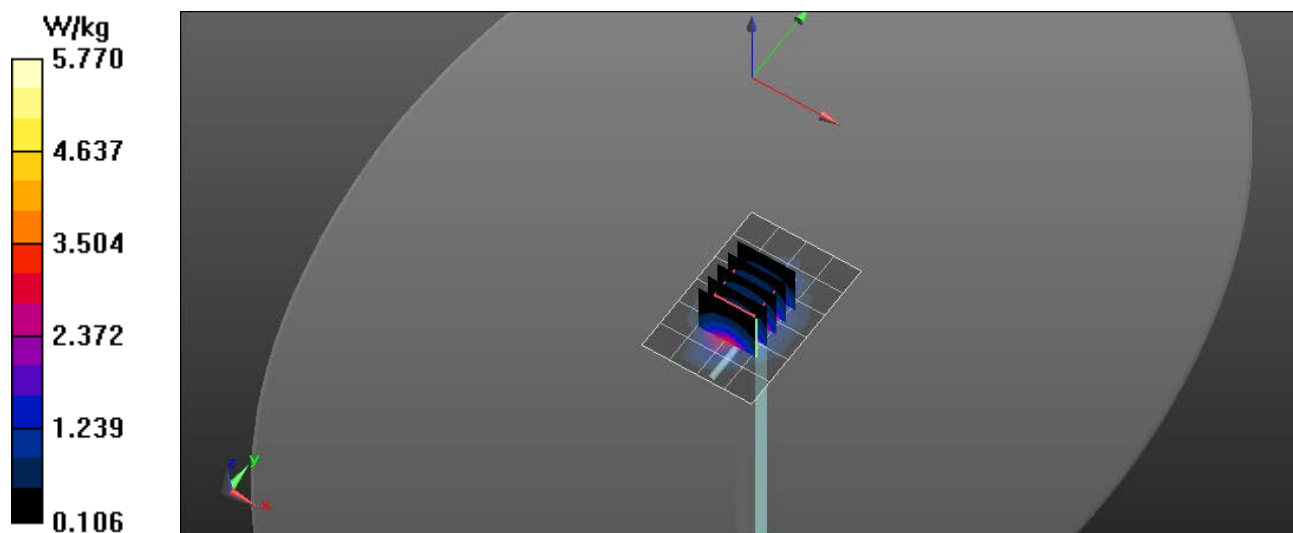

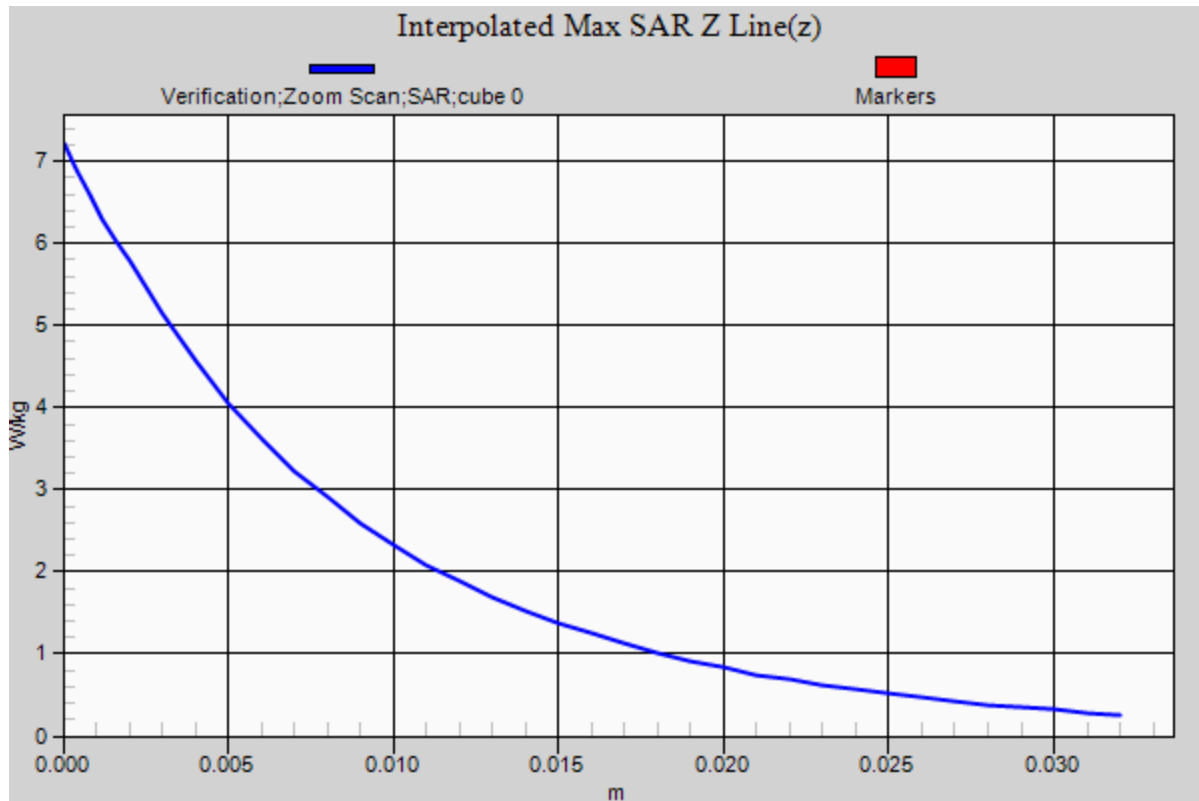

Appendix B – SAR Test Data Plots

RF Exposure Lab

Plot 1

DUT: MC730; Type: USB Modem; Serial: Eng 1

Communication System: CDMA2000 (1xEV-DO); Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium: MSL835; Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 1$ S/m; $\epsilon_r = 54.413$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 3/27/2017; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(9.08, 9.08, 9.08); Calibrated: 8/31/2016;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/15/2016
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Procedure Notes:

850 MHz CDMA/Side B High/Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.75 W/kg

850 MHz CDMA/Side B High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 17.32 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 1.25 W/kg; SAR(10 g) = 0.788 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.76 W/kg

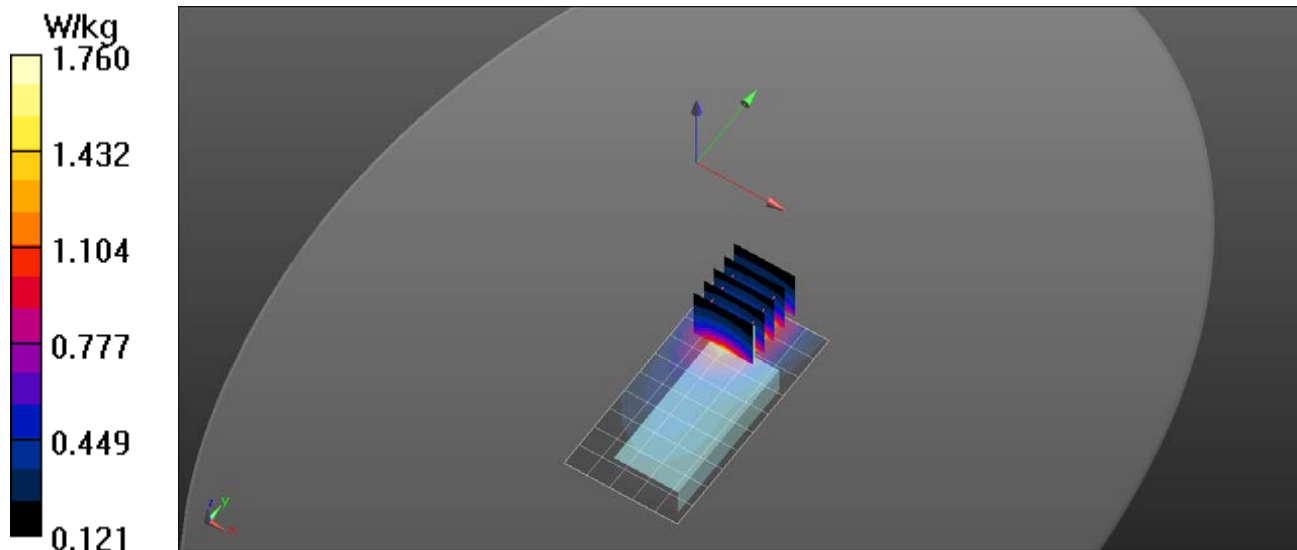

RF Exposure Lab

Plot 2

DUT: MC730; Type: USB Modem; Serial: Eng 1

Communication System: UMTS (WCDMA); Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium: MSL835; Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.982$ S/m; $\epsilon_r = 54.375$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 3/28/2017; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(9.08, 9.08, 9.08); Calibrated: 8/31/2016;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/15/2016
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Procedure Notes:

850 MHz UMTS/Side C Mid/Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.37 W/kg

850 MHz UMTS/Side C Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 33.72 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.612 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.54 W/kg

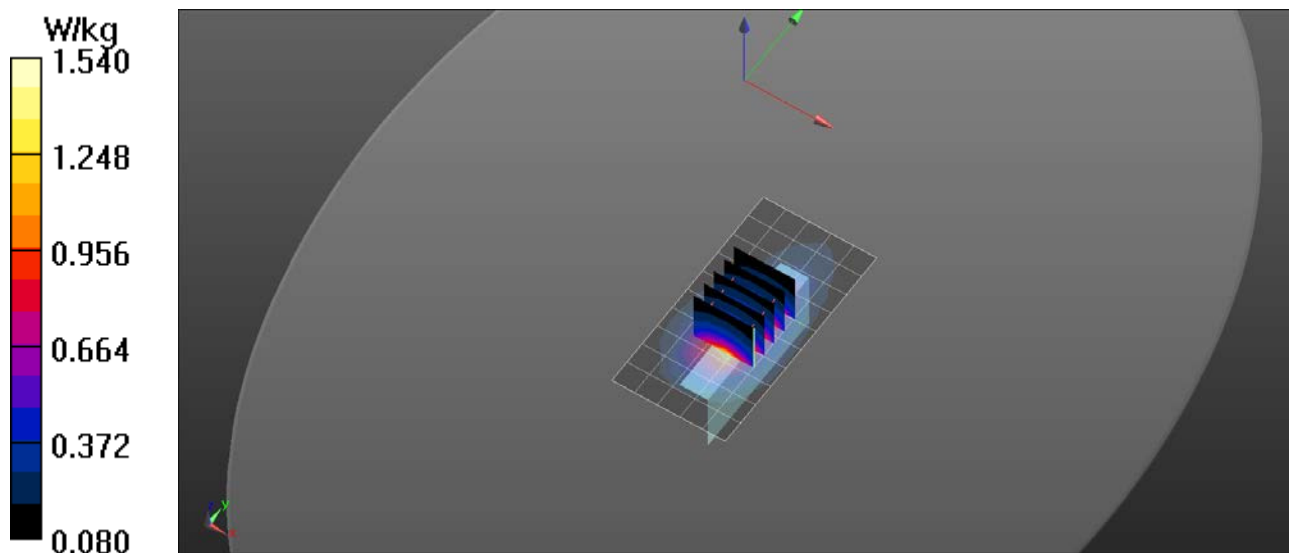

RF Exposure Lab

Plot 3

DUT: MC730; Type: USB Modem; Serial: Eng 1

Communication System: GPRS 2-Slot (GMSK); Frequency: 848.8 MHz; Duty Cycle: 1:4.00037
Medium: MSL835; Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 1.001$ S/m; $\epsilon_r = 54.415$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 3/28/2017; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(9.08, 9.08, 9.08); Calibrated: 8/31/2016;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/15/2016
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Procedure Notes:

850 MHz GPRS/Side C High/Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.51 W/kg

850 MHz GPRS/Side C High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 33.89 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.609 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.73 W/kg

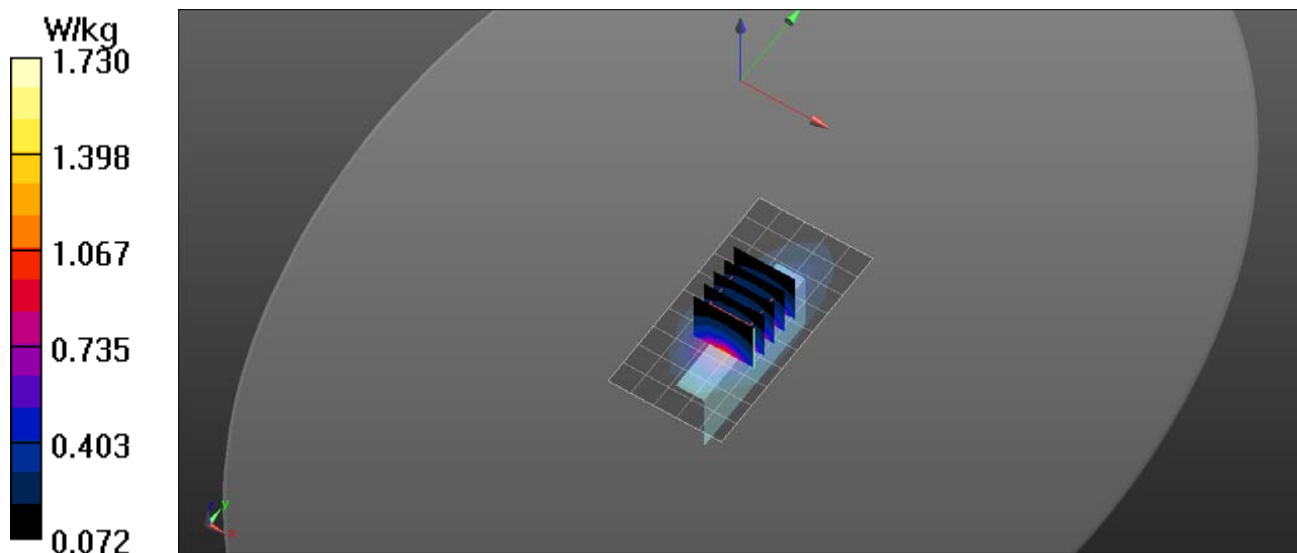

RF Exposure Lab

Plot 4

DUT: MC730; Type: USB Modem; Serial: Eng 1

Communication System: CDMA2000 (1xEV-DO); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: MSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 53.21$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 3/25/2017; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.47, 7.47, 7.47); Calibrated: 8/31/2016;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/15/2016
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Procedure Notes:

1900 MHz CDMA/Side B Mid/Area Scan (10x13x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 2.05 W/kg

1900 MHz CDMA/Side B Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 21.38 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 2.55 W/kg
SAR(1 g) = 1.32 W/kg; SAR(10 g) = 0.898 W/kg
Maximum value of SAR (measured) = 2.18 W/kg

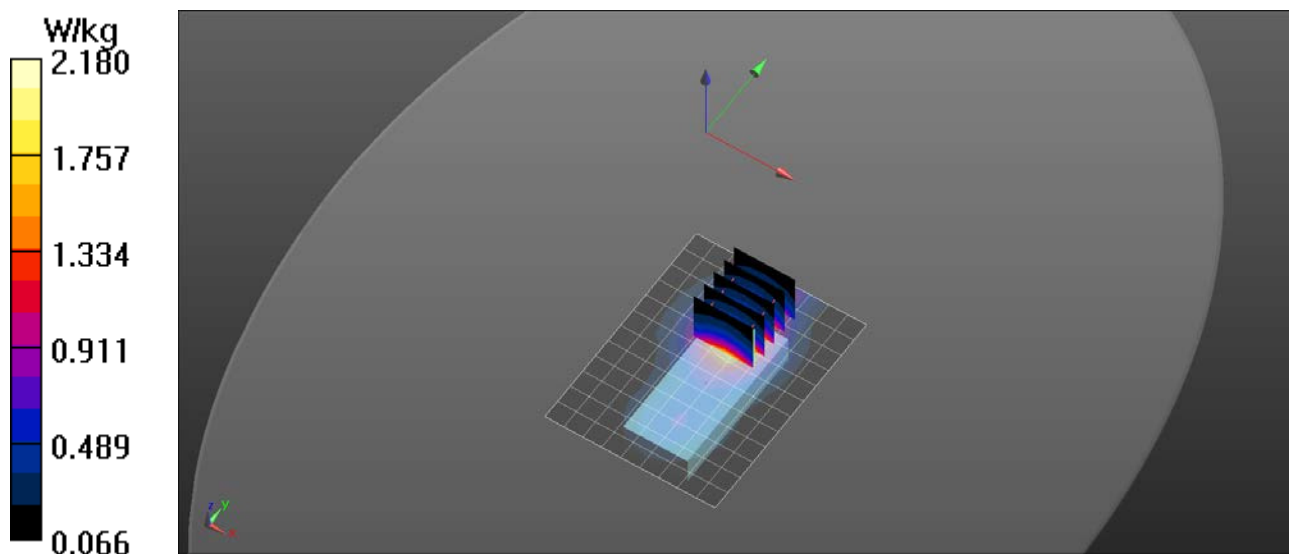

RF Exposure Lab

Plot 5

DUT: MC730; Type: USB Modem; Serial: Eng 1

Communication System: UMTS (WCDMA); Frequency: 1907.6 MHz; Duty Cycle: 1:1
Medium: MSL1900; Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.548$ S/m; $\epsilon_r = 53.155$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 3/24/2017; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.47, 7.47, 7.47); Calibrated: 8/31/2016;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/15/2016
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Procedure Notes:

1900 MHz UMTS/Side A High/Area Scan (13x7x1): Measurement grid: dx=10mm, dy=10mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.92 W/kg

1900 MHz UMTS/Side A High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.73 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.32 W/kg

SAR(1 g) = 1.26 W/kg; SAR(10 g) = 0.658 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.94 W/kg

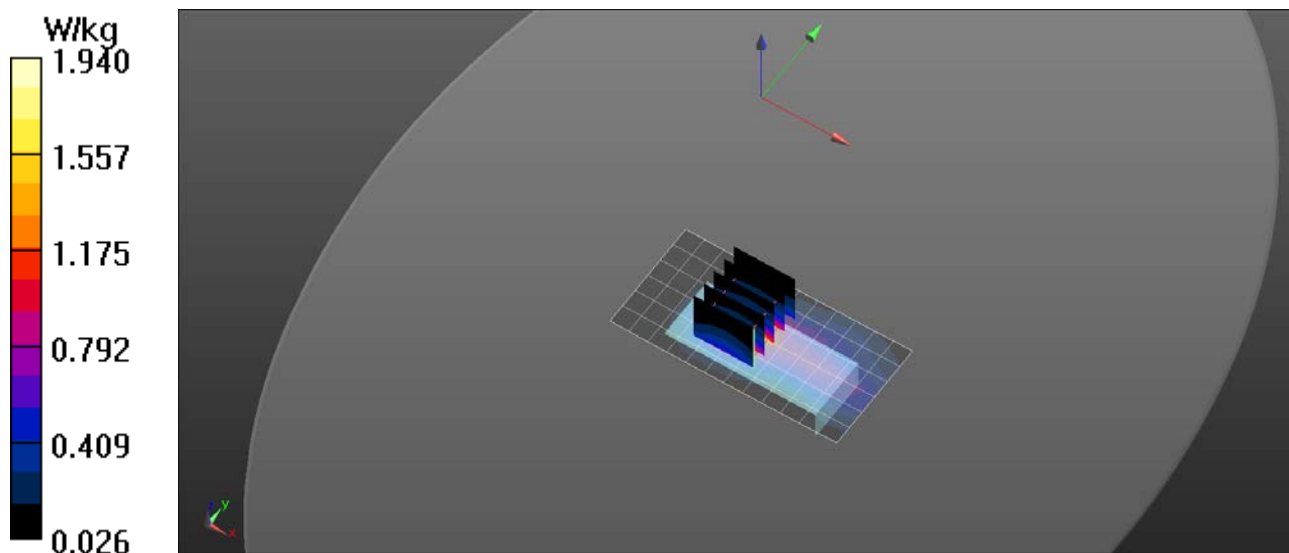

RF Exposure Lab

Plot 6

DUT: MC730; Type: USB Modem; Serial: Eng 1

Communication System: GPRS 1-Slot (GMSK); Frequency: 1880 MHz; Duty Cycle: 1:4.00037
Medium: MSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 53.21$; $\rho = 1000$ kg/m³
Phantom section: Flat Section


Test Date: Date: 3/24/2017; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.47, 7.47, 7.47); Calibrated: 8/31/2016;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/15/2016
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Procedure Notes:

1900 MHz GPRS/Side D Mid/Area Scan (11x6x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.402 W/kg

1900 MHz GPRS/Side D Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.64 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 0.536 W/kg
SAR(1 g) = 0.281 W/kg; SAR(10 g) = 0.145 W/kg
Maximum value of SAR (measured) = 0.446 W/kg

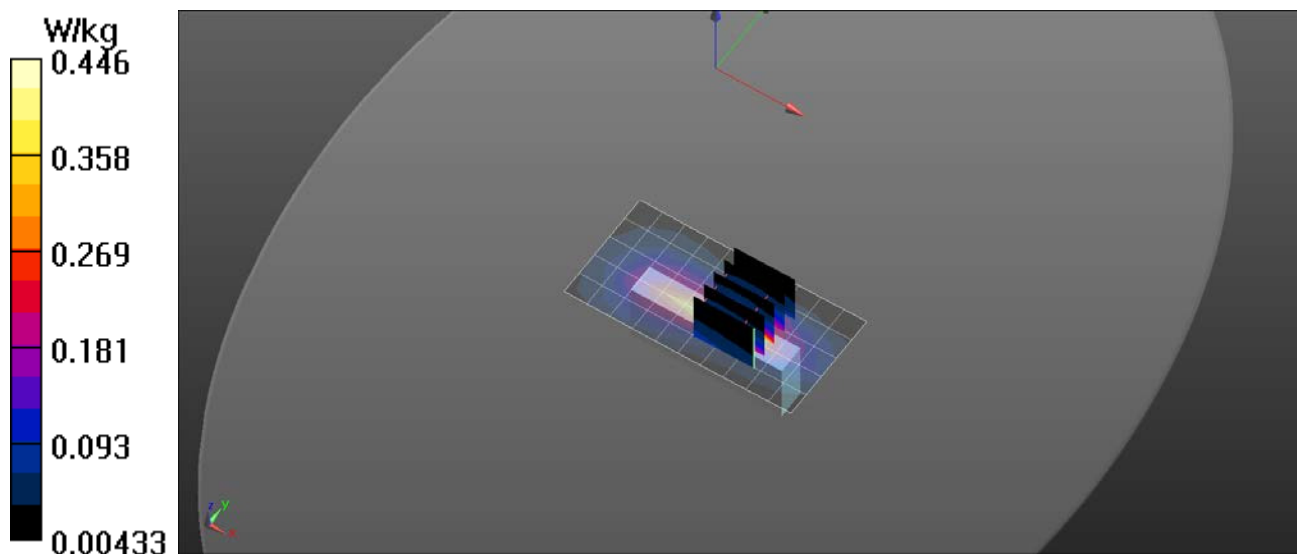

RF Exposure Lab

Plot 7

DUT: MC730; Type: USB Modem; Serial: Eng 1

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: MSL1900; Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ S/m; $\epsilon_r = 53.21$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 3/24/2017; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.47, 7.47, 7.47); Calibrated: 8/31/2016;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/15/2016
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Procedure Notes:

Band 2 LTE/Side B, 1 RB 49 Offset, Mid/Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.84 W/kg


Band 2 LTE/Side B, 1 RB 49 Offset, Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.93 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.28 W/kg

SAR(1 g) = 1.36 W/kg; SAR(10 g) = 0.805 W/kg

Maximum value of SAR (measured) = 1.95 W/kg

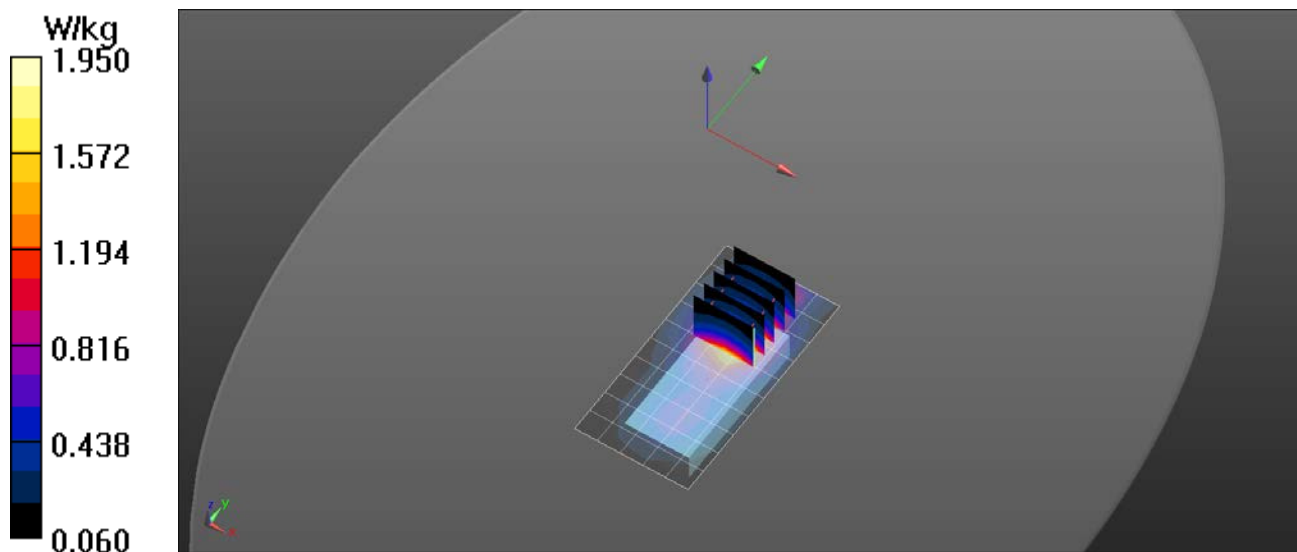

RF Exposure Lab

Plot 8

DUT: MC730; Type: USB Modem; Serial: Eng 1

Communication System: LTE (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1720 MHz; Duty Cycle: 1:1
Medium: MSL1750; Medium parameters used: $f = 1720$ MHz; $\sigma = 1.54$ S/m; $\epsilon_r = 52.78$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 3/23/2017; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(7.72, 7.72, 7.72); Calibrated: 8/31/2016;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn759; Calibrated: 8/17/2016
Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1251
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Procedure Notes:

Band 4 LTE/Side C, 1 RB 49 Offset, Low/Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 2.07 W/kg

Band 4 LTE/Side C, 1 RB 49 Offset, Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.94 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.55 W/kg

SAR(1 g) = 1.37 W/kg; SAR(10 g) = 0.721 W/kg

Maximum value of SAR (measured) = 2.18 W/kg


Band 4 LTE/Side C, 50 RB 25 Offset, Low/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.94 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.638 W/kg

Maximum value of SAR (measured) = 1.86 W/kg

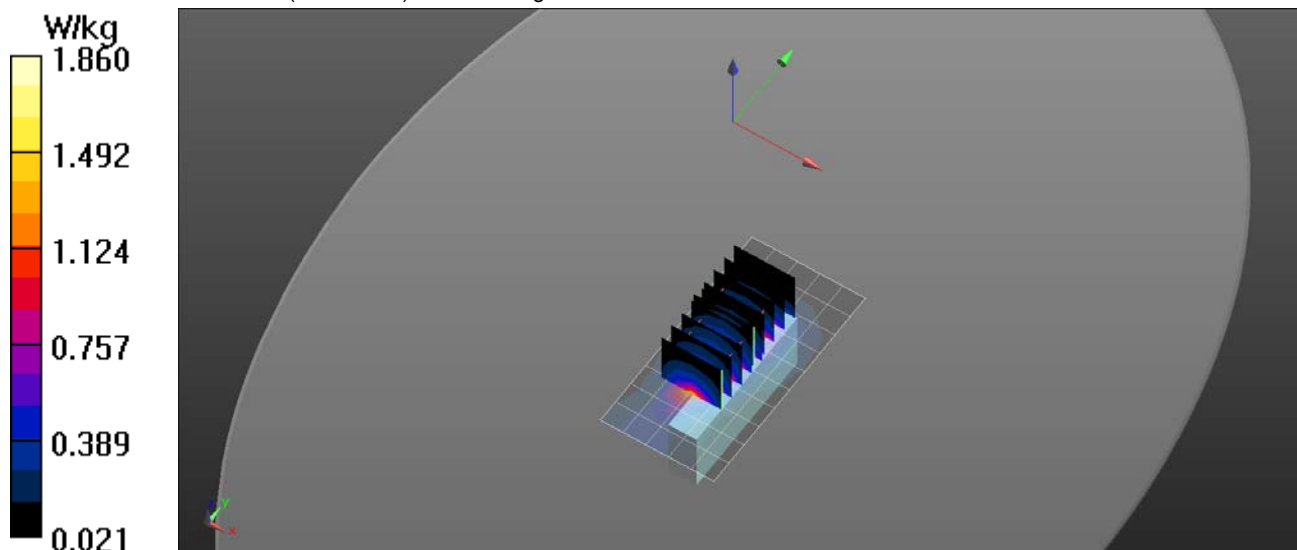

RF Exposure Lab

Plot 9

DUT: MC730; Type: USB Modem; Serial: Eng 1

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: MSL835; Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.9820$ S/m; $\epsilon_r = 54.375$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Test Date: Date: 3/28/2017; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(9.08, 9.08, 9.08); Calibrated: 8/31/2016;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/15/2016
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Procedure Notes:

Band 5 LTE/Side B, 1 RB 25 Offset, Mid/Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.84 W/kg

Band 5 LTE/Side B, 1 RB 25 Offset, Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 20.05 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.20 W/kg

SAR(1 g) = 1.37 W/kg; SAR(10 g) = 0.870 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.90 W/kg

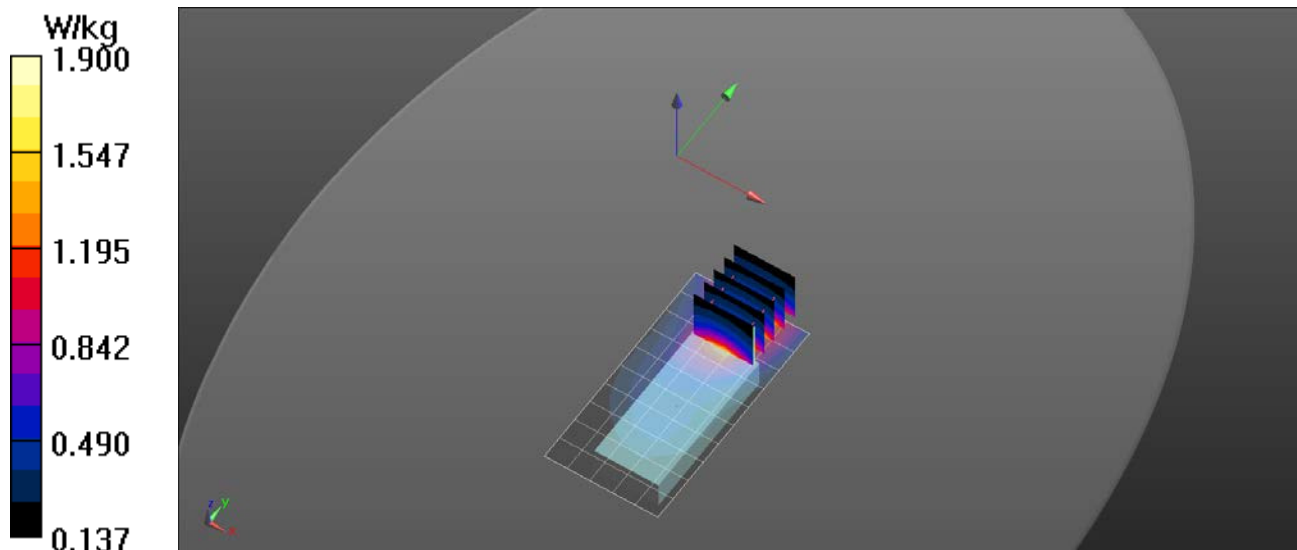

RF Exposure Lab

Plot 10

DUT: MC730; Type: USB Modem; Serial: Eng 1

Communication System: LTE (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 782 MHz; Duty Cycle: 1:1
Medium: MSL750; Medium parameters used (interpolated): $f = 782 \text{ MHz}$; $\sigma = 1 \text{ S/m}$; $\epsilon_r = 55.452$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

Test Date: Date: 3/29/2017; Ambient Temp: 23 °C; Tissue Temp: 21 °C

Probe: EX3DV4 - SN3693; ConvF(9.53, 9.53, 9.53); Calibrated: 8/31/2016;
Sensor-Surface: 2mm (Mechanical Surface Detection)
Electronics: DAE4 Sn1416; Calibrated: 4/15/2016
Phantom: ELI v4.0; Type: QDOVA001BB; Serial: 1065
Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Procedure Notes:

Band 13 LTE/Side C, 1 RB 25 Offset, Mid/Area Scan (6x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.32 W/kg

Band 13 LTE/Side C, 1 RB 25 Offset, Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 31.23 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.892 W/kg; SAR(10 g) = 0.525 W/kg

[Info: Interpolated medium parameters used for SAR evaluation.](#)


Maximum value of SAR (measured) = 1.34 W/kg

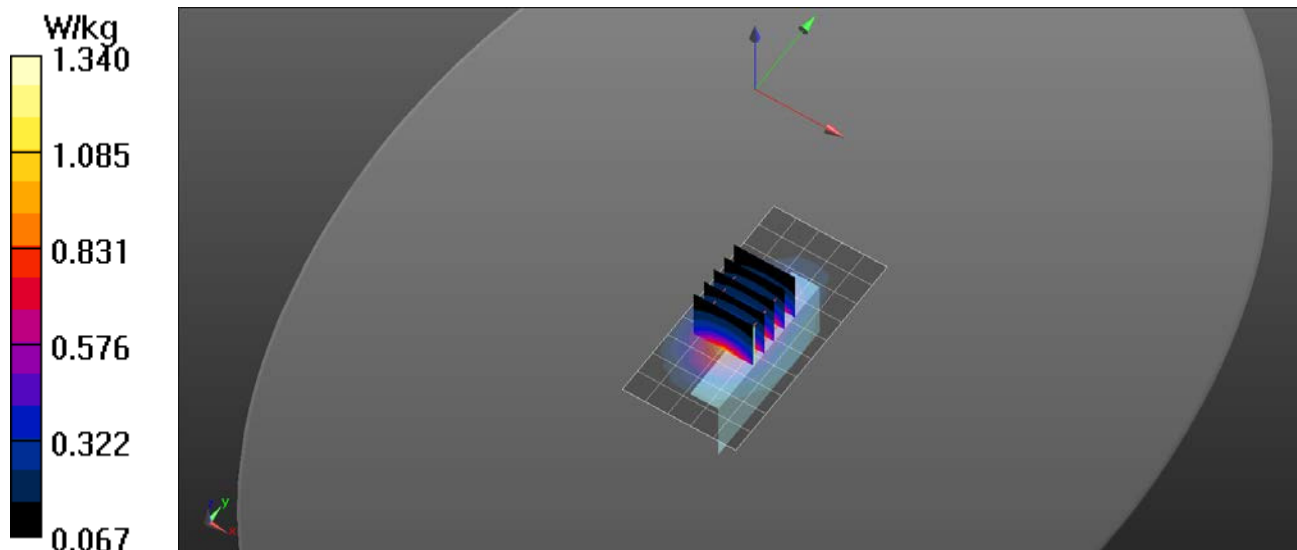

Appendix C – SAR Test Setup Photos




Test Position Side A 5 mm Gap

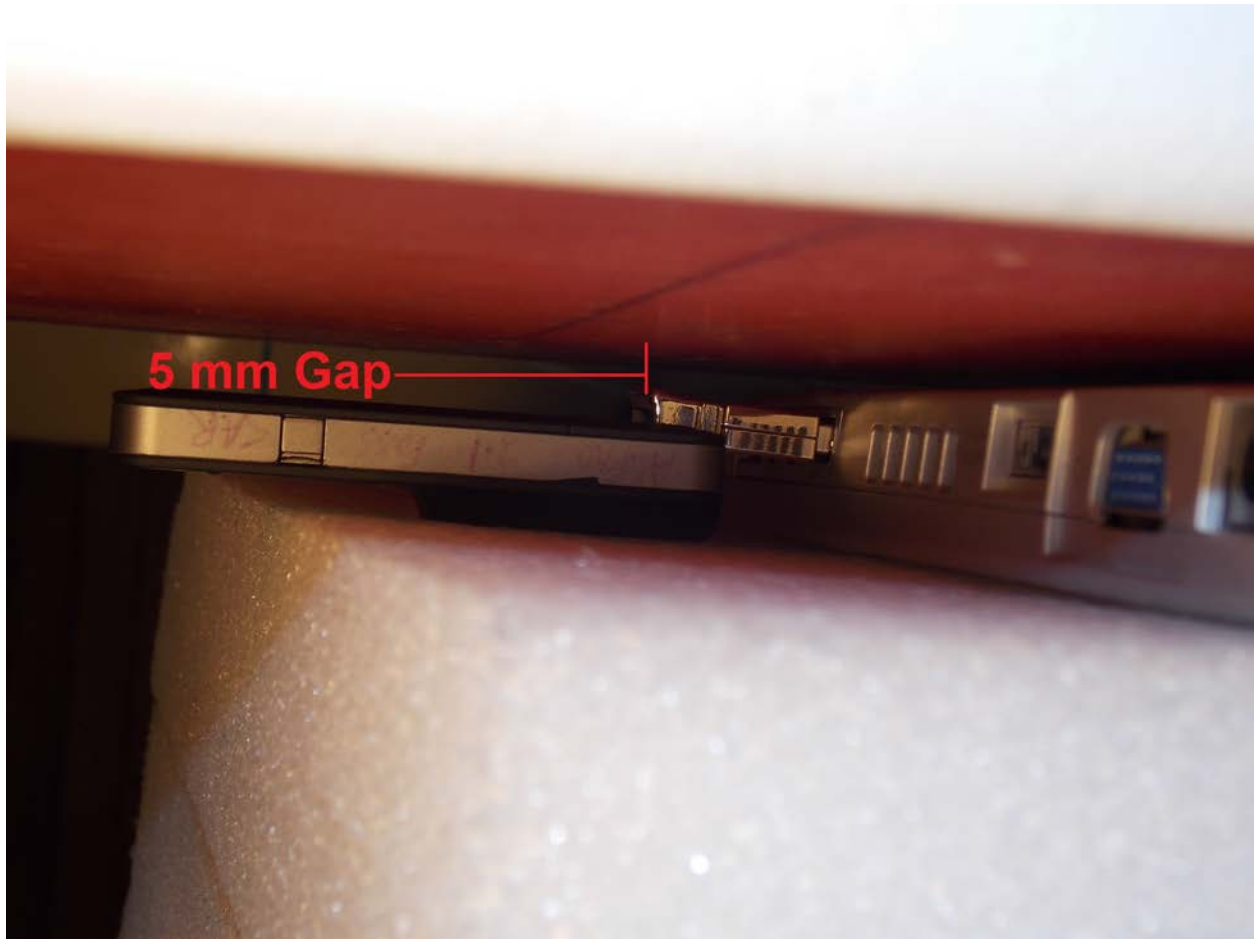

Test Position Side B 5 mm Gap




Test Position Side C 5 mm Gap

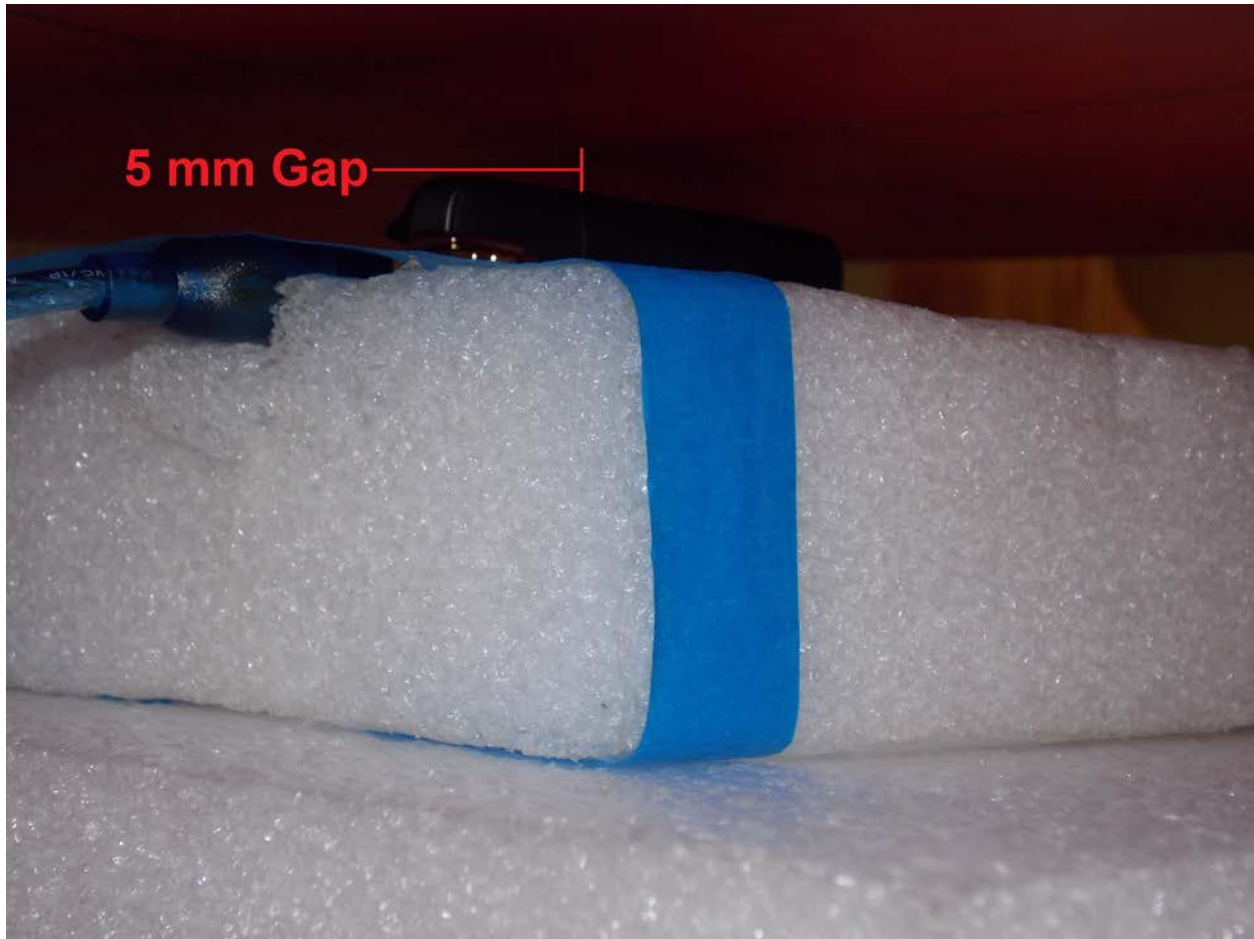

Test Position Side D 5 mm Gap



Test Position Side E 5 mm Gap

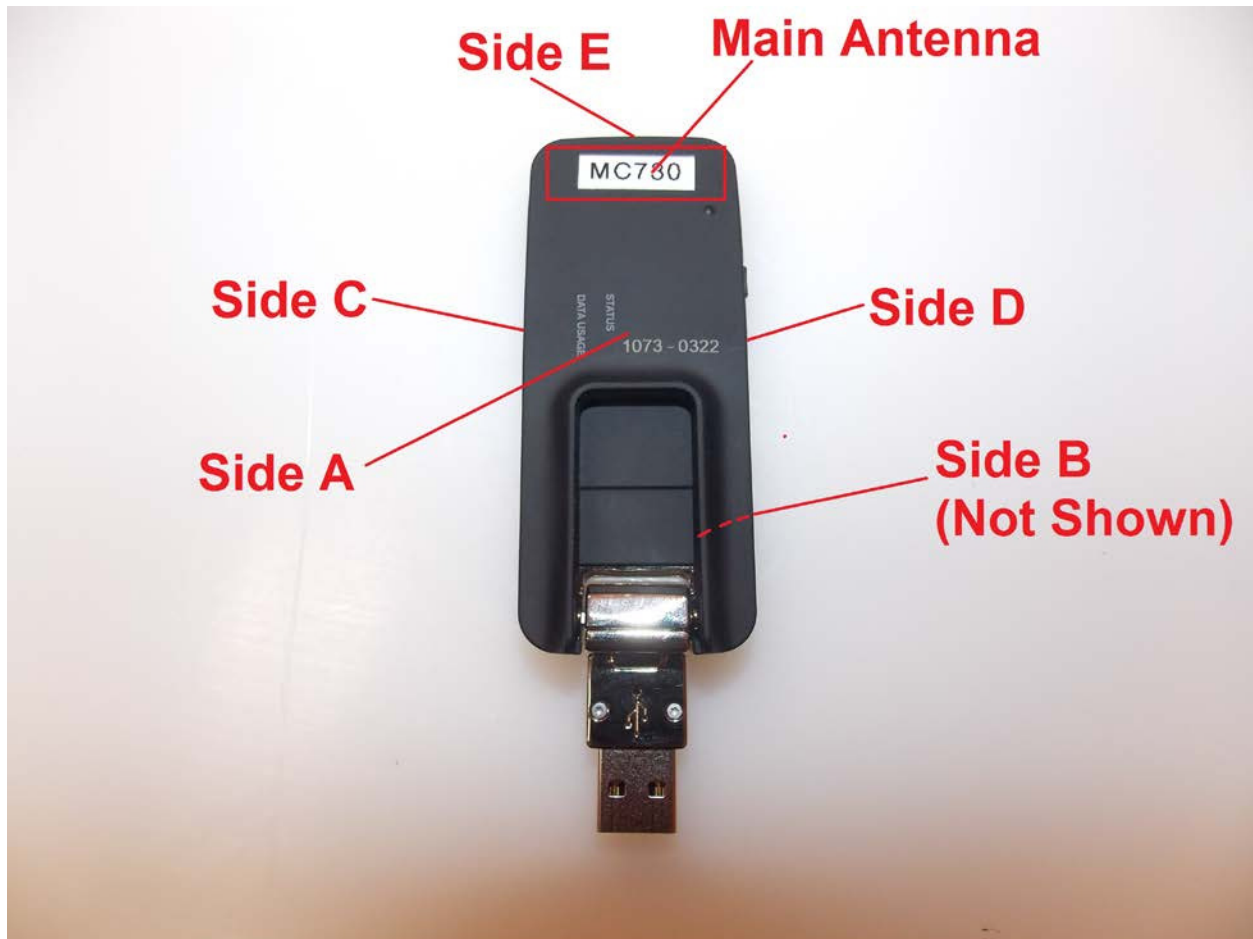

Test and Antenna Locations



Front of Device



Back of Device

Appendix D – Probe Calibration Data Sheets



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **EX3-3693_Aug16**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3693**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,
QA CAL-25.v6
Calibration procedure for dosimetric E-field probes**


Calibration date: **August 31, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	06-Apr-16 (No. 217-02288/02289)	Apr-17
Power sensor NRP-Z91	SN: 103244	06-Apr-16 (No. 217-02288)	Apr-17
Power sensor NRP-Z91	SN: 103245	06-Apr-16 (No. 217-02289)	Apr-17
Reference 20 dB Attenuator	SN: S5277 (20x)	05-Apr-16 (No. 217-02293)	Apr-17
Reference Probe ES3DV2	SN: 3013	31-Dec-15 (No. ES3-3013_Dec15)	Dec-16
DAE4	SN: 660	23-Dec-15 (No. DAE4-660_Dec15)	Dec-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by:	Name Jeton Kastrati	Function Laboratory Technician	Signature 
Approved by:	Katja Pokovic	Technical Manager	

Issued: August 31, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

Probe EX3DV4

SN:3693

Manufactured: April 22, 2009
Calibrated: August 31, 2016

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3693

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.39	0.32	0.35	± 10.1 %
DCP (mV) ^B	98.6	102.3	106.6	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	145.9	±3.0 %
		Y	0.0	0.0	1.0		153.3	
		Z	0.0	0.0	1.0		145.9	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3693

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
150	52.3	0.76	11.12	11.12	11.12	0.00	1.00	± 13.3 %
220	49.0	0.81	10.45	10.45	10.45	0.00	1.00	± 13.3 %
450	43.5	0.87	9.68	9.68	9.68	0.16	1.80	± 13.3 %
750	41.9	0.89	9.53	9.53	9.53	0.40	0.94	± 12.0 %
1750	40.1	1.37	8.03	8.03	8.03	0.33	0.80	± 12.0 %
1900	40.0	1.40	7.70	7.70	7.70	0.40	0.80	± 12.0 %
2300	39.5	1.67	7.49	7.49	7.49	0.36	0.80	± 12.0 %
2450	39.2	1.80	7.03	7.03	7.03	0.33	0.80	± 12.0 %
5200	36.0	4.66	5.03	5.03	5.03	0.40	1.80	± 13.1 %
5300	35.9	4.76	4.76	4.76	4.76	0.40	1.80	± 13.1 %
5500	35.6	4.96	4.63	4.63	4.63	0.50	1.80	± 13.1 %
5600	35.5	5.07	4.44	4.44	4.44	0.50	1.80	± 13.1 %
5800	35.3	5.27	4.39	4.39	4.39	0.50	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3693

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
150	61.9	0.80	10.61	10.61	10.61	0.00	1.00	± 13.3 %
220	60.2	0.86	10.05	10.05	10.05	0.00	1.00	± 13.3 %
450	56.7	0.94	10.10	10.10	10.10	0.10	1.30	± 13.3 %
750	55.5	0.96	9.08	9.08	9.08	0.41	0.80	± 12.0 %
1750	53.4	1.49	7.72	7.72	7.72	0.34	0.80	± 12.0 %
1900	53.3	1.52	7.47	7.47	7.47	0.35	0.80	± 12.0 %
2300	52.9	1.81	7.33	7.33	7.33	0.40	0.80	± 12.0 %
2450	52.7	1.95	7.14	7.14	7.14	0.38	0.80	± 12.0 %
5200	49.0	5.30	4.38	4.38	4.38	0.45	1.90	± 13.1 %
5300	48.9	5.42	4.12	4.12	4.12	0.50	1.90	± 13.1 %
5500	48.6	5.65	3.84	3.84	3.84	0.50	1.90	± 13.1 %
5600	48.5	5.77	3.70	3.70	3.70	0.55	1.90	± 13.1 %
5800	48.2	6.00	3.93	3.93	3.93	0.55	1.90	± 13.1 %


^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field


(TEM-Cell: ifi110 EXX, Waveguide: R22)

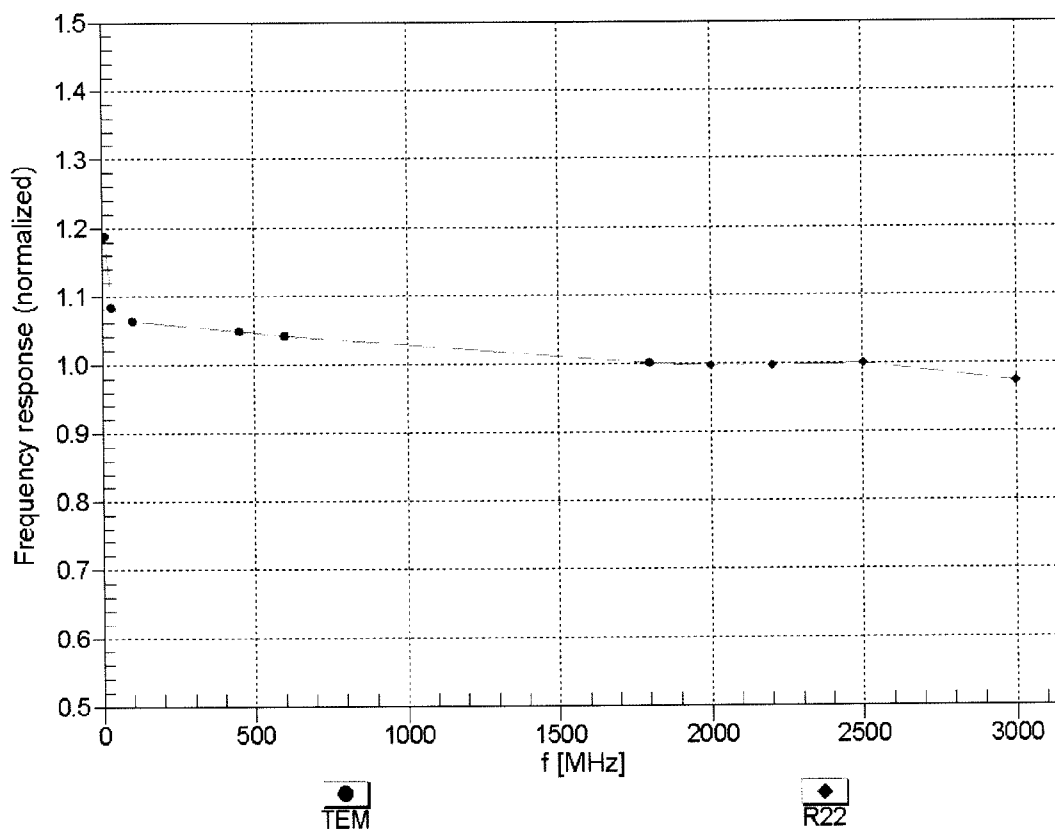



Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM


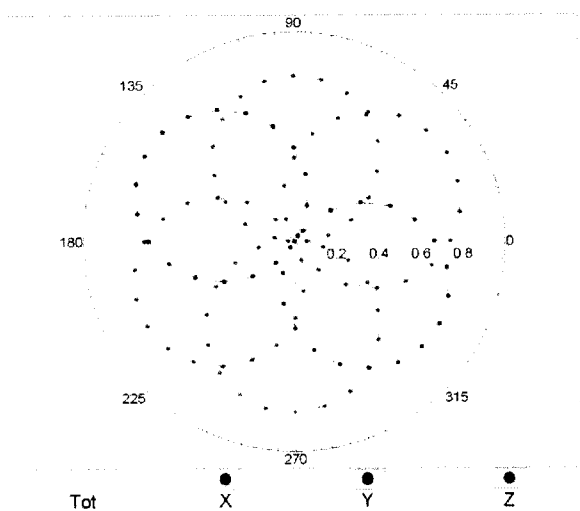


f=1800 MHz,R22

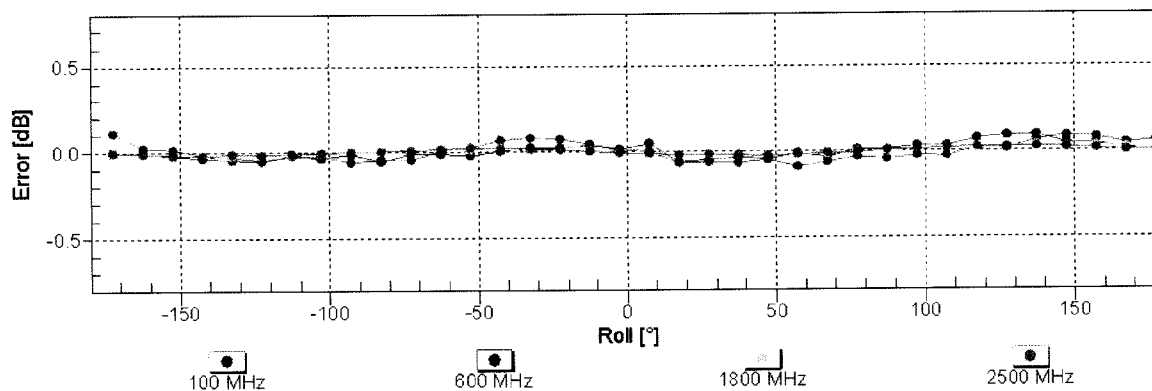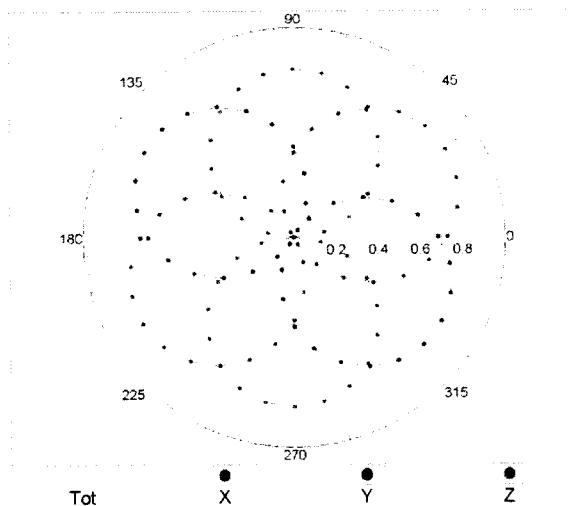


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f_{\text{eval}} = 1900 \text{ MHz}$)

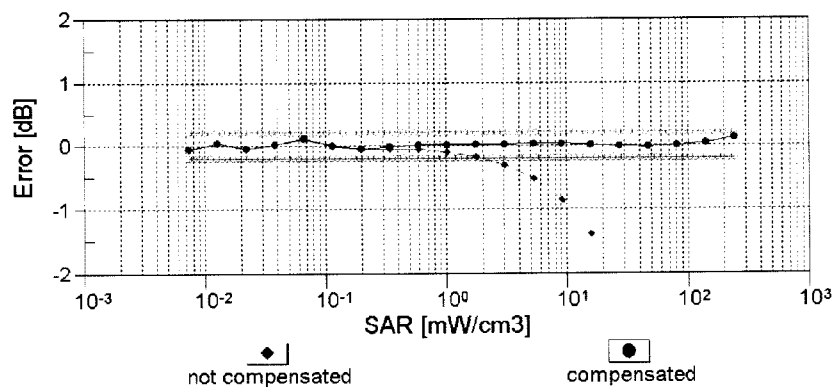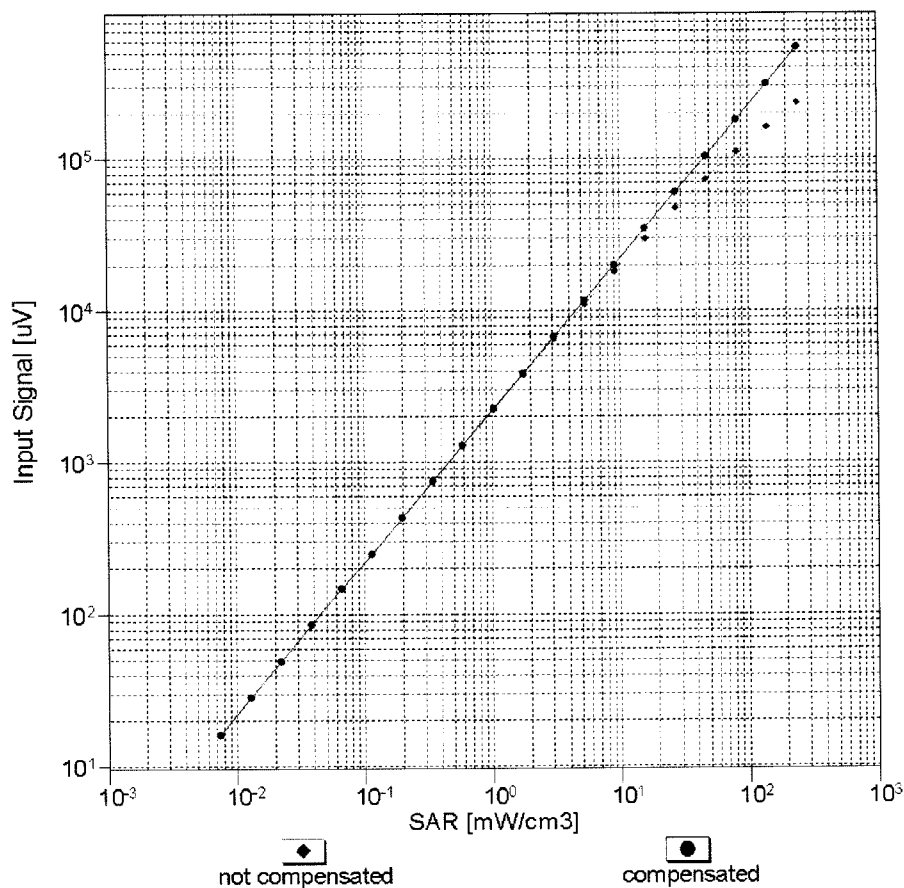


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Conversion Factor Assessment

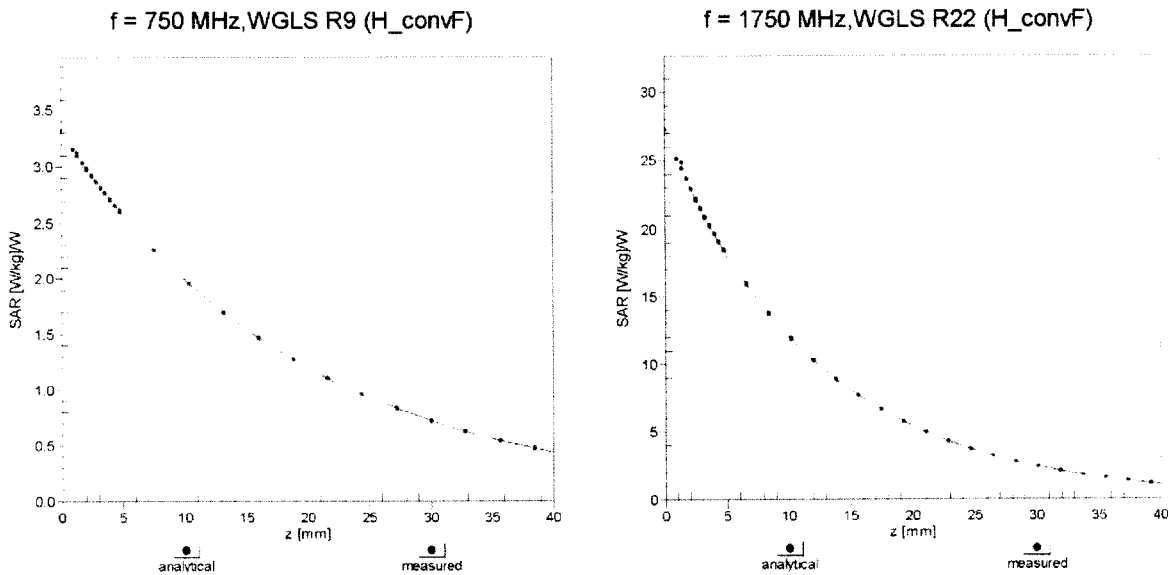

Deviation from Isotropy in Liquid Error (ϕ , θ), f = 900 MHz

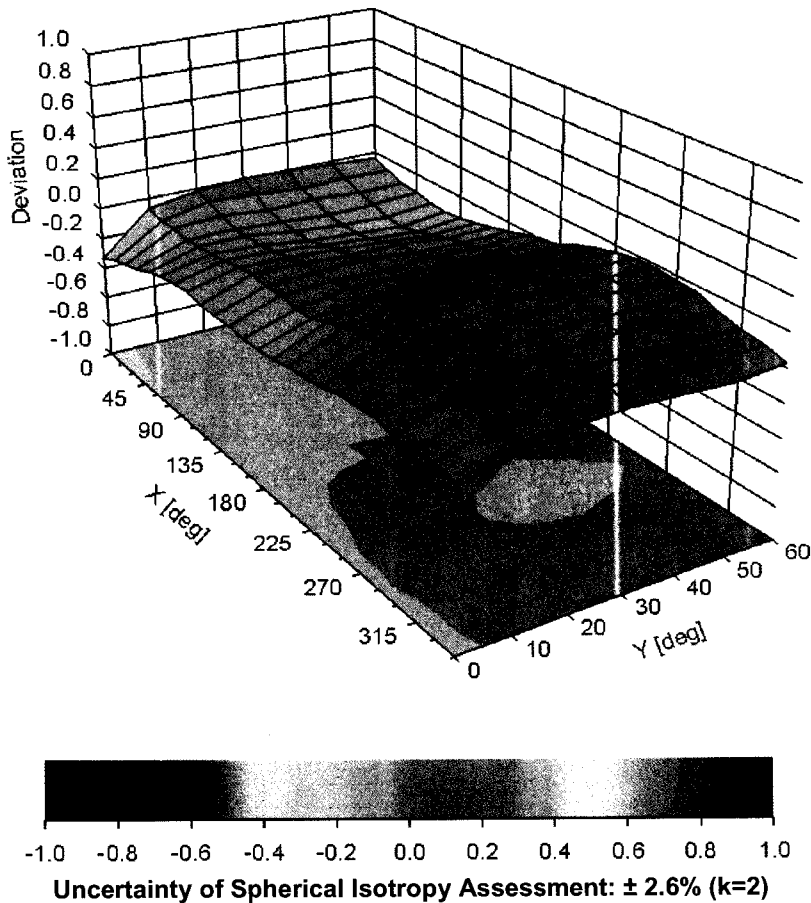

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3693

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	107.4
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Appendix E – Dipole Calibration Data Sheets

gm

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **RF Exposure Lab**

Certificate No: **D750V3-1053_Aug15**

CALIBRATION CERTIFICATE

Object **D750V3 - SN: 1053**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **August 10, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	01-Apr-15 (No. 217-02131)	Mar-16
Type-N mismatch combination	SN: 5047.2 / 06327	01-Apr-15 (No. 217-02134)	Mar-16
Reference Probe ES3DV3	SN: 3205	30-Dec-14 (No. ES3-3205_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by: **Name** **Michael Weber** **Function** **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** **Technical Manager**

Issued: August 12, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	42.1 $\pm$ 6 %	0.91 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.04 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.03 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.25 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	56.3 $\pm$ 6 %	1.00 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.18 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.48 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.43 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.59 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	54.4 Ω - 0.4 j Ω
Return Loss	- 27.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.5 Ω - 2.5 j Ω
Return Loss	- 32.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.035 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	November 08, 2011

Extended Calibration

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (< -20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB Publication 865664 D01 v01r04.

D750V3 SN: 1053 - Head						
Date of Measurement	Return Loss (dB)	$\Delta\%$	Impedance Real (Ω)	$\Delta\Omega$	Impedance Imaginary (j Ω)	$\Delta\Omega$
8/10/2015	-27.5		54.4		-0.4	
8/9/2016	-25.9	-5.8	54.3	-0.1	-0.5	-0.1

D750V3 SN: 1053 - Body						
Date of Measurement	Return Loss (dB)	$\Delta\%$	Impedance Real (Ω)	$\Delta\Omega$	Impedance Imaginary (j Ω)	$\Delta\Omega$
8/10/2015	-32.0		49.5		-2.5	
8/9/2016	-31.5	-1.6	51.0	1.5	-2.9	-0.4

DASY5 Validation Report for Head TSL

Date: 10.08.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1053

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.44, 6.44, 6.44); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.03 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 3.06 W/kg

SAR(1 g) = 2.04 W/kg; SAR(10 g) = 1.33 W/kg

Maximum value of SAR (measured) = 2.39 W/kg

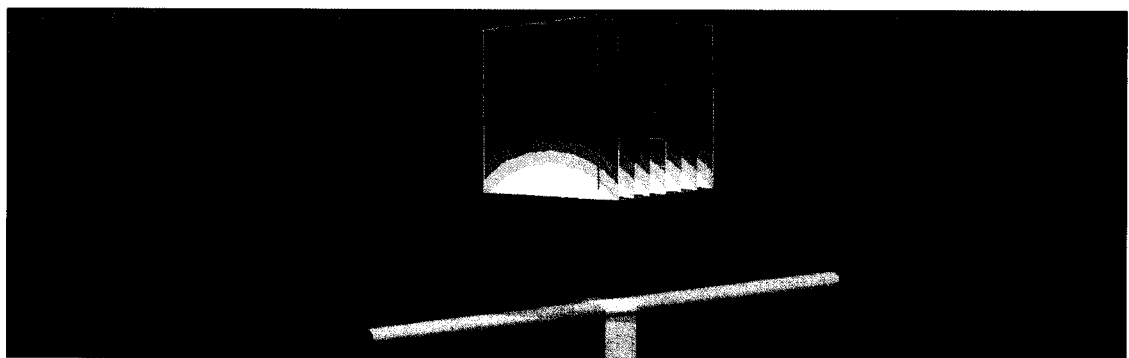

0 dB = 2.39 W/kg = 3.78 dBW/kg

Impedance Measurement Plot for Head TSL

10 Aug 2015 11:47:25
 CH1 S11 1 U FS 1: 54.371 Ω -375.00 m Ω 565.88 pF 750.000 000 MHz

*

De1

CA

Avg
16

H1d

CH2 S11 L06 5 dB/REF -20 dB 1:-27.524 dB 750.000 000 MHz

De1

CA

Avg
16

H1d

START 550.000 000 MHz

STOP 950.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 10.08.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1053

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 1 \text{ S/m}$; $\epsilon_r = 56.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.21, 6.21, 6.21); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 52.22 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 3.19 W/kg

SAR(1 g) = 2.18 W/kg; SAR(10 g) = 1.43 W/kg

Maximum value of SAR (measured) = 2.55 W/kg

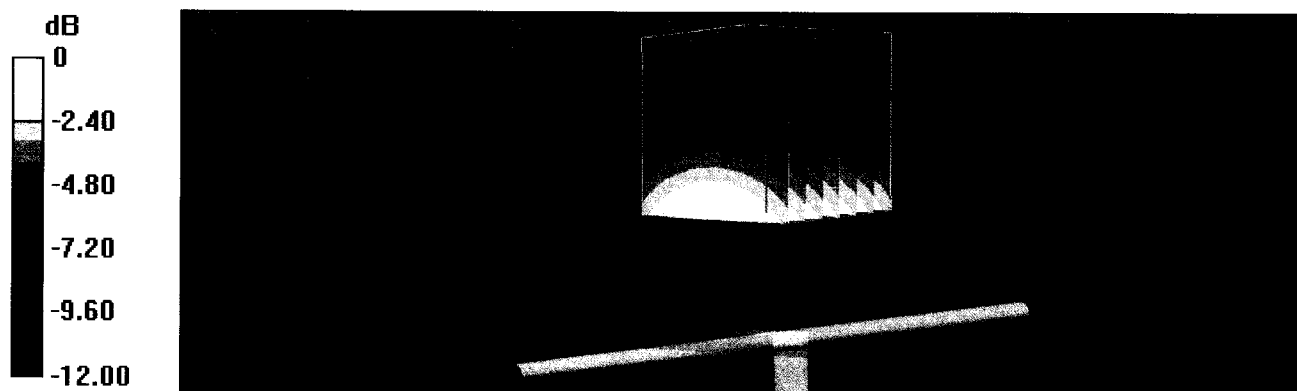

0 dB = 2.55 W/kg = 4.07 dBW/kg

Impedance Measurement Plot for Body TSL

10 Aug 2015 10:58:10
 CH1 S11 1 U FS 1: 49.469 Ω -2.4551 Ω 86.436 pF 750.000 000 MHz

*

De1

CΔ

Avg
16

H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-31.950 dB 750.000 000 MHz

De1

CΔ

Avg
16

H1d

START 550.000 000 MHz

STOP 950.000 000 MHz

gm

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client **RF Exposure Lab**

Certificate No: **D835V2-4d131_Aug15**

CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d131**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **August 10, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	01-Apr-15 (No. 217-02131)	Mar-16
Type-N mismatch combination	SN: 5047.2 / 06327	01-Apr-15 (No. 217-02134)	Mar-16
Reference Probe ES3DV3	SN: 3205	30-Dec-14 (No. ES3-3205_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by: **Name**
Michael Weber **Function**
Laboratory Technician

Signature

Approved by: **Katja Pokovic** **Technical Manager**

Issued: August 12, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.9 $\pm$ 6 %	0.93 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.36 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.23 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.53 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.01 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	56.1 $\pm$ 6 %	1.02 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.40 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.28 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.57 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.11 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.3 Ω - 1.6 j Ω
Return Loss	- 31.2 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.7 Ω - 3.8 j Ω
Return Loss	- 26.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.394 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 22, 2011

Extended Calibration

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (< -20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB Publication 865664 D01 v01r04.

D835V2 SN: 4d131 - Head						
Date of Measurement	Return Loss (dB)	$\Delta\%$	Impedance Real (Ω)	$\Delta\Omega$	Impedance Imaginary (j Ω)	$\Delta\Omega$
8/10/2015	-31.2		52.3		-1.6	
8/9/2016	-29.2	-6.4	51.3	-1.0	-1.8	-0.2

D835V2 SN: 4d131 - Body						
Date of Measurement	Return Loss (dB)	$\Delta\%$	Impedance Real (Ω)	$\Delta\Omega$	Impedance Imaginary (j Ω)	$\Delta\Omega$
8/10/2015	-26.8		47.7		-3.8	
8/9/2016	-28.5	6.3	51.2	3.5	-3.8	0.0

DASY5 Validation Report for Head TSL

Date: 10.08.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d131

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835$ MHz; $\sigma = 0.93$ S/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.2, 6.2, 6.2); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.25 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.53 W/kg

SAR(1 g) = 2.36 W/kg; SAR(10 g) = 1.53 W/kg

Maximum value of SAR (measured) = 2.77 W/kg

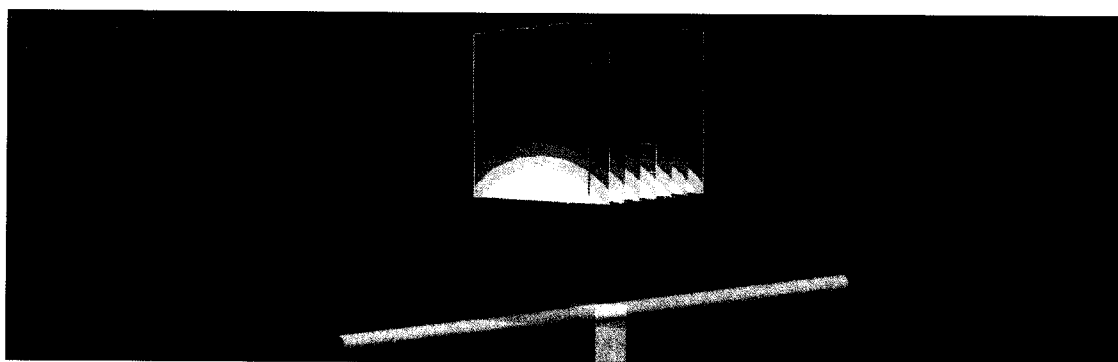


0 dB = 2.77 W/kg = 4.42 dBW/kg

Impedance Measurement Plot for Head TSL


10 Aug 2015 11:56:53
 CH1 S11 1 U FS 1: 52.279 Ω -1.6289 Ω 117.01 pF 835.000 000 MHz

*
 De1
 CA
 Avg
 16
 H1d

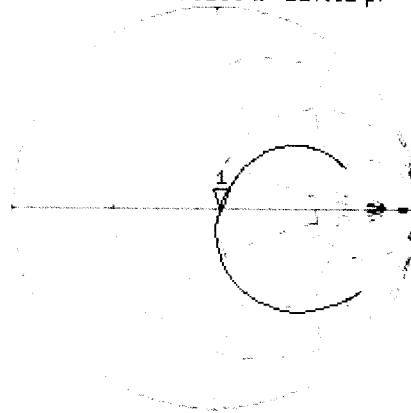

CH2 S11 LOG 5 dB/REF -20 dB 1:-31.234 dB 835.000 000 MHz

De1
 CA
 Avg
 16
 H1d

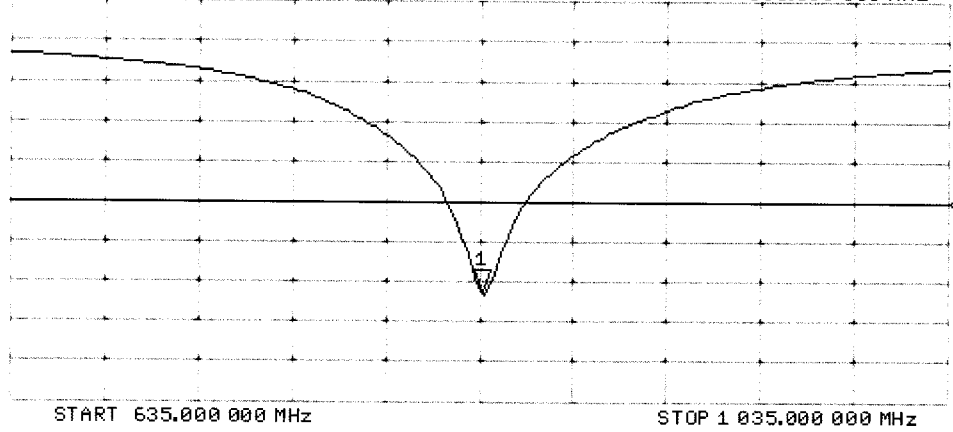

DASY5 Validation Report for Body TSL

Date: 10.08.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d131

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 1.02 \text{ S/m}$; $\epsilon_r = 56.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.17, 6.17, 6.17); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.25 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.51 W/kg

SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.57 W/kg

Maximum value of SAR (measured) = 2.80 W/kg

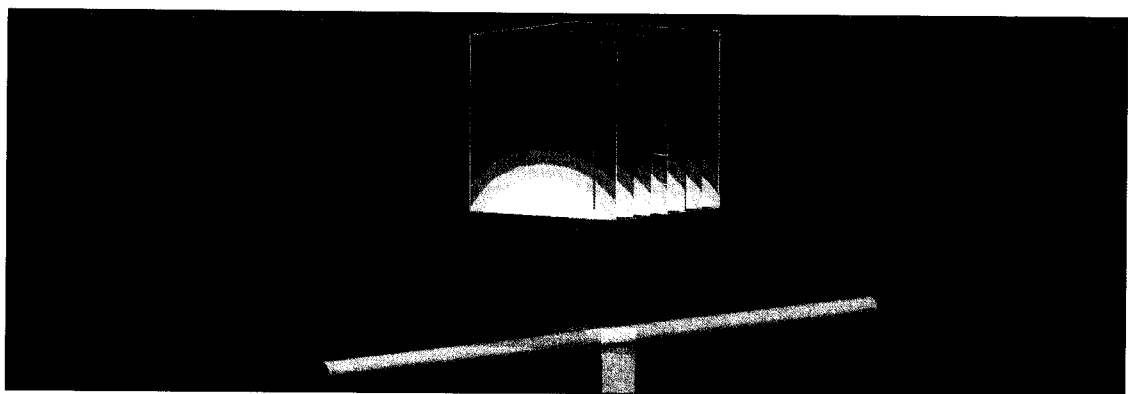


0 dB = 2.80 W/kg = 4.47 dBW/kg

Impedance Measurement Plot for Body TSL


10 Aug 2015 11:11:59
[CH1] S11 1 U FS 1: 47.674 Ω -3.8223 Ω 49.867 pF 835.000 000 MHz

*
De1
Ca
Avg
16
H1d

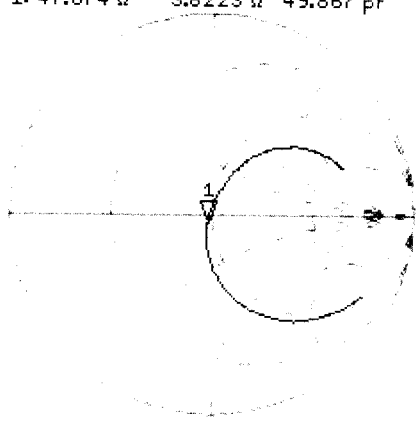

CH2 S11 LQ6 5 dB/REF -20 dB 1:-26.790 dB 835.000 000 MHz

De1
Ca
Avg
16
H1d

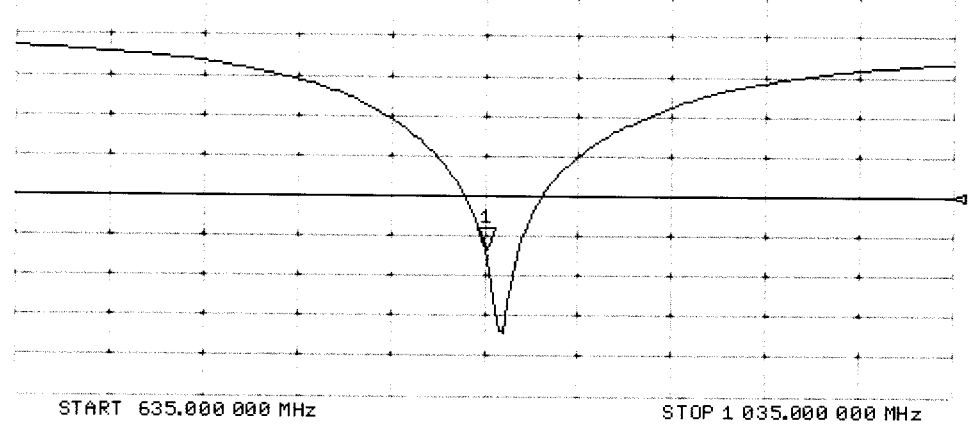



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Client **RF Exposure Lab**

Certificate No: **D1750V2-1061_Aug15**

CALIBRATION CERTIFICATE

Object **D1750V2 - SN:1061**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **August 13, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	01-Apr-15 (No. 217-02131)	Mar-16
Type-N mismatch combination	SN: 5047.2 / 06327	01-Apr-15 (No. 217-02134)	Mar-16
Reference Probe ES3DV3	SN: 3205	30-Dec-14 (No. ES3-3205_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

Calibrated by: **Jeton Kastrati** **Laboratory Technician** 

Approved by: **Katja Pokovic** **Technical Manager** 

Issued: August 13, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	39.8 $\pm$ 6 %	1.36 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.18 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.8 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	4.90 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.6 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.4	1.49 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	52.1 $\pm$ 6 %	1.48 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	9.43 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	37.7 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.09 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	20.3 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	50.5 Ω + 1.2 j Ω
Return Loss	- 37.8 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.3 Ω + 0.8 j Ω
Return Loss	- 30.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.220 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	June 15, 2010

Extended Calibration

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (< -20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB Publication 865664 D01 v01r04.

D1750V2 SN: 1061 - Head						
Date of Measurement	Return Loss (dB)	$\Delta\%$	Impedance Real (Ω)	$\Delta\Omega$	Impedance Imaginary (j Ω)	$\Delta\Omega$
8/13/2015	-37.8		50.5		1.2	
8/12/2016	-39.4	4.2	49.2	-1.3	0.7	-0.5
D1750V2 SN: 1061 - Body						
Date of Measurement	Return Loss (dB)	$\Delta\%$	Impedance Real (Ω)	$\Delta\Omega$	Impedance Imaginary (j Ω)	$\Delta\Omega$
8/13/2015	-30.7		47.3		0.8	
8/12/2016	-29.4	-4.2	46.1	-1.2	0.6	-0.2

DASY5 Validation Report for Head TSL

Date: 13.08.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1061

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 39.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.2, 5.2, 5.2); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.55 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 9.18 W/kg; SAR(10 g) = 4.9 W/kg

Maximum value of SAR (measured) = 11.6 W/kg

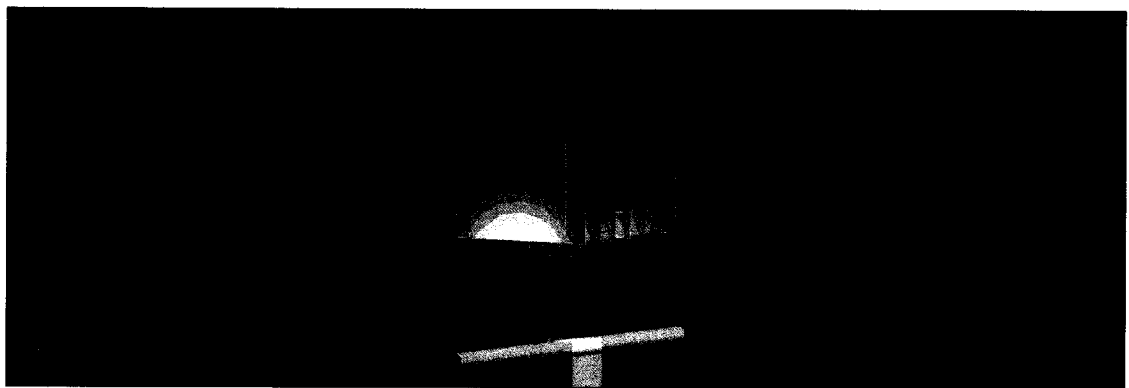

0 dB = 11.6 W/kg = 10.64 dBW/kg

Impedance Measurement Plot for Head TSL

13 Aug 2015 13:43:33
 CH1 S11 1 U FS 1: 50.514 Ω 1.1777 Ω 107.11 μH 1 750.000 000 MHz

*

Del

CA

Avg
16

H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-37.844 dB 1 750.000 000 MHz

CA

Avg
16

H1d

START 1 550.000 000 MHz

STOP 1 950.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 13.08.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1061

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.88, 4.88, 4.88); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.33 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 16.1 W/kg

SAR(1 g) = 9.43 W/kg; SAR(10 g) = 5.09 W/kg

Maximum value of SAR (measured) = 11.8 W/kg

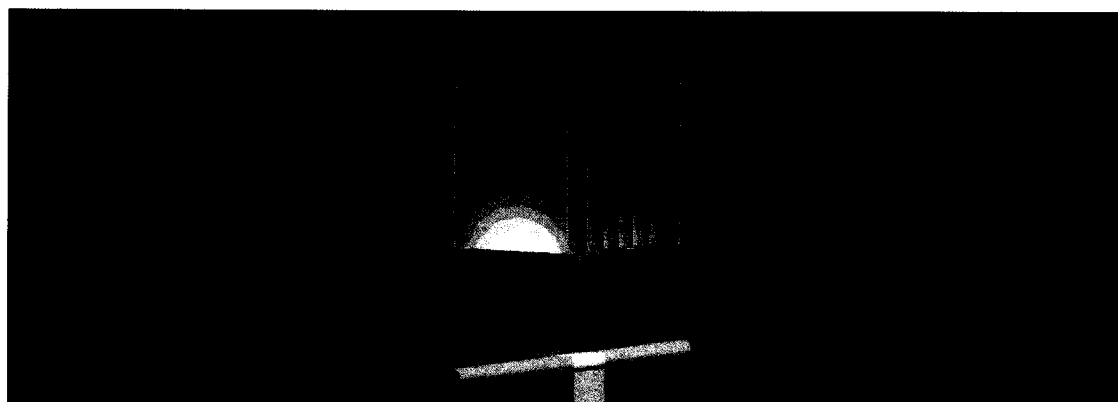

0 dB = 11.8 W/kg = 10.72 dBW/kg

Impedance Measurement Plot for Body TSL

13 Aug 2015 13:42:55
 CH1 S11 1 U FS 1: 47.281 Ω 0.7871 Ω 71.584 μH 1 750.000 000 MHz

*

Del

CA

Avg
16

H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-30.723 dB 1 750.000 000 MHz

CA

Avg
16

H1d

START 1 550.000 000 MHz

STOP 1 950.000 000 MHz

gm

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **RF Exposure Lab**

Certificate No: **D1900V2-5d147_Aug15**

CALIBRATION CERTIFICATE

Object **D1900V2 - SN:5d147**

Calibration procedure(s) **QA CAL-05.v9**
Calibration procedure for dipole validation kits above 700 MHz

Calibration date: **August 13, 2015**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	US37292783	07-Oct-14 (No. 217-02020)	Oct-15
Power sensor HP 8481A	MY41092317	07-Oct-14 (No. 217-02021)	Oct-15
Reference 20 dB Attenuator	SN: 5058 (20k)	01-Apr-15 (No. 217-02131)	Mar-16
Type-N mismatch combination	SN: 5047.2 / 06327	01-Apr-15 (No. 217-02134)	Mar-16
Reference Probe ES3DV3	SN: 3205	30-Dec-14 (No. ES3-3205_Dec14)	Dec-15
DAE4	SN: 601	18-Aug-14 (No. DAE4-601_Aug14)	Aug-15
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator R&S SMT-06	100005	04-Aug-99 (in house check Oct-13)	In house check: Oct-16
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-14)	In house check: Oct-15

	Name	Function	Signature
Calibrated by:	Jeton Kastrati	Laboratory Technician	
Approved by:	Katja Pokovic	Technical Manager	

Issued: August 13, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	38.9 $\pm$ 6 %	1.39 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

SAR result with Head TSL

SAR averaged over 1 cm³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.4 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	41.5 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.47 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.8 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	52.5 $\pm$ 6 %	1.51 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

SAR result with Body TSL

SAR averaged over 1 cm³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.1 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	40.4 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.37 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	21.5 W/kg $\pm$ 16.5 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.1 Ω + 6.2 j Ω
Return Loss	- 23.5 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.9 Ω + 6.5 j Ω
Return Loss	- 23.5 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.193 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 11, 2011

Extended Calibration

Usage of SAR dipoles calibrated less than 3 years ago but more than 1 year ago were confirmed in maintaining return loss (< -20 dB, within 20% of prior calibration) and impedance (within 5 ohm from prior calibration) requirements per extended calibrations in KDB Publication 865664 D01 v01r04.

D1900V2 SN: 5d147 - Head						
Date of Measurement	Return Loss (dB)	$\Delta\%$	Impedance Real (Ω)	$\Delta\Omega$	Impedance Imaginary (j Ω)	$\Delta\Omega$
8/13/2015	-23.5		53.1		6.2	
8/12/2016	-24.9	6.0	53.9	0.8	5.4	-0.8

D1900V2 SN: 5d147 - Body						
Date of Measurement	Return Loss (dB)	$\Delta\%$	Impedance Real (Ω)	$\Delta\Omega$	Impedance Imaginary (j Ω)	$\Delta\Omega$
8/13/2015	-23.5		48.9		6.5	
8/12/2016	-22.8	-3.0	46.3	-2.6	6.9	0.4

DASY5 Validation Report for Head TSL

Date: 13.08.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d147

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 38.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5, 5, 5); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.3 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 19.0 W/kg

SAR(1 g) = 10.4 W/kg; SAR(10 g) = 5.47 W/kg

Maximum value of SAR (measured) = 13.2 W/kg



0 dB = 13.2 W/kg = 11.21 dBW/kg

Impedance Measurement Plot for Head TSL

13 Aug 2015 13:23:19
 CH1 S11 1 U FS 3: 53.094 Ω 6.2012 Ω 519.45 μH 1 900.000 000 MHz

*

De1

CA

Avg
16

H1d

CH2 S11 LOG 5 dB/REF -20 dB 3:-23.465 dB 1 900.000 000 MHz

CA

Avg
16

H1d

START 1 700.000 000 MHz

STOP 2 100.000 000 MHz

DASY5 Validation Report for Body TSL

Date: 13.08.2015

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d147

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.51$ S/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.65, 4.65, 4.65); Calibrated: 30.12.2014;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 18.08.2014
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.00 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.37 W/kg

Maximum value of SAR (measured) = 12.8 W/kg

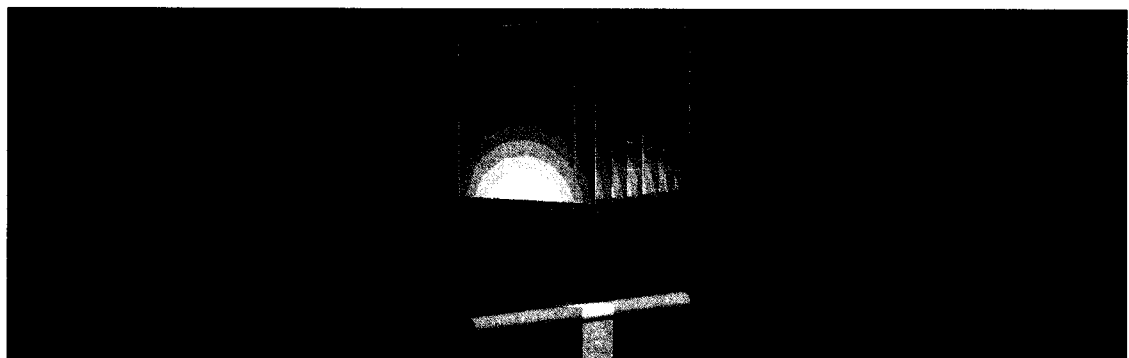

0 dB = 12.8 W/kg = 11.07 dBW/kg

Impedance Measurement Plot for Body TSL

13 Aug 2015 13:22:49
 CH1 S11 1 U FS 3: 48.922 Ω 6.5039 Ω 544.80 μ H 1 900.000 000 MHz

*

De1

CA

Avg
16

H1d

CH2 S11 LOG 5 dB/REF -20 dB 3:-23.539 dB 1 900.000 000 MHz

CA

Avg
16

H1d

START 1 700.000 000 MHz

STOP 2 100.000 000 MHz

Appendix F – Phantom Calibration Data Sheets

Certificate of Conformity / First Article Inspection

Item	Oval Flat Phantom ELI 4.0
Type No	QD OVA 001 B
Series No	1003 and higher
Manufacturer	Untersee Composites Knebelstrasse 8 CH-8268 Mannenbach, Switzerland

Tests

Complete tests were made on the prototype units QD OVA 001 AA 1001, QD OVA 001 AB 1002, pre-series units QD OVA 001 BA 1003-1005 as well as on the series units QD OVA 001 BB, 1006 ff.

Test	Requirement	Details	Units tested
Material thickness	Compliant with the standard requirements	Bottom plate: 2.0mm +/- 0.2mm	all
Material parameters	Dielectric parameters for required frequencies	< 6 GHz: Rel. permittivity = 4 +/-1, Loss tangent ≤ 0.05	Material sample
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards if handled and cleaned according to the instructions.	DGBE based simulating liquids. Observe Technical Note for material compatibility.	Equivalent phantoms, Material sample
Shape	Thickness of bottom material, Internal dimensions, Sagging compatible with standards from minimum frequency	Bottom elliptical 600 x 400 mm Depth 190 mm, Shape is within tolerance for filling height up to 155 mm, Eventual sagging is reduced or eliminated by support via DUT	Prototypes, Sample testing

Standards

- [1] CENELEC EN 50361-2001, « Basic standard for the measurement of the Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz – 3 GHz) », July 2001
- [2] IEEE 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques, December 2003
- [3] IEC 62209 – 1, "Specific Absorption Rate (SAR) in the frequency range of 300 MHz to 3 GHz – Measurement Procedure, Part 1: Hand-held mobile wireless communication devices", February 2005
- [4] IEC 62209 – 2, Draft, "Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices – Human models, Instrumentation and Procedures – Part 2: Procedure to determine the Specific Absorption Rate (SAR) in the head and body for 30 MHz to 6 GHz Handheld and Body-Mounted Devices used in close proximity to the Body.", February 2005
- [5] OET Bulletin 65, Supplement C, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", Edition January 2001

Based on the tests above, we certify that this item is in compliance with the standards [1] to [5] if operated according to the specific requirements and considering the thickness. The dimensions are fully compliant with [4] from 30 MHz to 6 GHz. For the other standards, the minimum lower frequency limit is limited due to the dimensional requirements ([1]: 450 MHz, [2]: 300 MHz, [3]: 800 MHz, [5]: 375 MHz) and possibly further by the dimensions of the DUT.

s p e a g

Date 28.4.2008

Signature / Stamp

Schmid & Partner Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland
 Phone +41 44 245 9700, Fax +41 44 245 9779
 info@speag.com; http://www.speag.com