



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6554
<http://www.pctestlab.com>



CERTIFICATE OF COMPLIANCE FCC Part 22 & 24 Certification

Applicant Name:
Novatel Wireless Inc.
9645 Scranton Road, Suite 205
San Diego, CA 92121-3030
United States

Date of Testing:
12/12/06 – 12/13/06
Test Site/Location:
PCTEST Lab., Columbia, MD, USA
Test Report Serial No.:
0611130998

FCC ID:	PKRNVWMX720
APPLICANT:	NOVATEL WIRELESS INC.

Application Type: Certification
FCC Classification: PCS Licensed Transmitter (PCB)
FCC Rule Part(s): §2; §22(H), §24(E)
EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)
Model(s): MX720
Tx Frequency Range: 824.70 - 848.31MHz (Cell. CDMA) / 1851.25 - 1908.75MHz (PCS CDMA)
Rx Frequency Range: 869.70 - 893.31MHz (Cell. CDMA) / 1931.25 - 1988.75MHz (PCS CDMA)
Max. RF Output Power: 0.297 W ERP Cell. CDMA (24.733 dBm) /
0.293 W EIRP PCS CDMA (24.671 dBm)
Max. SAR Measurement: 1.28 W/kg Cell. CDMA Body SAR;
1.35 W/kg PCS CDMA Body SAR
Emission Designator(s): 1M28F9W (CDMA) / 1M28F9W (PCS)
Test Device Serial No.: *identical prototype* [S/N: 5B101CEC]

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.



I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Grant conditions: Power output listed is ERP for Part 22 and EIRP for Part 24. SAR compliance has been established in the host product(s) with slot configurations as tested in this filing, and can be used in host product(s) with substantially similar physical dimensions, construction, and electrical and RF characteristics. This transmitter is restricted for use with the specific antenna(s) tested for this filing. The antenna(s) used for this transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. End-users must be provided with specific information required to satisfy RF exposure compliance for all final host devices.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.




Randy Ortanez
President




FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)	Page 1 of 50	


T A B L E O F C O N T E N T S

FCC PART 22 & 24 MEASUREMENT REPORT.....		3
1.0 INTRODUCTION.....		4
1.1 MEASUREMENT PROCEDURE.....		4
1.2 SCOPE.....		4
1.3 TESTING FACILITY.....		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION.....		5
2.2 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....		5
3.0 DESCRIPTION OF TESTS.....		6
3.1 OCCUPIED BANDWIDTH EMISSION LIMITS.....		6
3.2 CELLULAR - BASE FREQUENCY BLOCKS.....		6
3.3 CELLULAR - MOBILE FREQUENCY BLOCKS.....		6
3.4 PCS - BASE FREQUENCY BLOCKS.....		7
3.5 PCS - MOBILE FREQUENCY BLOCKS.....		7
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....		7
3.7 RADIATED SPURIOUS AND HARMONIC EMISSIONS.....		7
3.8 FREQUENCY STABILITY / TEMPERATURE VARIATION.....		8
4.0 TEST EQUIPMENT CALIBRATION DATA.....		9
5.0 SAMPLE CALCULATIONS.....		10
6.0 TEST RESULTS.....		11
6.1 CONDUCTED OUTPUT POWER.....		12
6.2 EFFECTIVE RADIATED POWER OUTPUT DATA.....		13
6.3 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT DATA.....		14
6.4 CELLULAR CDMA RADIATED MEASUREMENTS.....		15
6.5 PCS CDMA RADIATED MEASUREMENTS.....		18
6.6 FREQUENCY STABILITY (CELLULAR CDMA).....		21
6.7 FREQUENCY STABILITY (PCS CDMA).....		22
7.0 PLOT(S) OF EMISSIONS.....		23
8.0 CONCLUSION.....		47
EXHIBIT A – TEST SETUP PHOTOGRAPHS.....		48
EXHIBIT B – INTERNAL PHOTOGRAPHS.....		49
EXHIBIT C – EXTERNAL PHOTOGRAPHS.....		50

FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 2 of 50



MEASUREMENT REPORT




FCC Part 22 & 24

A. §2.1033 General Information

APPLICANT: Novatel Wireless Inc.
APPLICANT ADDRESS: 9645 Scranton Road, Suite 205
 San Diego, CA 92121-3030
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2; §22(H), §24(E)
MODEL NAME: MX720
FCC ID: PKRNVWMX720
FCC CLASSIFICATION: PCS Licensed Transmitter (PCB)
EMISSION DESIGNATOR(S): 1M28F9W (CDMA) / 1M28F9W (PCS)
MODE: CDMA / EvDO
FREQUENCY TOLERANCE: ±0.00025 % (2.5 ppm)
Test Device Serial No.: Production Pre-Production Engineering
DATE(S) OF TEST: 12/12/06
TEST REPORT S/N: 0611130998

A.1 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab. located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC-2451).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 3 of 50

1.0 INTRODUCTION

1.1 Measurement Procedure

The radiated spurious measurements were made outdoors at a 3-meter test range (see Figure 1-1). The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

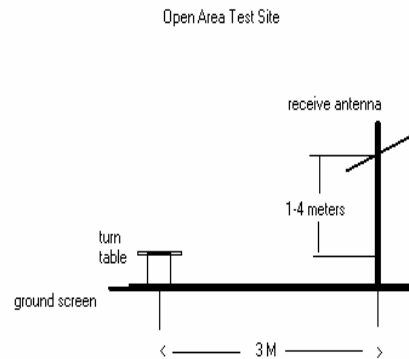



Figure 1-1. Diagram of 3-meter outdoor test range

Deviation from Measurement Procedure.....None

1.2 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.3 Testing Facility

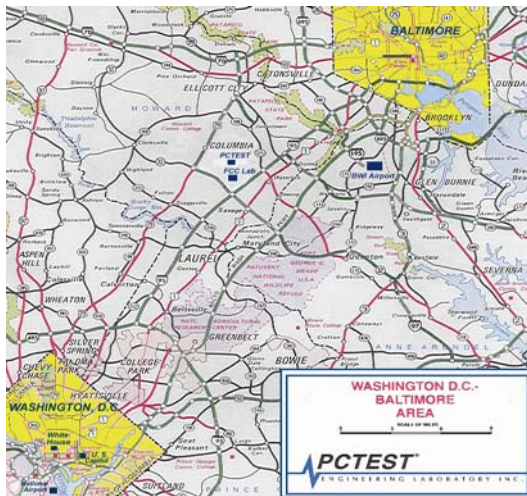

These measurement tests were conducted at PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 27, 2006 and Industry Canada.

Figure 1-3. Map of the Greater Baltimore and Metropolitan Washington, D.C. area.

FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 4 of 50

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A) FCC ID: PKRNVWMX720**. The EUT consisted of the following component(s):



Manufacturer / Description	FCC ID	Serial Number
Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)	PKRNVWMX720	5B101CEC

Table 2.1. EUT Equipment Description

2.2 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing.

- None

FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)	Page 5 of 50	


3.0 DESCRIPTION OF TESTS

3.1 Occupied Bandwidth Emission Limits


§2.1049, 22.917(a), 24.238(a)



- a. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.
- b. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.
- c. When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges, both upper and lower, as the design permits.
- d. The measurement of emission power can be expressed in peak or average values, provided they are expressed in the same parameters as the transmitter power.

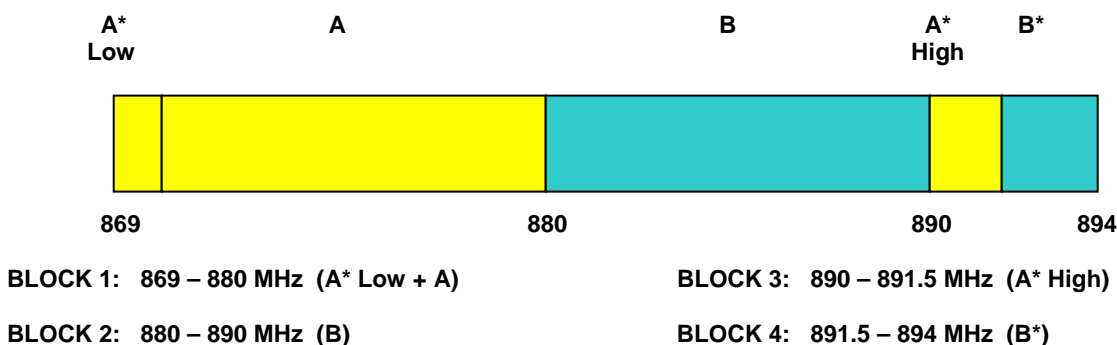3.2 Cellular - Base Frequency Blocks

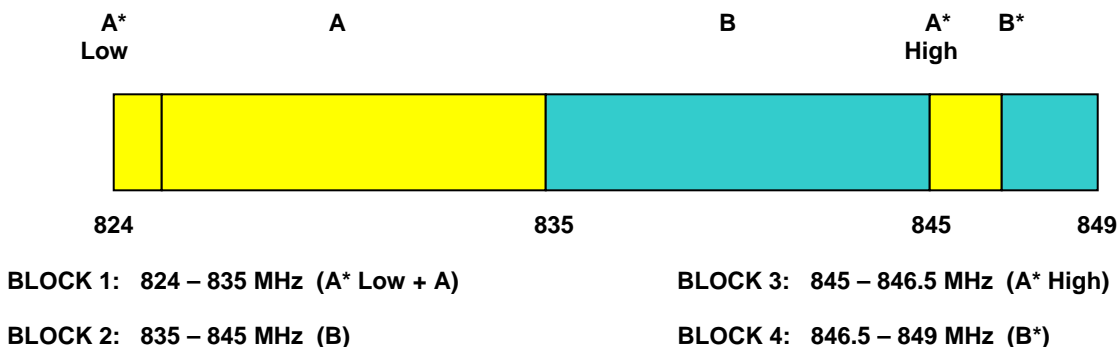


3.3 Cellular - Mobile Frequency Blocks



FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 6 of 50

3.4 PCS - Base Frequency Blocks

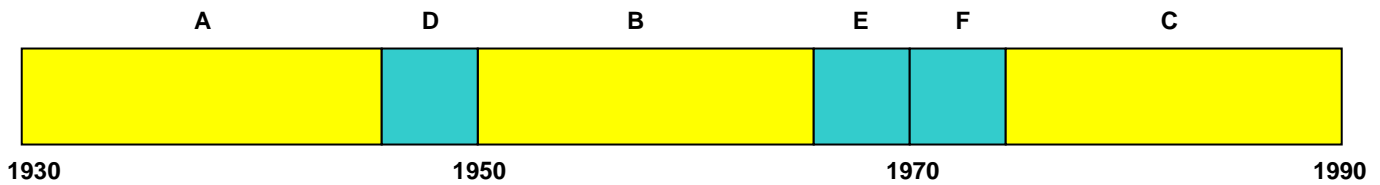

BLOCK 1: 1930 – 1945 MHz (A)

BLOCK 4: 1965 – 1970 MHz (E)


BLOCK 2: 1945 – 1950 MHz (D)

BLOCK 5: 1970 – 1975 MHz (F)

BLOCK 3: 1950 – 1965 MHz (B)

BLOCK 6: 1975 – 1990 MHz (C)

3.5 PCS - Mobile Frequency Blocks

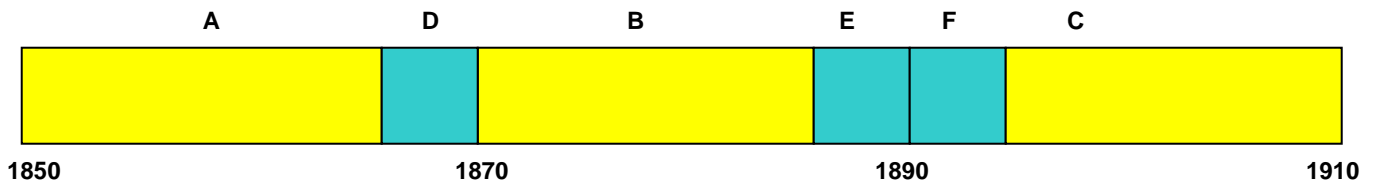

BLOCK 1: 1850 – 1865 MHz (A)

BLOCK 4: 1885 – 1890 MHz (E)

BLOCK 2: 1865 – 1870 MHz (D)

BLOCK 5: 1890 – 1895 MHz (F)

BLOCK 3: 1870 – 1885 MHz (B)

BLOCK 6: 1895 – 1910 MHz (C)

3.6 Spurious and Harmonic Emissions at Antenna Terminal



§2.1051, 22.917(a), 24.238(a); RSS-129 (8.1.1), RSS-133 (6.5.1)

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.

3.7 Radiated Spurious and Harmonic Emissions

§2.1053, 22.917(a), 24.238(a); RSS-129 (8.1.1), RSS-133 (6.5.1(i))

Spurious and harmonic radiated emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 3-meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer reading. This level is recorded. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration. This device was tested under all R.C.s and S.O.s and the worst case is reported with EvDO FTAP with "All Up" power control bits.

FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)	Page 7 of 50	



3.8 Frequency Stability / Temperature Variation

§2.1055, 22.355, 24.235; RSS-129 (9.2.1), RSS-133 (6.7(a,b))



The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (20°C to provide a reference).
2. The equipment is subjected to an overnight “soak” at -30°C without any power applied.
3. After the overnight “soak” at -30°C (usually 14-16 hours) the equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within one minute after applying power to the transmitter.
4. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. At least a period of one half-hour is provided to allow stabilization of the equipment at each temperature level.



FCC ID: PKRNVVMX720	 FCC Pt. 22/24 MEASUREMENT REPORT 		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)	Page 8 of 50

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model / Equipment	Calibration Date	Cal Interval	Calibration Due	Serial No.
Agilent	E4404B/E4407B ESA Spectrum Analyzer	04/20/06	Annual	04/20/07	US39210313
Agilent	E5515C Wireless Communications Test Set	07/27/06	Annual	07/27/07	GB41450275
Agilent	E5515C Wireless Communications Test Set	10/06/06	Annual	10/06/07	GB43193972
Agilent	E4432B ESG-D Series Signal Generator	08/08/06	Annual	08/08/07	US40053896
Agilent	8648D (9kHz-4GHz) Signal Generator	10/01/06	Annual	10/01/07	3613A00315
EMCO	Model 3115 (1-18GHz) Horn Antenna	08/24/06	Biennial	08/23/08	9203-2178
EMCO	Model 3115 (1-18GHz) Horn Antenna	08/25/06	Biennial	08/24/08	9704-5182
Gigatronics	8657A Universal Power Meter	04/07/06	Annual	04/07/07	8650319
Gigatronics	80701A (0.05-18GHz) Power Sensor	04/11/06	Annual	04/11/07	1833460
Rohde & Schwarz	NRVS Power Meter	06/01/05	Biennial	06/01/07	835360/079
Rohde & Schwarz	NRV-Z53 Power Sensor	06/01/05	Biennial	06/01/07	846076/007
Rohde & Schwarz	CMU200 Base Station Simulator	11/08/06	Annual	11/08/07	107826
Rohde & Schwarz	CMU200 Base Station Simulator	07/26/06	Annual	07/26/07	833855/010
Rohde & Schwarz	CMU200 Base Station Simulator	04/20/06	Annual	04/20/07	836371/079
Agilent	HP 8566B (100Hz-22GHz)	12/22/05	Annual	12/22/06	3638A08713
Agilent	E4448A (3Hz-50GHz)	09/22/06	Annual	09/22/07	US42510244
Agilent	E8257D (250kHz-20GHz) Signal Generator	02/11/06	Annual	02/11/07	MY45470194
Agilent	E8257D (250kHz-20GHz) Signal Generator	03/30/06	Annual	03/30/07	MY44320964
Gigatronics	8651A (50MHz-18GHz)	07/28/06	Annual	07/28/07	1834052
Gigatronics	80701A (0.05-18GHz) Power Sensor	08/04/06	Annual	08/04/07	1835299
Agilent	HP 85650A Quasi-Peak Adapter	12/22/05	Annual	12/22/06	2043A00301
Agilent	HP 8449B (1-26.5GHz) Pre-Amplifier	12/22/05	Annual	12/22/06	3008A00985
Agilent	HP 11713A Attenuation/Switch Driver	12/22/05	Annual	12/22/06	N/A
Agilent	HP 85685A (20Hz-2GHz) Preselector	12/22/05	Annual	12/22/06	N/A
Agilent	HP 8586 Opt. 462 Impulse Bandwidth	12/22/05	Annual	12/22/06	3701A22204
EMCO	3115 (1-18GHz) Horn Antenna	04/04/05	Biennial	04/04/07	9205-3874
Compliance Design	A100 Roberts Dipoles	08/31/05	Biennial	08/31/07	5118
EMCO	Dipole Pair	09/21/06	Biennial	09/20/08	23951
SOLAR	8012-50 LISN (2)	11/18/05	Biennial	11/18/07	0313233, 0310234
Agilent	HP 8901A Modulation Analyzer	06/05/06	Annual	06/05/07	2432A03467
Agilent	HP 8903 B Audio Analyzer	06/01/06	Annual	06/01/07	3011A09025
K & L	11SH10 Band Pass Filter	N/A	Annual	N/A	1300/4000
K & L	11SH10 Band Pass Filter	N/A	Annual	N/A	4000/12000
Agilent	HP 8495A (0-70dB) DC-4GHz Attenuator	N/A		N/A	N/A
-	263-10dB (DC-18GHz) 10 dB Attenuator	N/A		N/A	N/A
Pasternack	PE2208-6 Bidirectional Coupler	N/A		N/A	N/A
-	No.165 (30MHz - 1000MHz) RG58 Coax Cable	N/A		N/A	N/A
-	No.166 (1000-26500MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167 (100kHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A

Table 4.1. Test Equipment

FCC ID: PKRNVVMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 061130998	Test Dates: Dec. 12 - 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 9 of 50

5.0 SAMPLE CALCULATIONS

Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz

F = Frequency Modulation



9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

Spurious Radiated Emission - PCS Band

Example: Channel 25 PCS Mode 2nd Harmonic (3702.50 MHz)

The receive analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the receive analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3702.50 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 10 of 50

6.0 TEST RESULTS

Summary



The intentional radiator has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC performance and procedural standards. The radio was transmitting at full power on the specified channels. The channels tested are high, middle and low of the allocated bands. Final system data was gathered in a mode that tended to maximize emissions by varying the orientation of the EUT, orientation of power and I/O cabling, antenna search height, and antenna polarization. This device was tested under all R.C.s and S.O.s and the worst case is reported with EvDO FTAP with "All Up" power control bits.

Method/System: PCS Licensed Transmitter (PCB)

Mode(s): CDMA / EvDO

FCC Part Section(s)	RSS Section	Test Description	Test Limit	Test Condition	Test Result
<u>TRANSMITTER MODE (TX)</u>					
2.1049, 22.917(a), 24.238(a)	N/A	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 22.917(a), 24.238(a)	RSS-129 (8.1.1) RSS-133 (6.5.1)	Band Edge / Conducted Spurious Emissions	< 43 + 10log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions		PASS
2.1046	N/A	Transmitter Conducted Output Power	N/A		PASS
22.913(a)(2)	RSS-129 (9.1)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS
24.232(c)	RSS-133 (6.4) [SRSP-510 (5.1.2)]	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS
2.1053, 22.917(a), 24.238(a)	RSS-129 (8.1.1) RSS-133 (6.5.1)	Undesirable Emissions	< 43 + 10log ₁₀ (P[Watts]) for all out-of-band emissions		PASS
2.1055, 22.355, 24.235	RSS-129 (9.2.1) RSS-133 (6.3)	Frequency Stability	< 2.5 ppm		PASS
<u>RECEIVER MODE (RX)</u>					
15.107	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits or < RSS-Gen table 2 limits	Line Conducted	PASS
15.109	RSS-129 (10(a,d)), RSS-133 (6.7(a,b)), RSS-210 (7.3)	General Field Strength Limits (Restricted Bands and Radiated Emissions Limits)	< FCC 15.209 limits or < RSS-Gen limits [Section 6; Table 1]	RADIATED (30MHz-1GHz) (1-25 GHz)	PASS
<u>RF EXPOSURE (SAR)</u>					
2.1093	RSS-102	SAR Test or MPE	1.6 W/kg (SAR Limit)	3 Channels	PASS

Table 6-1. Summary of Test Results

FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)	Page 11 of 50	

6.1 Conducted Output Power

§2.1046

This device was tested under all R.C.s and S.O.s and the worst case is reported with EvDO FTAP with "All Up" power control bits.

SAR Measurement Conditions for CDMA2000

The following procedures were followed according to FCC "SAR Measurement Procedures for 3G Devices", June 2006.

Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by "SAR Measurement Procedures for 3G Devices", June 2006.

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 6-2 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH0 and demodulation of RC 3,4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH0 data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 6-3 was applied.
5. FCHs were configured at full rate for maximum SAR with "All Up" power control bits.

Parameter	Units	Value
\bar{I}_{or}	dBm/1.23 MHz	-104
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4



Table 6-2
Parameters for Max. Power for RC1

Parameter	Units	Value
\bar{I}_{or}	dBm/1.23 MHz	-86
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

Table 6-3
Parameters for Max. Power for RC3

Band	Channel	TDSO S032 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]	1x EvDO Rev. A [dBm]
	F-RC	RC3	(FTAP)	(RTAP)	(FETAP)	(RETAP)
	Vocoder Rate	N/A	N/A	N/A	N/A	N/A
Cellular	1013	24.41	24.36	24.40	24.30	24.32
	384	24.35	24.31	24.36	24.26	24.30
	777	24.46	24.41	24.51	24.20	24.33
PCS	25	24.37	24.30	24.38	24.22	24.29
	600	24.32	24.33	24.36	24.31	24.33
	1175	24.44	24.40	24.43	24.30	24.38

Table 6-4
Maximum Power Output Table for MX720

FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 12 of 50

6.2 Effective Radiated Power Output Data

§22.913(a)(2); RSS-129 (9.1)

POWER: High (CDMA Mode)

Freq. Tuned (MHz)	REF. LEVEL (dBm)	POL (H/V)	ERP (W)	ERP (dBm)
824.70	-16.600	V	0.293	24.673
836.52	-16.800	V	0.291	24.633
848.31	-16.850	V	0.297	24.733



Table 6-2. Effective Radiated Power Output Data

NOTES:

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all R.C.s and S.O.s and the worst case is reported with EvDO FTAP with "All Up" power control bits.

FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 13 of 50

6.3 Equivalent Isotropic Radiated Power Output Data

§24.232(c); RSS-133 (6.4) [SRSP-510 (5.1.2)]

Radiated measurements at 3 meters

Supply Voltage: 120Vac to laptop
Modulation: PCS CDMA

FREQ. (MHz)	REF. LEVEL (dBm)	POL (H/V)	Azimuth (o angle)	EIRP (dBm)	EIRP (W)
1851.25	-18.700	V	180	24.381	0.274
1880.00	-18.600	V	180	24.651	0.292
1908.75	-18.750	V	180	24.671	0.293



Table 6-3. Equivalent Isotropic Radiated Power Output Data

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all R.C.s and S.O.s and the worst case is reported with EvDO FTAP with "All Up" power control bits.

FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 061130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 14 of 50

6.4 Cellular CDMA Radiated Measurements

§2.1053, 22.917(a): RSS-129 (8.1.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 824.70 MHz
 CHANNEL: 1013 (Low)
 MEASURED OUTPUT POWER: 24.733 dBm = 0.297 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 37.73 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1649.40	-36.23	6.10	-30.13	V	54.9
2474.10	-31.05	6.70	-24.35	V	49.1
3298.80	-43.79	6.80	-36.99	H	61.7
4123.50	-62.18	6.50	-55.68	H	80.4
4948.20	-60.68	7.00	-53.68	H	78.4



Table 6-4. Radiated Spurious Data (Cellular CDMA Mode – Ch. 1013)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the worst case is reported with EvDO FTAP with "All Up" power control bits.

FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 15 of 50

Cellular CDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-129 (8.1.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 836.52 MHz
 CHANNEL: 0384 (Mid)
 MEASURED OUTPUT POWER: 24.733 dBm = 0.297 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 37.73 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1673.04	-34.43	6.10	-28.33	H	53.1
2509.56	-30.31	6.70	-23.61	H	48.3
3346.08	-44.65	6.80	-37.85	H	62.6
4182.60	-54.41	6.50	-47.91	H	72.6
5019.12	-57.30	7.00	-50.30	H	75.0



Table 6-5. Radiated Spurious Data (Cellular CDMA Mode – Ch. 384)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the worst case is reported with EvDO FTAP with "All Up" power control bits.

FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 16 of 50

Cellular CDMA Radiated Measurements (Cont'd)

§2.1053, 22.917(a); RSS-129 (8.1.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 848.31 MHz
 CHANNEL: 0777 (High)
 MEASURED OUTPUT POWER: 24.733 dBm = 0.297 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 37.73 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
1696.62	-37.04	6.10	-30.94	H	55.7
2544.93	-30.06	6.70	-23.36	H	48.1
3393.24	-40.46	6.80	-33.66	H	58.4
4241.55	-60.05	6.50	-53.55	H	78.3
5089.86	-59.34	7.00	-52.34	H	77.1



Table 6-6. Radiated Spurious Data (Cellular CDMA Mode – Ch. 777)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the worst case is reported with EvDO FTAP with "All Up" power control bits.

FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)	Page 17 of 50	

6.5 PCS CDMA Radiated Measurements

§2.1053, 24.238(a); RSS-133 (6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1851.25 MHz
 CHANNEL: 25 (Low)
 MEASURED OUTPUT POWER: 24.671 dBm = 0.293 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 37.67 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3702.50	-31.25	8.70	-22.55	H	47.2
5553.75	-43.40	9.70	-33.70	H	58.4
7405.00	-40.02	9.90	-30.12	H	54.8
9256.25	-42.51	11.40	-31.11	H	55.8
11107.50	-41.94	12.10	-29.84	H	54.5



Table 6-7. Radiated Spurious Data (PCS CDMA Mode – Ch. 25)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the worst case is reported with EvDO FTAP with "All Up" power control bits.

FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 18 of 50

PCS CDMA Radiated Measurements (Cont'd)

§2.1053, 24.238(a); RSS-133 (6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 0600 (Mid)
 MEASURED OUTPUT POWER: 24.671 dBm = 0.293 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 37.67 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3760.00	-33.60	8.70	-24.90	H	49.6
5640.00	-46.43	9.70	-36.73	H	61.4
7520.00	-41.23	9.90	-31.33	H	56.0
9400.00	-53.63	11.40	-42.23	H	66.9
11280.00	-49.93	12.10	-37.83	H	62.5



Table 6-8. Radiated Spurious Data (PCS CDMA Mode – Ch. 600)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the worst case is reported with EvDO FTAP with "All Up" power control bits.

FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 19 of 50

PCS CDMA Radiated Measurements (Cont'd)

§2.1053, 24.238(a); RSS-133 (6.5.1)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 1908.75 MHz
 CHANNEL: 1175 (High)
 MEASURED OUTPUT POWER: 24.671 dBm = 0.293 W
 MODULATION SIGNAL: CDMA (Internal)
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 37.67 dBc

FREQ. (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	POL (H/V)	(dBc)
3817.50	-31.24	8.70	-22.54	H	47.2
5726.25	-37.14	9.70	-27.44	H	52.1
7635.00	-42.80	9.90	-32.90	H	57.6
9543.75	-41.91	11.40	-30.51	H	55.2
11452.50	-37.50	12.10	-25.40	H	50.1



Table 6-9. Radiated Spurious Data (PCS CDMA Mode – Ch. 1175)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method
 according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5 MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all R.C.s and S.O.s and the worst case is reported with EvDO FTAP with "All Up" power control bits.

FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)	Page 20 of 50	

6.6 Frequency Stability (Cellular CDMA)

§2.1055, 22.355; RSS-129 (9.2.1)



Operating Frequency :	836520000	Hz
Channel :	384	
Reference Volage :	3.3	V
Deviation Limit :	+/- 0.00025/ 2.5	% / ppm

Voltage (%)	Voltage (Vdc)	Temp. (C)	Frequency (Hz)	Deviation (%)	Offset (Hz)
100%	3.3	-20	836520004.0	0.00000039	4.0
100%		-10	836519993.7	-0.00000084	-6.3
100%		0	836519995.5	-0.00000062	-4.5
100%		10	836519982.0	-0.00000224	-18.0
100%		25 (Ref)	836520000.7	0.00000000	0.7
100%		30	836520000.7	0.00000000	0.7
100%		40	836519995.0	-0.00000068	-5.0
100%		50	836520005.0	0.00000051	5.0
100%		60	836520029.0	0.00000338	29.0
90%		3.0	25	836519997.0	-0.00000044
110%	3.6	25	836520008.7	0.00000096	8.7

Table 6-10. Frequency Stability Data (Cellular CDMA Mode – Ch. 384)

Note:

batteries were used to perform this test.

FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 21 of 50

6.7 Frequency Stability (PCS CDMA)

§2.1055, 24.235; RSS-133 (6.3)


Operating Frequency :		1880000000	Hz		
Channel :		600			
Reference Volage :		3.3	V		
Deviation Limit :		+/- 0.00025/ 2.5	% / ppm		
Voltage (%)	Voltage (Vdc)	Temp. (C)	Frequency (Hz)	Deviation (%)	Offset (Hz)
100%	3.3	-20	1880000043.0	0.00000196	43
100%		-10	1879999992.0	-0.00000075	-8
100%		0	1879999978.0	-0.00000149	-22
100%		10	1880000012.4	0.00000034	12.4
100%		25 (Ref)	1880000006.1	0.00000000	6.1
100%		30	1879999960.0	-0.00000245	-40
100%		40	1880000004.3	-0.00000010	4.3
100%		50	1880000014.0	0.00000042	14
100%		60	1880000011.0	0.00000026	11
90%	3.0	25	1880000007.8	0.00000009	7.8
110%	3.6	25	1880000023.0	0.00000090	23

Table 6-11. Frequency Stability Data (PCS CDMA Mode – Ch. 600)

Note:


batteries were used to perform this test.

7.0 PLOT(S) OF EMISSIONS

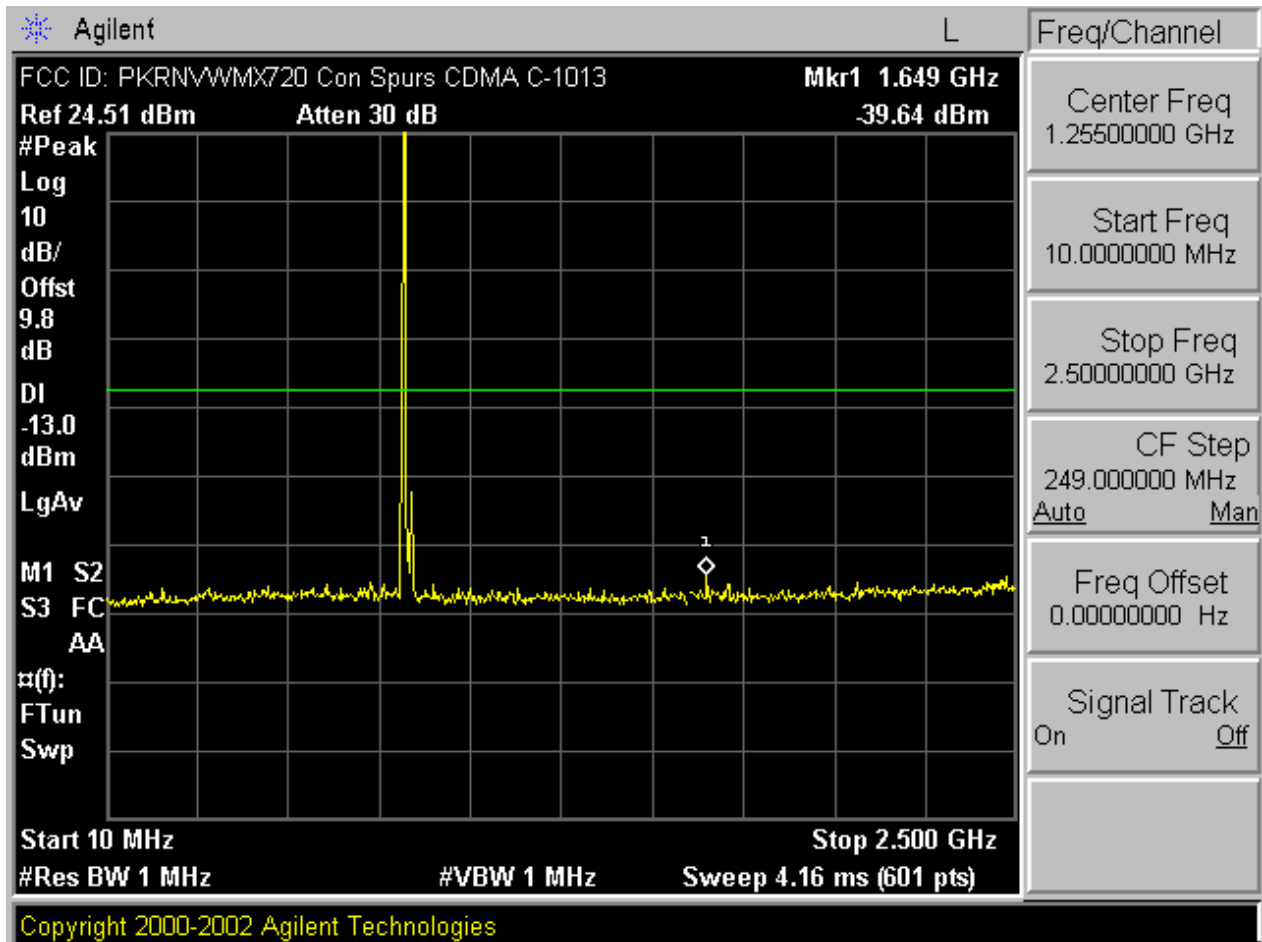


Plot 7-1. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 23 of 50

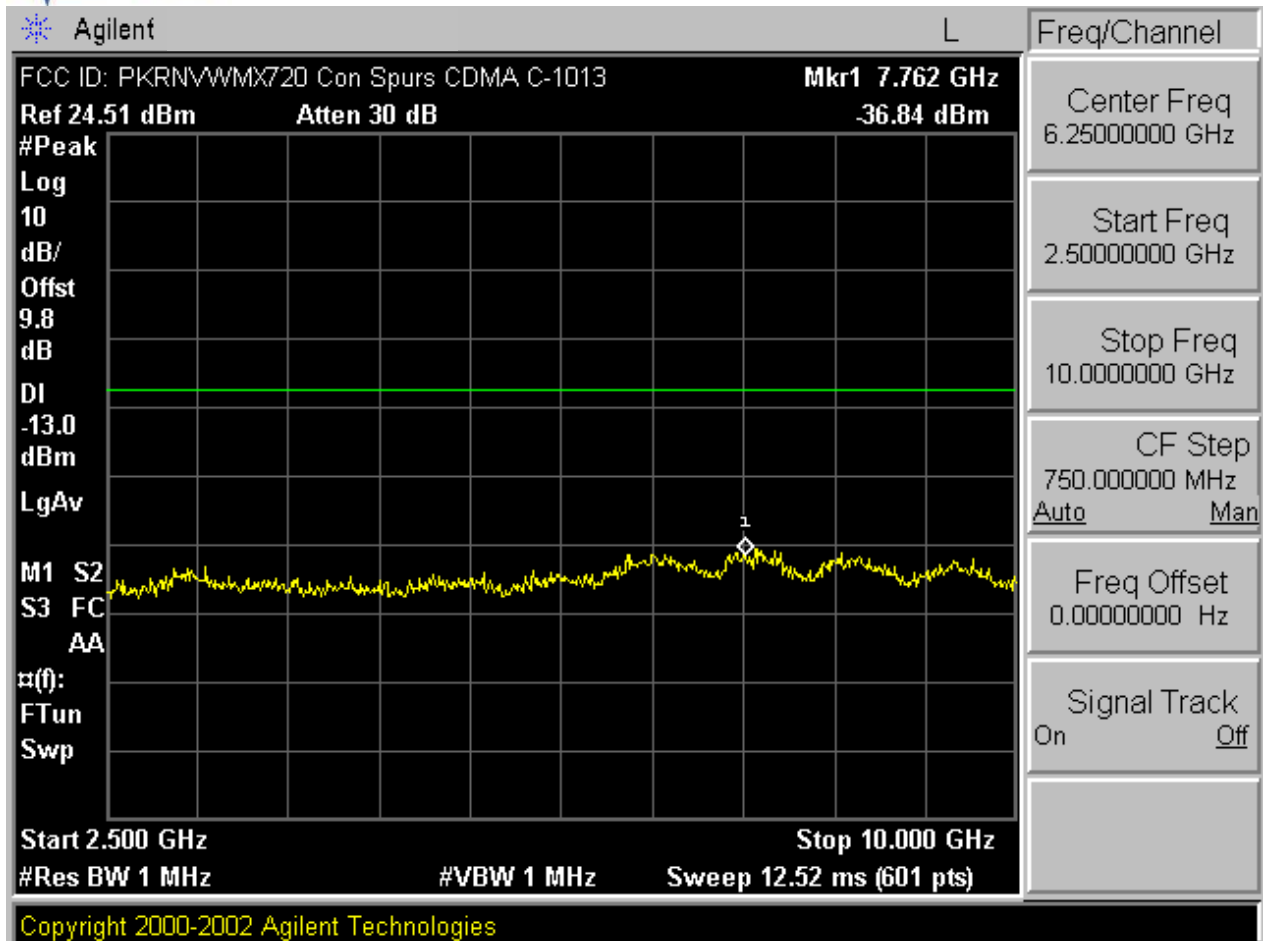



Plot 7-2. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 1013)

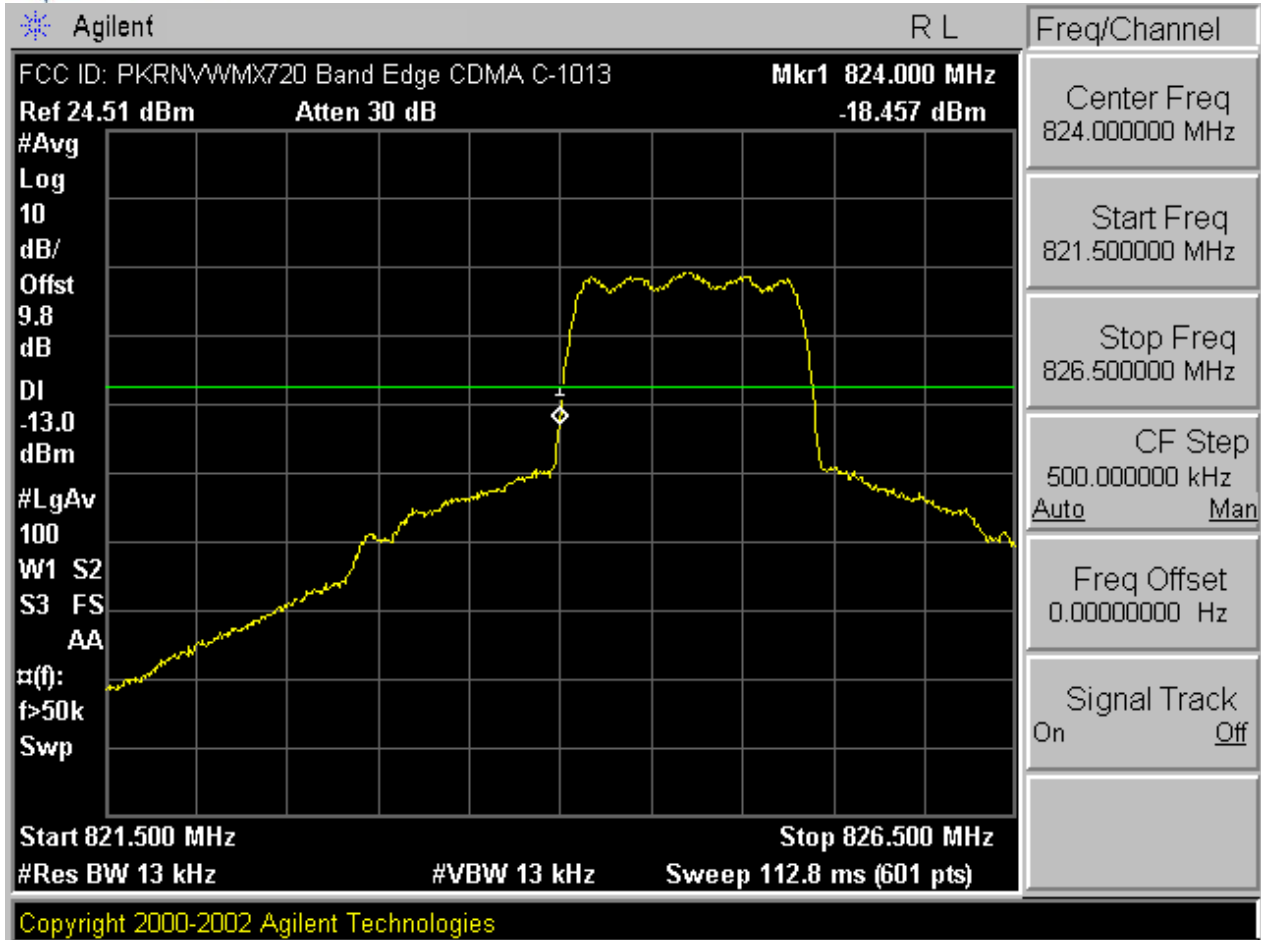FCC ID: PKRNWVMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 24 of 50






Plot 7-3. Band Edge Plot (Cellular CDMA Mode – Ch. 1013)

FCC ID: PKRNWVMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 25 of 50






Plot 7-4. 4MHz Span Plot (Cellular CDMA Mode – Ch. 1013)

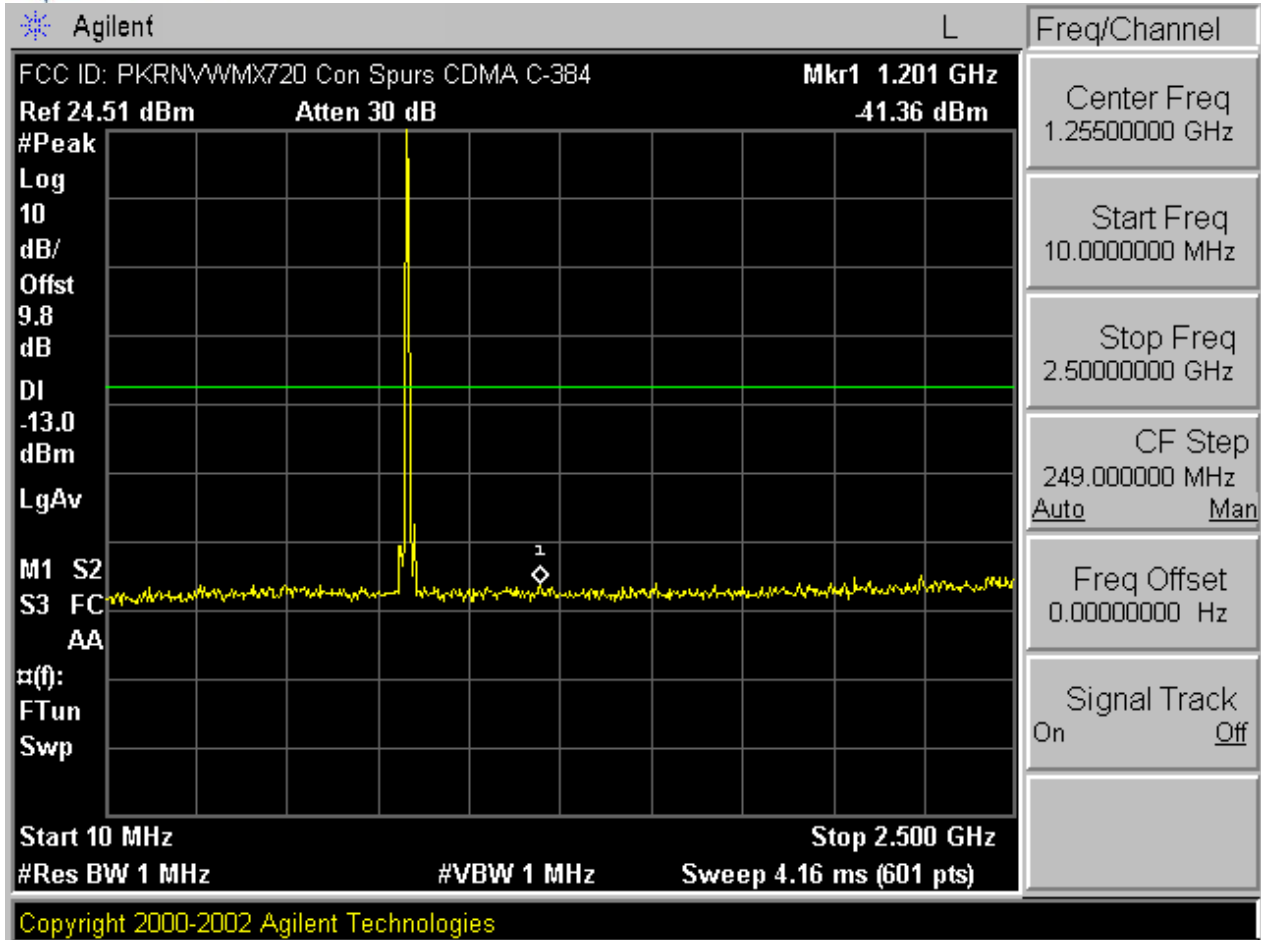FCC ID: PKRNWVMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 26 of 50






Plot 7-5. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

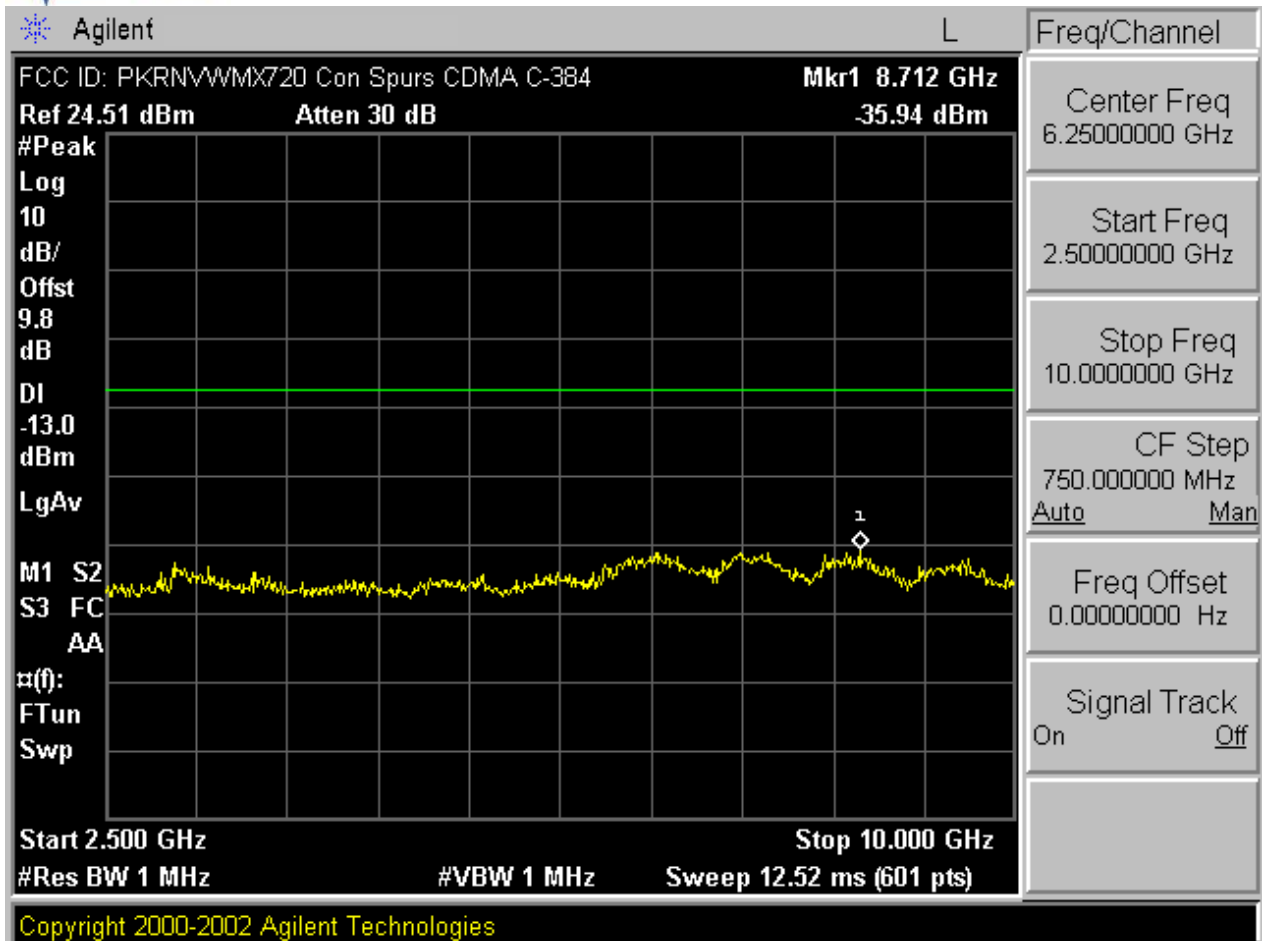FCC ID: PKRNWVMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 27 of 50




Plot 7-6. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 384)

FCC ID: PKRNWVMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 28 of 50

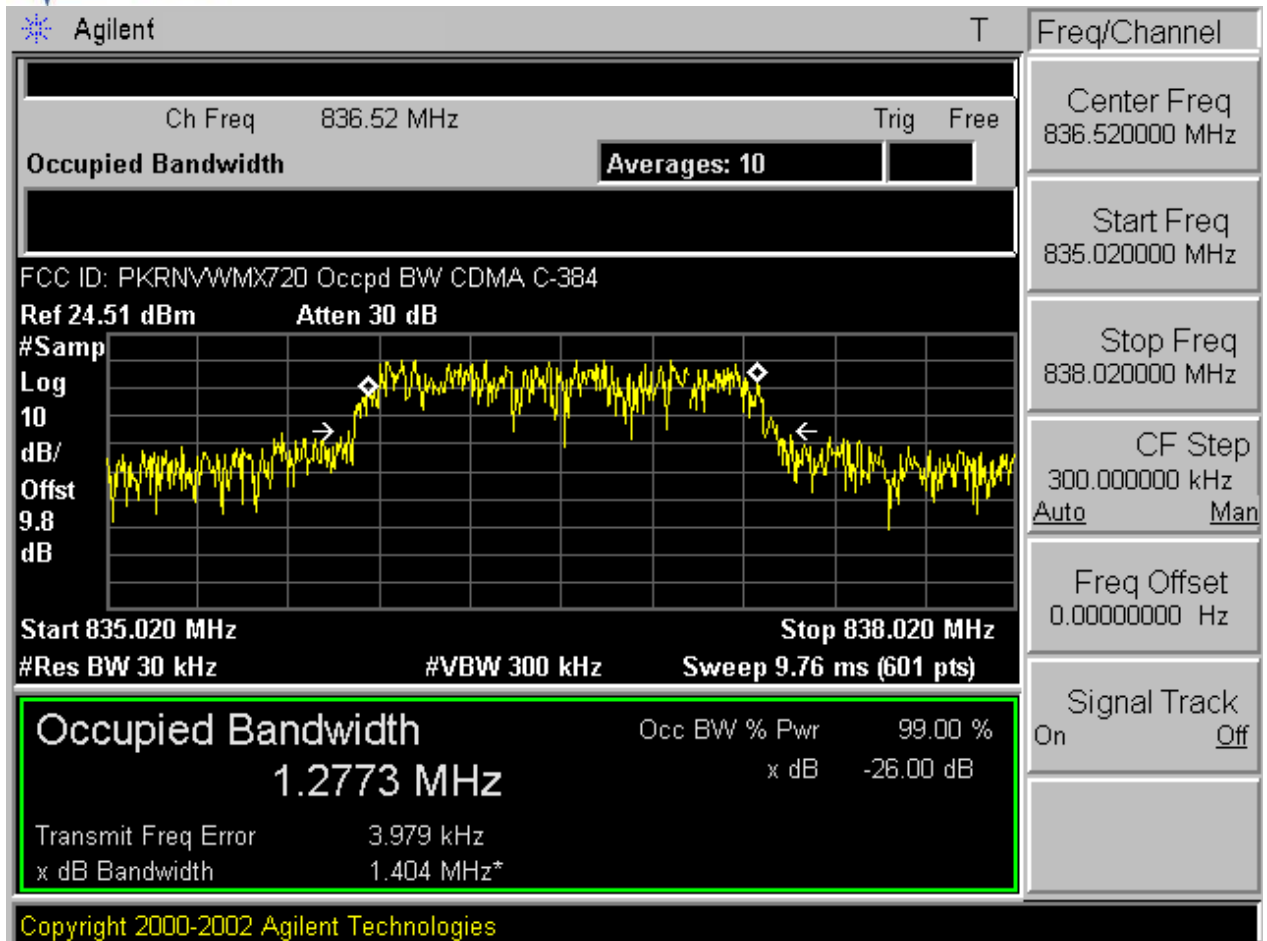


Plot 7-7. Occupied Bandwidth Plot (Cellular CDMA Mode – Ch. 384)

FCC ID: PKRNVWMX720	PCTEST wireless	FCC Pt. 22/24 MEASUREMENT REPORT	NOVATEL WIRELESS	Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 29 of 50

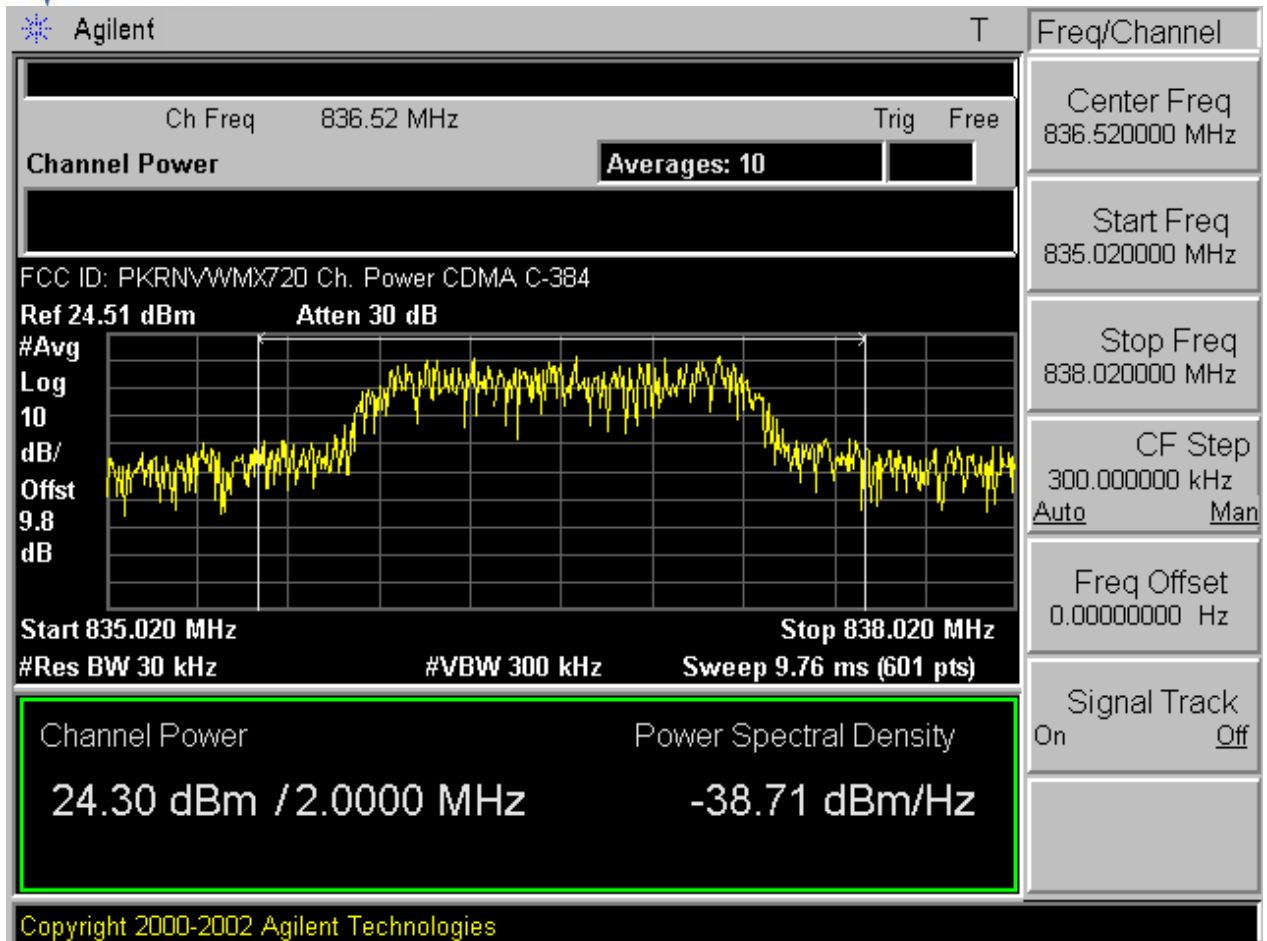




Plot 7-8. Channel Power Plot (Cellular CDMA Mode – Ch. 384)

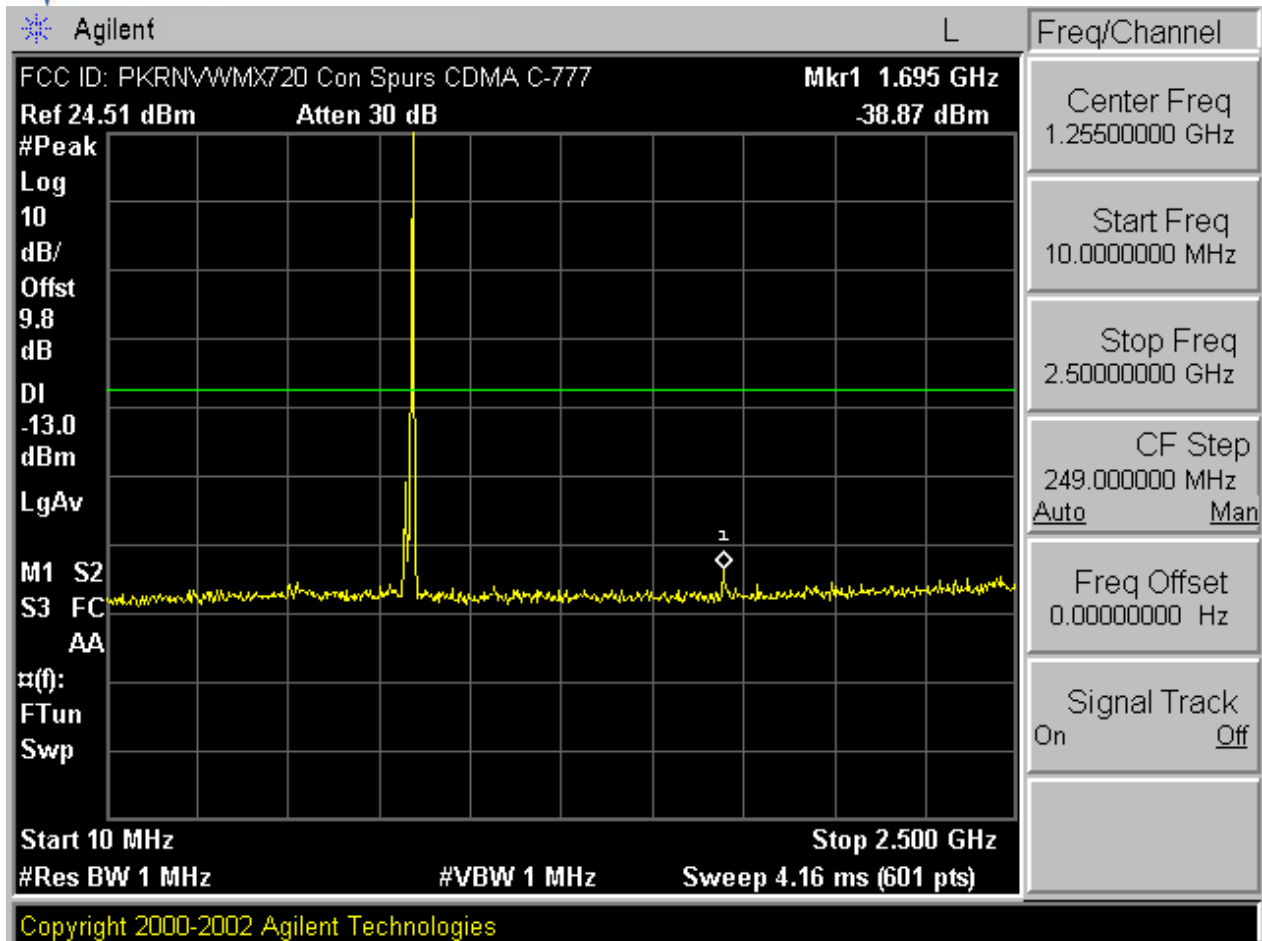FCC ID: PKRNVWMX720	PCTEST wireless	FCC Pt. 22/24 MEASUREMENT REPORT	NOVATEL WIRELESS	Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 30 of 50






Plot 7-8. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

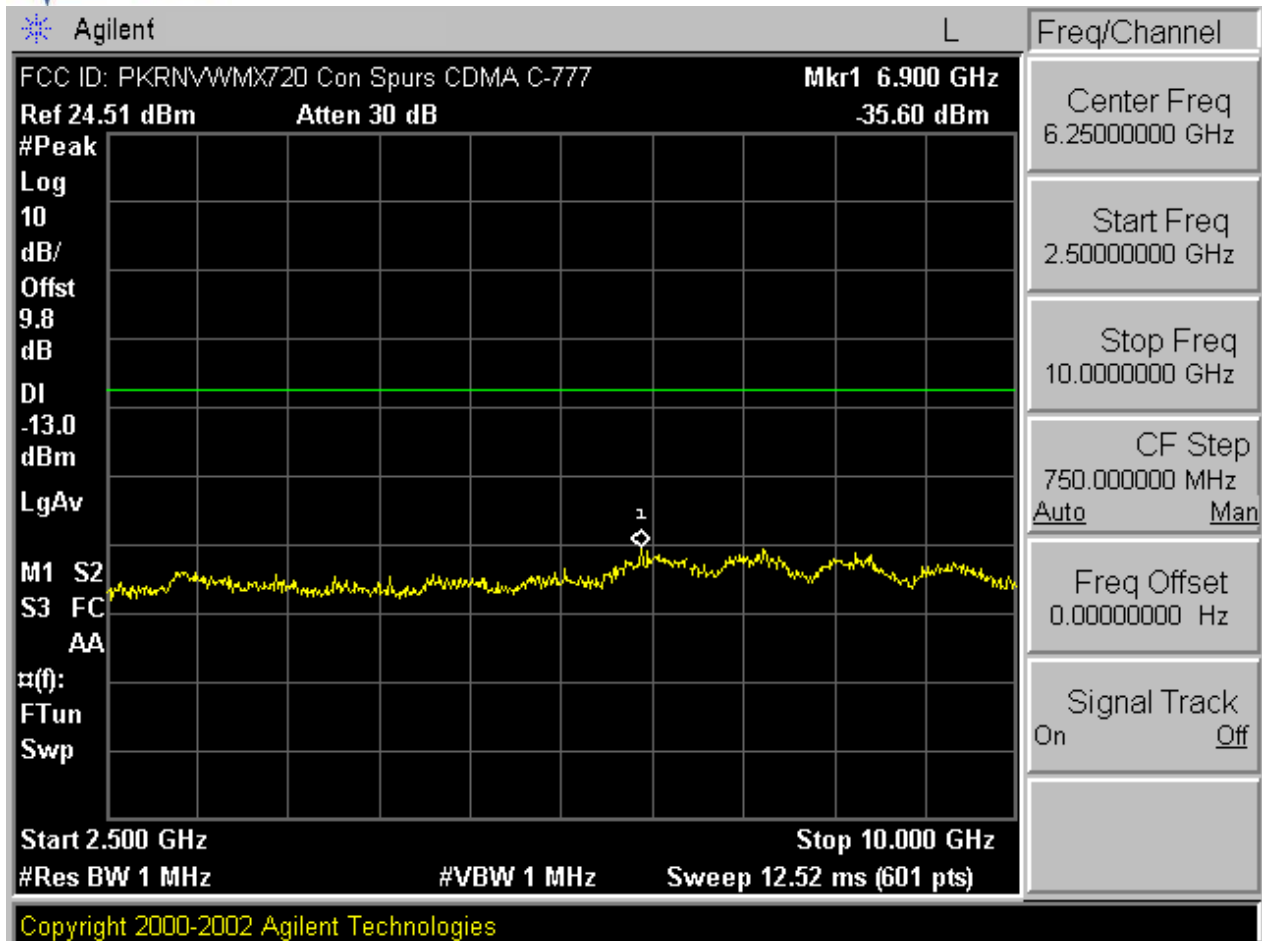FCC ID: PKRNWVMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 31 of 50





Plot 7-9. Conducted Spurious Plot (Cellular CDMA Mode – Ch. 777)

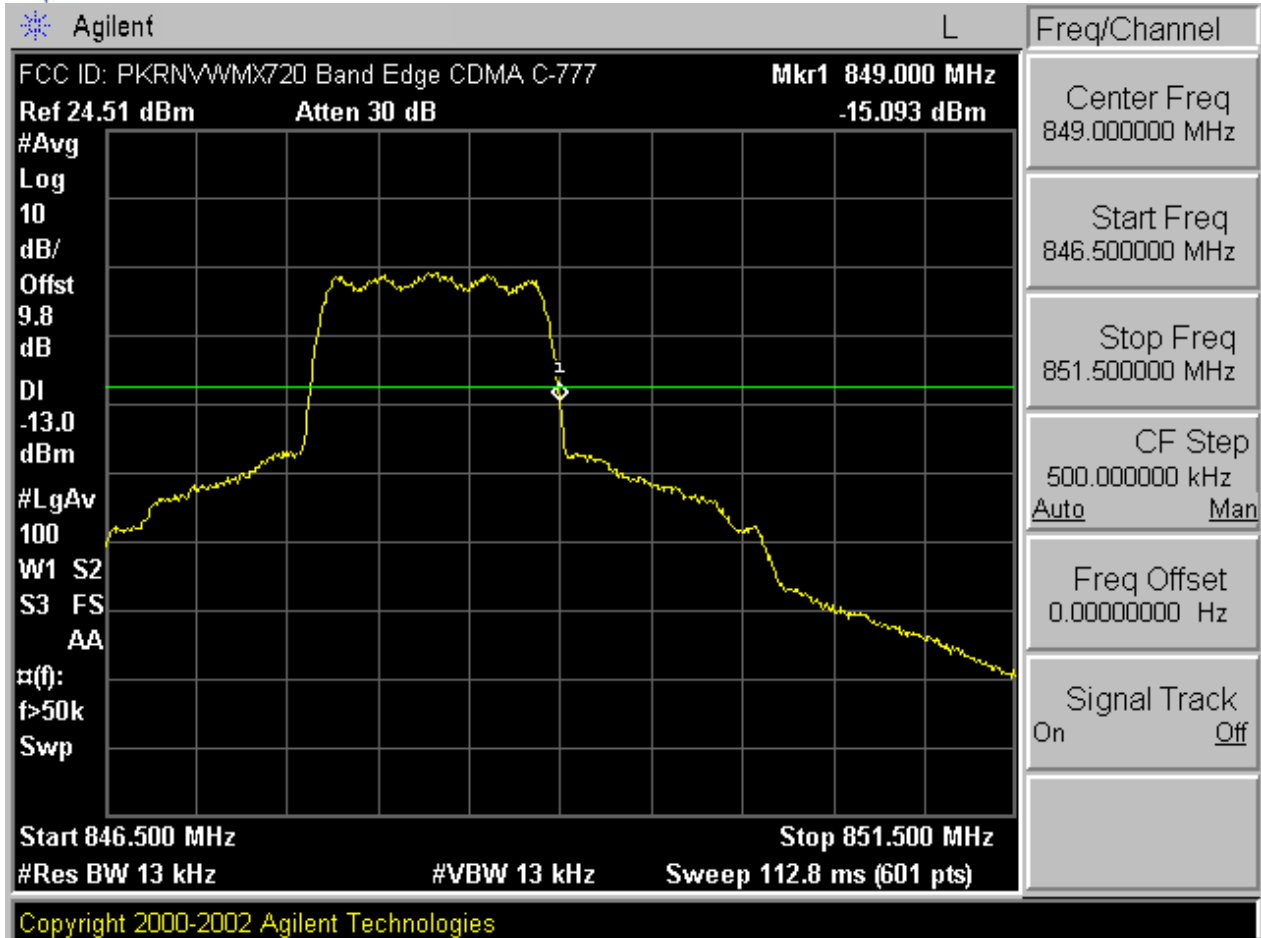FCC ID: PKRNWVMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 32 of 50






Plot 7-10. Band Edge Plot (Cellular CDMA Mode – Ch. 777)

FCC ID: PKRNWVMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 33 of 50






Plot 7-11. 4MHz Span Plot (Cellular CDMA Mode – Ch. 777)

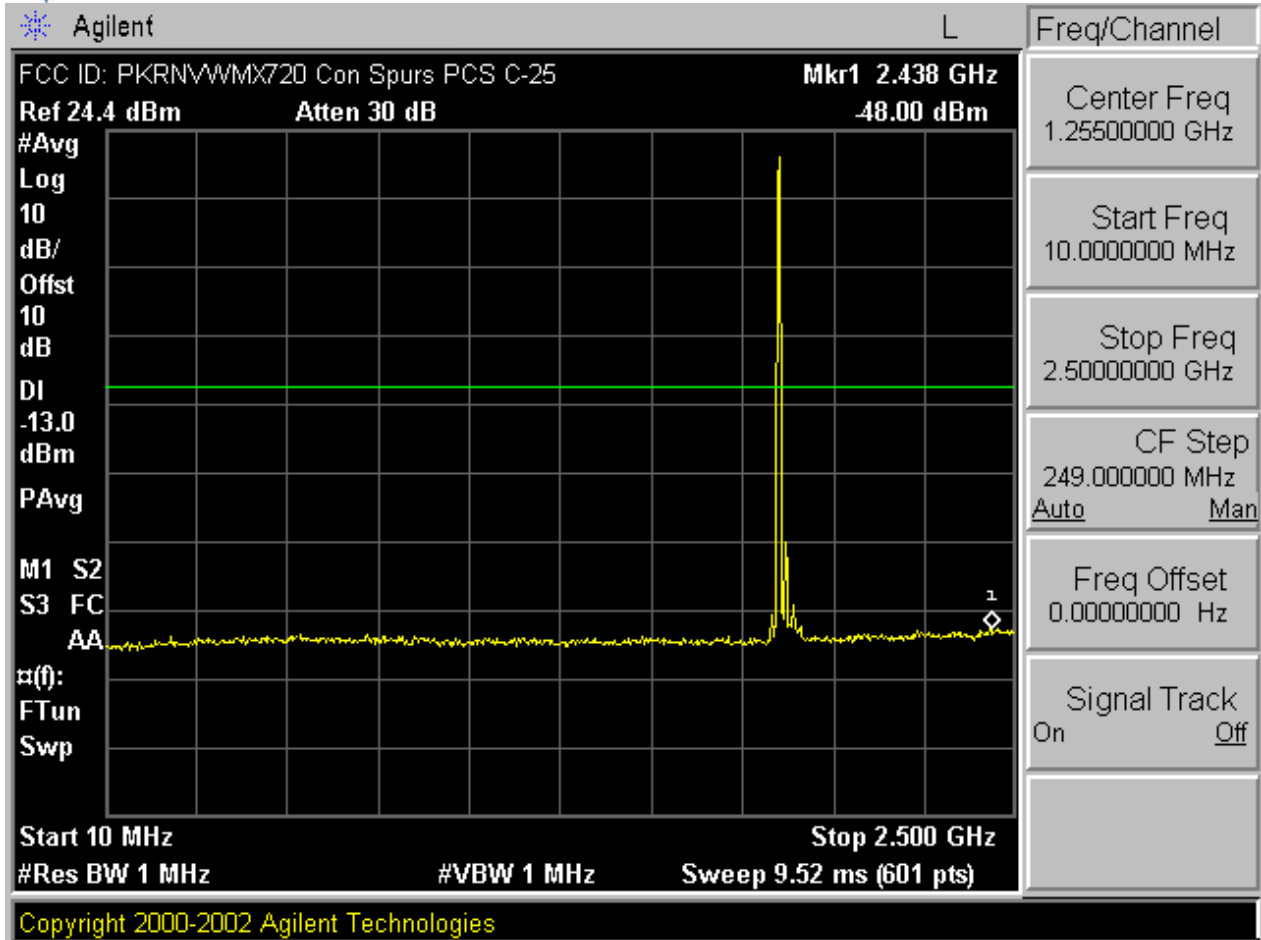FCC ID: PKRNWVMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 34 of 50






Plot 7-12. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)

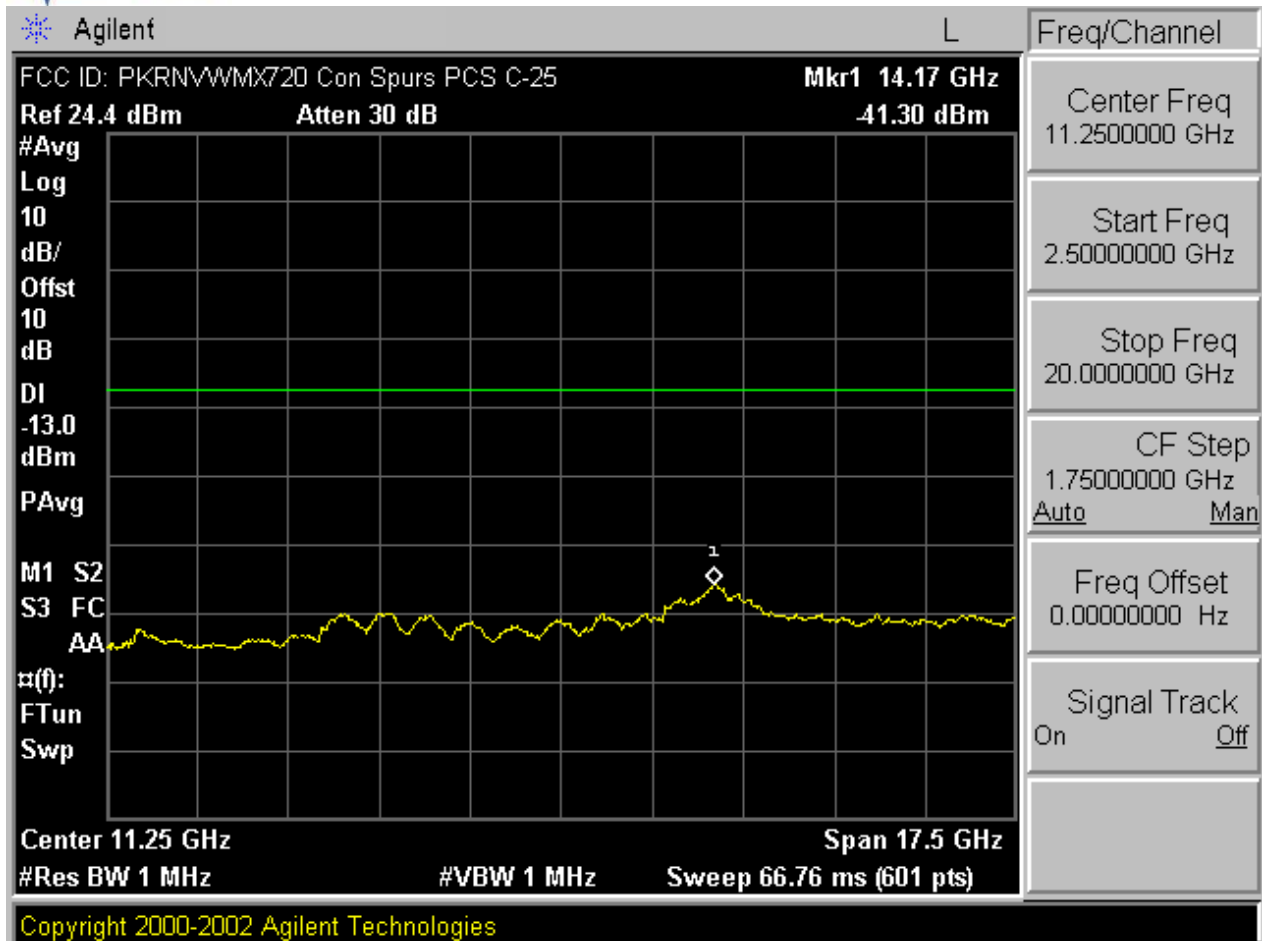FCC ID: PKRNWVMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 35 of 50




Plot 7-13. Conducted Spurious Plot (PCS CDMA Mode – Ch. 25)

FCC ID: PKRNWVMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 36 of 50

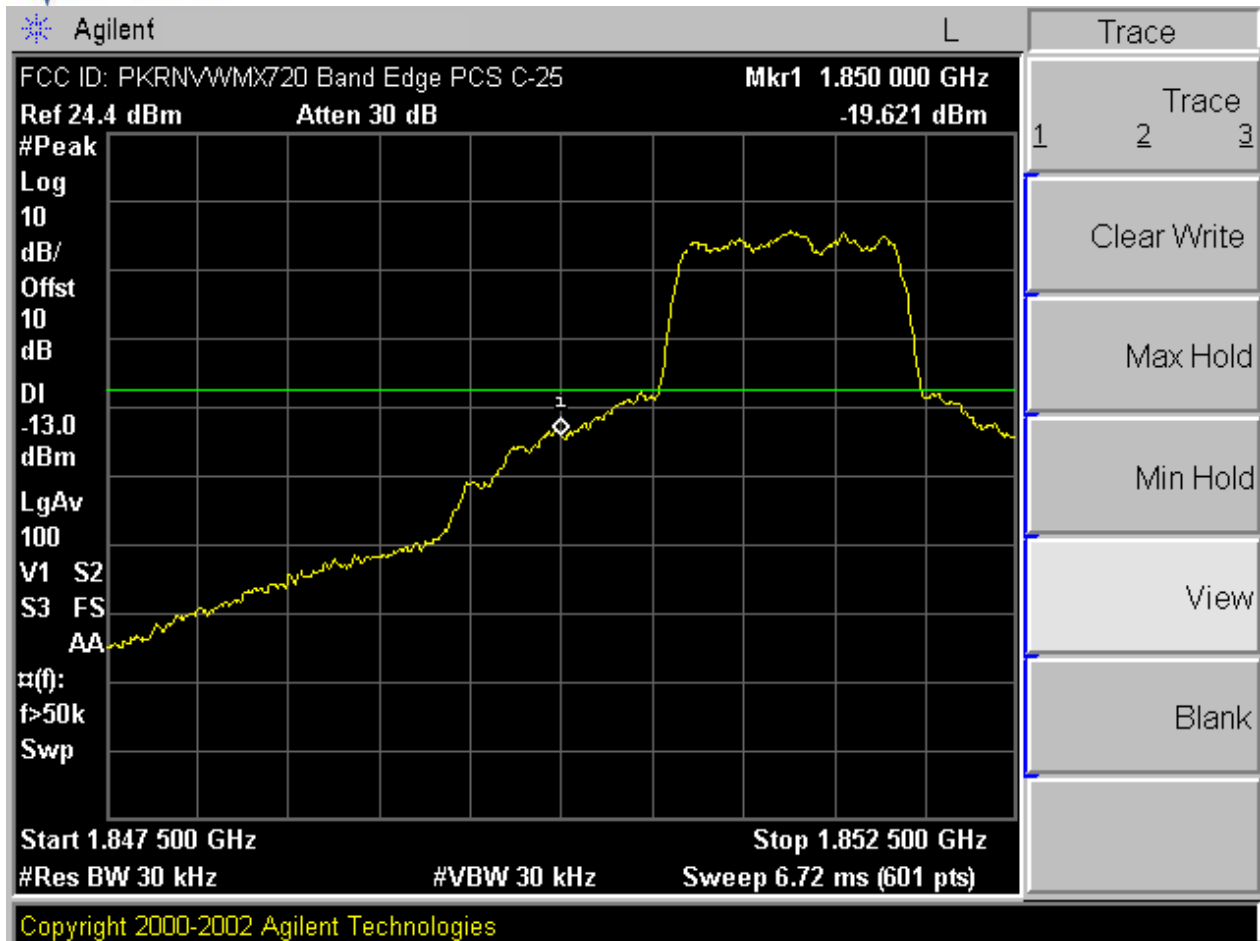




Plot 7-14. Band Edge Plot (PCS CDMA Mode – Ch. 25)

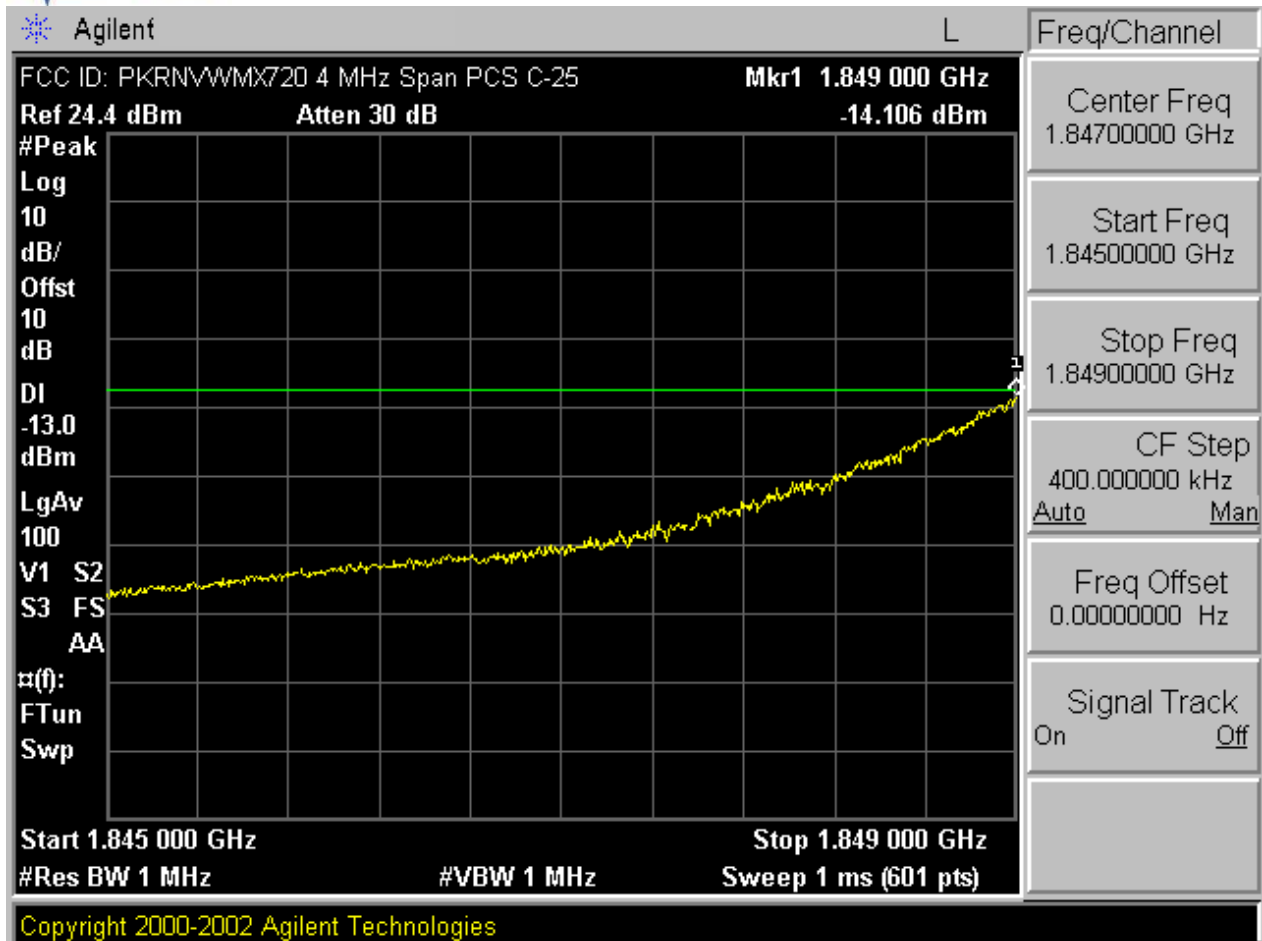FCC ID: PKRNWVMX720	PCTEST wireless	FCC Pt. 22/24 MEASUREMENT REPORT	NOVATEL WIRELESS	Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 37 of 50






Plot 7-15. 4MHz Span Plot (PCS CDMA Mode – Ch. 25)

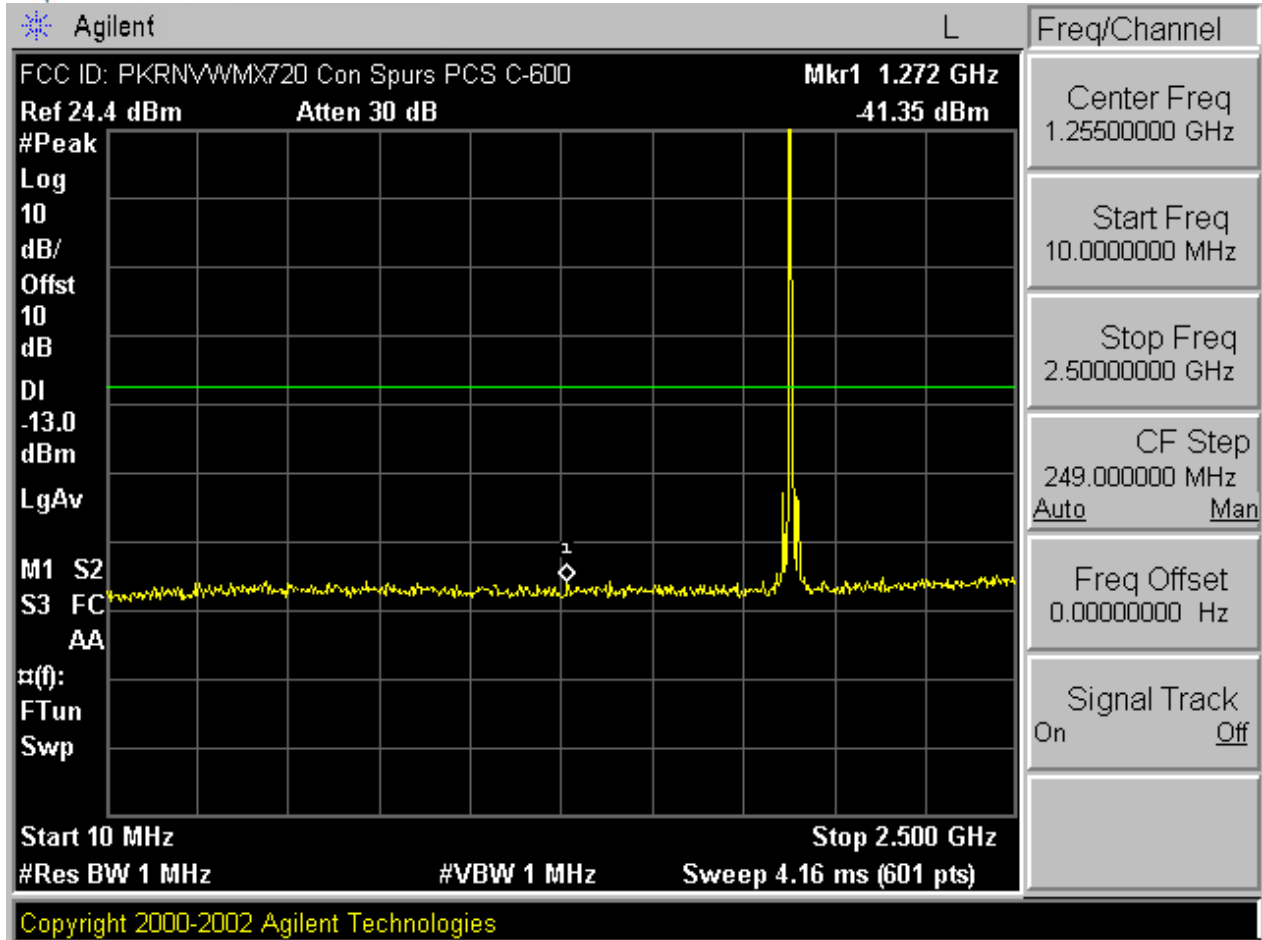FCC ID: PKRNWVMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 38 of 50






Plot 7-16. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)

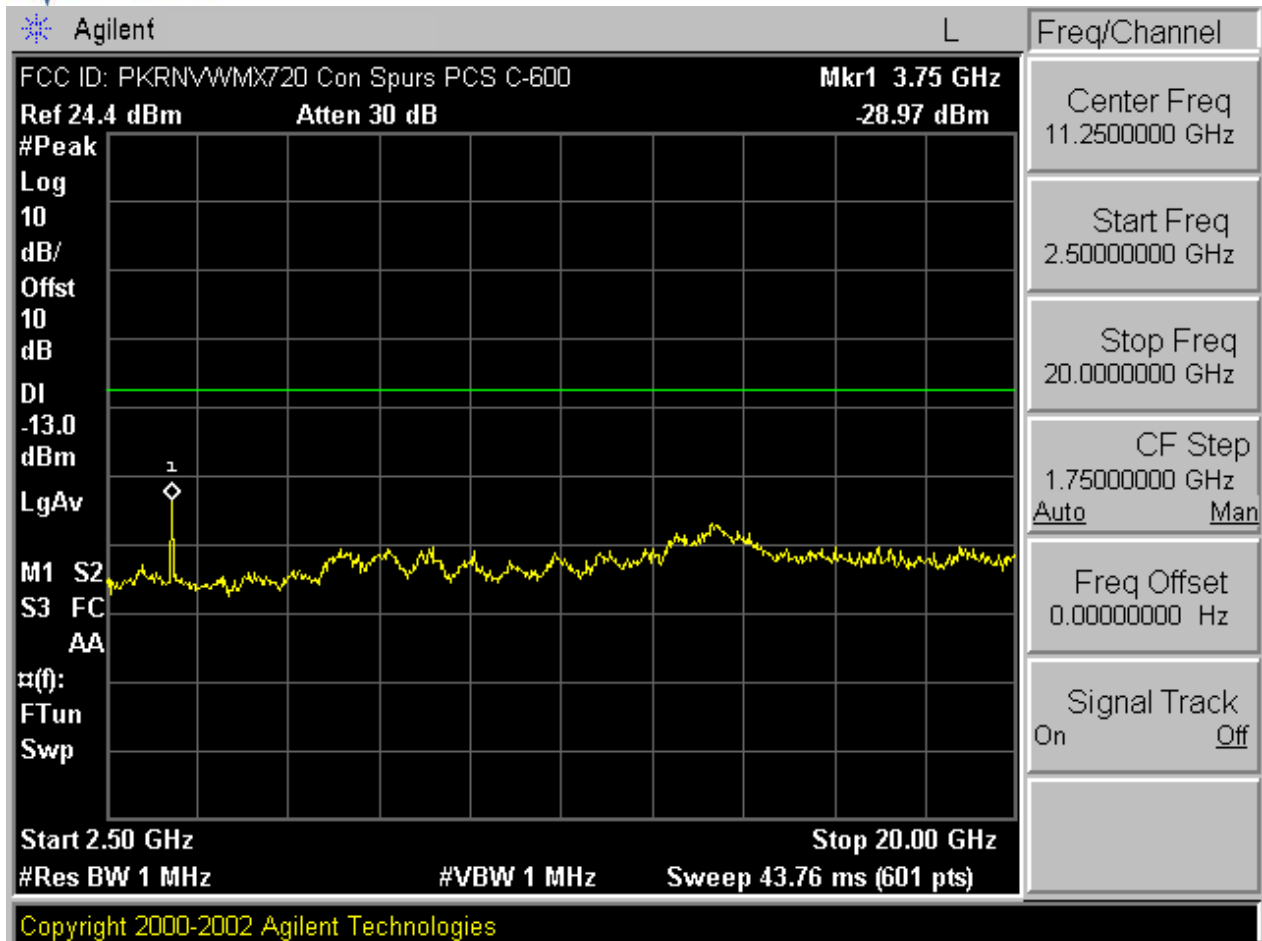FCC ID: PKRNWVMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 39 of 50




Plot 7-17. Conducted Spurious Plot (PCS CDMA Mode – Ch. 600)

FCC ID: PKRNWVMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 40 of 50

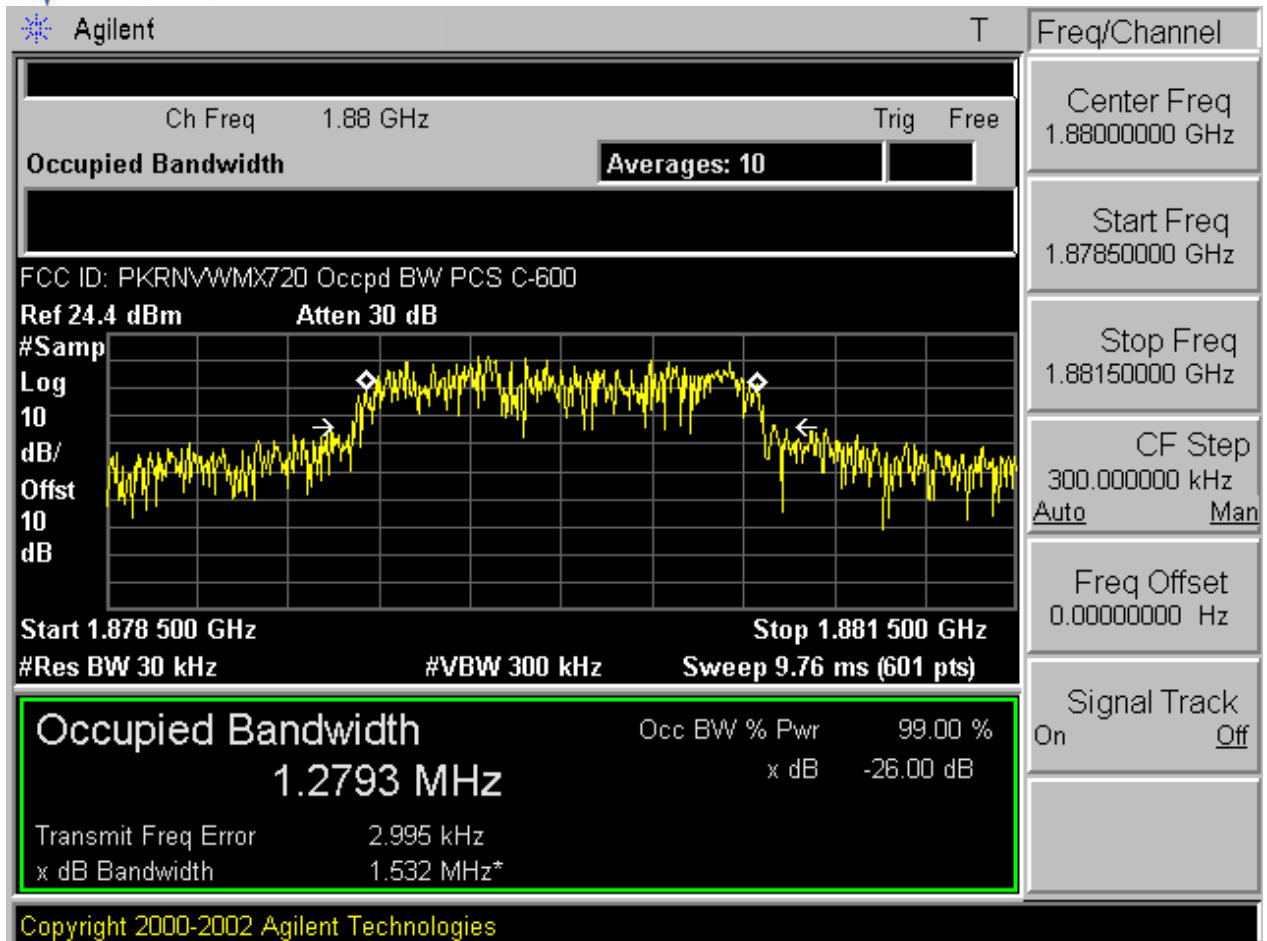


Plot 7-18. Occupied Bandwidth Plot (PCS CDMA Mode – Ch. 600)

FCC ID: PKRNVWMX720	PCTEST wireless	FCC Pt. 22/24 MEASUREMENT REPORT	NOVATEL WIRELESS	Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 41 of 50

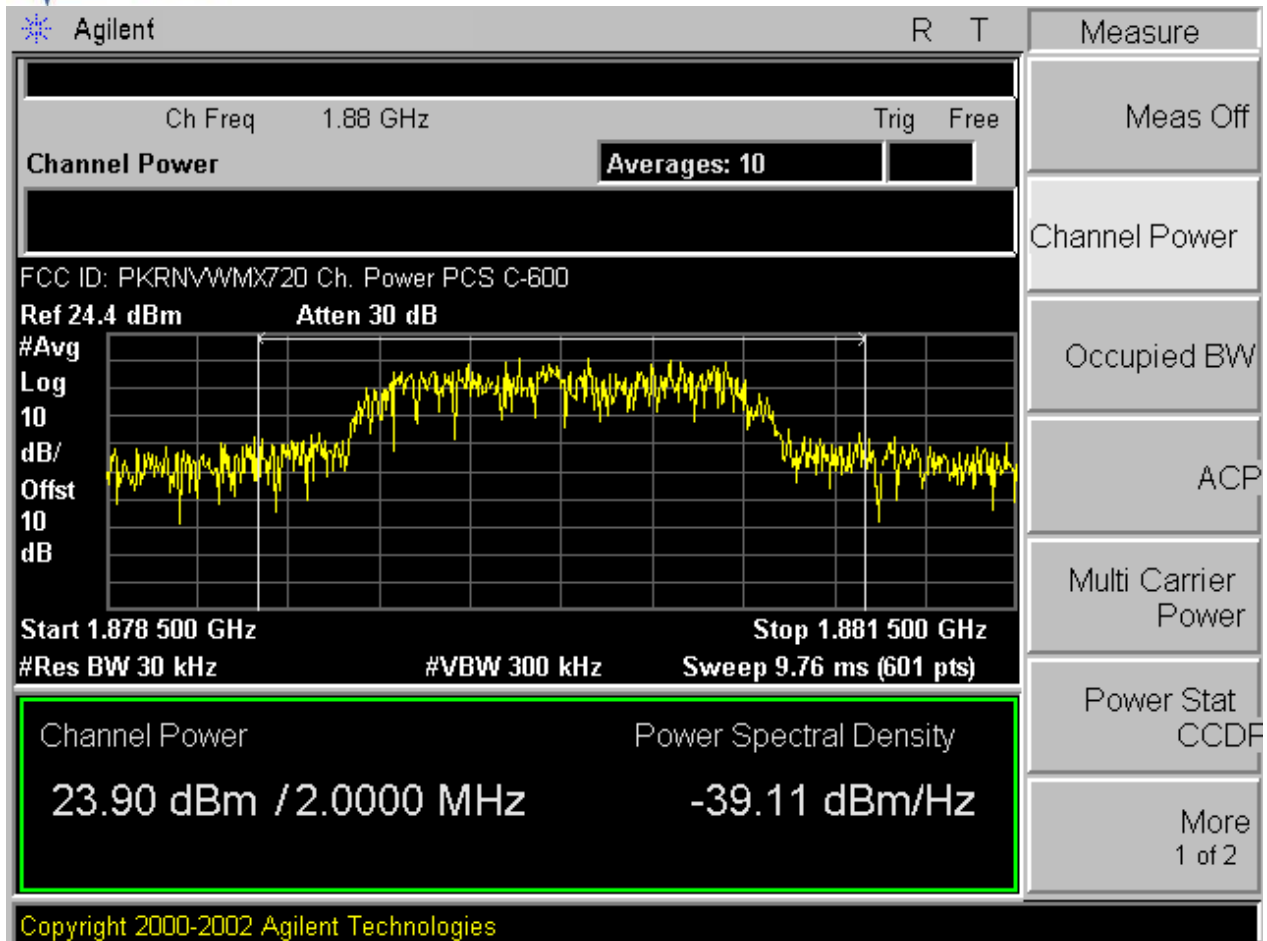




Plot 7-18. Channel Power Plot (PCS CDMA Mode – Ch. 600)

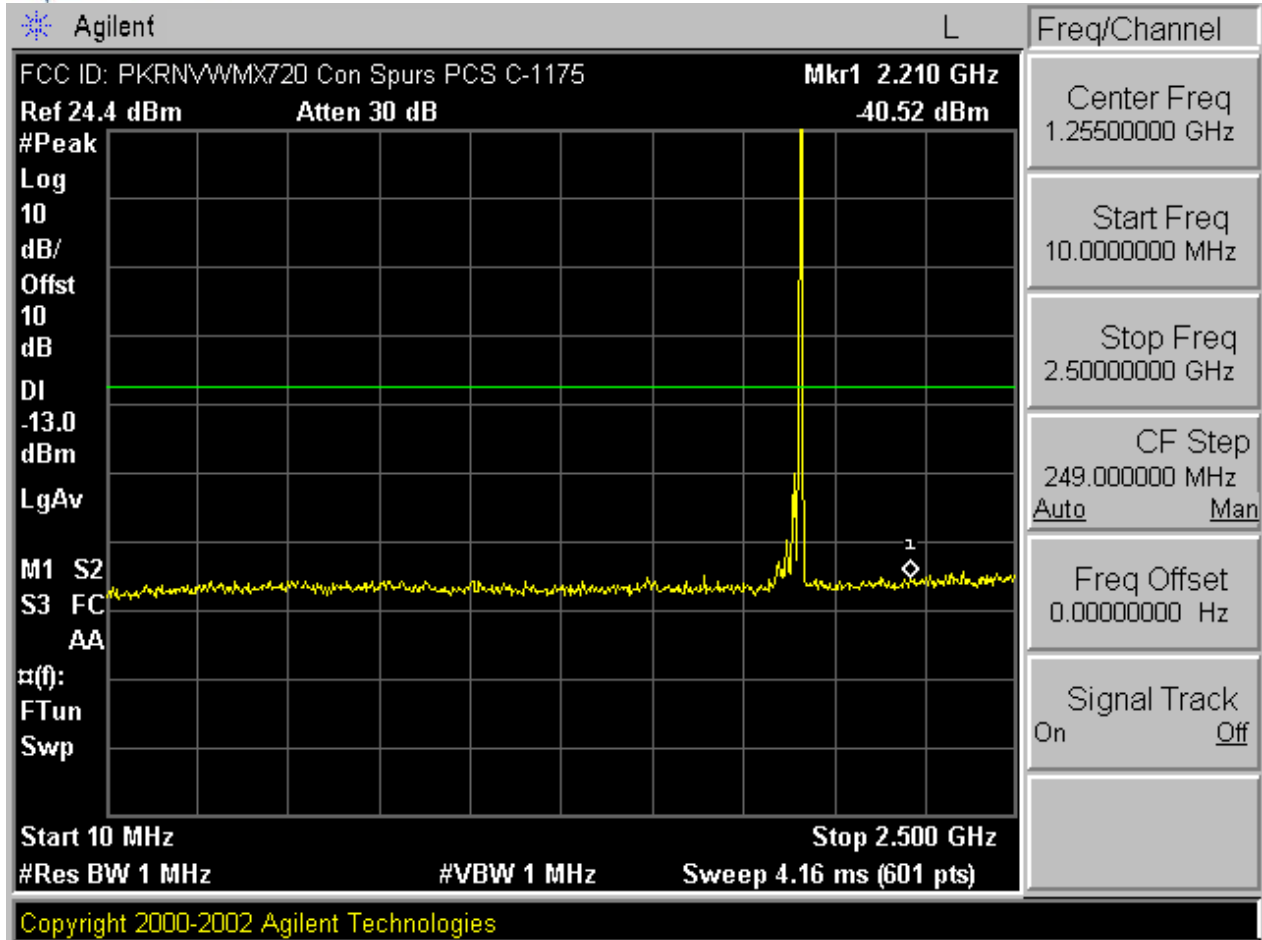FCC ID: PKRNVWMX720	PCTEST wireless	FCC Pt. 22/24 MEASUREMENT REPORT	NOVATEL WIRELESS	Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 42 of 50






Plot 7-19. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)

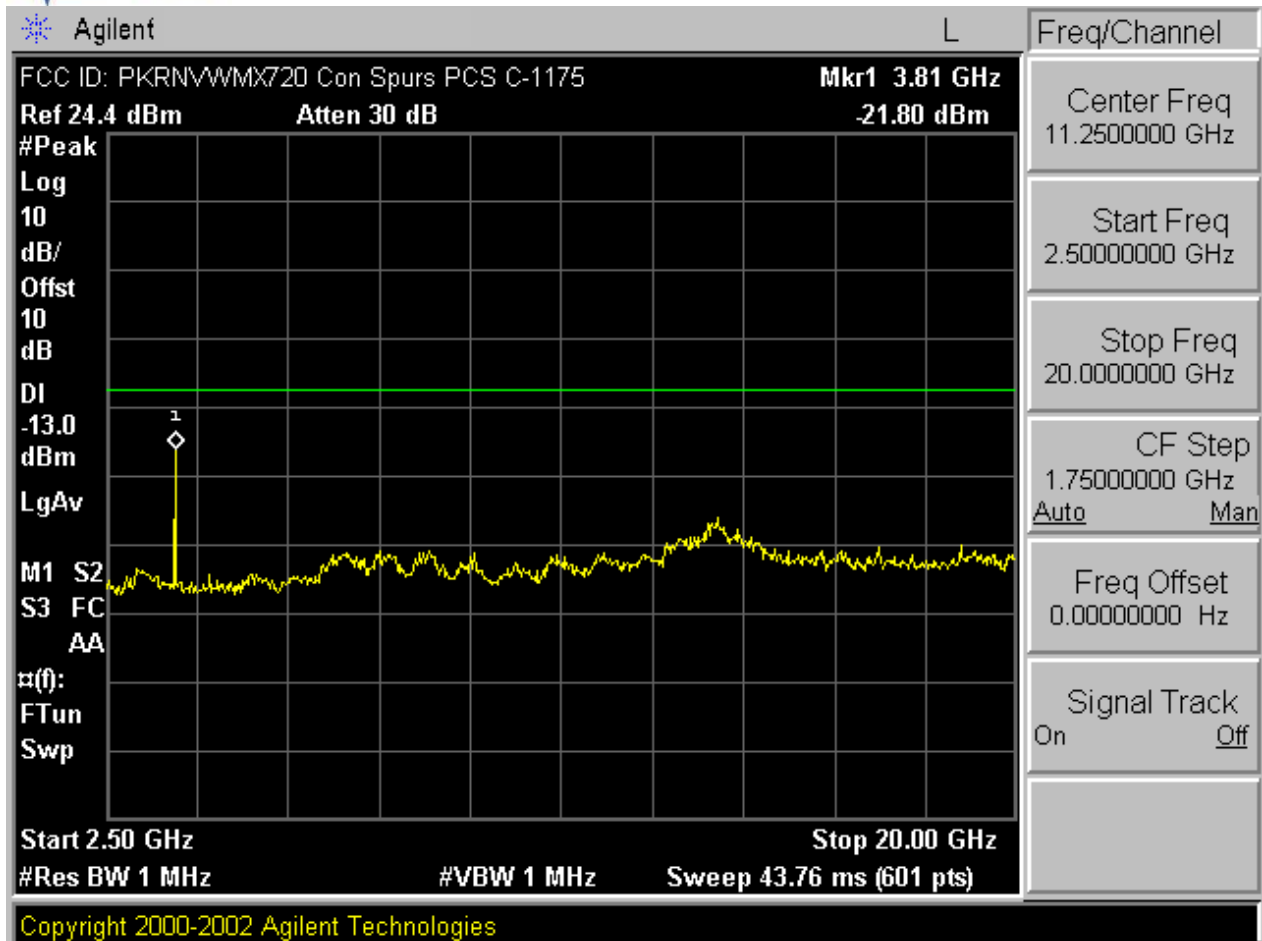FCC ID: PKRNWVMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 43 of 50




Plot 7-20. Conducted Spurious Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: PKRNWVMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 44 of 50

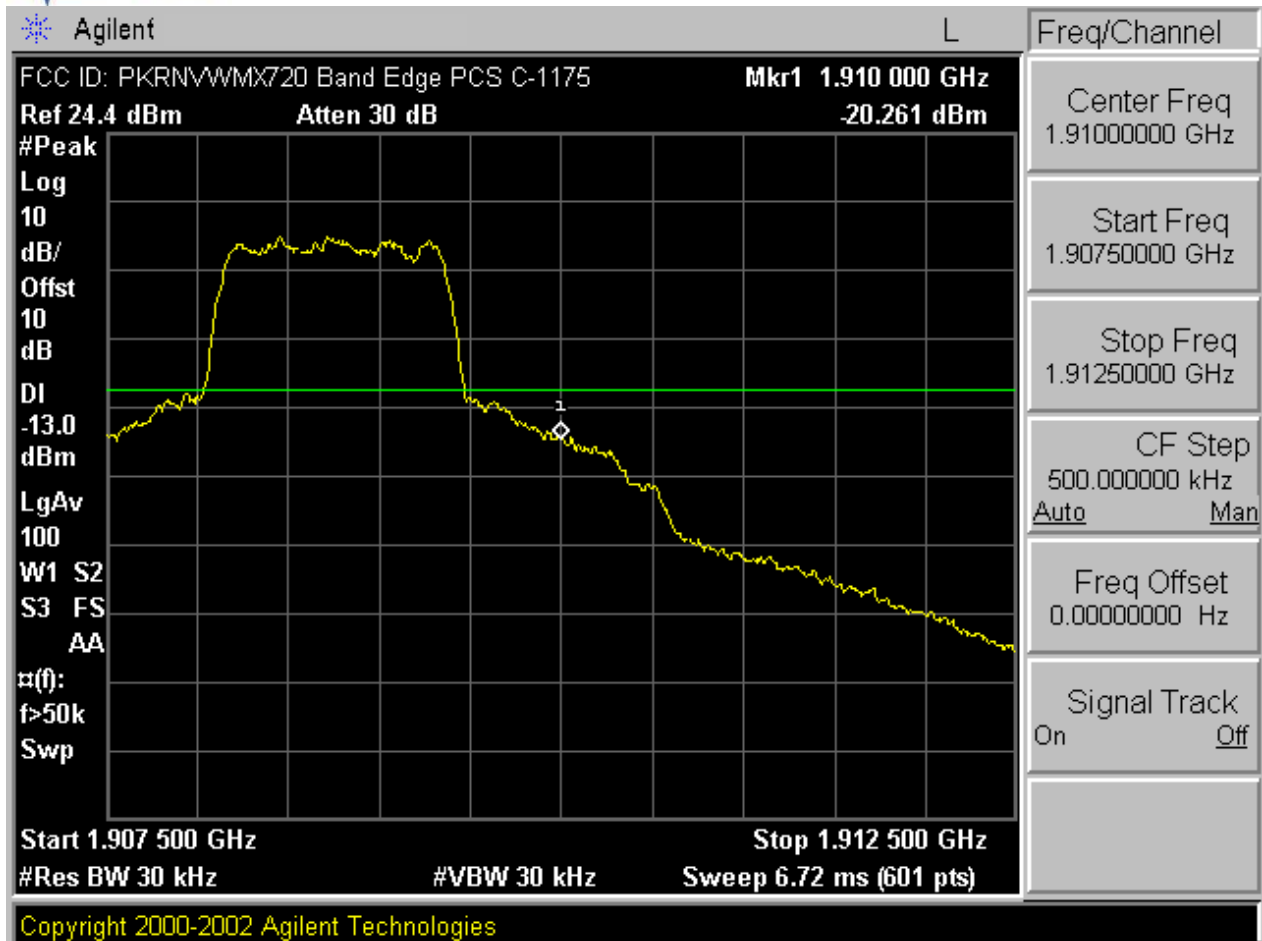



Plot 7-21. Band Edge Plot (PCS CDMA Mode – Ch. 1175)

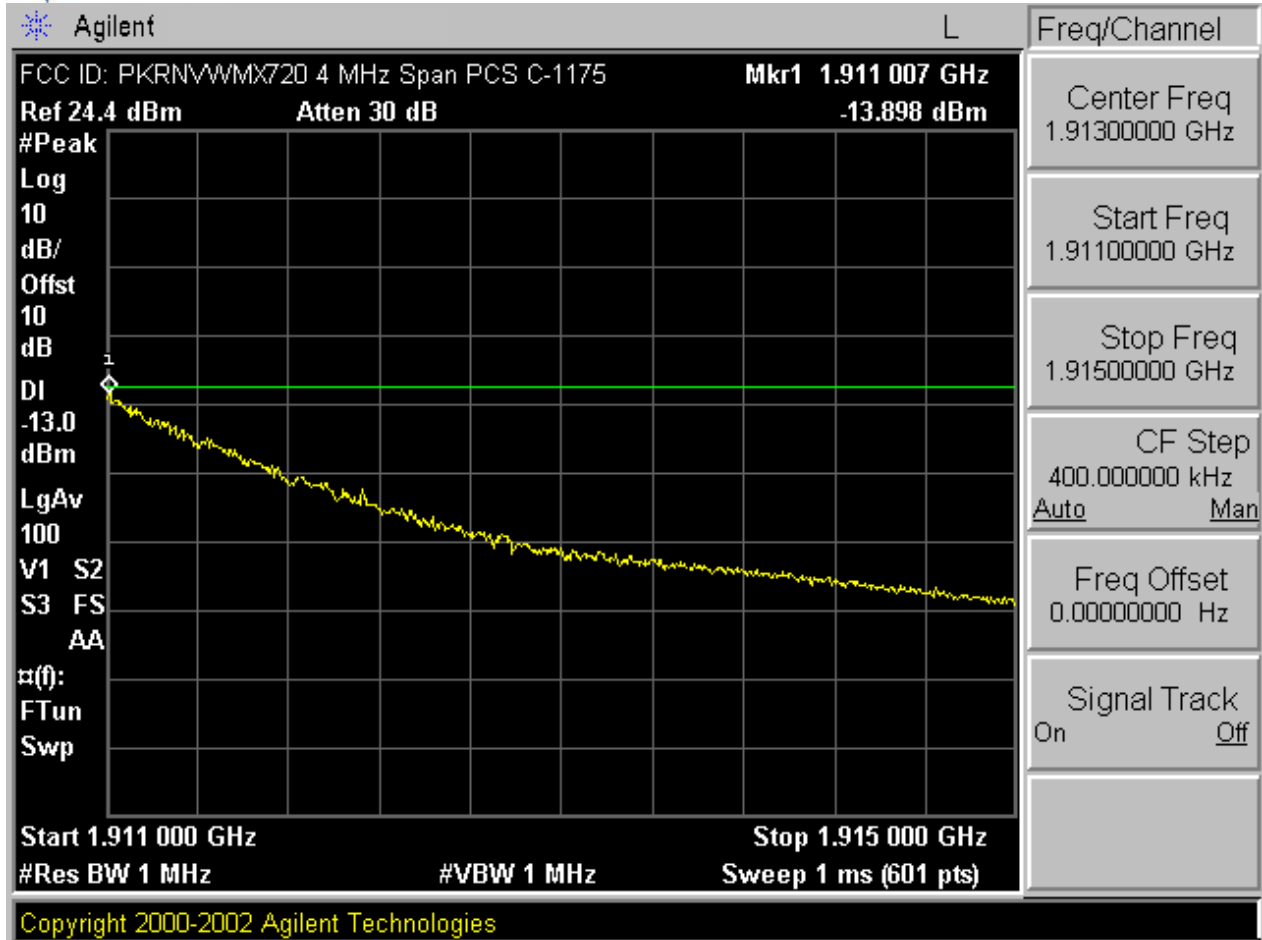FCC ID: PKRNWVMX720	PCTEST	FCC Pt. 22/24 MEASUREMENT REPORT	NOVATEL WIRELESS	Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 45 of 50



Plot 7-22. 4MHz Span Plot (PCS CDMA Mode – Ch. 1175)

FCC ID: PKRNWVMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 46 of 50

8.0 CONCLUSION

The data collected shows that the **Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A) FCC ID: PKRNVWMX720** complies with all the requirements of Parts 2, 22, and 24 of the FCC rules.



FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 47 of 50

EXHIBIT A – TEST SETUP PHOTOGRAPHS



FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 48 of 50

EXHIBIT B – INTERNAL PHOTOGRAPHS





FCC ID: PKRNVWMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 49 of 50

EXHIBIT C – EXTERNAL PHOTOGRAPHS

FCC ID: PKRNVVMX720		FCC Pt. 22/24 MEASUREMENT REPORT		Reviewed by: Quality Manager
Test Report S/N: 0611130998	Test Dates: Dec. 12 – 13, 2006	EUT Type: Dual-Band CDMA/ EvDO Modem Card (Rev. 0 & Rev. A)		Page 50 of 50