



# FCC TEST REPORT

**REPORT NO.:** RF911220R02

**MODEL NO.:** WAP54G

**RECEIVED:** Dec. 20, 2002

**TESTED:** Dec. 24, 2002 ~ Feb. 18, 2003

**APPLICANT:** The Linksys Group, Inc.

**ADDRESS:** 17401 Armstrong Ave., Irvine, CA 92614

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** 47 14th Lin, Chiapau Tsun, Linko, Taipei,  
Taiwan, R.O.C.

This test report consists of 64 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528  
ILAC MRA



Lab Code: 200102-0



## Table of Contents

1	CERTIFICATION .....	4
2	SUMMARY OF TEST RESULTS .....	5
3	GENERAL INFORMATION .....	6
3.1	GENERAL DESCRIPTION OF EUT .....	6
3.2	DESCRIPTION OF TEST MODES .....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS .....	7
3.4	DESCRIPTION OF SUPPORT UNITS .....	8
4	TEST TYPES AND RESULTS .....	9
4.1	CONDUCTED EMISSION MEASUREMENT .....	9
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	9
4.1.2	TEST INSTRUMENTS .....	9
4.1.3	TEST PROCEDURES .....	10
4.1.4	DEVIATION FROM TEST STANDARD .....	10
4.1.5	TEST SETUP .....	11
4.1.6	EUT OPERATING CONDITIONS .....	11
4.1.7	TEST RESULT .....	12
4.2	RADIATED EMISSION MEASUREMENT .....	18
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT .....	18
4.2.2	TEST INSTRUMENTS .....	19
4.2.3	TEST PROCEDURES .....	20
4.2.4	DEVIATION FROM TEST STANDARD .....	20
4.2.5	TEST SETUP .....	21
4.2.6	EUT OPERATING CONDITIONS .....	21
4.2.7	TEST RESULT (A) .....	22
4.2.8	TEST RESULT (B) .....	24
4.2.9	TEST RESULT .....	26
4.3	6dB BANDWIDTH MEASUREMENT .....	32
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	32
4.3.2	TEST INSTRUMENTS .....	32
4.3.3	TEST PROCEDURE .....	33
4.3.4	DEVIATION FROM TEST STANDARD .....	33
4.3.5	TEST SETUP .....	33
4.3.6	EUT OPERATING CONDITIONS .....	33
4.3.7	TEST RESULT .....	34
4.4	MAXIMUM PEAK OUTPUT POWER .....	42
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....	42
4.4.2	TEST INSTRUMENTS .....	42
4.4.3	TEST PROCEDURES .....	43
4.4.4	DEVIATION FROM TEST STANDARD .....	43
4.4.5	TEST SETUP .....	43
4.4.6	EUT OPERATING CONDITIONS .....	43
4.4.7	TEST RESULT .....	44



4.5	POWER SPECTRAL DENSITY MEASUREMENT .....	45
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	45
4.5.2	TEST INSTRUMENTS .....	45
4.5.3	TEST PROCEDURE .....	46
4.5.4	DEVIATION FROM TEST STANDARD .....	46
4.5.5	TEST SETUP .....	46
4.5.6	EUT OPERATING CONDITIONS .....	46
4.5.7	TEST RESULT .....	47
4.6	BAND EDGES MEASUREMENT .....	55
4.6.1	LIMITS OF BAND EDGES MEASUREMENT .....	55
4.6.2	TEST INSTRUMENTS .....	55
4.6.3	TEST PROCEDURE .....	55
4.6.4	DEVIATION FROM TEST STANDARD .....	55
4.6.5	EUT OPERATING CONDITION .....	56
4.6.6	TEST RESULT .....	56
4.7	ANTENNA REQUIREMENT .....	61
4.7.1	STANDARD APPLICABLE .....	61
4.7.2	ANTENNA CONNECTED CONSTRUCTION .....	61
5	PHOTOGRAPHS OF THE TEST CONFIGURATION .....	62
6	INFORMATION ON THE TESTING LABORATORIES .....	64



# 1 CERTIFICATION

**PRODUCT :** Wireless-G Access Point  
**MODEL NO. :** WAP54G  
**BRAND NAME :** Linksys  
**APPLICANT :** The Linksys Group, Inc.  
**STANDARDS :** 47 CFR Part 15, Subpart C (Section 15.247),  
ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Dec. 24, 2002 ~ Feb. 18, 2003, The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

**CHECKED BY :** Emily Lu **DATE :** Feb. 20, 2003  
Emily Lu

**APPROVED BY :** Dr. Alan Lane for **DATE :** Feb. 20, 2003  
Dr. Alan Lane, Manager



## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

<b>APPLIED STANDARD: 47 CFR Part 15, Subpart C</b>			
<b>Standard Section</b>	<b>Test Type and Limit</b>	<b>Result</b>	<b>REMARK</b>
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -12.11dBuV at 0.171MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -2.50dBuV at 624.02MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Wireless-G Access Point
<b>MODEL NO.</b>	WAP54G
<b>POWER SUPPLY</b>	5VDC from power adapter
<b>MODULATION TYPE</b>	DBPSK, DQPSK, CCK, OFDM
<b>TRANSFER RATE</b>	up to 54Mbps
<b>FREQUENCY RANGE</b>	2412MHz ~ 2462MHz
<b>NUMBER OF CHANNEL</b>	11
<b>OUTPUT POWER</b>	18.57dBm
<b>ANTENNA TYPE</b>	Dipole Antenna
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	RJ45
<b>ASSOCIATED DEVICES</b>	NA

**NOTE:**

1. The EUT is powered by the following adapter:

<b>BRAND:</b>	Linksys
<b>MODEL NO.:</b>	MS15-050250-A1D
<b>INPUT:</b>	100-240Vac 50/60Hz
<b>OUTPUT:</b>	DC 5.0V 2.5A

2. Two sizes of PC board were provided to this EUT due to the difference of its layout.
3. Fully compatible with the 802.11g standard to provide a wireless data rate of up to 54Mbps.
4. Backwards compatible with the 802.11b standard to provide a wireless data rate of up to 11Mbps.
5. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.



### 3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

**NOTE:**

1. Below 1GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1GHz, the channel 1, 6, and 11 were tested individually.
3. Transfer rate, 11Mbps with CCK technique and 54Mbps with OFDM technique, the worst case, were chosen for final test.
4. For radiated emission measurement below 1GHz, test result A was for the PC board with big size and test result B was for the small board. And the small board, the worst case, was chosen for the rest of final test.

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Wireless-G Access Point. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 15, Subpart C. (15.247)**

**ANSI C63.4 : 1992**

All tests have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP01L	TW-09C748-12800-19O-B220	FCC DoC APPROVED
2	LAN CARD	ACCTON	EN1207F-TX/WOL	T012906742	FCC DoC APPROVED

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core

**NOTE:** All power cords of the above support units are non shielded (1.8m).





## 4 TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 03, 2003
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH3-Z5	839135/006	July 02, 2003
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Nov. 29, 2003
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/016	Nov. 29, 2003
EMCO-L.I.S.N. (for peripheral)	3825/2	9204-1964	July 02, 2003
Software	Cond-V2M1	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C02.01	July 5, 2003
HP Terminator (For EMCO LISN)	11593A	E1-01-298	Feb. 20, 2003
HP Terminator (For EMCO LISN)	11593A	E1-01-299	Feb. 20, 2003

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. “\*”: These equipment are used for conducted telecom port test only (if tested).
  3. The test was performed in ADT Shielded Room No. 2.
  4. The VCCI Site Registration No. is C-240.




#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

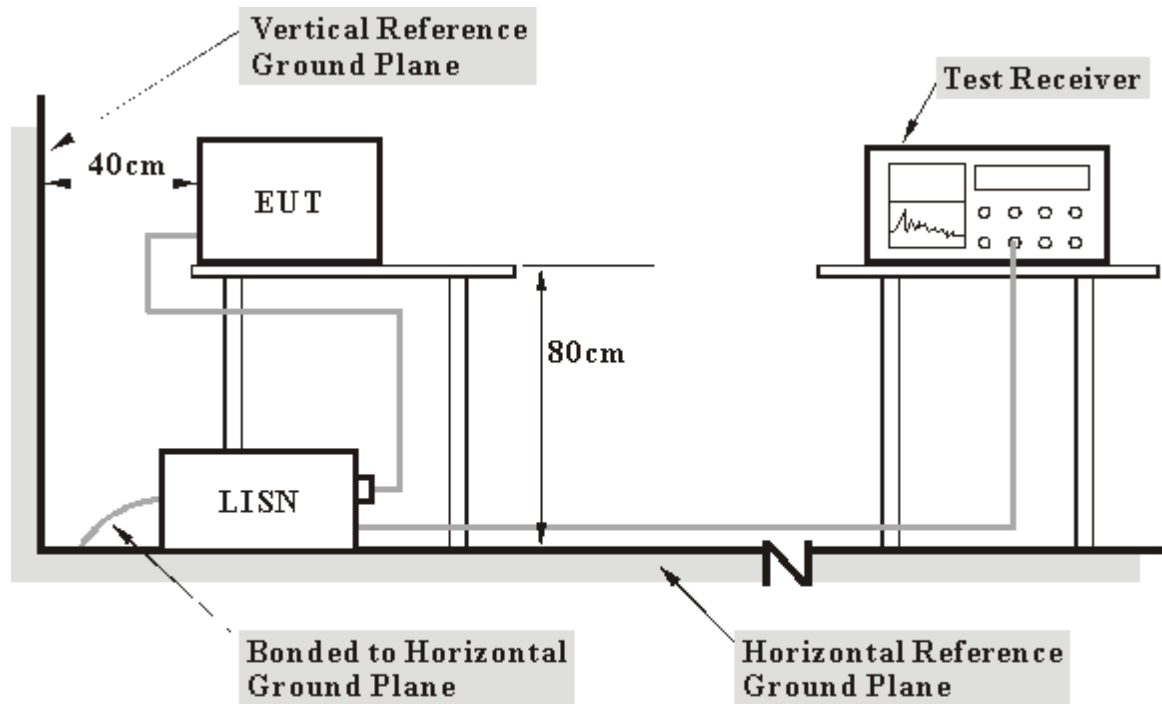

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared another computer system to act as a communication partner and placed it outside of testing area.
- c. The communication partner run a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency via an RJ 45 cable.
- d. The communication partner sent data to EUT by command "PIN".




4.1.7 TEST RESULT

<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
<b>MODE</b>	Channel 1	<b>6dB BANDWIDTH</b>	10kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 61%RH, 1005hPa	<b>TESTED BY:</b> Cody Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.205	0.10	49.54	-	49.64	-	63.41	53.41	-13.77	-
2	0.309	0.10	45.53	-	45.63	-	60.00	50.00	-14.37	-
3	0.519	0.10	41.94	-	42.04	-	56.00	46.00	-13.96	-
4	0.726	0.10	41.09	-	41.19	-	56.00	46.00	-14.81	-
5	0.846	0.10	39.67	-	39.77	-	56.00	46.00	-16.23	-
6	2.106	0.11	41.93	-	42.04	-	56.00	46.00	-13.96	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

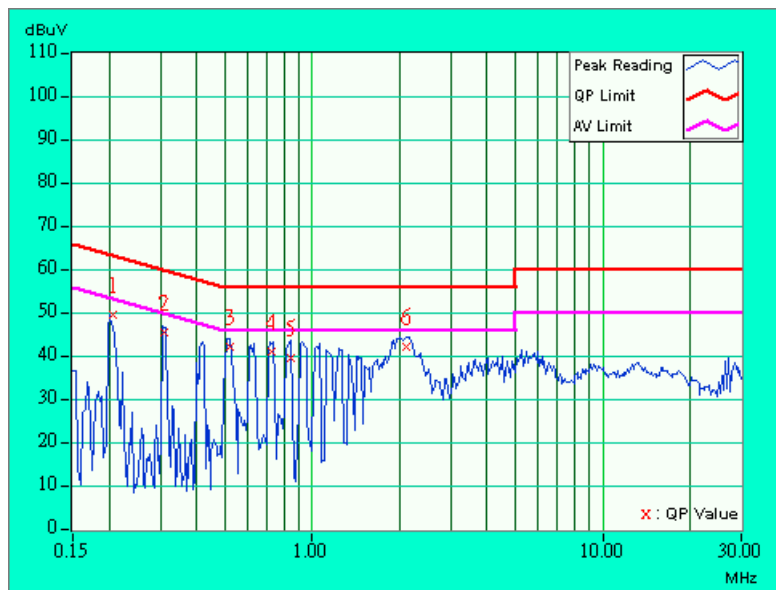




<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
<b>MODE</b>	Channel 1	<b>6dB BANDWIDTH</b>	10kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 61%RH, 1005hPa	<b>TESTED BY:</b> Cody Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.210	0.10	47.21	-	47.31	-	63.22	53.22	-15.91	-
2	0.423	0.10	40.62	-	40.72	-	57.39	47.39	-16.67	-
3	0.744	0.10	39.54	-	39.64	-	56.00	46.00	-16.36	-
4	1.161	0.10	38.98	-	39.08	-	56.00	46.00	-16.92	-
5	1.968	0.10	42.81	-	42.91	-	56.00	46.00	-13.09	-
6	4.986	0.32	33.40	-	33.72	-	56.00	46.00	-22.28	-

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

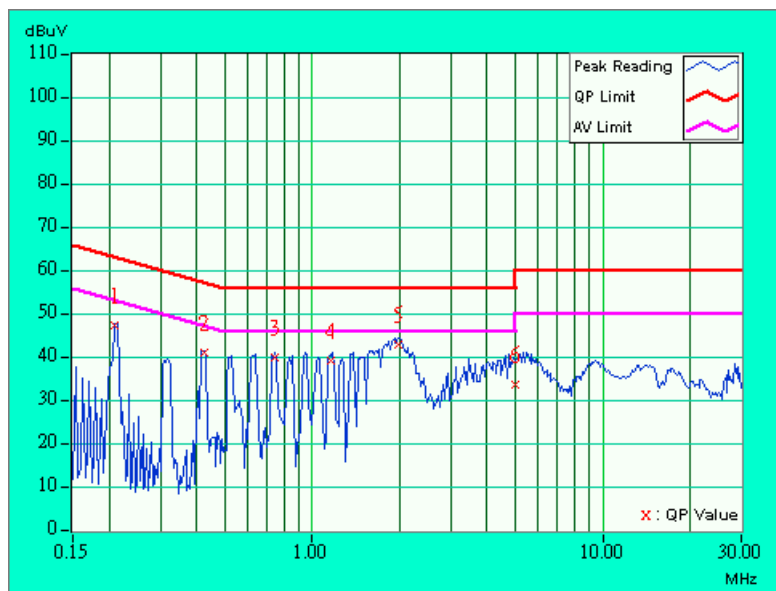




<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
<b>MODE</b>	Channel 6	<b>6dB BANDWIDTH</b>	10kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 61%RH, 1005hPa	<b>TESTED BY:</b> Cody Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.207	0.10	48.56	-	48.66	-	63.32	53.32	-14.66	-
2	0.309	0.10	45.18	-	45.28	-	60.00	50.00	-14.72	-
3	0.504	0.10	42.58	-	42.68	-	56.00	46.00	-13.32	-
4	0.714	0.10	42.25	-	42.35	-	56.00	46.00	-13.65	-
5	0.828	0.10	40.70	-	40.80	-	56.00	46.00	-15.20	-
6	1.992	0.10	41.26	-	41.36	-	56.00	46.00	-14.64	-

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

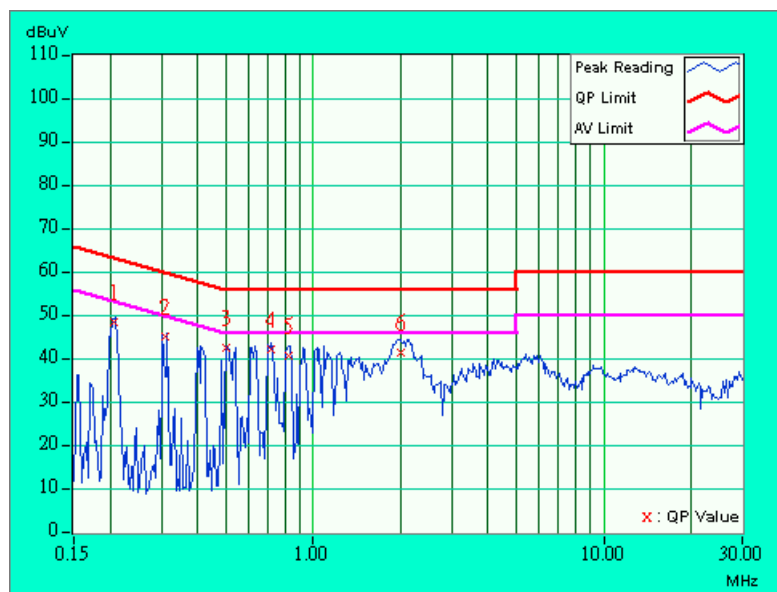




<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
<b>MODE</b>	Channel 6	<b>6dB BANDWIDTH</b>	10kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 61%RH, 1005hPa	<b>TESTED BY:</b> Cody Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.204	0.10	46.89	-	46.99	-	63.45	53.45	-16.46	-
2	0.409	0.10	40.38	-	40.48	-	57.67	47.67	-17.19	-
3	0.615	0.10	39.70	-	39.80	-	56.00	46.00	-16.20	-
4	0.921	0.10	39.53	-	39.63	-	56.00	46.00	-16.37	-
5	1.329	0.10	38.42	-	38.52	-	56.00	46.00	-17.48	-
6	1.995	0.10	39.13	-	39.23	-	56.00	46.00	-16.77	-

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

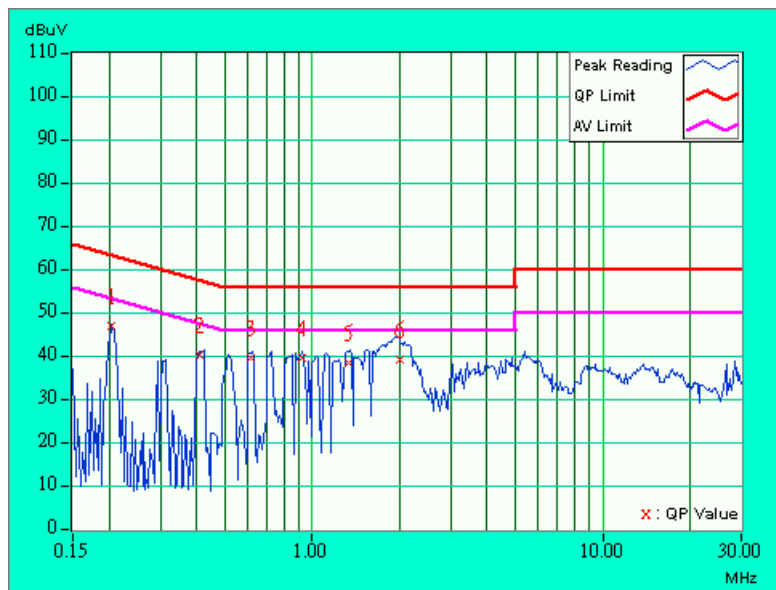




<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
<b>MODE</b>	Channel 11	<b>6dB BANDWIDTH</b>	10kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 61%RH, 1005hPa	<b>TESTED BY:</b> Cody Chang	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.204	0.10	48.74	-	48.84	-	63.45	53.45	-14.61	-
2	0.309	0.10	45.10	-	45.20	-	60.00	50.00	-14.80	-
3	0.507	0.10	42.42	-	42.52	-	56.00	46.00	-13.48	-
4	0.618	0.10	41.33	-	41.43	-	56.00	46.00	-14.57	-
5	0.720	0.10	41.33	-	41.43	-	56.00	46.00	-14.57	-
6	2.109	0.11	42.41	-	42.52	-	56.00	46.00	-13.48	-

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

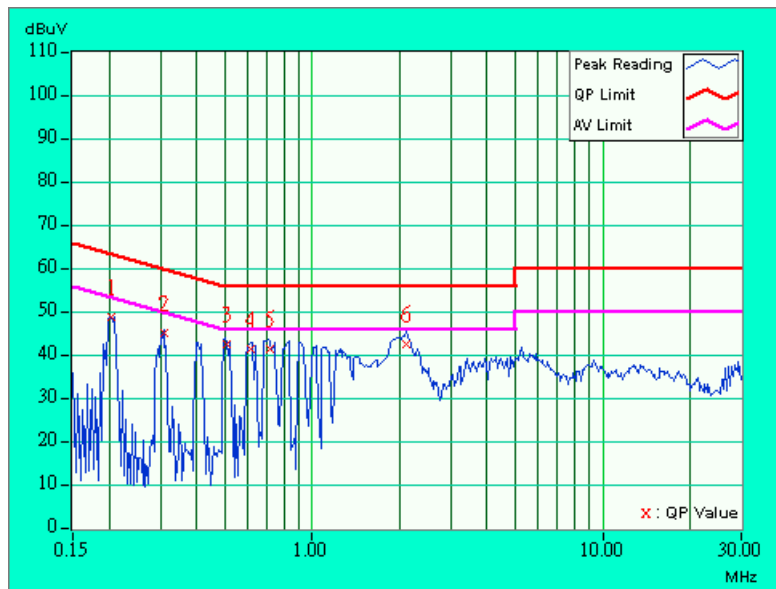






<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
<b>MODE</b>	Channel 11	<b>6dB BANDWIDTH</b>	10kHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	22deg. C, 61%RH, 1005hPa	<b>TESTED BY:</b> Cody Chang	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.202	0.10	47.17	-	47.27	-	63.51	53.51	-16.24	-
2	0.417	0.10	40.26	-	40.36	-	57.51	47.51	-17.15	-
3	0.619	0.10	39.82	-	39.92	-	56.00	46.00	-16.08	-
4	0.918	0.10	39.41	-	39.51	-	56.00	46.00	-16.49	-
5	1.347	0.10	38.60	-	38.70	-	56.00	46.00	-17.30	-
6	1.947	0.10	41.34	-	41.44	-	56.00	46.00	-14.56	-

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value.
5. Correction factor = Insertion loss + Cable loss.
6. Emission Level = Correction Factor + Reading Value.

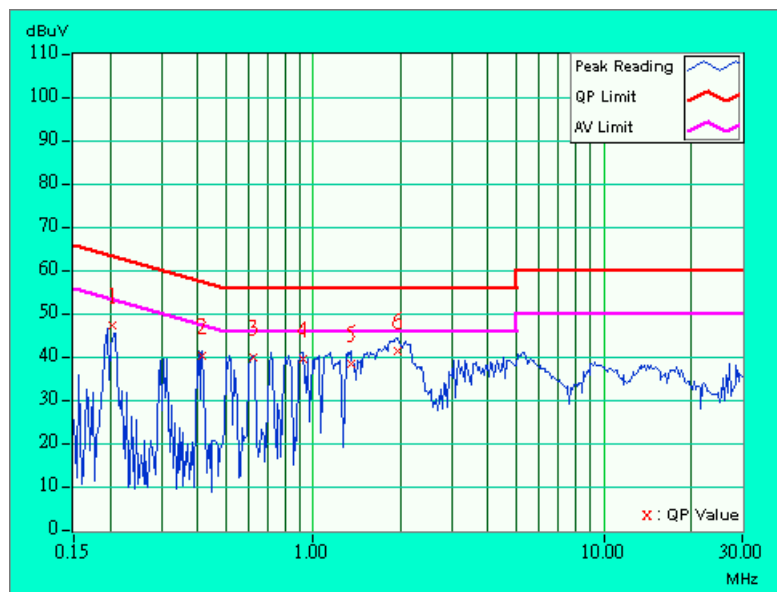



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



#### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	May 13, 2003
* HP Preamplifier	8447D	2944A08485	Apr. 29, 2003
* HP Preamplifier	8449B	3008A01201	Dec. 01, 2003
* HP Preamplifier	8449B	3008A01292	Aug. 07, 2003
Spectrum Analyzer	8593E	3926A04191	Mar. 28, 2003
Test Receiver	ESI7	838496/016	Feb. 21, 2003
SCHAFFNER Tunable Dipole Antenna	VHBA 9123	459	Nov. 22, 2003
SCHWARZBECK Tunable Dipole Antenna	UHA 9105	977	
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 02, 2003
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 03, 2003
* EMCO Horn Antenna	3115	9312-4192	Apr. 09, 2003
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	ADT_Radiated_V5.09	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Jul. 11. 2003
* TIMES RF cable	LMR-600	CABLE-ST5-01	Jul. 11. 2003

- NOTE:**
1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
  2. "\*" = These equipment are used for the final measurement.
  3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The test was performed in ADT Open Site No. 5.
  5. The VCCI Site Registration No. is R-1039.



#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.5 TEST SETUP

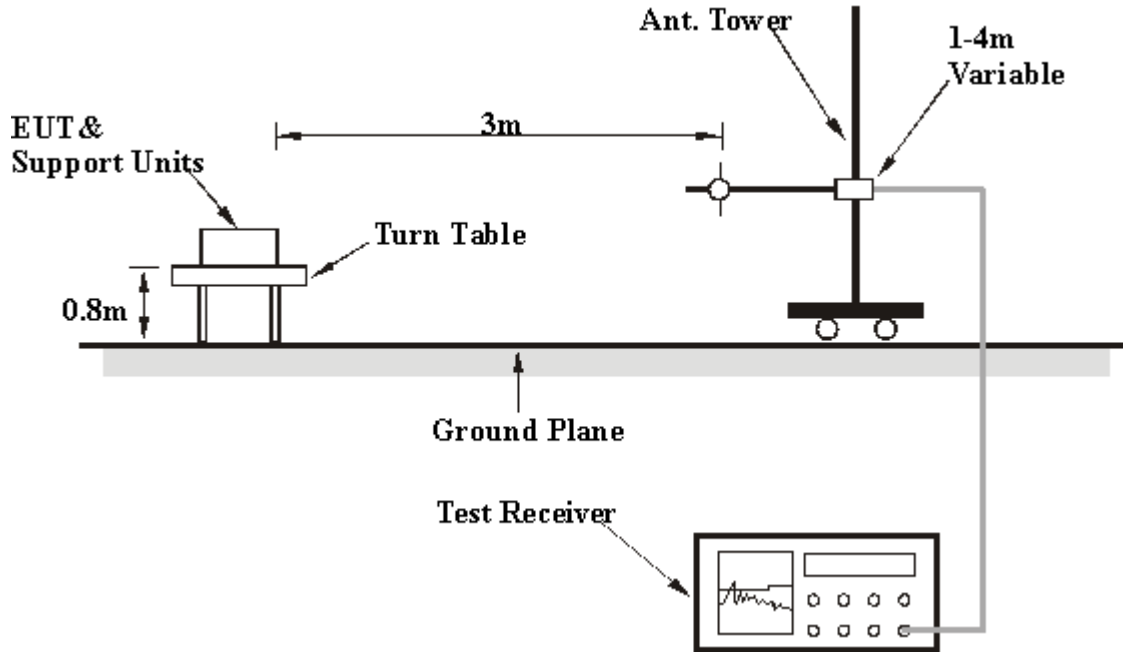

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



## 4.2.7 TEST RESULT (A)

<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 1050hPa	<b>TESTED BY:</b> Gary Chang	

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	149.20	27.0 QP	43.50	-16.50	1.05 H	248	13.30	13.70
2	168.50	35.1 QP	43.50	-8.40	1.14 H	274	22.30	12.80
3	203.90	33.9 QP	43.50	-9.60	1.19 H	247	20.30	13.60
4	224.66	42.0 QP	46.00	-4.00	1.64 H	24	26.20	15.80
5	249.63	37.5 QP	46.00	-8.50	1.27 H	298	19.10	18.40
6	324.48	33.5 QP	46.00	-12.50	1.31 H	135	12.90	20.60
7	349.47	37.5 QP	46.00	-8.50	1.18 H	152	16.10	21.40
8	375.00	31.4 QP	46.00	-14.60	1.19 H	320	9.20	22.20
9	400.00	31.0 QP	46.00	-15.00	1.09 H	342	8.00	23.00
10	424.50	34.2 QP	46.00	-11.80	1.07 H	216	10.80	23.40
11	449.28	41.2 QP	46.00	-4.80	2.28 H	181	17.40	23.80
12	474.25	38.0 QP	46.00	-8.00	1.21 H	275	13.50	24.50
13	499.23	43.0 QP	46.00	-3.00	1.02 H	127	17.90	25.10
14	524.18	32.0 QP	46.00	-14.00	1.08 H	254	6.60	25.40
15	624.02	43.5 QP	46.00	-2.50	1.32 H	252	15.90	27.60
16	648.60	39.5 QP	46.00	-6.50	1.42 H	302	11.70	27.80
17	748.83	41.0 QP	46.00	-5.00	1.33 H	225	11.60	29.40
18	798.74	37.0 QP	46.00	-9.00	1.07 H	235	6.30	30.70
19	998.40	41.4 QP	54.00	-12.60	1.61 H	151	9.20	32.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60%RH, 1050hPa	<b>TESTED BY:</b> Gary Chang	

### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	124.50	31.5 QP	43.50	-12.00	1.04 V	32	16.40	15.10
2	149.78	30.5 QP	43.50	-13.00	1.35 V	256	16.90	13.60
3	169.64	35.1 QP	43.50	-8.40	1.06 V	251	22.30	12.80
4	174.76	33.7 QP	43.50	-9.80	1.44 V	155	21.00	12.70
5	204.00	36.0 QP	43.50	-7.50	1.00 V	251	22.40	13.60
6	224.60	32.0 QP	46.00	-14.00	1.32 V	32	16.20	15.80
7	240.00	30.0 QP	46.00	-16.00	1.38 V	22	12.60	17.40
8	249.60	32.0 QP	46.00	-14.00	1.52 V	345	13.60	18.40
9	274.50	31.0 QP	46.00	-15.00	1.42 V	251	11.70	19.30
10	299.50	28.0 QP	46.00	-18.00	1.22 V	23	8.10	19.90
11	299.50	33.6 QP	46.00	-12.40	1.43 V	1	13.70	19.90
12	339.36	36.5 QP	46.00	-9.50	1.39 V	335	15.40	21.10
13	349.50	36.2 QP	46.00	-9.80	1.02 V	75	14.80	21.40
14	374.40	33.2 QP	46.00	-12.80	1.51 V	254	11.00	22.20
15	449.22	40.0 QP	46.00	-6.00	1.26 V	232	16.20	23.80
16	500.00	32.5 QP	46.00	-13.50	1.53 V	254	7.30	25.20
17	624.01	37.5 QP	46.00	-8.50	1.46 V	152	9.90	27.60
18	624.04	35.6 QP	46.00	-10.40	1.40 V	253	8.00	27.60
19	648.97	33.0 QP	46.00	-13.00	1.04 V	248	5.20	27.80
20	748.80	40.2 QP	46.00	-5.80	1.08 V	267	10.80	29.40
21	873.64	38.4 QP	46.00	-7.60	1.50 V	185	7.10	31.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



## 4.2.8 TEST RESULT (B)

<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 1050hPa	<b>TESTED BY:</b> Gary Chang	

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.18	29.2 QP	43.50	-14.30	1.40 H	63	16.10	13.10
2	250.00	34.6 QP	46.00	-11.40	1.41 H	184	19.10	15.60
3	275.01	37.7 QP	46.00	-8.30	1.44 H	343	21.20	16.40
4	280.81	36.1 QP	46.00	-9.90	1.45 H	327	19.60	16.50
5	300.01	42.6 QP	46.00	-3.40	1.30 H	21	25.80	16.80
6	300.04	42.9 QP	46.00	-3.10	1.24 H	319	26.10	16.80
7	325.01	42.6 QP	46.00	-3.40	1.20 H	56	25.40	17.20
8	350.00	43.0 QP	46.00	-3.00	1.13 H	91	25.30	17.70
9	374.36	42.4 QP	46.00	-3.60	1.14 H	49	24.00	18.40
10	499.21	37.8 QP	46.00	-8.20	1.54 H	283	16.70	21.20
11	527.99	35.3 QP	46.00	-10.70	1.54 H	226	14.20	21.10
12	624.01	41.0 QP	46.00	-5.00	1.40 H	99	18.30	22.80
13	748.80	40.1 QP	46.00	-5.90	1.13 H	91	16.00	24.10
14	811.23	37.0 QP	46.00	-9.00	1.22 H	212	12.10	24.90
15	873.62	38.6 QP	46.00	-7.40	1.43 H	0	13.50	25.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.





<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
<b>MODE</b>	Channel 11	<b>FREQUENCY RANGE</b>	Below 1000MHz
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 1050hPa	<b>TESTED BY:</b> Gary Chang	

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	139.73	33.7 QP	43.50	-9.80	1.50 V	347	21.50	12.10
2	240.01	33.4 QP	46.00	-12.60	1.07 V	62	18.70	14.70
3	280.80	30.4 QP	46.00	-15.60	1.40 V	7	13.90	16.50
4	300.01	39.3 QP	46.00	-6.70	1.37 V	284	22.50	16.80
5	325.01	40.9 QP	46.00	-5.10	1.71 V	35	23.70	17.20
6	350.01	41.4 QP	46.00	-4.60	1.66 V	42	23.70	17.70
7	350.02	41.5 QP	46.00	-4.50	1.25 V	227	23.80	17.70
8	374.40	39.0 QP	46.00	-7.00	1.78 V	99	20.60	18.40
9	468.02	35.6 QP	46.00	-10.40	1.14 V	268	15.30	20.30
10	499.21	42.9 QP	46.00	-3.10	1.14 V	0	21.70	21.20
11	600.00	31.1 QP	46.00	-14.90	1.37 V	1	8.40	22.70
12	624.01	42.2 QP	46.00	-3.80	1.84 V	22	19.40	22.80
13	748.83	40.0 QP	46.00	-6.00	1.36 V	356	15.90	24.10
14	811.20	39.0 QP	46.00	-7.00	1.38 V	289	14.10	24.90
15	873.64	41.9 QP	46.00	-4.10	1.23 V	116	16.70	25.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.



4.2.9 TEST RESULT

<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
<b>MODE</b>	CCK	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 1		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 1050hPa	<b>TESTED BY:</b> Gary Chang	

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	46.4 PK	74.00	-27.60	1.52 H	87	14.80	31.60
2	*2412.00	104.6 PK			1.03 H	45	71.80	32.80
2	*2412.00	83.8 AV			1.03 H	45	51.00	31.60
3	3216.00	46.7 PK	74.00	-27.30	1.38 H	54	12.80	33.90
4	4824.00	45.7 PK	74.00	-28.30	1.10 H	54	8.70	36.90
5	7236.00	50.4 PK	74.00	-23.60	1.52 H	74	8.90	41.40
5	7236.00	42.2 AV	54.00	-11.80	1.52 H	74	0.70	32.80
6	9648.00	52.5 PK	74.00	-21.50	1.32 H	55	9.10	43.40
6	9648.00	46.0 AV	54.00	-8.00	1.32 H	55	2.60	33.90

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	44.3 PK	74.00	-29.70	1.06 V	57	12.70	31.60
2	*2412.00	103.2 PK			1.25 V	60	70.50	32.80
2	*2412.00	83.6 AV			1.25 V	60	50.90	31.60
3	3216.00	45.5 PK	74.00	-28.50	1.59 V	45	11.60	33.90
4	4824.00	47.3 PK	74.00	-26.70	1.20 V	54	10.30	36.90
5	7236.00	50.6 PK	74.00	-23.40	1.15 V	54	9.10	41.40
5	7236.00	42.9 AV	54.00	-11.10	1.15 V	54	1.40	32.80
6	9648.00	53.0 PK	74.00	-21.00	1.52 V	47	9.60	43.40
6	9648.00	45.0 AV	54.00	-9.00	1.52 V	47	1.60	33.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ” : Fundamental frequency.



<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
<b>MODE</b>	CCK	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 6		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 1050hPa	<b>TESTED BY:</b> Gary Chang	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	42.1 PK	74.00	-31.90	1.25 H	84	10.50	31.60
2	*2437.00	100.7 PK			1.59 H	45	67.90	32.80
2	*2437.00	83.2 AV			1.59 H	45	50.40	31.60
3	3248.00	43.8 PK	74.00	-30.20	1.04 H	87	9.90	33.90
4	4874.00	46.9 PK	74.00	-27.10	1.32 H	45	9.70	37.10
5	7311.00	51.0 PK	74.00	-23.00	1.30 H	84	9.40	41.50
5	7311.00	43.5 AV	54.00	-10.50	1.30 H	84	1.90	32.80
6	9748.00	52.4 PK	74.00	-21.60	1.54 H	37	9.10	43.30
6	9748.00	45.9 AV	54.00	-8.10	1.54 H	37	2.60	33.90

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	44.7 PK	74.00	-29.30	1.16 V	84	13.10	31.60
2	*2437.00	102.4 PK			1.46 V	125	69.60	32.80
2	*2437.00	87.7 AV			1.46 V	125	54.90	31.60
3	3248.50	46.6 PK	74.00	-27.40	1.52 V	62	12.70	33.90
4	4874.00	50.3 PK	74.00	-23.70	1.12 V	45	13.20	37.10
5	7310.00	50.7 PK	74.00	-23.30	1.33 V	47	9.10	41.50
5	7310.00	44.0 AV	54.00	-10.00	1.33 V	47	2.40	33.90
6	9748.00	52.9 PK	74.00	-21.10	1.10 V	52	9.60	43.30
6	9748.00	46.4 AV	54.00	-7.60	1.10 V	52	3.10	37.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.



<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
<b>MODE</b>	CCK	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 11		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 1050hPa	<b>TESTED BY:</b> Gary Chang	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	46.2 PK	74.00	-27.80	1.40 H	54	14.50	31.60
2	*2462.00	101.4 PK			1.86 H	264	68.60	32.90
2	*2462.00	83.4 AV			1.86 H	264	50.60	31.60
3	3282.00	45.3 PK	74.00	-28.70	1.46 H	54	11.40	33.90
4	4924.00	45.1 PK	74.00	-28.90	1.12 H	64	7.70	37.30
5	7387.00	51.0 PK	74.00	-23.00	1.41 H	52	9.40	41.70
5	7387.00	44.9 AV	54.00	-9.10	1.41 H	52	3.30	32.90
6	9850.00	52.2 PK	74.00	-21.80	1.33 H	47	9.00	43.20
6	9850.00	46.2 AV	54.00	-7.80	1.33 H	47	3.00	33.90

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	46.3 PK	74.00	-27.70	1.22 V	84	14.70	31.60
2	*2462.00	104.3 PK			1.52 V	123	71.40	32.90
2	*2462.00	88.8 AV			1.52 V	123	56.00	31.60
3	3282.00	47.3 PK	74.00	-26.70	1.17 V	264	13.40	33.90
4	4924.00	47.1 PK	74.00	-26.90	1.25 V	84	9.70	37.30
5	7387.00	51.0 PK	74.00	-23.00	1.35 V	67	9.40	41.70
5	7387.00	44.5 AV	54.00	-9.50	1.35 V	67	2.90	32.90
6	9850.00	52.3 PK	74.00	-21.70	1.26 V	74	9.10	43.20
6	9850.00	44.8 AV	54.00	-9.20	1.26 V	74	1.60	33.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.



<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
<b>MODE</b>	OFDM	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 1		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 1050hPa	<b>TESTED BY:</b> Gary Chang	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	47.3 PK	74.00	-26.70	1.12 H	51	15.70	31.60
2	*2412.00	101.9 PK			1.58 H	107	69.10	32.80
2	*2412.00	63.6 AV			1.58 H	107	30.90	31.60
3	3216.00	44.3 PK	74.00	-29.70	1.08 H	74	10.40	33.90
4	4824.00	47.2 PK	74.00	-26.80	1.52 H	66	10.20	36.90
5	7236.00	50.8 PK	74.00	-23.20	1.19 H	54	9.30	41.40
5	7236.00	42.1 AV	54.00	-11.90	1.19 H	54	0.60	32.80
6	9648.00	53.0 PK	74.00	-21.00	1.08 H	14	9.60	43.40
6	9648.00	46.0 AV	54.00	-8.00	1.08 H	14	2.60	33.90

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1608.00	46.5 PK	74.00	-27.50	1.03 V	54	14.90	31.60
2	*2412.00	101.5 PK			1.00 V	92	68.80	32.80
2	*2412.00	69.1 AV			1.00 V	92	36.30	31.60
3	3216.00	45.5 PK	74.00	-28.50	1.22 V	54	11.70	33.90
4	4824.00	46.2 PK	74.00	-27.80	1.11 V	54	9.20	36.90
5	7236.00	53.8 PK	74.00	-20.20	1.24 V	22	12.30	41.40
5	7236.00	45.4 AV	54.00	-8.60	1.24 V	22	3.90	32.80
6	9648.00	52.6 PK	74.00	-21.40	1.12 V	33	9.20	43.40
6	9648.00	46.0 AV	54.00	-8.00	1.12 V	33	2.60	33.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.



<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
<b>MODE</b>	OFDM	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 6		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 1050hPa	<b>TESTED BY:</b> Gary Chang	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.70	46.6 PK	74.00	-27.40	1.35 H	45	15.00	31.60
2	*2437.00	102.8 PK			1.05 H	18	70.00	32.80
2	*2437.00	67.7 AV			1.05 H	18	34.90	31.60
3	3249.00	44.3 PK	74.00	-29.70	1.40 H	121	10.40	33.90
4	4874.00	45.8 PK	74.00	-28.20	1.13 H	54	8.60	37.10
5	7311.00	51.0 PK	74.00	-23.00	1.11 H	34	9.40	41.50
5	7311.00	42.3 AV	54.00	-11.70	1.11 H	34	0.70	32.80
6	9748.00	52.4 PK	74.00	-21.60	1.26 H	325	9.10	43.30
6	9748.00	46.3 AV	54.00	-7.70	1.26 H	325	3.00	33.90

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1624.00	41.5 PK	74.00	-32.50	1.41 V	202	9.90	31.60
2	*2437.00	94.6 PK			1.05 V	18	61.80	32.80
2	*2437.00	64.7 AV			1.05 V	18	31.90	31.60
3	3248.00	43.8 PK	74.00	-30.20	1.12 V	51	10.00	33.90
4	4874.00	45.7 PK	74.00	-28.30	1.17 V	325	8.50	37.10
5	7311.00	50.7 PK	74.00	-23.30	1.12 V	54	9.10	41.50
5	7311.00	41.5 AV	54.00	-12.50	1.12 V	54	-0.10	32.80
6	9747.00	52.9 PK	74.00	-21.10	1.19 V	352	9.60	43.30
6	9747.00	46.9 AV	54.00	-7.10	1.19 V	352	3.60	33.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.



<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
<b>MODE</b>	OFDM	<b>FREQUENCY RANGE</b>	Above 1000MHz
<b>CHANNEL</b>	Channel 11		
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	20deg. C, 60%RH, 1050hPa	<b>TESTED BY:</b> Gary Chang	

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	42.2 PK	74.00	-31.80	1.34 H	152	10.50	31.60
2	*2463.00	87.7 PK			1.00 H	174	54.90	32.90
2	*2463.00	62.7 AV			1.00 H	174	29.90	31.60
3	3282.00	44.5 PK	74.00	-29.50	1.04 H	54	10.60	33.90
4	4924.00	46.8 PK	74.00	-27.20	1.15 H	54	9.40	37.30
5	7387.00	50.9 PK	74.00	-23.10	1.39 H	48	9.30	41.70
5	7387.00	42.2 AV	54.00	-11.80	1.39 H	48	0.60	32.90

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1641.00	41.2 PK	74.00	-32.80	1.21 V	52	9.50	31.60
2	*2463.00	91.7 PK			1.04 V	238	58.90	32.90
2	*2463.00	65.2 AV			1.04 V	238	32.40	31.60
3	3282.00	44.3 PK	74.00	-29.70	1.23 V	356	10.40	33.90
4	4924.00	47.6 PK	74.00	-26.40	1.15 V	266	10.20	37.30
5	7387.00	50.9 PK	74.00	-23.10	1.54 V	74	9.30	41.70
5	7387.00	42.5 AV	54.00	-11.50	1.54 V	74	0.90	32.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.



### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.




#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




## 4.3.7 TEST RESULT

<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
		<b>MODE</b>	CCK
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 64%RH, 1005hPa
<b>TESTED BY:</b> Hardaway Lee			

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	10.70	0.5	PASS
6	2437	11.46	0.5	PASS
11	2462	11.14	0.5	PASS




CH1

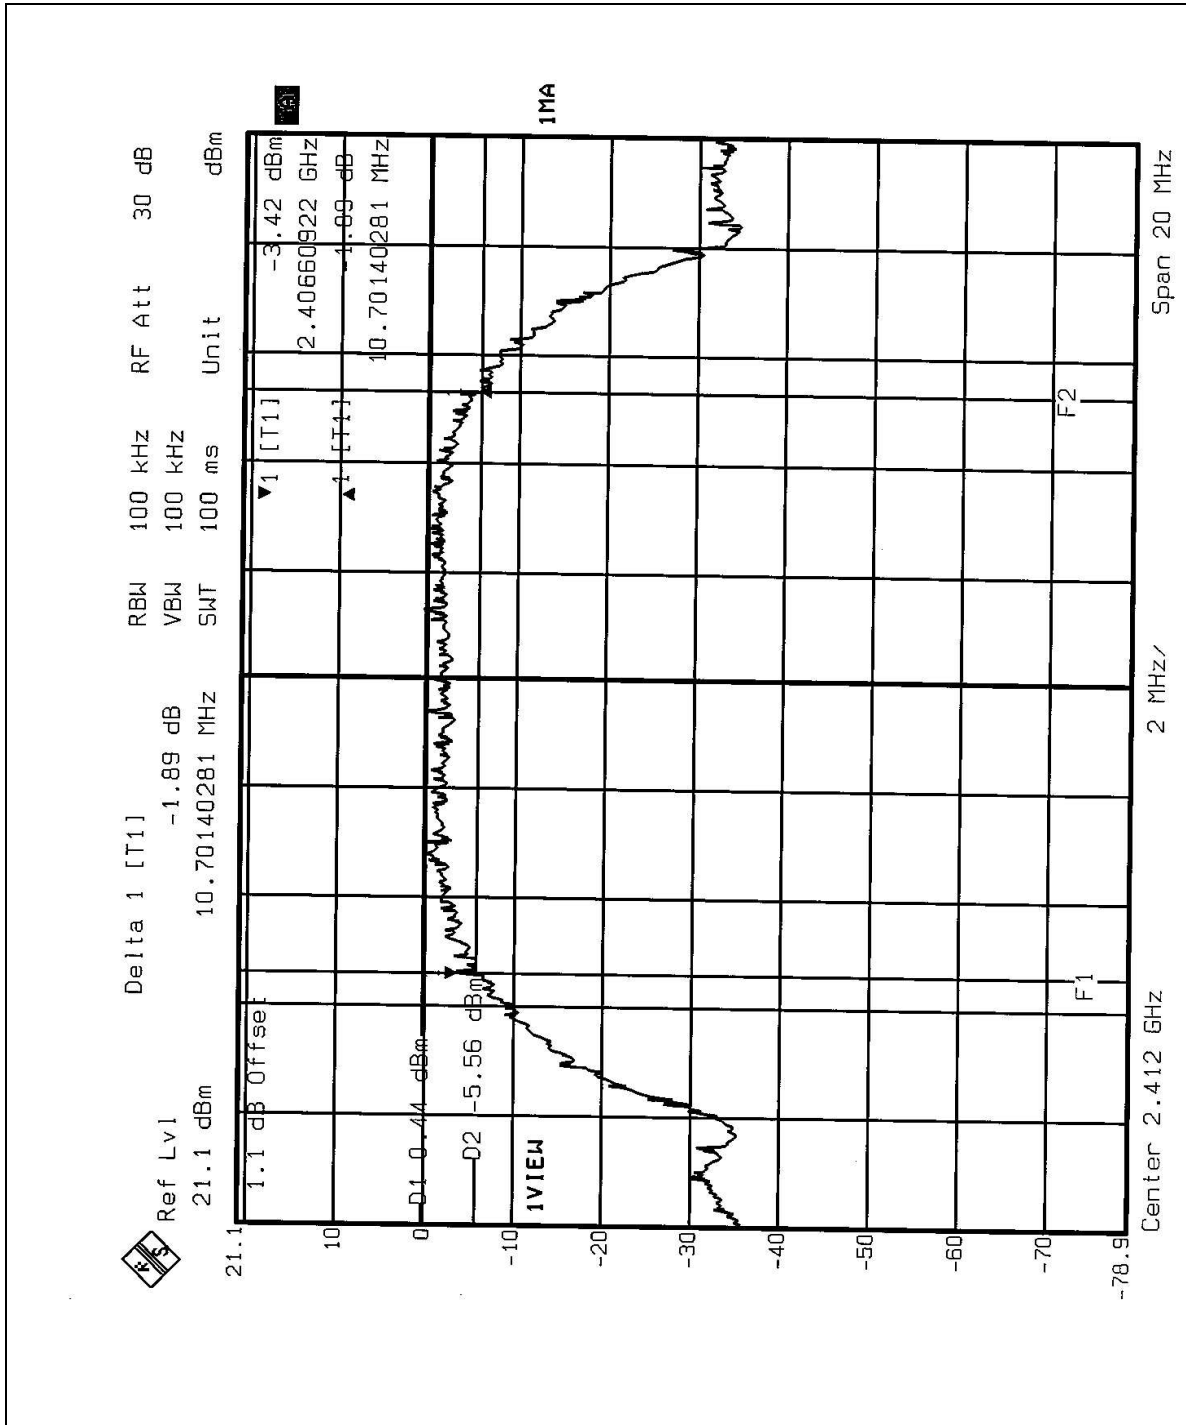




CH6

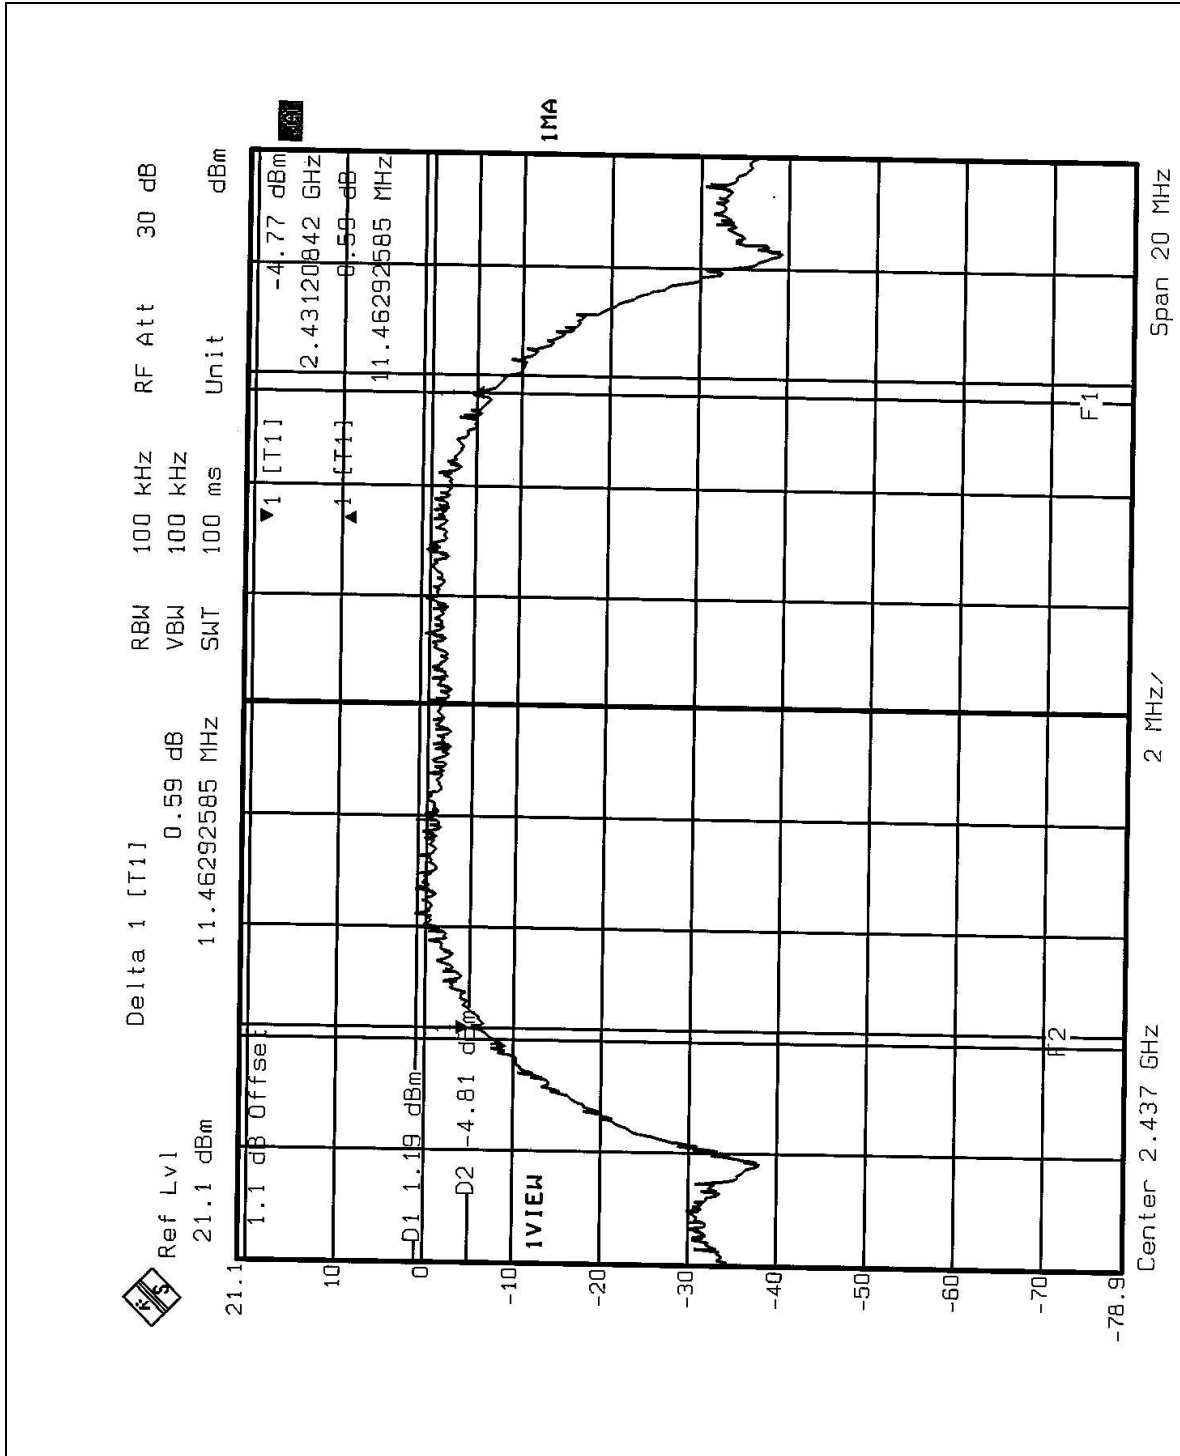



CH11

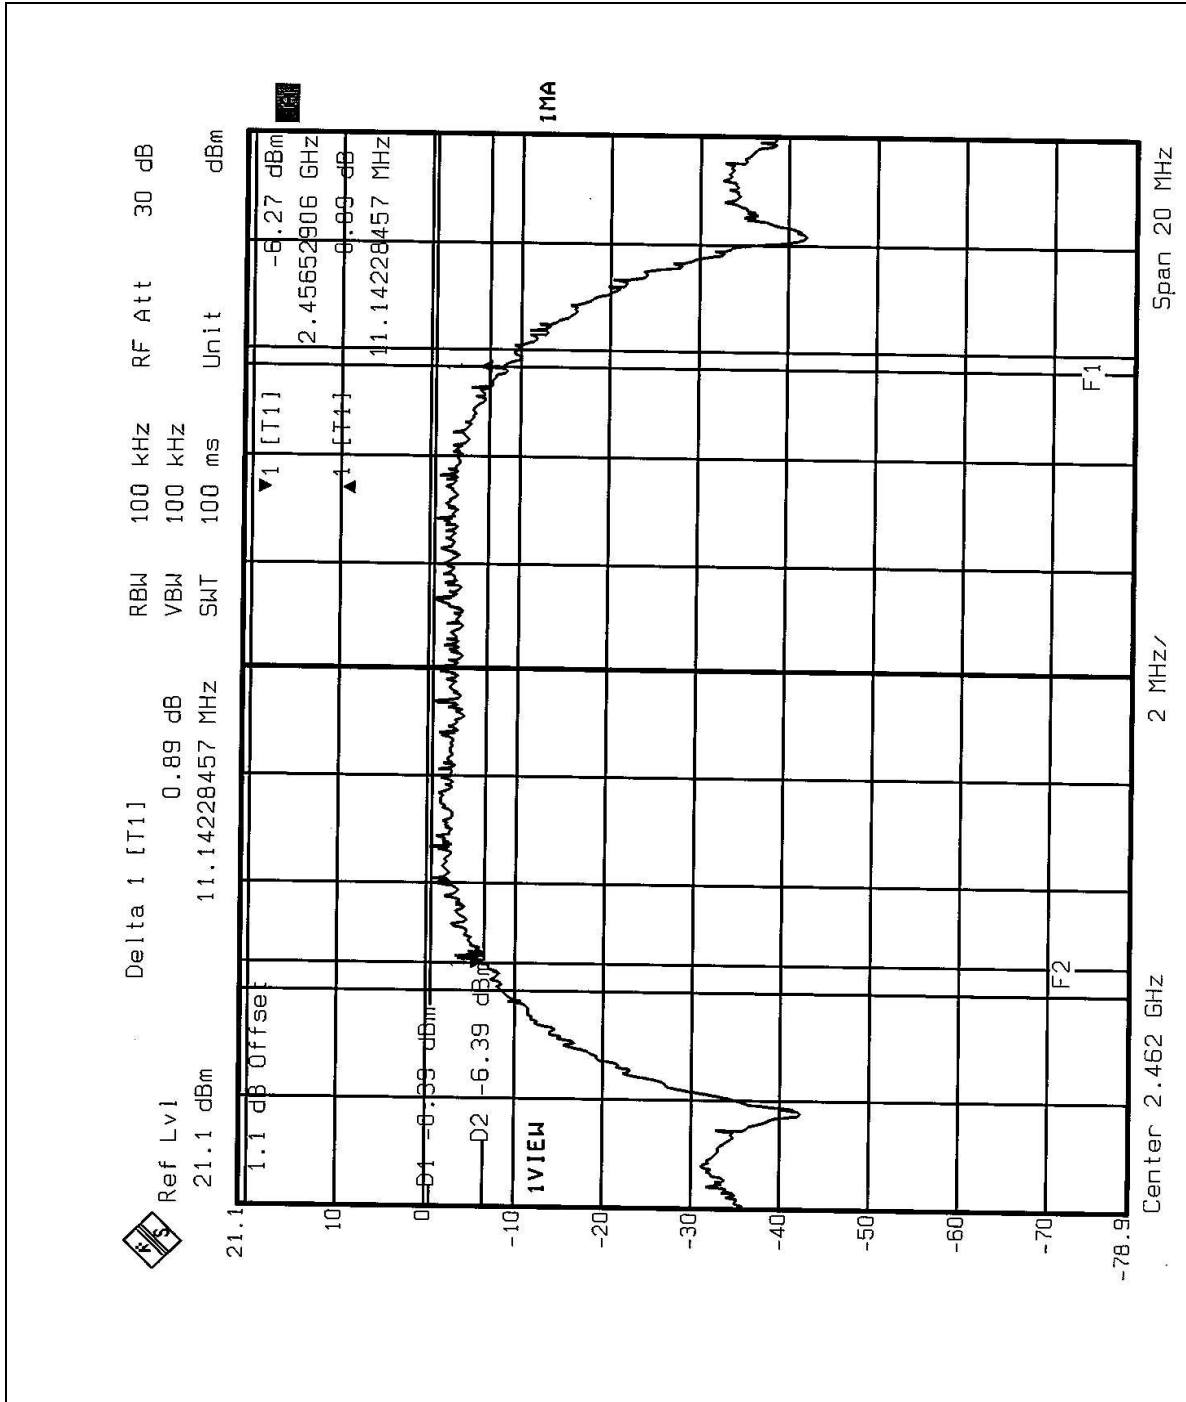




<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
		<b>MODE</b>	OFDM
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 64%RH, 1005hPa
<b>TESTED BY:</b> Hardaway Lee			

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	16.43	0.5	PASS
6	2437	16.51	0.5	PASS
11	2462	16.35	0.5	PASS




CH1

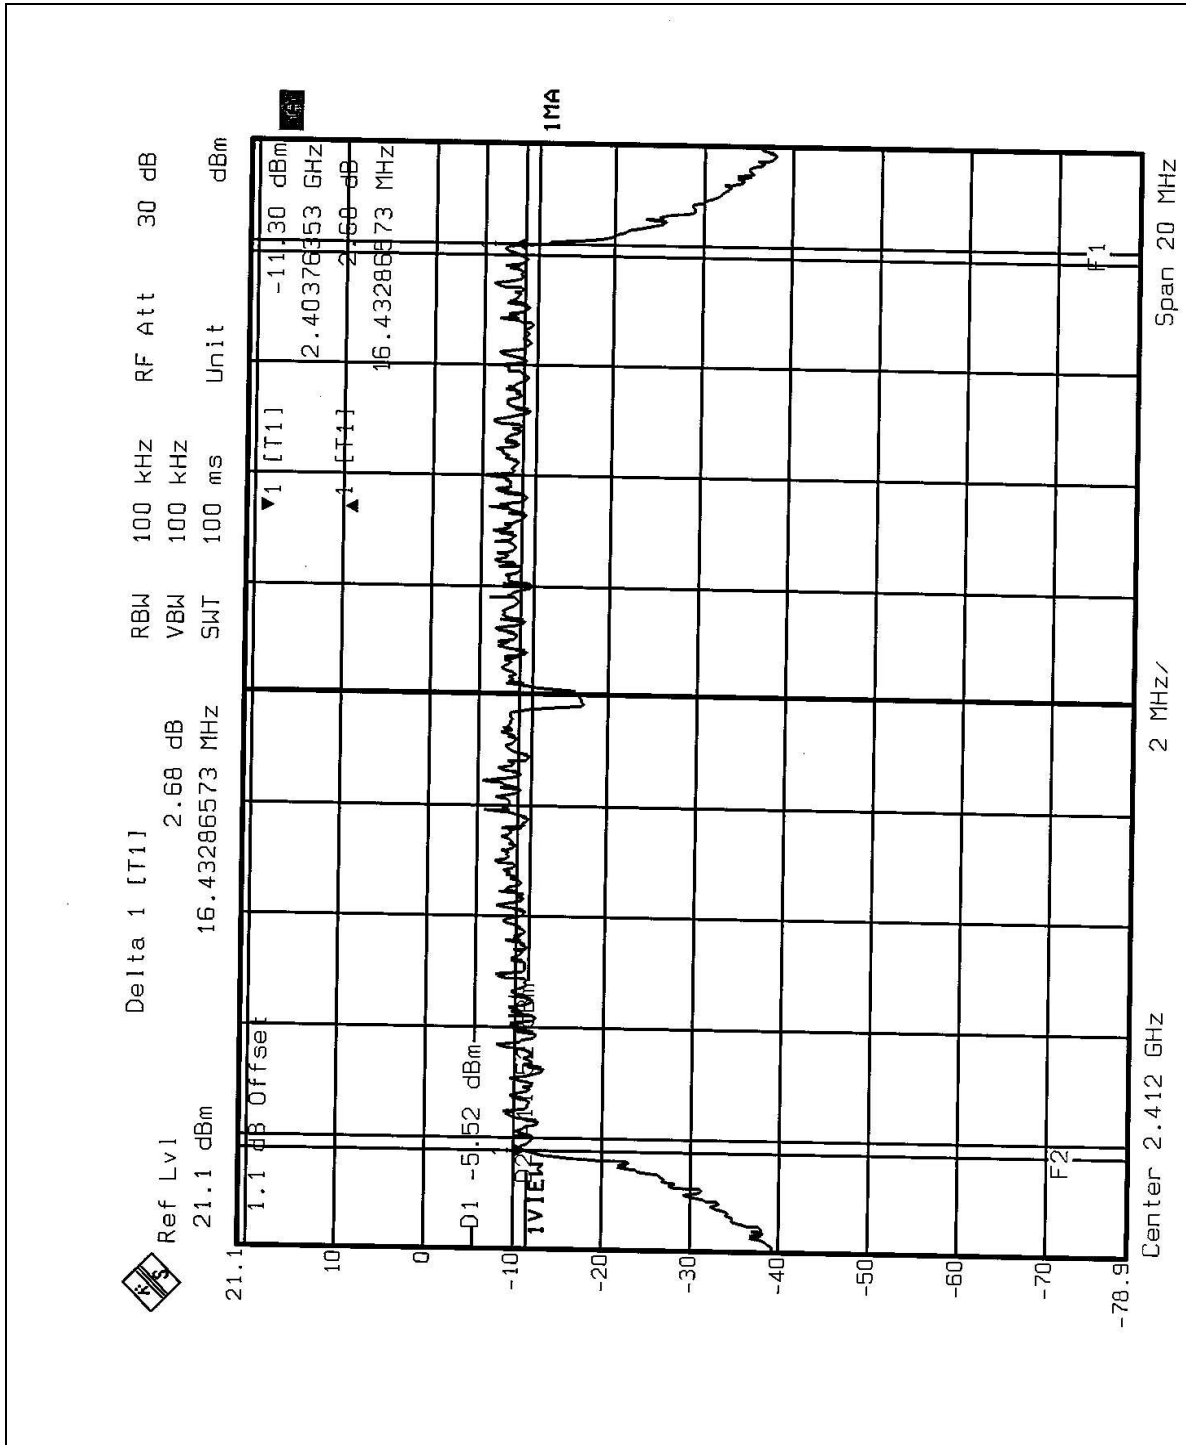




CH6

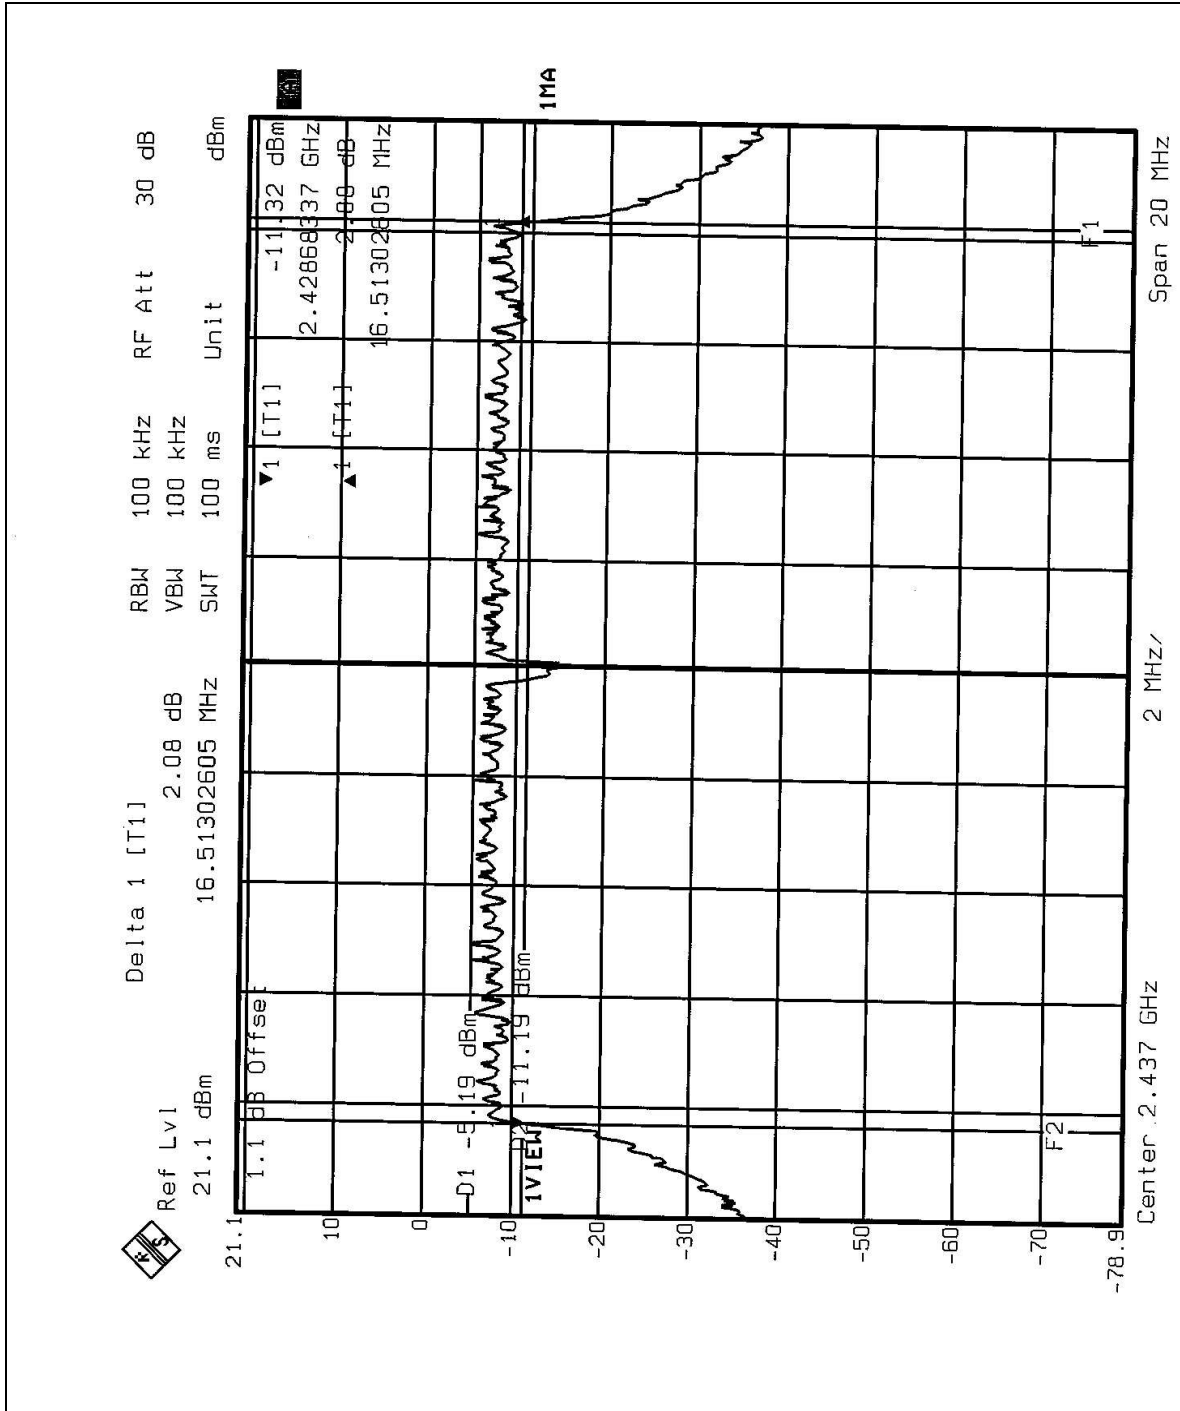





CH11

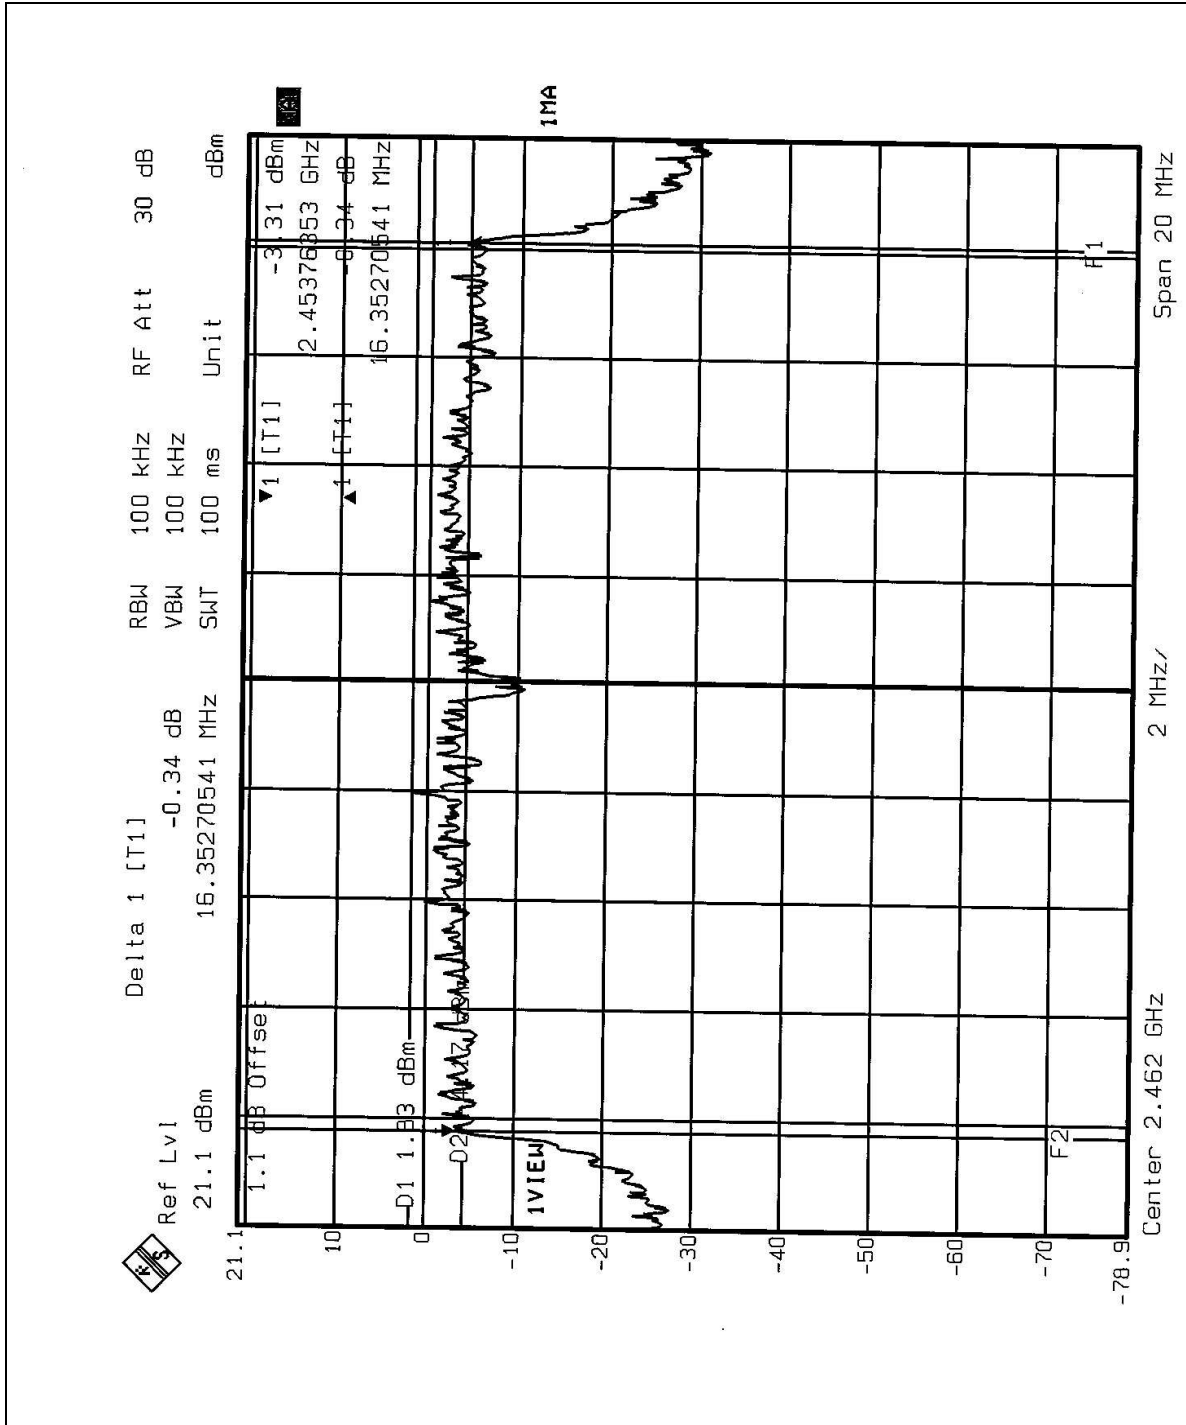



#### 4.4 MAXIMUM PEAK OUTPUT POWER

##### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

##### 4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
POWER METER	E4416A	GB41291118	July 30, 2003
PEAK POWER SENSOR	E9327A	US40440722	July 30, 2003

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.4.3 TEST PROCEDURES

The transmitter output was connected to the peak power meter.

#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TEST SETUP



#### 4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULT

<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
		<b>MODE</b>	CCK
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 64%RH, 1005hPa
<b>TESTED BY:</b> Hardaway Lee			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	17.51	30	PASS
6	2437	18.03	30	PASS
11	2462	17.00	30	PASS

<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
		<b>MODE</b>	OFDM
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 64%RH, 1005hPa
<b>TESTED BY:</b> Hardaway Lee			

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	17.17	30	PASS
6	2437	18.47	30	PASS
11	2462	18.57	30	PASS



## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.




#### 4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

#### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.5.5 TEST SETUP



#### 4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6




## 4.5.7 TEST RESULT

<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
		<b>MODE</b>	CCK
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 64%RH, 1005hPa
<b>TESTED BY:</b> Hardaway Lee			

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz )</b>	<b>RF POWER LEVEL IN 3 KHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-13.58	8	PASS
6	2437	-13.08	8	PASS
11	2462	-14.17	8	PASS




CH1

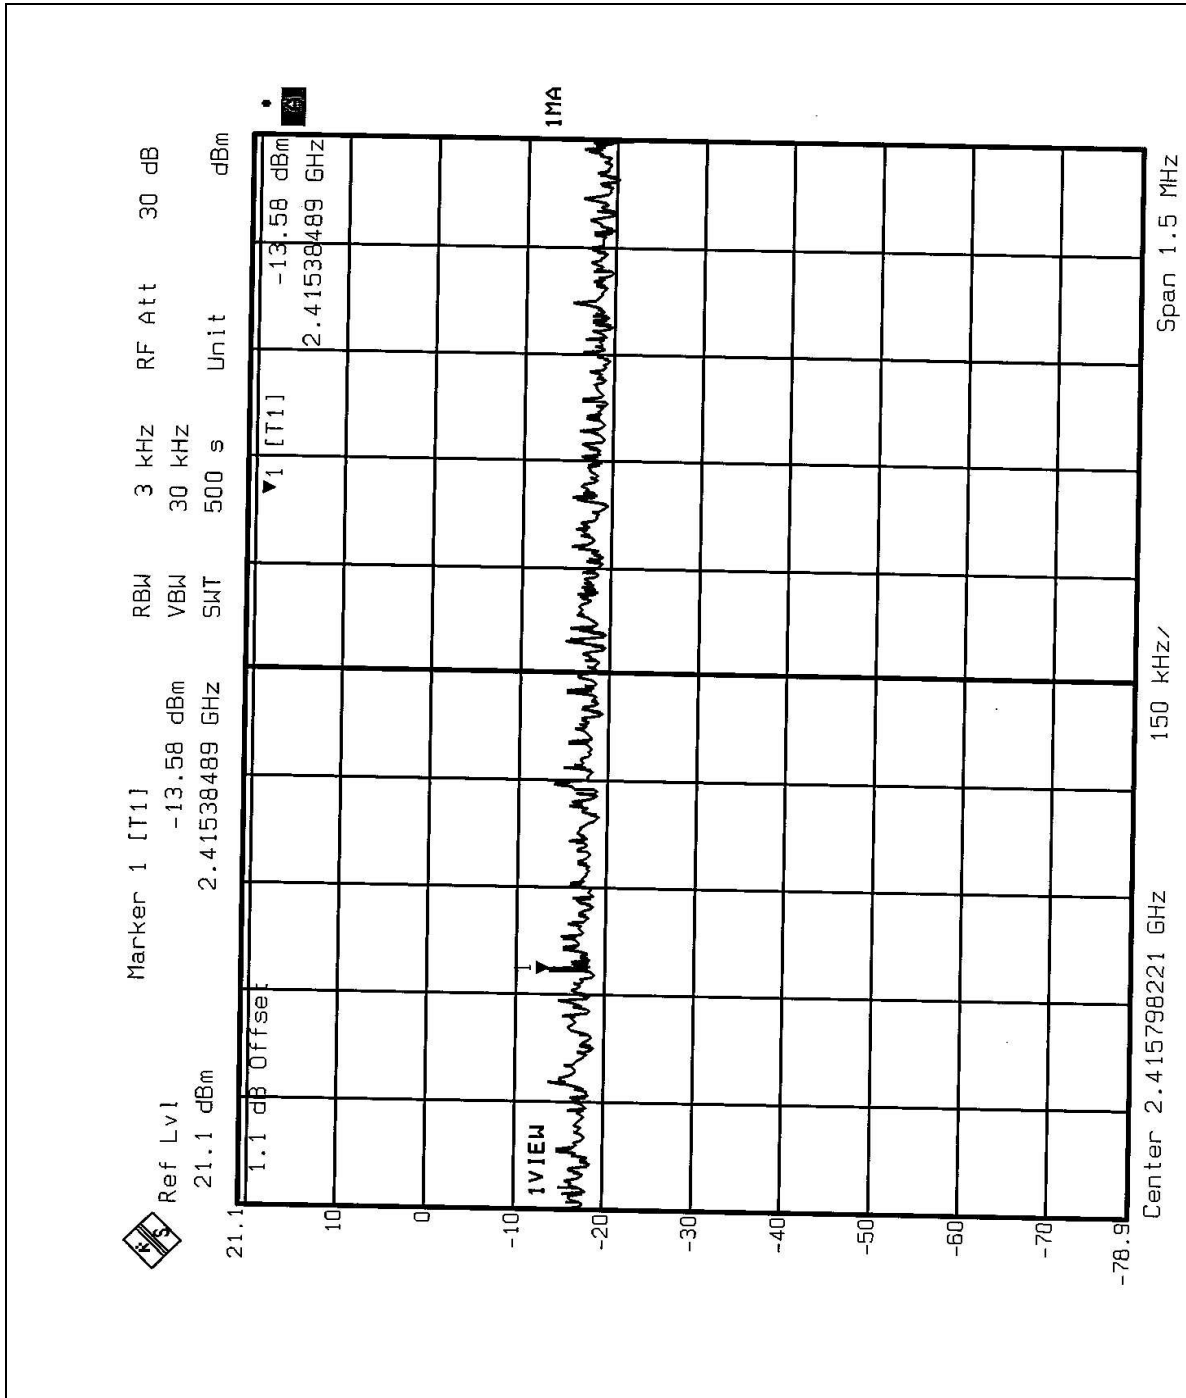






CH6

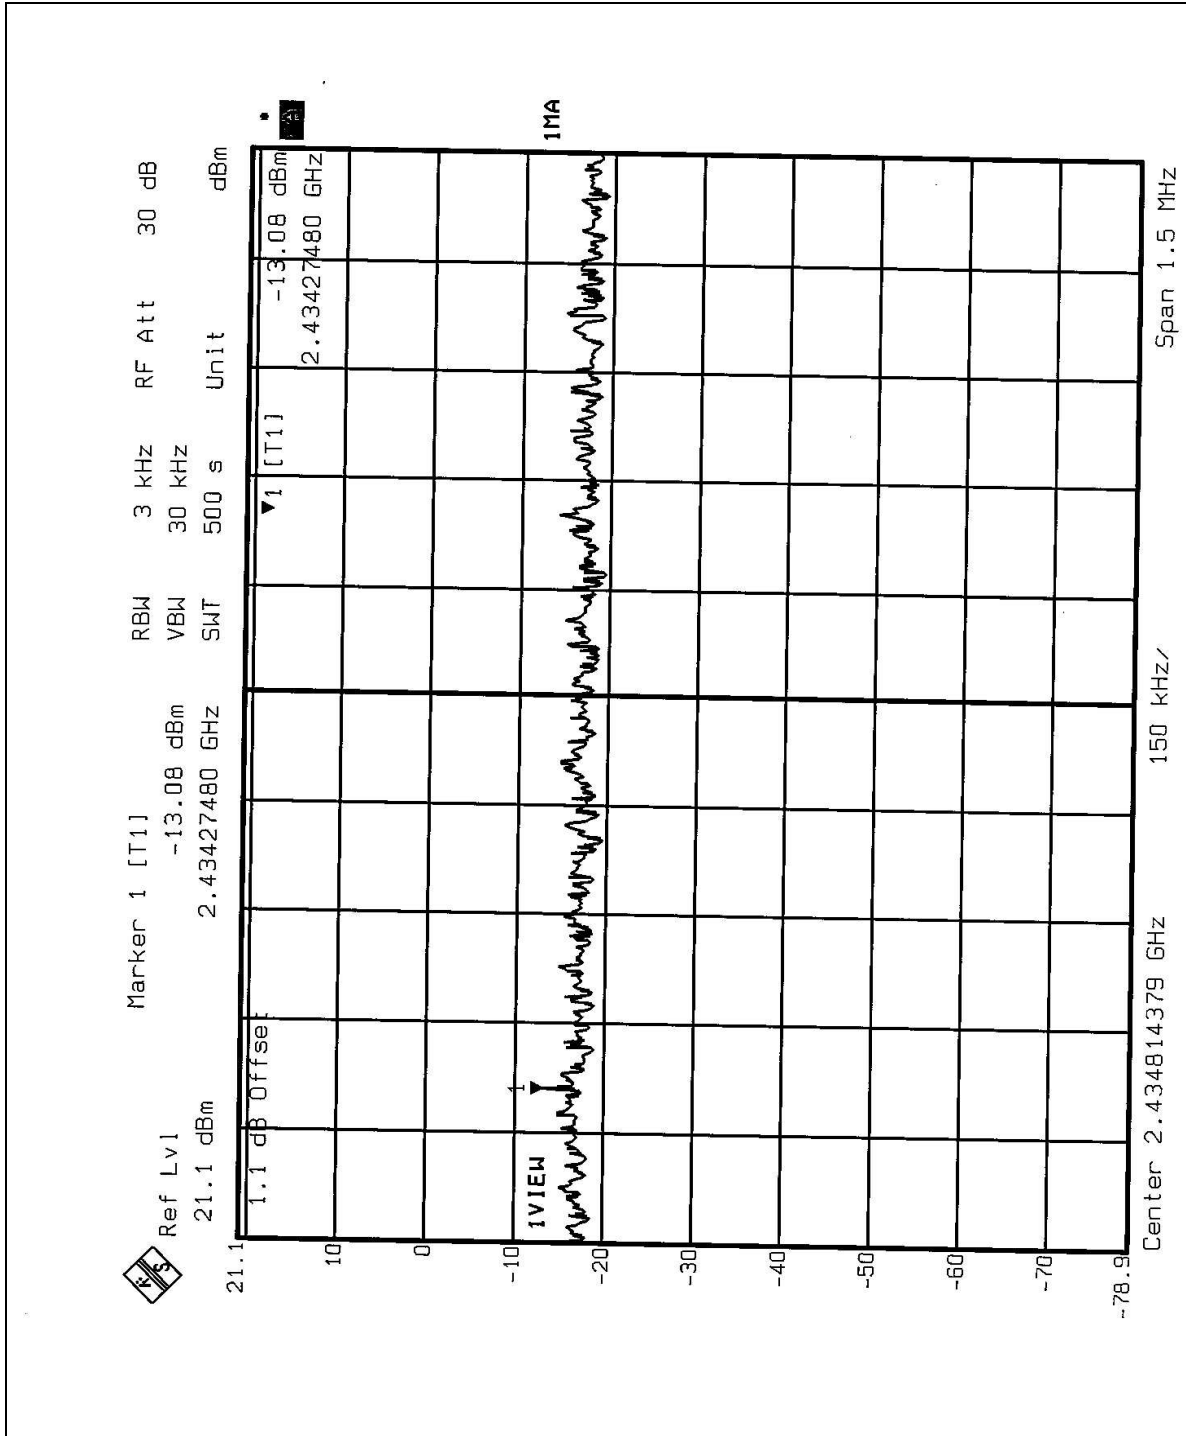



CH11

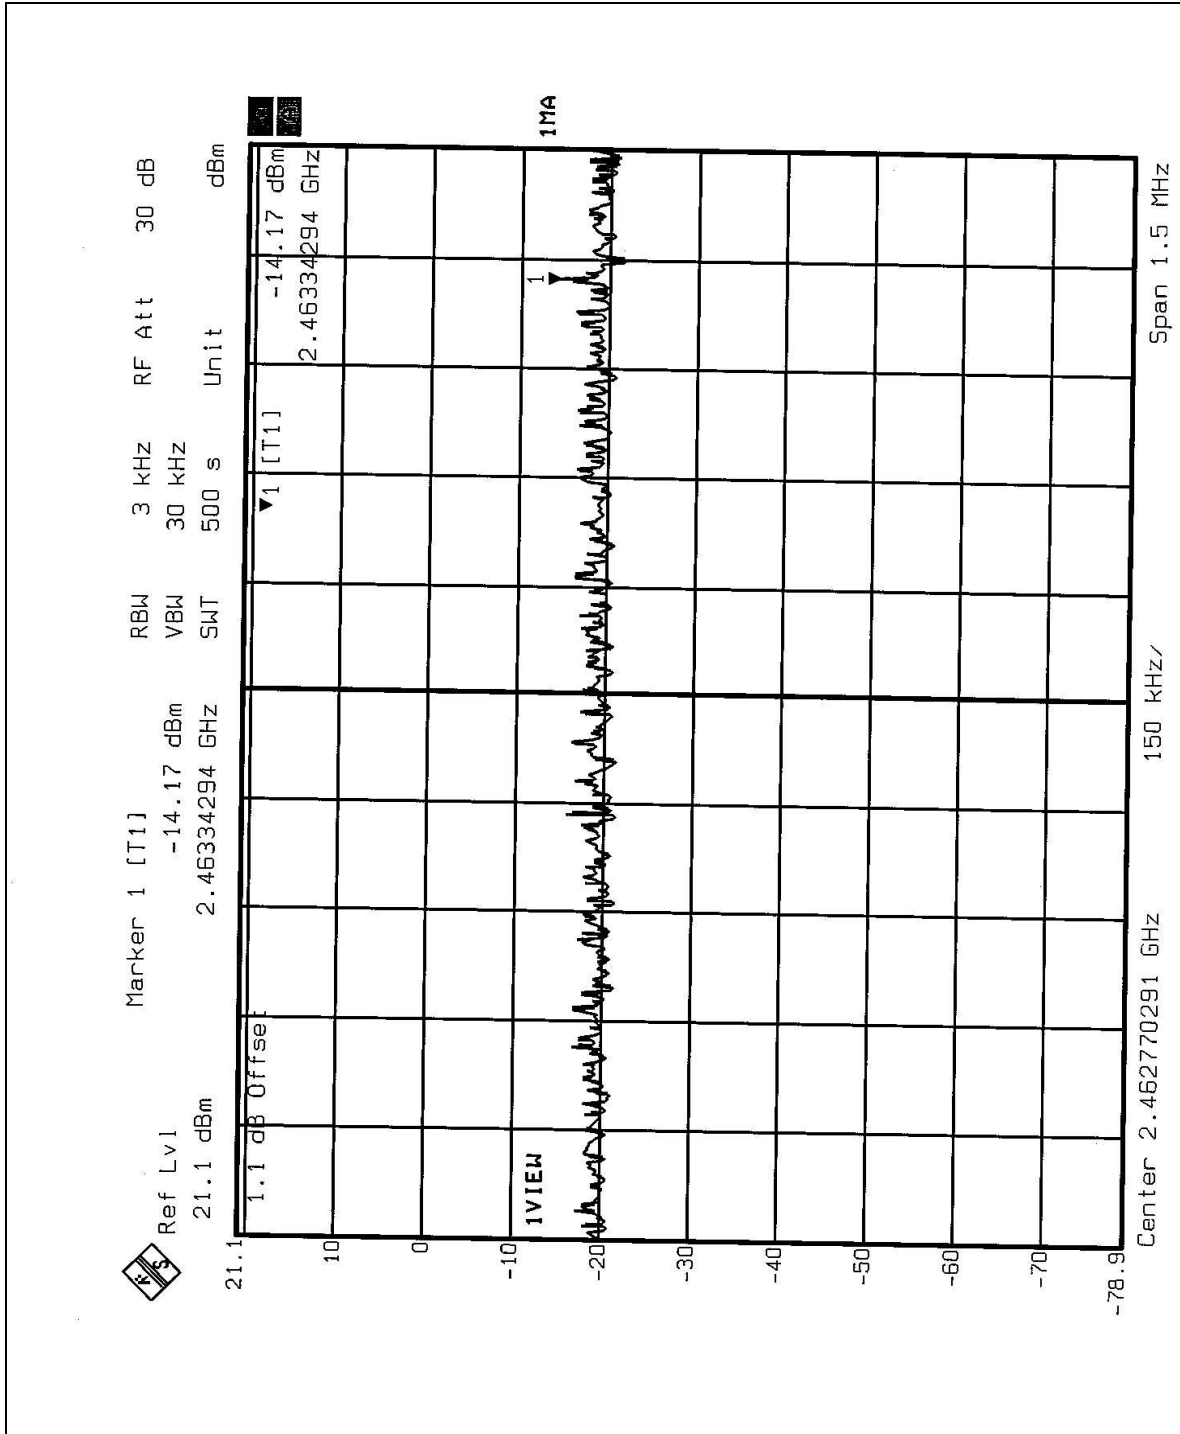




<b>EUT</b>	Wireless-G Access Point	<b>MODEL</b>	WAP54G
		<b>MODE</b>	CCK
<b>INPUT POWER (SYSTEM)</b>	120Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 64%RH, 1005hPa
<b>TESTED BY:</b> Hardaway Lee			

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz )</b>	<b>RF POWER LEVEL IN 3 KHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-21.74	8	PASS
6	2437	-19.55	8	PASS
11	2462	-15.07	8	PASS




CH1

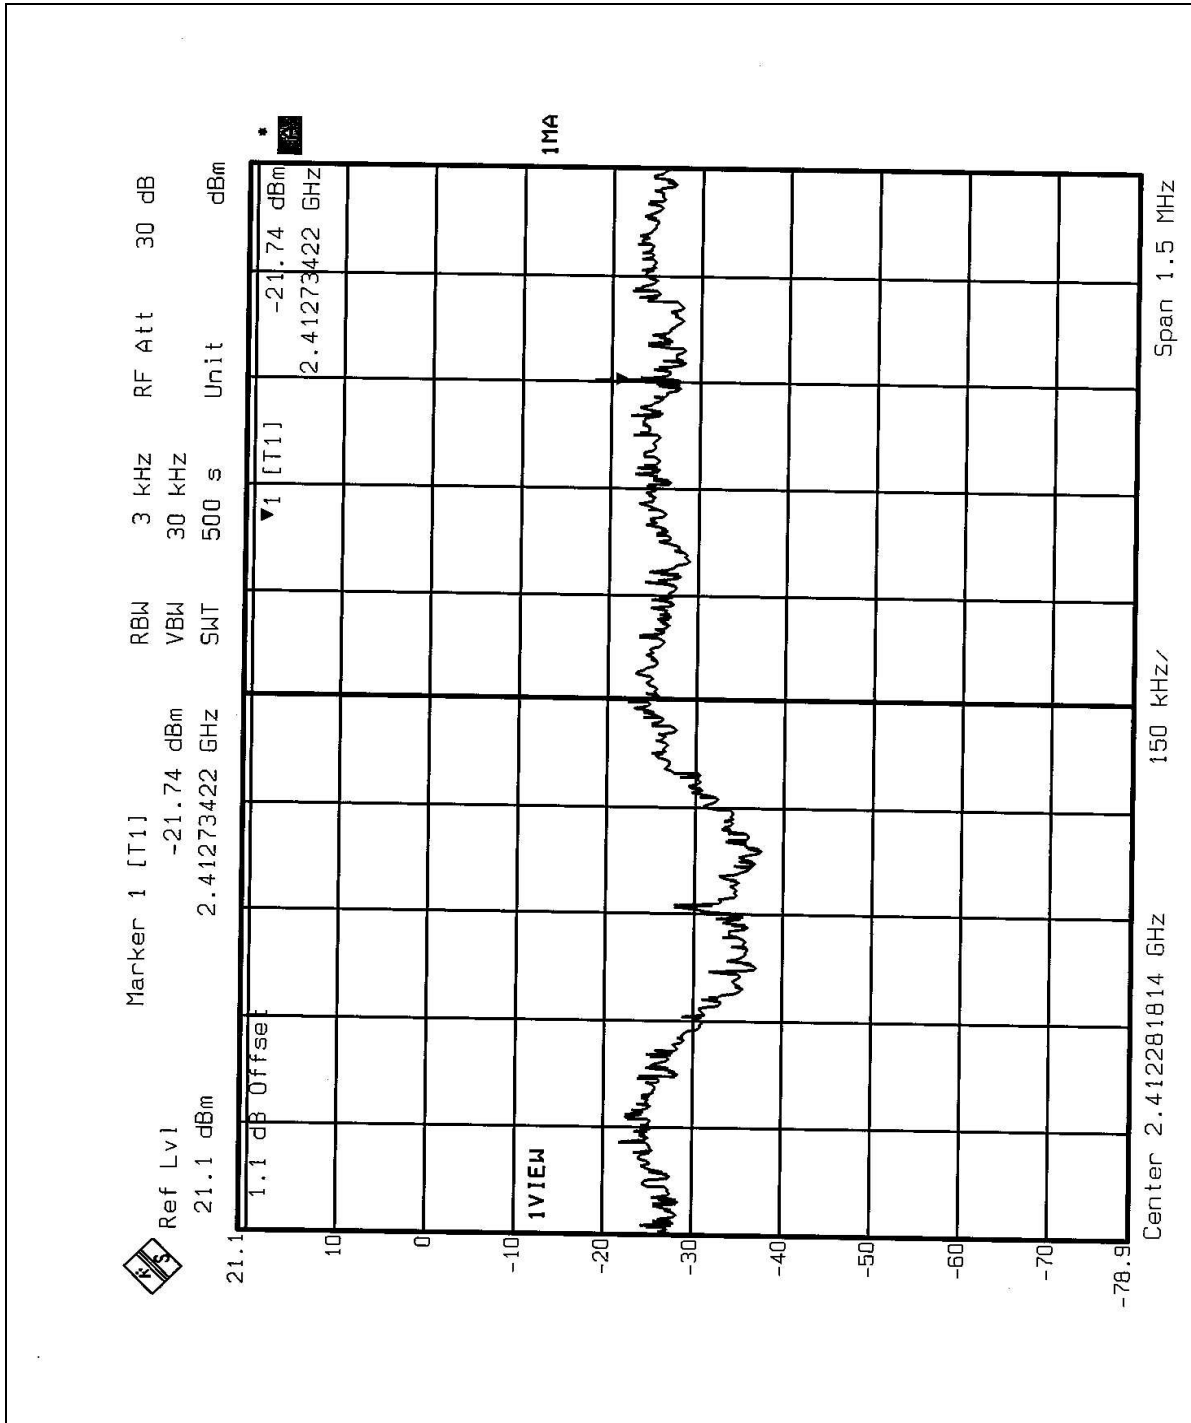




CH6

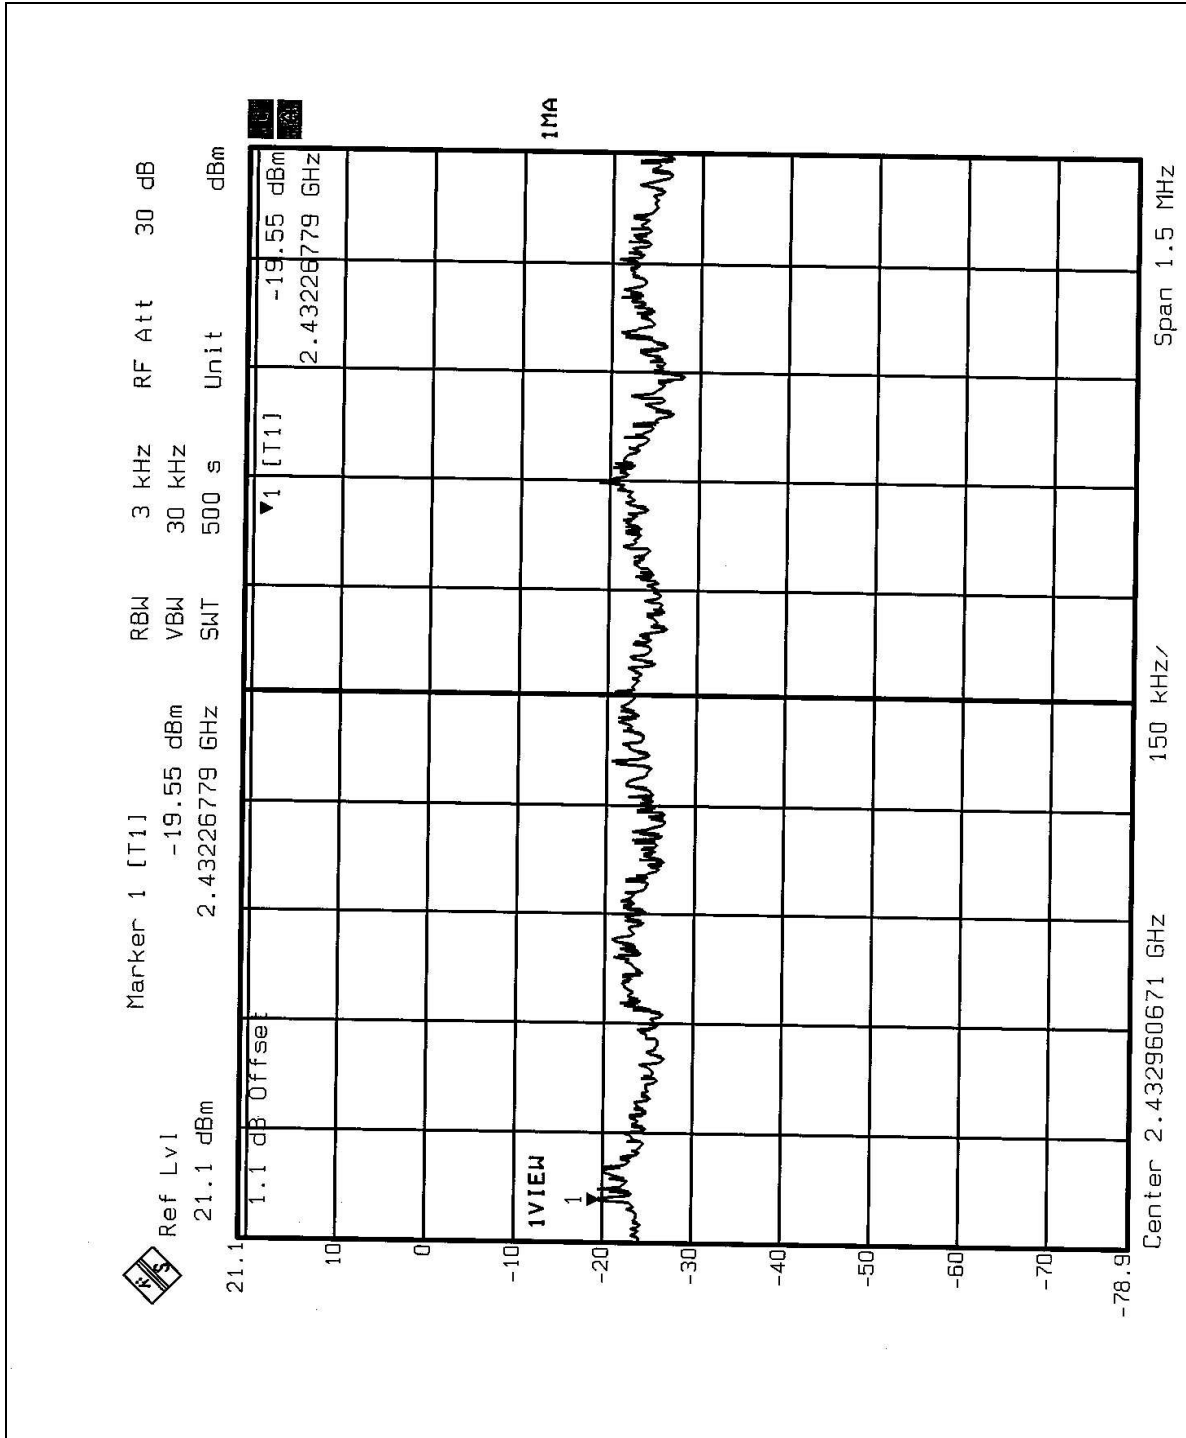



CH11

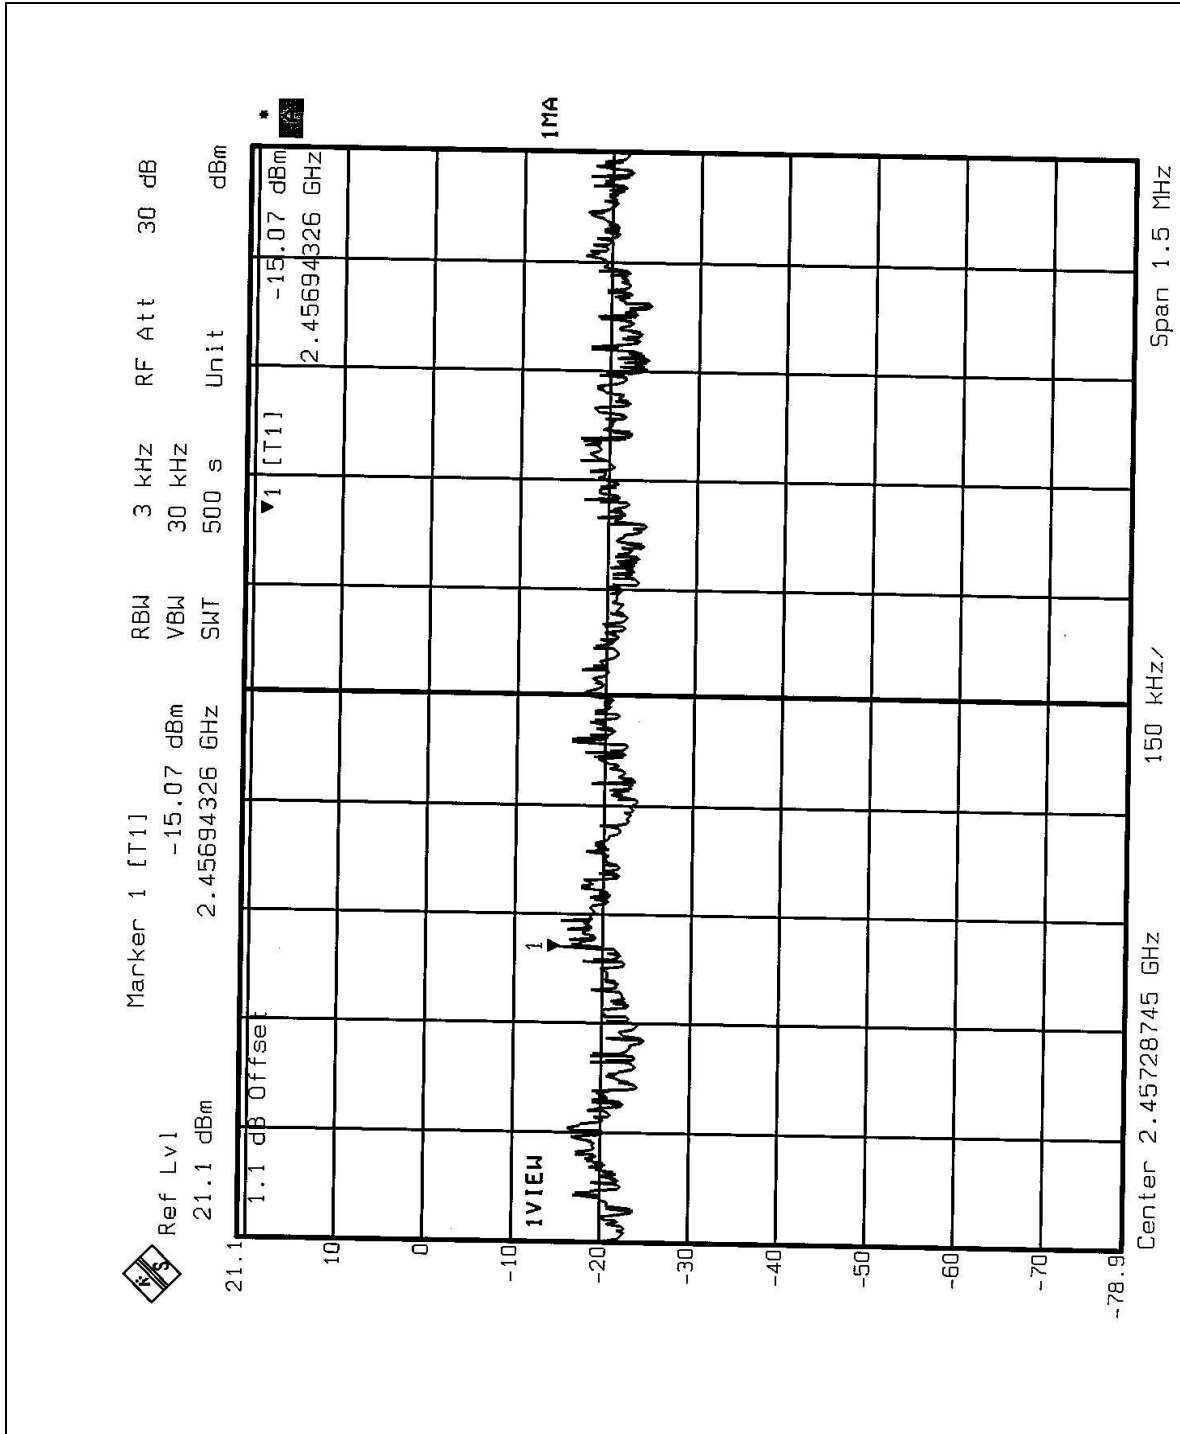



## 4.6 BAND EDGES MEASUREMENT

### 4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100kHz bandwidth from band edge. The band edges was measured and recorded.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation



#### 4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6


#### 4.6.6 TEST RESULT


The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).


**NOTE 1:** The band edge emission plot on the following 1-2 pages shows 53.18dB / 53.97dB delta between carrier maximum power and local maximum emission in restrict band (2.3715GHz / 2.4985GHz). The emission of carrier strength list in the test result of channel 11 of CCK mode at the item 4.2.9 is 88.8dBuV/m, so the maximum field strength in restrict band is  $88.8 - 53.97 = 34.83$ dBuV/m which is under 54dBuV/m limit.


**NOTE 2:** The band edge emission plot on the following 3-4 pages shows 42.34dB / 39.62dB delta between carrier maximum power and local maximum emission in restrict band (2.3898GHz / 2.4841GHz). The emission of carrier strength list in the test result of channel 1 of OFDM mode at the item 4.2.9 is 69.1dBuV/m, so the maximum field strength in restrict band is  $69.1 - 42.34 = 26.76$ dBuV/m which is under 54dBuV/m limit.



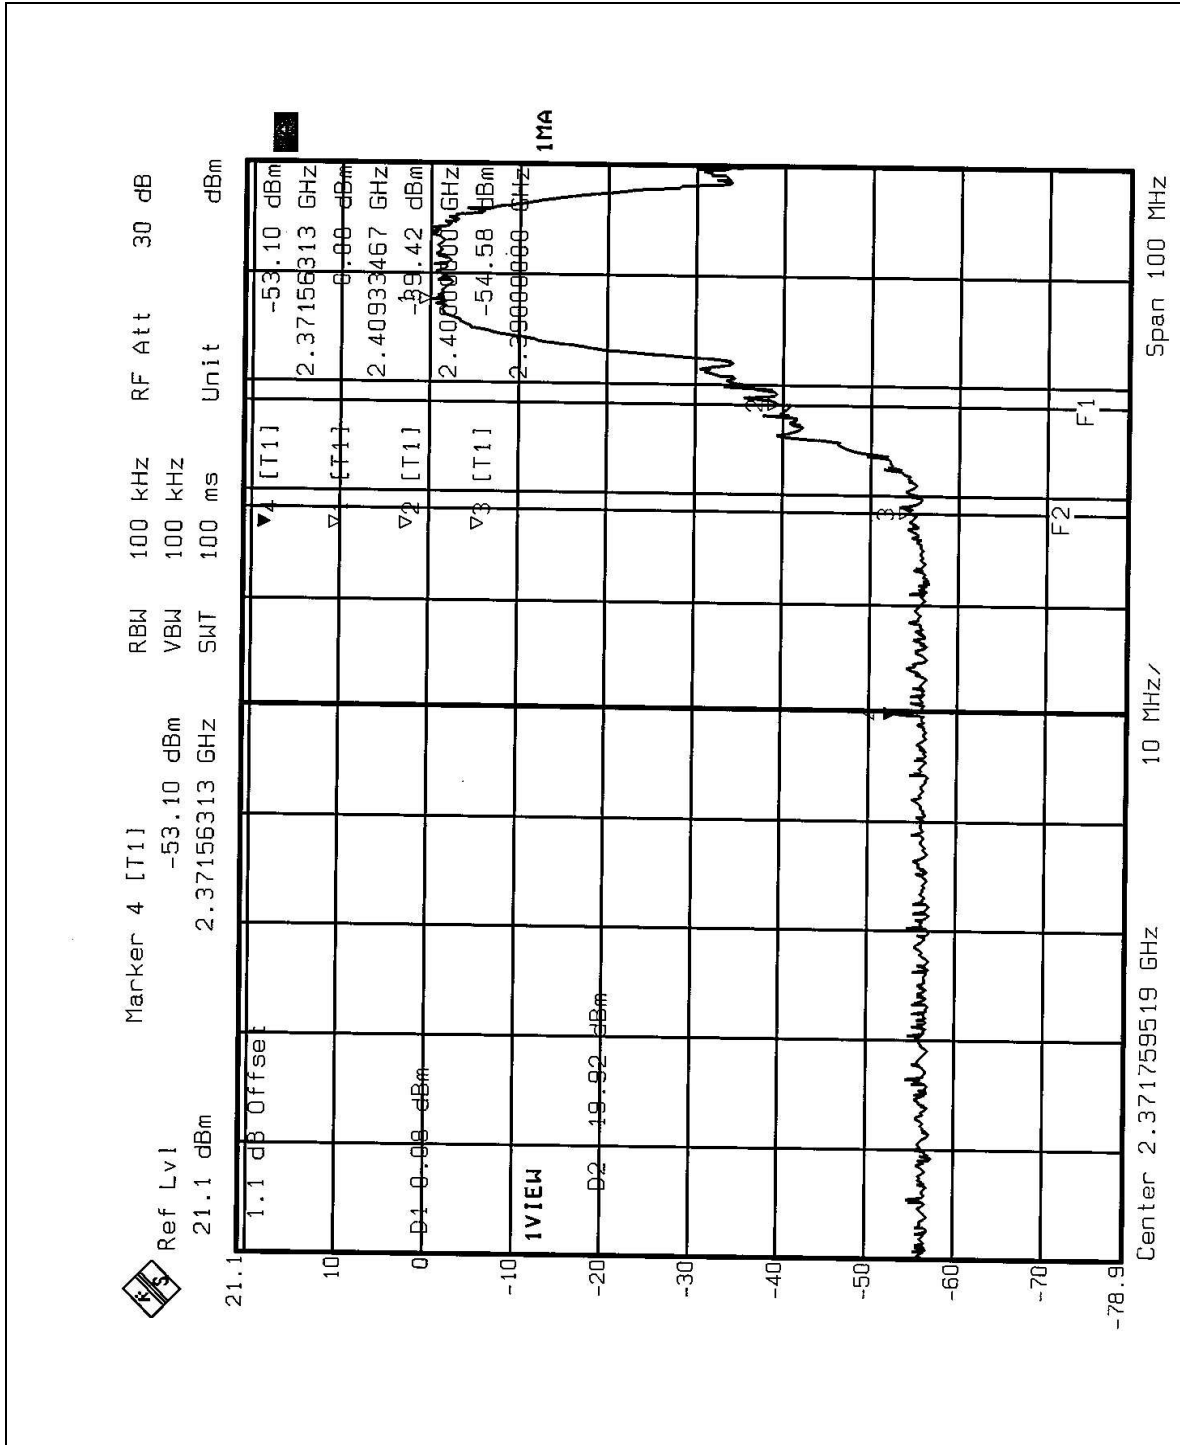

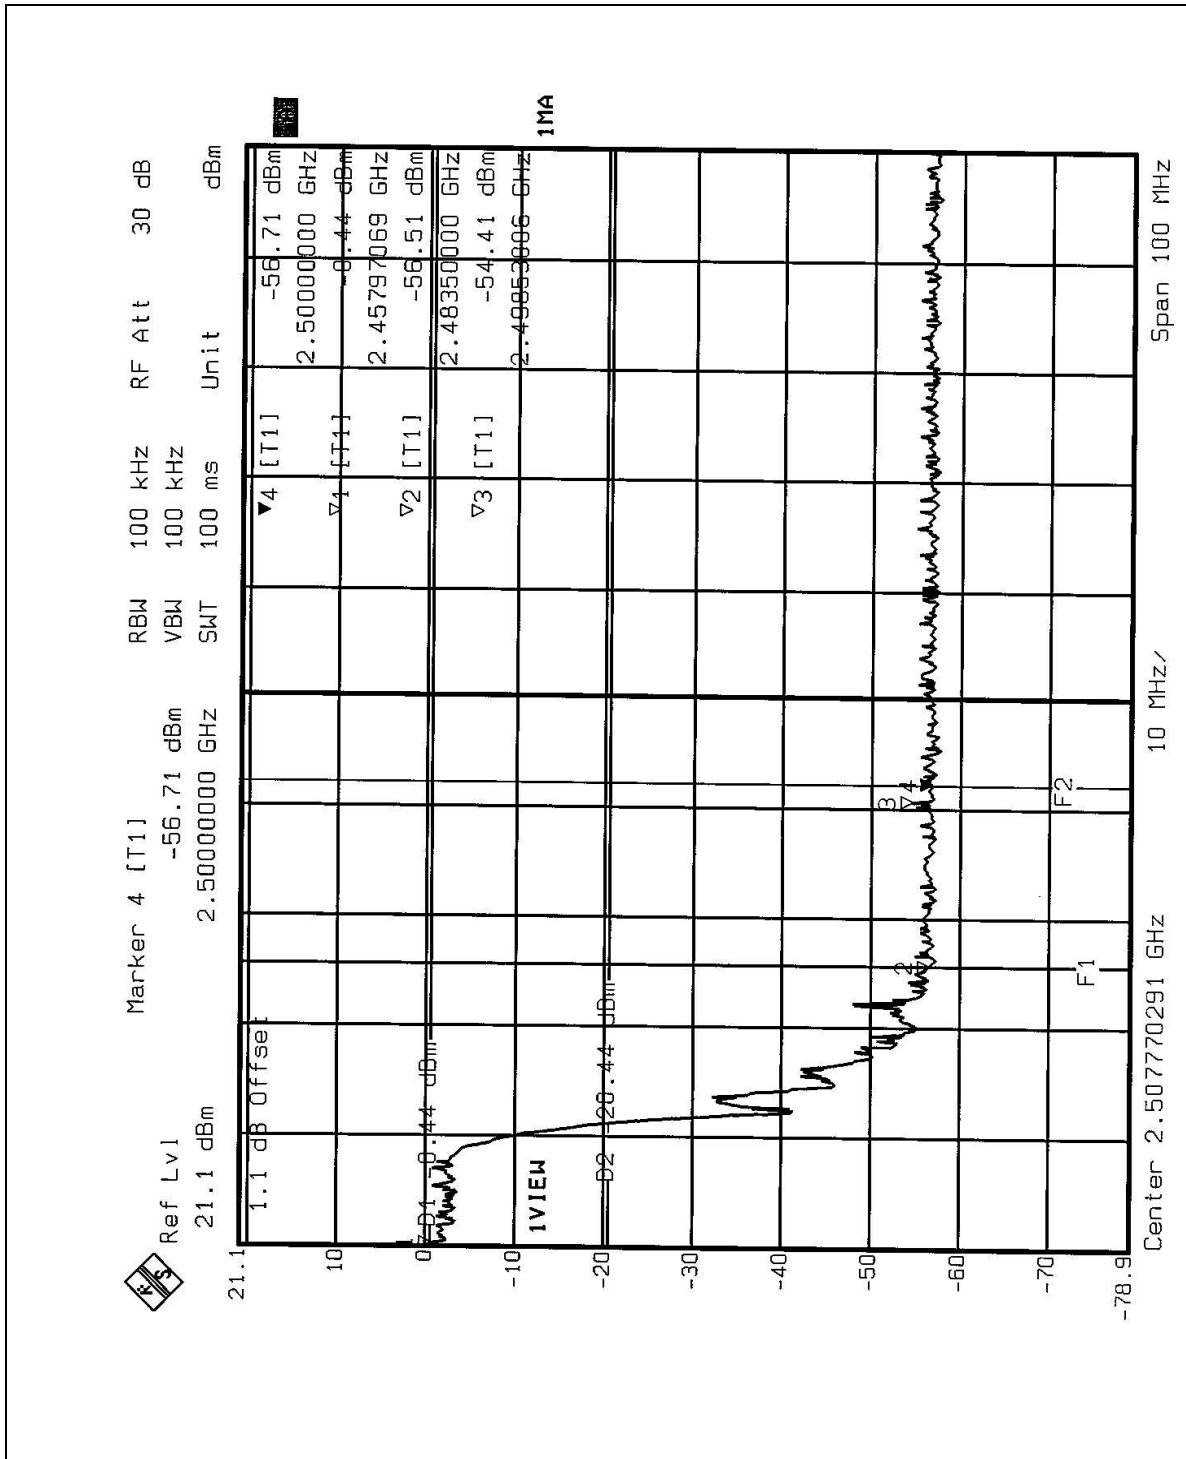

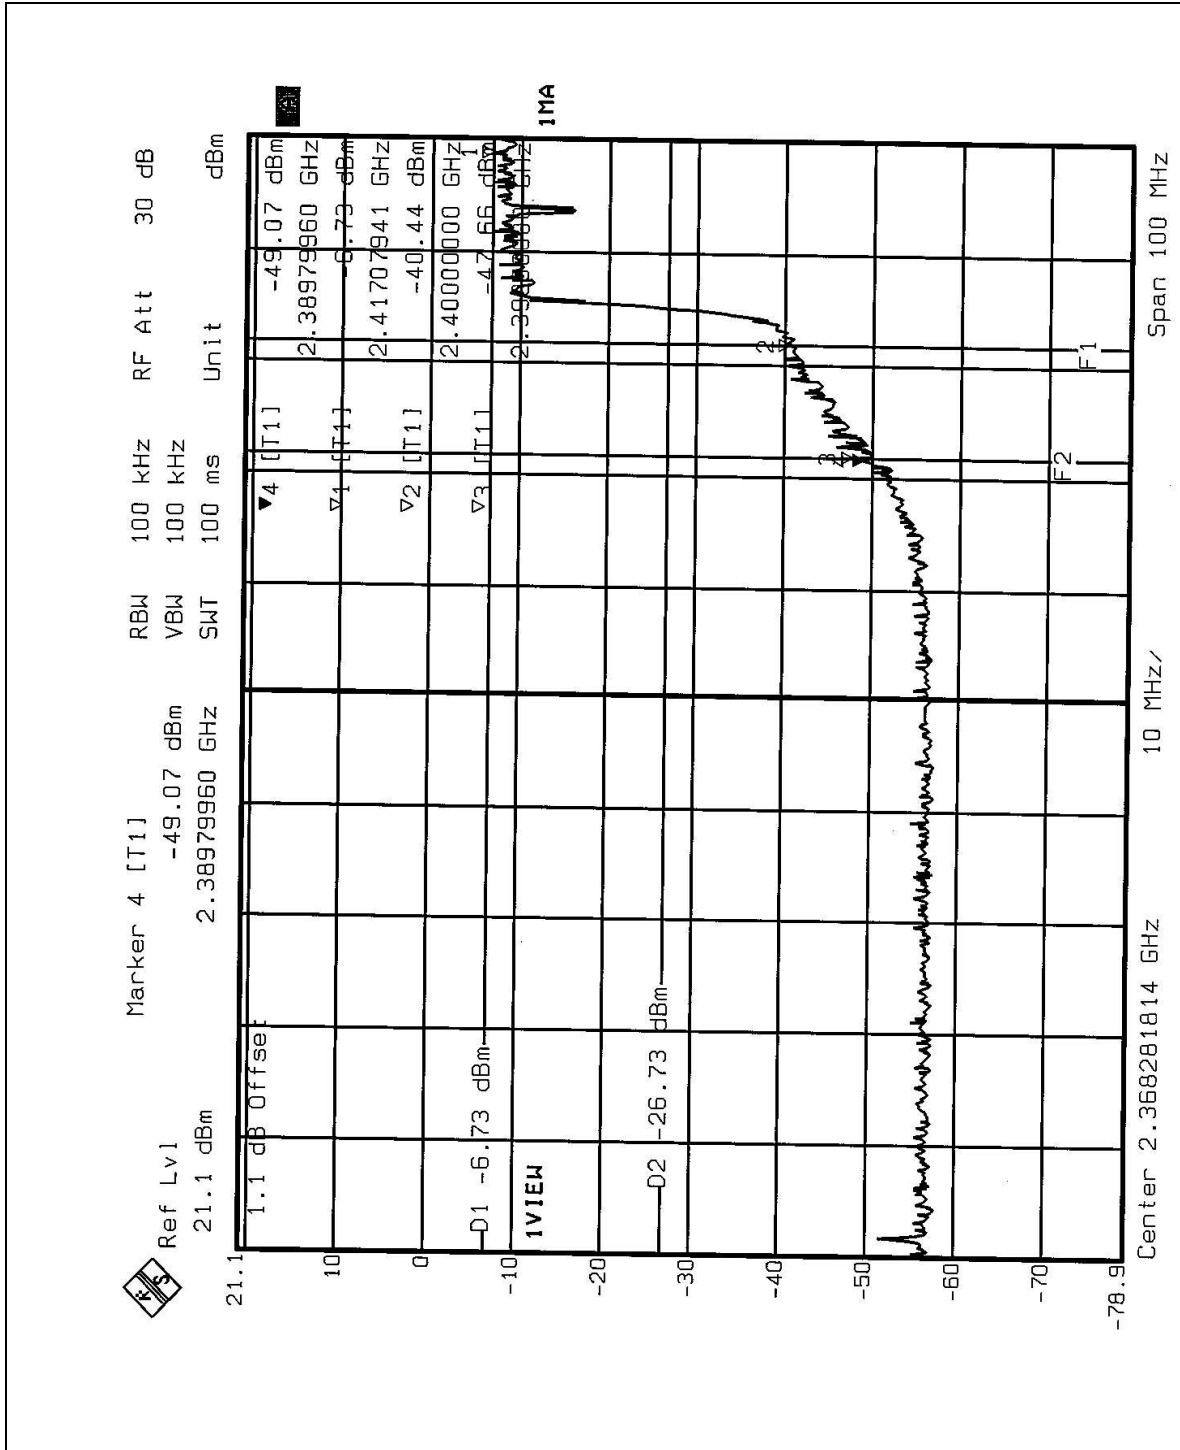

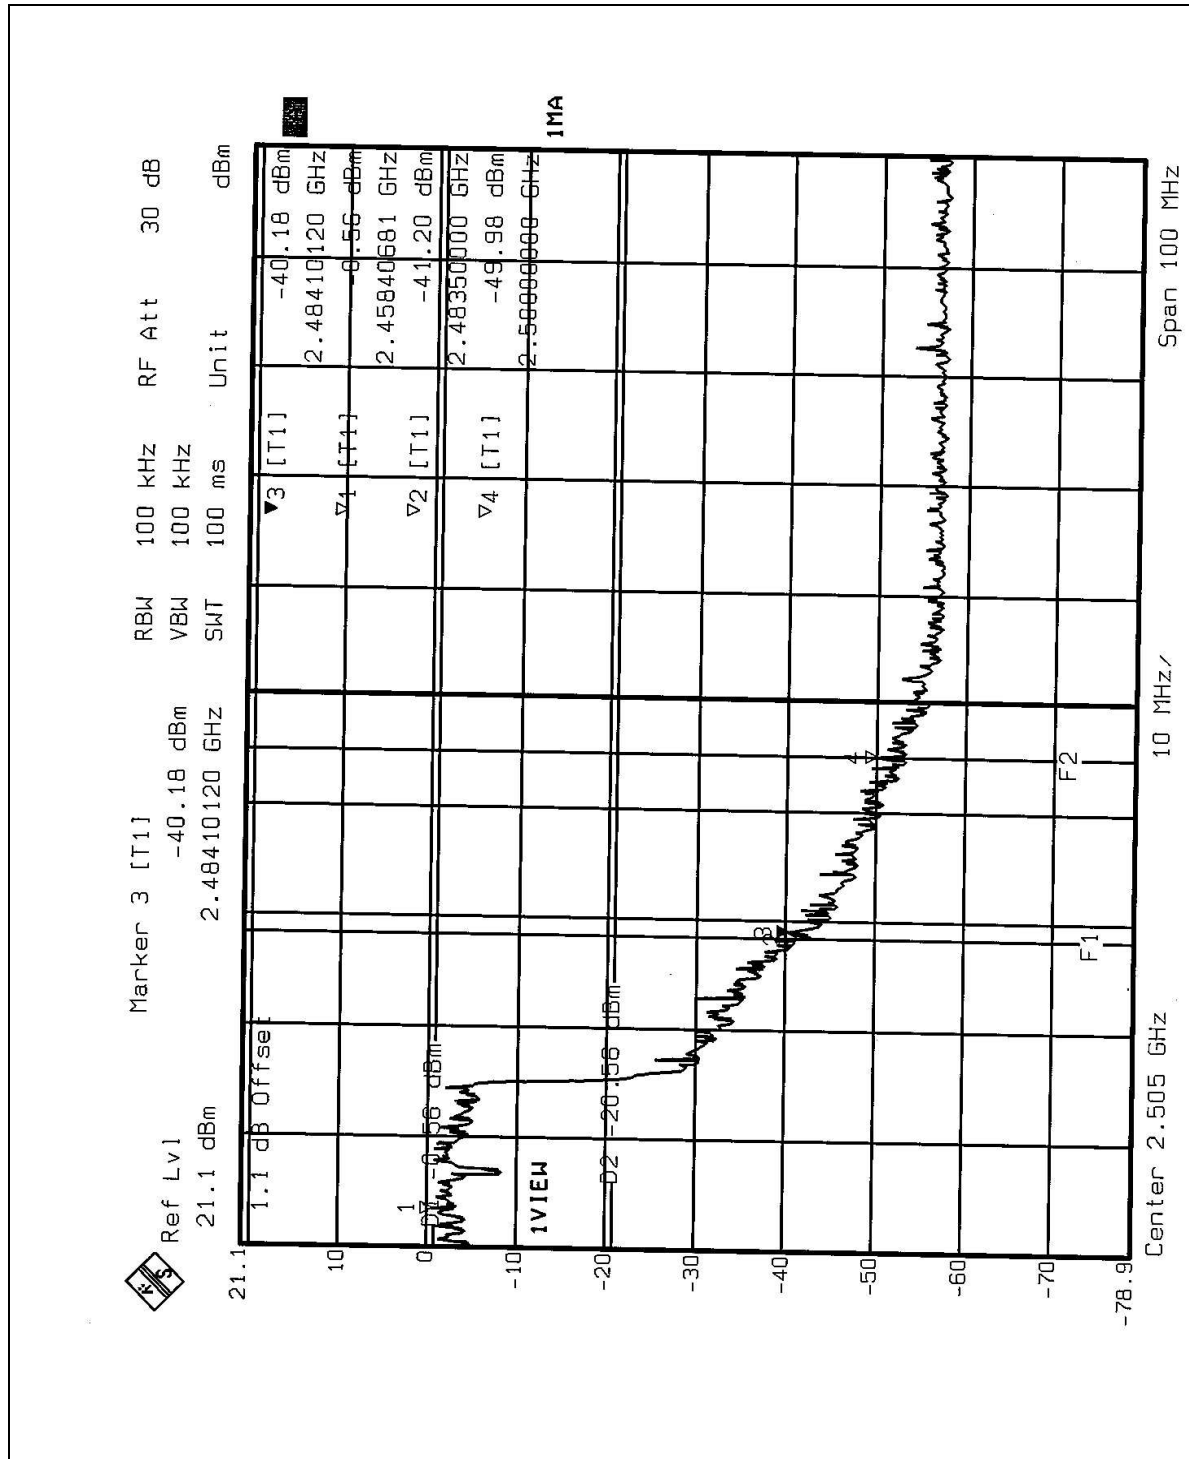



## **4.7 ANTENNA REQUIREMENT**

### **4.7.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **4.7.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna used in this product is Dipole Antenna. The antenna connector type is Reversed TNC. The maximum Gain of this antenna is 2dBi.

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

### CONDUCTED EMISSION TEST





### RADIATED EMISSION TEST





## 6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

<b>USA</b>	FCC, NVLAP
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>New Zealand</b>	MoC
<b>Norway</b>	NEMKO
<b>R.O.C.</b>	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC Lab:**

Tel: 886-35-935343

Fax: 886-35-935342

**Lin Kou Safety Lab:**

Tel: 886-2-26093195

Fax: 886-2-26093184

**Lin Kou RF&Telecom Lab**

Tel: 886-3-3270910

Fax: 886-3-3270892

**Email:** [service@mail.adt.com.tw](mailto:service@mail.adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.