



# FCC TEST REPORT

**REPORT NO.:** RF911026R01

**MODEL NO.:** WMP51AB

**RECEIVED:** Oct. 7, 2002

**TESTED:** Oct. 8 ~ Nov. 12, 2002

**APPLICANT:** The Linksys Group, Inc.

**ADDRESS:** 17401 Armstrong Ave., Irvine, CA 92614

**ISSUED BY:** Advance Data Technology Corporation

**LAB LOCATION:** 47 14<sup>th</sup> Lin, Chiapau Tsun, Linko, Taipei,  
Taiwan, R.O.C.

This test report consists of 121 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528  
ILAC MRA



Lab Code: 200102-0



## Table of Contents

|       |   |    |
|-------|---|----|
| 1.    | CERTIFICATION.....                                    | 5  |
| 2.    | SUMMARY OF TEST RESULTS .....                         | 6  |
| 3.    | GENERAL INFORMATION.....                              | 8  |
| 3.1   | GENERAL DESCRIPTION OF EUT .....                      | 8  |
| 3.2   | DESCRIPTION OF TEST MODES .....                       | 9  |
| 3.3   | GENERAL DESCRIPTION OF APPLIED STANDARDS .....        | 10 |
| 3.4   | DESCRIPTION OF SUPPORT UNITS.....                     | 11 |
| 4.    | TEST TYPES AND RESULTS (FOR PART 802.11b) .....       | 12 |
| 4.1   | CONDUCTED EMISSION MEASUREMENT.....                   | 12 |
| 4.1.1 | LIMITS OF CONDUCTED EMISSION MEASUREMENT .....        | 12 |
| 4.1.2 | TEST INSTRUMENTS .....                                | 12 |
| 4.1.3 | TEST PROCEDURES.....                                  | 13 |
| 4.1.4 | DEVIATION FROM TEST STANDARD .....                    | 13 |
| 4.1.5 | TEST SETUP .....                                      | 14 |
| 4.1.6 | EUT OPERATING CONDITIONS.....                         | 14 |
| 4.1.7 | TEST RESULTS .....                                    | 15 |
| 4.2   | RADIATED EMISSION MEASUREMENT.....                    | 21 |
| 4.2.1 | LIMITS OF RADIATED EMISSION MEASUREMENT .....         | 21 |
| 4.2.2 | TEST INSTRUMENTS .....                                | 22 |
| 4.2.3 | TEST PROCEDURES.....                                  | 23 |
| 4.2.4 | DEVIATION FROM TEST STANDARD .....                    | 23 |
| 4.2.5 | TEST SETUP .....                                      | 24 |
| 4.2.6 | EUT OPERATING CONDITIONS.....                         | 24 |
| 4.2.7 | TEST RESULTS .....                                    | 25 |
| 4.3   | 6dB BANDWIDTH MEASUREMENT .....                       | 29 |
| 4.3.1 | LIMITS OF 6dB BANDWIDTH MEASUREMENT .....             | 29 |
| 4.3.2 | TEST INSTRUMENTS .....                                | 29 |
| 4.3.3 | TEST PROCEDURE .....                                  | 30 |
| 4.3.4 | DEVIATION FROM TEST STANDARD .....                    | 30 |
| 4.3.5 | TEST SETUP .....                                      | 30 |
| 4.3.6 | EUT OPERATING CONDITIONS.....                         | 30 |
| 4.3.7 | TEST RESULTS .....                                    | 31 |
| 4.4   | MAXIMUM PEAK OUTPUT POWER .....                       | 35 |
| 4.4.1 | LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT ..... | 35 |
| 4.4.2 | INSTRUMENTS.....                                      | 35 |
| 4.4.3 | TEST PROCEDURES.....                                  | 36 |
| 4.4.4 | DEVIATION FROM TEST STANDARD .....                    | 36 |
| 4.4.5 | TEST SETUP .....                                      | 36 |
| 4.4.6 | EUT OPERATING CONDITIONS.....                         | 36 |



|       |   |    |
|-------|---|----|
| 4.4.7 | TEST RESULTS .....  | 37 |
| 4.5   | POWER SPECTRAL DENSITY MEASUREMENT .....                      | 38 |
| 4.5.1 | LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....            | 38 |
| 4.5.2 | TEST INSTRUMENTS .....  | 38 |
| 4.5.3 | TEST PROCEDURE .....  | 39 |
| 4.5.4 | DEVIATION FROM TEST STANDARD.....                             | 39 |
| 4.5.5 | TEST SETUP .....  | 39 |
| 4.5.6 | EUT OPERATING CONDITION .....                                 | 39 |
| 4.5.7 | TEST RESULTS .....  | 40 |
| 4.6   | BAND EDGES MEASUREMENT.....                                   | 44 |
| 4.6.1 | LIMITS OF BAND EDGES MEASUREMENT .....                        | 44 |
| 4.6.2 | TEST INSTRUMENTS .....  | 44 |
| 4.6.3 | TEST PROCEDURE .....  | 44 |
| 4.6.4 | DEVIATION FROM TEST STANDARD.....                             | 44 |
| 4.6.5 | EUT OPERATING CONDITION .....                                 | 45 |
| 4.6.6 | TEST RESULTS.....   | 45 |
| 4.7   | ANTENNA REQUIREMENT.....                                      | 48 |
| 4.7.1 | STANDARD APPLICABLE.....                                      | 48 |
| 4.7.2 | ANTENNA CONNECTED CONSTRUCTION .....                          | 48 |
| 5.    | TEST TYPES AND RESULTS (FOR PART 802.11a) .....               | 49 |
| 5.1   | CONDUCTED EMISSION MEASUREMENT.....                           | 49 |
| 5.1.1 | LIMITS OF CONDUCTED EMISSION MEASUREMENT .....                | 49 |
| 5.1.2 | TEST INSTRUMENTS .....  | 49 |
| 5.1.3 | TEST PROCEDURES.....  | 50 |
| 5.1.4 | DEVIATION FROM TEST STANDARD.....                             | 50 |
| 5.1.5 | TEST SETUP .....  | 51 |
| 5.1.6 | EUT OPERATING CONDITIONS.....                                 | 51 |
| 5.1.7 | TEST RESULTS .....  | 52 |
| 5.2   | RADIATED EMISSION MEASUREMENT.....                            | 54 |
| 5.2.1 | LIMITS OF RADIATED EMISSION MEASUREMENT .....                 | 54 |
| 5.2.2 | LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS ..... | 54 |
| 5.2.3 | TEST INSTRUMENTS .....  | 55 |
| 5.2.4 | TEST PROCEDURES.....  | 56 |
| 5.2.5 | DEVIATION FROM TEST STANDARD.....                             | 56 |
| 5.2.6 | TEST SETUP .....  | 57 |
| 5.2.7 | EUT OPERATING CONDITIONS.....                                 | 57 |
| 5.2.8 | TEST RESULTS .....  | 58 |
| 5.2.9 | TEST RESULTS .....  | 59 |
| 5.3   | PEAK TRANSMIT POWER MEASUREMENT.....                          | 66 |
| 5.3.1 | LIMITS OF PEAK TRANSMIT POWER MEASUREMENT .....               | 66 |
| 5.3.2 | TEST INSTRUMENTS .....  | 66 |
| 5.3.3 | TEST PROCEDURE .....  | 67 |
| 5.3.4 | DEVIATION FROM TEST STANDARD.....                             | 67 |



|       |  |     |
|-------|--|-----|
| 5.3.5 | TEST SETUP .....                                       | 67  |
| 5.3.6 | EUT OPERATING CONDITIONS.....                          | 67  |
| 5.3.7 | TEST RESULTS .....                                     | 68  |
| 5.4   | PEAK POWER EXCURSION MEASUREMENT.....                  | 84  |
| 5.4.1 | LIMITS OF PEAK POWER EXCURSION MEASUREMENT .....       | 84  |
| 5.4.2 | TEST INSTRUMENTS .....                                 | 84  |
| 5.4.3 | TEST PROCEDURE .....                                   | 85  |
| 5.4.4 | DEVIATION FROM TEST STANDARD .....                     | 85  |
| 5.4.5 | TEST SETUP .....                                       | 85  |
| 5.4.6 | EUT OPERATING CONDITIONS.....                          | 85  |
| 5.4.7 | TEST RESULTS .....                                     | 86  |
| 5.5   | PEAK POWER SPECTRAL DENSITY MEASUREMENT .....          | 95  |
| 5.5.1 | LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT..... | 95  |
| 5.5.2 | TEST INSTRUMENTS .....                                 | 95  |
| 5.5.3 | TEST PROCEDURES.....                                   | 96  |
| 5.5.4 | DEVIATION FROM TEST STANDARD .....                     | 96  |
| 5.5.5 | TEST SETUP .....                                       | 96  |
| 5.5.6 | EUT OPERATING CONDITIONS.....                          | 96  |
| 5.5.7 | TEST RESULTS .....                                     | 97  |
| 5.6   | FREQUENCY STABILITY .....                              | 106 |
| 5.6.1 | LIMITS OF FREQUENCY STABILITY MEASUREMENT .....        | 106 |
| 5.6.2 | TEST INSTRUMENTS .....                                 | 106 |
| 5.6.3 | TEST PROCEDURE .....                                   | 106 |
| 5.6.4 | DEVIATION FROM TEST STANDARD .....                     | 107 |
| 5.6.5 | TEST SETUP .....                                       | 107 |
| 5.6.6 | EUT OPERATING CONDITION .....                          | 107 |
| 5.6.7 | TEST RESULTS .....                                     | 108 |
| 5.7   | BAND EDGES MEASUREMENT.....                            | 109 |
| 5.7.1 | TEST INSTRUMENTS .....                                 | 109 |
| 5.7.2 | TEST PROCEDURE .....                                   | 109 |
| 5.7.3 | EUT OPERATING CONDITION .....                          | 109 |
| 5.7.4 | TEST RESULTS .....                                     | 109 |
| 5.8   | ANTENNA REQUIREMENT.....                               | 118 |
| 5.8.1 | STANDARD APPLICABLE .....                              | 118 |
| 5.8.2 | ANTENNA CONNECTED CONSTRUCTION .....                   | 118 |
| 6.    | PHOTOGRAPHS OF THE TEST CONFIGURATION .....            | 119 |
| 7.    | INFORMATION ON THE TESTING LABORATORIES .....          | 121 |



## 1. CERTIFICATION

**PRODUCT :** Dual-Band Wireless A+B PCI Adapter  
**BRAND NAME :** Linksys  
**MODEL NO. :** WMP51AB  
**APPLICANT :** The Linksys Group, Inc.  
**STANDARDS :** 47 CFR Part 15, Subpart C (Section 15.247),  
Subpart E (Section 15.407), ANSI C63.4-1992

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Oct. 8 ~ Nov. 12, 2002. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

CHECKED BY : Emily Lu , DATE : Nov. 25, 2002  
Emily Lu

APPROVED BY : Alan Lane , DATE : Nov. 25, 2002  
Dr. Alan Lane, Manager



## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| <b>APPLIED STANDARD: 47 CFR Part 15, Subpart C</b> |  |               |   |
|--|--|---------------|---|
| <b>Standard Section</b>                            | <b>Test Type and Limit</b>   | <b>Result</b> | <b>REMARK</b>   |
| 15.207   | AC Power Conducted Emission  | PASS          | Meet the requirement of limit<br>Minimum passing margin is -14.22dBuV at 1.809MHz |
| 15.247(a)(2)                                       | Spectrum Bandwidth of a Direct Sequence Spread Spectrum System<br>Limit: min. 500kHz   | PASS          | Meet the requirement of limit   |
| 15.247(b)  | Maximum Peak Output Power<br>Limit: max. 30dBm   | PASS          | Meet the requirement of limit   |
| 15.247(c)  | Radiated Emissions<br>Limit: Table 15.209  | PASS          | Meet the requirement of limit<br>Minimum passing margin is -1.4dBuV at 4874.00MHz |
| 15.247(d)  | Power Spectral Density<br>Limit: max. 8dBm   | PASS          | Meet the requirement of limit   |
| 15.247(c)  | Band Edge Measurement<br>Limit: 20dB less than the peak value of fundamental frequency | PASS          | Meet the requirement of limit   |



| <b>APPLIED STANDARD: 47 CFR Part 15, Subpart E</b> |  |               |  |
|--|--|---------------|--|
| <b>Standard Section</b>                            | <b>Test Type</b>   | <b>Result</b> | <b>REMARK</b>  |
| 15.407(b)(5)                                       | AC Power Conducted Emission                                    | PASS          | Meet the requirement of limit<br>Minimum passing margin is -14.40dBuV at 1.809MHz  |
| 15.407(b/1/2/3)(b)(5)                              | Electric Field Strength Spurious Emissions, 30 MHz – 40000 MHz | PASS          | Meet the requirement of limit<br>Minimum passing margin is -2.8dBuV at 10640.00MHz |
| 15.407(a/1/2/3)                                    | Peak Transmit Power  | PASS          | Meet the requirement of limit  |
| 15.407(a)(6)                                       | Peak Power Excursion   | PASS          | Meet the requirement of limit  |
| 15.407(a/1/2/3)                                    | Peak Power Spectral Density                                    | PASS          | Meet the requirement of limit  |
| 15.407(g)  | Frequency Stability  | PASS          | Meet the requirement of limit  |



### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                           |  |
|---------------------------|--|
| <b>PRODUCT</b>            | Dual-Band Wireless A+B PCI Adapter   |
| <b>MODEL NO.</b>          | WMP51AB  |
| <b>POWER SUPPLY</b>       | 5VDC from host equipment   |
| <b>MODULATION</b>         | 802.11b: DSSS<br>802.11a: OFDM   |
| <b>TRANSFER RATE</b>      | 802.11b: 1 / 2 / 5.5 / 11Mbps<br>802.11a: 6 to 54Mbps *(Turbo mode : up to 72Mbps) |
| <b>FREQUENCY RANGE</b>    | 802.11b: 2412MHz ~ 2462MHz<br>802.11a: 5.15GHz ~ 5.35GHz                           |
| <b>NUMBER OF CHANNEL</b>  | 802.11b: 11<br>802.11a: 8 for Normal mode / 3 for Turbo mode                       |
| <b>CHANNEL SPACING</b>    | 802.11b: 5MHz<br>802.11a: 20MHz for Normal mode / 40MHz for Turbo mode             |
| <b>OUTPUT POWER</b>       | 802.11b: 15.34dBm<br>802.11a: 16.65dBm   |
| <b>DATA CABLE</b>         | NA   |
| <b>ANTENNA TYPE</b>       | Dipole antenna   |
| <b>I/O PORTS</b>          | NA   |
| <b>ASSOCIATED DEVICES</b> | NA   |

**NOTE:**

1. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11b technology.
2. For more detailed features description, please refer to the manufacturer's specifications or User's Manual.





### 3.2 DESCRIPTION OF TEST MODES

For 802.11b: Eleven channels are provided to this EUT.

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 1       | 2412 MHz  | 7       | 2442 MHz  |
| 2       | 2417 MHz  | 8       | 2447 MHz  |
| 3       | 2422 MHz  | 9       | 2452 MHz  |
| 4       | 2427 MHz  | 10      | 2457 MHz  |
| 5       | 2432 MHz  | 11      | 2462 MHz  |
| 6       | 2437 MHz  |         |           |

**NOTE:**

1. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
2. Above 1 GHz, the channel 1, 6, and 11 were tested individually.

For 802.11a: Eight channels are provided to this EUT for Normal mode.

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 1       | 5180 MHz  | 7       | 5300 MHz  |
| 2       | 5200 MHz  | 8       | 5320 MHz  |
| 3       | 5220 MHz  |         |           |
| 4       | 5240 MHz  |         |           |
| 5       | 5260 MHz  |         |           |
| 6       | 5280 MHz  |         |           |

Five channels are provided to this EUT for Turbo Mode.

| Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|
| 1       | 5210 MHz  | 2       | 5250 MHz  |
| 3       | 5290 MHz  |         |           |

**NOTE:**

1. The EUT was transmitting at full power on the specified channel with a duty cycle of 99% (maximum allowed). The EUT was tested in both normal mode (channel bandwidth of approximately 30MHz) and turbo mode (channel bandwidth of approximately 60MHz).
2. "Normal Mode" allows data rates of up to 54Mbps. The device was, therefore, tested in Normal mode at the data rate that produced the highest output power for normal mode (6Mbps).
3. "Turbo Mode" allows data rates of up to 72Mbps. At data rates higher than 12Mbps the PA gain is reduced to improve signal fidelity. The device was, therefore, tested in turbo mode at the data rate that produced the highest output power for turbo mode (12Mbps).
4. Channel 1, 4, 5 and 8 are the closest frequencies to the band edge, were chosen for final test of Normal Mode.
5. Channel 1 ~ 3 were chosen for final test of turbo mode.



### **3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS**

The EUT is a Dual-Band Wireless A+B PCI Adapter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC CFR 47 Part 15, Subpart C. (15.247),  
Subpart E (15.407). ANSI C63.4 : 1992**

All tests have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT           | BRAND    | MODEL NO.  | SERIAL NO.        | FCC ID           |
|-----|-------------------|----------|------------|-------------------|------------------|
| 1   | PERSONAL COMPUTER | HP       | Brio BA410 | SG12902751        | FCC DoC APPROVED |
| 2   | COLOR MONITOR     | ADI      | CM100      | 026058T10200611 A | FCC DoC APPROVED |
| 3   | PS/2 KEYBOARD     | FORWARD  | FDA-104GA  | FDKB8110111       | F4ZDA-104G       |
| 4   | PS/2 MOUSE        | LOGITECH | M-S43      | LZE00703207       | DZL211106        |
| 5   | PRINTER           | EPSON    | LQ-300+    | DCGY017096        | FCC DoC APPROVED |
| 6   | MODEM             | ACEEX    | 1414       | 980020569         | IFAXDM1414       |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS  |
|-----|--|
| 1   | NA   |
| 2   | 1.8 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core                |
| 3   | 1.5 m foil shielded wire, terminated with PS/2 connector via metallic frame, w/o core.               |
| 4   | 1.8 m foil shielded wire, terminated with PS/2 connector via drain wire, w/o core.                   |
| 5   | 1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core |
| 6   | 1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.      |

**NOTE:** All power cords of the above support units are non shielded (1.8m).



## 4. TEST TYPES AND RESULTS (FOR PART 802.11b)

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB $\mu$ V) |          |
|-----------------------------|------------------------------|----------|
|                             | Quasi-peak                   | Average  |
| 0.15-0.5                    | 66 to 56                     | 56 to 46 |
| 0.5-5                       | 56                           | 46       |
| 5-30                        | 60                           | 50       |

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER                         | MODEL NO. | SERIAL NO.   | CALIBRATED UNTIL |
|--|-----------|--------------|------------------|
| ROHDE & SCHWARZ Test Receiver                      | ESCS30    | 834115/016   | Mar. 3, 2003     |
| ROHDE & SCHWARZ Artificial Mains Network (For EUT) | ESH3-Z5   | 847265/023   | Jan. 10, 2003    |
| * ROHDE & SCHWARZ 4-wire ISN                       | ENY41     | 838119/028   | Dec. 10, 2002    |
| * ROHDE & SCHWARZ 2-wire ISN                       | ENY22     | 837497/018   | Dec. 10, 2002    |
| EMCO L.I.S.N. (For peripherals)                    | 3825/2    | 9504-2359    | July 10, 2003    |
| Software   | Cond-V2L  | NA           | NA               |
| RF cable (JYEBAO)                                  | 5D-FB     | Cable-C03.01 | July 11, 2003    |
| Terminator (For EMCO LISN)                         | NA        | E1-01-300    | Feb. 20, 2003    |
| Terminator (For EMCO LISN)                         | NA        | E1-01-301    | Feb. 20, 2003    |
| Shielded Room                                      | Site 3    | ADT-C03      | NA               |
| VCCI Site Registration No.                         | Site 3    | C-274        | NA               |

- NOTE:**
1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. “\*”: These equipment are used for conducted telecom port test only (if tested).
  4. The test was performed in ADT Open Site No. 3.




#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

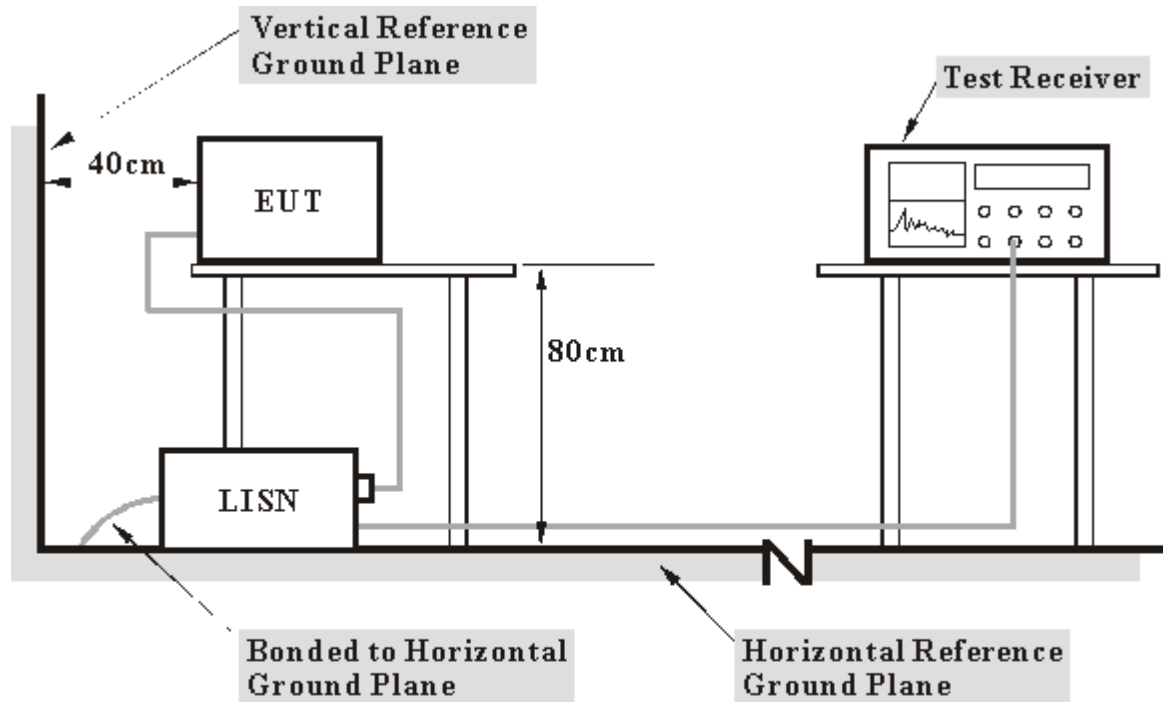

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Plug the EUT into the computer system placed on a testing table.
- b. The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system sent "H" messages to its screen.
- d. The computer system sent "H" messages to modem.
- e. The computer system sent "H" messages to printer, and the printer prints them on paper.




4.1.7 TEST RESULTS

|                                 |                                    |                              |          |
|---------------------------------|------------------------------------|------------------------------|----------|
| <b>EUT</b>                      | Dual-Band Wireless A+B PCI Adapter | <b>MODEL</b>                 | WMP51AB  |
| <b>MODE</b>                     | Channel 1                          | <b>6dB BANDWIDTH</b>         | 9 kHz    |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                       | <b>PHASE</b>                 | Line (L) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 62%RH, 1005 hPa          | <b>TESTED BY:</b> Cody Chang |          |

| No | Freq. (MHz) | Corr. Factor (dB) | Reading Value [dB (uV)] |     | Emission Level [dB (uV)] |     | Limit [dB (uV)] |       | Margin (dB) |     |
|----|-------------|-------------------|-------------------------|-----|--------------------------|-----|-----------------|-------|-------------|-----|
|    |             |                   | QP.                     | AV. | QP.                      | AV. | QP.             | AV.   | QP.         | AV. |
| 1  | 0.227       | 0.10              | 44.64                   | -   | 44.74                    | -   | 62.57           | 52.57 | -17.83      | -   |
| 2  | 0.478       | 0.11              | 38.05                   | -   | 38.14                    | -   | 56.37           | 46.37 | -18.23      | -   |
| 3  | 0.666       | 0.14              | 39.05                   | -   | 39.19                    | -   | 56.00           | 46.00 | -16.81      | -   |
| 4  | 1.809       | 0.28              | 41.50                   | -   | 41.78                    | -   | 56.00           | 46.00 | -14.22      | -   |
| 5  | 2.953       | 0.40              | 37.90                   | -   | 38.30                    | -   | 56.00           | 46.00 | -17.70      | -   |
| 6  | 4.094       | 0.50              | 39.60                   | -   | 40.10                    | -   | 56.00           | 46.00 | -15.90      | -   |

- Remarks:
1. "\*": Undetectable
  2. QP. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

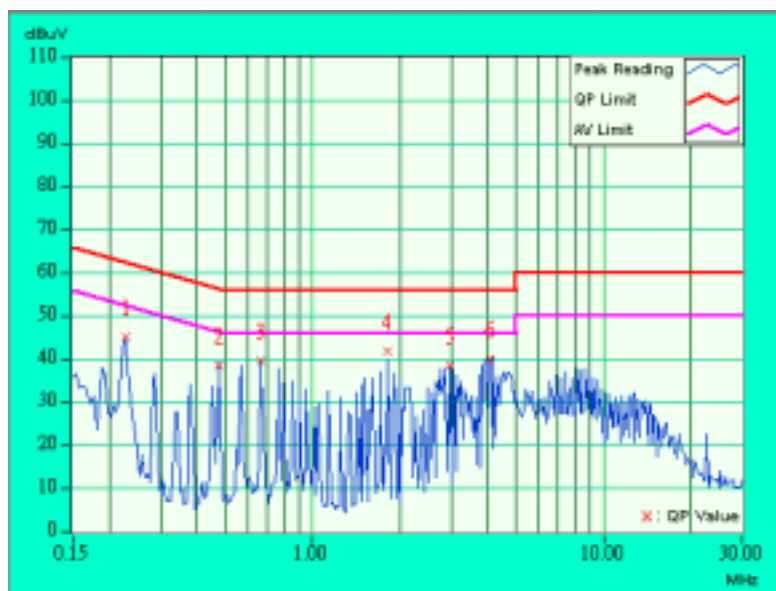




|                                 |                                    |                              |             |
|---------------------------------|------------------------------------|------------------------------|-------------|
| <b>EUT</b>                      | Dual-Band Wireless A+B PCI Adapter | <b>MODEL</b>                 | WMP51AB     |
| <b>MODE</b>                     | Channel 1                          | <b>6dB BANDWIDTH</b>         | 9 kHz       |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                       | <b>PHASE</b>                 | Neutral (N) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 62%RH, 1005 hPa          | <b>TESTED BY:</b> Cody Chang |             |

| No | Freq. (MHz) | Corr. Factor (dB) | Reading Value [dB (uV)] |     | Emission Level [dB (uV)] |     | Limit [dB (uV)] |       | Margin (dB) |     |
|----|-------------|-------------------|-------------------------|-----|--------------------------|-----|-----------------|-------|-------------|-----|
|    |             |                   | QP.                     | AV. | QP.                      | AV. | QP.             | AV.   | QP.         | AV. |
| 1  | 0.226       | 0.10              | 44.64                   | -   | 44.74                    | -   | 62.61           | 52.61 | -17.87      | -   |
| 2  | 0.475       | 0.11              | 38.58                   | -   | 38.69                    | -   | 56.42           | 46.42 | -17.72      | -   |
| 3  | 0.666       | 0.14              | 38.63                   | -   | 38.77                    | -   | 56.00           | 46.00 | -17.23      | -   |
| 4  | 1.809       | 0.28              | 39.87                   | -   | 40.15                    | -   | 56.00           | 46.00 | -15.85      | -   |
| 5  | 2.952       | 0.35              | 37.56                   | -   | 37.91                    | -   | 56.00           | 46.00 | -18.09      | -   |
| 6  | 4.284       | 0.40              | 35.04                   | -   | 35.44                    | -   | 56.00           | 46.00 | -20.56      | -   |

- Remarks:
1. "x": Undetectable
  2. QP. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

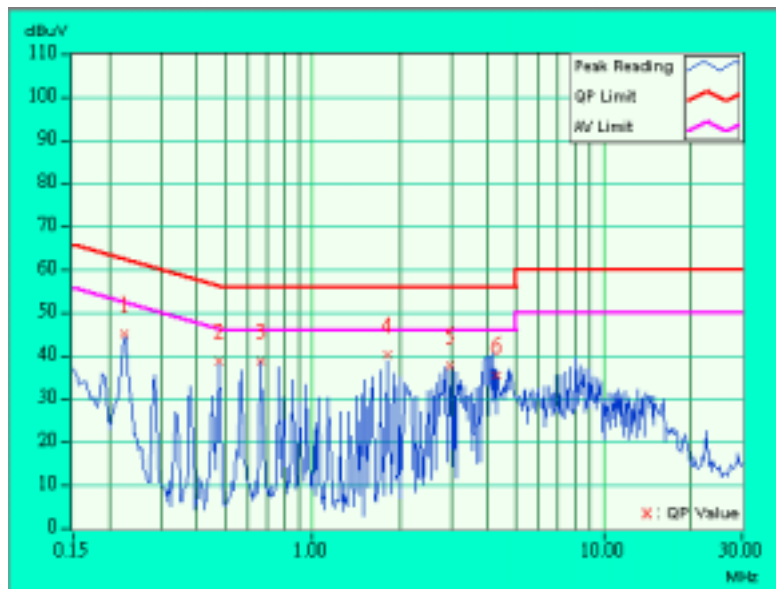






|                                 |                                    |                              |          |
|---------------------------------|------------------------------------|------------------------------|----------|
| <b>EUT</b>                      | Dual-Band Wireless A+B PCI Adapter | <b>MODEL</b>                 | WMP51AB  |
| <b>MODE</b>                     | Channel 6                          | <b>6dB BANDWIDTH</b>         | 9 kHz    |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                       | <b>PHASE</b>                 | Line (L) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 62%RH, 1005 hPa          | <b>TESTED BY:</b> Cody Chang |          |

| No | Freq. (MHz) | Corr. Factor (dB) | Reading Value [dB (uV)] |     | Emission Level [dB (uV)] |     | Limit [dB (uV)] |       | Margin (dB) |     |
|----|-------------|-------------------|-------------------------|-----|--------------------------|-----|-----------------|-------|-------------|-----|
|    |             |                   | QP.                     | AV. | QP.                      | AV. | QP.             | AV.   | QP.         | AV. |
| 1  | 0.228       | 0.10              | 42.11                   | -   | 42.21                    | -   | 62.52           | 52.52 | -20.31      | -   |
| 2  | 0.474       | 0.11              | 37.79                   | -   | 37.90                    | -   | 56.44           | 46.44 | -18.54      | -   |
| 3  | 0.666       | 0.14              | 38.65                   | -   | 38.79                    | -   | 56.00           | 46.00 | -17.21      | -   |
| 4  | 1.809       | 0.28              | 40.65                   | -   | 40.93                    | -   | 56.00           | 46.00 | -15.07      | -   |
| 5  | 2.951       | 0.40              | 36.76                   | -   | 37.16                    | -   | 56.00           | 46.00 | -18.84      | -   |
| 6  | 4.190       | 0.50              | 38.85                   | -   | 39.35                    | -   | 56.00           | 46.00 | -16.65      | -   |

- Remarks:
1. "\*": Undetectable
  2. QP. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

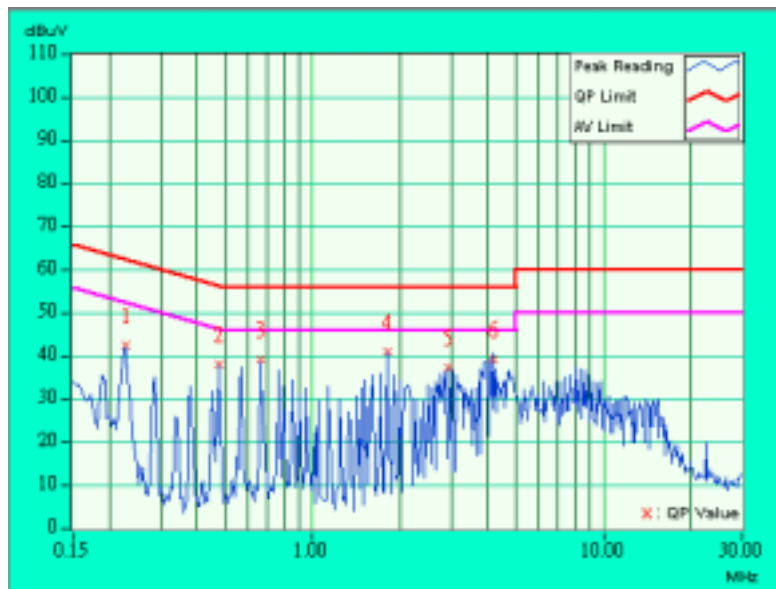




|                                 |                                    |                              |             |
|---------------------------------|------------------------------------|------------------------------|-------------|
| <b>EUT</b>                      | Dual-Band Wireless A+B PCI Adapter | <b>MODEL</b>                 | WMP51AB     |
| <b>MODE</b>                     | Channel 6                          | <b>6dB BANDWIDTH</b>         | 9 kHz       |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                       | <b>PHASE</b>                 | Neutral (N) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 62%RH, 1005 hPa          | <b>TESTED BY:</b> Cody Chang |             |

| No | Freq. (MHz) | Corr. Factor (dB) | Reading Value [dB (uV)] |     | Emission Level [dB (uV)] |     | Limit [dB (uV)] |       | Margin (dB) |     |
|----|-------------|-------------------|-------------------------|-----|--------------------------|-----|-----------------|-------|-------------|-----|
|    |             |                   | QP.                     | AV. | QP.                      | AV. | QP.             | AV.   | QP.         | AV. |
| 1  | 0.227       | 0.10              | 42.99                   | -   | 43.09                    | -   | 62.57           | 52.57 | -19.48      | -   |
| 2  | 0.477       | 0.11              | 37.89                   | -   | 38.00                    | -   | 56.40           | 46.40 | -18.39      | -   |
| 3  | 0.666       | 0.14              | 38.25                   | -   | 38.39                    | -   | 56.00           | 46.00 | -17.61      | -   |
| 4  | 1.809       | 0.28              | 39.39                   | -   | 39.67                    | -   | 56.00           | 46.00 | -16.33      | -   |
| 5  | 2.951       | 0.35              | 36.52                   | -   | 36.87                    | -   | 56.00           | 46.00 | -19.13      | -   |
| 6  | 3.996       | 0.40              | 38.33                   | -   | 38.73                    | -   | 56.00           | 46.00 | -17.27      | -   |

- Remarks:
1. "\*\*": Undetectable
  2. QP. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

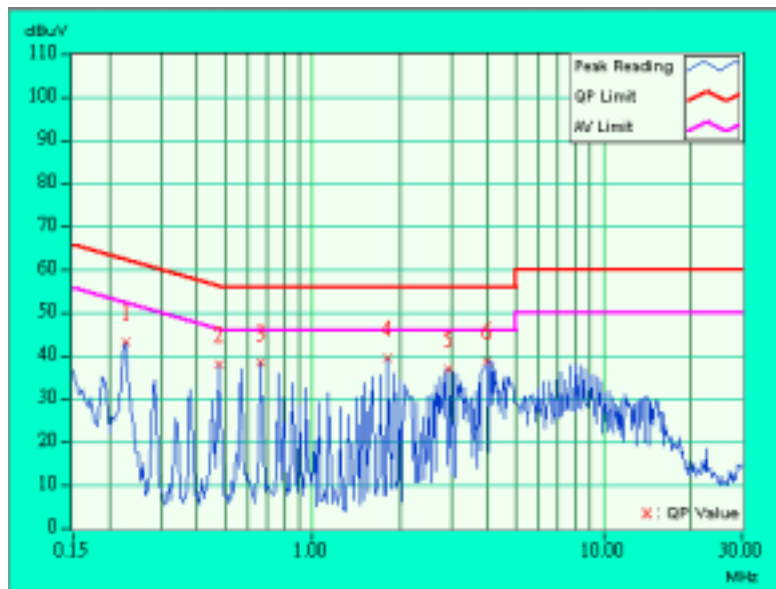




|                                 |                                    |                              |          |
|---------------------------------|------------------------------------|------------------------------|----------|
| <b>EUT</b>                      | Dual-Band Wireless A+B PCI Adapter | <b>MODEL</b>                 | WMP51AB  |
| <b>MODE</b>                     | Channel 11                         | <b>6dB BANDWIDTH</b>         | 9 kHz    |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                       | <b>PHASE</b>                 | Line (L) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 62%RH, 1005 hPa          | <b>TESTED BY:</b> Cody Chang |          |

| No | Freq. (MHz) | Corr. Factor (dB) | Reading Value [dB (uV)] |     | Emission Level [dB (uV)] |     | Limit [dB (uV)] |       | Margin (dB) |     |
|----|-------------|-------------------|-------------------------|-----|--------------------------|-----|-----------------|-------|-------------|-----|
|    |             |                   | QP.                     | AV. | QP.                      | AV. | QP.             | AV.   | QP.         | AV. |
| 1  | 0.224       | 0.10              | 41.47                   | -   | 41.57                    | -   | 62.66           | 52.66 | -21.09      | -   |
| 2  | 0.476       | 0.11              | 38.55                   | -   | 38.66                    | -   | 56.42           | 46.42 | -17.75      | -   |
| 3  | 0.666       | 0.14              | 38.60                   | -   | 38.74                    | -   | 56.00           | 46.00 | -17.26      | -   |
| 4  | 1.809       | 0.28              | 40.96                   | -   | 41.24                    | -   | 56.00           | 46.00 | -14.76      | -   |
| 5  | 3.047       | 0.40              | 36.87                   | -   | 37.27                    | -   | 56.00           | 46.00 | -18.73      | -   |
| 6  | 4.188       | 0.50              | 39.69                   | -   | 40.19                    | -   | 56.00           | 46.00 | -15.81      | -   |

- Remarks:
1. "\*": Undetectable
  2. QP. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

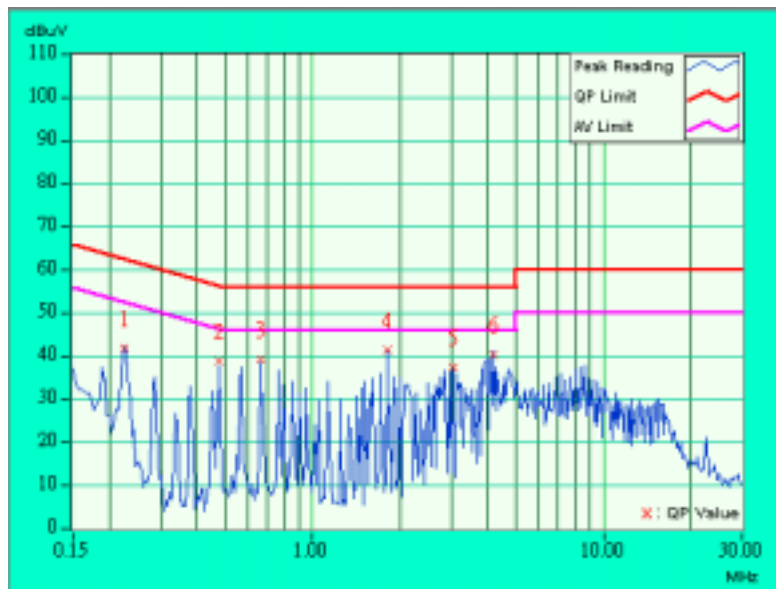




|                                 |                                    |                              |             |
|---------------------------------|------------------------------------|------------------------------|-------------|
| <b>EUT</b>                      | Dual-Band Wireless A+B PCI Adapter | <b>MODEL</b>                 | WMP51AB     |
| <b>MODE</b>                     | Channel 11                         | <b>6dB BANDWIDTH</b>         | 9 kHz       |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                       | <b>PHASE</b>                 | Neutral (N) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 62%RH, 1005 hPa          | <b>TESTED BY:</b> Cody Chang |             |

| No | Freq. | Corr. Factor | Reading Value [dB (uV)] |     | Emission Level [dB (uV)] |     | Limit [dB (uV)] |       | Margin (dB) |     |
|----|-------|--------------|-------------------------|-----|--------------------------|-----|-----------------|-------|-------------|-----|
|    | [MHz] | (dB)         | QP.                     | AV. | QP.                      | AV. | QP.             | AV.   | QP.         | AV. |
| 1  | 0.228 | 0.10         | 42.31                   | -   | 42.41                    | -   | 62.52           | 52.52 | -20.11      | -   |
| 2  | 0.476 | 0.11         | 38.53                   | -   | 38.64                    | -   | 56.42           | 46.42 | -17.77      | -   |
| 3  | 0.666 | 0.14         | 38.46                   | -   | 38.60                    | -   | 56.00           | 46.00 | -17.40      | -   |
| 4  | 1.809 | 0.28         | 40.20                   | -   | 40.48                    | -   | 56.00           | 46.00 | -15.52      | -   |
| 5  | 3.047 | 0.35         | 36.97                   | -   | 37.32                    | -   | 56.00           | 46.00 | -18.68      | -   |
| 6  | 4.094 | 0.40         | 39.22                   | -   | 39.62                    | -   | 56.00           | 46.00 | -16.38      | -   |

- Remarks:
1. "\*\*": Undetectable
  2. QP. and AV. are abbreviations of quasi-peak and average individually.
  3. "-": NA
  4. The emission levels of other frequencies were very low against the limit.
  5. Margin value = Emission level - Limit value
  6. Emission Level = Correction Factor + Reading Value.

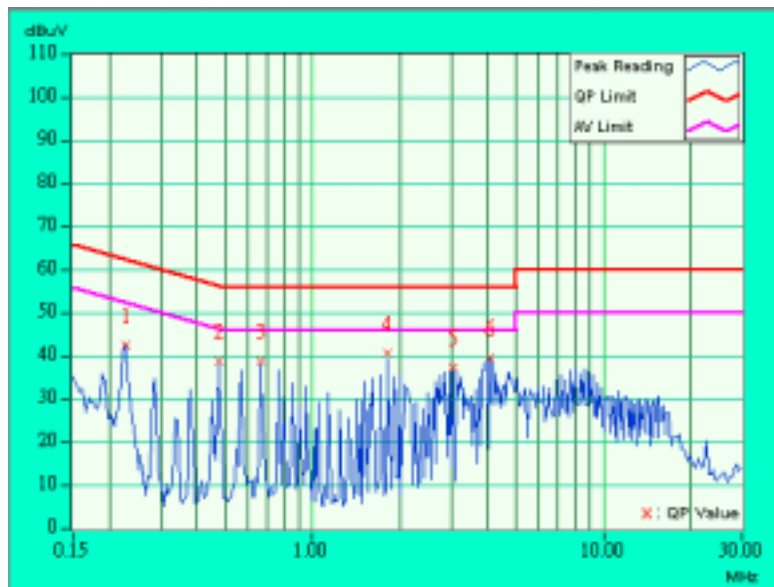



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| Frequencies (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009-0.490       | 2400/F(kHz)                       | 300                           |
| 0.490-1.705       | 24000/F(kHz)                      | 30                            |
| 1.705-30.0        | 30                                | 30                            |
| 30-88             | 100                               | 3                             |
| 88-216            | 150                               | 3                             |
| 216-960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



## 4.2.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER         | MODEL NO.            | SERIAL NO.               | CALIBRATED UNTIL |
|------------------------------------|----------------------|--------------------------|------------------|
| * HP Spectrum Analyzer             | 8590L                | 3544A01176               | May 13, 2003     |
| * HP Preamplifier                  | 8447D                | 2944A08485               | Apr. 29, 2003    |
| * HP Preamplifier                  | 8449B                | 3008A01201               | Dec. 06, 2002    |
| * HP Preamplifier                  | 8449B                | 3008A01292               | Aug. 7, 2003     |
| * ROHDE & SCHWARZ TEST RECEIVER    | ESMI                 | 839013/007<br>839379/002 | Jan. 27, 2003    |
| SCHWARZBECK Tunable Dipole Antenna | VHA 9103<br>UHA 9105 | E101051<br>E101055       | Nov. 23, 2002    |
| * CHASE BILOG Antenna              | CBL6112A             | 2221                     | Aug. 2, 2003     |
| * SCHWARZBECK Horn Antenna         | BBHA9120-D1          | D130                     | Jul. 3, 2003     |
| * EMCO Horn Antenna                | 3115                 | 9312-4192                | Apr. 9, 2003     |
| * EMCO Turn Table                  | 1060                 | 1115                     | NA               |
| * SHOSHIN Tower                    | AP-4701              | A6Y005                   | NA               |
| * Software                         | AS61D4               | NA                       | NA               |
| * ANRITSU RF Switches              | MP59B                | M35046                   | Jan. 25, 2003    |
| * TIMES RF cable                   | LMR-600              | CABLE-ST5-01             | Jul. 12, 2003    |
| Open Field Test Site               | Site 5               | ADT-R05                  | Jul. 19, 2003    |
| VCCI Site Registration No.         | Site 5               | R-1039                   | NA               |

- NOTE:**
1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.
  2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
  3. "\*" = These equipment are used for the final measurement.
  4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  5. The test was performed in ADT Open Site No. 5.



### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.5 TEST SETUP

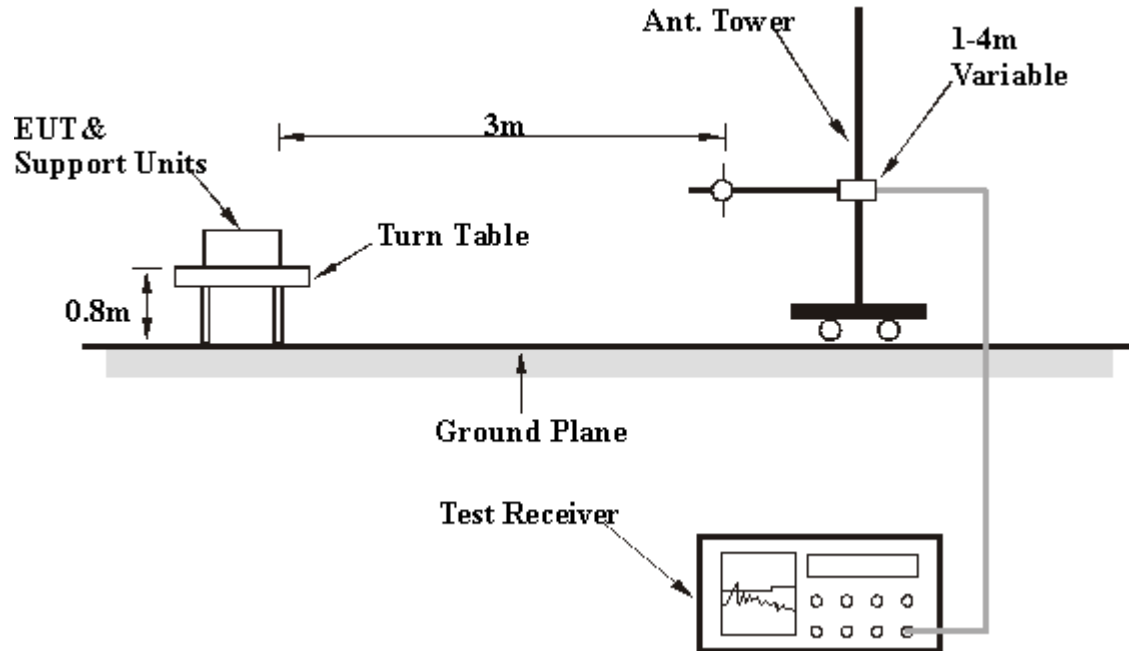

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6





## 4.2.7 TEST RESULTS

|                                 |                                    |                              |             |
|---------------------------------|------------------------------------|------------------------------|-------------|
| <b>EUT</b>                      | Dual-Band Wireless A+B PCI Adapter | <b>MODEL</b>                 | WMP51AB     |
| <b>MODE</b>                     | Channel 11                         | <b>FREQUENCY RANGE</b>       | 30-1000 MHz |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                       | <b>DETECTOR FUNCTION</b>     | Quasi-Peak  |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 60%RH, 1005 hPa          | <b>TESTED BY:</b> Gary Chang |             |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|----------------------|--------------------------|
| 1   | 160.00      | 26.4 QP                 | 43.50          | -17.10      | 1.40H              | 30                   | 13.15            | 9.62                  | 3.62              | 0.00                 | -13.25                   |
| 2   | 192.00      | 27.0 QP                 | 43.50          | -16.50      | 1.00H              | 3                    | 14.04            | 8.95                  | 4.00              | 0.00                 | -12.97                   |
| 3   | 320.00      | 26.0 QP                 | 46.00          | -20.00      | 1.19H              | 3                    | 7.03             | 13.62                 | 5.34              | 0.00                 | -18.97                   |
| 4   | 384.00      | 28.0 QP                 | 46.00          | -18.00      | 1.35H              | 1                    | 6.48             | 15.50                 | 6.02              | 0.00                 | -21.53                   |
| 5   | 480.00      | 27.0 QP                 | 46.00          | -19.00      | 1.04H              | 3                    | 3.57             | 16.92                 | 6.51              | 0.00                 | -23.43                   |
| 6   | 576.00      | 28.0 QP                 | 46.00          | -18.00      | 1.25H              | 43                   | 2.05             | 18.28                 | 7.67              | 0.00                 | -25.95                   |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|----------------------|--------------------------|
| 1   | 160.00      | 26.8 QP                 | 43.50          | -16.70      | 1.40V              | 293                  | 13.55            | 9.62                  | 3.62              | 0.00                 | -13.25                   |
| 2   | 192.00      | 28.0 QP                 | 43.50          | -15.50      | 1.07V              | 288                  | 15.04            | 8.95                  | 4.00              | 0.00                 | -12.96                   |
| 3   | 224.00      | 27.0 QP                 | 46.00          | -19.00      | 1.29V              | 1                    | 12.24            | 10.41                 | 4.36              | 0.00                 | -14.77                   |
| 4   | 320.00      | 30.0 QP                 | 46.00          | -16.00      | 1.67V              | 29                   | 11.03            | 13.62                 | 5.34              | 0.00                 | -18.97                   |
| 5   | 384.00      | 28.0 QP                 | 46.00          | -18.00      | 1.44V              | 299                  | 6.48             | 15.50                 | 6.02              | 0.00                 | -21.52                   |
| 6   | 480.00      | 25.0 QP                 | 46.00          | -21.00      | 1.35V              | 3                    | 1.57             | 16.92                 | 6.51              | 0.00                 | -23.43                   |
| 7   | 576.00      | 27.0 QP                 | 46.00          | -19.00      | 1.09V              | 20                   | 1.05             | 18.28                 | 7.67              | 0.00                 | -25.95                   |

- NOTE:**
- 1 Emission level = Raw Value - Correction Factor
  - 2 Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss  
(External Preamp. Gain = 0, when the test receiver is used for the test.)
  - 3 The other emission levels were very low against the limit.
  - 4 Margin value = Emission level - Limit value



|                                 |                                       |                              |                          |
|---------------------------------|---------------------------------------|------------------------------|--------------------------|
| <b>EUT</b>                      | Dual-Band Wireless A+B<br>PCI Adapter | <b>MODEL</b>                 | WMP51AB                  |
| <b>MODE</b>                     | Channel 1                             | <b>FREQUENCY RANGE</b>       | Above 1000 MHz           |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                          | <b>DETECTOR FUNCTION</b>     | Peak(PK)<br>Average (AV) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 60%RH,<br>1005 hPa          | <b>TESTED BY:</b> Gary Chang |                          |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|----------------------|--------------------------|
| 1   | *2412.00    | 103.2 PK                |                |             | 1.20H              | 29                   | 73.00            | 27.67                 | 2.53              | 0.00                 | -30.20                   |
| 2   | *2412.00    | 97.2 AV                 |                |             | 1.20H              | 29                   | 69.00            | 27.67                 | 2.53              | 0.00                 | -30.20                   |
| 3   | 4824.00     | 45.8 PK                 | 74.00          | -28.20      | 1.33H              | 3                    | 47.00            | 31.52                 | 4.01              | 36.70                | 1.18                     |
| 4   | 7236.00     | 50.5 PK                 | 74.00          | -23.50      | 1.30H              | 359                  | 45.70            | 36.20                 | 5.58              | 37.00                | -4.78                    |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|----------------------|--------------------------|
| 1   | *2412.00    | 101.6 AV                |                |             | 1.46V              | 27                   | 71.40            | 27.67                 | 2.53              | 0.00                 | -30.20                   |
| 2   | *2412.00    | 108.6 PK                |                |             | 1.46V              | 27                   | 78.40            | 27.67                 | 2.53              | 0.00                 | -30.20                   |
| 3   | 4824.00     | 50.6 PK                 | 74.00          | -23.40      | 1.68V              | 343                  | 51.80            | 31.52                 | 4.01              | 36.70                | 1.18                     |
| 4   | 7236.00     | 44.8 AV                 | 54.00          | -9.20       | 1.51V              | 17                   | 40.00            | 36.20                 | 5.58              | 37.00                | -4.78                    |
| 5   | 7236.00     | 52.8 PK                 | 74.00          | -21.20      | 1.51V              | 17                   | 48.00            | 36.20                 | 5.58              | 37.00                | -4.78                    |

- NOTE:**
1. Emission level = Raw Value - Correction Factor
  2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss  
(External Preamp. Gain = 0, when the test receiver is used for the test.)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. The limit value is defined as per 15.247
  6. “ \* “ : Fundamental frequency



|                                 |                                       |                              |                          |
|---------------------------------|---------------------------------------|------------------------------|--------------------------|
| <b>EUT</b>                      | Dual-Band Wireless A+B<br>PCI Adapter | <b>MODEL</b>                 | WMP51AB                  |
| <b>MODE</b>                     | Channel 6                             | <b>FREQUENCY RANGE</b>       | Above 1000 MHz           |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60Hz                          | <b>DETECTOR FUNCTION</b>     | Peak(PK)<br>Average (AV) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 60%RH,<br>1005 hPa          | <b>TESTED BY:</b> Gary Chang |                          |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|----------------------|--------------------------|
| 1   | *2437.00    | 100.8 PK                |                |             | 1.86H              | 0                    | 70.33            | 27.81                 | 2.66              | 0.00                 | -30.47                   |
| 2   | *2437.00    | 97.8 AV                 |                |             | 1.86H              | 0                    | 67.33            | 27.81                 | 2.66              | 0.00                 | -30.47                   |
| 3   | 4874.00     | 48.1 PK                 | 74.00          | -25.90      | 1.36H              | 3                    | 49.20            | 31.59                 | 4.03              | 36.70                | 1.08                     |
| 4   | 7312.00     | 49.0 PK                 | 74.00          | -25.00      | 1.42H              | 15                   | 44.00            | 36.33                 | 5.72              | 37.03                | -5.02                    |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB/m) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB/m) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|-----------------------|-------------------|----------------------|--------------------------|
| 1   | *2437.00    | 104.8 AV                |                |             | 1.08V              | 7                    | 74.33            | 27.81                 | 2.66              | 0.00                 | -30.47                   |
| 2   | *2437.00    | 107.5 PK                |                |             | 1.08V              | 7                    | 77.03            | 27.81                 | 2.66              | 0.00                 | -30.47                   |
| 3   | 4874.00     | 52.6 AV                 | 54.00          | -1.40       | 1.36V              | 19                   | 53.72            | 31.59                 | 4.03              | 36.70                | 1.08                     |
| 4   | 4874.00     | 54.2 PK                 | 74.00          | -19.80      | 1.36V              | 19                   | 55.31            | 31.59                 | 4.03              | 36.70                | 1.08                     |
| 5   | 7312.00     | 53.5 PK                 | 74.00          | -20.50      | 1.50V              | 331                  | 48.50            | 36.33                 | 5.72              | 37.03                | -5.02                    |
| 6   | 7312.00     | 47.5 AV                 | 54.00          | -6.50       | 1.50V              | 331                  | 42.50            | 36.33                 | 5.72              | 37.03                | -5.02                    |

- NOTE:**
1. Emission level = Raw Value - Correction Factor
  2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss  
(External Preamp. Gain = 0, when the test receiver is used for the test.)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. The limit value is defined as per 15.247
  6. " \* " : Fundamental frequency



|                                     |                                       |                              |                          |
|-------------------------------------|---------------------------------------|------------------------------|--------------------------|
| <b>EUT</b>                          | Dual-Band Wireless A+B<br>PCI Adapter | <b>MODEL</b>                 | WMP51AB                  |
| <b>MODE</b>                         | Channel 11                            | <b>FREQUENCY<br/>RANGE</b>   | Above 1000 MHz           |
| <b>INPUT POWER<br/>(SYSTEM)</b>     | 120Vac, 60Hz                          | <b>DETECTOR<br/>FUNCTION</b> | Peak(PK)<br>Average (AV) |
| <b>ENVIRONMENTAL<br/>CONDITIONS</b> | 25deg. C, 60%RH,<br>1005 hPa          | <b>TESTED BY:</b> Gary Chang |                          |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Factor<br>(dB) | Pre-Amp.<br>Factor<br>(dB) | Correction<br>Factor<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|-----------------------------|-------------------------|----------------------------|--------------------------------|
| 1   | *2462.00       | 94.8 AV                       |                   |                | 1.54H                    | 10                         | 64.33                  | 27.81                       | 2.66                    | 0.00                       | -30.47                         |
| 2   | *2462.00       | 97.2 PK                       |                   |                | 1.54H                    | 10                         | 66.73                  | 27.81                       | 2.66                    | 0.00                       | -30.47                         |
| 3   | 2496.00        | 47.0 PK                       | 74.00             | -27.00         | 1.44H                    | 3                          | 53.00                  | 27.96                       | 2.78                    | 36.70                      | 5.96                           |
| 4   | 4924.00        | 46.0 PK                       | 74.00             | -28.00         | 1.52H                    | 3                          | 47.00                  | 31.66                       | 4.06                    | 36.70                      | 0.99                           |
| 5   | 7383.00        | 49.1 PK                       | 74.00             | -24.90         | 1.51H                    | 69                         | 44.00                  | 36.40                       | 5.79                    | 37.05                      | -5.14                          |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq.<br>(MHz) | Emission<br>Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Antenna<br>Height<br>(m) | Table<br>Angle<br>(Degree) | Raw<br>Value<br>(dBuV) | Antenna<br>Factor<br>(dB/m) | Cable<br>Factor<br>(dB) | Pre-Amp.<br>Factor<br>(dB) | Correction<br>Factor<br>(dB/m) |
|-----|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|-----------------------------|-------------------------|----------------------------|--------------------------------|
| 1   | *2463.00       | 101.4 AV                      |                   |                | 1.07V                    | 8                          | 70.93                  | 27.81                       | 2.66                    | 0.00                       | -30.47                         |
| 2   | *2463.00       | 103.4 PK                      |                   |                | 1.07V                    | 8                          | 72.93                  | 27.81                       | 2.66                    | 0.00                       | -30.47                         |
| 3   | 2496.00        | 49.2 AV                       | 54.00             | -4.80          | 1.64V                    | 52                         | 55.20                  | 27.96                       | 2.78                    | 36.70                      | 5.96                           |
| 4   | 2496.00        | 57.0 PK                       | 74.00             | -17.00         | 1.64V                    | 52                         | 63.00                  | 27.96                       | 2.78                    | 36.70                      | 5.96                           |
| 5   | 4924.00        | 52.2 AV                       | 54.00             | -1.80          | 1.52V                    | 3                          | 53.23                  | 31.66                       | 4.06                    | 36.70                      | 0.99                           |
| 6   | 4924.00        | 55.0 PK                       | 74.00             | -19.00         | 1.52V                    | 3                          | 56.00                  | 31.66                       | 4.06                    | 36.70                      | 0.99                           |
| 7   | 7386.00        | 51.4 AV                       | 54.00             | -2.60          | 1.63V                    | 75                         | 46.24                  | 36.40                       | 5.79                    | 37.05                      | -5.14                          |
| 8   | 7386.00        | 54.7 PK                       | 74.00             | -19.30         | 1.63V                    | 75                         | 49.60                  | 36.40                       | 5.79                    | 37.05                      | -5.14                          |

- NOTE:**
1. Emission level= Raw Value - Correction Factor
  2. Correction Factor = External Preamp. Gain - Ant. Factor - Cable loss  
(External Preamp. Gain = 0, when the test receiver is used for the test.)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. The limit value is defined as per 15.247
  6. " \* " : Fundamental frequency



### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER          | FSEK30    | 100049     | July 24, 2003    |

**NOTE:**

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.3.5 TEST SETUP



### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




## 4.3.7 TEST RESULTS

|                                 |                                       |                                     |                              |
|---------------------------------|---------------------------------------|-------------------------------------|------------------------------|
| <b>EUT</b>                      | Dual-Band Wireless A+B<br>PCI Adapter | <b>MODEL</b>                        | WMP51AB                      |
| <b>INPUT POWER<br/>(SYSTEM)</b> | 120Vac, 60Hz                          | <b>ENVIRONMENTAL<br/>CONDITIONS</b> | 25deg. C, 65%RH,<br>1005 hPa |
| <b>TESTED BY:</b> Steven Lu     |                                       |                                     |                              |

| <b>CHANNEL</b> | <b>CHANNEL<br/>FREQUENCY<br/>(MHz)</b> | <b>6dB BANDWIDTH<br/>(MHz)</b> | <b>MINIMUM<br/>LIMIT<br/>(MHz)</b> | <b>PASS/FAIL</b> |
|----------------|--|--------------------------------|------------------------------------|------------------|
| 1              | 2412                                   | 12.06                          | 0.5                                | PASS             |
| 6              | 2437                                   | 12.18                          | 0.5                                | PASS             |
| 11             | 2462                                   | 11.96                          | 0.5                                | PASS             |




CH1

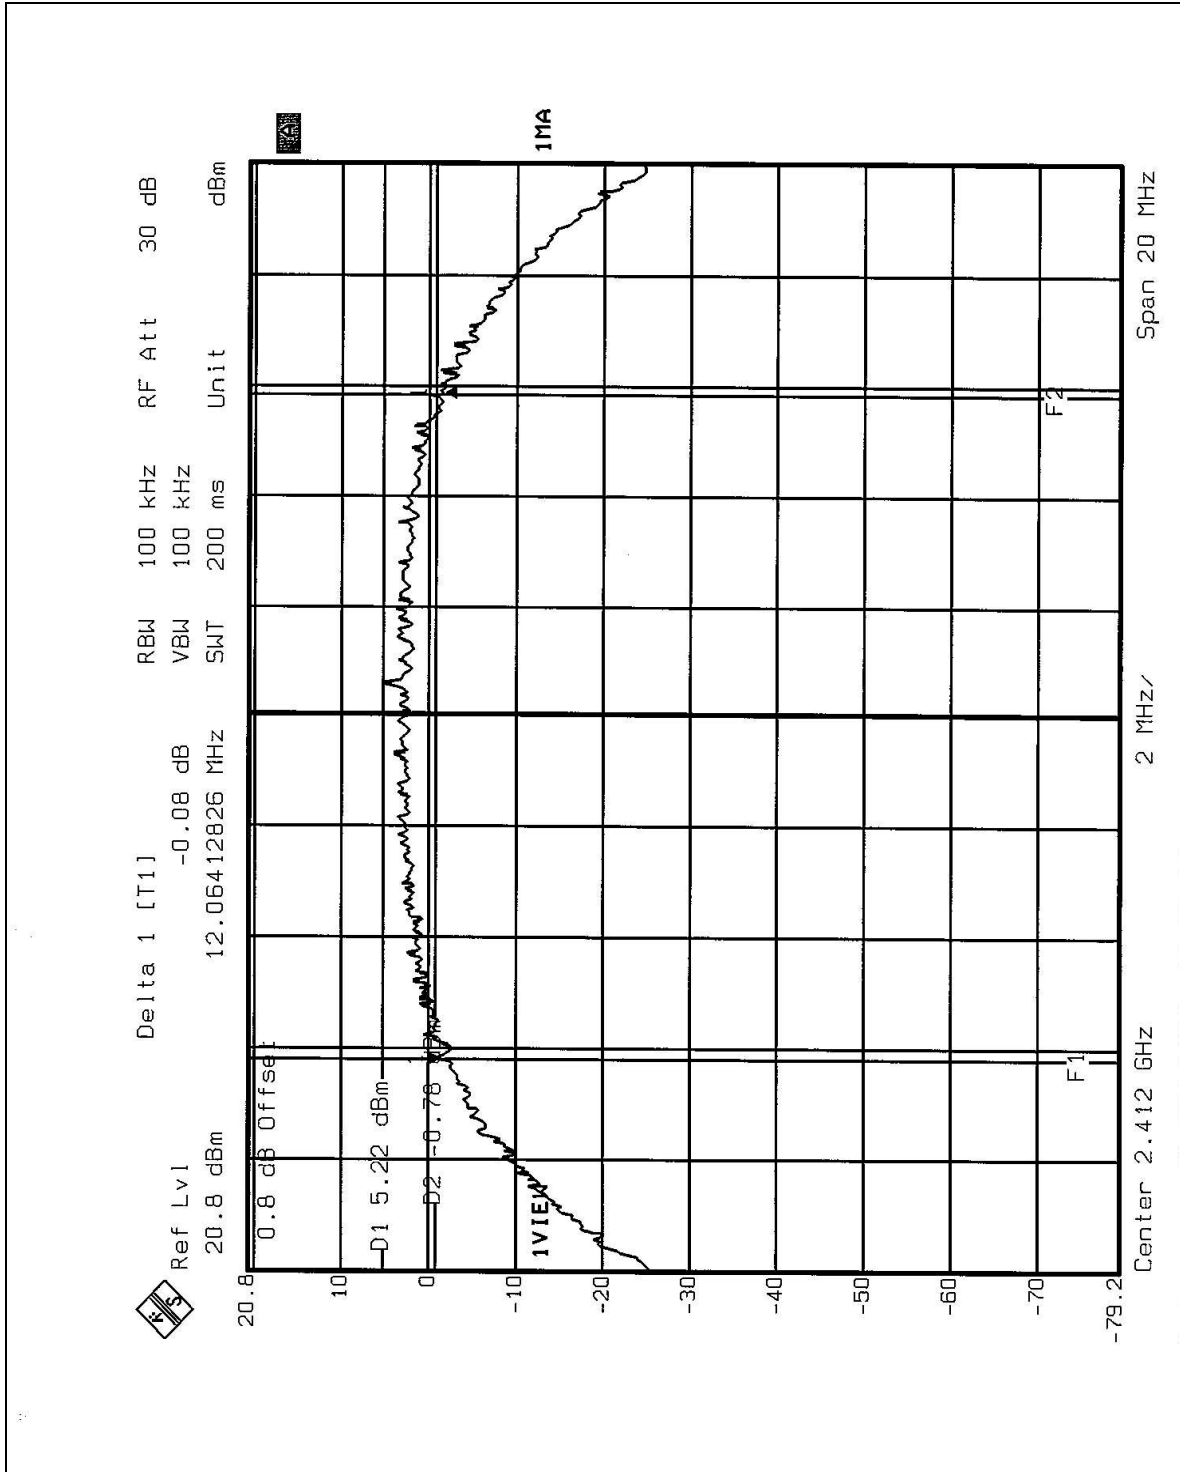






CH6

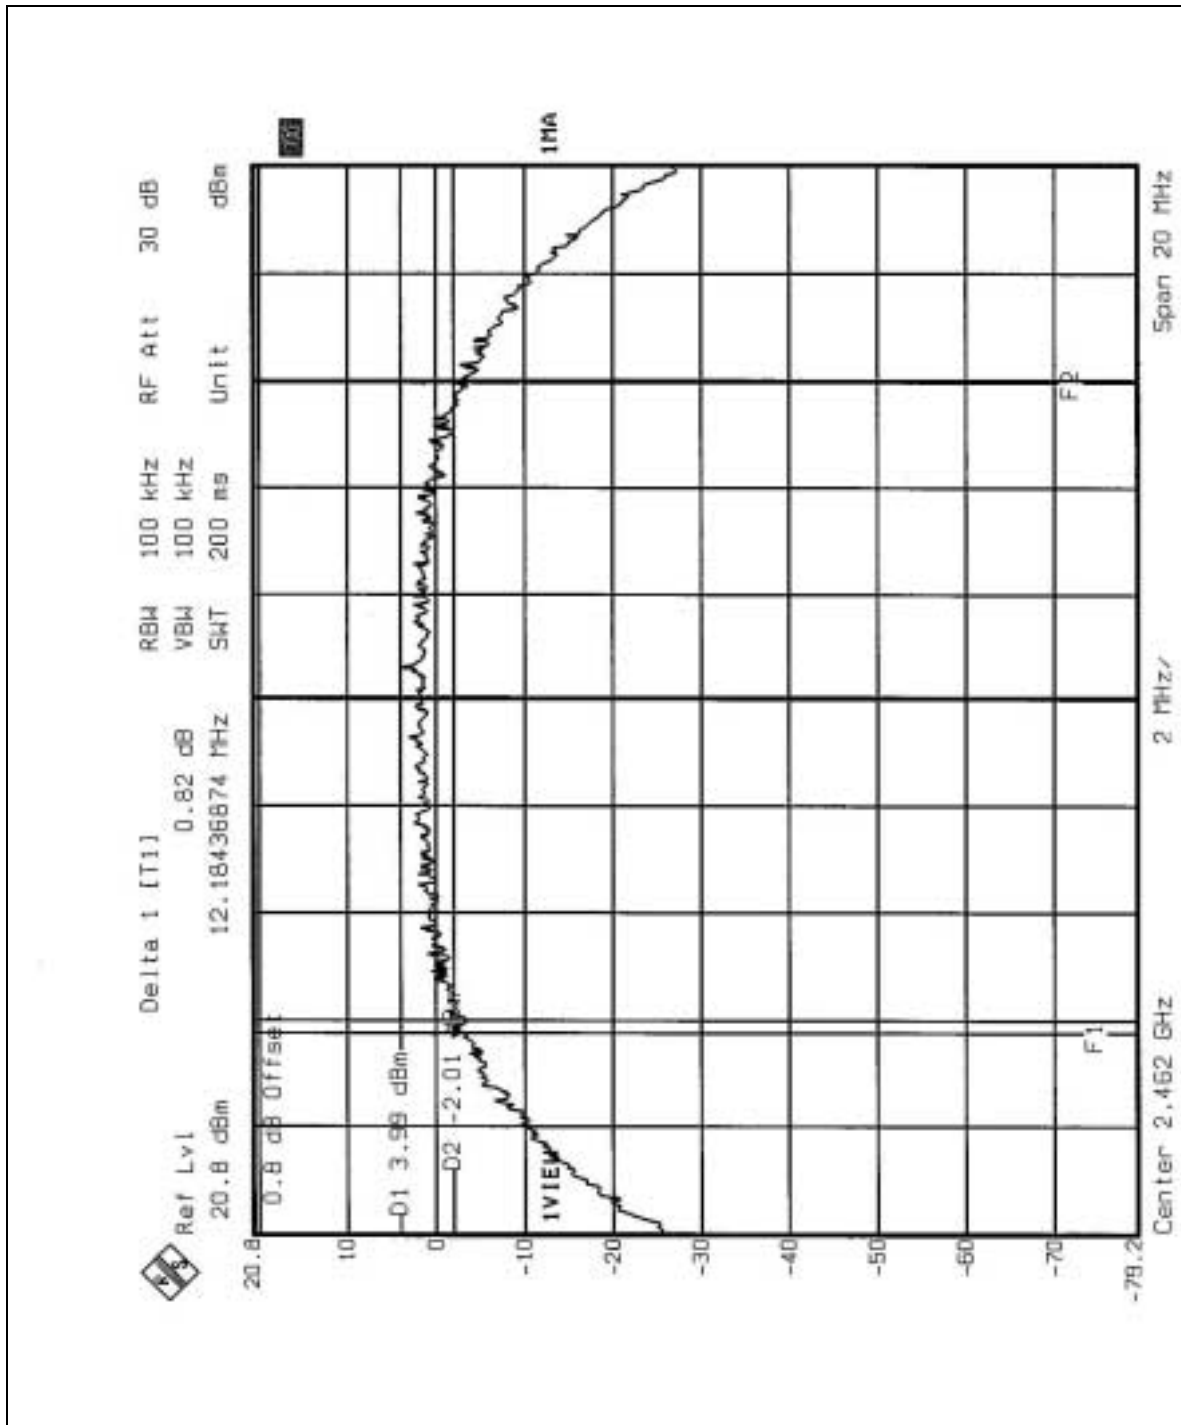



CH11

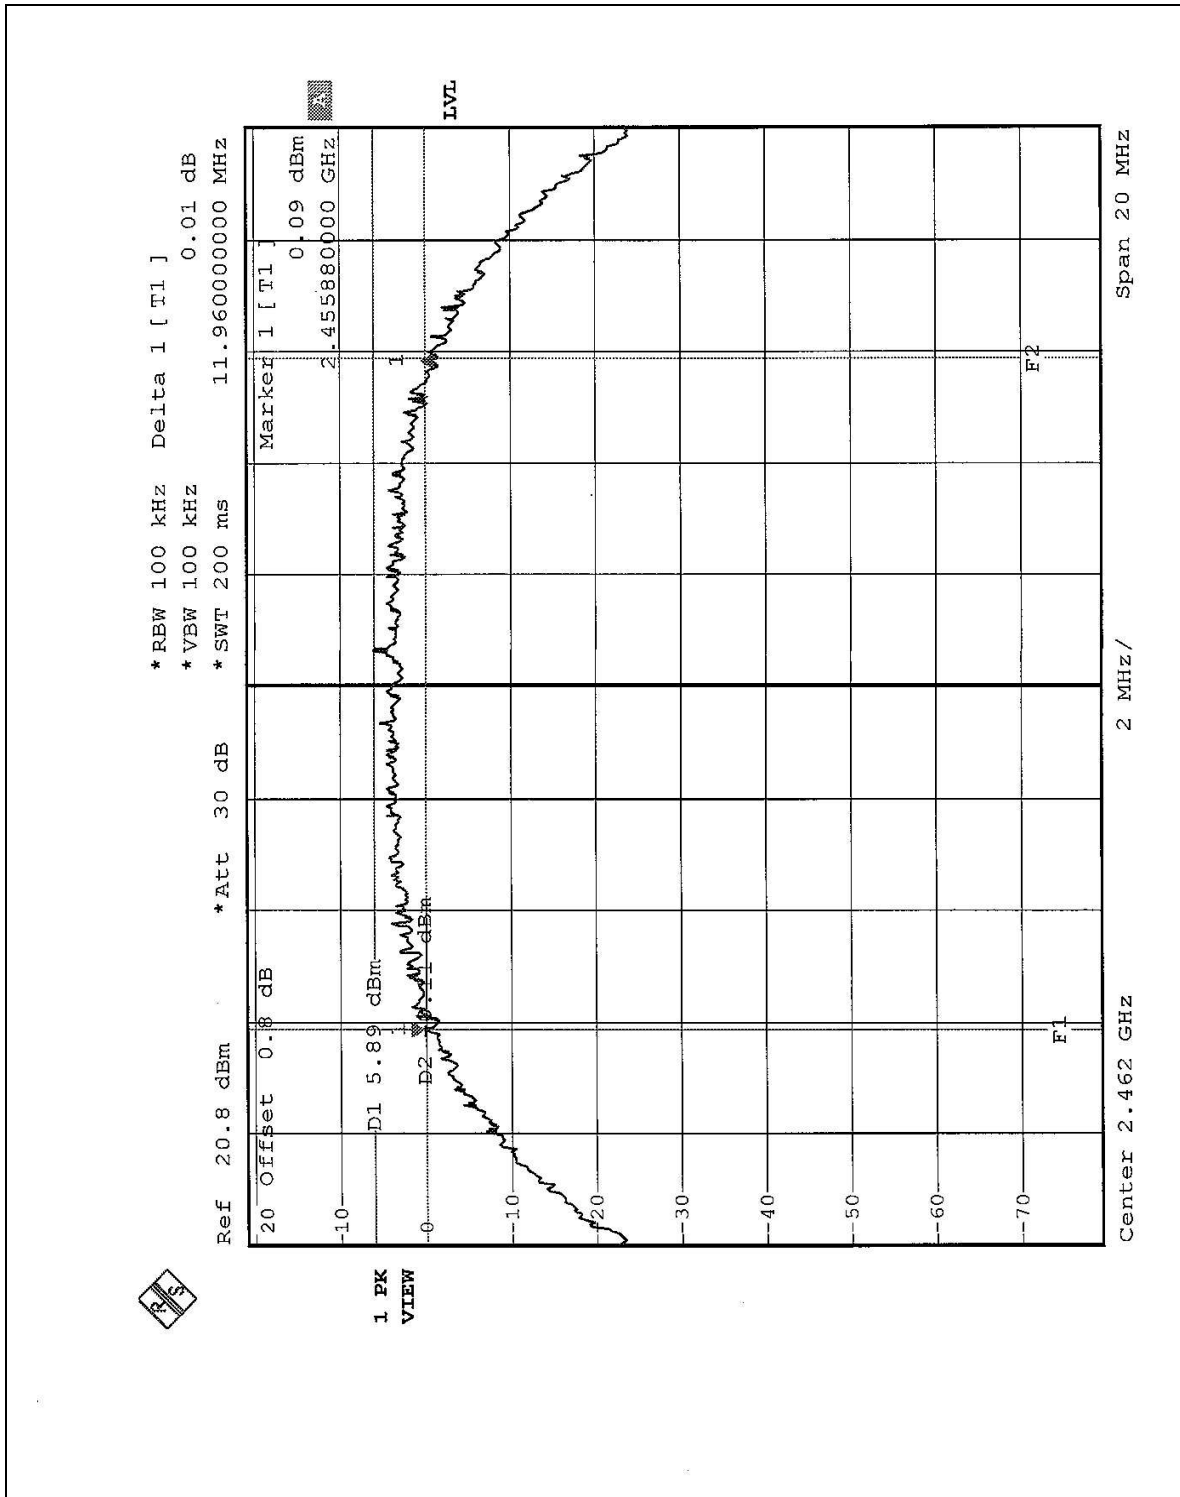



#### 4.4 MAXIMUM PEAK OUTPUT POWER

##### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

##### 4.4.2 INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| SINGLE CHANNEL POWER METER | NRVS      | 100026     | Feb. 23, 2003    |
| PEAK POWER SENSOR          | NRV-Z32   | 100013     | Feb. 23, 2003    |

**NOTE:**

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



#### 4.4.3 TEST PROCEDURES

The transmitter output was connected to the peak power meter.

#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TEST SETUP



#### 4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



## 4.4.7 TEST RESULTS

|                             |                                    |                                 |                          |
|-----------------------------|------------------------------------|---------------------------------|--------------------------|
| <b>EUT</b>                  | Dual-Band Wireless A+B PCI Adapter | <b>MODEL</b>                    | WMP51AB                  |
| <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60Hz                       | <b>ENVIRONMENTAL CONDITIONS</b> | 25deg.C, 65%RH, 1005 hPa |
| <b>TESTED BY:</b> Steven Lu |                                    |                                 |                          |

| <b>CHANNEL</b> | <b>CHANNEL FREQUENCY (MHz)</b> | <b>PEAK POWER OUTPUT (dBm)</b> | <b>PEAK POWER LIMIT (dBm)</b> | <b>PASS/FAIL</b> |
|----------------|--------------------------------|--------------------------------|-------------------------------|------------------|
| 1              | 2412                           | 14.82                          | 30                            | PASS             |
| 6              | 2437                           | 15.34                          | 30                            | PASS             |
| 11             | 2462                           | 14.36                          | 30                            | PASS             |



## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER          | FSEK30    | 100049     | July 24, 2003    |

**NOTE:**

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

#### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.5.5 TEST SETUP



#### 4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



## 4.5.7 TEST RESULTS


|                                 |                                       |                                     |                              |
|---------------------------------|---------------------------------------|-------------------------------------|------------------------------|
| <b>EUT</b>                      | Dual-Band Wireless<br>A+B PCI Adapter | <b>MODEL</b>                        | WMP51AB                      |
| <b>INPUT POWER<br/>(SYSTEM)</b> | 120Vac, 60Hz                          | <b>ENVIRONMENTAL<br/>CONDITIONS</b> | 25deg. C, 65%RH,<br>1005 hPa |
| <b>TESTED BY:</b> Steven Lu     |                                       |                                     |                              |

| <b>CHANNEL<br/>NUMBER</b> | <b>CHANNEL<br/>FREQUENCY<br/>(MHz )</b> | <b>RF POWER LEVEL<br/>IN 3 kHz BW<br/>(dBm)</b> | <b>MAXIMUM<br/>LIMIT<br/>(dBm)</b> | <b>PASS/FAIL</b> |
|---------------------------|---|---|------------------------------------|------------------|
| 1                         | 2412                                    | -8.31   | 8                                  | PASS             |
| 6                         | 2437                                    | -7.22   | 8                                  | PASS             |
| 11                        | 2462                                    | -9.20   | 8                                  | PASS             |






CH1

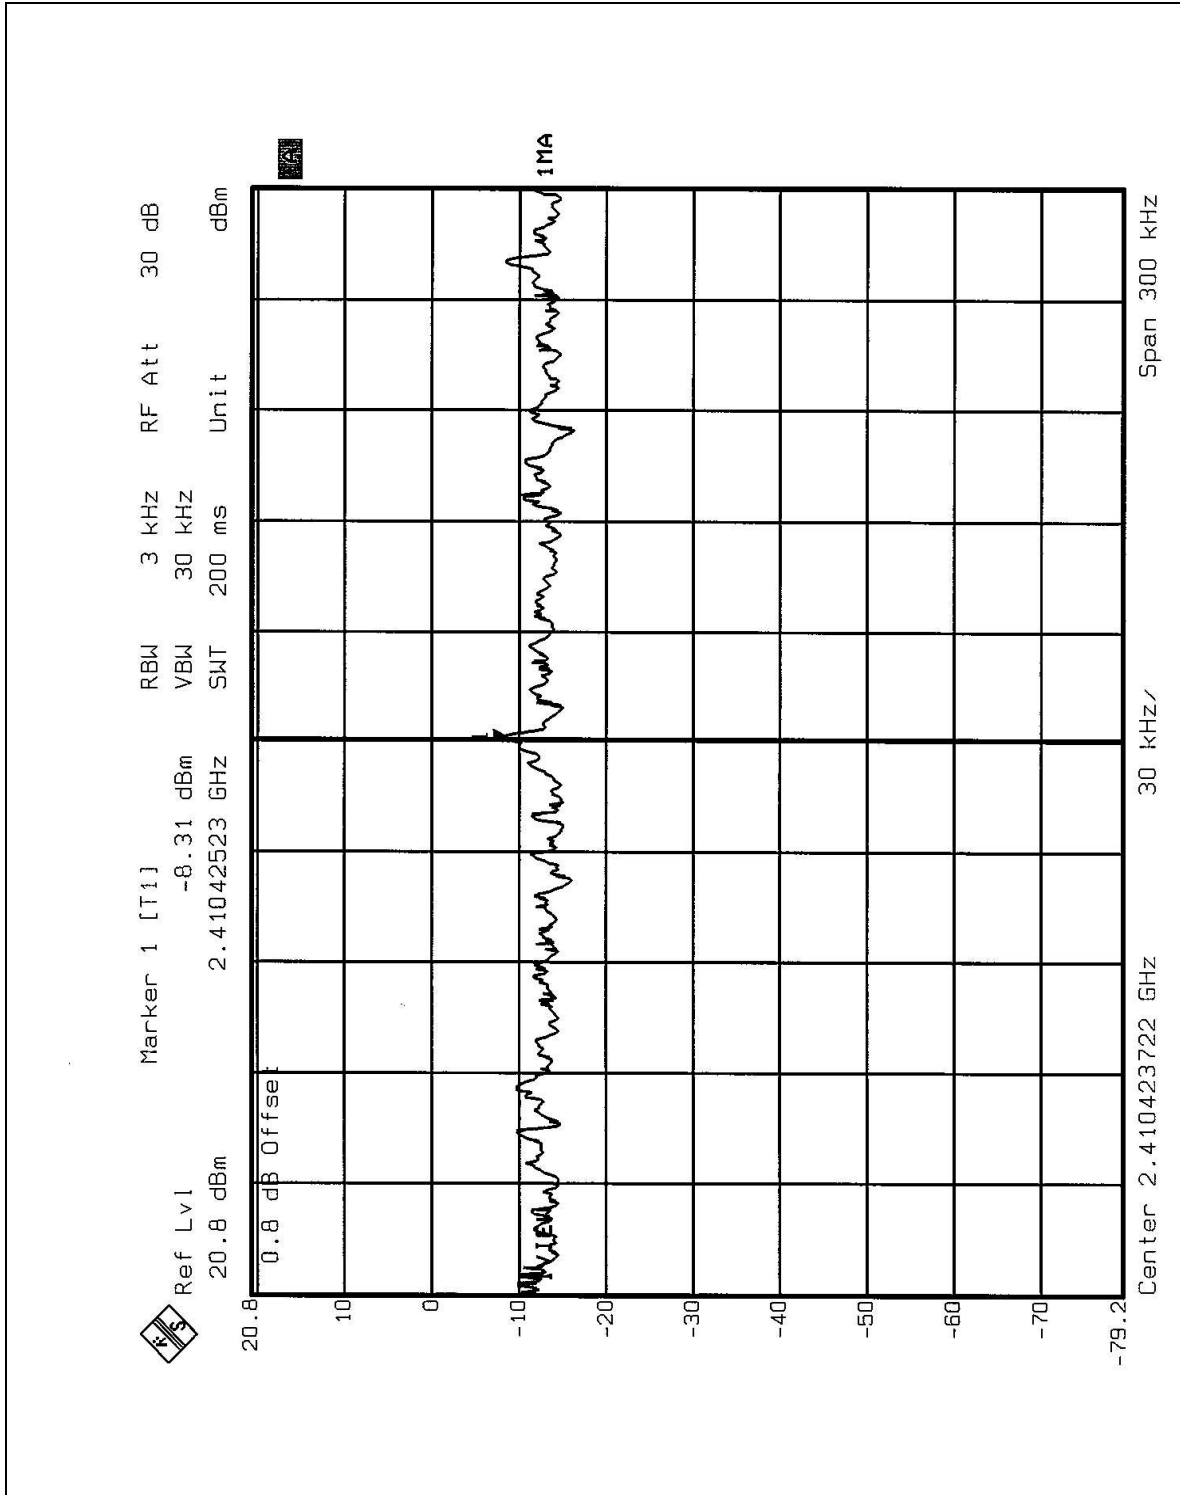




CH6

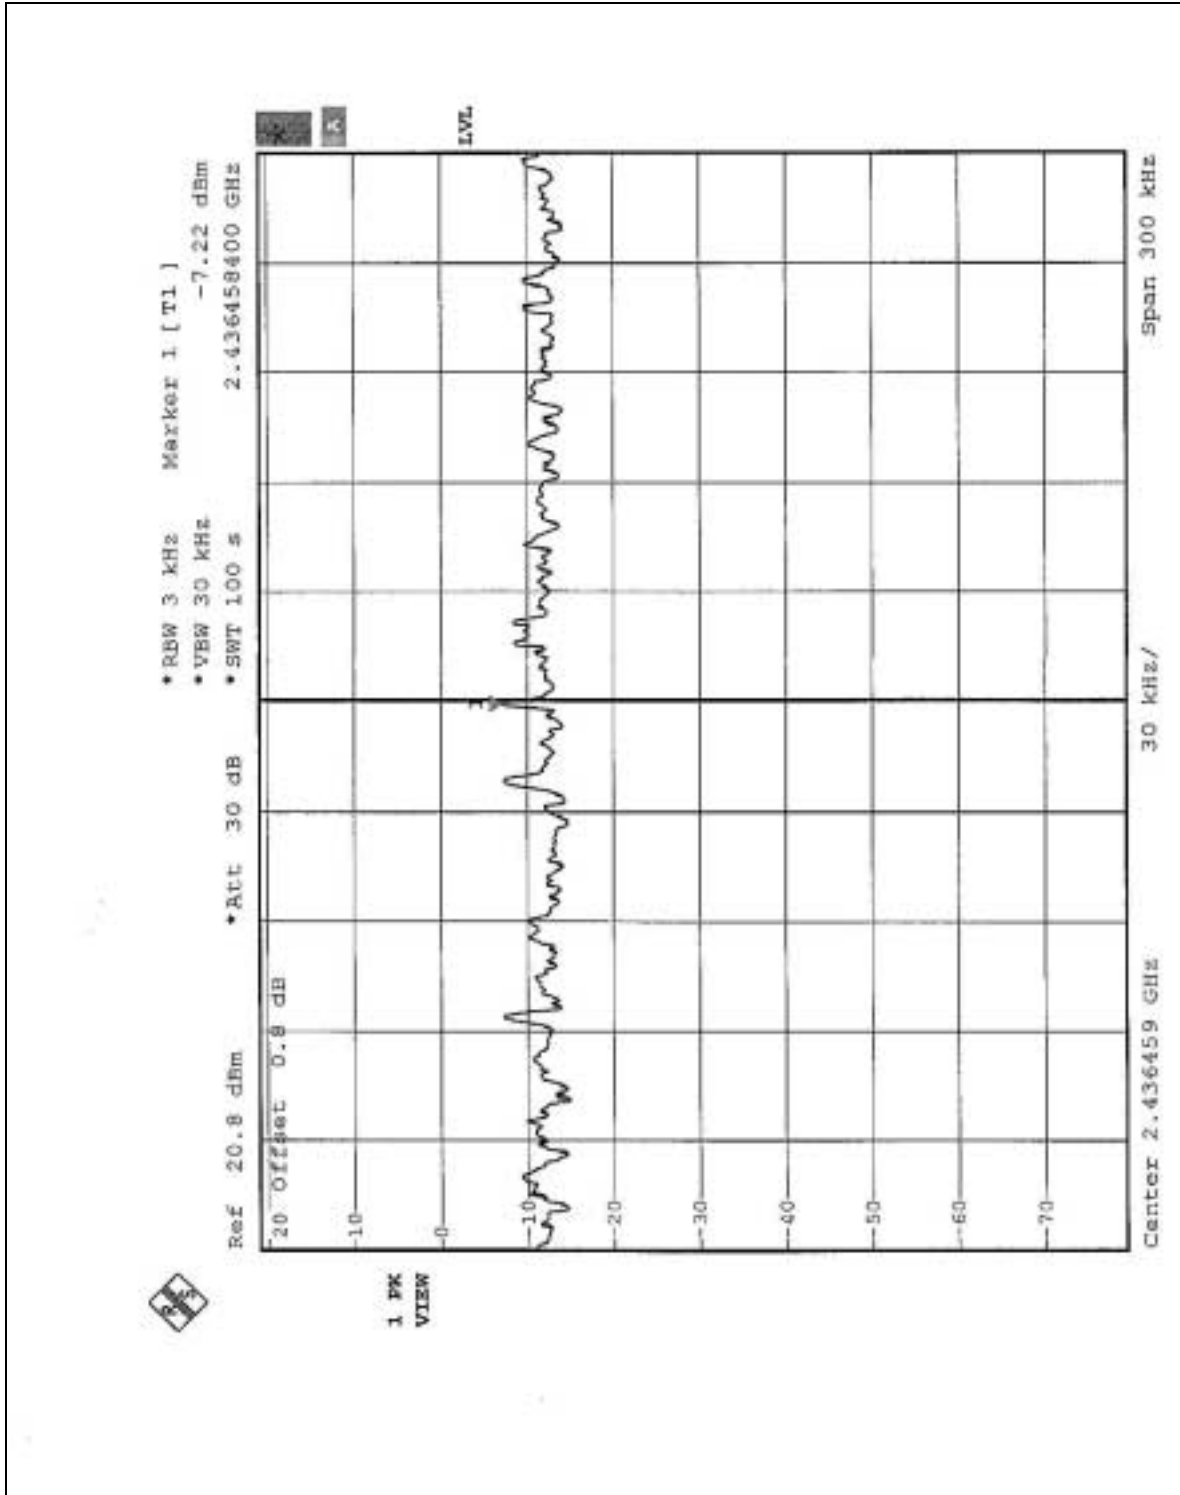



CH11

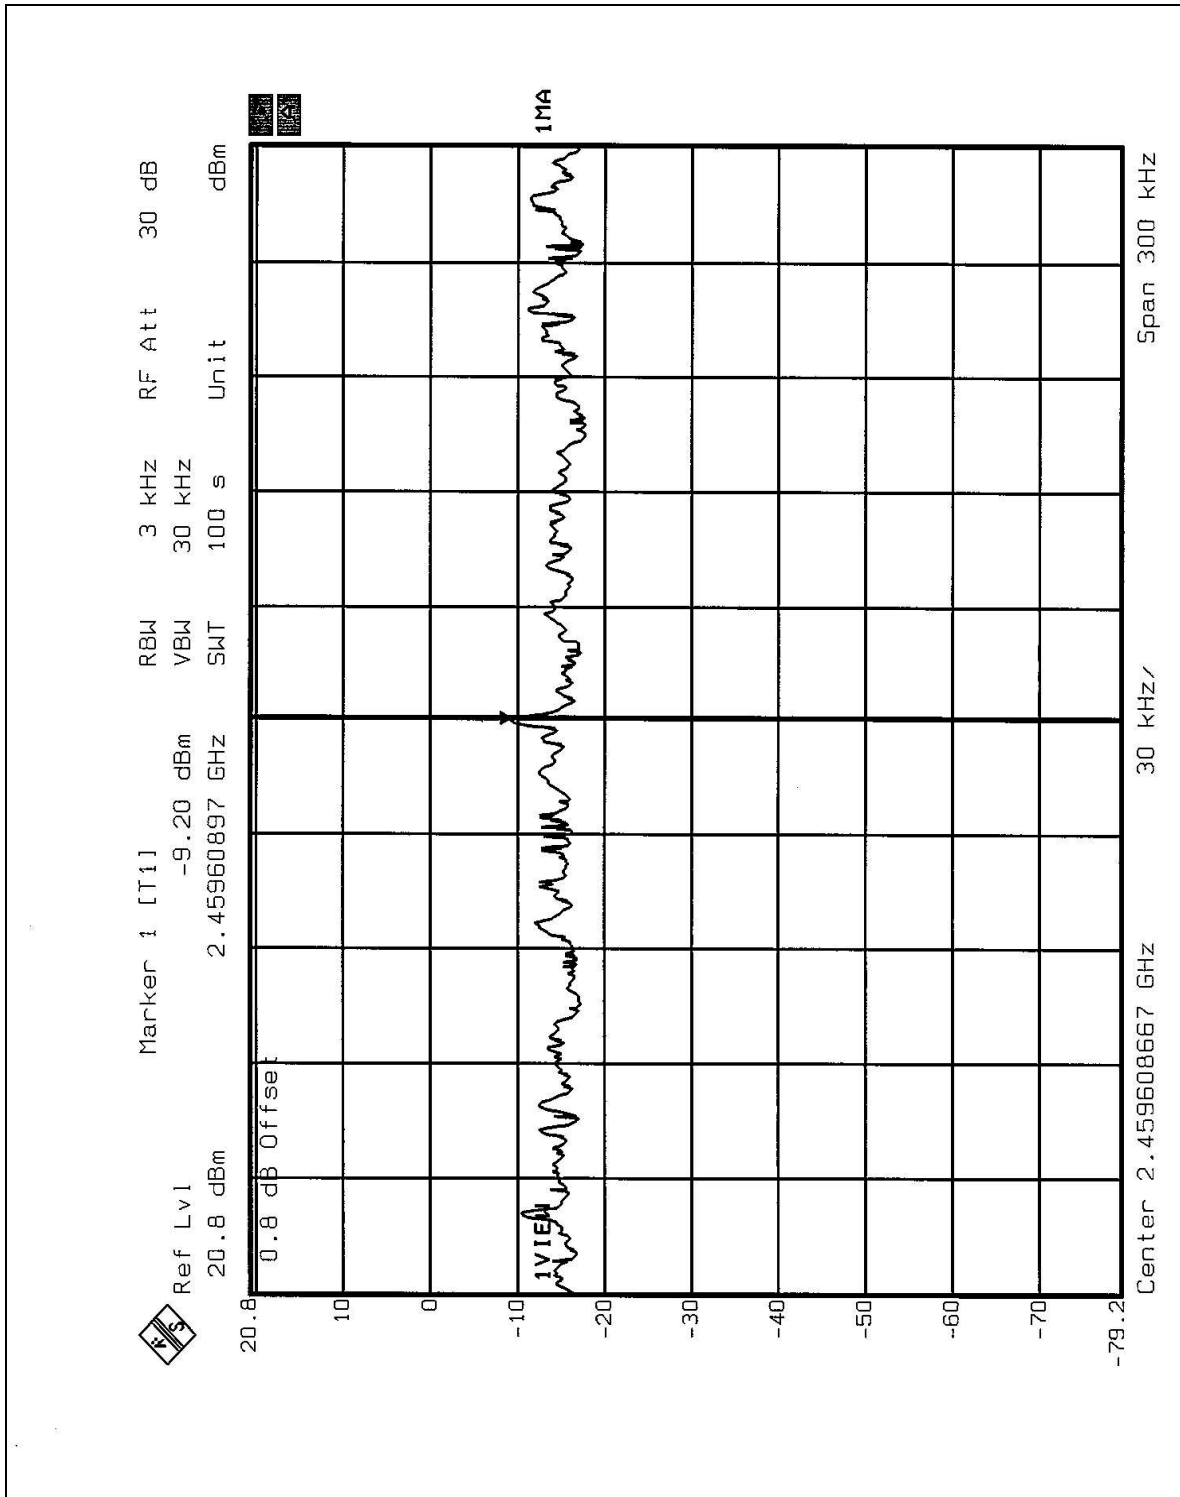



## 4.6 BAND EDGES MEASUREMENT

### 4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER          | FSEK30    | 100049     | July 24, 2003    |

**NOTE:**

1. The measurement uncertainty is less than  $\pm 2.6\text{dB}$ , which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation




#### 4.6.5 EUT OPERATING CONDITION


Same as Item 4.3.6

#### 4.6.6 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

**NOTE:** The band edge emission plot on the following 2 pages shows 48.33dB/48.56dB delta between carrier maximum power and local maximum emission in restrict band (2.4876GHz / 2.3866GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 101.6dBuV/m, so the maximum field strength in restrict band is  $101.6 - 48.33 = 53.27$ dBuV/m which is under 54dBuV/m limit.

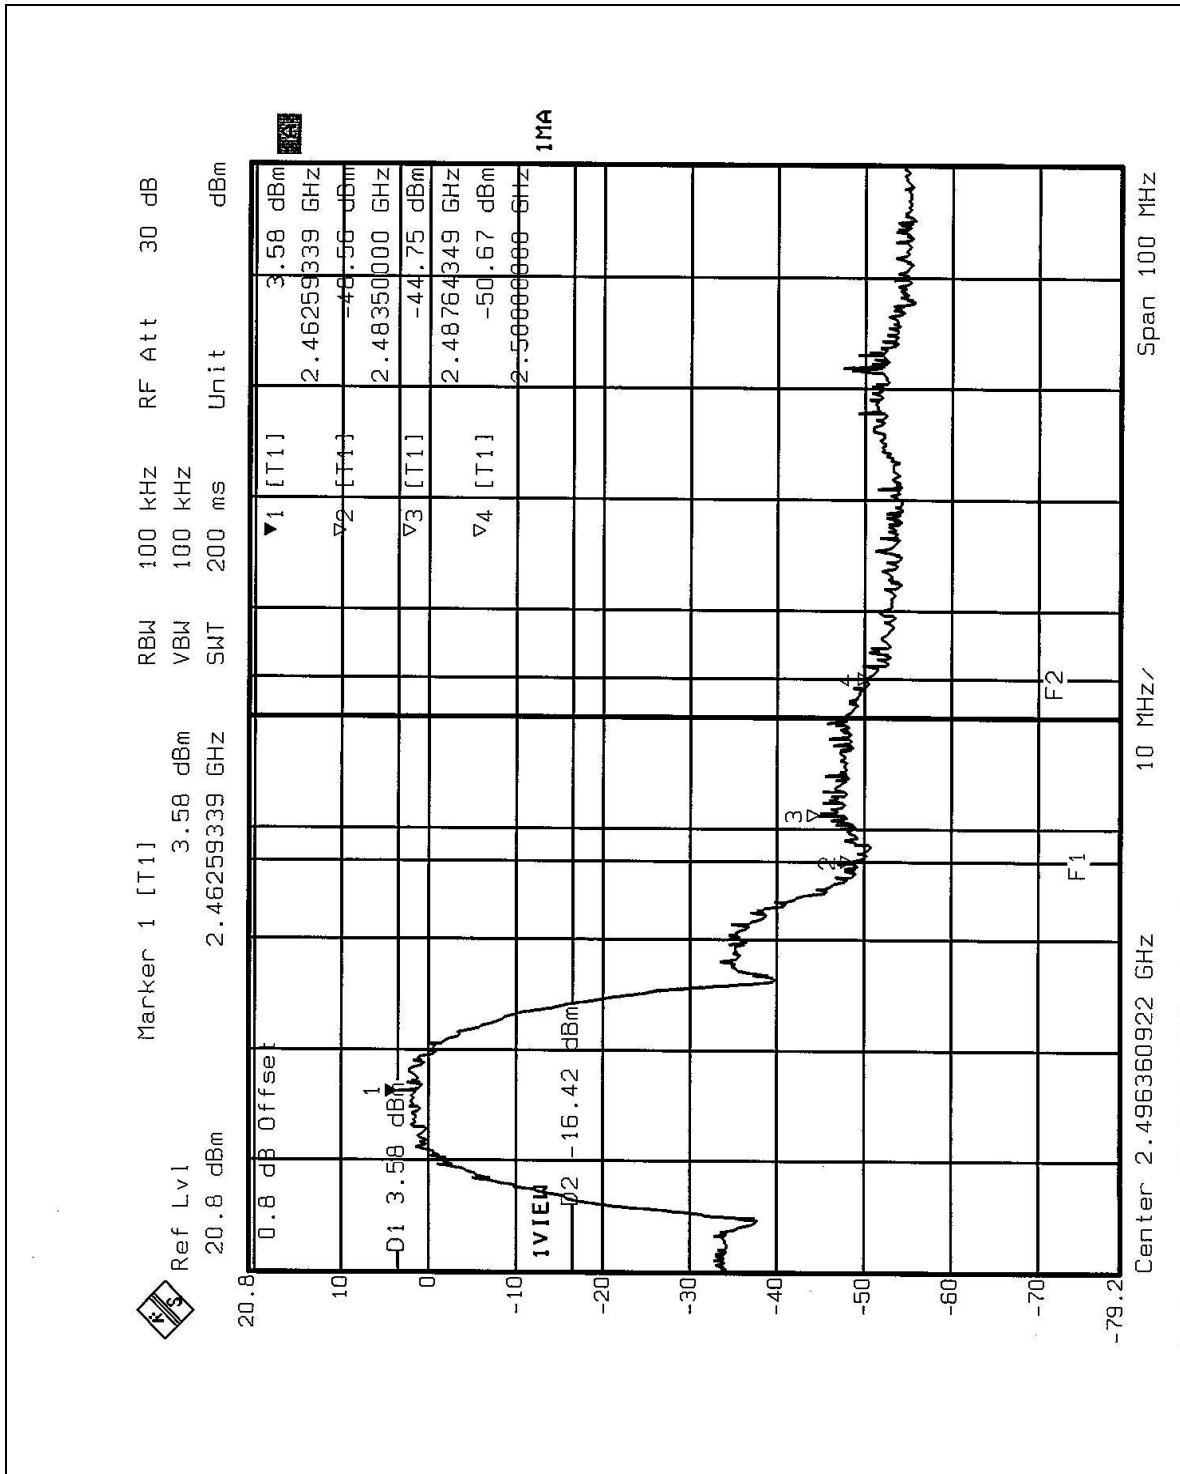

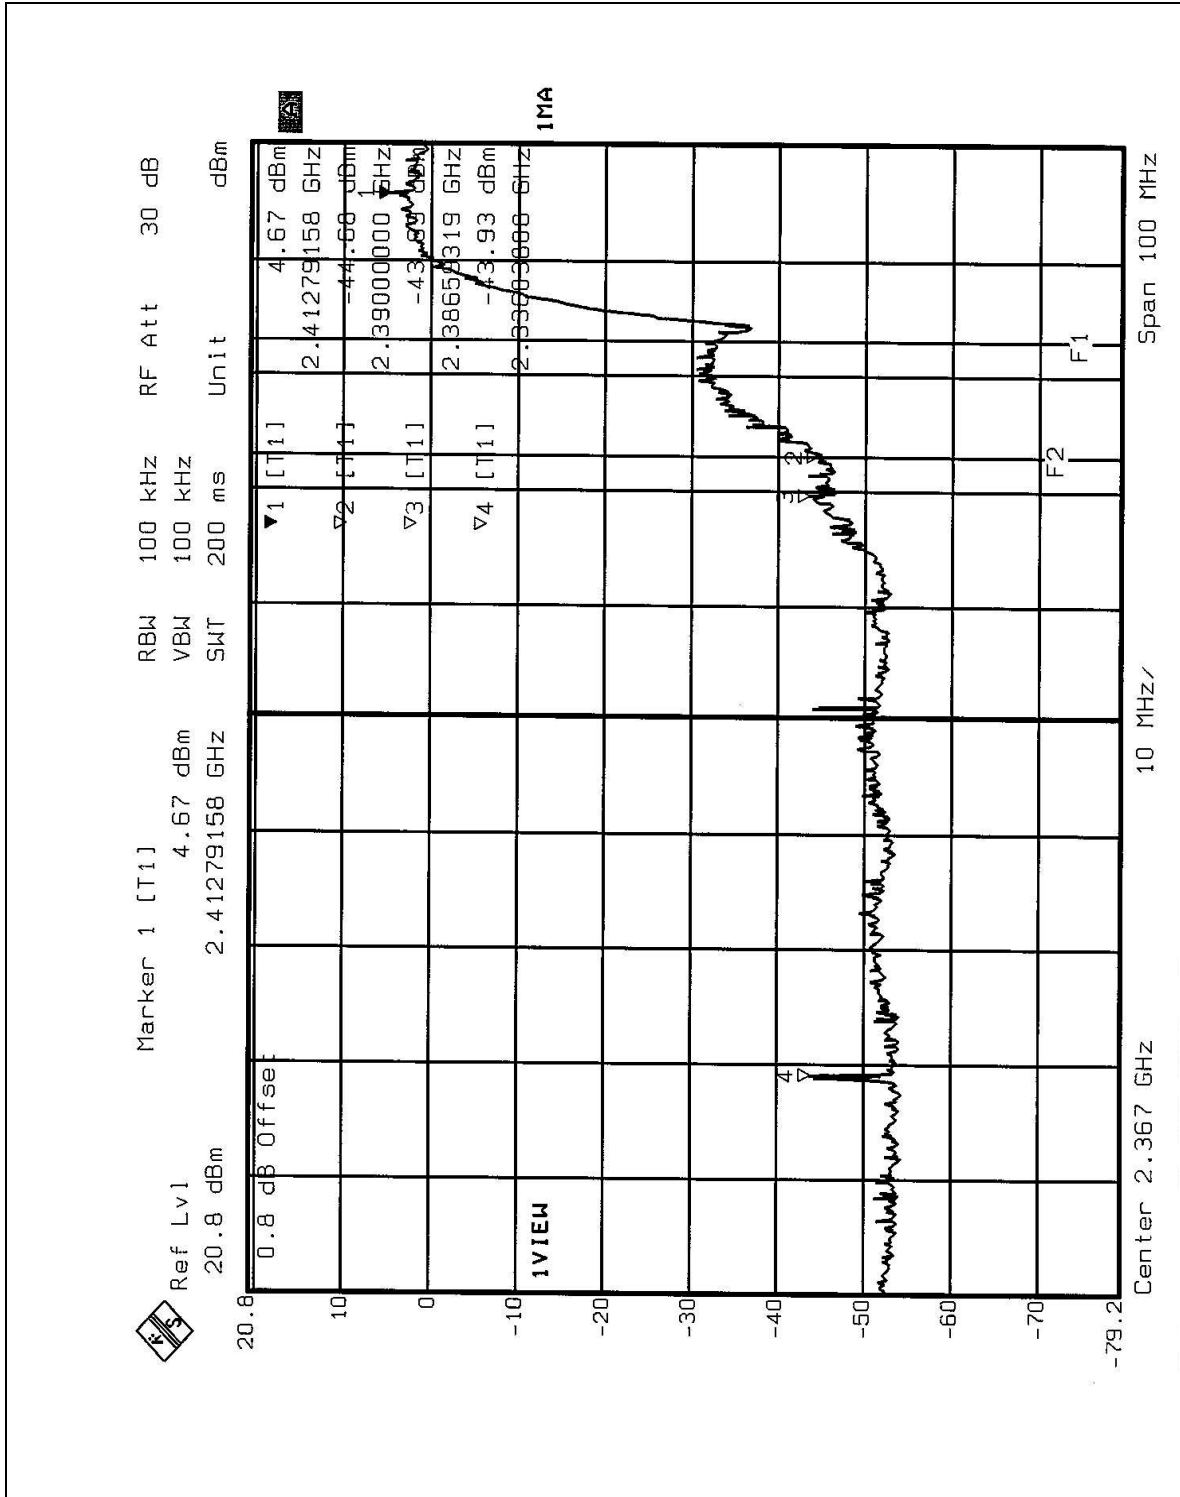



## **4.7 ANTENNA REQUIREMENT**

### **4.7.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **4.7.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna used in this product is Dipole antenna without connector. The maximum Gain of the antenna is 2.4dBi.





## 5. TEST TYPES AND RESULTS (FOR PART 802.11a)

### 5.1 CONDUCTED EMISSION MEASUREMENT

#### 5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB $\mu$ V) |          |
|-----------------------------|------------------------------|----------|
|                             | Quasi-peak                   | Average  |
| 0.15-0.5                    | 66 to 56                     | 56 to 46 |
| 0.5-5                       | 56                           | 46       |
| 5-30                        | 60                           | 50       |

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 5.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER                         | MODEL NO. | SERIAL NO.   | CALIBRATED UNTIL |
|--|-----------|--------------|------------------|
| ROHDE & SCHWARZ Test Receiver                      | ESCS30    | 834115/016   | Mar. 3, 2003     |
| ROHDE & SCHWARZ Artificial Mains Network (For EUT) | ESH3-Z5   | 847265/023   | Jan. 10, 2003    |
| * ROHDE & SCHWARZ 4-wire ISN                       | ENY41     | 838119/028   | Dec. 10, 2002    |
| * ROHDE & SCHWARZ 2-wire ISN                       | ENY22     | 837497/018   | Dec. 10, 2002    |
| EMCO L.I.S.N. (For peripherals)                    | 3825/2    | 9504-2359    | July 10, 2003    |
| Software   | Cond-V2L  | NA           | NA               |
| RF cable (JYEBAO)                                  | 5D-FB     | Cable-C03.01 | July 11, 2003    |
| Terminator (For EMCO LISN)                         | NA        | E1-01-300    | Feb. 20, 2003    |
| Terminator (For EMCO LISN)                         | NA        | E1-01-301    | Feb. 20, 2003    |
| Shielded Room                                      | Site 3    | ADT-C03      | NA               |
| VCCI Site Registration No.                         | Site 3    | C-274        | NA               |

- NOTE:**
1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
  2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  3. “\*”: These equipment are used for conducted telecom port test only (if tested).
  4. The test was performed in ADT Open Site No. 3.




### 5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

### 5.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.1.5 TEST SETUP

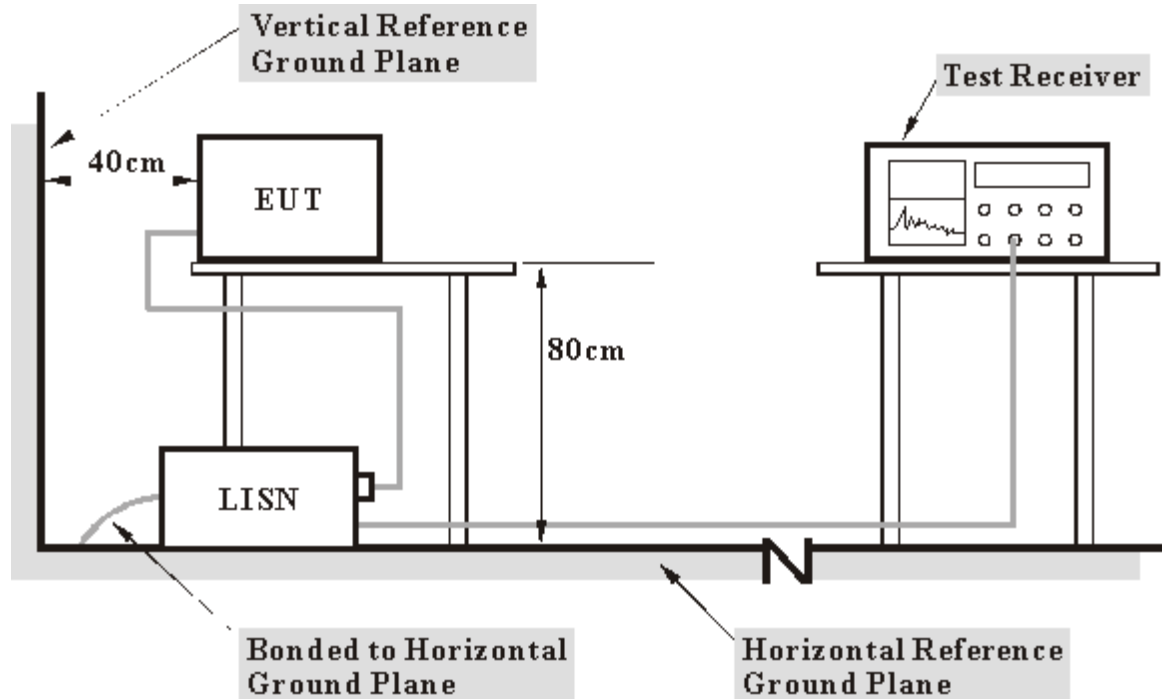

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 5.1.6 EUT OPERATING CONDITIONS

Same as 4.1.6.




5.1.7 TEST RESULTS

|                                 |                                       |                              |          |
|---------------------------------|---------------------------------------|------------------------------|----------|
| <b>EUT</b>                      | Dual-Band Wireless A+B<br>PCI Adapter | <b>MODEL</b>                 | WMP51AB  |
|                                 |                                       | <b>6dB BANDWIDTH</b>         | 9 kHz    |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                         | <b>PHASE</b>                 | Line (L) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 61%RH,<br>1005 hPa          | <b>TESTED BY:</b> Cody Chang |          |

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value<br>[dB (uV)] |     | Emission Level<br>[dB (uV)] |     | Limit<br>[dB (uV)] |       | Margin<br>(dB) |     |
|----|----------------|-------------------------|----------------------------|-----|-----------------------------|-----|--------------------|-------|----------------|-----|
|    |                |                         | Q.P.                       | AV. | Q.P.                        | AV. | Q.P.               | AV.   | Q.P.           | AV. |
| 1  | 0.224          | 0.10                    | 42.45                      | -   | 42.55                       | -   | 62.66              | 52.66 | -20.11         | -   |
| 2  | 0.475          | 0.11                    | 39.33                      | -   | 39.44                       | -   | 56.42              | 46.42 | -16.97         | -   |
| 3  | 0.666          | 0.14                    | 39.95                      | -   | 40.09                       | -   | 56.00              | 46.00 | -15.91         | -   |
| 4  | 1.809          | 0.28                    | 41.32                      | -   | 41.60                       | -   | 56.00              | 46.00 | -14.40         | -   |
| 5  | 3.047          | 0.40                    | 37.41                      | -   | 37.81                       | -   | 56.00              | 46.00 | -18.19         | -   |
| 6  | 4.284          | 0.50                    | 35.35                      | -   | 35.85                       | -   | 56.00              | 46.00 | -20.15         | -   |

**NOTE:**

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

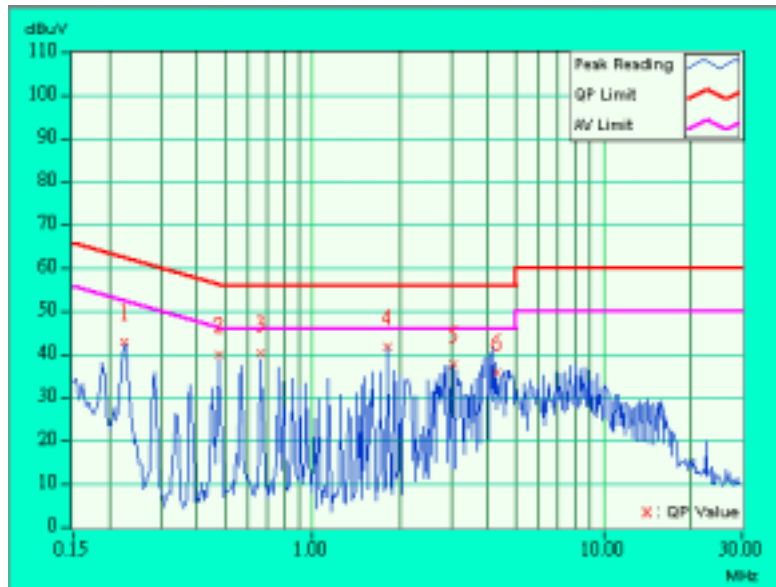




|                                 |                                    |                              |             |
|---------------------------------|------------------------------------|------------------------------|-------------|
| <b>EUT</b>                      | Dual-Band Wireless A+B PCI Adapter | <b>MODEL</b>                 | WMP51AB     |
|                                 |                                    | <b>6dB BANDWIDTH</b>         | 9 kHz       |
| <b>INPUT POWER (SYSTEM)</b>     | 120Vac, 60 Hz                      | <b>PHASE</b>                 | Neutral (N) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 61%RH, 1005 hPa          | <b>TESTED BY:</b> Cody Chang |             |

| No | Freq. | Corr. Factor | Reading Value [dB (uV)] |     | Emission Level [dB (uV)] |     | Limit [dB (uV)] |       | Margin (dB) |     |
|----|-------|--------------|-------------------------|-----|--------------------------|-----|-----------------|-------|-------------|-----|
|    | [MHz] | (dB)         | Q.P.                    | AV. | Q.P.                     | AV. | Q.P.            | AV.   | Q.P.        | AV. |
| 1  | 0.227 | 0.10         | 43.95                   | -   | 44.05                    | -   | 62.57           | 52.57 | -18.52      | -   |
| 2  | 0.477 | 0.11         | 38.57                   | -   | 38.68                    | -   | 56.40           | 46.40 | -17.71      | -   |
| 3  | 0.666 | 0.14         | 38.53                   | -   | 38.67                    | -   | 56.00           | 46.00 | -17.33      | -   |
| 4  | 1.809 | 0.28         | 40.12                   | -   | 40.40                    | -   | 56.00           | 46.00 | -15.60      | -   |
| 5  | 2.949 | 0.35         | 36.76                   | -   | 37.11                    | -   | 56.00           | 46.00 | -18.89      | -   |
| 6  | 4.188 | 0.40         | 40.14                   | -   | 40.54                    | -   | 56.00           | 46.00 | -15.46      | -   |

**NOTE:**

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

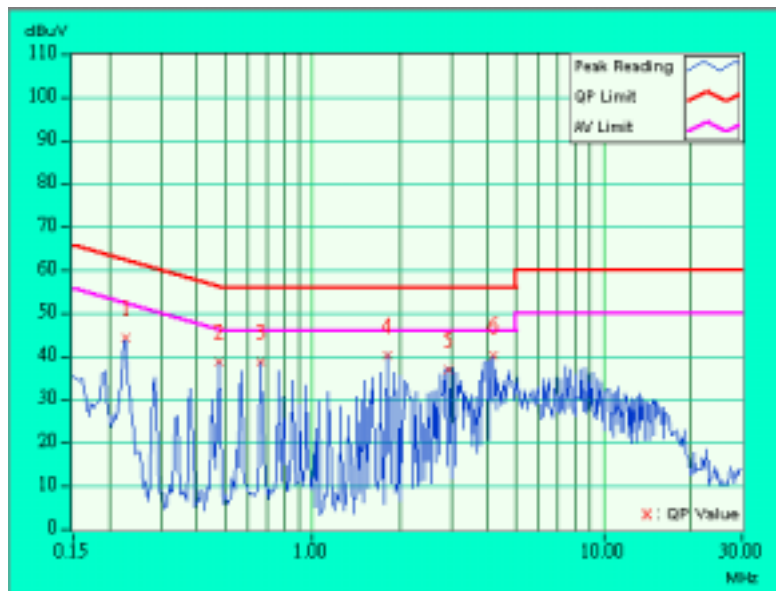



## 5.2 RADIATED EMISSION MEASUREMENT

### 5.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

| Frequencies (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009-0.490       | 2400/F(kHz)                       | 300                           |
| 0.490-1.705       | 24000/F(kHz)                      | 30                            |
| 1.705-30.0        | 30                                | 30                            |
| 30-88             | 100                               | 3                             |
| 88-216            | 150                               | 3                             |
| 216-960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

### 5.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

| Frequencies (MHz) | EIRP Limit (dBm) | Equivalent Field Strength at 3m (dBμV/m) *note 3 |
|-------------------|------------------|--|
| 5150~5250         | -27              | 68.3   |
| 5250~5350         | -27              | 68.3   |
| 5725~5825         | -27 *note 1      | 68.3   |
|                   | -17 *note 2      | 78.3   |

**NOTE:**

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}, \quad \text{where } P \text{ is the eirp (Watts)}$$



### 5.2.3 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER         | MODEL NO.            | SERIAL NO.               | CALIBRATED UNTIL |
|------------------------------------|----------------------|--------------------------|------------------|
| * HP Spectrum Analyzer             | 8590L                | 3544A01176               | May 13, 2003     |
| * HP Preamplifier                  | 8447D                | 2944A08485               | Apr. 29, 2003    |
| * HP Preamplifier                  | 8449B                | 3008A01201               | Dec. 06, 2002    |
| * HP Preamplifier                  | 8449B                | 3008A01292               | Aug. 7, 2003     |
| * ROHDE & SCHWARZ TEST RECEIVER    | ESMI                 | 839013/007<br>839379/002 | Jan. 27, 2003    |
| SCHWARZBECK Tunable Dipole Antenna | VHA 9103<br>UHA 9105 | E101051<br>E101055       | Nov. 23, 2002    |
| * CHASE BILOG Antenna              | CBL6112A             | 2221                     | Aug. 2, 2003     |
| * SCHWARZBECK Horn Antenna         | BBHA9120-D1          | D130                     | Jul. 3, 2003     |
| * EMCO Horn Antenna                | 3115                 | 9312-4192                | Apr. 9, 2003     |
| SCHWARZBECK Horn Antenna           | BBHA9170             | 148                      | May 24, 2003     |
| * EMCO Turn Table                  | 1060                 | 1115                     | NA               |
| * SHOSHIN Tower                    | AP-4701              | A6Y005                   | NA               |
| * Software                         | AS61D4               | NA                       | NA               |
| * ANRITSU RF Switches              | MP59B                | M35046                   | Jan. 25, 2003    |
| * TIMES RF cable                   | LMR-600              | CABLE-ST5-01             | Jul. 12, 2003    |
| Open Field Test Site               | Site 5               | ADT-R05                  | Jul. 19, 2003    |
| VCCI Site Registration No.         | Site 5               | R-1039                   | NA               |

- NOTE:**
1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.
  2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.
  3. "\*" = These equipment are used for the final measurement.
  4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  5. The test was performed in ADT Open Site No. 5.



#### 5.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**NOTE:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

#### 5.2.5 DEVIATION FROM TEST STANDARD

No deviation



## 5.2.6 TEST SETUP

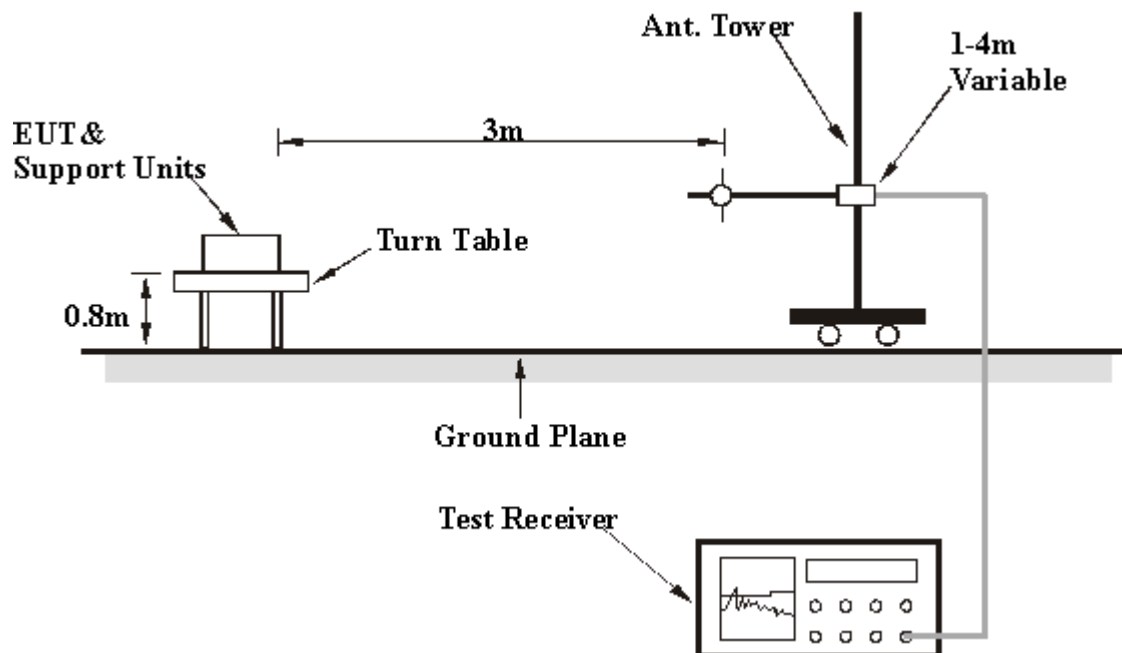

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 5.2.7 EUT OPERATING CONDITIONS

Same as 4.1.6.



## 5.2.8 TEST RESULTS

|                                 |                                    |                             |              |
|---------------------------------|------------------------------------|-----------------------------|--------------|
| <b>EUT</b>                      | Dual-Band Wireless A+B PCI Adapter | <b>MODEL</b>                | WMP51AB      |
| <b>FREQUENCY RANGE</b>          | 30-1000 MHz                        | <b>DETECTOR FUNCTION</b>    | Quasi-Peak   |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25 deg. C, 60%RH, 1050 hPa         | <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60Hz |
| <b>TESTED BY</b>                | Gary Chang                         |                             |              |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|---------------------|-------------------|----------------------|------------------------|
| 1   | 160.00      | 26.4 QP                 | 43.50          | -17.10      | 1.40H              | 30                   | 13.15            | 9.62                | 3.62              | 0.00                 | -13.25                 |
| 2   | 192.00      | 27.0 QP                 | 43.50          | -16.50      | 1.00H              | 3                    | 14.04            | 8.95                | 4.00              | 0.00                 | -12.97                 |
| 3   | 320.00      | 26.0 QP                 | 46.00          | -20.00      | 1.19H              | 3                    | 7.03             | 13.62               | 5.34              | 0.00                 | -18.97                 |
| 4   | 384.00      | 28.0 QP                 | 46.00          | -18.00      | 1.35H              | 1                    | 6.48             | 15.50               | 6.02              | 0.00                 | -21.53                 |
| 5   | 480.00      | 27.0 QP                 | 46.00          | -19.00      | 1.04H              | 3                    | 3.57             | 16.92               | 6.51              | 0.00                 | -23.43                 |
| 6   | 576.00      | 28.0 QP                 | 46.00          | -18.00      | 1.25H              | 43                   | 2.05             | 18.28               | 7.67              | 0.00                 | -25.95                 |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|---------------------|-------------------|----------------------|------------------------|
| 1   | 160.00      | 26.8 QP                 | 43.50          | -16.70      | 1.40V              | 293                  | 13.55            | 9.62                | 3.62              | 0.00                 | -13.25                 |
| 2   | 192.00      | 28.0 QP                 | 43.50          | -15.50      | 1.07V              | 288                  | 15.04            | 8.95                | 4.00              | 0.00                 | -12.96                 |
| 3   | 224.00      | 27.0 QP                 | 46.00          | -19.00      | 1.29V              | 1                    | 12.24            | 10.41               | 4.36              | 0.00                 | -14.77                 |
| 4   | 320.00      | 30.0 QP                 | 46.00          | -16.00      | 1.67V              | 29                   | 11.03            | 13.62               | 5.34              | 0.00                 | -18.97                 |
| 5   | 384.00      | 28.0 QP                 | 46.00          | -18.00      | 1.44V              | 299                  | 6.48             | 15.50               | 6.02              | 0.00                 | -21.52                 |
| 6   | 480.00      | 25.0 QP                 | 46.00          | -21.00      | 1.35V              | 3                    | 1.57             | 16.92               | 6.51              | 0.00                 | -23.43                 |
| 7   | 576.00      | 27.0 QP                 | 46.00          | -19.00      | 1.09V              | 20                   | 1.05             | 18.28               | 7.67              | 0.00                 | -25.95                 |

**NOTE:**

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss  
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.



## 5.2.9 TEST RESULTS

|                                 |                                    |                             |                          |
|---------------------------------|------------------------------------|-----------------------------|--------------------------|
| <b>EUT</b>                      | Dual-Band Wireless A+B PCI Adapter | <b>MODEL</b>                | WMP51AB                  |
| <b>MODE</b>                     | Normal Mode                        | <b>CHANNEL</b>              | 1                        |
| <b>FREQUENCY RANGE</b>          | Above 1000 MHz                     | <b>DETECTOR FUNCTION</b>    | Peak(PK)<br>Average (AV) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25 deg. C, 60%RH,<br>1050 hPa      | <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60Hz             |
| <b>TESTED BY</b>                | Gary Chang                         |                             |                          |

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB) | Remark |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|---------------------|-------------------|----------------------|------------------------|--------|
| 1   | *5180.00    | 88.8 AV                 |                |             | 1.40H              | 5                    | 89.60            | 31.87               | 3.95              | 36.63                | 0.82                   |        |
| 2   | *5180.00    | 96.2 PK                 |                |             | 1.40H              | 5                    | 97.00            | 31.87               | 3.95              | 36.63                | 0.82                   |        |
| 3   | 10360.00    | 53.6 PK                 | 68.30          | -14.70      | 1.38H              | 4                    | 45.20            | 39.16               | 6.69              | 37.42                | -8.43                  |        |

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB) | Remark |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|---------------------|-------------------|----------------------|------------------------|--------|
| 1   | *5180.00    | 101.0 AV                |                |             | 1.00V              | 322                  | 101.80           | 31.87               | 3.95              | 36.63                | 0.82                   |        |
| 2   | *5180.00    | 109.0 PK                |                |             | 1.00V              | 322                  | 109.86           | 31.87               | 3.95              | 36.63                | 0.82                   |        |
| 3   | 10360.00    | 55.9 PK                 | 68.30          | -12.40      | 1.68V              | 18                   | 47.50            | 39.16               | 6.69              | 37.42                | -8.44                  |        |

**NOTE:**

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss  
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.
5. "\*" : Fundamental frequency



|                                 |                                       |                             |                          |
|---------------------------------|---------------------------------------|-----------------------------|--------------------------|
| <b>EUT</b>                      | Dual-Band Wireless A+B<br>PCI Adapter | <b>MODEL</b>                | WMP51AB                  |
| <b>MODE</b>                     | Normal Mode                           | <b>CHANNEL</b>              | 4                        |
| <b>FREQUENCY RANGE</b>          | Above 1000 MHz                        | <b>DETECTOR FUNCTION</b>    | Peak(PK)<br>Average (AV) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25 deg. C, 60%RH,<br>1050 hPa         | <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60Hz             |
| <b>TESTED BY</b>                | Gary Chang                            |                             |                          |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|---------------------|-------------------|----------------------|------------------------|
| 1   | *5240.00    | 92.2 AV                 |                |             | 1.20H              | 337                  | 93.00            | 31.90               | 3.86              | 36.60                | 0.84                   |
| 2   | *5240.00    | 98.2 PK                 |                |             | 1.20H              | 337                  | 99.00            | 31.90               | 3.86              | 36.60                | 0.84                   |
| 3   | 10480.00    | 53.2 PK                 | 68.30          | -15.10      | 1.26H              | 349                  | 44.00            | 39.36               | 7.14              | 37.32                | -9.19                  |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|---------------------|-------------------|----------------------|------------------------|
| 1   | *5240.00    | 104.2 AV                |                |             | 1.16V              | 355                  | 105.00           | 31.90               | 3.86              | 36.60                | 0.84                   |
| 2   | *5240.00    | 110.2 PK                |                |             | 1.16V              | 355                  | 111.00           | 31.90               | 3.86              | 36.60                | 0.84                   |
| 3   | 10480.00    | 62.4 PK                 | 68.30          | -5.90       | 1.00V              | 181                  | 53.20            | 39.36               | 7.14              | 37.32                | -9.19.                 |

#### NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss  
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.
5. "\*" : Fundamental frequency



|                                 |                                       |                             |                          |
|---------------------------------|---------------------------------------|-----------------------------|--------------------------|
| <b>EUT</b>                      | Dual-Band Wireless A+B<br>PCI Adapter | <b>MODEL</b>                | WMP51AB                  |
| <b>MODE</b>                     | Normal Mode                           | <b>CHANNEL</b>              | 5                        |
| <b>FREQUENCY RANGE</b>          | Above 1000 MHz                        | <b>DETECTOR FUNCTION</b>    | Peak(PK)<br>Average (AV) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25 deg. C, 60%RH,<br>1050 hPa         | <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60Hz             |
| <b>TESTED BY</b>                | Gary Chang                            |                             |                          |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|---------------------|-------------------|----------------------|------------------------|
| 1   | *5260.00    | 100.2 PK                |                |             | 1.04H              | 2                    | 101.00           | 31.90               | 3.86              | 36.60                | 0.84                   |
| 2   | *5260.00    | 9506 AV                 |                |             | 1.04H              | 2                    | 96.40            | 31.90               | 3.86              | 36.60                | 0.84                   |
| 3   | 10518.00    | 62.4 PK                 | 68.30          | -5.90       | 1.08H              | 14                   | 53.00            | 39.43               | 7.22              | 37.28                | -9.36                  |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|---------------------|-------------------|----------------------|------------------------|
| 1   | *5260.00    | 103.2 AV                |                |             | 1.07V              | 7                    | 104.00           | 31.90               | 3.86              | 36.60                | 0.84                   |
| 2   | *5260.00    | 107.8 PK                |                |             | 1.07V              | 7                    | 108.60           | 31.90               | 3.86              | 36.60                | 0.84                   |
| 3   | 10517.00    | 64.4 PK                 | 68.30          | -3.90       | 1.36V              | 5                    | 55.00            | 39.43               | 7.22              | 37.28                | -9.37                  |

#### NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss  
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.
5. "\*" : Fundamental frequency



|                                 |                                       |                             |                          |
|---------------------------------|---------------------------------------|-----------------------------|--------------------------|
| <b>EUT</b>                      | Dual-Band Wireless A+B<br>PCI Adapter | <b>MODEL</b>                | WMP51AB                  |
| <b>MODE</b>                     | Normal Mode                           | <b>CHANNEL</b>              | 8                        |
| <b>FREQUENCY RANGE</b>          | Above 1000 MHz                        | <b>DETECTOR FUNCTION</b>    | Peak(PK)<br>Average (AV) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25 deg. C, 60%RH,<br>1050 hPa         | <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60Hz             |
| <b>TESTED BY</b>                | Gary Chang                            |                             |                          |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB) | Remark |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|---------------------|-------------------|----------------------|------------------------|--------|
| 1   | *5320.00    | 90.9 AV                 |                |             | 1.65H              | 82                   | 91.73            | 31.93               | 3.77              | 36.57                | 0.86                   |        |
| 2   | *5320.00    | 97.6 PK                 |                |             | 1.65H              | 82                   | 98.50            | 31.93               | 3.77              | 36.57                | 0.86                   |        |
| 3   | 10640.00    | 56.6 PK                 | 74.00          | -17.40      | 1.25H              | 351                  | 47.00            | 39.61               | 7.22              | 37.18                | -9.64.                 | NOTE 6 |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB) | Remark |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|---------------------|-------------------|----------------------|------------------------|--------|
| 1   | *5320.00    | 101.1 AV                |                |             | 1.70V              | 311                  | 101.93           | 31.93               | 3.77              | 36.57                | 0.86                   |        |
| 2   | *5320.00    | 107.9 PK                |                |             | 1.70V              | 311                  | 108.76           | 31.93               | 3.77              | 36.57                | 0.86                   |        |
| 3   | 5350.00     | 46.4 PK                 | 74.00          | -27.60      | 1.70V              | 311                  | 47.22            | 31.93               | 3.77              | 36.57                | 0.86                   | NOTE 6 |
| 4   | 10640.00    | 51.2 AV                 | 54.00          | -2.80       | 1.63V              | 297                  | 41.58            | 39.61               | 7.22              | 37.18                | -9.64                  | NOTE 6 |
| 5   | 10640.00    | 59.6 PK                 | 74.00          | -14.40      | 1.63V              | 297                  | 50.00            | 39.61               | 7.22              | 37.18                | -9.64.                 | NOTE 6 |

#### NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss  
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.
5. "\*" : Fundamental frequency
6. The radiated frequency falling in the restricted band.



|                                 |                                       |                             |                          |
|---------------------------------|---------------------------------------|-----------------------------|--------------------------|
| <b>EUT</b>                      | Dual-Band Wireless A+B<br>PCI Adapter | <b>MODEL</b>                | WMP51AB                  |
| <b>MODE</b>                     | Turbo Mode                            | <b>CHANNEL</b>              | 1                        |
| <b>FREQUENCY RANGE</b>          | Above 1000 MHz                        | <b>DETECTOR FUNCTION</b>    | Peak(PK)<br>Average (AV) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25 deg. C, 60%RH,<br>1050 hPa         | <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60Hz             |
| <b>TESTED BY</b>                | Gary Chang                            |                             |                          |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|---------------------|-------------------|----------------------|------------------------|
| 1   | *5210.00    | 79.9 AV                 |                |             | 1.13H              | 170                  | 80.70            | 31.88               | 3.90              | 36.62                | 0.83                   |
| 2   | *5210.00    | 88.2 PK                 |                |             | 1.13H              | 170                  | 89.00            | 31.88               | 3.90              | 36.62                | 0.83                   |
| 3   | 10420.00    | 54.9 PK                 | 68.30          | -13.40      | 1.09H              | 188                  | 46.00            | 39.30               | 6.99              | 37.35                | -8.94.                 |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|---------------------|-------------------|----------------------|------------------------|
| 1   | *5210.00    | 107.2 PK                |                |             | 1.18V              | 154                  | 108.00           | 31.88               | 3.90              | 36.62                | 0.83                   |
| 2   | *5210.00    | 95.2 AV                 |                |             | 1.18V              | 154                  | 96.00            | 31.88               | 3.90              | 36.62                | 0.83                   |
| 3   | 10420.00    | 56.9 PK                 | 68.30          | -11.40      | 1.06V              | 178                  | 48.00            | 39.30               | 6.99              | 37.35                | -8.94.                 |

#### NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss  
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.
5. "\*" : Fundamental frequency



|                                 |                                       |                             |                          |
|---------------------------------|---------------------------------------|-----------------------------|--------------------------|
| <b>EUT</b>                      | Dual-Band Wireless A+B<br>PCI Adapter | <b>MODEL</b>                | WMP51AB                  |
| <b>MODE</b>                     | Turbo Mode                            | <b>CHANNEL</b>              | 2                        |
| <b>FREQUENCY RANGE</b>          | Above 1000 MHz                        | <b>DETECTOR FUNCTION</b>    | Peak(PK)<br>Average (AV) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25 deg. C, 60%RH,<br>1050 hPa         | <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60Hz             |
| <b>TESTED BY</b>                | Gary Chang                            |                             |                          |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|---------------------|-------------------|----------------------|------------------------|
| 1   | *5250.00    | 87.2 PK                 |                |             | 1.30H              | 338                  | 88.00            | 31.90               | 3.86              | 36.60                | 0.84                   |
| 2   | *5250.00    | 80.2 AV                 |                |             | 1.30H              | 338                  | 81.00            | 31.90               | 3.86              | 36.60                | 0.84                   |
| 3   | 10500.00    | 55.1 PK                 | 68.30          | -13.20      | 1.49H              | 351                  | 45.70            | 39.43               | 7.22              | 37.28                | -9.36.                 |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|---------------------|-------------------|----------------------|------------------------|
| 1   | *5250.00    | 97.2 AV                 |                |             | 1.03V              | 217                  | 98.00            | 31.90               | 3.86              | 36.60                | 0.84                   |
| 2   | *5250.00    | 108.2 PK                |                |             | 1.03V              | 217                  | 109.00           | 31.90               | 3.86              | 36.60                | 0.84                   |
| 3   | 10500.00    | 54.4 PK                 | 68.30          | -13.90      | 1.83V              | 0                    | 45.00            | 39.43               | 7.22              | 37.28                | -9.36.                 |

#### NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss  
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.





|                                 |                                       |                             |                          |
|---------------------------------|---------------------------------------|-----------------------------|--------------------------|
| <b>EUT</b>                      | Dual-Band Wireless A+B<br>PCI Adapter | <b>MODEL</b>                | WMP51AB                  |
| <b>MODE</b>                     | Turbo Mode                            | <b>CHANNEL</b>              | 3                        |
| <b>FREQUENCY RANGE</b>          | Above 1000 MHz                        | <b>DETECTOR FUNCTION</b>    | Peak(PK)<br>Average (AV) |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25 deg. C, 60%RH,<br>1050 hPa         | <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60Hz             |
| <b>TESTED BY</b>                | Gary Chang                            |                             |                          |

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|---------------------|-------------------|----------------------|------------------------|
| 1   | *5290.00    | 88.2 AV                 |                |             | 1.00H              | 189                  | 89.00            | 31.92               | 3.82              | 36.58                | 0.85                   |
| 2   | *5290.00    | 96.2 PK                 |                |             | 1.00H              | 189                  | 97.00            | 31.92               | 3.82              | 36.58                | 0.85                   |
| 3   | 10580.00    | 55.5 PK                 | 68.30          | -12.80      | 1.01H              | 165                  | 46.00            | 39.49               | 7.22              | 37.25                | -9.46.                 |

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Table Angle (Degree) | Raw Value (dBuV) | Antenna Factor (dB) | Cable Factor (dB) | Pre-Amp. Factor (dB) | Correction Factor (dB) |
|-----|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|---------------------|-------------------|----------------------|------------------------|
| 1   | *5290.00    | 95.2 AV                 |                |             | 1.01V              | 258                  | 96.00            | 31.92               | 3.82              | 36.58                | 0.85                   |
| 2   | *5290.00    | 107.2 PK                |                |             | 1.01V              | 258                  | 108.00           | 31.92               | 3.82              | 36.58                | 0.85                   |
| 3   | 10580.00    | 57.5 PK                 | 68.30          | -10.80      | 1.04V              | 273                  | 48.00            | 39.49               | 7.22              | 37.25                | -9.46                  |

#### NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss  
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.
5. "\*" : Fundamental frequency



### 5.3 PEAK TRANSMIT POWER MEASUREMENT

#### 5.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

| Frequency Band    | Limit   |
|-------------------|---|
| 5.15 – 5.25 GHz   | The lesser of 50mW (17dBm) or 4dBm + 10logB   |
| 5.25 – 5.35 GHz   | The lesser of 250mW (24dBm) or 11dBm + 10logB |
| 5.725 – 5.825 GHz | The lesser of 1W (30dBm) or 17dBm + 10logB    |

**Note:** Where B is the 26dB emission bandwidth in MHz.

#### 5.3.2 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER          | FSEK30    | 100049     | July 24, 2003    |

**NOTE:**

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.




### 5.3.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set span to encompass the entire emission bandwidth of the signal.
3. Set RBW to 1MHz, VBW to 100kHz.
4. Using the spectrum analyzer's channel power measurement function to measure the output power.

### 5.3.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.3.5 TEST SETUP



### 5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



## 5.3.7 TEST RESULTS


|                                     |                                       |                                 |               |
|-------------------------------------|---------------------------------------|---------------------------------|---------------|
| <b>EUT</b>                          | Dual-Band Wireless A+B<br>PCI Adapter | <b>MODEL</b>                    | WMP51AB       |
| <b>MODE</b>                         | Normal                                | <b>INPUT POWER<br/>(SYSTEM)</b> | 120Vac, 60 Hz |
| <b>ENVIRONMENTAL<br/>CONDITIONS</b> | 25deg. C, 65%RH,<br>1005 hPa          | <b>TESTED BY</b>                | Steven Lu     |

| <b>CHANNEL</b> | <b>CHANNEL<br/>FREQUENCY<br/>(MHz)</b> | <b>PEAK POWER<br/>OUTPUT<br/>(dBm)</b> | <b>PEAK POWER<br/>LIMIT<br/>(dBm)</b> | <b>26dBc<br/>Occupied<br/>Bandwidth<br/>(MHz)</b> | <b>PASS/FAIL</b> |
|----------------|--|--|---------------------------------------|---|------------------|
| 1              | 5180                                   | 16.22                                  | 17.00                                 | 31.04   | PASS             |
| 4              | 5240                                   | 16.56                                  | 17.00                                 | 32.00   | PASS             |
| 5              | 5260                                   | 15.67                                  | 24.00                                 | 31.04   | PASS             |
| 8              | 5320                                   | 16.19                                  | 24.00                                 | 32.00   | PASS             |

**NOTE:** The 26dBc Occupied Bandwidth plot, please refer to the following pages.




CHANNEL 1

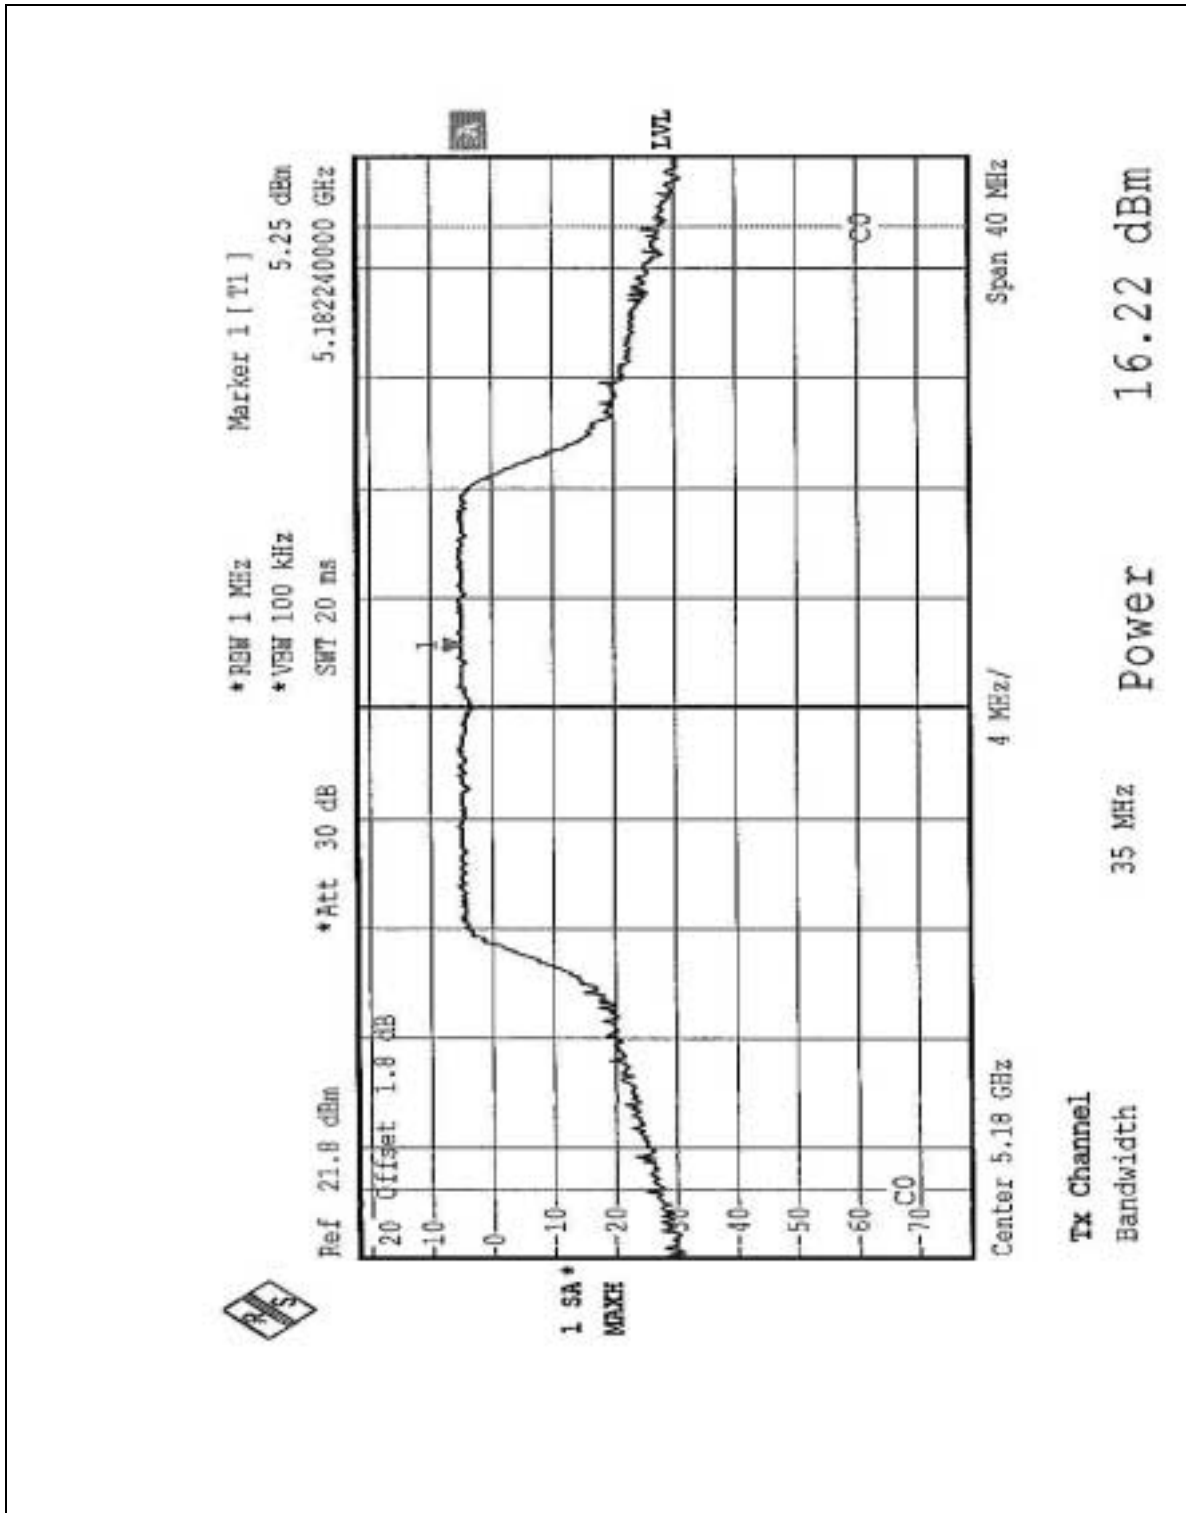




CHANNEL 4

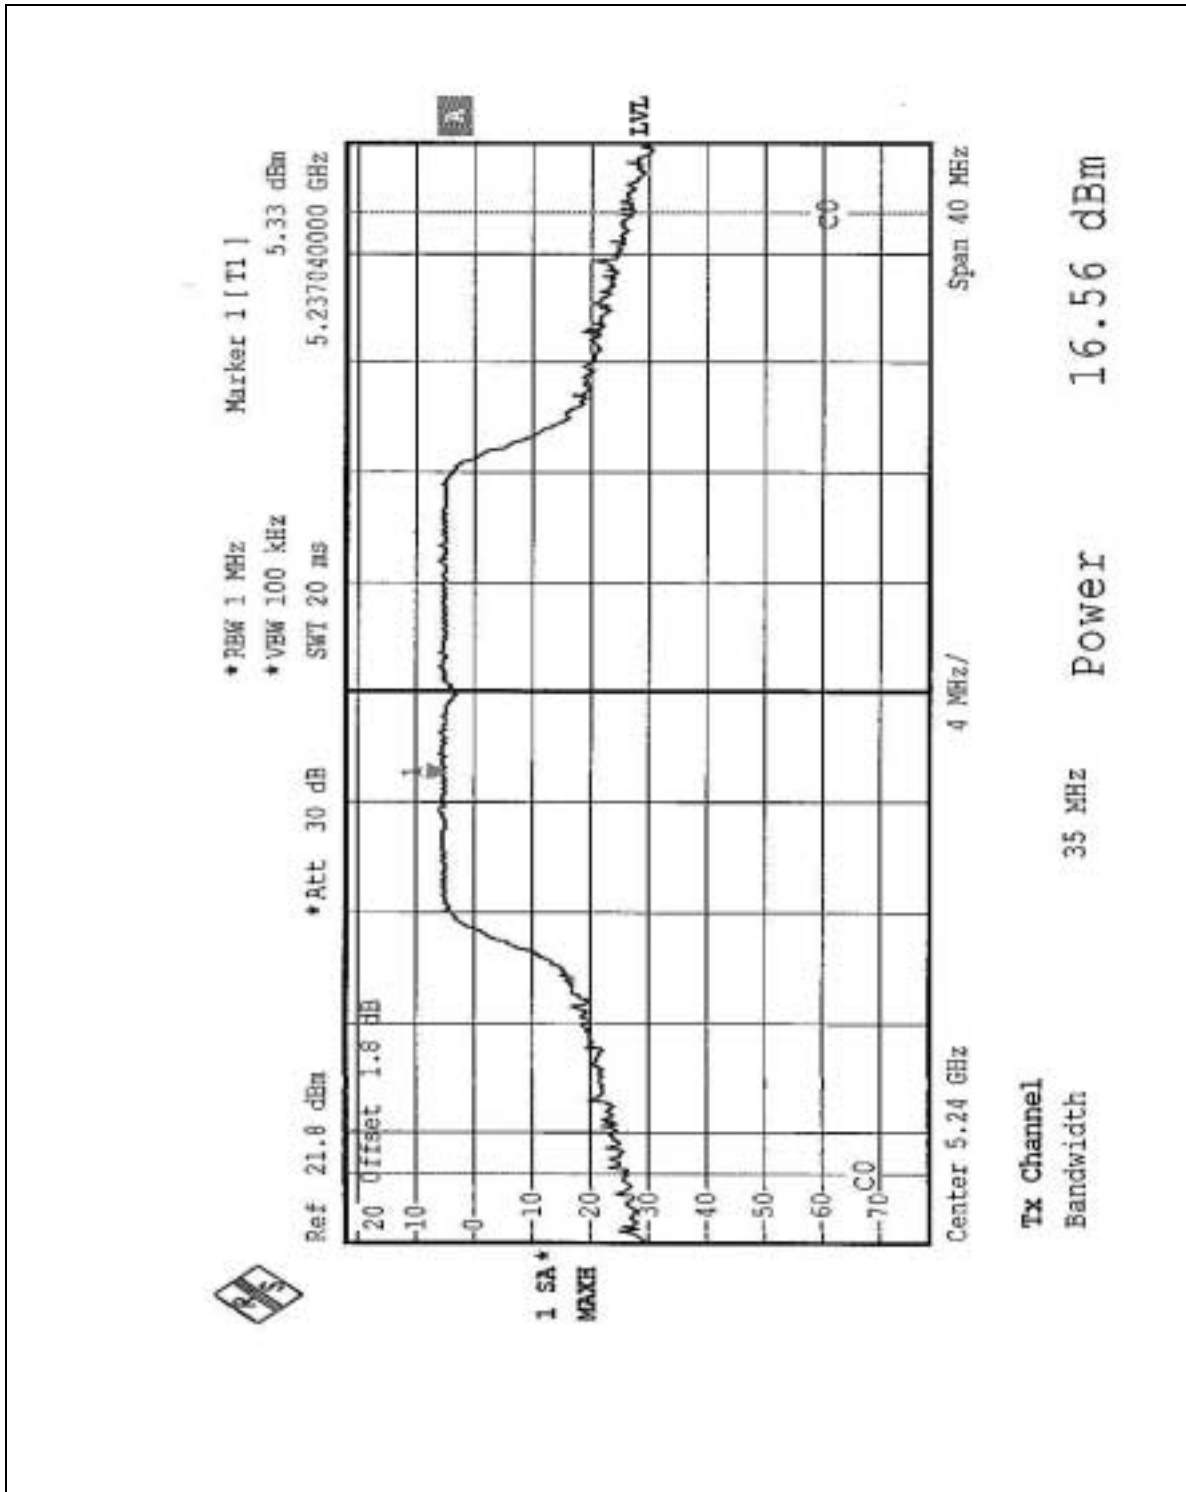




CHANNEL 5

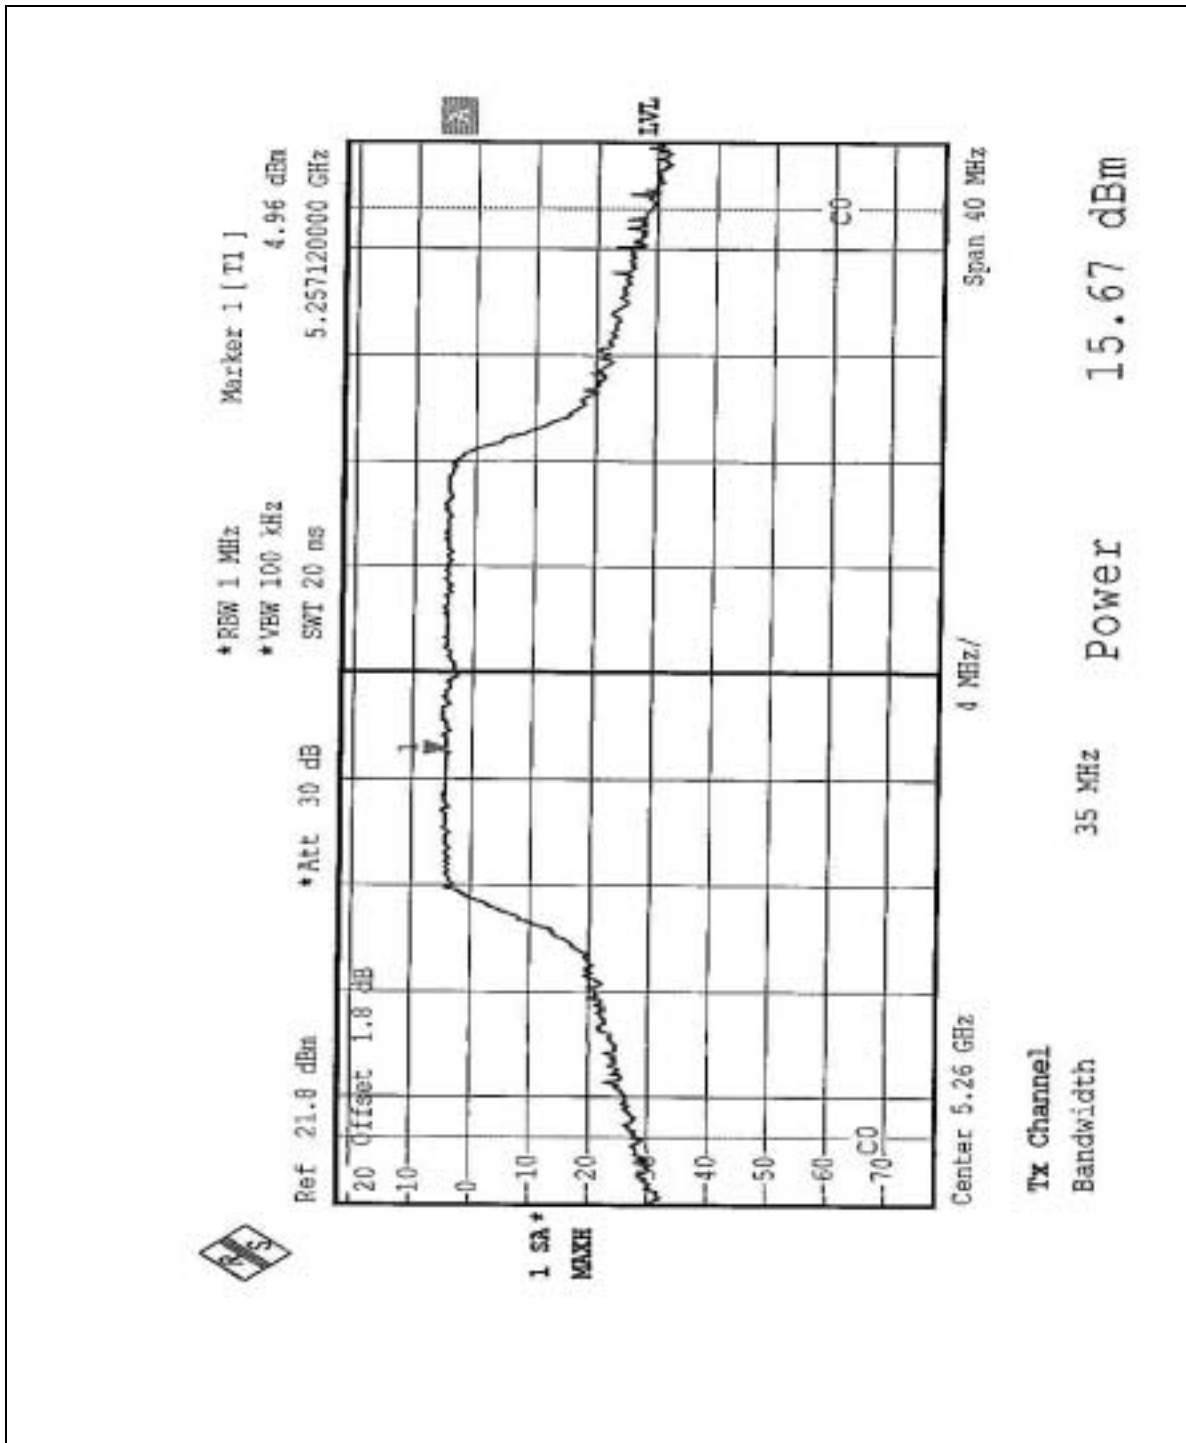




CHANNEL 8

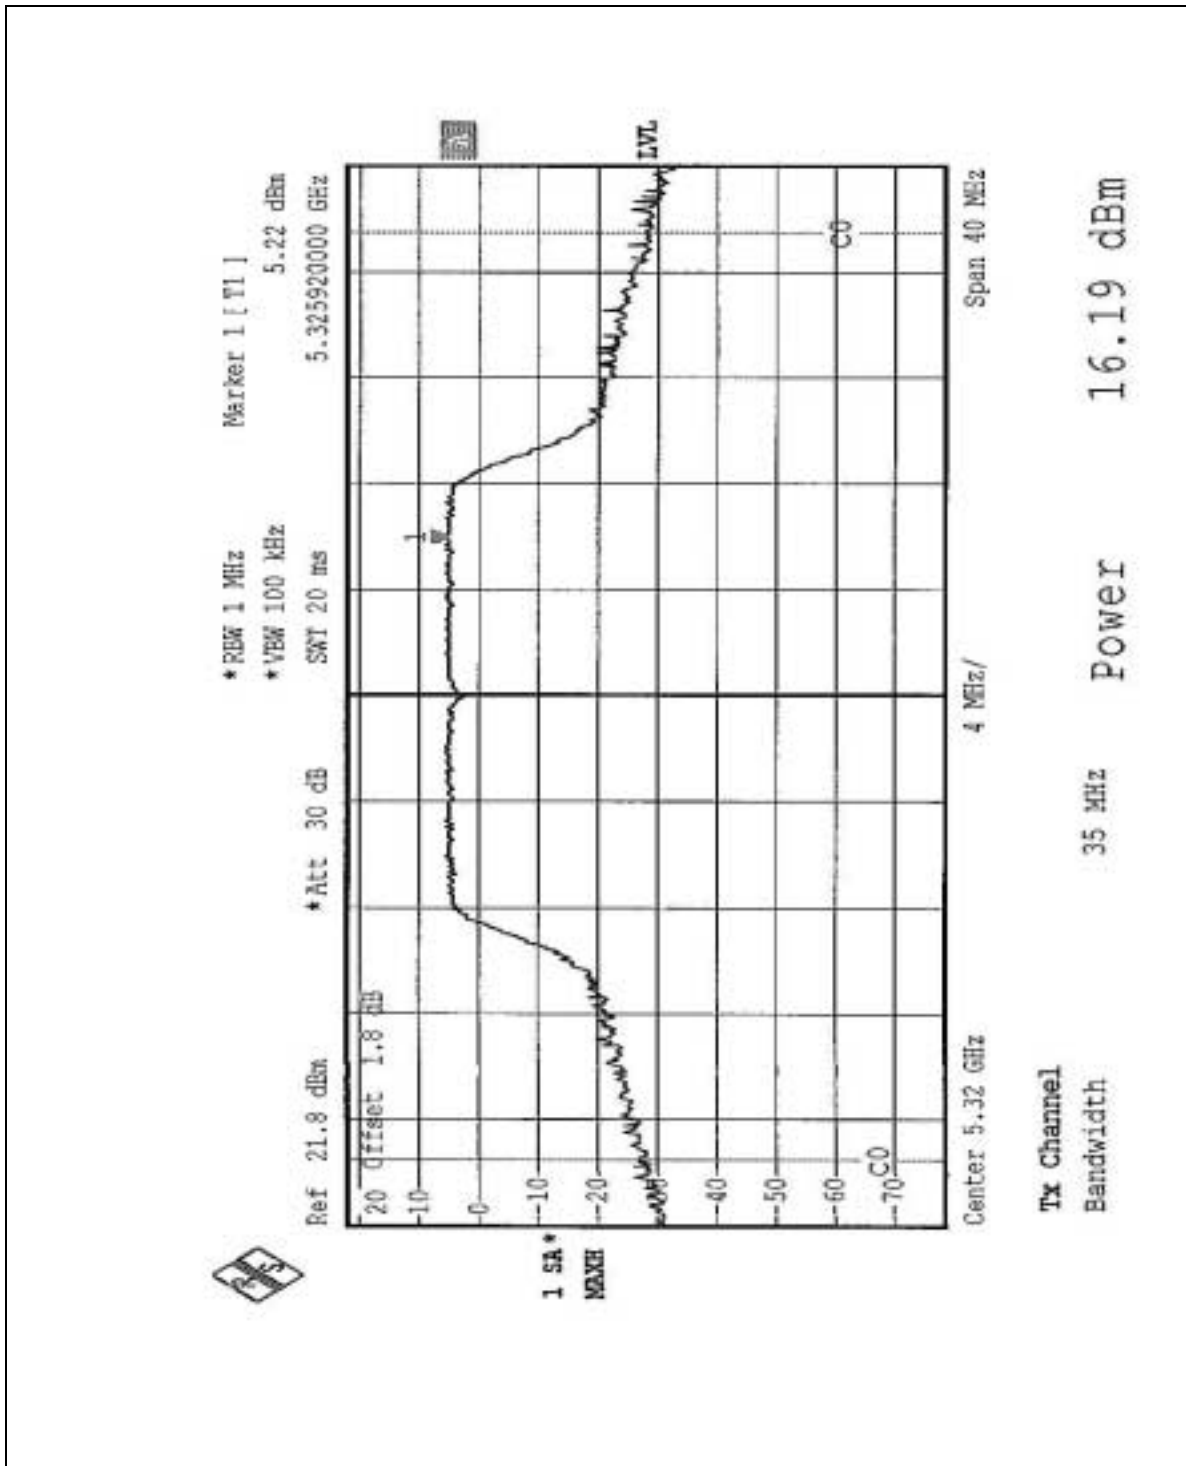






CHANNEL 1

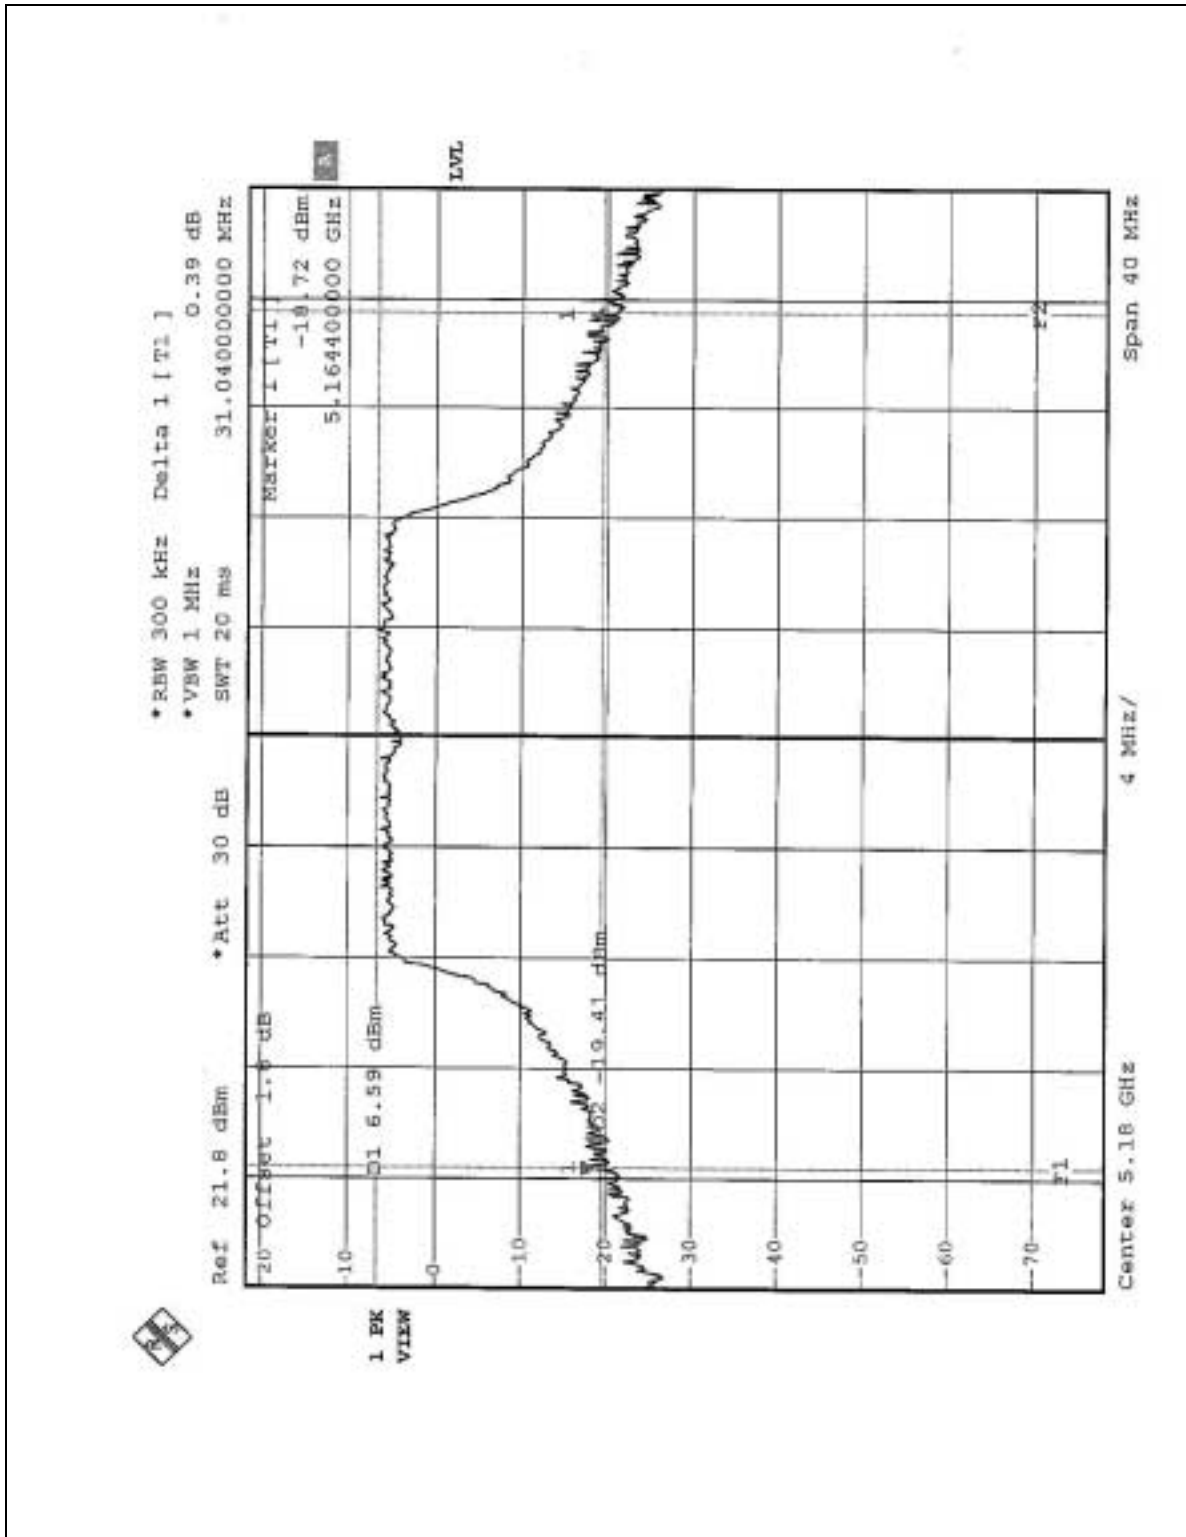




CHANNEL 4

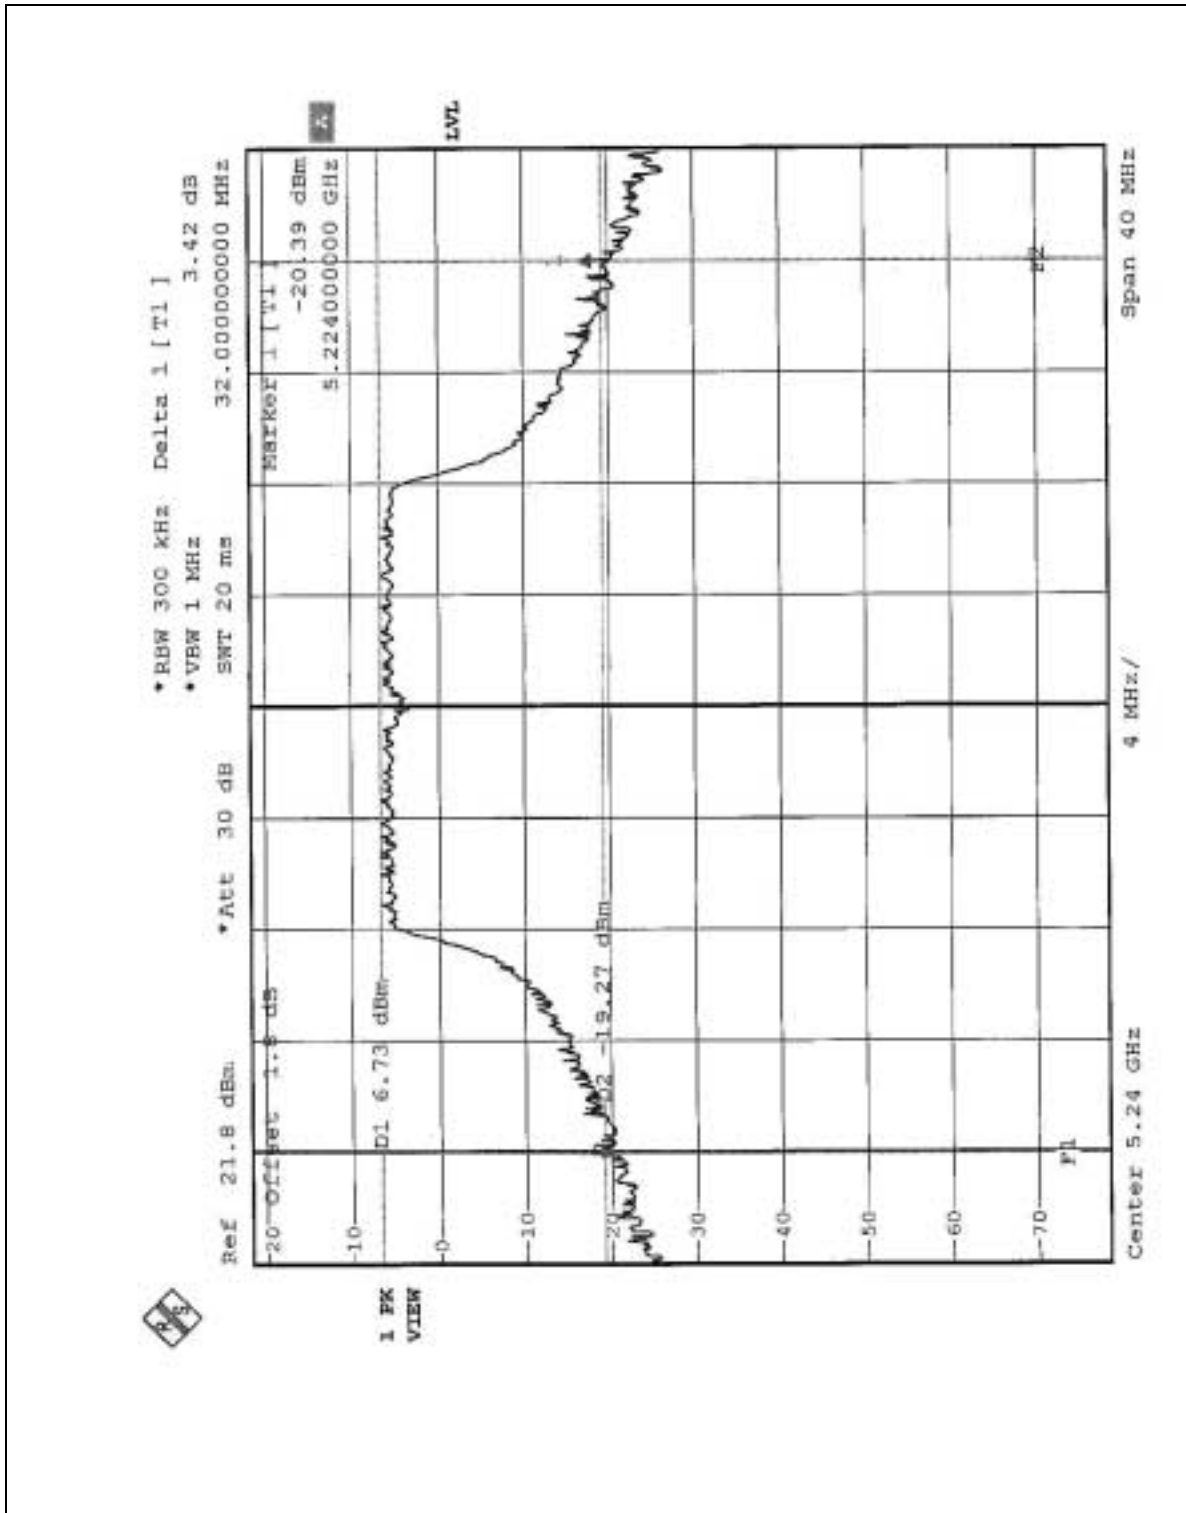




CHANNEL 5





CHANNEL 8






|                                 |                                    |                             |               |
|---------------------------------|------------------------------------|-----------------------------|---------------|
| <b>EUT</b>                      | Dual-Band Wireless A+B PCI Adapter | <b>MODEL</b>                | WMP51AB       |
| <b>MODE</b>                     | Turbo                              | <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60 Hz |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 65%RH, 1005 hPa          | <b>TESTED BY</b>            | Steven Lu     |

| <b>CHANNEL</b> | <b>CHANNEL FREQUENCY (MHz)</b> | <b>PEAK POWER OUTPUT (dBm)</b> | <b>PEAK POWER LIMIT (dBm)</b> | <b>26dBc Occupied Bandwidth (MHz)</b> | <b>PASS/FAIL</b> |
|----------------|--------------------------------|--------------------------------|-------------------------------|---------------------------------------|------------------|
| 1              | 5210                           | 16.65                          | 17.00                         | 50.76                                 | PASS             |
| 2              | 5250                           | 15.77                          | 17.00                         | 47.04                                 | PASS             |
| 3              | 5290                           | 15.94                          | 24.00                         | 48.96                                 | PASS             |

**NOTE:** The 26dBc Occupied Bandwidth plot, please refer to the following pages.




CHANNEL 1






CHANNEL 2






CHANNEL 3








CHANNEL 1






CHANNEL 2





CHANNEL 3

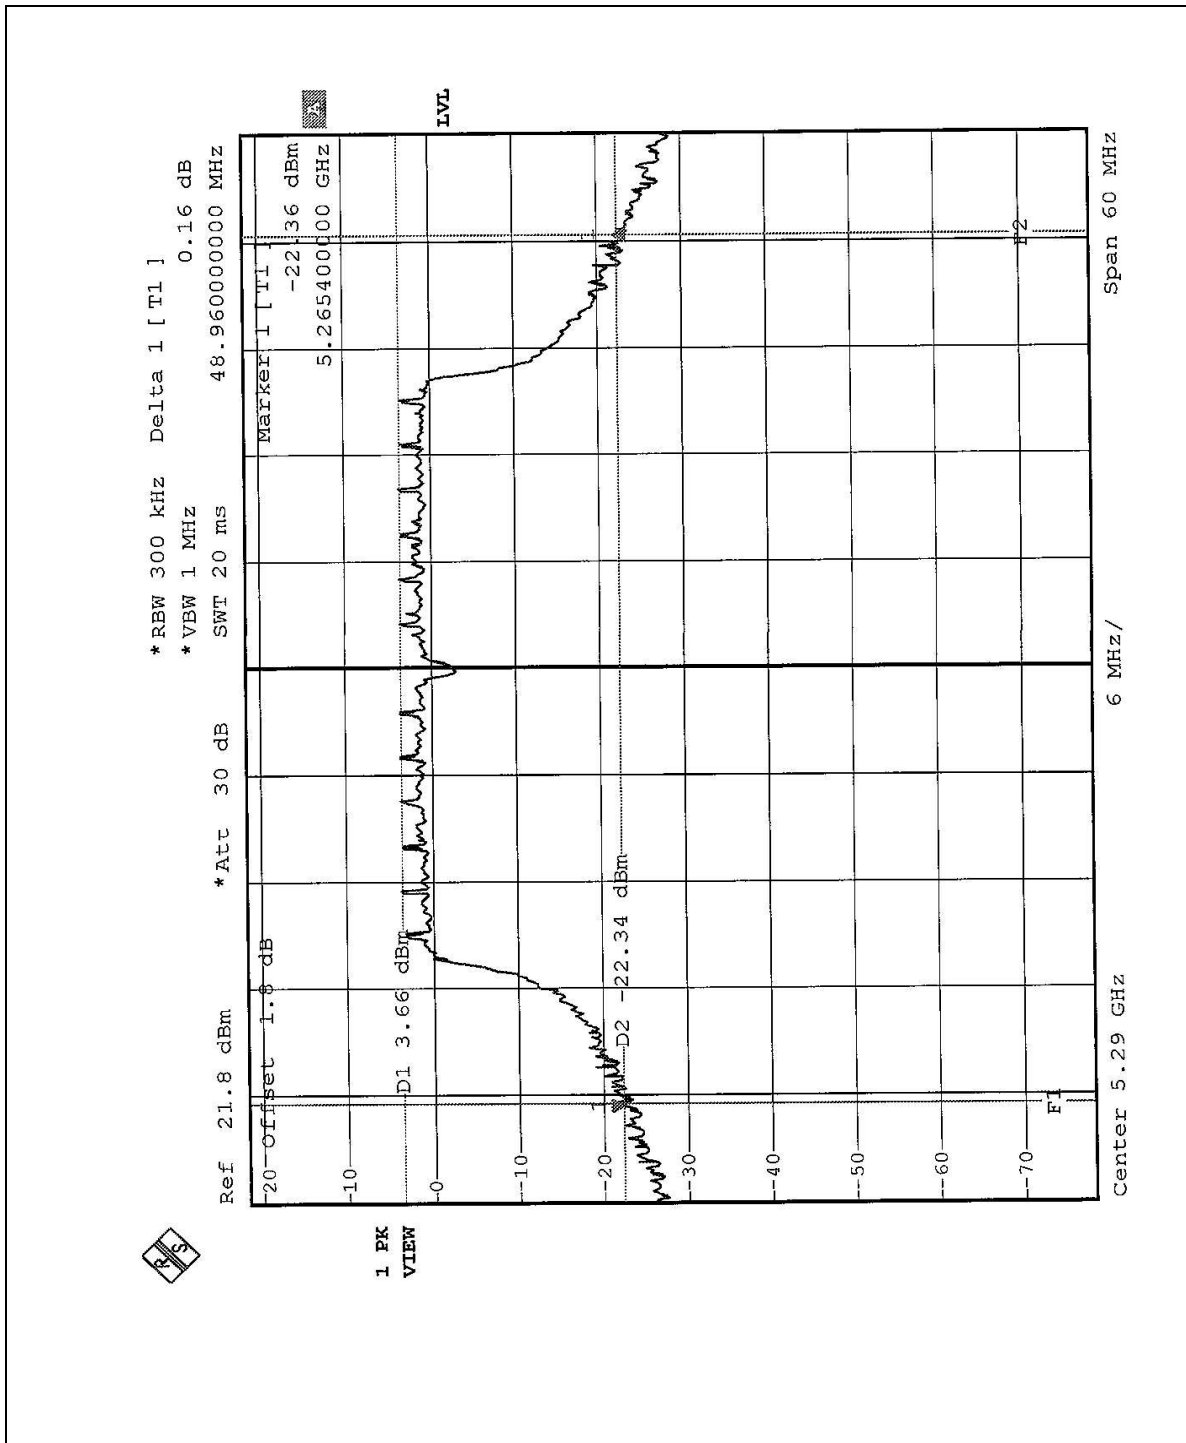



## 5.4 PEAK POWER EXCURSION MEASUREMENT

### 5.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

| Frequency Band    | Limit |
|-------------------|-------|
| 5.15 – 5.25 GHz   | 13dB  |
| 5.25 – 5.35 GHz   | 13dB  |
| 5.725 – 5.825 GHz | 13dB  |

### 5.4.2 TEST INSTRUMENTS

| Description & Manufacturer         | Model No. | Serial No. | Calibrated Until |
|------------------------------------|-----------|------------|------------------|
| ROHDE&SCHWARZ<br>SPECTRUM ANALYZER | FSEK30    | 100049     | July 24, 2003    |

**NOTE:**

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.




### 5.4.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set the spectrum bandwidth span to view the entire spectrum.
3. Using peak detector and Max-hold function for Trace 1 (RB=1MHz, VB=3MHz) and 2 (RB=1MHz, VB=100KHz).
4. The largest difference between Trace 1 and Trace 2 in any 1MHz band on any frequency was recorded.

### 5.4.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.4.5 TEST SETUP



### 5.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.




## 5.4.7 TEST RESULTS

|                                     |                                       |                                 |               |
|-------------------------------------|---------------------------------------|---------------------------------|---------------|
| <b>EUT</b>                          | Dual-Band Wireless A+B<br>PCI Adapter | <b>MODEL</b>                    | WMP51AB       |
| <b>MODE</b>                         | Normal                                | <b>INPUT POWER<br/>(SYSTEM)</b> | 120Vac, 60 Hz |
| <b>ENVIRONMENTAL<br/>CONDITIONS</b> | 25deg. C, 65%RH,<br>1005 hPa          | <b>TESTED BY</b>                | Steven Lu     |

| <b>CHANNEL</b> | <b>CHANNEL<br/>FREQUENCY<br/>(MHz)</b> | <b>PEAK POWER<br/>EXCURSION<br/>(dB)</b> | <b>PEAK to<br/>AVERAGE<br/>EXCURSION LIMIT<br/>(dB)</b> | <b>PASS/FAIL</b> |
|----------------|--|--|---|------------------|
| 1              | 5180                                   | 8.44                                     | 13  | PASS             |
| 4              | 5240                                   | 7.70                                     | 13  | PASS             |
| 5              | 5260                                   | 8.94                                     | 13  | PASS             |
| 8              | 5320                                   | 8.85                                     | 13  | PASS             |




CHANNEL 1






CHANNEL 4








CHANNEL 5

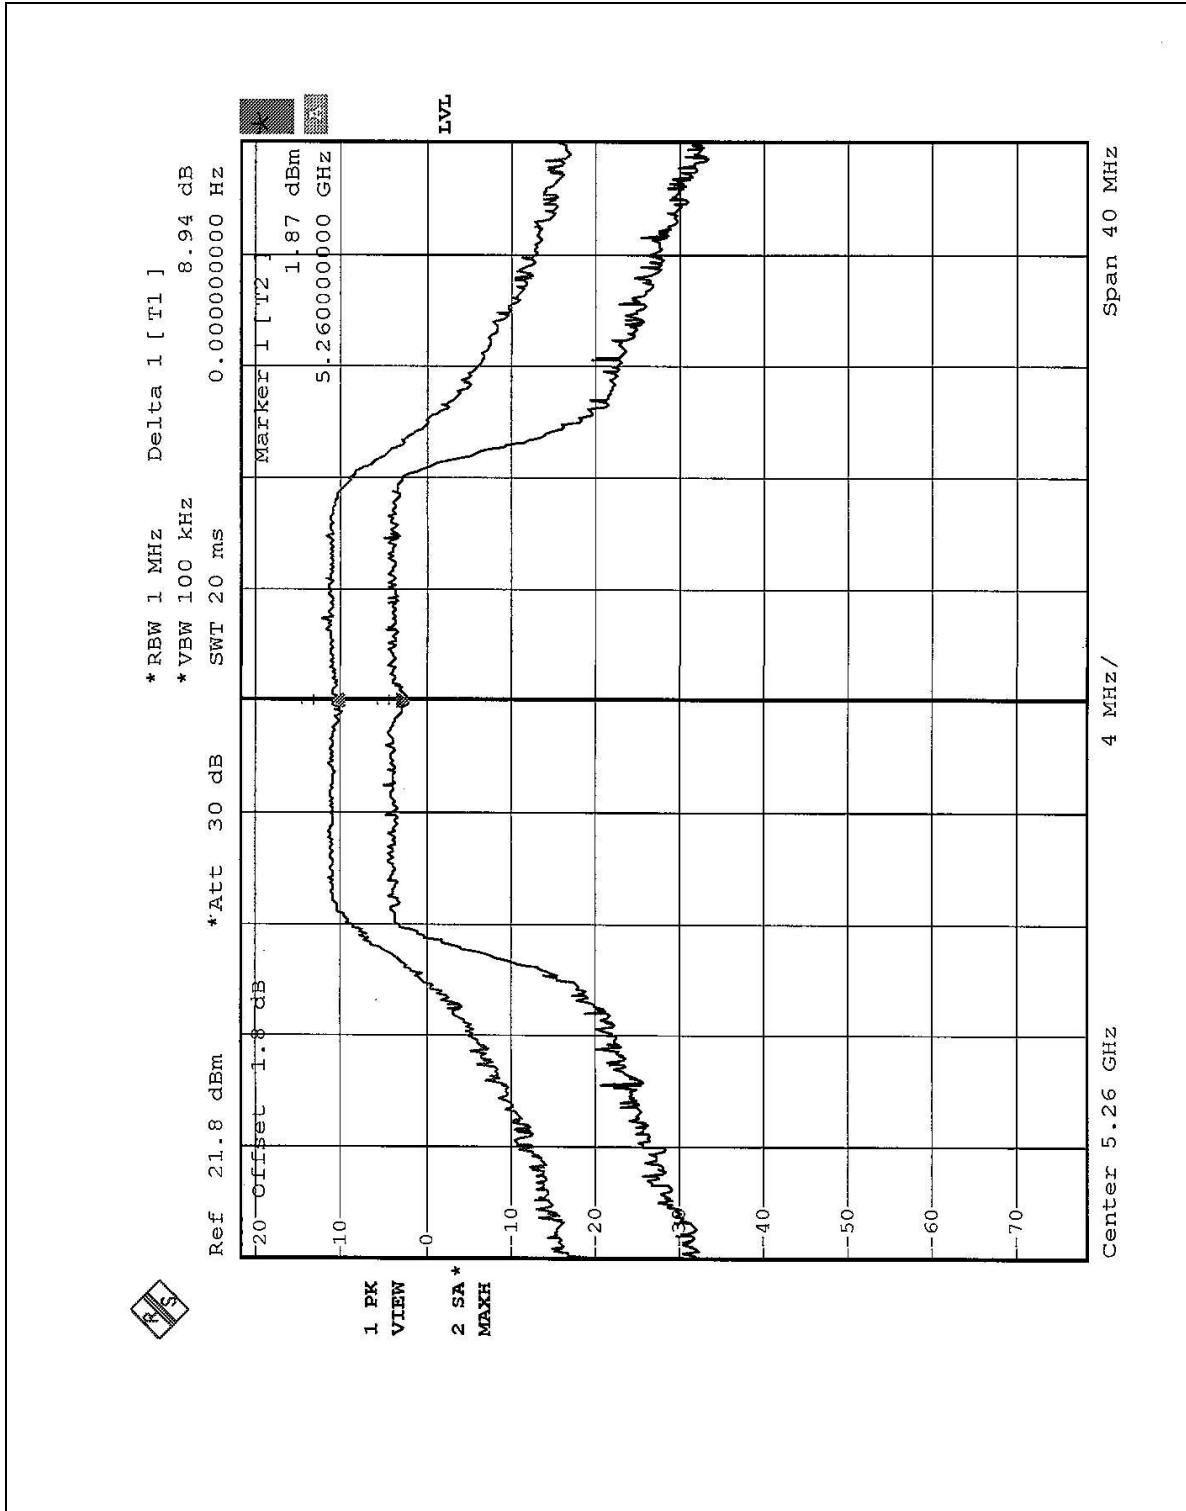



CHANNEL 8






|                                 |                                    |                             |               |
|---------------------------------|------------------------------------|-----------------------------|---------------|
| <b>EUT</b>                      | Dual-Band Wireless A+B PCI Adapter | <b>MODEL</b>                | WMP51AB       |
| <b>MODE</b>                     | Turbo                              | <b>INPUT POWER (SYSTEM)</b> | 120Vac, 60 Hz |
| <b>ENVIRONMENTAL CONDITIONS</b> | 25deg. C, 65%RH, 1005 hPa          | <b>TESTED BY</b>            | Steven Lu     |

| <b>CHANNEL</b> | <b>CHANNEL FREQUENCY (MHz)</b> | <b>PEAK POWER EXCURSION (dB)</b> | <b>PEAK to AVERAGE EXCURSION LIMIT (dB)</b> | <b>PASS/FAIL</b> |
|----------------|--------------------------------|----------------------------------|---|------------------|
| 1              | 5210                           | 8.73                             | 13  | PASS             |
| 2              | 5250                           | 9.17                             | 13  | PASS             |
| 3              | 5290                           | 9.07                             | 13  | PASS             |




CHANNEL 1






CHANNEL 2





CHANNEL 3





## 5.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT

### 5.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

| Frequency Band    | Limit |
|-------------------|-------|
| 5.15 – 5.25 GHz   | 4dBm  |
| 5.25 – 5.35 GHz   | 11dBm |
| 5.725 – 5.825 GHz | 17dBm |

### 5.5.2 TEST INSTRUMENTS

| Description & Manufacturer         | Model No. | Serial No. | Calibrated Until |
|------------------------------------|-----------|------------|------------------|
| ROHDE&SCHWARZ<br>SPECTRUM ANALYZER | FSEK30    | 100049     | July 24, 2003    |

**NOTE:**

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



### 5.5.3 TEST PROCEDURES

1. The transmitter output was connected to the spectrum analyzer.
2. Set RBW=1MHz, VBW=3MHz. The PPSD is the highest level found across the emission in any 1MHz band.

### 5.5.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.5.5 TEST SETUP



### 5.5.6 EUT OPERATING CONDITIONS

Same as 5.3.6






## 5.5.7 TEST RESULTS

|                                     |                                       |                                 |               |
|-------------------------------------|---------------------------------------|---------------------------------|---------------|
| <b>EUT</b>                          | Dual-Band Wireless A+B<br>PCI Adapter | <b>MODEL</b>                    | WMP51AB       |
| <b>MODE</b>                         | Normal                                | <b>INPUT POWER<br/>(SYSTEM)</b> | 120Vac, 60 Hz |
| <b>ENVIRONMENTAL<br/>CONDITIONS</b> | 25deg. C, 65%RH,<br>1005 hPa          | <b>TESTED BY</b>                | Steven Lu     |

| <b>CHANNEL<br/>NUMBER</b> | <b>CHANNEL<br/>FREQUENCY<br/>(MHz )</b> | <b>RF POWER LEVEL IN<br/>1 MHz BW<br/>(dBm)</b> | <b>MAXIMUM<br/>LIMIT<br/>(dBm)</b> | <b>PASS/FAIL</b> |
|---------------------------|---|---|------------------------------------|------------------|
| 1                         | 5180                                    | 1.56  | 4                                  | PASS             |
| 4                         | 5240                                    | 2.01  | 4                                  | PASS             |
| 5                         | 5260                                    | 0.78  | 11                                 | PASS             |
| 8                         | 5320                                    | 1.41  | 11                                 | PASS             |




CHANNEL 1






CHANNEL 4

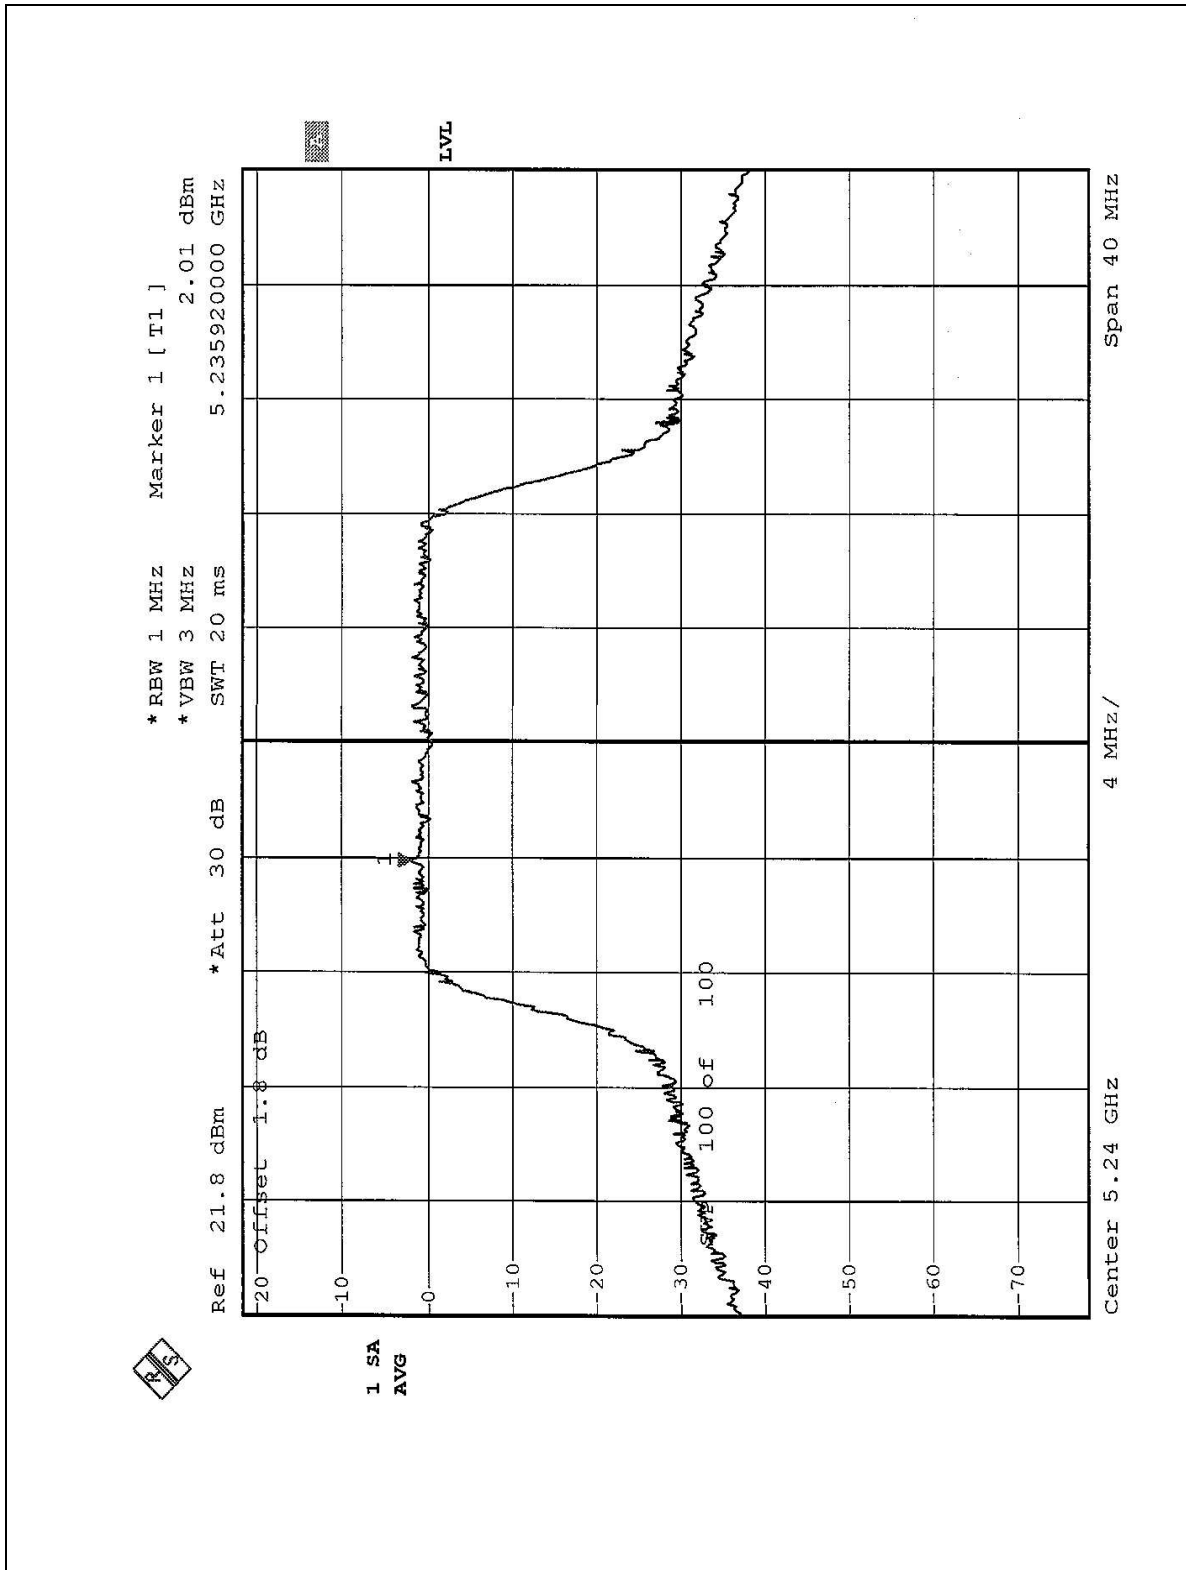




CHANNEL 5





CHANNEL 8






|                                     |                                       |                                 |               |
|-------------------------------------|---------------------------------------|---------------------------------|---------------|
| <b>EUT</b>                          | Dual-Band Wireless A+B<br>PCI Adapter | <b>MODEL</b>                    | WMP51AB       |
| <b>MODE</b>                         | Turbo                                 | <b>INPUT POWER<br/>(SYSTEM)</b> | 120Vac, 60 Hz |
| <b>ENVIRONMENTAL<br/>CONDITIONS</b> | 25deg. C, 65%RH,<br>1005 hPa          | <b>TESTED BY</b>                | Steven Lu     |

| <b>CHANNEL<br/>NUMBER</b> | <b>CHANNEL<br/>FREQUENCY<br/>(MHz )</b> | <b>RF POWER LEVEL IN<br/>1 MHz BW<br/>(dBm)</b> | <b>MAXIMUM<br/>LIMIT<br/>(dBm)</b> | <b>PASS/FAIL</b> |
|---------------------------|---|---|------------------------------------|------------------|
| 1                         | 5210                                    | -0.84   | 4                                  | PASS             |
| 2                         | 5250                                    | -1.78   | 4                                  | PASS             |
| 3                         | 5290                                    | -2.15   | 11                                 | PASS             |




CHANNEL 1






CHANNEL 2







CHANNEL 3





## 5.6 FREQUENCY STABILITY

### 5.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within +/- 0.02% of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

### 5.6.2 TEST INSTRUMENTS

| Description & Manufacturer                    | Model No. | Serial No. | Calibrated Until |
|---|-----------|------------|------------------|
| ANRITSU SPECTRUM ANALYZER                     | MS2667C   | M10281     | Mar. 15, 2003    |
| WIT STANDARD TEMPERATURE AND HUMIDITY CHAMBER | TH-4S-C   | W901030    | Jun. 24, 2003    |

**NOTE:**

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


### 5.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

### 5.6.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.6.5 TEST SETUP

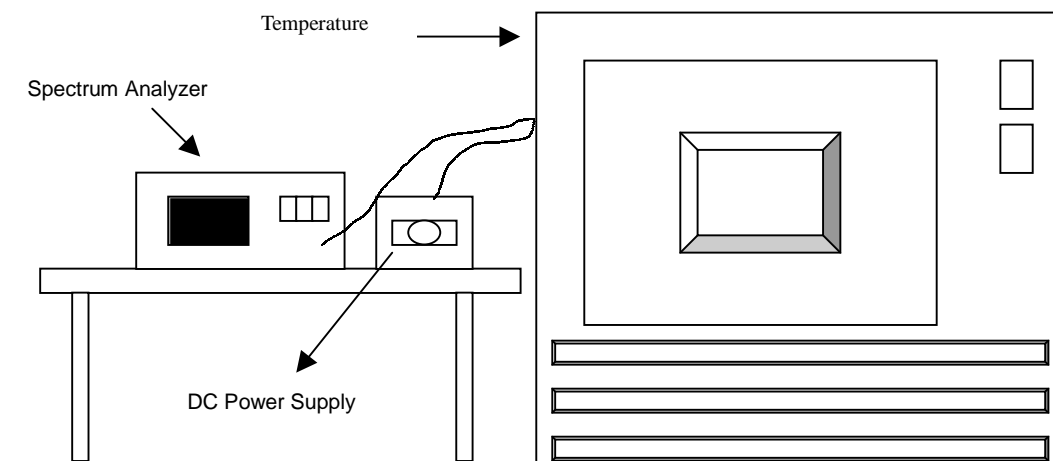

### 5.6.6 EUT OPERATING CONDITION

Same as Item 4.1.6



5.6.7 TEST RESULTS

|            |                    | Operating frequency: 5180MHz |            |           |            | Limit : ± 0.02% |            |
|------------|--------------------|------------------------------|------------|-----------|------------|-----------------|------------|
| Temp. (°C) | Power supply (VDC) | 2 minute                     |            | 5 minute  |            | 10 minute       |            |
|            |                    | (MHz)                        | (%)        | (MHz)     | (%)        | (MHz)           | (%)        |
| 50         | 126.5              | 5180.0308                    | 0.0005946  | 5180.0312 | 0.0006023  | 5180.0316       | 0.0006100  |
|            | 110.0              | 5180.0306                    | 0.0005907  | 5180.0314 | 0.0006062  | 5180.0320       | 0.0006178  |
|            | 93.5               | 5180.0308                    | 0.0005946  | 5180.0312 | 0.0006023  | 5180.0316       | 0.0006100  |
| 40         | 126.5              | 5180.0024                    | 0.0000463  | 5180.0036 | 0.0000695  | 5180.0036       | 0.0000695  |
|            | 110.0              | 5180.0018                    | 0.0000347  | 5180.0034 | 0.0000656  | 5180.0038       | 0.0000734  |
|            | 93.5               | 5180.0028                    | 0.0000541  | 5180.0038 | 0.0000734  | 5180.0044       | 0.0000849  |
| 30         | 126.5              | 5179.9944                    | -0.0001081 | 5179.9942 | -0.0001120 | 5179.9942       | -0.0001120 |
|            | 110.0              | 5179.9942                    | -0.0001120 | 5179.9940 | -0.0001158 | 5179.9944       | -0.0001081 |
|            | 93.5               | 5179.9944                    | -0.0001081 | 5179.9940 | -0.0001158 | 5179.9977       | -0.0000444 |
| 20         | 126.5              | 5179.9894                    | -0.0002046 | 5179.9898 | -0.0001969 | 5179.9900       | -0.0001931 |
|            | 110.0              | 5179.9896                    | -0.0002008 | 5179.9900 | -0.0001931 | 5179.9900       | -0.0001931 |
|            | 93.5               | 5179.9898                    | -0.0001969 | 5179.9898 | -0.0001969 | 5179.9898       | -0.0001969 |
| 10         | 126.5              | 5179.9904                    | -0.0001853 | 5179.9908 | -0.0001776 | 5179.9904       | -0.0001853 |
|            | 110.0              | 5179.9906                    | -0.0001815 | 5179.9906 | -0.0001815 | 5179.9904       | -0.0001853 |
|            | 93.5               | 5179.9908                    | -0.0001776 | 5179.9904 | -0.0001853 | 5179.9906       | -0.0001815 |
| 0          | 126.5              | 5179.9972                    | -0.0000541 | 5179.9972 | -0.0000541 | 5179.9972       | -0.0000541 |
|            | 110.0              | 5179.9972                    | -0.0000541 | 5179.9974 | -0.0000502 | 5179.9972       | -0.0000541 |
|            | 93.5               | 5179.9974                    | -0.0000502 | 5179.9974 | -0.0000502 | 5179.9972       | -0.0000541 |
| -10        | 126.5              | 5180.0004                    | 0.0000077  | 5180.0006 | 0.0000116  | 5180.0008       | 0.0000154  |
|            | 110.0              | 5180.0004                    | 0.0000077  | 5180.0006 | 0.0000116  | 5180.0008       | 0.0000154  |
|            | 93.5               | 5180.0006                    | 0.0000116  | 5180.0006 | 0.0000116  | 5180.0008       | 0.0000154  |
| -20        | 126.5              | 5180.0104                    | 0.0002008  | 5180.0104 | 0.0002008  | 5180.0106       | 0.0002046  |
|            | 110.0              | 5180.0102                    | 0.0001969  | 5180.0104 | 0.0002008  | 5180.0104       | 0.0002008  |
|            | 93.5               | 5180.0104                    | 0.0002008  | 5180.0104 | 0.0002008  | 5180.0106       | 0.0002046  |
| -30        | 126.5              | 5180.0116                    | 0.0002239  | 5180.0118 | 0.0002278  | 5180.0118       | 0.0002278  |
|            | 110.0              | 5180.0114                    | 0.0002201  | 5180.0118 | 0.0002278  | 5180.0118       | 0.0002278  |
|            | 93.5               | 5180.0116                    | 0.0002239  | 5180.0118 | 0.0002278  | 5180.0120       | 0.0002317  |



## 5.7 BAND EDGES MEASUREMENT

### 5.7.1 TEST INSTRUMENTS

| Description & Manufacturer | Model No. | Serial No. | Calibrated Until |
|----------------------------|-----------|------------|------------------|
| SPECTRUM ANALYZER          | FSEK30    | 100049     | July 24, 2003    |

#### NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 5.7.2 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 1MHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

### 5.7.3 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

### 5.7.4 TEST RESULTS


For signals in the restricted bands above and below the 5.15 to 5.35 GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was applied to the average and peak filed strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.


The spectrum plots (Peak RBW=VBW=1MHz; Average RBW=1MHz, VBW=300Hz) are attached on the following 8 pages.



Normal Mode: Channel 1 (5180 MHz)

The band edge emission plot on the following 2 pages shows 41.0dBc (Peak) / 49.74dBc (Average) between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 (normal mode) is 101.0dBuV/m, so the maximum field strength in restrict band is  $101.0 - 49.74 = 51.26$  dBuV/m which is under 54dBuV/m limit.

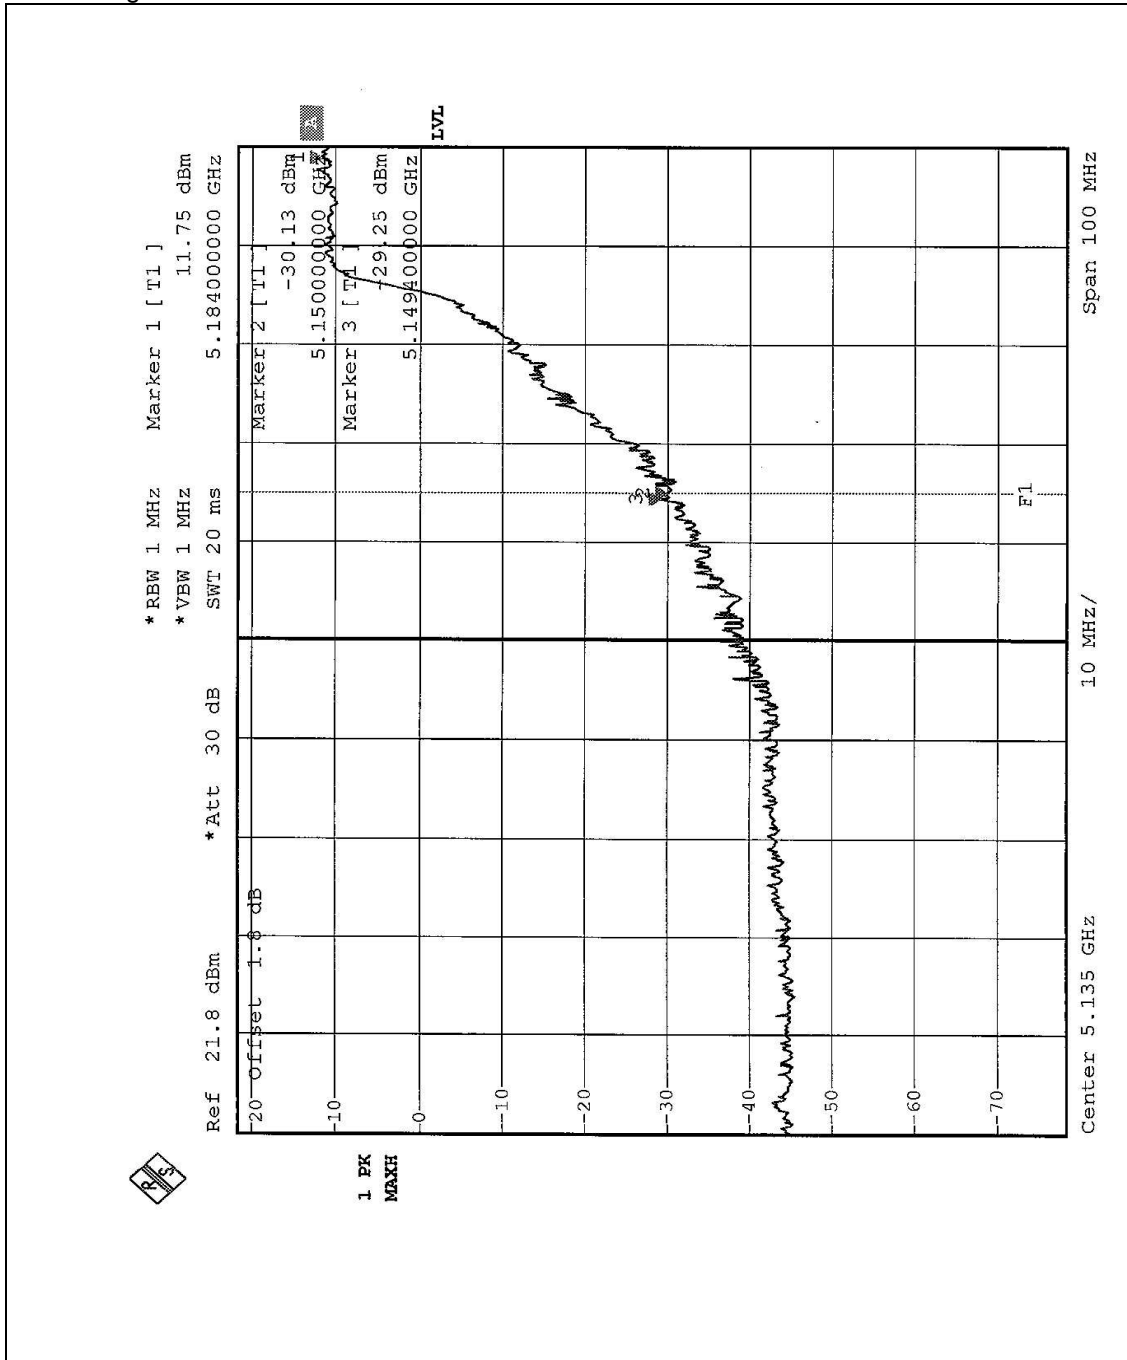







Normal Mode: Channel 8 (5320 MHz)

The band edge emission plot on the following 2 pages shows 42.34dBc (Peak) / 48.47dBc (Average) between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 8 (normal mode) is 101.1dBuV/m, so the maximum field strength in restrict band is  $101.1 - 48.47 = 52.63$ dBuV/m which is under 54dBuV/m limit.











Turbo Mode: Channel 1 (5210 MHz)

The band edge emission plot on the following 2 pages shows 44.53dBc (Peak) / 48.79dBc (Average) between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 (normal mode) is 95.2dBuV/m, so the maximum field strength in restrict band is 95.2-48.79=46.41dBuV/m which is under 54dBuV/m limit.

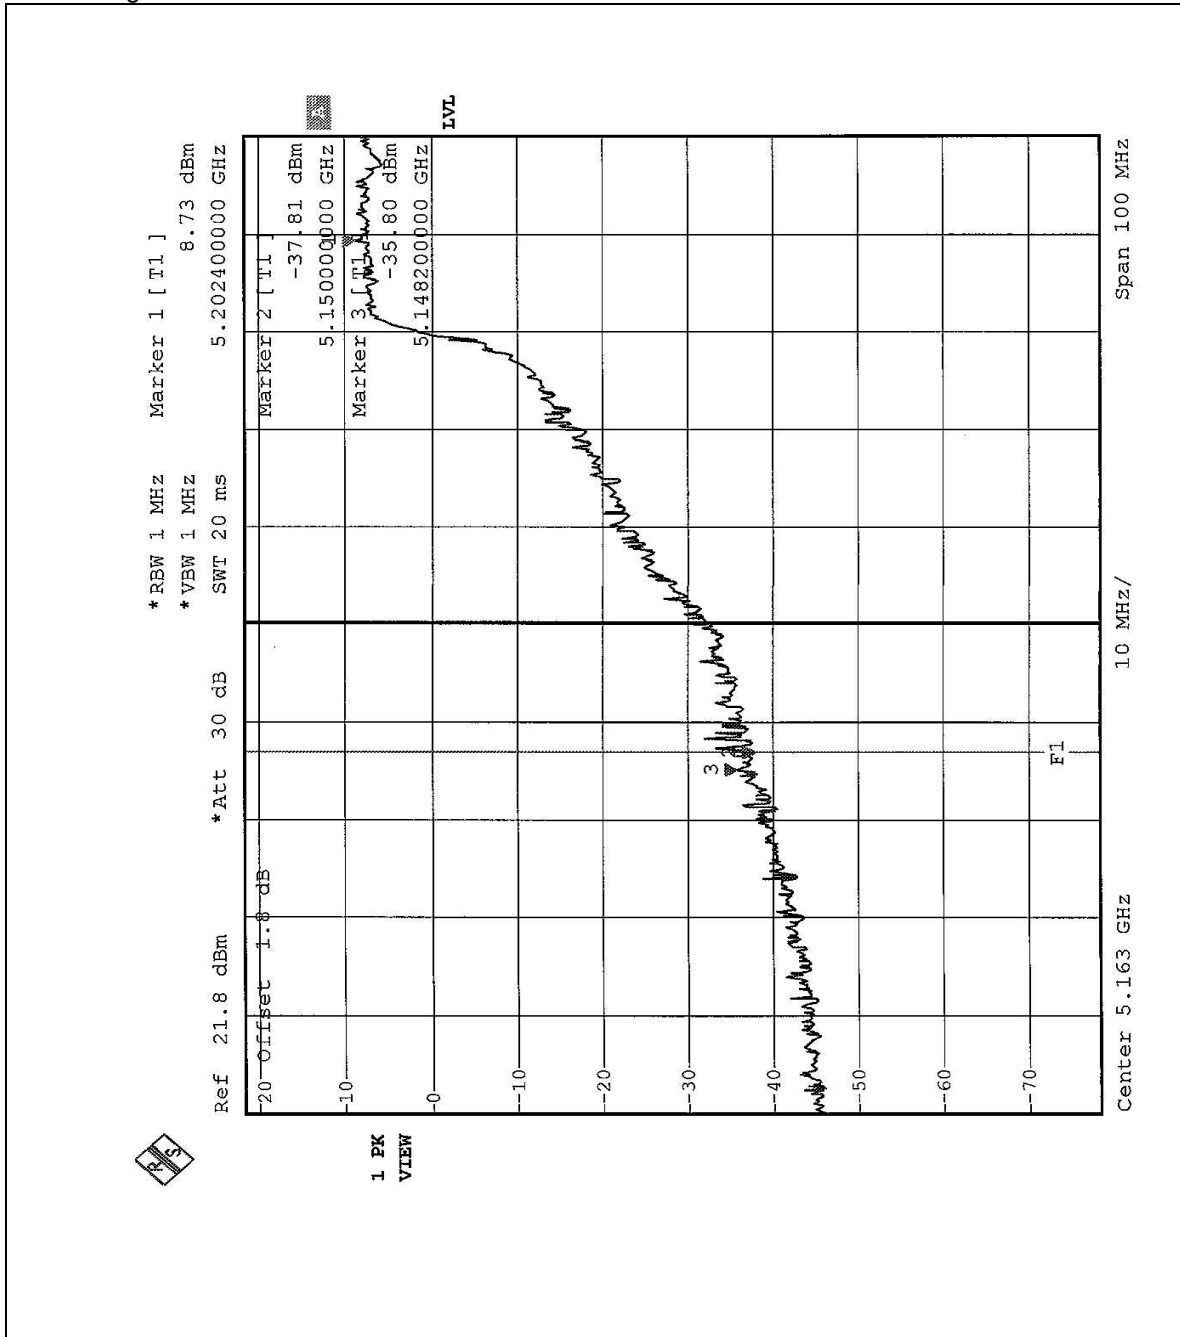







Turbo Mode: Channel 3 (5290 MHz)

The band edge emission plot on the following 2 pages shows 45.02dBc (Peak) / 47.73dBc (Average) between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 3 (normal mode) is 95.2dBuV/m, so the maximum field strength in restrict band is  $95.2 - 47.73 = 47.47$  dBuV/m which is under 54dBuV/m limit.







## **5.8 ANTENNA REQUIREMENT**

### **5.8.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **5.8.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna used in this product is Dipole antenna without connector. The maximum Gain of the antenna is 2.7dBi.

## 6. PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST



### RADIATED EMISSION TEST







## 7. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

|                    |                 |
|--------------------|-----------------|
| <b>USA</b>         | FCC, NVLAP, UL  |
| <b>Germany</b>     | TUV Rheinland   |
| <b>Japan</b>       | VCCI            |
| <b>New Zealand</b> | MoC             |
| <b>Norway</b>      | NEMKO           |
| <b>R.O.C.</b>      | BSMI, DGT, CNLA |

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml).

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC Lab:**

Tel: 886-35-935343

Fax: 886-35-935342

**Lin Kou Safety Lab:**

Tel: 886-2-26093195

Fax: 886-2-26093184

**Lin Kou RF&Telecom Lab**

Tel: 886-3-3270910

Fax: 886-3-3270892

**Email:** [service@mail.adt.com.tw](mailto:service@mail.adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.