

HYUNDAI CALIBRATION & CERTIFICATION TECH. CO., LTD.

PRODUCT COMPLIANCE TEAM
SAN 136-1, AMI-RI, BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA
TEL : +82 31 639 8518 FAX : +82 31 639 8525

CERTIFICATION

Manufacture;
CORNEA TECHNOLOGY CO., Ltd.

**Rm#402, Burim Bldg, 1602-9 Kwanyang-dong
Dongan-gu, Anyang-shi, Kyunggi-do, KOREA
CORNEA FRN : 0006-5809-55**

**Date of Issue: SEPTEMBER 26, 2002
Test Report No.: HCT-F02-0916**

**Test Site: HYUNDAI CALIBRATION & CERTIFICATION
TECHNOLOGIES CO., LTD.
HCT FRN : 0005-8664-21**

FCC ID :

PL4CT1810

MODEL / TYPE :

CT1810

FCC Rule Part(s):

Part 15 & 2; ET Docket 95-19

Classification:

FCC Class B Peripheral Device (JBP)

Standard(s):

FCC Class B: 2001

Equipment(EUT) Type:

18" LCD Monitor

Max Resolution:

1280 X 1024 Non-interlaced (@80KHz/ 75Hz)

Port/ Connector(s)

**15-pin D-sub VGA connector, 20-pin DVI-D (Digital RGB)
S-VIDEO, COMPOSITE-VIDEO, AUDIO IN OUT**

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1992.(See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HYUNDAI C-Tech. certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse of 1988,21 U.S.C.853(a).



Report prepared by : Ki-Soo Kim
Manager of EMC Tech. Part



TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION.....	3
1.1 Product Description.....	3
1.2 Related submittal(s)/Grant(s).....	3
1.3 Tested System Details.....	4
1.4 Test Methodology.....	4
1.5 Test Facility.....	4
2. SYSTEM TEST CONFIGURATION.....	5
2.1 Justification.....	5
2.2 EUT Exercise Software.....	5
2.3 Cable Description.....	5
2.4 Noise Suppression Parts on Cable.....	6
2.5 Equipment Modifications.....	6
2.6 Configuration of Tested System.....	7
3. PRELIMINARY TESTS.....	8
3.1 Power line Conducted Emissions Tests.....	9
3.2 Radiated Emissions Tests.....	9
4. FINAL CONDUCTED AND RADIATED EMISSION TESTS SUMMARY.....	9
4.1 Conducted Emission Tests.....	10
4.2 Conducted Emission Tests.....	11
4.2 Radiated Emission Tests.....	12
5. FIELD STRENGTH CALCULATION.....	13
6. LIST OF TEST EQUIPMENT	14

ATTACHMENT A	ID Label / Location Info.
ATTACHMENT B.....	External Photos.
ATTACHMENT C	Block Diagram..
ATTACHMENT D	Test Setup Photos.
ATTACHMENT E	User's Manual.
ATTACHMENT F	Internal Photos.

1. GENERAL INFORMATION

1.1 Product Description

The CORNEA TECHNOLOGY CO., LTD. Model CT1810 (referred to as the EUT in this report) is a **18"LCD Monitor with HOR. Freq. 80KHz (Max) and Resolution of 1280 X 1024 (Non-Interlaced)**. Product specification information described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	PLASTIC
LIST OF EACH OSC. OR XTAL. FREQ.(FREQ. \geq 1MHz)	12MHz, 14.32MHz , 24.576MHz ,
POWER REQUIREMENT	100-240V ~ 50/60 Hz 1.5A
MAX. RESOLUTION	1280 X 1024 NON-INTERLACED (@80KHz/ 75Hz)
H-SYNC FREQUENCY RANGE	31.5KHz <input type="checkbox"/> 80KHz
V-SYNC FREQUENCY RANGE	56Hz <input type="checkbox"/> 75Hz
LCD TYPE	18" (LCD Type :LM181E04)

1.2 Related Submittal(s) / Grant(s)

ORIGINAL SUBMITTAL ONLY

1.3 Tested System Details

**The Model names for all equipment, plus descriptions used in the tested system
(including inserted cards) are:**

DEVICE TYPE	MANUFACTURER	MODEL NUMBER	FCC ID / DoC	CONNECTED TO
MONITOR (EUT)	CORNEA TECHNOLOGY CO., LTD.	CT1810	PL4CT1810	HOST
PC(HOST)	H/P	KR20803647	DoC	N/A
VIDEO CARD	ATI	ATI RADEON VE DDR	DoC	HOST
KEY BOARD	H/P	5181	DoC	HOST
MOUSE	MicroSoft	IntelliMouse	DoC	HOST
PRINTER	H/P	C6410A	DoC	HOST
MODEM	3COM CORPORATION	56K FAX MODEM	DoC	HOST
EAR PHONE	H/P	Tsound	-	EUT

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4/1992. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1,MAEKOK-RI,HOBUP-MYUN,ICHON-SI,KYOUNGKI-DO, 467-701,KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 24,2000(Confirmation Number: EA90661)

2.SYSTEM TEST CONFIGURATION

2.1 Justification

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following components and I/O cards inside the E.U.T were used.

DEVICE TYPE	MANUFACTURE	MODEL/PART NUMBER
MAIN BOARD	CORNEA TECHNOLOGY CO., LTD.	CT1700-F0
POWER BOARD	LI SHIN INTERNATIONAL ENTERPRISE CORP	LSE9901B1260
OSD BOARD	CORNEA TECHNOLOGY CO., LTD.	CT1810-PWR
INVERTOR BOARD	CORNEA TECHNOLOGY CO., LTD.	DS-1008WA
LCD BOARD	LG PHILIPS.	LM181E04

2.2 EUT exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software, contained on a 3-1/2 inch disc, was inserted into drive A and is auto starting on power-up. Once loaded, the program sequentially exercises each system component in turn. The sequence used is :(1) Display test, (2) RS 232 test (3) Key board test,(4) Printer test,(5) FDD test,(6) HDD test. The complete cycle takes about 20 seconds and is repeated continuously. As the keyboard and mouse are strictly input devices, no data is transmitted to them during test. They are however, continuously scanned for data input activity. The video resolution modes setup and change program was used during the radiated and conducted emission testing.

2.3 Cable Description

	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (M)
MONITOR(EUT)	N	Y	1.8(P), 1.5(D)
PC(HOST)	N	N/A	1.8(P)
PRINTER	N	Y	2.0(P),1.8(D)
KEY BOARD	N/A	Y	2.0(D)
MODEM	N	Y	2.0(P),0.8(D)
MOUSE	N/A	Y	1.8(D)
COMPOSITE-VIDEO	N/A	N	1.5(D)
S-VIDEO	N/A	N	1.5(D)
AUDIO IN	N/A	N	1.5(D)
AUDIO OUT	N/A	N	3.0(D)

The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

2.4 Noise Suppression Parts on Cable. (I/O CABLE)

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
MONITOR(EUT)	Y	PC END	Y	PC END
PRINTER	N	N/A	Y	BOTH END
KEY BOARD	Y	PC END	Y	PC END
MODEM	N	N/A	Y	BOTH END
MOUSE	N	N/A	Y	PC END
COMPOSITE-VIDEO	N	PC END	Y	BOTH END
S-VIDEO	N	PC END	Y	BOTH END
AUDIO IN	N	PC END	Y	BOTH END
AUDIO OUT	N	EAR PHONE	Y	PC END

2.5 Equipment Modifications

N/A


2.6 Configuration of Test system

Line Conducted Test : EUT was connected to LISN, all other supporting equipment were connected to another LISN.

Preliminary Power line Conducted Emission tests were performed by using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions.

Radiated Emission Test : Preliminary Radiated Emissions tests were conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse operating condition. Final Radiated Emission tests were conducted at 10 meter open area test site.

[Configuration of Tested System]

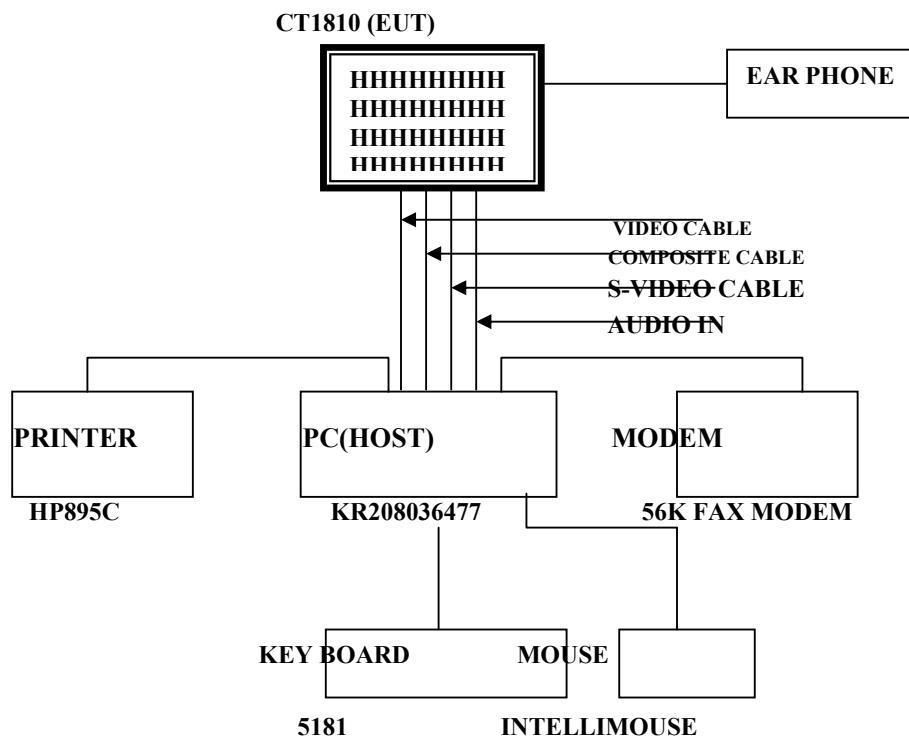

3. PRELIMINARY TESTS

3.1 AC Power line Conducted Emission Tests

During Preliminary Tests, the following operating mode were investigated

Processor Speed (MHz)	Video Resolution (w/max)	The worst operating condition
Pentium 350 MHz	1280 X 1024 Non-Interlaced (80KHz/75Hz)	X
	1024 x 768 Non-Interlaced (60KHz/75Hz)	
	1024 x 768 Non-Interlaced (56.6KHz/70Hz)	
	800 x 600 Non-Interlaced (46.9KHz/75Hz)	
	800 x 600 Non-Interlaced (37.9KHz/60Hz)	
	640 x 480 Non-Interlaced (31.5KHz/60Hz)	

4.2 Radiated Emission Tests

During Preliminary Tests, the following operating mode were investigated

Processor Speed (MHz)	Video Resolution (w/max)	The worst operating condition
Pentium 350 MHz	1280 X 1024 Non-Interlaced (80KHz/75Hz)	X
	1024 x 768 Non-Interlaced (60KHz/75Hz)	
	1024 x 768 Non-Interlaced (56.6KHz/70Hz)	
	800 x 600 Non-Interlaced (46.9KHz/75Hz)	
	800 x 600 Non-Interlaced (37.9KHz/60Hz)	
	640 x 480 Non-Interlaced (31.5KHz/60Hz)	

NOTE:

The monitor(EUT) has video interface ports(15-pin D-sub VGA connector, 20-pin DVI-D (Digital RGB), S-Video and Composite Video) to support various kinds of graphics adapters.

So the test were performed with each video interface port. The final measurement was performed with VGA 15 pin D-sub video interface port that produce the worst case emission.

Measured by : Kyoung-Houn SEO / Engineer

Date : SEPTEMBER 16, 2002

4. FINAL CONDUCTED AND RADIATED EMISSION TESTS SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Humidity Level	: 42%	Temperature : 24 <input type="checkbox"/>
Limit apply to	: FCC PART 15 SUBPART B	
Type of Tests	: CLASS B	
Date	: SEPTEMBER 26, 2002	
Result	: PASSED BY -25.2 dB	

EUT	: 18" LCD MONITOR
Operating Condition	: 1280 X 1024 Non-Interlaced (Hf : 80KHz, Vf : 75Hz)
Detector	: Quasi-Peak (6 dB Bandwidth : 9 KHz)

Line Conducted Emission Tabulated Data

Power Line Conducted Emissions			FCC CLASS B		
Frequency (MHz)	Amplitude (dBuV)	Conductor	Limit (dBuV)	Margin (dB)	Detector Mode
2.915	22.8	HOT	48.0	25.2	QUASI-PEAK
3.315	22.6	HOT	48.0	25.4	QUASI-PEAK
2.855	21.8	HOT	48.0	26.2	QUASI-PEAK
3.165	20.5	NEUTRAL	48.0	27.5	QUASI-PEAK

NOET:

1. All video modes and resolutions were investigated and the worst-case emissions are reported
Other video modes & resolution were tested and found to be in compliance.

Measured by : Kyoung-Houn SEO / Engineer


Date : SEPTEMBER 26, 2002

**HYUNDAI C-TECH
EMC Testing Laboratory**

EUT: CT1810
 Manufacturer: CORNEA TECHNOLOGY CO., LTD.
 Operating Condition: 1280 X 1024 75Hz
 Test Site: SHIELD ROOM
 Operator: KH-SEO
 Test Specification: FCC CLASS B
 Comment: N
 Start of Test: 9/26/02 / 8:19:20PM

SCAN TABLE: "FCC ClassB Voltage"

FCC ClassB Voltage					
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Transducer
450.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz CABLE LOSS (NEW)

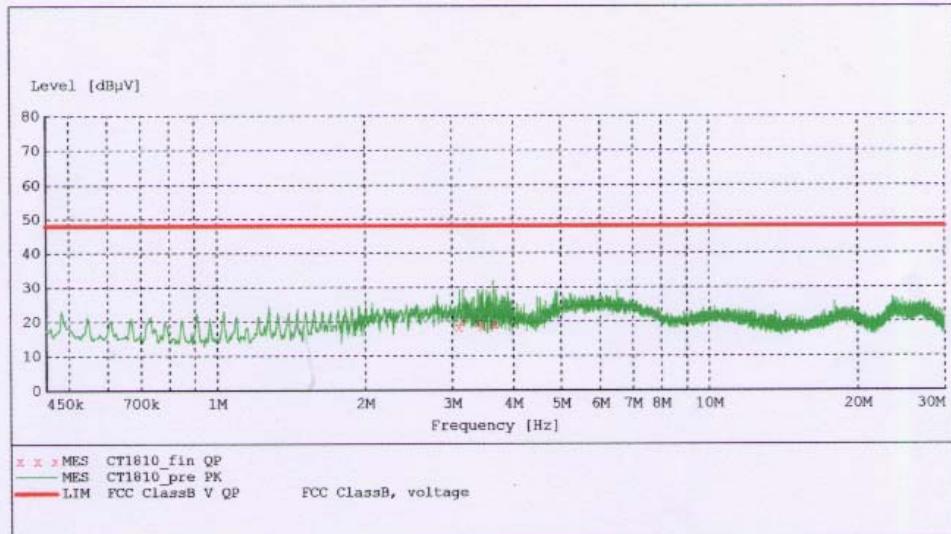

MEASUREMENT RESULT: "CT1810_fin QP"

9/26/02 8:21PM


Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line dB	PE
3.110000	18.30	0.6	48	29.7	1	---
3.165000	20.50	0.6	48	27.5	1	---
3.400000	19.80	0.7	48	28.2	1	---
3.475000	18.60	0.7	48	29.4	1	---
3.650000	19.30	0.7	48	28.7	1	---
3.680000	19.30	0.7	48	28.7	1	---

**HYUNDAI C-TECH
EMC Testing Laboratory**

EUT: CT1810
 Manufacturer: CORNEA TECHNOLOGY CO., LTD.
 Operating Condition: 1280 X 1024 75Hz
 Test Site: SHIELD ROOM
 Operator: KH-SEO
 Test Specification: FCC CLASS B
 Comment: H
 Start of Test: 9/26/02 / 8:22:03PM

SCAN TABLE: "FCC ClassB Voltage"

Short Description:		FCC ClassB Voltage				
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer
450.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	CABLE LOSS (NEW)

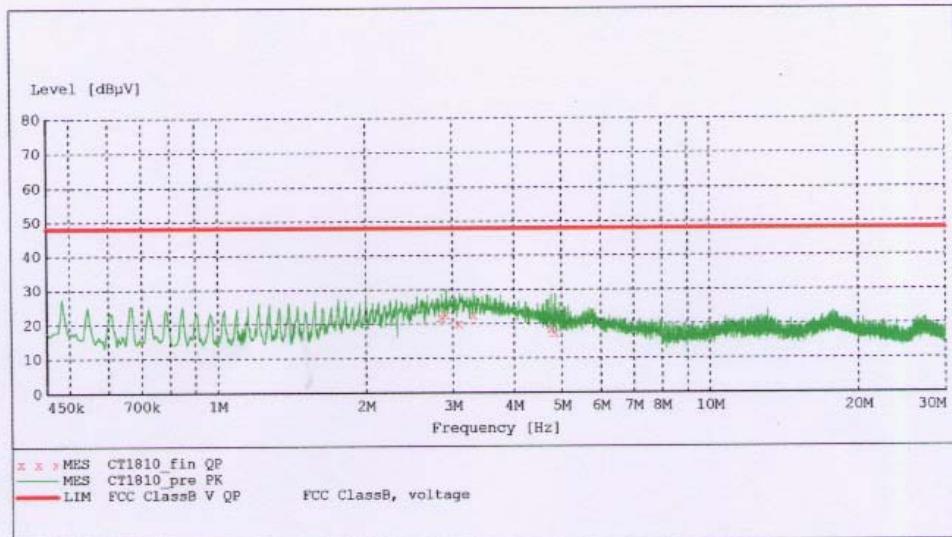

MEASUREMENT RESULT: "CT1810_fin QP"

9/26/02 8:23PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Line	PE
2.855000	21.80	0.6	48	26.2	1	---
2.915000	22.80	0.6	48	25.2	1	---
3.105000	20.00	0.6	48	28.0	1	---
3.315000	22.60	0.7	48	25.4	1	---
4.770000	18.60	0.9	48	29.4	1	---
4.855000	17.40	0.9	48	30.6	1	---

4.3 Radiated Emissions Tests

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

Humidity Level	: 31 %	Temperature : 28 <input type="checkbox"/>
Limit apply to	: FCC PART 15 SUBPART B	
Type of Tests	: CLASS B	
Date	: SEPTEMBER 24, 2002	
Result	: PASSED BY -3.0 dB	

EUT : 18" LCD MONITOR
 Operating Condition : 1280 X 1024 Non-Interlaced (Hf : 80 kHz, Vf : 75 Hz)
 Detector : Quasi-Peak (6 dB Bandwidth : 120 KHz)

Frequency	Reading	Ant. Factor	Cable Loss	ANT POL	Total	Limit	Margin
MHz	dBuV	dB	dB	(H/V)	dBuV/m	dBuV/m	dB
92.4	26.87	8.92	0.81	V	36.6	43.5	-6.9
135.0	20.91	14.31	1.18	V	36.4	43.5	-7.1
167.2	19.01	14.89	1.40	H	35.3	43.5	-8.2
180.0	20.44	15.16	1.40	V	37.0	43.5	-6.5
217.1	15.30	16.64	1.56	V	33.5	46.0	-12.5
226.8	13.40	17.14	1.56	V	32.1	46.0	-13.9
326.5	22.68	16.02	1.80	V	40.5	46.0	-5.5
391.7	24.97	16.53	1.80	H	43.3	46.0	-2.7
405.5	23.95	16.60	2.25	H	42.8	46.0	-3.2
480.4	23.26	18.09	2.25	V	43.6	46.0	-2.4
541.3	19.03	19.12	2.55	H	40.7	46.0	-5.3
649.3	19.52	21.58	2.80	V	43.9	46.0	-2.1

NOTE:

1. All video modes and resolutions were investigated and the worst-case emissions are reported.
2. Other video modes & resolution were tested and found to be in compliance.

Measured by : Kyoung-Houn SEO / Engineer

Date : SEPTEMBER 24, 2002

5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$\mathbf{FS = RA + AF + CF}$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dBuV is obtained. The Antenna Factor of 7.4 and a Cable Factor of 1.1 is added. The 30 dBuV/m value was mathematically converted to its corresponding level in uV/m.

$$\mathbf{FS = 21.5 + 7.4 + 1.1 = 30 \text{ dBuV/m}}$$

$$\mathbf{\text{Level in uV/m} = \text{Common Antilogarithm} [(30 \text{ dBuV/m})/20] = 31.6 \text{ uV/m}}$$

6. LIST OF TEST EQUIPMENT

<u>TYPE</u>	<u>MANUFACTURE</u>	<u>MODEL</u>	<u>CAL.</u>
<u>DATE</u>			
EMI Test Receiver	Rohde & Schwarz	ESH3	2002.7.16
EMI Test Receiver	Rohde & Schwarz	ESVP	2002.7.16
EMI Test Receiver	Rohde & Schwarz	ESI40	2001.11.5
EMI Test Receiver	Rohde & Schwarz	ESVS30	2002.7.16
Spectrum Monitor	Rohde & Schwarz	EZM	N.A
Graphic Plotter	Rohde & Schwarz	DOP2	N.A
Printer	Rohde & Schwarz	PDN	N.A
Spectrum Analyzer	H.P	8591EM	2002.9.1
LISN	EMCO	3825/2	2002.2.7
LISN	Rohde & Schwarz	ESH2-Z5	2002.8.12
Amplifier	Hewlett-Packard	8447E	2002.9.1
Dipole Antennas	Rohde & Schwarz	VHAP	2002.7.16
Dipole Antennas	Rohde & Schwarz	UHAP	2002.7.16
Biconical Antenna	Rohde & Schwarz	BBA-9106	2002.7.12
Log-Periodic Antenna	Rohde & Schwarz	UHALP-9107	2002.7.12
Antenna Position Tower	EMCO	1051-12	N.A
Turn Table	EMCO	1060-06	N.A
Line Filter	KEENE	ULW 2X30-60	N.A
Power Analyzer	Voltech	PM 3300	2002.2.20
Reference Network Impedance	Voltech	IEC 555	N.A
AC Power Source	PACIFIC	Magnetic Module	N.A
AC Power Source	PACIFIC	360AMX	N.A