

Report No.: SZEM141100662801

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 106

FCC REPORT

Application No:SZEM1411006628CRApplicant:Gigastone CorporationManufacturer:Gigastone Corporation

Factory: Sky Light Electronic (ShenZhen) Limited **Product Name:** Smart Box, Media Streamer, Smart Battery

Model No.(EUT): A4S

Trade Mark: Gigastone FCC ID: PLEWD5203

Standards: 47 CFR Part 15, Subpart C (2014)

Date of Receipt: 2014-12-01

Date of Test: 2014-12-05 to 2015-01-19

Date of Issue: 2015-01-26

Test Result: PASS *

. * In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM141100662801

Page: 2 of 106

2 Version

Revision Record							
Version	Chapter	Date	Modifier	Remark			
00		2015-01-26		Original			

Authorized for issue by:		
Tested By	Eric Fu (Eric Fu) /Project Engineer	2015-01-19 Date
	(Elic Fu) /Project Eligilieei	Date
Prepared By	Sade Luo.	2015-01-26
	(Sade Luo) /Clerk	Date
Checked By	Emen-Li	2015-01-27
	(Emen Li) /Reviewer	Date



Report No.: SZEM141100662801

Page: 3 of 106

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2009	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	KDB558074 D01 v03r02	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	KDB558074 D01 v03r02	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	KDB558074 D01 v03r02	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r02	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	KDB558074 D01 v03r02	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS



Report No.: SZEM141100662801

Page: 4 of 106

4 Contents

			Page
1	cov	/ER PAGE	1
2	VER	SION	2
3	TES	T SUMMARY	3
4	CON	ITENTS	4
5	GEN	IERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT.	
	5.3	TEST ENVIRONMENT AND MODE	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6	TEST FACILITY	8
	5.7	DEVIATION FROM STANDARDS	8
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	8
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
	5.10	EQUIPMENT LIST	9
6	TES	T RESULTS AND MEASUREMENT DATA	12
	6.1	ANTENNA REQUIREMENT	12
	6.2	CONDUCTED EMISSIONS	
	6.3	CONDUCTED PEAK OUTPUT POWER	17
	6.4	6DB OCCUPY BANDWIDTH	26
	6.5	Power Spectral Density	34
	6.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.7	RF CONDUCTED SPURIOUS EMISSIONS	
	6.8	RADIATED SPURIOUS EMISSIONS	
	6.8.1		
	6.8.2		
	6.9	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	89-106



Report No.: SZEM141100662801

Page: 5 of 106

5 General Information

5.1 Client Information

Applicant:	Gigastone Corporation		
Address of Applicant:	12F, No.480, Rueiguang Road, Neihu District, Taipei 114, Taiwan.		
Manufacturer:	Gigastone Corporation		
Address of Manufacturer:	12F, No.480, Rueiguang Road, Neihu District, Taipei 114, Taiwan.		
Factory:	Sky Light Electronic (ShenZhen) Limited		
Address of Factory:	Floor 1-2 No. 1 Building, No. 5 and 6 Building, JinBi Industrial Area, HuangTian, BaoAn, Shenzhen, China.		

5.2 General Description of EUT

Product Name:	Smart Box, Media Streamer, Smart Battery			
Model No.:	A4S			
Trade Mark:	Gigastone			
Operation Frequency:	IEEE 802.11b/g	/n(HT20): 2412MHz to 2462MHz		
	IEEE 802.11n(H	T40): 2422MHz to 2452MHz		
Channel Numbers:	IEEE 802.11b/g	, IEEE 802.11n HT20: 11 Channels		
	IEEE 802.11n H	T40: 7 Channels		
Channel Separation:	5MHz			
Type of Modulation:	IEEE for 802.11	b: DSSS(CCK,DQPSK,DBPSK)		
	IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK)			
	IEEE for 802.11	n(HT20 and HT40) : OFDM (64QAM, 16QAM,		
	QPSK,BPSK)			
Sample Type:	Portable produc	tion		
Test Power Grade:	802.11b:12, 80 declare)	2.11g:10, 802.11n(HT20 and HT40): 8 (manufacture		
Test Software of EUT:	Atheros Radio te	est 2 (manufacturer declare)		
Antenna Type and Gain:	Type: Integral			
	Gain:0.73dBi			
Power Supply:	USB charge			
	Battery: DC 3.7V 5200mAh			
Test Voltage:	AC 120V 60Hz			



Report No.: SZEM141100662801

Page: 6 of 106

Operation Frequency each of channel(802.11b/g/n HT20)										
Channel	Fr	equency	Channe	I Frequency	Channel	Fre	quency	Char	nnel	Frequency
1	24	112MHz	4	2427MHz	7	244	12MHz	10)	2457MHz
2	24	117MHz	5	2432MHz	8	244	47MHz 1		1	2462MHz
3	24	122MHz	6	2437MHz	9	245	2452MHz			
Operation F	requ	ency each	of channe	el(802.11n HT40)					
Channe	l	Frequ	ency	Channel	Frequen	су	Chan	nel	F	requency
1		2422	ИНz	4	2437MHz 7		7			2452MHz
2 2427MHz 5 2442MH		lz								
3 2432MI			ИНz	6	2447MH	lz				

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency		
The Lowest channel	2412MHz		
The Middle channel	2437MHz		
The Highest channel	2462MHz		

For 802.11n (HT40):

, ,	
Channel	Frequency
The Lowest channel	2422MHz
The Middle channel	2437MHz
The Highest channel	2452MHz



Report No.: SZEM141100662801

Page: 7 of 106

5.3 Test Environment and Mode

Operating Environment:	Operating Environment:						
Temperature:	22.0 °C						
Humidity:	58 % RH						
Atmospheric Pressure:	1010 mbar						
Test mode:							
Transmitting mode:	The EUT transmitted the continuous modulation test signal at the specific channel(s)						

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM141100662801

Page: 8 of 106

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM141100662801

Page: 9 of 106

5.10Equipment List

	Conducted Emission							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)			
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-06-10			
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2015-10-24			
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-16			
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2015-08-30			
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2015-08-30			
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2015-08-30			
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-16			
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-29			
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24			
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24			
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16			



Report No.: SZEM141100662801

Page: 10 of 106

	RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10		
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16		
3	EMI Test software	AUDIX	E3	SEL0050	N/A		
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-10-24		
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-24		
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2015-10-24		
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16		
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-24		
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-29		
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-29		
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-29		
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-29		
13	Band filter	Amindeon	82346	SEL0094	2015-05-16		
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16		
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24		
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24		
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-16		
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2015-10-24		
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-06-04		



Report No.: SZEM141100662801

Page: 11 of 106

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-16
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-05-16
8	Band filter	amideon	82346	SEL0094	2015-05-16
9	POWER METER	R&S	NRVS	SEL0144	2015-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2015-10-24

Note: The calibration interval is one year, all the instruments are valid.





Report No.: SZEM141100662801

Page: 12 of 106

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard 47 CFR Part 15C Section 15.203 /247(c) requirement:


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

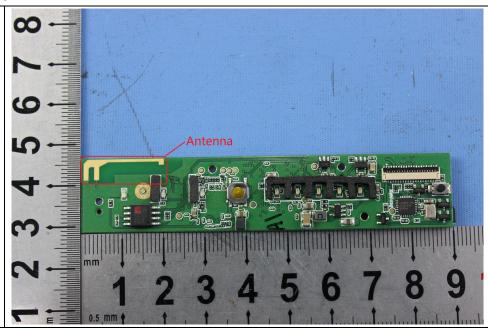

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.73dBi.



Report No.: SZEM141100662801

Page: 13 of 106


6.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.	207			
Test Method:	ANSI C63.10: 2009				
Test Frequency Range:	150kHz to 30MHz				
Limit:	Fraguenov rango (MHz)	Limit (c	dBuV)		
	Frequency range (MHz)	Quasi-peak	Average		
	0.15-0.5	66 to 56*	56 to 46*		
	0.5-5	56	46		
	5-30	60	50		
	* Decreases with the logarithm	n of the frequency.		•	
Test Procedure:	1) The mains terminal disturbation. 2) The EUT was connected to Impedance Stabilization linear impedance. The power calconnected to a second reference plane in the same way as multiple socket outlet strip a single LISN provided the result of the test was performed with of the EUT shall be 0.4 movertical ground reference plane. The LISN unit under test and bonded mounted on top of the ground test points the EUT and associated experience to the find the maximum.	pance voltage test was a AC power source throw Network) which provisibles of all other units of LISN 2, which was the LISN 1 for the unit of was used to connect atting of the LISN was reced upon a non-metallic And for floor-standing fround reference plane, with a vertical ground reference plane was bonded to the LISN as placed 0.8 m from the vertical ground reference und reference plane. To of the LISN 1 and the quipment was at least 0.	bugh a LISN 1 (Line des a 50Ω/50μH + f the EUT were bonded to the grown being measured. A multiple power cable on the exceeded. The table 0.8m above the gramman arrangement, the ference plane. The residual reference plane. The horizontal ground om the boundary of the plane for LISNs his distance was EUT. All other units 0.8 m from the LISN	5Ω bund es to the EUT ear he the	
	between the closest points the EUT and associated ed	of the LISN 1 and the quipment was at least (um emission, the relation terface cables must be	EUT. All other units 0.8 m from the LISN ve positions of e changed according	2.	



Report No.: SZEM141100662801

Page: 14 of 106

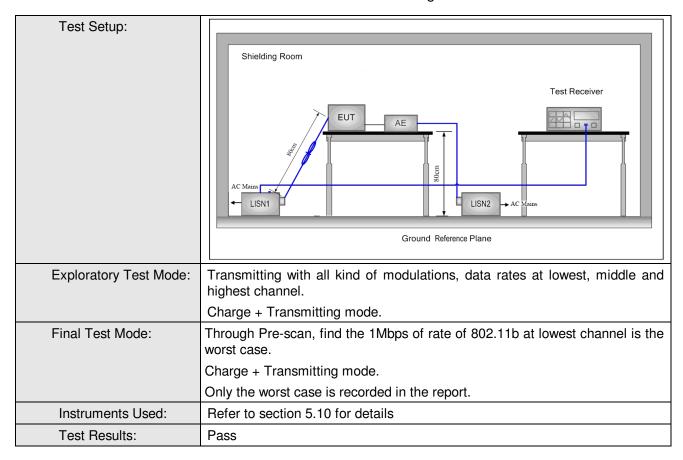



Report No.: SZEM141100662801


Page: 15 of 106

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live Line:

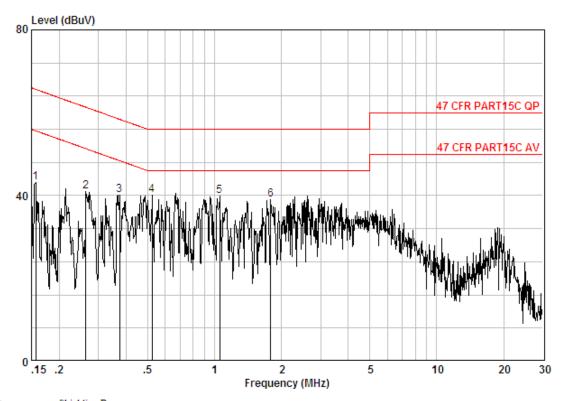

Site : Shielding Room

Condition : 47 CFR PART15C AV CE LINE

Job No. : 6628CR Test mode : Charge + TX


	Freq		LISN Factor					Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15649	0.02	9.70	33.53	43.25	55.65	-12.39	Peak
2	0.26303	0.02	9.70	31.35	41.06	51.34	-10.27	Peak
3	0.37314	0.01	9.78	30.35	40.13	48.43	-8.30	Peak
4 @	0.52376	0.01	9.80	30.34	40.15	46.00	-5.85	Peak
5	1.054	0.02	9.80	30.02	39.84	46.00	-6.16	Peak
6	1.790	0.02	9.80	29.12	38.94	46.00	-7.06	Peak



Report No.: SZEM141100662801

Page: 16 of 106

Neutral Line:

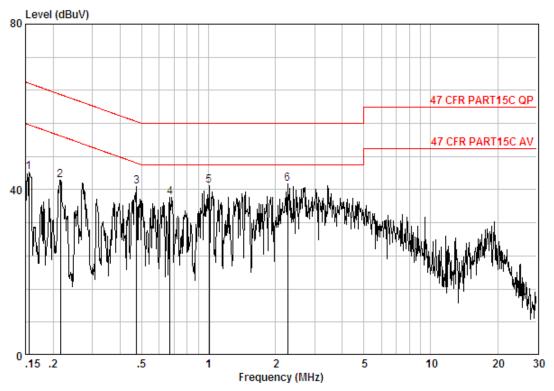

Site : Shielding Room

Condition : 47 CFR PART15C AV CE NEUTRAL

Job No. : 6628CR Test mode : Charge + TX

		Freq		LISN Factor				Over Limit	Remark
		MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1		0.15567	0.02	9.70	34.45	44.17	55.69	-11.52	Peak
2		0.21506	0.02	9.70	32.67	42.39	53.01	-10.62	Peak
3	@	0.47360	0.01	9.80	30.90	40.71	46.45	-5.75	Peak
4		0.67187	0.02	9.80	28.43	38.25	46.00	-7.75	Peak
5	@	1.005	0.02	9.80	31.27	41.09	46.00	-4.91	Peak
6	@	2.273	0.02	9.81	31.58	41.41	46.00	-4.59	Peak

Notes:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM141100662801

Page: 17 of 106

6.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)		
Test Method:	KDB558074 D01 v03r02		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table		
	Ground Reference Plane		
	Remark:		
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Test Instruments:	Refer to section 5.10 for details		
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates		
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;		
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of		
	802.11n(HT40)		
Limit:	30dBm		
Test Results:	Pass		



Report No.: SZEM141100662801

Page: 18 of 106

Pre-scan under all rate at lowest channel 1								
Mode		802	.11b			_		
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps				
Power (dBm)	16.58	15.01	14.22	12.55				
Mode				802	2.11g			
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps
Power (dBm)	18.2	17.03	17.46	17.79	17.88	17.95	17.99	16.81
Mode				802.11	n(HT20)			
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps
Power (dBm)	16.02	15.08	15.33	15.48	15.79	15.88	15.9	14.81
Mode	802.11n(HT40)							
Data Rate	13.5Mbps	27Mbps	40.5Mbps	54Mbps	81Mbps	108Mbps	121.5Mbps	135Mbps
Power (dBm)	16.55	15.39	15.44	15.75.	15.89	16.12	16.2	15.23

Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).



Report No.: SZEM141100662801

Page: 19 of 106

Measurement Data

Measurement Data							
	802.11b mode						
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result				
Lowest	16.85	30.00	Pass				
Middle	17.06	30.00	Pass				
Highest	18.34	30.00	Pass				
	802.11g mo	de					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result				
Lowest	18.20	30.00	Pass				
Middle	18.04	30.00	Pass				
Highest	20.39	30.00	Pass				
	802.11n(HT20)	mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result				
Lowest	16.02	30.00	Pass				
Middle	15.78	30.00	Pass				
Highest	17.84	30.00	Pass				
	802.11n(HT40)	mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result				
Lowest	16.55	30.00	Pass				
Middle	16.35	30.00	Pass				
Highest	16.96	30.00	Pass				



Report No.: SZEM141100662801


Page: 20 of 106

Test plot as follows:

Test mode: 802.11b Test channel: Lowest



Test mode: 802.11b Test channel: Middle

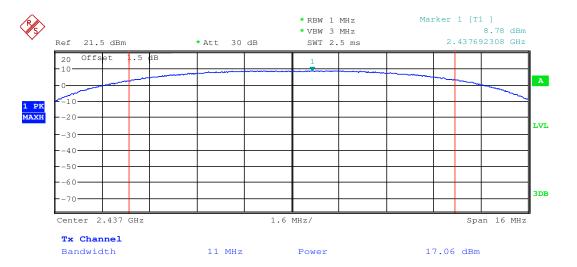





Report No.: SZEM141100662801

Page: 21 of 106



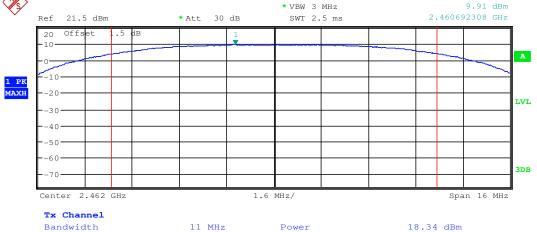

Test mode: 802.11g Test channel: Lowest

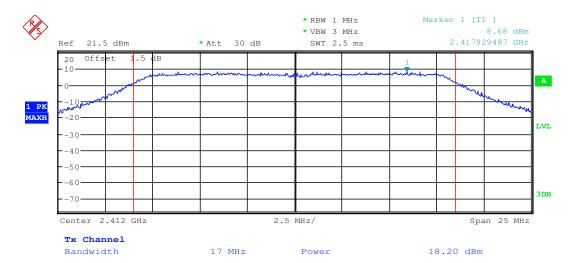







Report No.: SZEM141100662801

Page: 22 of 106

Test mode: 802.11g Test channel: Middle

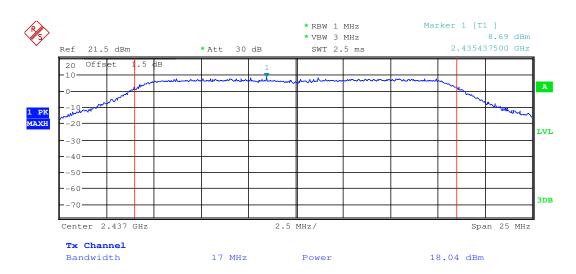

Test mode: 802.11g Test channel: H	Highest
------------------------------------	---------

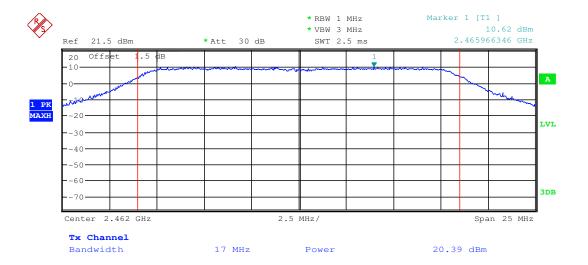





Report No.: SZEM141100662801

Page: 23 of 106

Test mode: 802.11n(HT20) Test channel: Lowest

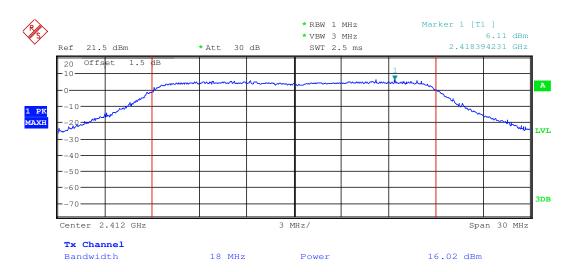

Test mode: 802.11n(HT20) Test channel: Middle

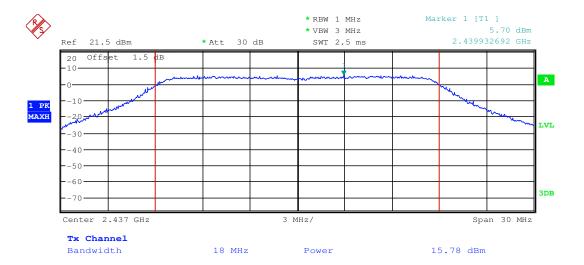




Tx Channel
Bandwidth

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM141100662801

17.84 dBm


Page: 24 of 106

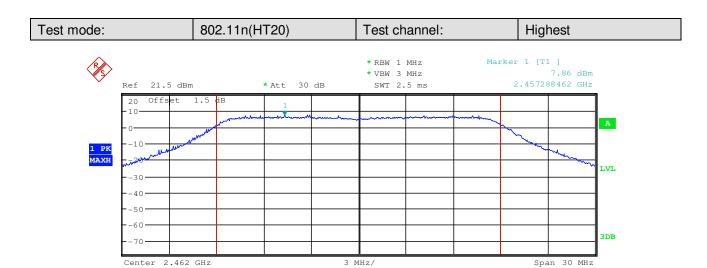

Test mode: 802.11n(HT40) Test channel: Lowest

Power

18 MHz

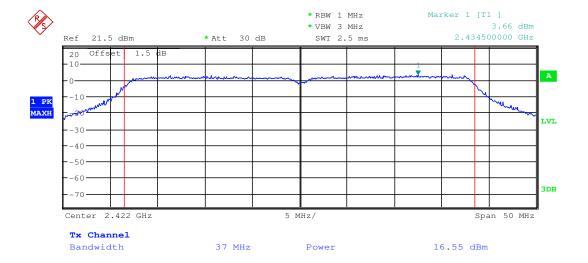





Report No.: SZEM141100662801

Page: 25 of 106

Test mode: 802.11n(HT40) Test channel: Middle

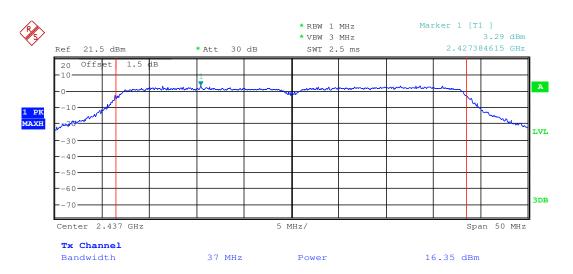



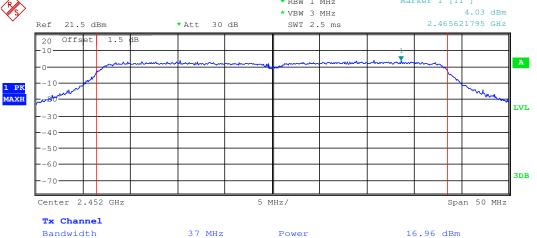




Report No.: SZEM141100662801

Page: 26 of 106

6.4 6dB Occupy Bandwidth

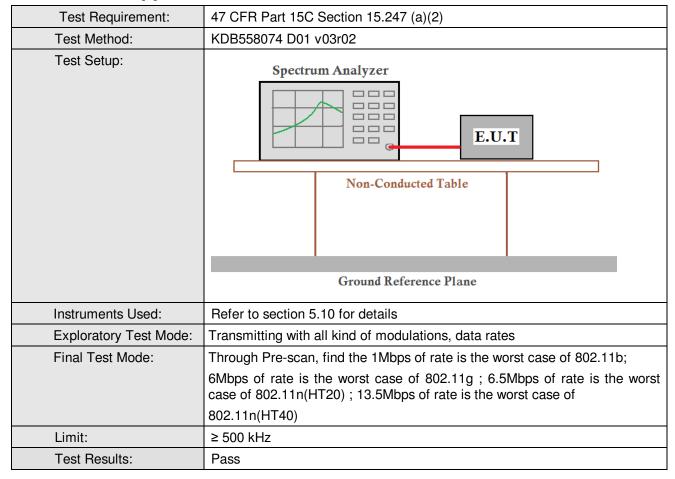



Report No.: SZEM141100662801

Page: 27 of 106

Measurement Data

weasurement Data							
802.11b mode							
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result				
Lowest	10.048	≥500	Pass				
Middle	10.817	≥500	Pass				
Highest	10.962	≥500	Pass				
	802.11g mode						
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result				
Lowest	16.635	≥500	Pass				
Middle	16.635	≥500	Pass				
Highest	16.635	≥500	Pass				
	802.11n(HT20) mode						
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result				
Lowest	17.885	≥500	Pass				
Middle	17.933	≥500	Pass				
Highest	17.885	≥500	Pass				
	802.11n(HT40)mode						
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result				
Lowest	36.699	≥500	Pass				
Middle	36.683	≥500	Pass				
Highest	36.667	≥500	Pass				




Report No.: SZEM141100662801


Page: 28 of 106

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

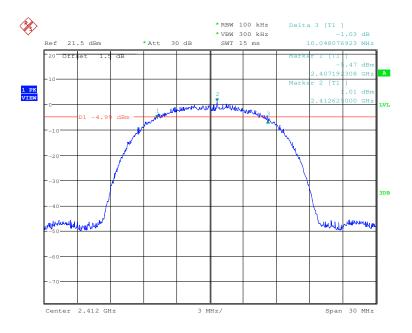

Test mode: 802.11b Test channel: Middle

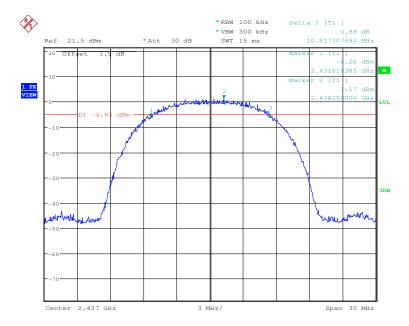





Report No.: SZEM141100662801

Page: 29 of 106

Test mode: 802.11b Test channel: Highest

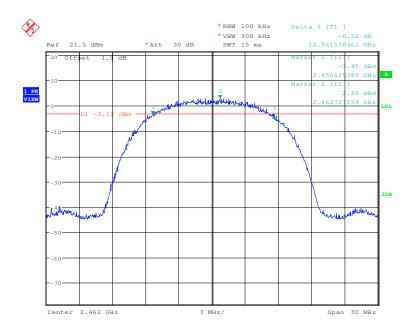



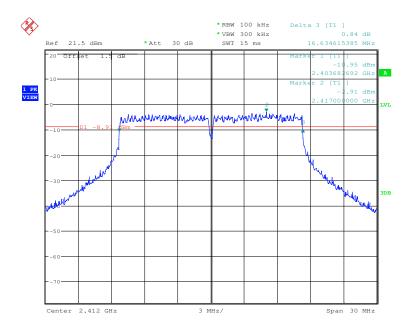





Report No.: SZEM141100662801

Page: 30 of 106

Test mode: 802.11g Test channel: Middle

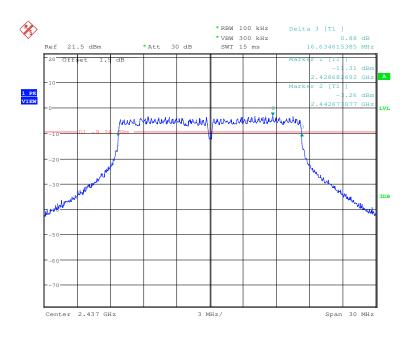



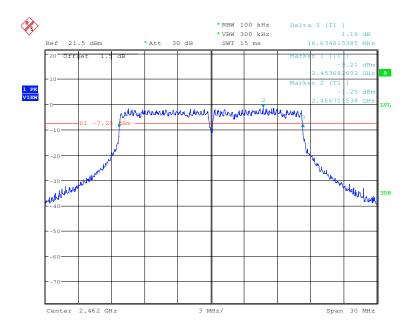





Report No.: SZEM141100662801

Page: 31 of 106

Test mode: 802.11n(HT20) Test channel: Lowest

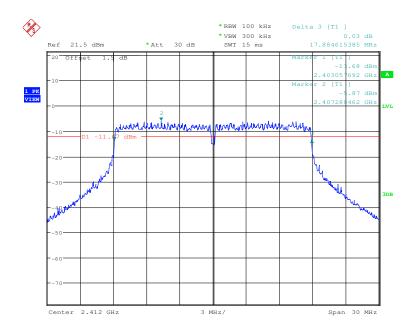

Test mode: 802.11n(HT20) Test channel: Middle

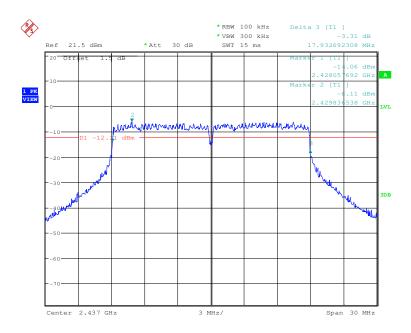







Report No.: SZEM141100662801

Page: 32 of 106

Test mode: 802.11n(HT20) Test channel: Highest

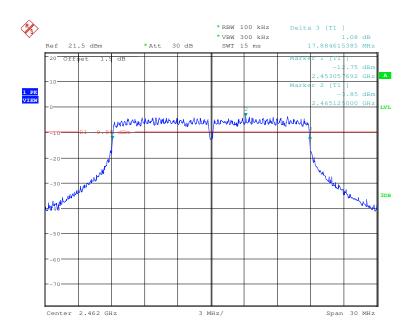

Test mode: 802.11n(HT40) Test channel: Lowest

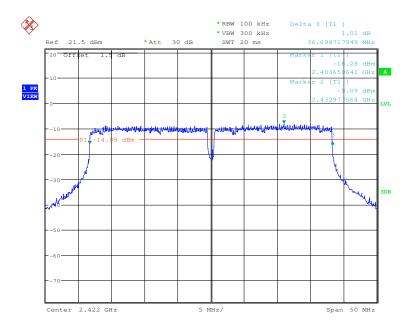





Report No.: SZEM141100662801

Page: 33 of 106

Test mode: 802.11n(HT40) Test channel: Middle

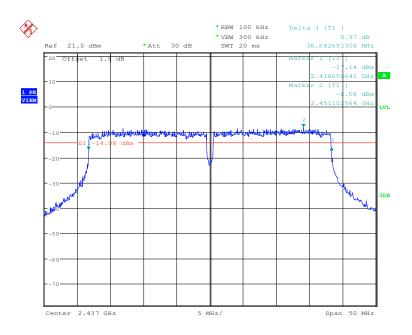



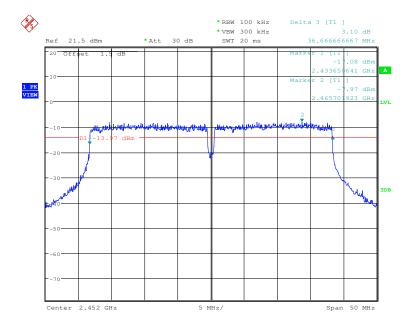



Report No.: SZEM141100662801

Page: 34 of 106

6.5 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	KDB558074 D01 v03r02
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane
	Remark:
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Test Instruments:	Refer to section 5.10 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)
Limit:	≤8.00dBm
Test Results:	Pass



Report No.: SZEM141100662801

Page: 35 of 106

Measurement Data

Measurement Data							
802.11b mode							
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result				
Lowest	-8.86	≤8.00	Pass				
Middle	-14.08	≤8.00	Pass				
Highest	-12.27	≤8.00	Pass				
	802.11g mode						
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result				
Lowest	-17.20	≤8.00	Pass				
Middle	-15.36	≤8.00	Pass				
Highest	-13.83	≤8.00	Pass				
	802.11n(HT20) mode						
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result				
Lowest	-18.35	≤8.00	Pass				
Middle	-18.70	≤8.00	Pass				
Highest	-17.18	≤8.00	Pass				
	802.11n(HT40) mode						
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result				
Lowest	-20.97	≤8.00	Pass				
Middle	-21.20	≤8.00	Pass				
Highest	-20.77	≤8.00	Pass				




Report No.: SZEM141100662801


Page: 36 of 106

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

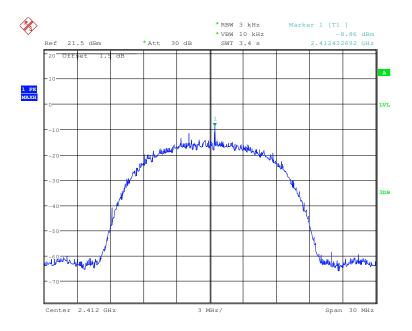

Test mode: 802.11b Test channel: Middle

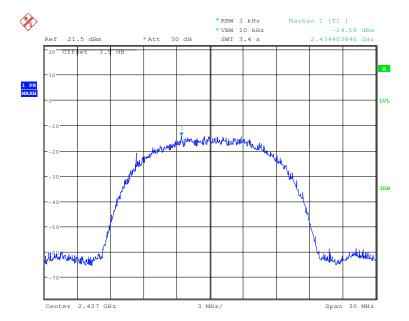





Report No.: SZEM141100662801

Page: 37 of 106

Test mode: 802.11b Test channel: Highest

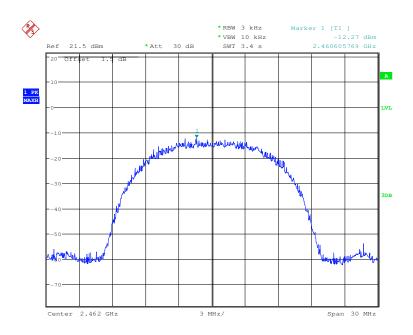



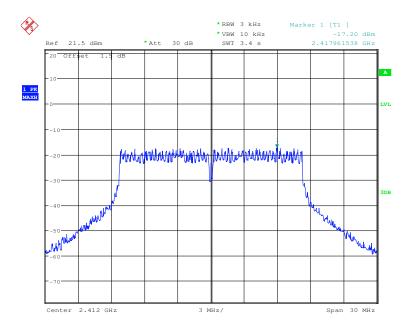





Report No.: SZEM141100662801

Page: 38 of 106

Test mode: 802.11g Test channel: Middle

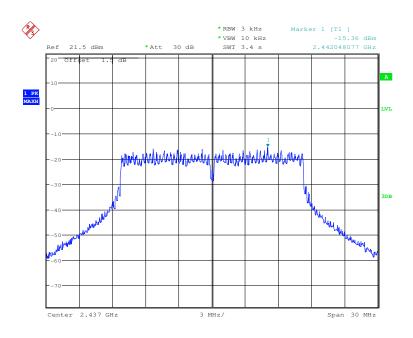



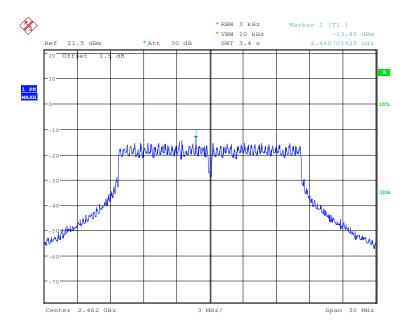





Report No.: SZEM141100662801

Page: 39 of 106

Test mode: 802.11n(HT20) Test channel: Lowest

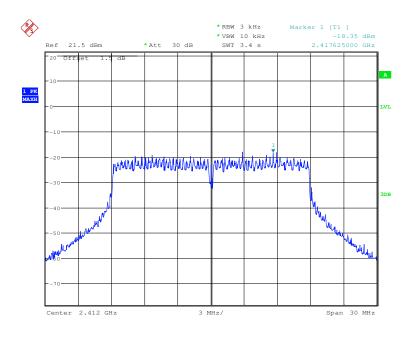

Test mode: 802.11n(HT20) Test channel: Middle

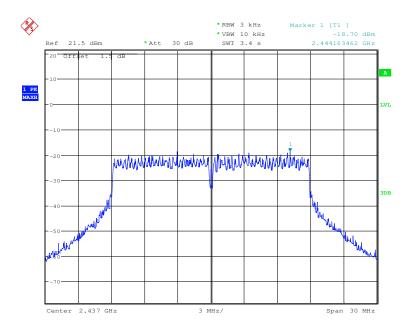





Report No.: SZEM141100662801

Page: 40 of 106

Test mode: 802.11n(HT20) Test channel: Highest

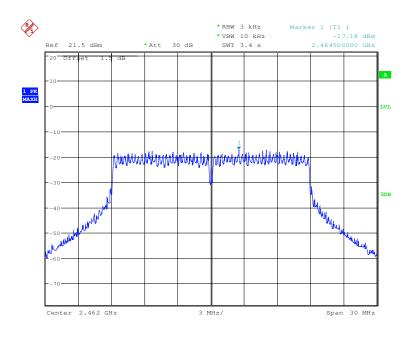

Test mode: 802.11n(HT40) Test channel: Lowest

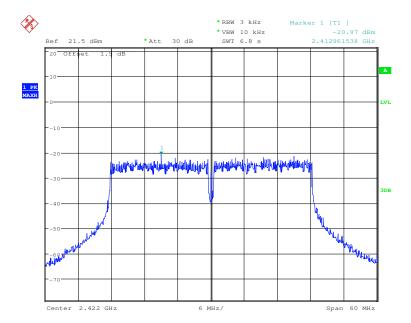





Report No.: SZEM141100662801

Page: 41 of 106

Test mode: 802.11n(HT40) Test channel: Middle

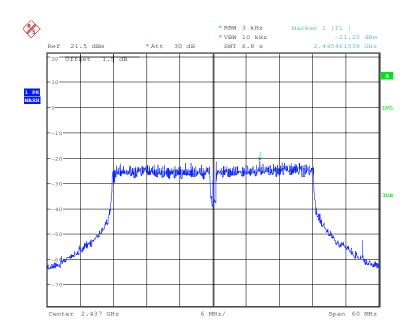

Test mode: 802.11n(HT40) Test channel: Highest

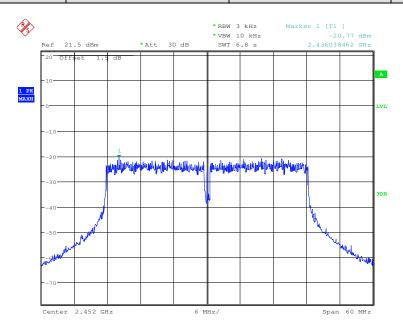





Report No.: SZEM141100662801

Page: 42 of 106

6.6 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)					
Test Method:	KDB558074 D01 v03r02					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:					
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.					
Exploratory Test Mode:						
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;					
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread					
	spectrum intentional radiator is operating, the radio frequency power that is					
	produced by the intentional radiator shall be at least 20 dB below that in the					
	100 kHz bandwidth within the band that contains the highest level of the					
	desired power, based on either an RF conducted or a radiated					
	measurement.					
Instruments Used:	Refer to section 5.10 for details					
Test Results:	Pass					




Report No.: SZEM141100662801


Page: 43 of 106

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

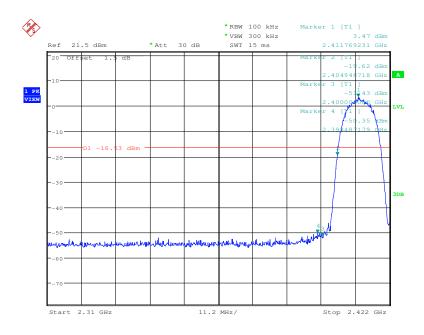

Test mode: 802.11b Test channel: Highest

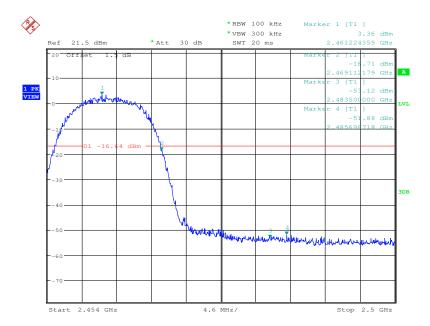





Report No.: SZEM141100662801

Page: 44 of 106

Test mode: 802.11g Test channel: Lowest

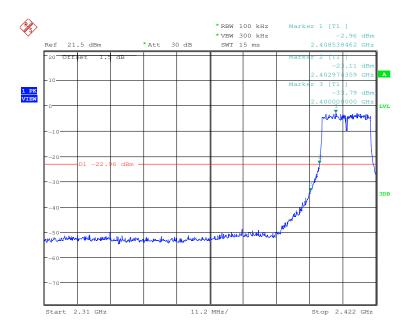

Test mode: 802.11g Test channel: Highest

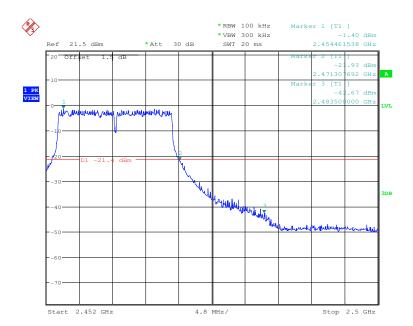





Report No.: SZEM141100662801

Page: 45 of 106

Test mode: 802.11n(HT20) Test channel: Lowest

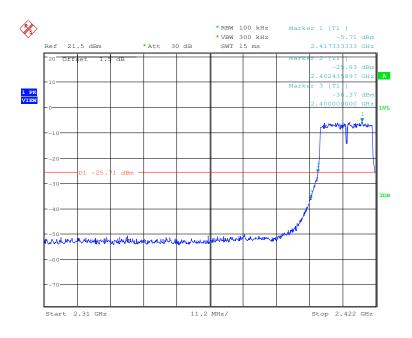

Test mode: 802.11n(HT20) Test channel: Highest

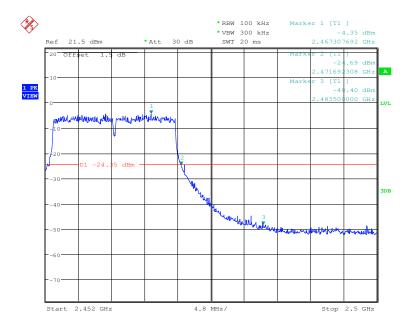





Report No.: SZEM141100662801

Page: 46 of 106

Test mode: 802.11n(HT40) Test channel: Lowest

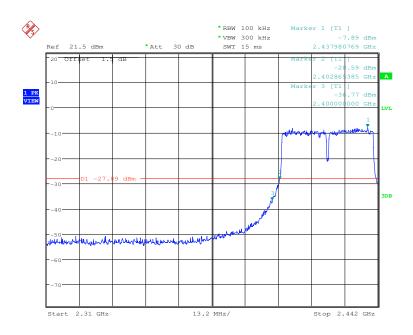

Test mode: 802.11n(HT40) Test channel: Highest

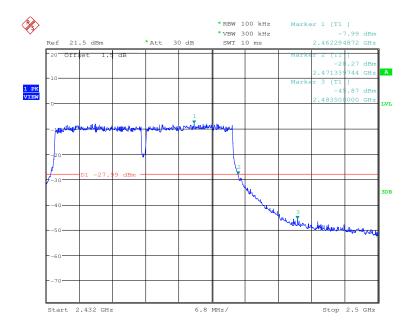



Report No.: SZEM141100662801

Page: 47 of 106

6.7 RF Conducted Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)					
Test Method:	KDB558074 D01 v03r02					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane					
	Remark:					
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.					
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates					
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;					
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case					
	of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread					
	spectrum intentional radiator is operating, the radio frequency power that is					
	produced by the intentional radiator shall be at least 20 dB below that in the					
	100 kHz bandwidth within the band that contains the highest level of the					
	desired power, based on either an RF conducted or a radiated					
	measurement.					
Instruments Used:	Refer to section 5.10 for details					
Test Results:	Pass					





Report No.: SZEM141100662801

Page: 48 of 106

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

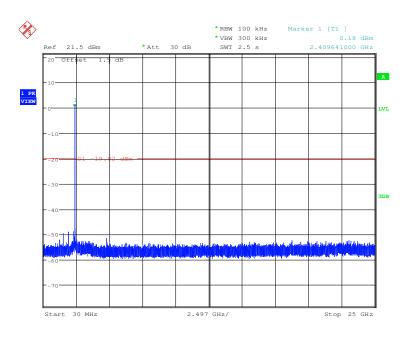


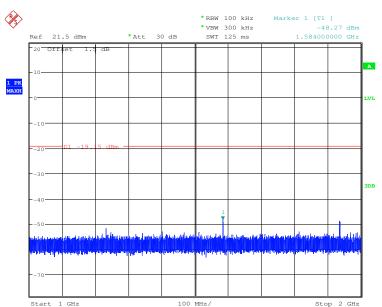




Report No.: SZEM141100662801

Page: 49 of 106

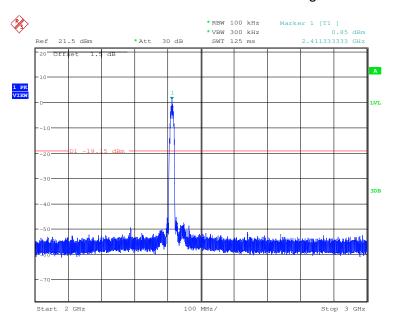

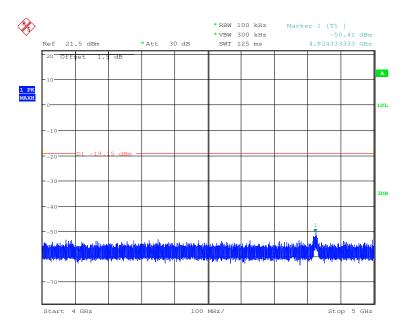





Report No.: SZEM141100662801

Page: 50 of 106

Test mode: 802.11b Test channel: Middle

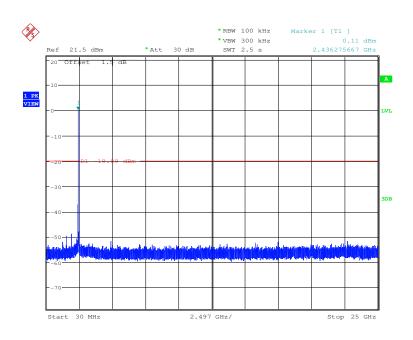


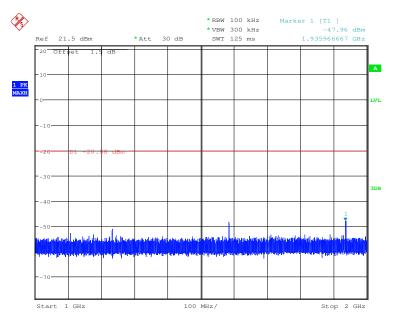




Report No.: SZEM141100662801

Page: 51 of 106

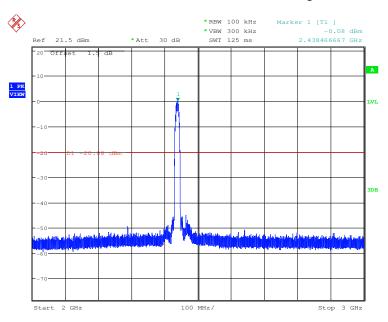

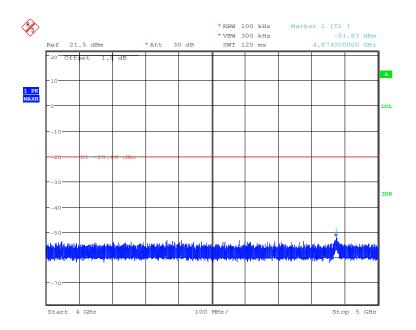







Report No.: SZEM141100662801

Page: 52 of 106

Test mode: 802.11b Test channel: Highest

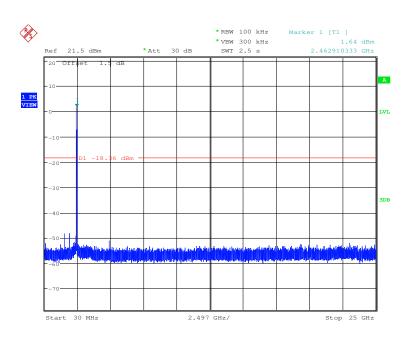


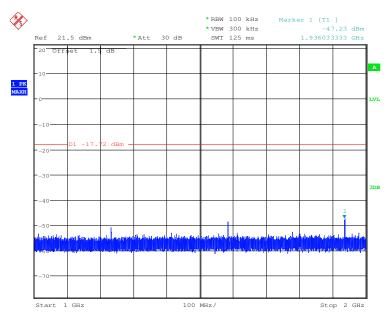




Report No.: SZEM141100662801

Page: 53 of 106

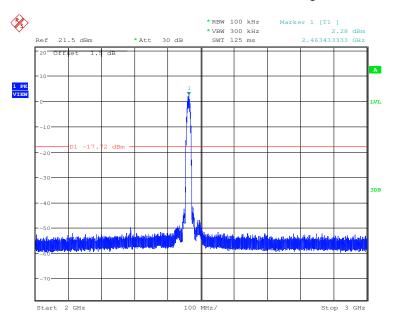

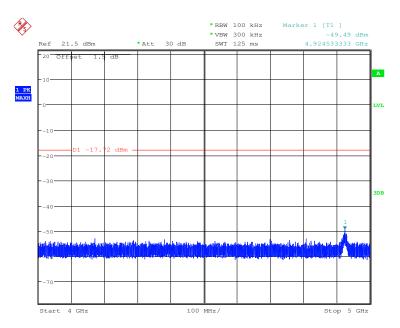





Report No.: SZEM141100662801

Page: 54 of 106

Test mode: 802.11g Test channel: Lowest

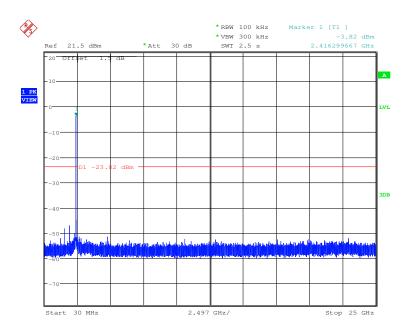


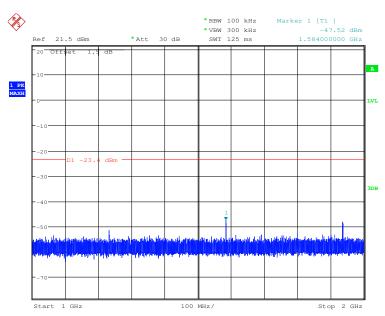




Report No.: SZEM141100662801

Page: 55 of 106

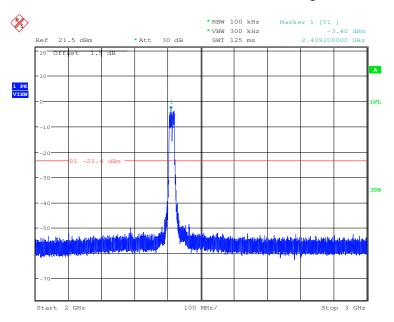

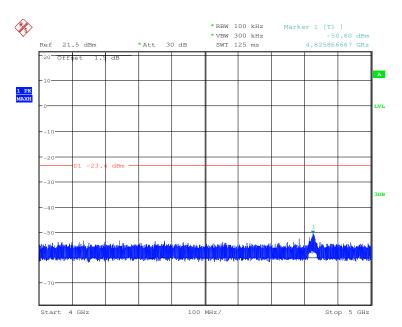





Report No.: SZEM141100662801

Page: 56 of 106

Test mode: 802.11g Test channel: Middle

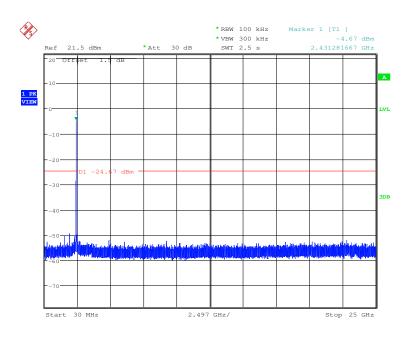


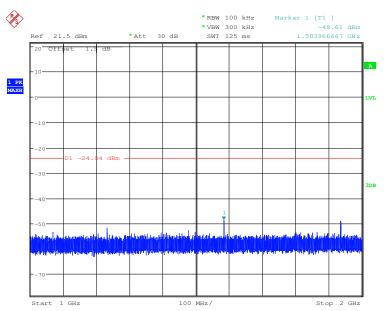




Report No.: SZEM141100662801

Page: 57 of 106

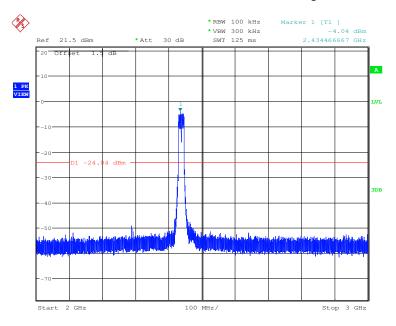

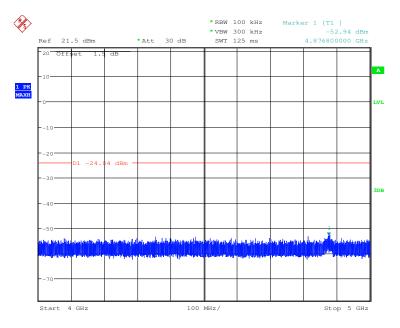





Report No.: SZEM141100662801

Page: 58 of 106

Test mode: 802.11g Test channel: Highest

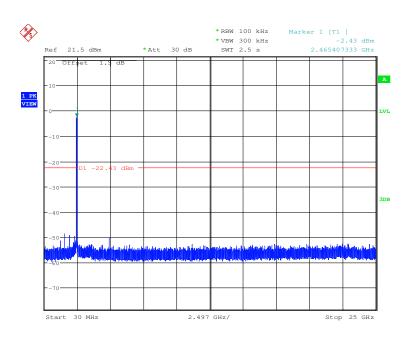


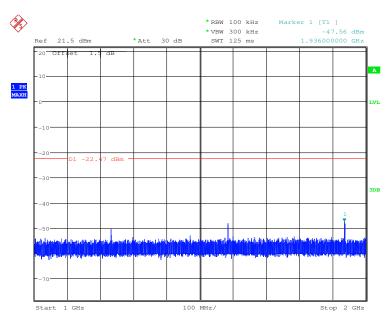




Report No.: SZEM141100662801

Page: 59 of 106

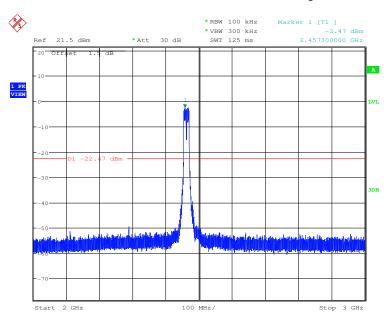

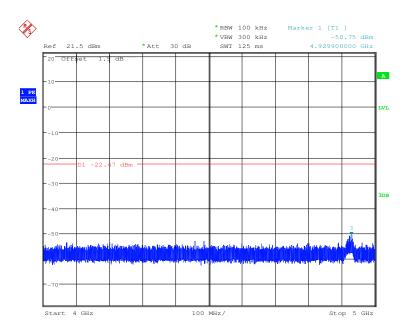





Report No.: SZEM141100662801

Page: 60 of 106

Test mode: 802.11n(HT20) Test channel: Lowest

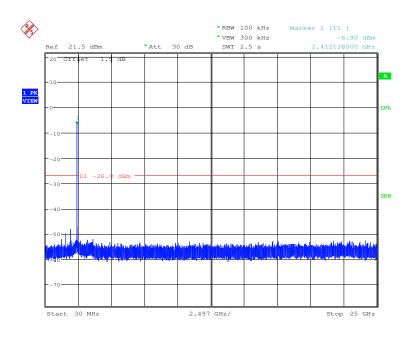


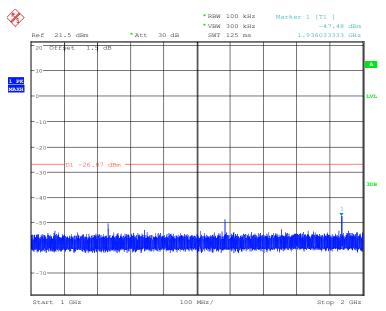




Report No.: SZEM141100662801

Page: 61 of 106

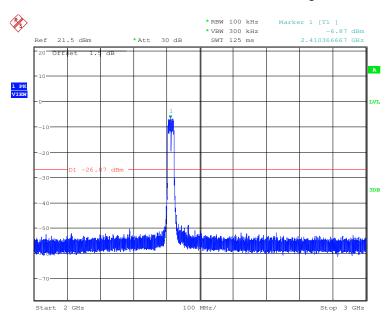

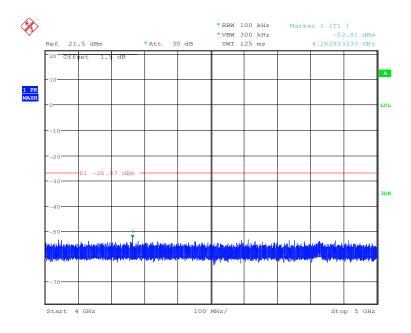







Report No.: SZEM141100662801

Page: 62 of 106

Test mode: 802.11n(HT20) Test channel: Middle

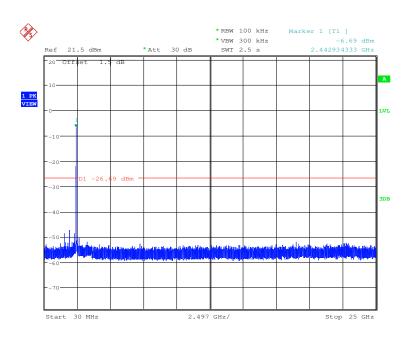


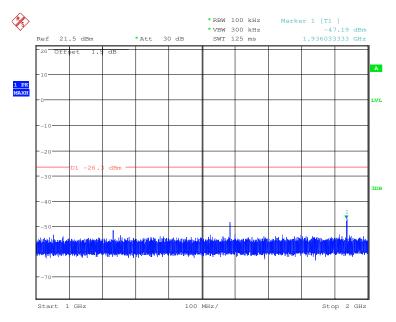




Report No.: SZEM141100662801

Page: 63 of 106

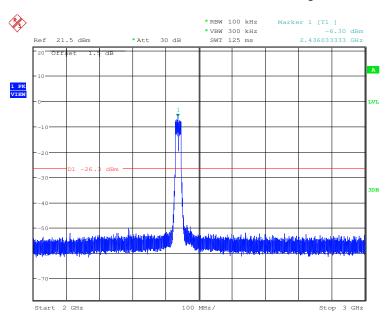

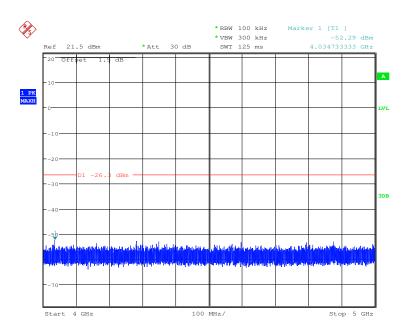





Report No.: SZEM141100662801

Page: 64 of 106

Test mode: 802.11n(HT20) Test channel: Highest

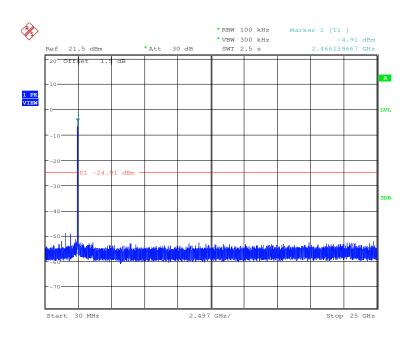


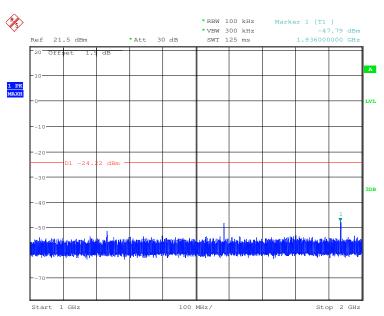




Report No.: SZEM141100662801

Page: 65 of 106

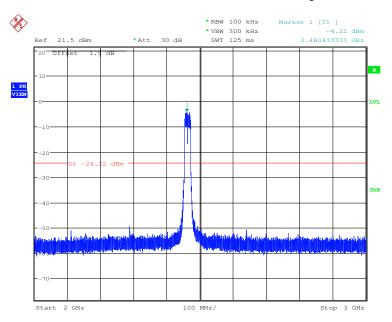

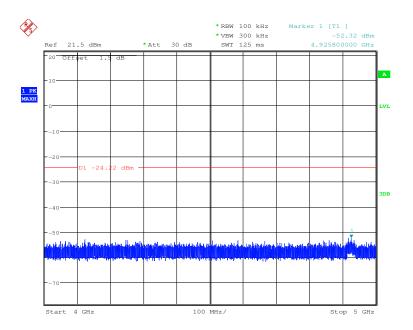





Report No.: SZEM141100662801

Page: 66 of 106

Test mode: 802.11n(HT40) Test channel: Lowest

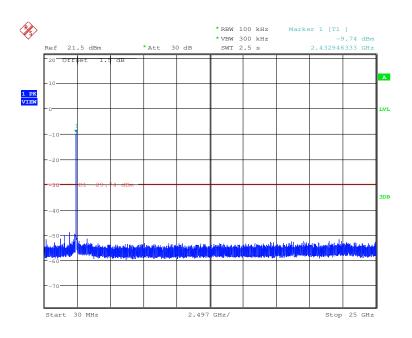


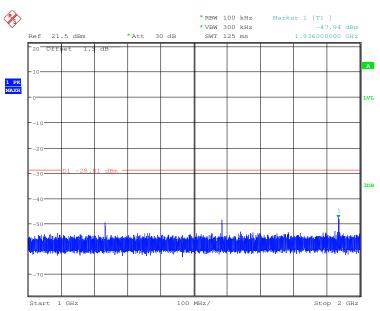




Report No.: SZEM141100662801

Page: 67 of 106

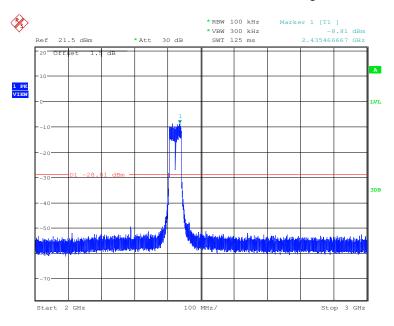

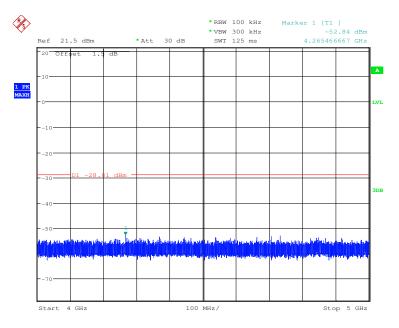





Report No.: SZEM141100662801

Page: 68 of 106

Test mode: 802.11n(HT40) Test channel: Middle

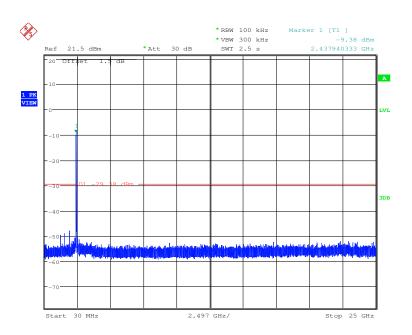


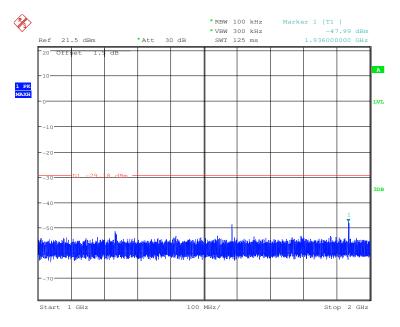




Report No.: SZEM141100662801

Page: 69 of 106

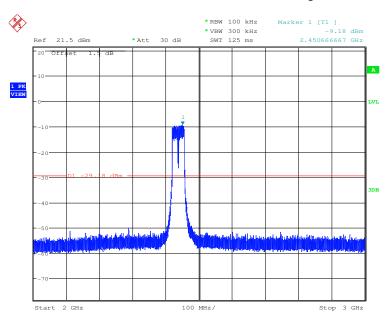

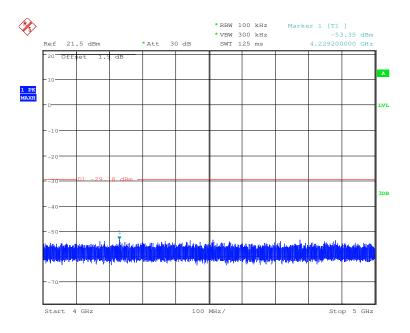





Report No.: SZEM141100662801

Page: 70 of 106

Test mode: 802.11n(HT40) Test channel: Highest

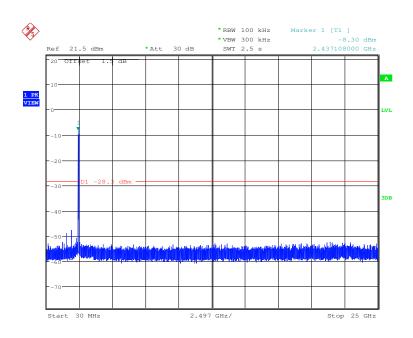

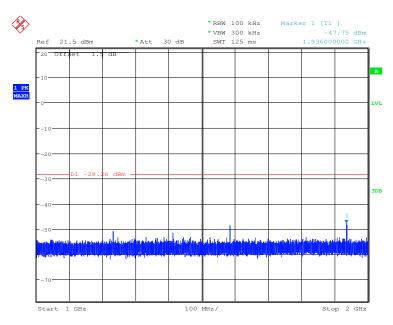



SGS

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM141100662801

Page: 71 of 106

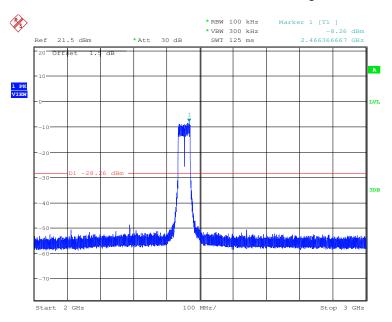

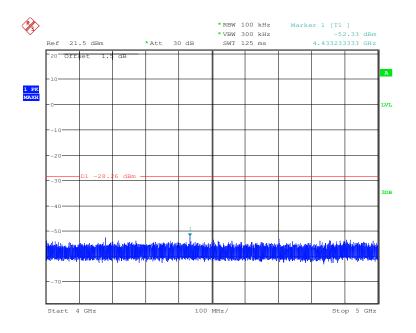

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.



Report No.: SZEM141100662801

Page: 72 of 106

6.8 Radiated Spurious Emissions


Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10 2009							
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark			
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak			
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average			
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak			
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak			
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average			
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak			
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak			
	Above 1GHz	Peak	1MHz	3MHz	Peak			
	Above Tariz	Peak	1MHz	10Hz	Average			
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)			
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300			
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30			
	1.705MHz-30MHz	30	-	-	30			
	30MHz-88MHz	100	40.0	Quasi-peak	3			
	88MHz-216MHz	150	43.5	Quasi-peak	3			
	216MHz-960MHz	200	46.0	Quasi-peak	3			
	960MHz-1GHz	500	54.0	Quasi-peak	3			
	Above 1GHz	500	54.0	Average	3			
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency							
	emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.							



Report No.: SZEM141100662801

Page: 73 of 106

Test Setup:

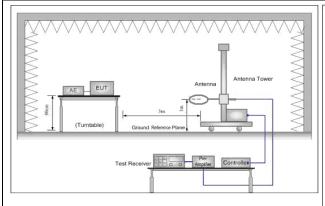

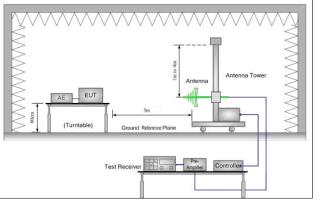


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

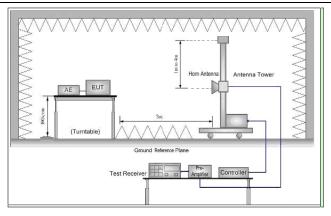


Figure 3. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average



Report No.: SZEM141100662801

Page: 74 of 106

	method as specified and then reported in a data sheet.					
	g. Test the EUT in the lowest channel ,the middle channel ,the Highest channel					
	h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.					
	i. Repeat above procedures until all frequencies measured was complete.					
	Transmitting with all kind of modulations, data rates.					
Mode:	Transmitting mode, Charge + Transmitting mode.					
Final Test Mode:	Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case.					
	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;					
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case					
	of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)					
	For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case.					
	Only the worst case is recorded in the report.					
Instruments Used:	Refer to section 5.10 for details					
Test Results:	Pass					




Report No.: SZEM141100662801

Page: 75 of 106

6.8.1 Radiated emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Charge+Transmitting	Vertical

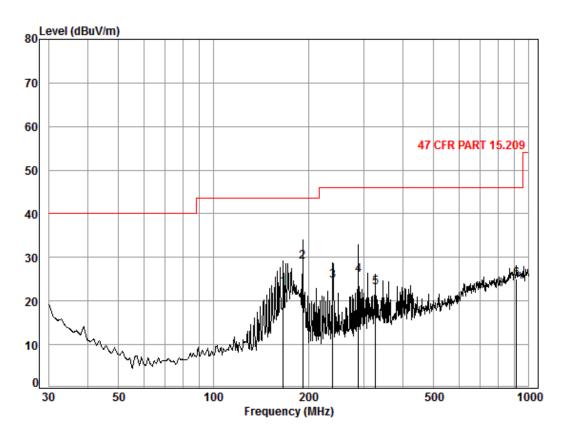

Condition: 47 CFR PART 15.209 3m Vertical

Job No. : 6628CR

Test mode: Charge+TX mode


Freq							Over Limit
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
166.65	1.35	9.53	26.83	39.10	23.15	43.50	-20.35
191.75	1.39	10.12	26.73	44.30	29.08	43.50	-14.42
239.15	1.62	11.95	26.57	37.72	24.72	46.00	-21.28
287.99	1.85	13.37	26.43	37.07	25.86	46.00	-20.14
326.74	1.99	14.74	26.60	33.05	23.18	46.00	-22.82
916.07	3.62	23.26	26.71	24.91	25.08	46.00	-20.92
	MHz 166.65 191.75 239.15 287.99 326.74	Freq Loss MHz dB 166.65 1.35 191.75 1.39 239.15 1.62 287.99 1.85 326.74 1.99	Freq Loss Factor MHz dB dB/m 166.65 1.35 9.53 191.75 1.39 10.12 239.15 1.62 11.95 287.99 1.85 13.37 326.74 1.99 14.74	Freq Loss Factor Factor MHz dB dB/m dB 166.65 1.35 9.53 26.83 191.75 1.39 10.12 26.73 239.15 1.62 11.95 26.57 287.99 1.85 13.37 26.43 326.74 1.99 14.74 26.60	Freq Loss Factor Factor Level MHz dB dB/m dB dBuV 166.65 1.35 9.53 26.83 39.10 191.75 1.39 10.12 26.73 44.30 239.15 1.62 11.95 26.57 37.72 287.99 1.85 13.37 26.43 37.07 326.74 1.99 14.74 26.60 33.05	Freq Loss Factor Factor Level Level MHz dB dB/m dB dBuV dBuV/m 166.65 1.35 9.53 26.83 39.10 23.15 191.75 1.39 10.12 26.73 44.30 29.08 239.15 1.62 11.95 26.57 37.72 24.72 287.99 1.85 13.37 26.43 37.07 25.86 326.74 1.99 14.74 26.60 33.05 23.18	MHz dB dB/m dB dBuV dBuV/m dBuV/m 166.65 1.35 9.53 26.83 39.10 23.15 43.50 191.75 1.39 10.12 26.73 44.30 29.08 43.50 239.15 1.62 11.95 26.57 37.72 24.72 46.00 287.99 1.85 13.37 26.43 37.07 25.86 46.00 326.74 1.99 14.74 26.60 33.05 23.18 46.00



Report No.: SZEM141100662801

Page: 76 of 106

Test mode:	Charge+Transmitting	Horizontal
	3	

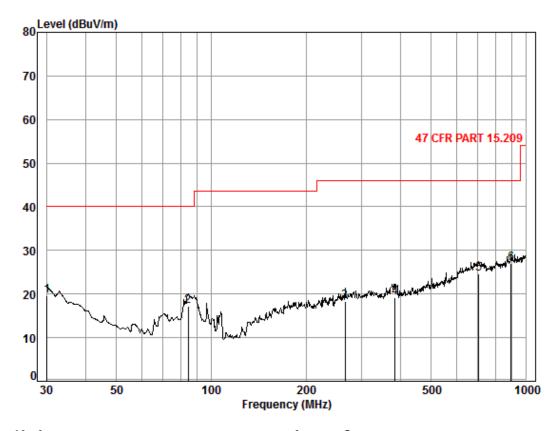

Condition: 47 CFR PART 15.209 3m Horizontal

Job No. : 6628CR

Test mode: Charge+TX mode

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
						dD: M/m	dD. M/m	dB
	MHz	dB	ub/m	dB	abuv	ubuv/m	ubuv/m	иь
1	30.00	0.60	18.70	27.36	27.71	19.65	40.00	-20.35
2	84.41	1.10	8.14	27.22	35.11	17.13	40.00	-22.87
3	266.61	1.75	12.63	26.49	30.47	18.36	46.00	-27.64
4	383.93	2.16	16.11	27.03	28.04	19.28	46.00	-26.72
5	706.70	2.92	21.60	27.41	27.44	24.55	46.00	-21.45
6	897.00	3.59	23.18	26.78	27.11	27.10	46.00	-18.90



Report No.: SZEM141100662801

Page: 77 of 106

6.8.2 Transmitter emission above 1GHz

Test mode:	802	.11b	Test ch	annel:	Lowest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
1598.567	7.2	26.4	34.8	53	51.8	74.0	-22.2	Vertical
4824	7.6	34.4	35.1	44.8	51.7	74.0	-22.3	Vertical
6558.840	9.0	35.4	33.6	45	55.8	74.0	-18.2	Vertical
7236	9.9	35.8	33.8	45.8	57.7	74.0	-16.3	Vertical
9648	12.1	37.2	32.4	43.5	60.4	74.0	-13.6	Vertical
12311.615	14.9	37.9	32.0	8.7	61.5	74.0	-12.5	Vertical
1596.666	7.2	26.4	34.8	53.3	52.1	74.0	-21.9	Horizontal
4824	7.6	34.4	35.1	45.8	52.7	74.0	-21.3	Horizontal
6599.451	9.0	35.4	33.7	42.8	53.5	74.0	-20.5	Horizontal
7236	9.9	35.8	33.8	43.5	55.4	74.0	-18.6	Horizontal
9648	12.1	37.2	32.4	44.4	61.3	74.0	-12.7	Horizontal
11459.836	13.5	37.6	31.5	10.5	61.6	74.0	-12.4	Horizontal

Test mode:	802	.11b	Test ch	annel:	Lowest	Remark	:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
1598.567	7.2	26.4	34.8	31.9	30.7	54.0	-23.3	Vertical
4824	7.6	34.4	35.1	32.2	39.1	54.0	-14.9	Vertical
6558.840	9.0	35.4	33.7	31.9	42.6	54.0	-11.4	Vertical
7236	9.9	35.8	33.8	32.6	44.5	54.0	-9.5	Vertical
9648	12.1	37.2	32.4	31.5	48.4	54.0	-5.6	Vertical
12311.315	15.0	37.9	31.9	28.1	49.1	54.0	-4.9	Vertical
1596.666	7.2	26.4	34.8	31.1	29.9	54.0	-24.1	Horizontal
4824	7.6	34.4	35.1	32.3	39.2	54.0	-14.8	Horizontal
6599.451	9.0	35.4	33.7	32.5	43.2	54.0	-10.8	Horizontal
7236	9.9	35.8	33.8	33.5	45.4	54.0	-8.6	Horizontal
9648	12.1	37.2	32.4	31	47.9	54.0	-6.1	Horizontal
11459.836	13.5	37.6	31.5	29.8	49.4	54.0	-4.6	Horizontal



Report No.: SZEM141100662801

Page: 78 of 106

Test mode:	802	.11b	Test ch	annel:	Middle	Remark		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
1600.324	7.2	26.4	34.8	52.4	51.2	74.0	-22.8	Vertical
4874	7.6	34.5	35.2	44.6	51.5	74.0	-22.5	Vertical
6611.286	9.0	35.4	33.7	45.5	56.2	74.0	-17.8	Vertical
7311	10.0	35.7	33.8	44.8	56.7	74.0	-17.3	Vertical
9748	12.3	37.3	32.1	43.6	61.1	74.0	-12.9	Vertical
11480.587	13.5	37.6	31.6	41.6	61.1	74.0	-12.9	Vertical
1600.324	7.2	26.4	34.8	53.6	52.4	74.0	-21.6	Horizontal
4874	7.6	34.5	35.2	46.6	53.5	74.0	-20.5	Horizontal
6623.143	9.1	35.4	33.7	44.2	55.0	74.0	-19.0	Horizontal
7311	10.0	35.7	33.8	45.7	57.6	74.0	-16.4	Horizontal
9748	12.3	37.3	32.1	43.1	60.6	74.0	-13.4	Horizontal
11480.587	13.5	37.6	31.6	42.3	61.8	74.0	-12.2	Horizontal

Test mode:	802	.11b	Test ch	annel:	Middle	Remark	:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over Limit (dB)	Polarization
1600.324	7.2	26.4	34.8	36.3	35.1	54.0	-18.9	Vertical
4874	7.6	34.5	35.2	32.2	39.1	54.0	-14.9	Vertical
6611.286	9.0	35.4	33.7	32.7	43.4	54.0	-10.6	Vertical
7311	10.0	35.7	33.8	32.8	44.7	54.0	-9.3	Vertical
9748	12.3	37.3	32.1	30.8	48.3	54.0	-5.7	Vertical
11480.587	13.5	37.6	31.6	-2	49.1	54.0	-4.9	Vertical
1600.324	7.2	26.4	34.8	31.8	30.6	54.0	-23.4	Horizontal
4874	7.6	34.5	35.2	31.7	38.6	54.0	-15.4	Horizontal
6623.143	9.1	35.4	33.7	32.1	42.9	54.0	-11.1	Horizontal
7311	10.0	35.7	33.8	32.4	44.3	54.0	-9.7	Horizontal
9748	12.3	37.3	32.1	31.1	48.6	54.0	-5.4	Horizontal
11480.587	13.5	37.6	31.6	-1.5	49.6	54.0	-4.4	Horizontal



Report No.: SZEM141100662801

Page: 79 of 106

Test mode:	802	.11b	Test cha	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
1596.812	7.2	26.4	34.8	53.2	52.0	74.0	-22.0	Vertical
4924	7.6	34.6	35.2	44.5	51.5	74.0	-22.5	Vertical
6568.456	9.0	35.4	33.7	40.8	51.5	74.0	-22.5	Vertical
7386	10.0	35.7	33.9	45.1	56.9	74.0	-17.1	Vertical
9848	12.3	37.3	32.1	43	60.5	74.0	-13.5	Vertical
11480.387	13.5	37.6	31.6	41.9	61.4	74.0	-12.6	Vertical
1600.324	7.2	26.4	34.8	53.5	52.3	74.0	-21.7	Horizontal
4924	7.6	34.6	35.2	45.8	52.8	74.0	-21.2	Horizontal
6333.012	8.7	34.8	33.7	45.9	55.7	74.0	-18.3	Horizontal
7386	10.0	35.7	33.9	45.9	57.7	74.0	-16.3	Horizontal
9848	12.3	37.3	32.1	43.4	60.9	74.0	-13.1	Horizontal
11920.589	13.9	37.7	31.8	41.7	61.5	74.0	-12.5	Horizontal

Test mode:		802	.11b	Test ch	nannel:	Highest	Remark	ς:	Average
Frequency (MHz)	Cab los (dE	s	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
1596.812	7.2	2	26.4	34.8	31.5	30.3	54.0	-23.7	Vertical
4924	7.6	3	34.6	35.2	32.1	39.1	54.0	-14.9	Vertical
6568.456	9.0)	35.4	33.7	32.8	43.5	54.0	-10.5	Vertical
7386	10.	0	35.7	33.9	32.8	44.6	54.0	-9.4	Vertical
9848	12.	3	37.3	32.1	30.7	48.2	54.0	-5.8	Vertical
11480.585	13.	5	37.6	31.6	-1.4	49.7	54.0	-4.3	Vertical
1600.324	7.2	2	26.4	34.8	30.8	29.6	54.0	-24.4	Horizontal
4924	7.6	6	34.6	35.2	32.4	39.4	54.0	-14.6	Horizontal
6332.012	8.7	7	34.8	33.7	32.4	42.2	54.0	-11.8	Horizontal
7386	10.	0	35.7	33.9	32.9	44.7	54.0	-9.3	Horizontal
9848	12.	3	37.3	32.1	30.8	48.3	54.0	-5.7	Horizontal
11920.589	13.	9	37.7	31.8	-2.4	49.2	54.0	-4.8	Horizontal



Report No.: SZEM141100662801

Page: 80 of 106

Test mode:	802	.11g	Test ch	annel:	Lowest	Remark		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
1600.324	7.2	26.4	34.8	52	50.8	74.0	-23.2	Vertical
4824	7.6	34.4	35.1	45.6	52.5	74.0	-21.5	Vertical
6482.258	8.9	35.2	33.7	46.3	56.7	74.0	-17.3	Vertical
7236	9.9	35.8	33.8	46	57.9	74.0	-16.1	Vertical
9648	12.1	37.2	32.4	44.1	61.0	74.0	-13.0	Vertical
11398.401	13.5	37.5	31.4	42.2	61.8	74.0	-12.2	Vertical
1600.324	7.2	26.4	34.8	53.8	52.6	74.0	-21.4	Horizontal
4824	7.6	34.4	35.1	44.7	51.6	74.0	-22.4	Horizontal
6493.883	8.9	35.2	33.7	45	55.4	74.0	-18.6	Horizontal
7236	9.9	35.8	33.8	45.9	57.8	74.0	-16.2	Horizontal
9648	12.1	37.2	32.4	44	60.9	74.0	-13.1	Horizontal
11500.976	13.5	37.7	31.6	41.8	61.4	74.0	-12.6	Horizontal

Test mode:	802	.11g	Test ch	annel:	Lowest	Remark	:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
1600.126	7.2	26.4	34.8	36.4	35.2	54.0	-18.8	Vertical
4824	7.6	34.4	35.1	32	38.9	54.0	-15.1	Vertical
6482.258	8.9	35.2	33.7	32.7	43.1	54.0	-10.9	Vertical
7236	9.9	35.8	33.8	32.8	44.7	54.0	-9.3	Vertical
9648	12.1	37.2	32.4	31	47.9	54.0	-6.1	Vertical
11398.401	13.5	37.5	31.4	-1.9	49.1	54.0	-4.9	Vertical
1600.324	7.2	26.4	34.8	30.5	29.3	54.0	-24.7	Horizontal
4824	7.6	34.4	35.1	32.2	39.1	54.0	-14.9	Horizontal
6494.883	8.9	35.2	33.7	32.3	42.7	54.0	-11.3	Horizontal
7236	9.9	35.8	33.8	32.7	44.6	54.0	-9.4	Horizontal
9648	12.1	37.2	32.4	30.9	47.8	54.0	-6.2	Horizontal
11500.976	13.5	37.7	31.6	-1.8	49.4	54.0	-4.6	Horizontal



Report No.: SZEM141100662801

Page: 81 of 106

Test mode:	802	.11g	Test ch	annel:	Middle	Remark		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
1600.324	7.2	26.4	34.8	52.2	51.0	74.0	-23.0	Vertical
4874	7.6	34.5	35.2	44.6	51.5	74.0	-22.5	Vertical
6611.286	9.0	35.4	33.7	45.5	56.2	74.0	-17.8	Vertical
7311	10.0	35.7	33.8	44.8	56.7	74.0	-17.3	Vertical
9748	12.3	37.3	32.1	43.6	61.1	74.0	-12.9	Vertical
11480.387	13.5	37.6	31.6	41.9	61.4	74.0	-12.6	Vertical
1600.324	7.2	26.4	34.8	52.4	51.2	74.0	-22.8	Horizontal
4874	7.6	34.5	35.2	46.6	53.5	74.0	-20.5	Horizontal
6623.143	9.1	35.4	33.7	44.2	55.0	74.0	-19.0	Horizontal
7311	10.0	35.7	33.8	45.7	57.6	74.0	-16.4	Horizontal
9748	12.3	37.3	32.1	43.1	60.6	74.0	-13.4	Horizontal
11480.387	13.5	37.6	31.6	41.6	61.1	74.0	-12.9	Horizontal

Test mode:	802	.11g	Test ch	annel:	Middle	Remark	:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
1600.324	7.2	26.4	34.8	36.4	35.2	54.0	-18.8	Vertical
4874	7.6	34.5	35.2	32.2	39.1	54.0	-14.9	Vertical
6611.286	9.0	35.4	33.7	32.7	43.4	54.0	-10.6	Vertical
7311	10.0	35.7	33.8	32.8	44.7	54.0	-9.3	Vertical
9748	12.3	37.3	32.1	30.8	48.3	54.0	-5.7	Vertical
11480.387	13.5	37.6	31.6	-1.8	49.3	54.0	-4.7	Vertical
1600.324	7.2	26.4	34.8	30.5	29.3	54.0	-24.7	Horizontal
4874	7.6	34.5	35.2	31.7	38.6	54.0	-15.4	Horizontal
6623.143	9.1	35.4	33.7	32.1	42.9	54.0	-11.1	Horizontal
7311	10.0	35.7	33.8	32.4	44.3	54.0	-9.7	Horizontal
9748	12.3	37.3	32.1	31.1	48.6	54.0	-5.4	Horizontal
11480.387	13.5	37.6	31.6	-1.9	49.2	54.0	-4.8	Horizontal



Report No.: SZEM141100662801

Page: 82 of 106

Test mode:	802	.11g	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1595.058	7.1	26.4	34.8	51.1	49.8	74.0	-24.2	Vertical
4924	7.6	34.6	35.2	44.7	51.7	74.0	-22.3	Vertical
6767.090	9.2	35.3	33.7	45	55.8	74.0	-18.2	Vertical
7386	10.0	35.7	33.9	45.2	57.0	74.0	-17.0	Vertical
9848	12.3	37.3	32.1	43.1	60.6	74.0	-13.4	Vertical
12049.433	14.3	37.8	31.8	40.9	61.2	74.0	-12.8	Vertical
1596.562	7.2	26.4	34.8	52.8	51.6	74.0	-22.4	Horizontal
4924	7.6	34.6	35.2	44.8	51.8	74.0	-22.2	Horizontal
5677.316	7.8	34.3	34.6	46.7	54.2	74.0	-19.8	Horizontal
7386	10.0	35.7	33.9	45.7	57.5	74.0	-16.5	Horizontal
9848	12.3	37.3	32.1	44.2	61.7	74.0	-12.3	Horizontal
11439.321	13.5	37.6	31.5	41.6	61.2	74.0	-12.8	Horizontal
Test mode:	802	.11g	Test ch	annel:	Highest	Remark	:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over Limit (dB)	Polarization
1595.058	7.1	26.4	34.8	31.4	30.1	54.0	-23.9	Vertical
4924	7.6	34.6	35.2	31.8	38.8	54.0	-15.2	Vertical
6766.090	9.2	35.3	33.7	32.4	43.2	54.0	-10.8	Vertical
7386	10.0	35.7	33.9	33.2	45.0	54.0	-9.0	Vertical
9848	12.3	37.3	32.1	30.1	47.6	54.0	-6.4	Vertical
12049.433	14.3	37.8	31.8	-3	49.1	54.0	-4.9	Vertical
1596.562	7.2	26.4	34.8	30.7	29.5	54.0	-24.5	Horizontal
4924	7.6	34.6	35.2	32.2	39.2	54.0	-14.8	Horizontal
4924	7.6	34.6	35.2	32.2	39.2	54.0	-14.8	Horizontal
5677.316	7.8	34.3	34.6	32.6	40.1	54.0	-13.9	Horizontal
7386	10.0	35.7	33.9	32	43.8	54.0	-10.2	Horizontal
9848	12.3	37.3	32.1	30.2	47.7	54.0	-6.3	Horizontal



Report No.: SZEM141100662801

Page: 83 of 106

Test mode:	802	.11n(HT20)	Test ch	annel:	Lowest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
1598.567	7.2	26.4	34.8	51.9	50.7	74.0	-23.3	Vertical
4824	7.6	34.4	35.1	44.5	51.4	74.0	-22.6	Vertical
6505.529	8.9	35.2	33.7	45.6	56.0	74.0	-18.0	Vertical
7236	9.9	35.8	33.8	44.9	56.8	74.0	-17.2	Vertical
9648	12.1	37.2	32.4	43.9	60.8	74.0	-13.2	Vertical
11542.264	13.5	37.7	31.6	42.3	61.9	74.0	-12.1	Vertical
1598.567	7.2	26.4	34.8	50.6	49.4	74.0	-24.6	Horizontal
4824	7.6	34.4	35.1	44.7	51.6	74.0	-22.4	Horizontal
6646.919	9.1	35.4	33.7	44.3	55.1	74.0	-18.9	Horizontal
7236	9.9	35.8	33.8	46.2	58.1	74.0	-15.9	Horizontal
9648	12.1	37.2	32.4	44.1	61.0	74.0	-13.0	Horizontal
11056.441	13.1	37.6	31.2	42.2	61.7	74.0	-12.3	Horizontal

Test mode:	802	.11n(HT20)	Test ch	annel:	Lowest	Remark	:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
1598.567	7.2	26.4	34.8	31.4	30.2	54.0	-23.8	Vertical
4824	7.6	34.4	35.1	31.6	38.5	54.0	-15.5	Vertical
6505.529	8.9	35.2	33.7	31.8	42.2	54.0	-11.8	Vertical
7236	9.9	35.8	33.8	32.5	44.4	54.0	-9.6	Vertical
9648	12.1	37.2	32.4	31.3	48.2	54.0	-5.8	Vertical
11542.264	13.5	37.7	31.6	-2.1	49.1	54.0	-4.9	Vertical
1598.567	7.2	26.4	34.8	30.6	29.4	54.0	-24.6	Horizontal
4824	7.6	34.4	35.1	31.8	38.7	54.0	-15.3	Horizontal
6646.919	9.1	35.4	33.7	27.9	38.7	54.0	-15.3	Horizontal
7236	9.9	35.8	33.8	32.6	44.5	54.0	-9.5	Horizontal
9648	12.1	37.2	32.4	30.8	47.7	54.0	-6.3	Horizontal
11056.441	13.1	37.6	31.2	-1.7	49.0	54.0	-5.0	Horizontal



Report No.: SZEM141100662801

Page: 84 of 106

Test mode:	80	2.11n(HT20)	Test ch	annel:	Middle	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
1600.324	7.2	26.4	34.8	52.2	51.0	74.0	-23.0	Vertical
4874	7.6	34.5	35.2	44.6	51.5	74.0	-22.5	Vertical
6611.286	9.0	35.4	33.7	45.5	56.2	74.0	-17.8	Vertical
7311	10.0	35.7	33.8	44.8	56.7	74.0	-17.3	Vertical
9748	12.3	37.3	32.1	43.6	61.1	74.0	-12.9	Vertical
11480.254	13.5	37.6	31.6	42	61.5	74.0	-12.5	Vertical
1600.324	7.2	26.4	34.8	52.4	51.2	74.0	-22.8	Horizontal
4874	7.6	34.5	35.1	46.4	53.4	74.0	-20.6	Horizontal
6623.143	9.0	35.4	33.6	44.3	55.1	74.0	-18.9	Horizontal
7311	10.0	35.7	33.8	45.9	57.8	74.0	-16.2	Horizontal
9748	12.3	37.3	32.1	43.2	60.7	74.0	-13.3	Horizontal
11480.254	13.5	37.6	31.6	10.7	61.8	74.0	-12.2	Horizontal

Test mode:	802	2.11n(HT20)	Test ch	annel:	Middle	Remark	:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
1600.324	7.2	26.4	34.8	36.4	35.2	54.0	-18.8	Vertical
4874	7.6	34.5	35.2	32.2	39.1	54.0	-14.9	Vertical
6611.286	9.0	35.4	33.7	32.7	43.4	54.0	-10.6	Vertical
7311	10.0	35.7	33.8	32.8	44.7	54.0	-9.3	Vertical
9748	12.3	37.3	32.1	30.8	48.3	54.0	-5.7	Vertical
11480.254	13.5	37.6	31.6	-2	49.1	54.0	-4.9	Vertical
1600.324	7.2	26.4	34.8	30.5	29.3	54.0	-24.7	Horizontal
4874	7.6	34.5	35.1	31.9	38.9	54.0	-15.1	Horizontal
6623.143	9.0	35.4	33.6	32.3	43.1	54.0	-10.9	Horizontal
7311	10.0	35.7	33.8	32.7	44.6	54.0	-9.4	Horizontal
9748	12.3	37.3	32.1	31.4	48.9	54.0	-5.1	Horizontal
11480.254	13.5	37.6	31.6	30.1	49.6	54.0	-4.4	Horizontal



Report No.: SZEM141100662801

Page: 85 of 106

Test mode:	802	.11n(HT20)	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1598.567	7.2	26.4	34.8	52.4	51.2	74.0	-22.8	Vertical
4924	7.6	34.6	35.2	44.4	51.4	74.0	-22.6	Vertical
6482.258	8.9	35.2	33.7	44.6	55.0	74.0	-19.0	Vertical
7386	10.0	35.7	33.9	45.8	57.6	74.0	-16.4	Vertical
9848	12.3	37.3	32.1	43.3	60.8	74.0	-13.2	Vertical
11276.518	13.6	37.5	31.2	41.4	61.3	74.0	-12.7	Vertical
1600.324	7.2	26.4	34.8	52.1	50.9	74.0	-23.1	Horizontal
4924	7.6	34.6	35.2	43.4	50.4	74.0	-23.6	Horizontal
6528.883	8.9	35.3	33.7	44.5	55.0	74.0	-19.0	Horizontal
7386	10.0	35.7	33.9	45.5	57.3	74.0	-16.7	Horizontal
9848	12.3	37.3	32.1	44.3	61.8	74.0	-12.2	Horizontal
11542.264	13.5	37.7	31.6	41.8	61.4	74.0	-12.6	Horizontal
Test mode:	802	.11n(HT20)	Test ch	annel:	Highest	Remark	:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
1598.567	7.2	26.4	34.8	31.5	30.3	54.0	-23.7	Vertical
4924	7.6	34.6	35.2	31.9	38.9	54.0	-15.1	Vertical
6482.258	8.9	35.2	33.7	32.7	43.1	54.0	-10.9	Vertical
7386	10.0	35.7	33.9	32.6	44.4	54.0	-9.6	Vertical
9848	12.3	37.3	32.1	30.4	47.9	54.0	-6.1	Vertical
11276.518	13.6	37.5	31.2	-2.2	48.9	54.0	-5.1	Vertical
1600.324	7.2	26.4	34.8	30.4	29.2	54.0	-24.8	Horizontal
4924	7.6	34.6	35.2	31.6	38.6	54.0	-15.4	Horizontal
6528.883	8.9	35.3	33.7	32.3	42.8	54.0	-11.2	Horizontal
7386	10.0	35.7	33.9	32.7	44.5	54.0	-9.5	Horizontal
9848	12.3	37.3	32.1	31	48.5	54.0	-5.5	Horizontal
11542.264	13.5	37.7	31.6	-2.1	49.1	54.0	-4.9	Horizontal



Report No.: SZEM141100662801

Page: 86 of 106

Test mode:	802	.11n(HT40)	Test ch	annel:	Lowest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
1598.567	7.2	26.4	34.8	51.8	50.6	74.0	-23.4	Vertical
4844	7.6	34.4	35.1	44.6	51.5	74.0	-22.5	Vertical
6505.531	8.9	35.3	33.6	44.6	55.2	74.0	-18.8	Vertical
7266	9.9	35.7	33.8	44.3	56.1	74.0	-17.9	Vertical
9688	12.2	37.2	32.3	43.6	60.7	74.0	-13.3	Vertical
11542.265	13.5	37.7	31.6	41.9	61.5	74.0	-12.5	Vertical
1598.567	7.2	26.4	34.8	50.7	49.5	74.0	-24.5	Horizontal
4844	7.6	34.4	35.1	45	51.9	74.0	-22.1	Horizontal
6646.512	9.1	35.4	33.7	44	54.8	74.0	-19.2	Horizontal
7266	9.9	35.7	33.8	46.3	58.1	74.0	-15.9	Horizontal
9688	12.2	37.2	32.3	44.7	61.8	74.0	-12.2	Horizontal
11056.441	13.1	37.6	31.2	41.7	61.2	74.0	-12.8	Horizontal

Test mode:	80	2.11n(HT40)	Test ch	annel:	Lowest	Remark	:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over Limit (dB)	Polarization
1598.567	7.2	26.4	34.8	31.4	30.2	54.0	-23.8	Vertical
4844	7.6	34.4	35.1	32.3	39.2	54.0	-14.8	Vertical
6505.531	8.9	35.3	33.6	31.2	41.8	54.0	-12.2	Vertical
7266	9.9	35.7	33.8	31.9	43.7	54.0	-10.3	Vertical
9688	12.2	37.2	32.3	31.4	48.5	54.0	-5.5	Vertical
11542.265	13.5	37.7	31.6	-2.5	48.7	54.0	-5.3	Vertical
1598.567	7.2	26.4	34.8	30.9	29.7	54.0	-24.3	Horizontal
4844	7.6	34.4	35.1	32.2	39.1	54.0	-14.9	Horizontal
6646.512	9.1	35.4	33.7	28.1	38.9	54.0	-15.1	Horizontal
7266	9.9	35.7	33.8	32.9	44.7	54.0	-9.3	Horizontal
9688	12.2	37.2	32.3	31.5	48.6	54.0	-5.4	Horizontal
11056.441	13.1	37.6	31.2	-1.8	48.9	54.0	-5.1	Horizontal



Report No.: SZEM141100662801

Page: 87 of 106

Test mode:	802	2.11n(HT40)	Test ch	annel:	Middle	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarizatio n
1600.112	7.2	26.4	34.8	52.7	51.5	74.0	-22.5	Vertical
4874	7.6	34.5	35.1	44.4	51.4	74.0	-22.6	Vertical
6611.258	9.0	35.4	33.6	47.4	58.2	74.0	-15.8	Vertical
7311	10.0	35.7	33.8	44.2	56.1	74.0	-17.9	Vertical
9748	12.3	37.3	32.1	43	60.5	74.0	-13.5	Vertical
11480.652	13.5	37.6	31.6	41.6	61.1	74.0	-12.9	Vertical
1600.324	7.2	26.4	34.8	52.7	51.5	74.0	-22.5	Horizontal
4874	7.6	34.5	35.1	45.8	52.8	74.0	-21.2	Horizontal
6611.258	9.0	35.4	33.6	45.4	56.2	74.0	-17.8	Horizontal
7311	10.0	35.7	33.8	45.5	57.4	74.0	-16.6	Horizontal
9748	12.3	37.3	32.1	43.4	60.9	74.0	-13.1	Horizontal
11480.254	13.5	37.6	31.6	42.4	61.9	74.0	-12.1	Horizontal

Test mode:	802	.11n(HT40)	Test ch	annel:	Middle	Remark	:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
1600.112	7.2	26.4	34.8	37	35.8	54.0	-18.2	Vertical
4874	7.6	34.5	35.1	32	39.0	54.0	-15.0	Vertical
6611.258	9.0	35.4	33.6	34.5	45.3	54.0	-8.7	Vertical
7311	10.0	35.7	33.8	32.4	44.3	54.0	-9.7	Vertical
9748	12.3	37.3	32.1	30	47.5	54.0	-6.5	Vertical
11480.652	13.5	37.6	31.6	-2.1	49.0	54.0	-5.0	Vertical
1600.324	7.2	26.4	34.8	31.5	30.3	54.0	-23.7	Horizontal
4874	7.6	34.5	35.1	30.6	37.6	54.0	-16.4	Horizontal
6611.258	9.0	35.4	33.6	34	44.8	54.0	-9.2	Horizontal
7311	10.0	35.7	33.8	32.3	44.2	54.0	-9.8	Horizontal
9748	12.3	37.3	32.1	31.6	49.1	54.0	-4.9	Horizontal
11480.254	13.5	37.6	31.6	30.3	49.8	54.0	-4.2	Horizontal



Report No.: SZEM141100662801

Page: 88 of 106

Test mode:	802	.11n(HT40)	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1598.685	7.2	26.4	34.8	53.1	51.9	74.0	-22.1	Vertical
4924	7.6	34.6	35.2	44.2	51.2	74.0	-22.8	Vertical
6482.512	8.9	35.2	33.6	43.7	54.2	74.0	-19.8	Vertical
7386	10.0	35.7	33.9	43.8	55.6	74.0	-18.4	Vertical
9848	12.3	37.3	32.1	43.6	61.1	74.0	-12.9	Vertical
11276.518	13.6	37.5	31.2	41.6	61.5	74.0	-12.5	Vertical
1600.324	7.2	26.4	34.8	52	50.8	74.0	-23.2	Horizontal
4924	7.6	34.6	35.2	43.1	50.1	74.0	-23.9	Horizontal
6528.883	8.9	35.3	33.6	44.6	55.2	74.0	-18.8	Horizontal
7386	10.0	35.7	33.9	46.1	57.9	74.0	-16.1	Horizontal
9848	12.3	37.3	32.1	44	61.5	74.0	-12.5	Horizontal
11542.264	13.5	37.7	31.6	10.5	61.7	74.0	-12.3	Horizontal
Test mode:	802	.11n(HT40)	Test ch	annel:	Highest	Remark	:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
1598.685	7.2	26.4	34.8	32.6	31.4	54.0	-22.6	Vertical
4924	7.6	34.6	35.2	32.2	39.2	54.0	-14.8	Vertical
6482.512	8.9	35.2	33.6	31.6	42.1	54.0	-11.9	Vertical
7386	10.0	35.7	33.9	30.3	42.1	54.0	11.9	Vertical
9848	12.3	37.3	32.1	30.6	48.1	54.0	5.9	Vertical
11276.518	13.6	37.5	31.2	-1.9	49.2	54.0	4.8	Vertical
1600.324	7.2	26.4	34.8	30.2	29.0	54.0	25.0	Horizontal
4924	7.6	34.6	35.2	31.5	38.5	54.0	15.5	Horizontal
6528.883	8.9	35.3	33.6	32.3	42.9	54.0	11.1	Horizontal
7386	10.0	35.7	33.9	33	44.8	54.0	9.2	Horizontal
9848	12.3	37.3	32.1	30.6	48.1	54.0	5.9	Horizontal
11542.264	13.5	37.7	31.6	29.7	49.3	54.0	4.7	Horizontal

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level =Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.




Report No.: SZEM141100662801

Page: 89 of 106

6.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15	7 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10 2009								
Test Site:	Measurement Distance: 3m	(Semi-Anechoic Chambe	r)						
Limit:	Frequency	Limit (dBuV/m @3m)	Remark						
	30MHz-88MHz	40.0	Quasi-peak Value						
	88MHz-216MHz	43.5	Quasi-peak Value						
	216MHz-960MHz	46.0	Quasi-peak Value						
	960MHz-1GHz	54.0	Quasi-peak Value						
	Above 1GHz	54.0	Average Value						
	Above IGHZ	74.0	Peak Value						
Test Setup:									

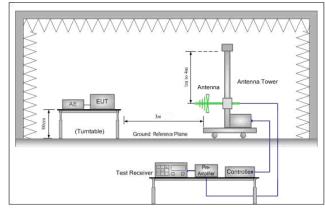

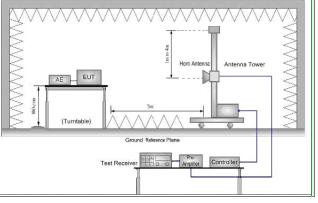


Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz



Report No.: SZEM141100662801

Page: 90 of 106


Test Procedure:	a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel
	g. Test the EUT in the lowest channel, the Highest channel
	h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.
	 Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
	Transmitting mode, Charge + Transmitting mode.
Final Test Mode:	Pretest the EUT at Transmitting mode and Charge +Transmitting mode, found the Charge +Transmitting mode which it is worse case.
	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of
	802.11n(HT40)
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass



Report No.: SZEM141100662801

Page: 91 of 106

Test plot as follows:

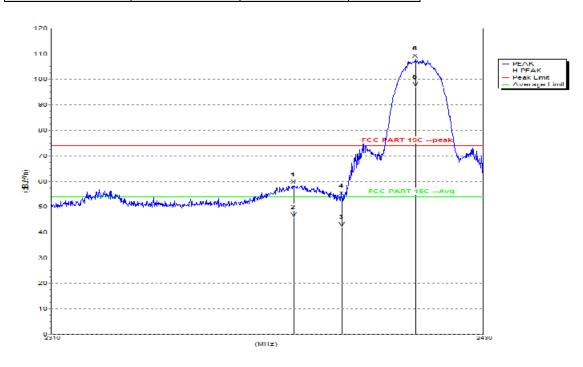


Mk.	Freq.	Level	Limit	Margin	Ant.F.	Amp.G.	Cbl.L.	Pol.
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dB/m)	(dB)	(dB)	
Peak:								
1	2376.840	58.5	74.0	15.5	28.6	34.8	4.6	Н
2	2390	54.2	74.0	19.8	28.7	34.8	4.6	Н
3 F	2410.920	108.0	74.0	-34.0	28.8	34.9	4.6	Н
Avg								
1	2376.840	45.8	54.0	8.2	28.6	34.8	4.6	Н
2	2390	42.0	54.0	12.0	28.7	34.8	4.6	Н
3 F	2410.920	97.1	54.0	-43.1	28.8	34.9	4.6	Н





Report No.: SZEM141100662801

Page: 92 of 106

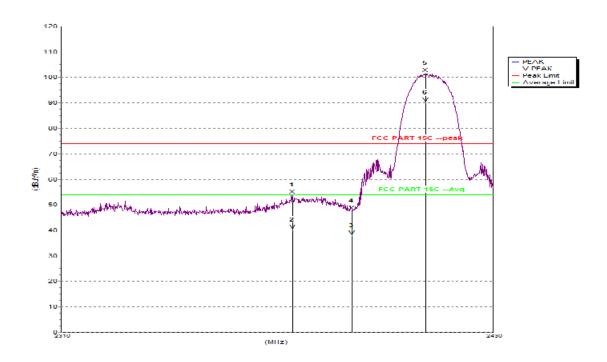



Mk.	Freq.	Level	Limit	Margin	Ant.F.	Amp.G.	Cbl.L.	Pol.
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dB/m)	(dB)	(dB)	
Peak:								
1	2373.600	54.0	74.0	20.0	28.6	34.8	4.6	V
2	2390	47.5	74.0	26.5	28.7	34.8	4.6	V
3 F	2410.920	101.7	74.0	-27.7	28.8	34.9	4.6	V
Avg								
1	2373.600	40.2	54.0	13.8	28.6	34.8	4.6	V
2	2390	37.8	54.0	16.2	28.7	34.8	4.6	V
3 F	2410.920	90.1	54.0	-36.1	28.8	34.9	4.6	V



Report No.: SZEM141100662801

Page: 93 of 106



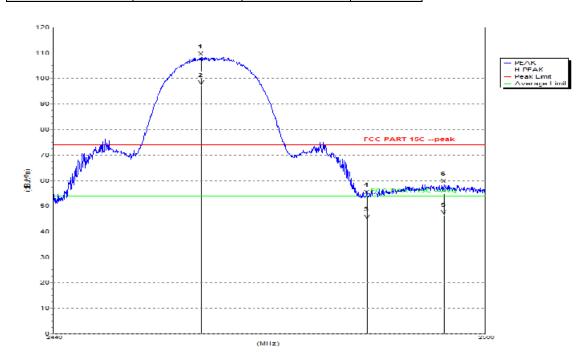


Mk.	Freq.	Level	Limit	Margin	Ant.F.	Amp.G.	Cbl.L.	Pol.
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dB/m)	(dB)	(dB)	
Peak:								
1 F	2460.460	108.4	74.0	-34.4	29.2	35.0	4.6	Н
2	2483.500	54.3	74.0	19.7	29.3	35.0	4.5	Н
3	2494.180	58.6	74.0	15.4	29.4	35.0	4.5	Н
Avg								
1 F	2460.460	97.2	54.0	-43.2	29.2	35.0	4.6	Н
2	2483.500	44.6	54.0	9.4	29.3	35.0	4.5	Н
3	2494.180	46.3	54.0	7.7	29.4	35.0	4.5	Н



Report No.: SZEM141100662801

Page: 94 of 106

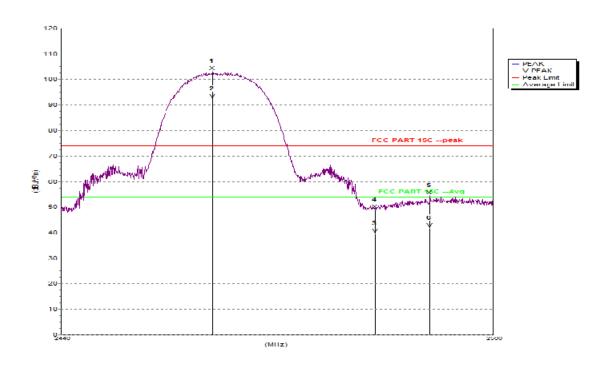


Mk.	Freq.	Level	Limit	Margin	Ant.F.	Amp.G.	Cbl.L.	Pol.
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dB/m)	(dB)	(dB)	
Peak:								
1 F	2460.940	103.1	74.0	-29.1	29.2	35.0	4.6	V
2	2483.500	48.9	74.0	25.1	29.3	35.0	4.5	V
3	2491.120	54.4	74.0	19.6	29.4	35.0	4.5	V
Avg								
1 F	2460.940	92.3	54.0	-38.3	29.2	35.0	4.6	V
2	2483.500	39.6	54.0	14.4	29.3	35.0	4.5	V
3	2491.120	41.8	54.0	12.2	29.4	35.0	4.5	V



Report No.: SZEM141100662801

Page: 95 of 106

Worse case mode: 802.11g Test channel: Lowest

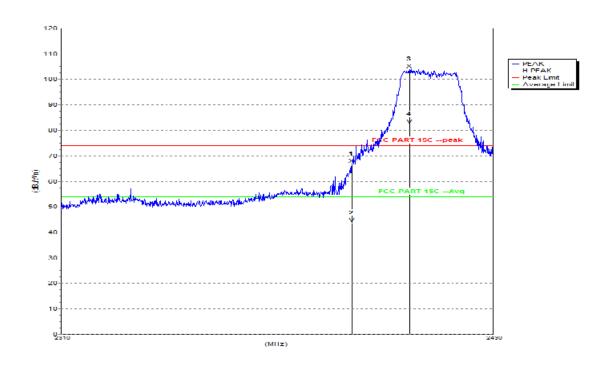


Mk.	Freq.	Level	Limit	Margin	Ant.F.	Amp.G.	Cbl.L.	Pol.
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dB/m)	(dB)	(dB)	
Peak:								
1	2390	66.9	74.0	7.1	28.7	34.8	4.6	Н
2 F	2406.360	103.9	74.0	-29.9	28.8	34.9	4.6	Н
Avg								
1	2390	43.6	54.0	10.4	28.7	34.8	4.6	Н
2 F	2406.360	82.4	54.0	-28.4	28.8	34.9	4.6	Н



Report No.: SZEM141100662801

Page: 96 of 106

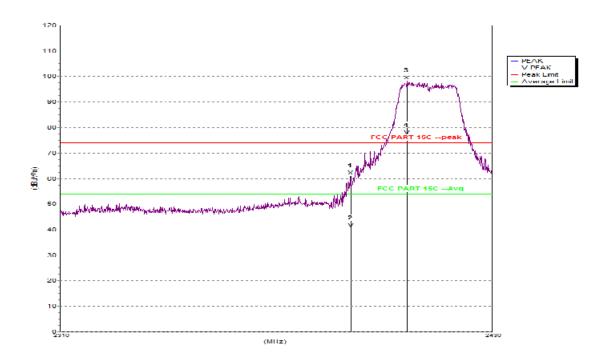


Mk.	Freq.	Level	Limit	Margin	Ant.F.	Amp.G.	Cbl.L.	Pol.
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dB/m)	(dB)	(dB)	
Peak:								
1	2390	61.0	74.0	13.0	28.7	34.8	4.6	V
2 F	2406.000	98.3	74.0	-24.3	28.8	34.9	4.6	V
Avg								
1	2390	40.5	54.0	13.5	28.7	34.8	4.6	V
2 F	2406.000	77.0	54.0	-23.0	28.8	34.9	4.6	V



Report No.: SZEM141100662801

Page: 97 of 106

Worse case mode: 802.11g Test channel: Highest

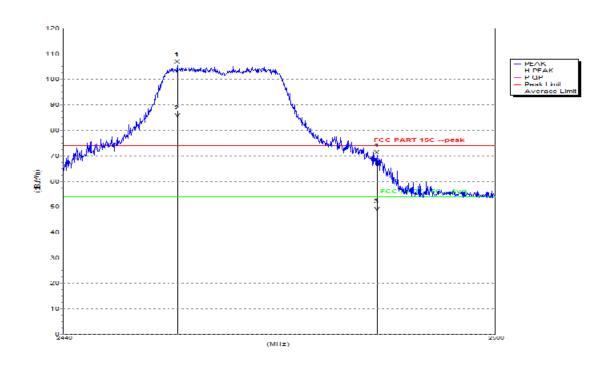


Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak:								
1 F	2455.840	105.7	74.0	-31.7	29.1	35.0	4.6	Н
2	2483.500	70.2	74.0	3.8	29.3	35.0	4.5	Н
Avg								
1 F	2455.840	84.8	54.0	-30.8	29.1	35.0	4.6	Н
2	2483.500	48.1	54.0	5.9	29.3	35.0	4.5	Н



Report No.: SZEM141100662801

Page: 98 of 106

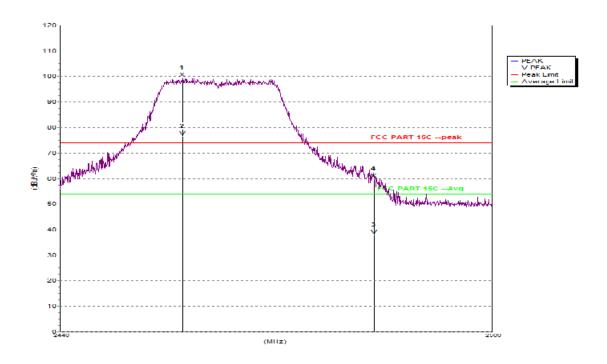


Mk.	Freq.	Level	Limit	Margin	Ant.F.	Amp.G.	Cbl.L.	Pol.
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dB/m)	(dB)	(dB)	
Peak:								
1 F	2456.920	99.5	74.0	-25.5	29.1	35.0	4.6	V
2	2483.500	60.0	74.0	14.0	29.3	35.0	4.5	V
Avg								
1 F	2456.920	76.5	54.0	-22.5	29.1	35.0	4.6	V
2	2483.500	37.9	54.0	16.1	29.3	35.0	4.5	V



Report No.: SZEM141100662801

Page: 99 of 106

Worse case mode: 802.11n(HT20) Test channel: Lowest

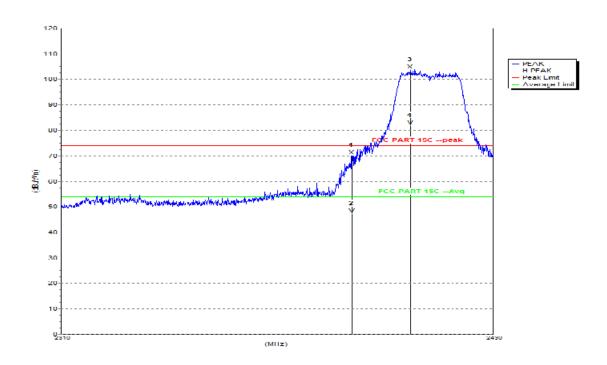


Mk.	Freq.	Level	Limit	Margin	Ant.F.	Amp.G.	Cbl.L.	Pol.
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dB/m)	(dB)	(dB)	
Peak:								
1	2390	70.2	74.0	3.8	28.7	34.8	4.6	Н
2 F	2406.480	103.7	74.0	-29.7	28.8	34.9	4.6	Н
Avg								
1	2390	47.3	54.0	6.7	28.7	34.8	4.6	Н
2 F	2406.480	82.0	54.0	-28.0	28.8	34.9	4.6	Н



Report No.: SZEM141100662801

Page: 100 of 106

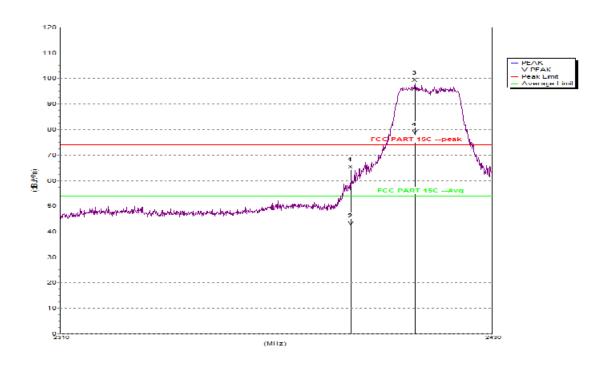


Mk.	Freq.	Level	Limit	Margin	Ant.F.	Amp.G.	Cbl.L.	Pol.
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dB/m)	(dB)	(dB)	
Peak:								
1	2390	64.1	74.0	9.9	28.7	34.8	4.6	V
2 F	2408.160	98.1	74.0	-24.1	28.8	34.9	4.6	V
Avg								
1	2390	42.2	54.0	11.8	28.7	34.8	4.6	V
2 F	2408.160	77.8	54.0	-23.8	28.8	34.9	4.6	V



Report No.: SZEM141100662801

Page: 101 of 106

Worse case mode: 802.11n(HT20) Test channel: Highest

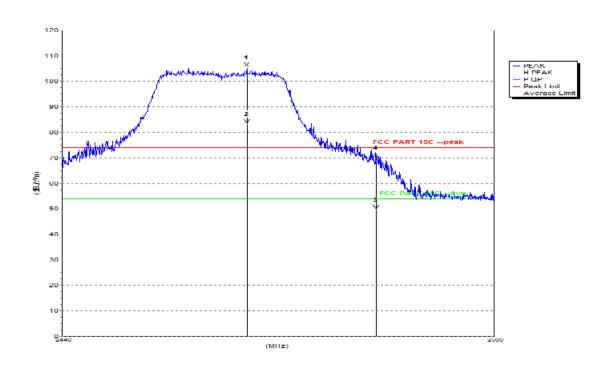


Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak:								
1 F	2465.500	105.4	74.0	-31.4	29.2	35.0	4.6	Н
2	2483.500	69.8	74.0	4.2	29.3	35.0	4.5	Н
Avg								
1 F	2465.500	83.0	54.0	-29.0	29.2	35.0	4.6	Н
2	2483.500	49.5	54.0	4.5	29.3	35.0	4.5	Н





Report No.: SZEM141100662801

Page: 102 of 106

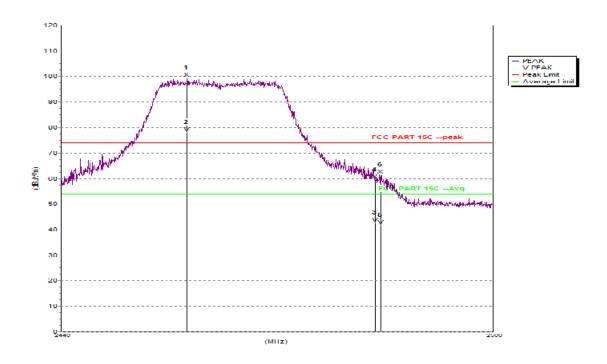


Mk.	Freq.	Level	Limit	Margin	Ant.F.	Amp.G.	Cbl.L.	Pol.
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dB/m)	(dB)	(dB)	
Peak:								
1 F	2457.400	99.5	74.0	-25.5	29.1	35.0	4.6	V
2	2483.500	59.5	74.0	14.5	29.3	35.0	4.5	V
3	2484.340	61.5	74.0	12.5	29.3	35.0	4.5	V
Avg								
1 F	2457.400	78.1	54.0	-24.1	29.1	35.0	4.6	V
2	2483.500	42.7	54.0	11.3	29.3	35.0	4.5	V
3	2484.340	41.8	54.0	12.2	29.3	35.0	4.5	V



Report No.: SZEM141100662801

Page: 103 of 106

Worse case mode: 802.11n(HT40) Test channel: Lowest

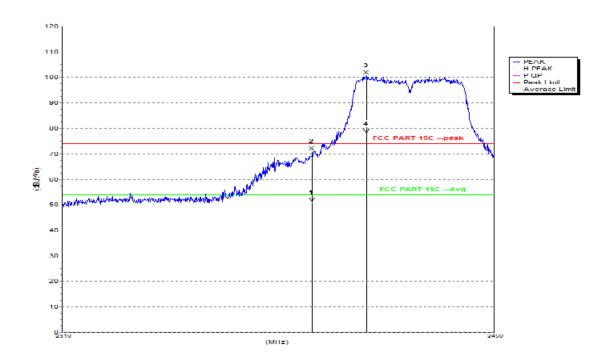


Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak:								
1	2390	71.0	74.0	3.0	28.7	34.8	4.6	Н
2 F	2407.860	100.6	74.0	-26.6	28.8	34.9	4.6	Н
Avg								
1	2390	50.8	54.0	3.2	28.7	34.8	4.6	Н
2 F	2407.860	77.6	54.0	-23.6	28.8	34.9	4.6	Н



Report No.: SZEM141100662801

Page: 104 of 106

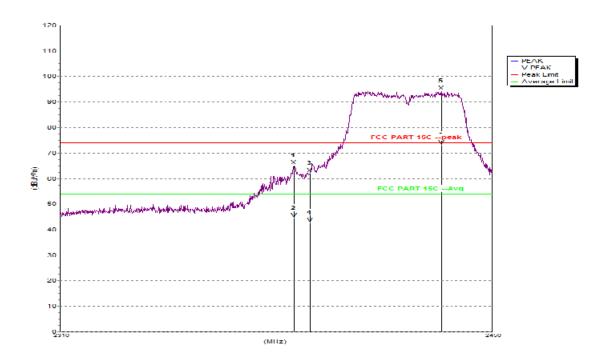


Mk.	Freq.	Level	Limit	Margin	Ant.F.	Amp.G.	Cbl.L.	Pol.
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dB/m)	(dB)	(dB)	
Peak:								
1	2384.900	65.1	74.0	8.9	28.7	34.8	4.6	V
2	2390	62.0	74.0	12.0	28.7	34.8	4.6	V
3 F	2433.200	94.3	74.0	-20.3	29.0	34.9	4.6	V
Avg								
1	2384.900	44.4	54.0	9.6	28.7	34.8	4.6	V
2	2390	42.8	54.0	11.2	28.7	34.8	4.6	V
3 F	2433.200	73.0	54.0	-19.0	29.0	34.9	4.6	V



Report No.: SZEM141100662801

Page: 105 of 106

Worse case mode: 802.11n(HT40) Test channel: Highest

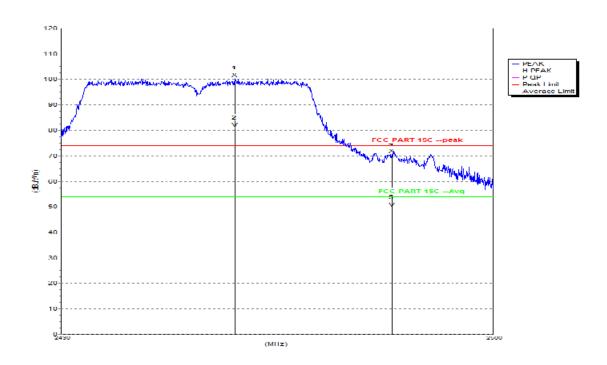


Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Pol.
Peak:								
1 F	2457.930	100.5	74.0	-26.5	29.1	35.0	4.6	Н
2	2483.500	70.8	74.0	3.2	29.3	35.0	4.5	Н
Avg								
1 F	2457.930	80.9	54.0	-26.9	29.1	35.0	4.6	Н
2	2483.500	49.7	54.0	4.3	29.3	35.0	4.5	Н



Report No.: SZEM141100662801

Page: 106 of 106

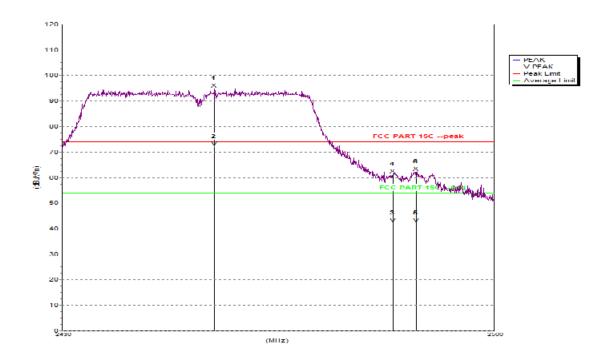

Mk.	Freq.	Level	Limit	Margin	Ant.F.	Amp.G.	Cbl.L.	Pol.
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dB/m)	(dB)	(dB)	
Peak:								
1 F	2454.500	94.9	74.0	-20.9	29.1	34.9	4.6	V
2	2483.500	61.2	74.0	12.8	29.3	35.0	4.5	V
3	2487.190	62.3	74.0	11.7	29.4	35.0	4.5	V
Avg								
1 F	2454.500	72.0	54.0	-18.0	29.1	34.9	4.6	V
2	2483.500	42.2	54.0	11.8	29.3	35.0	4.5	V
3	2487.190	42.2	54.0	11.8	29.4	35.0	4.5	V

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor