



FCC PART 90

TEST REPORT

For

Encom Wireless Data Solutions Inc.

#7, 640 42nd Avenue N.E. Calgary, Alberta, T2E 7J9 Canada

FCC ID: PLQENC11AC49

Report Type: Original Report	Product Type: ENC-11AC49
Test Engineer:	Stone Zhang <i>Stone Zhang</i>
Report Number:	RKSA200107001-00A
Report Date:	2020-03-03
Reviewed By:	Oscar Ye <i>Oscar Ye</i> EMC Manager
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS.....	8
TEST EQUIPMENT LIST	9
FCC §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	10
APPLICABLE STANDARD	10
FCC §2.1049 - OCCUPIED BANDWIDTH.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST DATA	12
FCC §2.1046, §90.205(p), §90.1215(a)(1) - POWER OUTPUT	19
APPLICABLE STANDARD	19
TEST PROCEDURE	19
TEST DATA	19
FCC §2.1046, §90.205(p), §90.1215(a)(2) - POWER SPECTRAL DENSITY	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST DATA	21
FCC §90.1215(e) - PEAK EXCURSION	26
APPLICABLE STANDARD	26
TEST PROCEDURE	26
TEST DATA	27
FCC §2.1051, §90.210 (m) - CONDUCTED EMISSION MASK	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST DATA	29
FCC §2.1051, §90.210 (m)(6)(7) - CONDUCTED SPURIOUS EMISSIONS.....	33
APPLICABLE STANDARD	33
TEST PROCEDURE	33
TEST DATA	33
FCC §2.1053, §90.210 (m)(6)(7) - RADIATED SPURIOUS EMISSIONS	46

APPLICABLE STANDARD	46
TEST PROCEDURE	46
TEST DATA	46
FCC §2.1055 - FREQUENCY STABILITY.....	48
APPLICABLE STANDARD	48
TEST PROCEDURE	48
TEST DATA	48

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Encom Wireless Data Solutions Inc.
Test Model	ENC-11AC49
Product Type:	ENC-11AC49
Power Supply:	DC 3.3V
RF Function:	SRD
Operating Band/Frequency:	4940~4990MHz
Channel Number:	7
Channel Separation:	5 MHz
Antenna Type:	OMNI antenna
Maximum Antenna Gain:	2.0dBi

**All measurement and test data in this report was gathered from production sample serial number: 20200107001. (Assigned by the BACL). The EUT supplied by the applicant was received on 2020-01-07.*

Objective

This test report is prepared on behalf of *Encom Wireless Data Solutions Inc.* in accordance with Part 2, and Part 90 of the Federal Communication Commissions rules.

Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s).

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Part90 as well as the following individual parts:

Part 90 – Private Land Mobile Radio Service

Applicable Standards: KDB 971168 D01, ANSI C63.26-2016.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
Radiated emission	30MHz~1GHz	5.91dB
	1GHz~6GHz	4.68dB
	6 GHz ~18 GHz	4.92dB
	18 GHz~40 GHz	5.21dB
Temperature		1.0°C
Humidity		6%

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

In 4940~4990 MHz band, test channel list is as below, EUT was tested with channel 3, 6 and 9.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	4950	7	4970
4	4955	8	4975
5	4960	9	4980
6	4965	/	/

EUT Exercise Software

Pre-scan with all the data rates, and the worst case was performed as below:

RF test tool: Cart.exe

Mode	Data rate	Power Setting	
		Chain 0	Chain 1
20M	MCS 0	12	17
20M	MCS9	12	17

For highest data rate MCS9 only power and OBW were recorded in report, the lowest data rate MCS0 was recorded all test items.

Special Accessories

No special accessory was used.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Wallys	Base plate	DR344-NAS_Ver_MP3A	/
Wallys	POE	GRT-POE15-240100	/
Wallys	Antenna*2	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
RJ45 Cable	1.0	Base plate	POE
Antenna Cable*2	0.3	EUT	Antenna

Block Diagram of Test Setup

For Radiated Emissions(Below 1GHz):

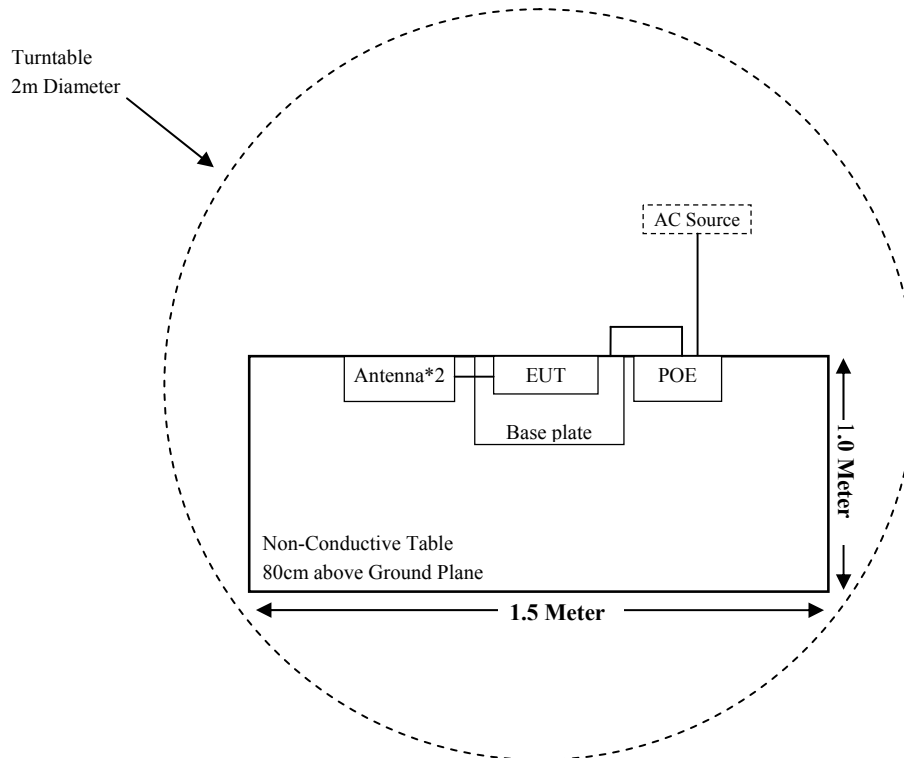

For Radiated Emissions(Above 1GHz):

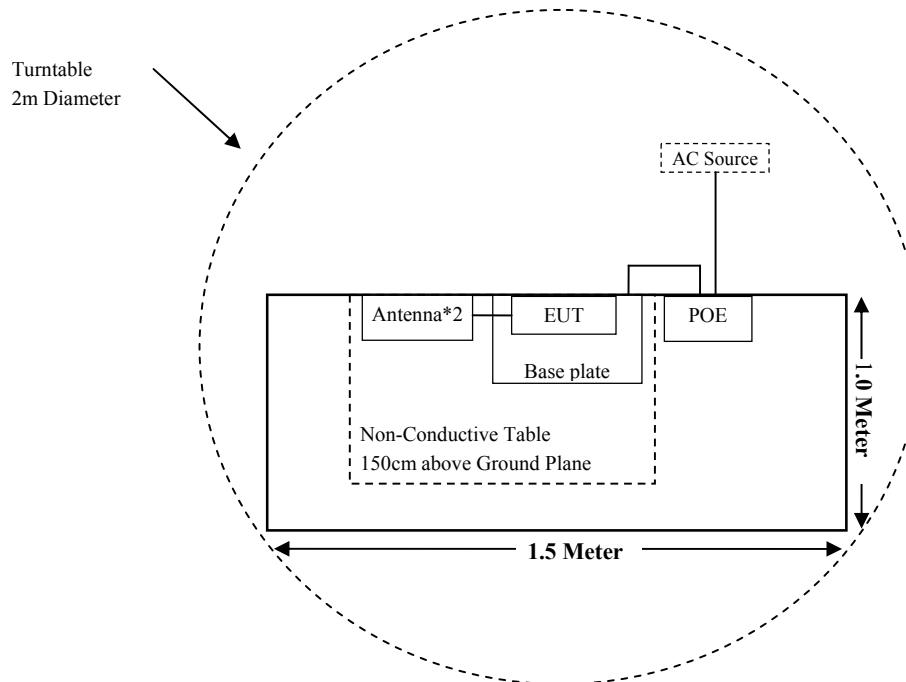

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§1.1307(b), §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§2.1046, § 2.1046, 90.205(p), 90.1215(a)(1)	Power Output	Compliant
§2.1049, 90Y	Occupied Bandwidth	Compliant
§ 90.1215(a)(2)	Power Spectral Density	Compliant
§ 90.1215(e)	Peak Excursion	Compliant
§2.1051, § 90.210(m)	Conducted Spurious Emission at the Antenna Terminals	Compliant
§2.1053, § 90.210(m)	Radiated Spurious Emissions	Compliant
§ 2.1055, § 90.213	Frequency Stability	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2019-11-30	2020-11-29
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2019-12-26	2022-12-25
HP	Signal Generator	HP 8341B	2624A00116	2019-11-30	2020-11-29
Sonoma Instrument	Pre-amplifier	310N	171205	2019-08-14	2020-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2019-08-15	2020-08-14
Radiated Emission Test (Chamber 2#)					
HP	Signal Generator	HP 8341B	2624A00116	2019-11-30	2020-11-29
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2019-05-30	2020-05-29
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2017-07-15	2020-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2019-12-12	2022-12-11
A.H.Systems, inc	Amplifier	2641-1	491	2019-02-20	2020-02-19
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2019-08-15	2020-08-14
RF Conducted Test					
Rohde & Schwarz	EMI Test Receiver	ESIB26	100146	2019-11-30	2020-11-29
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2019-07-23	2020-07-22
Agilent	Power Meter	N1912A	MY5000492	2019-11-18	2020-11-17
Agilent	Power Sensor	N1921A	MY54210024	2019-11-18	2020-11-17
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
Wilson	Attenuator	20dB	020	/	/
BACL	Temperature & Humidity Chamber	BTH-150	30023	2019-12-20	2020-12-20
Encom	RF Cable	Encom C01	C01	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to §2.1091 and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Output Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
20MHz	4950-4980	2.0	1.58	22.50	117.83	20	0.0559	1.0

Note:

The tune-up output power was declared by the manufacturer.

Conclusion: The EUT meets exemption requirement - RF exposure evaluation greater than 20cm distance specified in § 2.1091. If the device built into a host as a portable usage, the additional RF exposure evaluation may be required as specified by § 2.1093.

FCC § 2.1049 - OCCUPIED BANDWIDTH

Applicable Standard

FCC Part 2.1049

Test Procedure

The following procedure shall be used for measuring (99 %) power bandwidth

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) NOTE—Steps a) through c) may require iteration to adjust within the specified tolerances.
- e) Set the detection mode to peak, and the trace mode to max hold..
- f) Use the 99 % power bandwidth function of the spectrum analyzer (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99 % power bandwidth function, the trace data points are to be recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99 % power bandwidth is the difference between these two frequencies.
- h) The OBW shall be reported by providing plot(s) of the measuring instrument display. The frequency and amplitude axes and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Test Data**Environmental Conditions**

Temperature:	22.3 °C~22.5 °C
Relative Humidity:	51 %~53%
ATM Pressure:	101.1 kPa ~101.2 kPa

The testing was performed by Stone Zhang on 2020-01-10 and 2020-03-03.

EUT Operation Mode: Transmitting

Test Result: Compliant.

Data rate:MCS0

Declared Channel Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
			ANT 1	ANT 2
20	Low	4950	17.97	17.97
	Middle	4965	17.97	18.06
	High	4980	17.97	18.06


Data rate:MCS9

Declared Channel Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	
			ANT 1	ANT 2
20	Low	4950	18.036	17.916
	Middle	4965	18.036	18.036
	High	4980	18.036	18.036

Data rate:MCS0


ANT 1

Low Channel

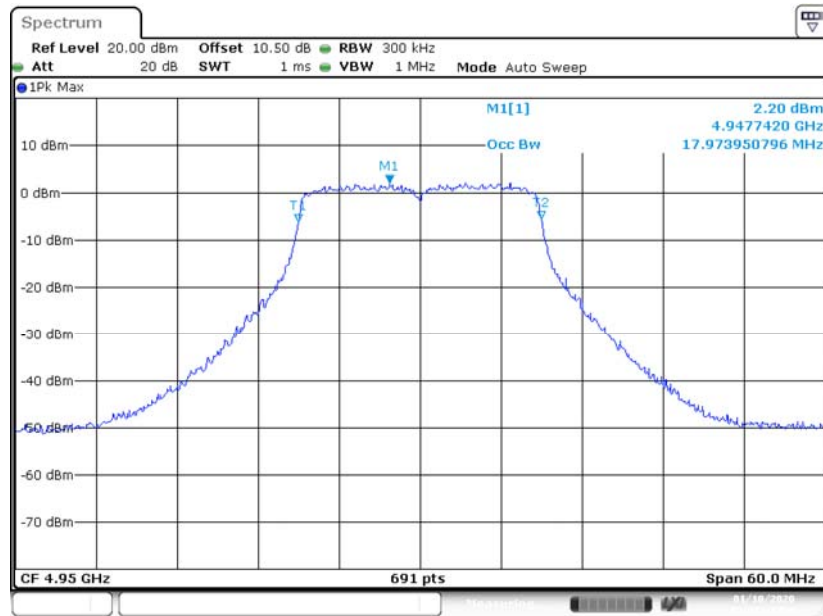


Date: 10. JAN 2020 15:01:41

Middle Channel

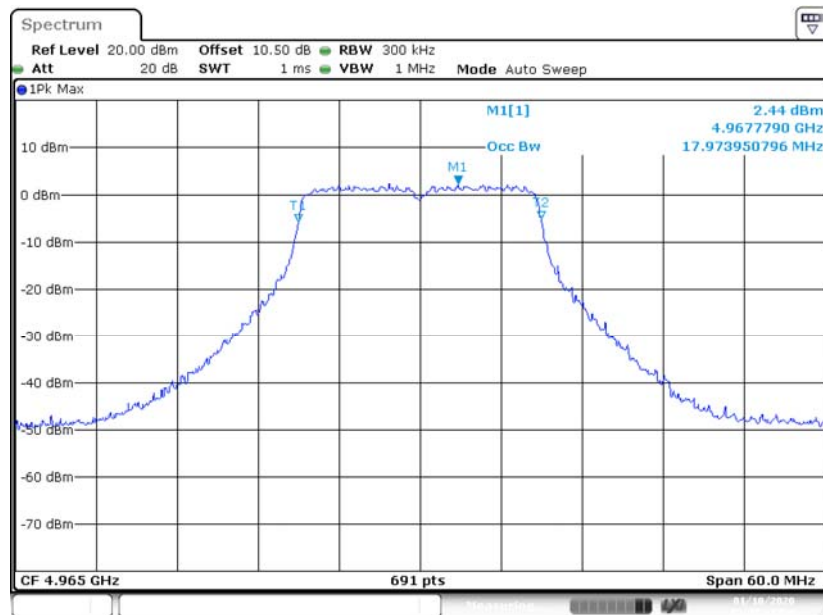


Date: 10. JAN 2020 15:03:37

High Channel

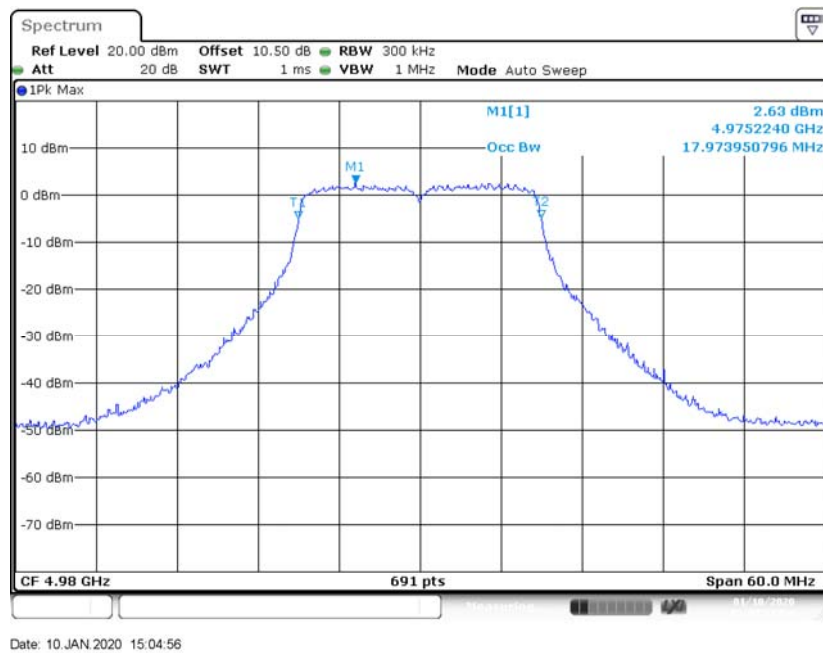

ANT 2

Low Channel

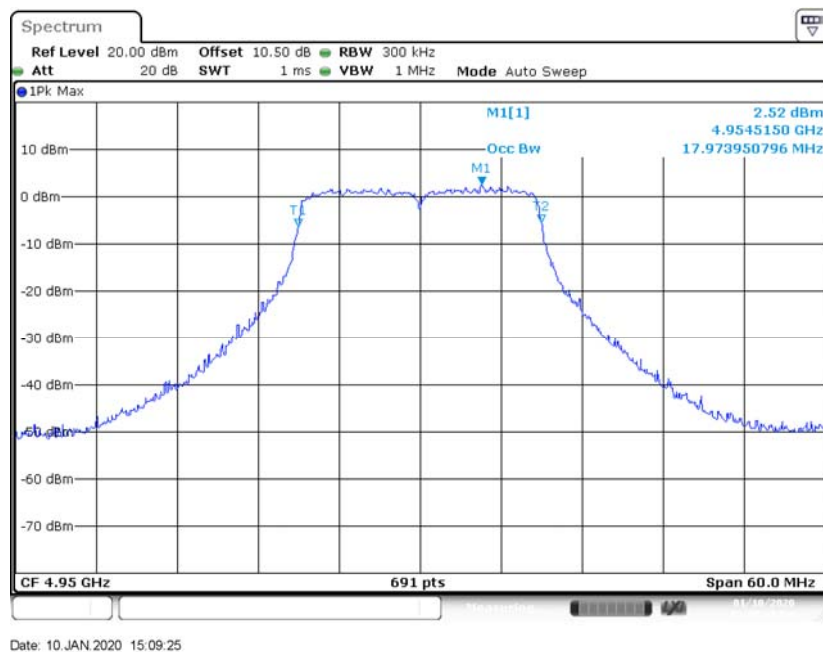

Spectrum

Ref Level 20.00 dBm Offset 10.50 dB RBW 300 kHz
 Att 20 dB SWT 1 ms VBW 1 MHz Mode Auto Sweep

1Pk Max

MI[1] 3.05 dBm
 Occ Bw 4.9601370 GHz
 18.060781476 MHz

CF 4.965 GHz 691 pts Span 60.0 MHz

Spectrum

Ref Level 20.00 dBm Offset 10.50 dB RBW 300 kHz
 Att 20 dB SWT 1 ms VBW 1 MHz Mode Auto Sweep

1Pk Max

M1[1] 3.88 dBm
 4.9827790 GHz
 18.060781476 MHz

Occ Bw

M1


CF 4.98 GHz 691 pts Span 60.0 MHz

Page 15 of 49


Data rate:MCS9

ANT 1


Low Channel

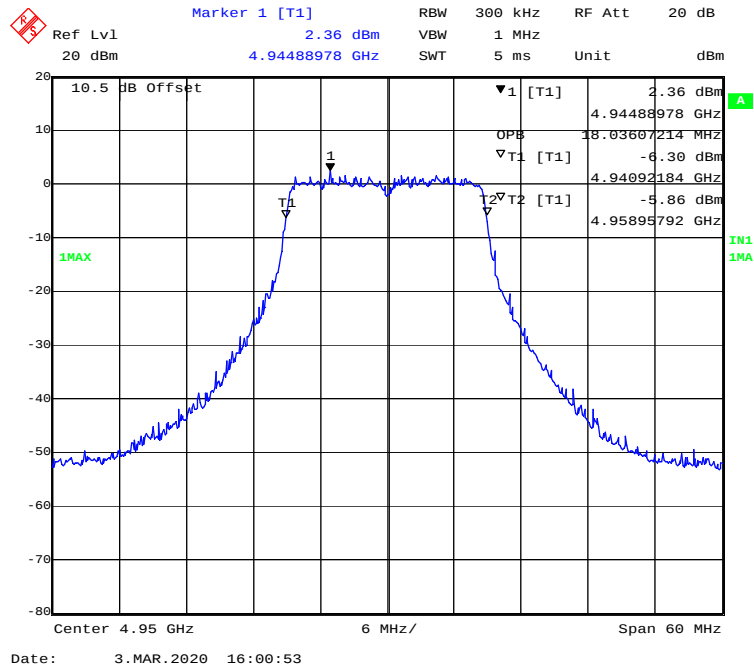

Middle Channel

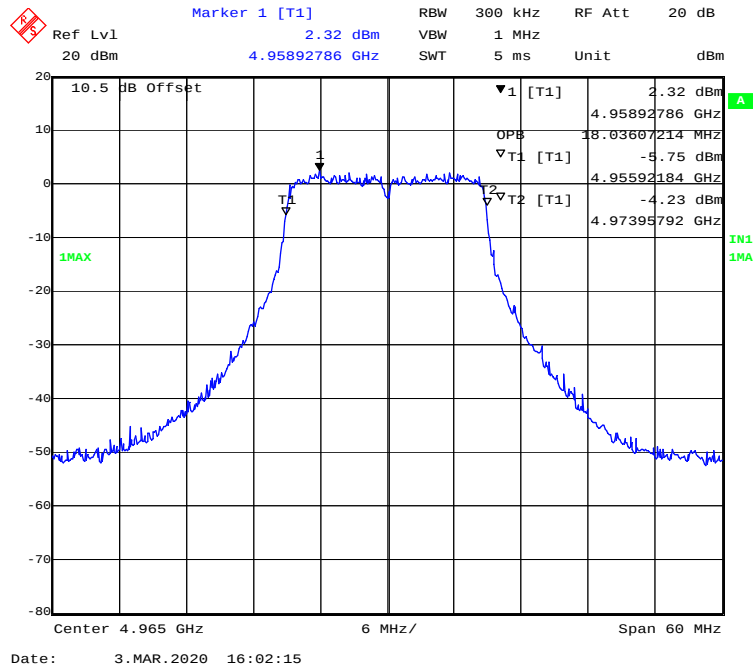


High Channel

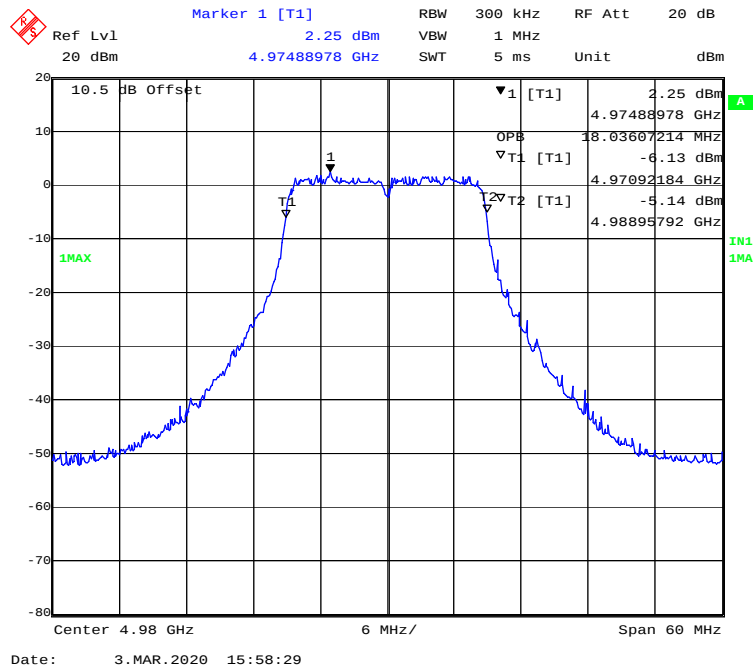


ANT 2


Low Channel

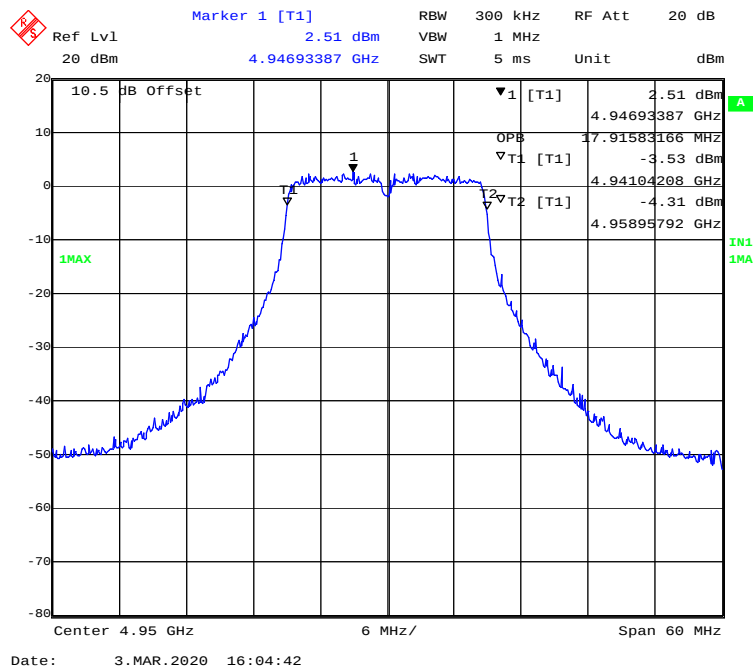

Middle Channel

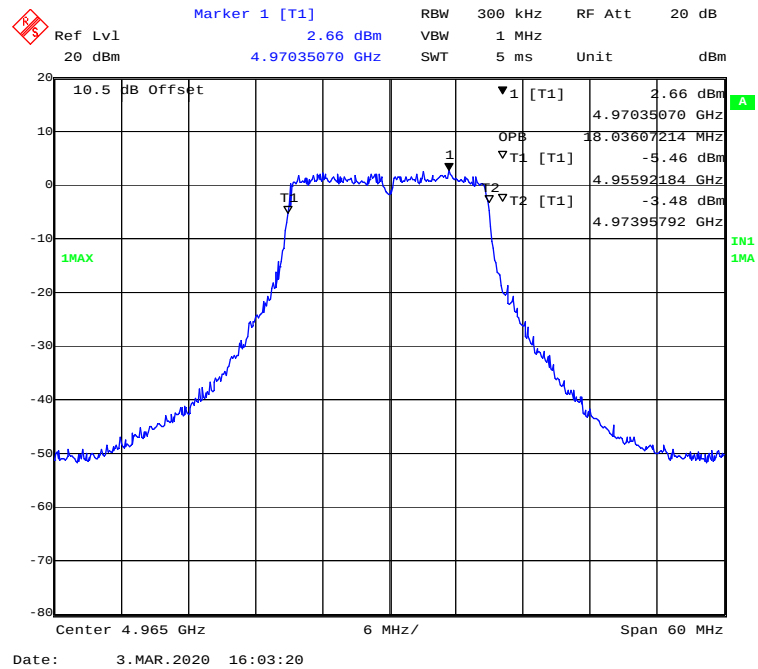

High Channel

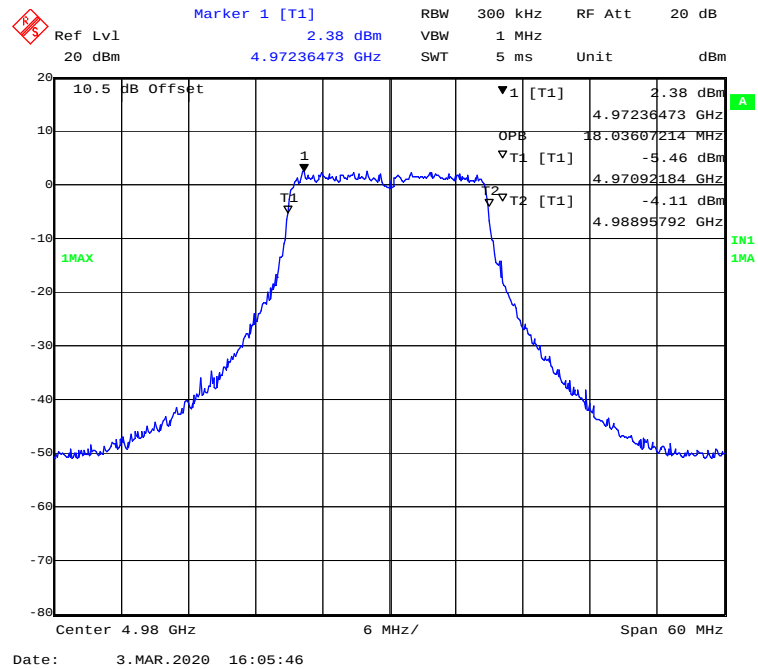

FCC § 2.1046, § 90.205(p), § 90.1215(a)(1) - POWER OUTPUT**Applicable Standard**


FCC Part 2.1046, 90.205(p), & 90.1215(a)(1)

(1) The maximum conducted output power should not exceed 33 dBm

(2) High power devices are also limited to a peak power spectral density of 21 dBm per one MHz. High power devices using channel bandwidths other than those listed above are permitted; however, they are limited to peak power spectral density of 21 dBm/MHz. If transmitting antennas of directional gain greater than 9 dBi are used, both the maximum conducted output power and the peak power spectral density should be reduced by the amount in decibels that the directional gain of the antenna exceeds 9 dBi.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

**Test Data****Environmental Conditions**

Temperature:	22.3 °C~22.5 °C
Relative Humidity:	51 %~53%
ATM Pressure:	101.1 kPa ~101.2 kPa

The testing was performed by Stone Zhang on 2020-01-09 and 2020-03-03.

EUT Operation Mode: Transmitting

Test Result: Compliant.

Data rate:MCS0

Decleared Channel Bandwidth (MHz)	Channel	Frequency (MHz)	Maximum Conducted Output Power (dBm)			Limit (dBm)
			ANT 1	ANT 2	Total	
20	Low	4950	18.60	18.93	21.78	33
	Middle	4965	18.88	19.19	22.05	33
	High	4980	19.00	19.37	22.20	33

Data rate: MCS9

Decleared Channel Bandwidth (MHz)	Channel	Frequency (MHz)	Maximum Conducted Output Power (dBm)			Limit (dBm)
			ANT 1	ANT 2	Total	
20	Low	4950	17.41	17.94	20.69	33
	Middle	4965	17.58	18.25	20.94	33
	High	4980	17.74	18.35	21.07	33

Note:

1: The total output power= $10 * \log_{10}(10^{(ANT\ 1/10)} + 10^{(ANT\ 2/10)})$

2: The antenna gain is 2.0 dBi

FCC § 2.1046 , § 90.205(p), § 90.1215(a)(2) - POWER SPECTRAL DENSITY**Applicable Standard**

FCC Part 2.1046, 90.205(p), & 90.1215(a)(2)

Test Procedure

Procedure for use when EUT can be configured to transmit continuously or when sweep triggering/signal gating can be properly implemented

The EUT is considered to transmit continuously if it can be configured to transmit at a burst duty cycle of greater than or equal to 98% throughout the duration of the measurement. If this condition can be achieved, then the following procedure can be used to measure the average PSD.

This procedure can also be used when the EUT cannot be configured to transmit continuously, provided that the measurement instrument can be configured to trigger a sweep at the beginning of each full-power transmission burst, and the sweep time is less than or equal to the minimum transmission time during each burst (i.e., no burst off-time is to be included in the measurement).

- a) Set the analyzer center frequency to the OBW center frequency.
- b) Set the span to 1.5 times the OBW bandwidth.
- c) Set the RBW to the specified reference bandwidth (often 1 MHz).
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Set the number of points in sweep $\geq$ span / RBW.

Note: This requirement is applicable only to final measurement. It can be violated for preliminary (pre-scan) measurements when necessary for wide span measurements.

- f) Detector = peak.
- g) Sweep time = auto couple.
- h) Trace mode = max hold.
- i) Allow trace to fully stabilize.
- j) Use the peak marker function to determine the maximum amplitude level within the specified reference bandwidth (PSD)

Test Data**Environmental Conditions**

Temperature:	22.3 °C
Relative Humidity:	51 %
ATM Pressure:	101.2 kPa

The testing was performed by Stone Zhang on 2020-01-09.

EUT Operation Mode: Transmitting

Test Result: Compliant.

MCS0

Decleared Channel Bandwidth (MHz)	Channel	Frequency (MHz)	PSD (dBm/MHz)			Limit (dBm/MHz)
			ANT 1	ANT 2	Total	
20	Low	4950	7.98	8.73	11.38	21
	Middle	4965	7.64	9.27	11.54	21
	High	4980	7.68	9.44	11.66	21


Note:

*1: The total PSD=10*Log10(10[^](ANT 1/10)+10[^](ANT 2/10))*

2: The antenna gain is 2.0 dBi.


ANT 1

Low Channel

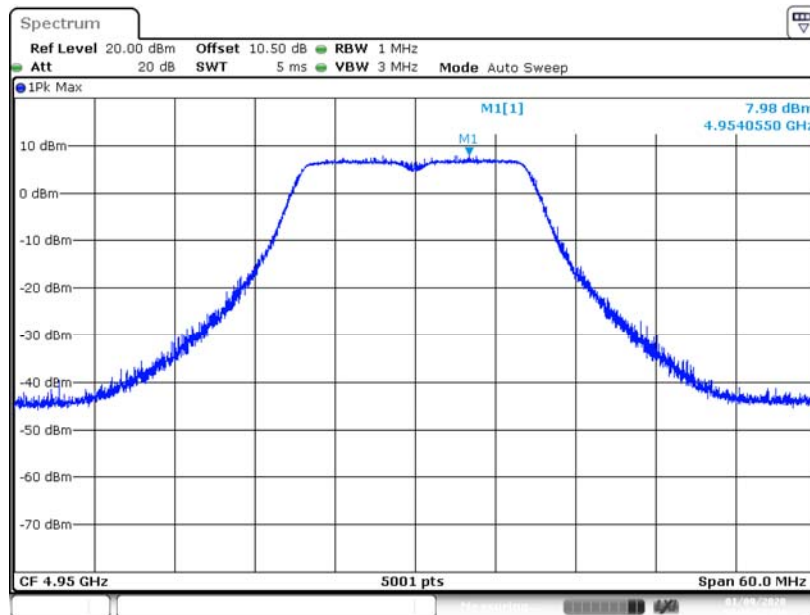


Date: 9 JAN 2020 16:18:10

Middle Channel

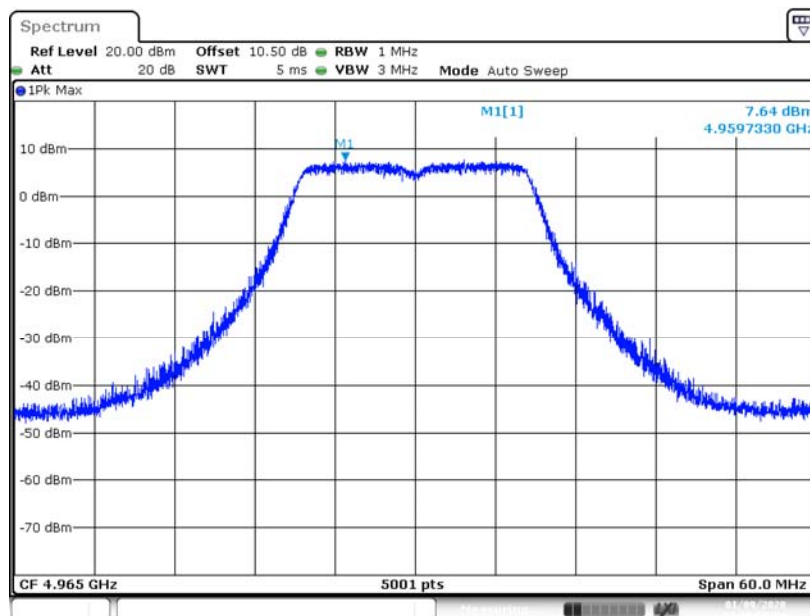


Date: 9 JAN 2020 16:18:58

High Channel

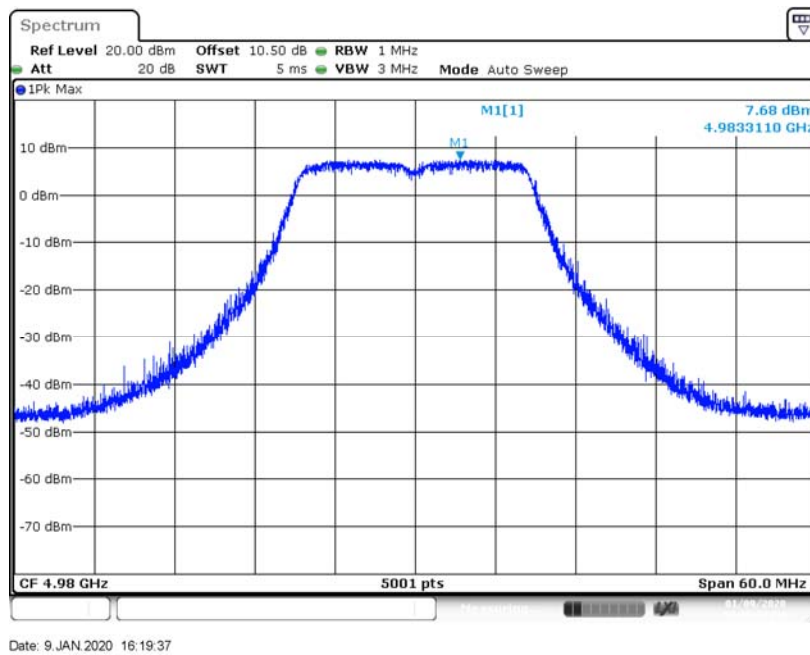


ANT 2


Low Channel

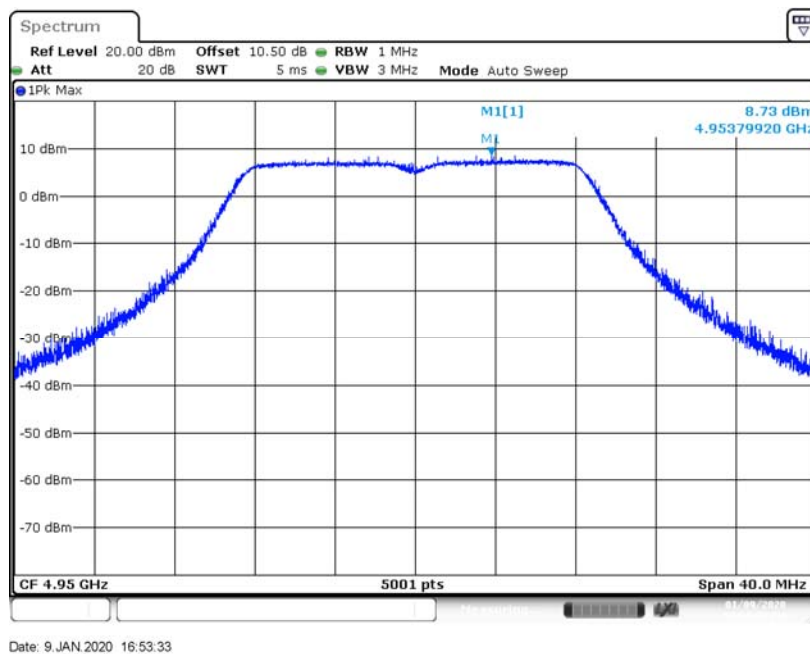

Middle Channel

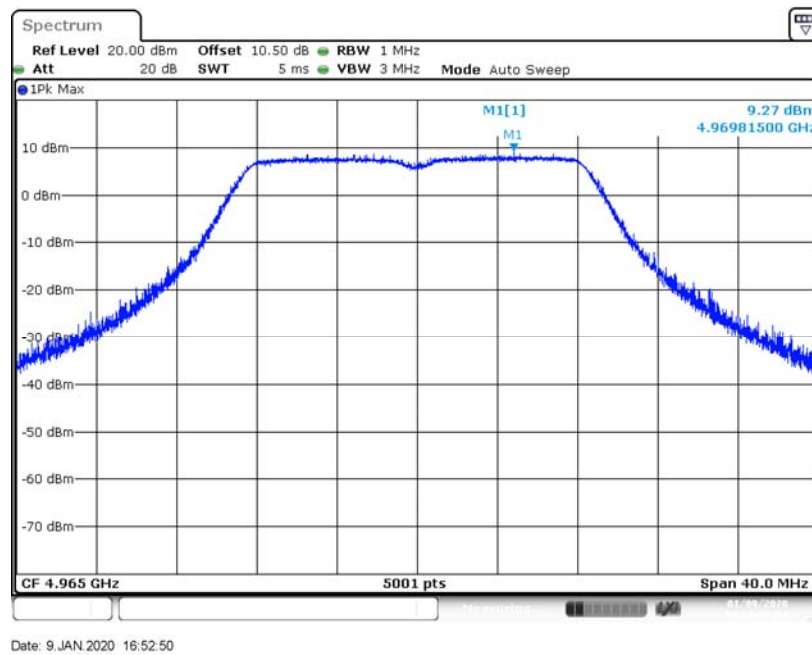

High Channel

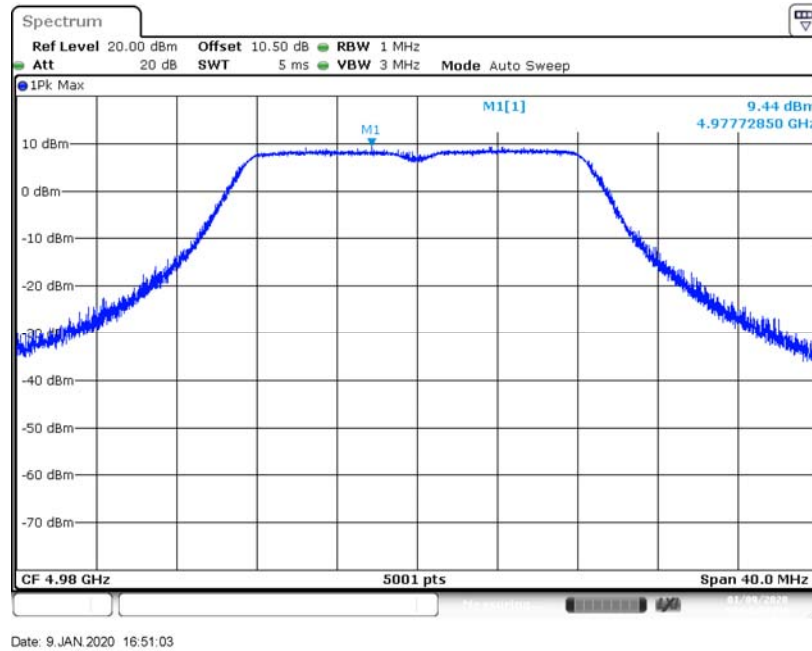

FCC § 90.1215(e) - PEAK EXCURSION

Applicable Standard

FCC Part 90.1215(e)

Test Procedure

The inherent randomness of the power peaks in a noise-like digital signal makes it difficult to quantify the peak power using traditional measurement techniques for determining the peak power of an analog signal. The peak power of a digitally-modulated signal is predictable only on a statistical basis. Thus, for these types of signals, a statistical measurement of the peak power is necessary.

The power complementary cumulative distribution function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. The following guidelines are offered for performing a CCDF measurement.

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval as follows:
 - 1) for continuous transmissions, set to 1 ms,
 - 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- e) Record the maximum PAPR level associated with a probability of 0.1%.

Test Data**Environmental Conditions**

Temperature:	22.3 °C
Relative Humidity:	51 %
ATM Pressure:	101.2 kPa

The testing was performed by Stone Zhang on 2020-01-09.


EUT Operation Mode: Transmitting

Test Result: Compliant.

ANT	Channel Bandwidth (MHz)	Frequency (MHz)	Resolution Bandwidth (MHz)	AQT (ms)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
1	20	4965	1	1	7.77	13	5.23
2	20	4965	1	1	8.32	13	4.68


ANT 1

Middle Channel

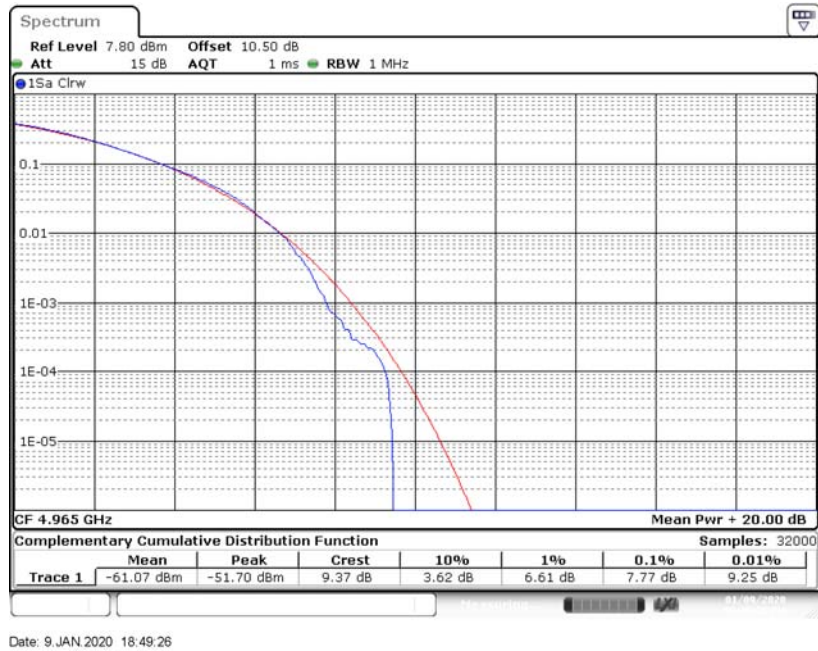

ANT 2

Middle Channel

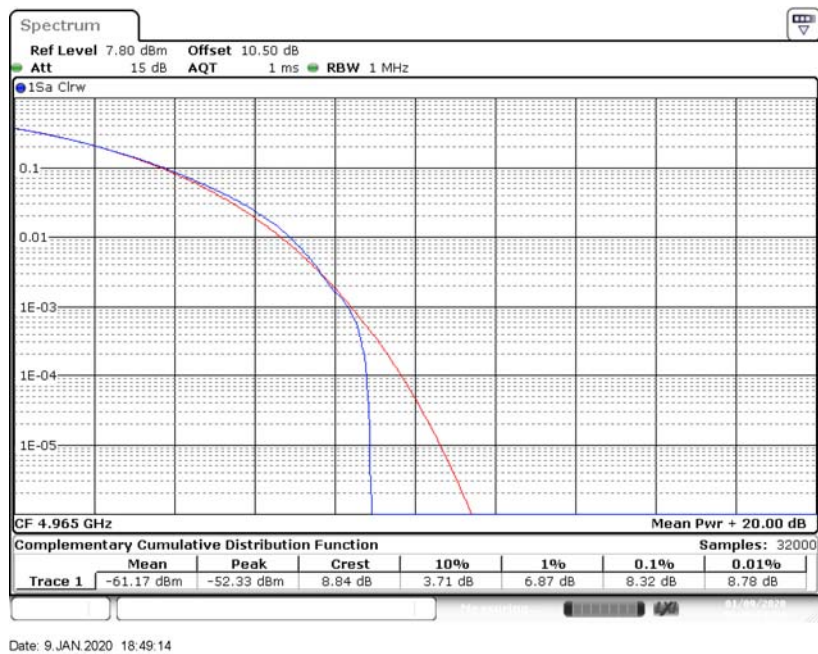

FCC § 2.1051, § 90.210 (m) - CONDUCTED EMISSION MASK**Applicable Standard**

FCC Part 2.1051, 90.210 (m)

High power transmitters (greater than 20 dBm) operating in the 4940-4990 MHz frequency band, the power spectral density of the emissions must be attenuated below the output power of the transmitter as follows:

(1) On any frequency removed from the assigned frequency between 0-45% of the authorized bandwidth (BW): 0 dB.

(2) On any frequency removed from the assigned frequency between 45-50% of the authorized bandwidth: $56.8 \log (\% \text{ of BW}/45)$ dB.

(3) On any frequency removed from the assigned frequency between 50-55% of the authorized bandwidth: $26 + 14.5 \log (\% \text{ of BW}/50)$ dB.

(4) On any frequency removed from the assigned frequency between 55-100% of the authorized bandwidth: $32 + 3.1 \log (\% \text{ of BW}/55)$ dB.

(5) On any frequency removed from the assigned frequency between 100-150% of the authorized bandwidth: $40 + 5.7 \log (\% \text{ of BW}/100)$ dB.

(6) On any frequency removed from the assigned frequency between above 150% of the authorized bandwidth: 50 dB or $55 + 10 \log (P)$ dB, whichever is the lesser attenuation.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The zero dB reference is measured relative to the highest average power of the fundamental emission. Emission levels are also based on the use of measurement instrumentation employing a resolution bandwidth of at least one percent of the occupied bandwidth.

Test Data**Environmental Conditions**

Temperature:	22.3 °C
Relative Humidity:	51 %
ATM Pressure:	101.2 kPa


The testing was performed by Stone Zhang on 2020-01-09.

EUT Operation Mode: Transmitting


Test Result: Compliant.

ANT 1


Low Channel

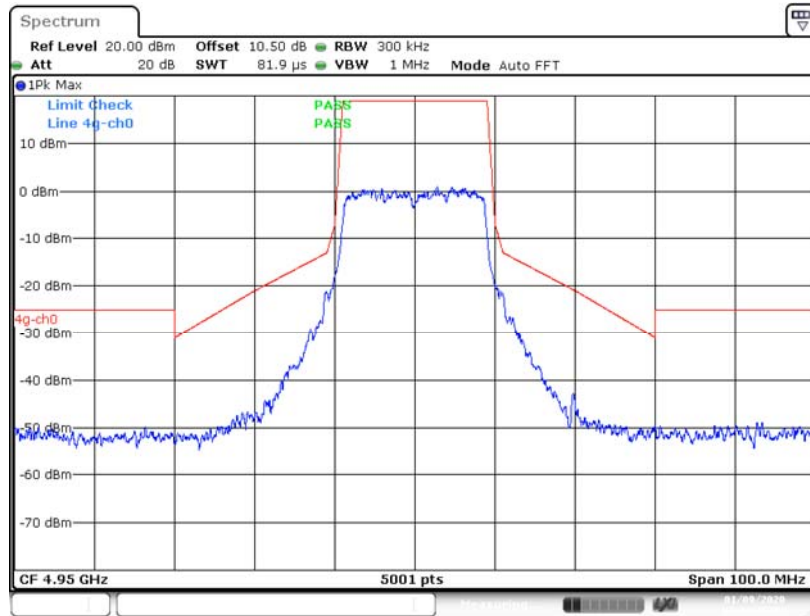

Middle Channel

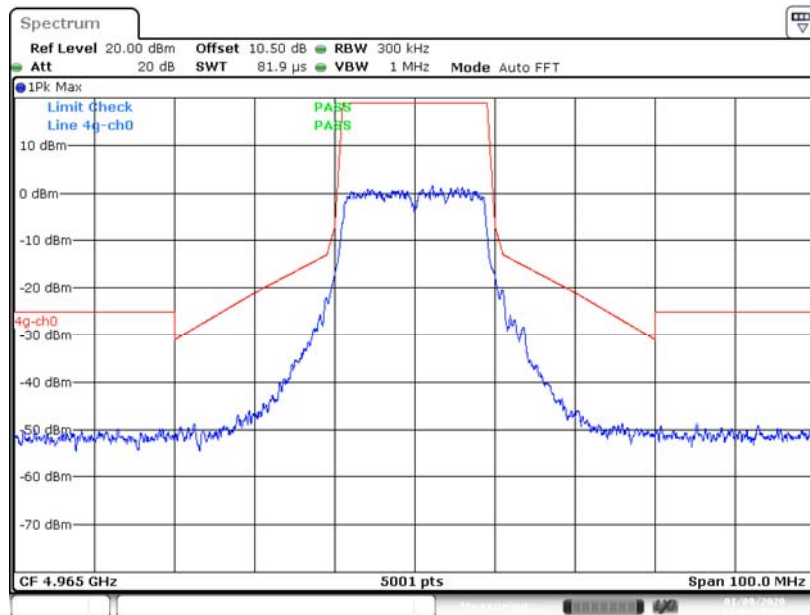


High Channel

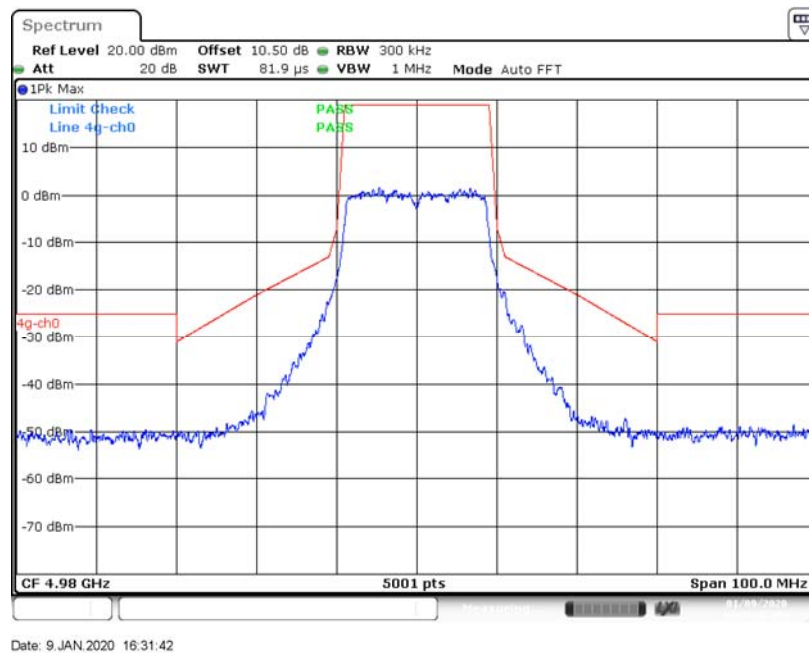


ANT 2

Low Channel

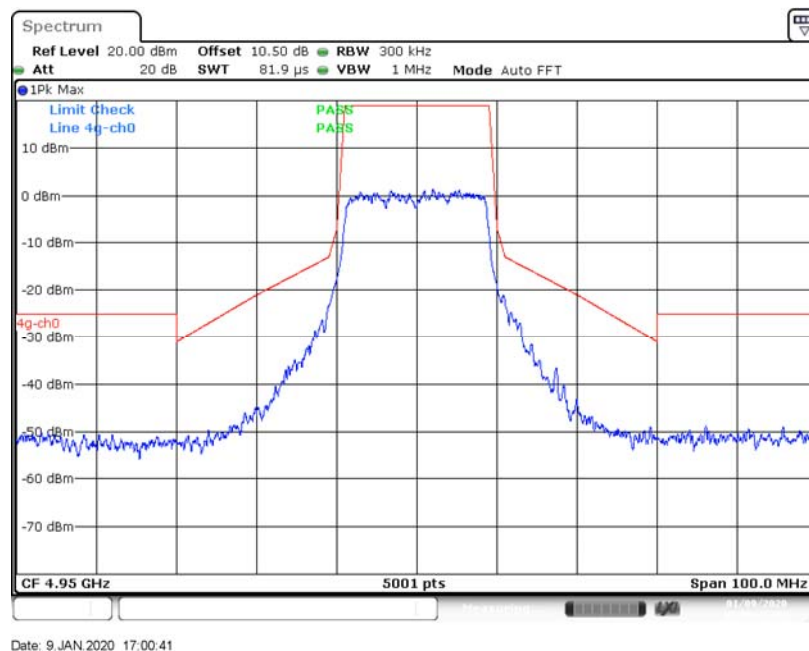


Middle Channel

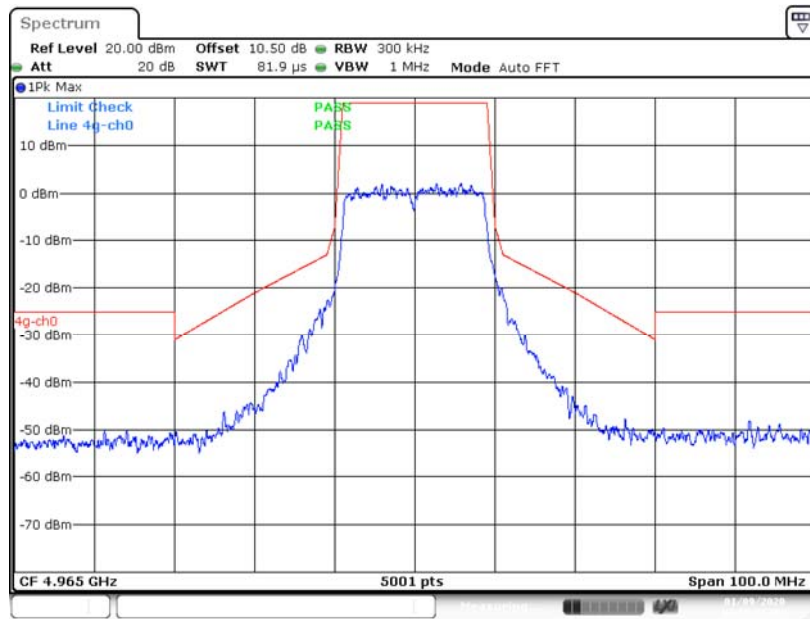

Date: 9 JAN 2020 16:59:52

High Channel

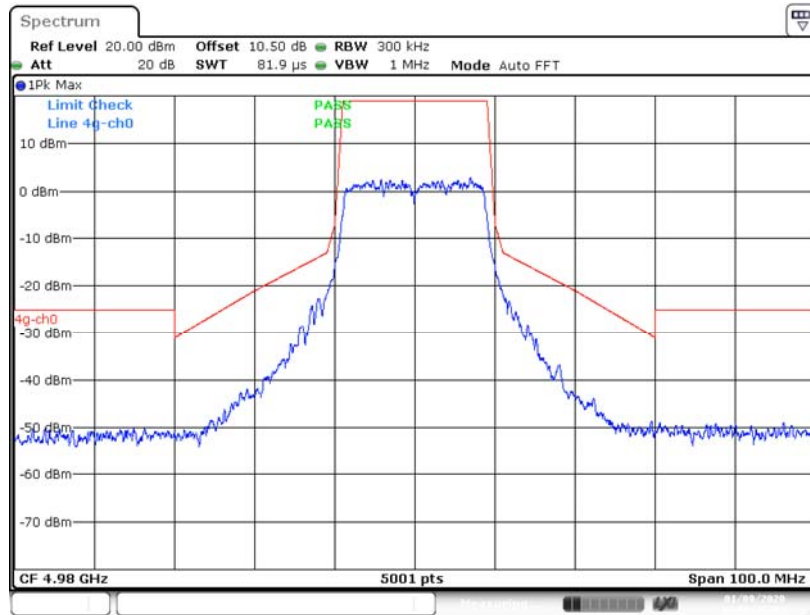

Date: 9 JAN 2020 16:58:42

FCC § 2.1051, § 90.210 (m)(6)(7) - CONDUCTED SPURIOUS EMISSIONS**Applicable Standard**

FCC Part 2.1051, 90.210 (m)(6)(7)

Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1kHz for 9kHz to 150kHz, 10kHz for 150kHz to 30MHz, 100kHz for 30MHz to 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Test Data**Environmental Conditions**

Temperature:	22.3 °C
Relative Humidity:	51 %
ATM Pressure:	101.2 kPa

The testing was performed by Stone Zhang on 2020-01-17.

EUT Operation Mode: Transmitting

Test Result: Compliant.


For ANT1+2 transmitting simultaneously the worst case as below:

Frequency (GHz)	Reading (dBm)			Limit (dBm)
	ANT 1	ANT 2	Total	
Low channel				
6.6032	-26.71	-33.67	-25.91	-25
10.126	-30.68	-40.13	-30.21	-25
Middle channel				
6.6188	-25.86	-35.08	-25.37	-25
10.048	-30.62	-39.04	-30.04	-25
High channel				
6.6422	-30.07	-36.50	-29.18	-25
10.399	-30.44	-38.02	-29.74	-25

So 2*2 MIMO mode is compliant


ANT 1

Low Channel (9kHz~150kHz)

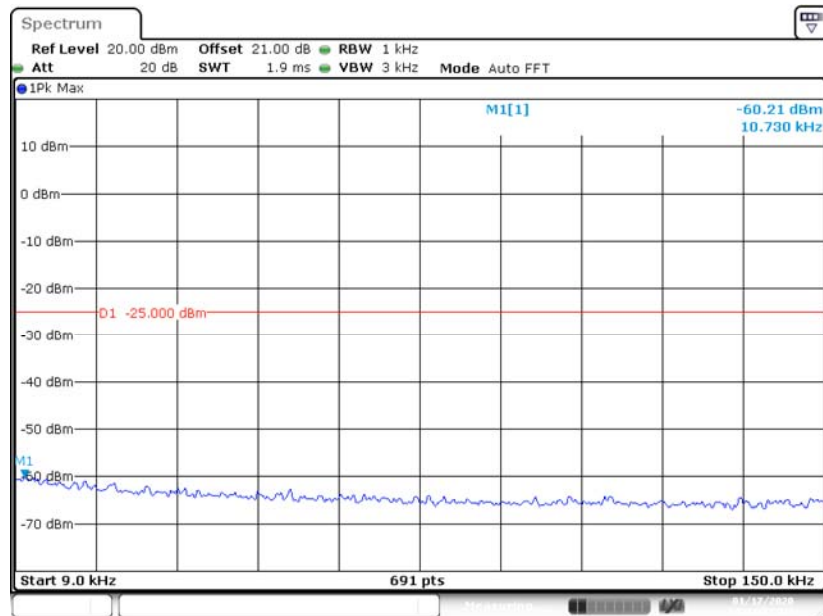


Date: 17.JAN.2020 09:31:01

Low Channel (150kHz~30MHz)

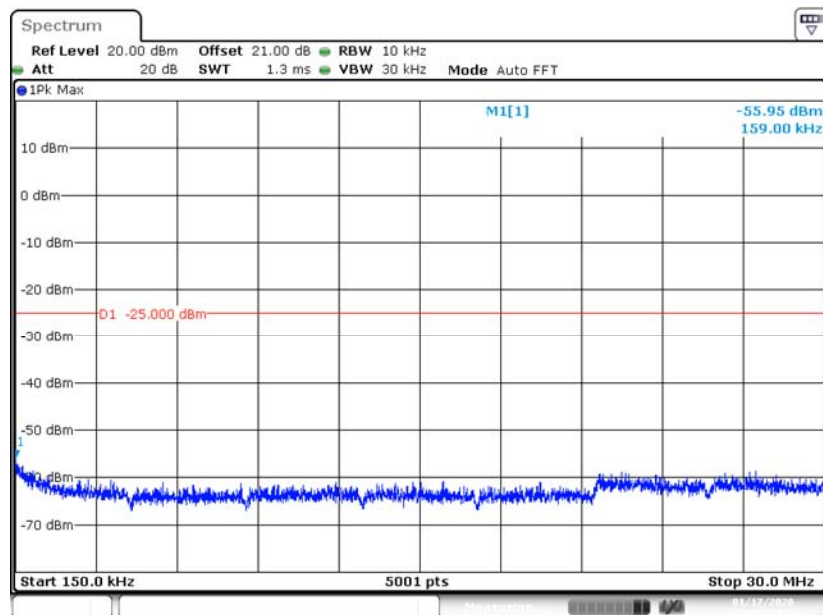


Date: 17.JAN.2020 09:36:32

Low Channel (30MHz~1GHz)

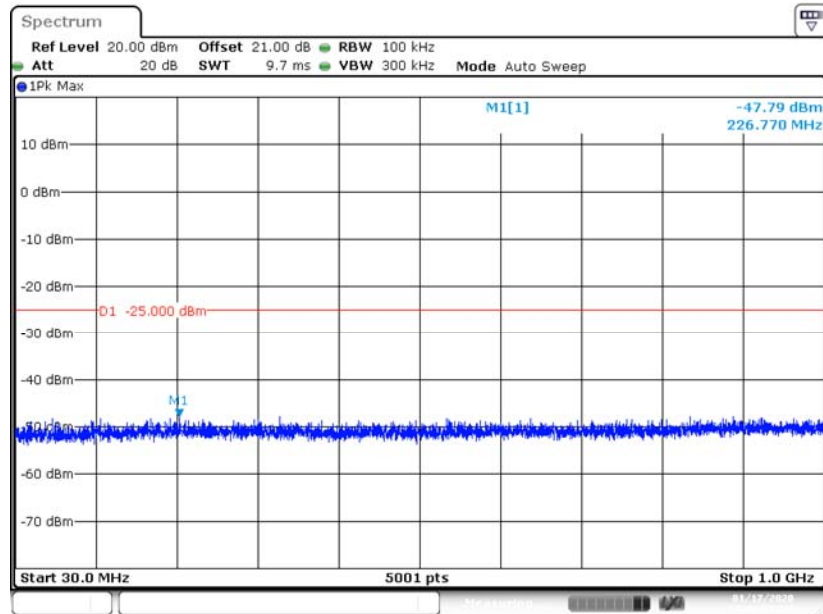

Date: 17.JAN.2020 09:42:58


Low Channel (1GHz~40GHz)

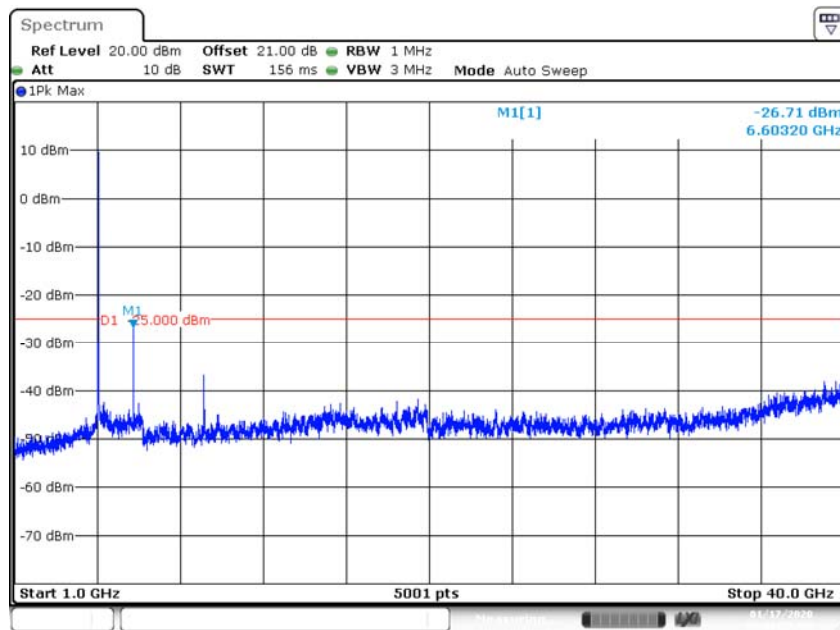

Date: 17.JAN.2020 09:46:53


Fundamental test

Middle Channel (9kHz~150kHz)

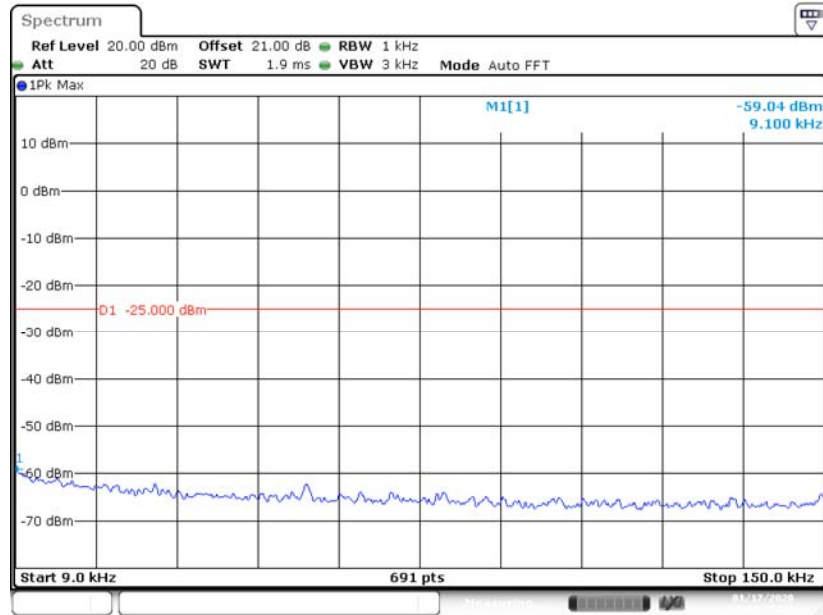


Date: 17 JAN 2020 09:31:46

Middle Channel (150kHz~30MHz)

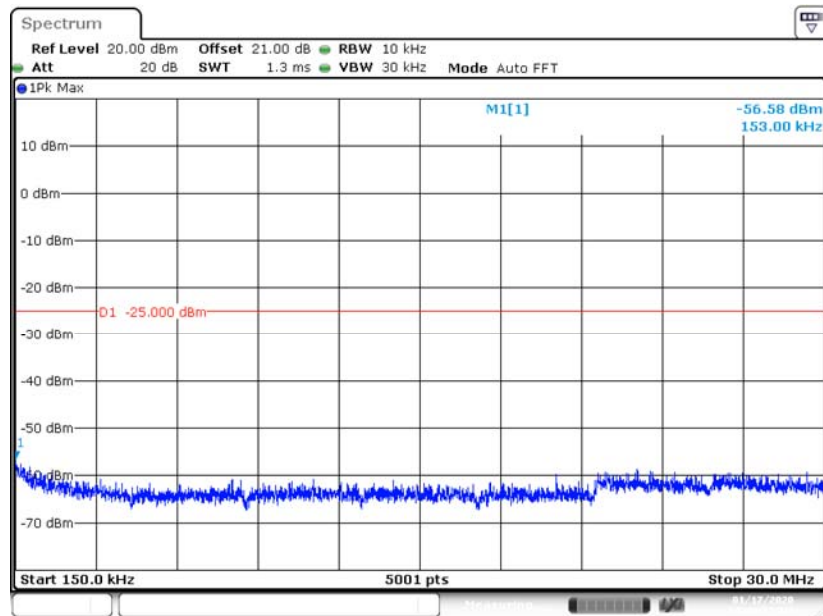


Date: 17 JAN 2020 09:38:34

Middle Channel (30MHz~1GHz)

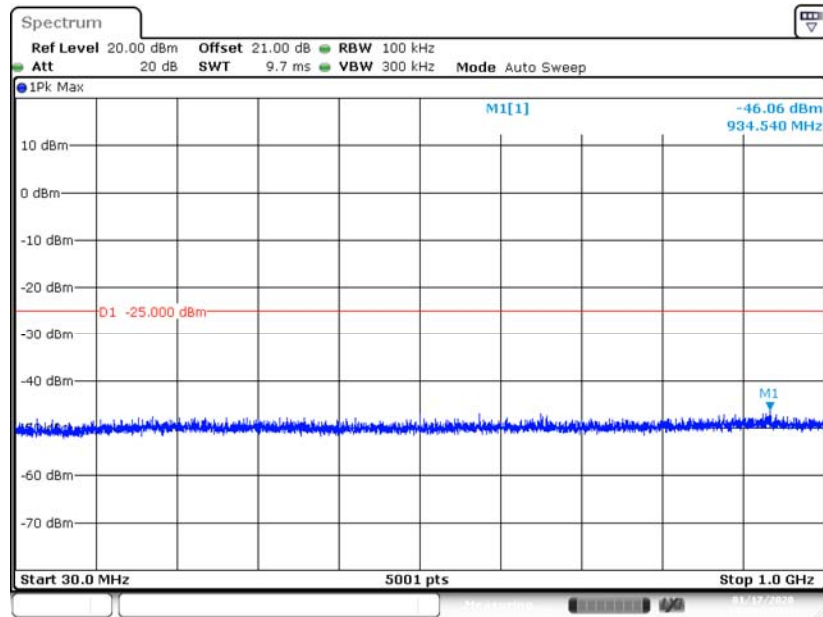

Date: 17 JAN 2020 09:43:20


Middle Channel (1GHz~40GHz)

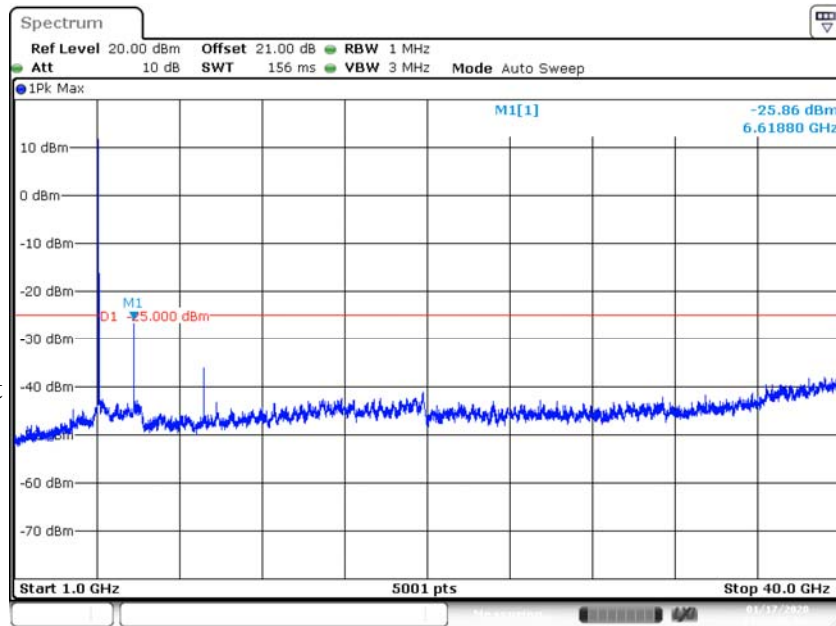

Date: 17 JAN 2020 09:47:56


Fundamental test

High Channel (9kHz~150kHz)

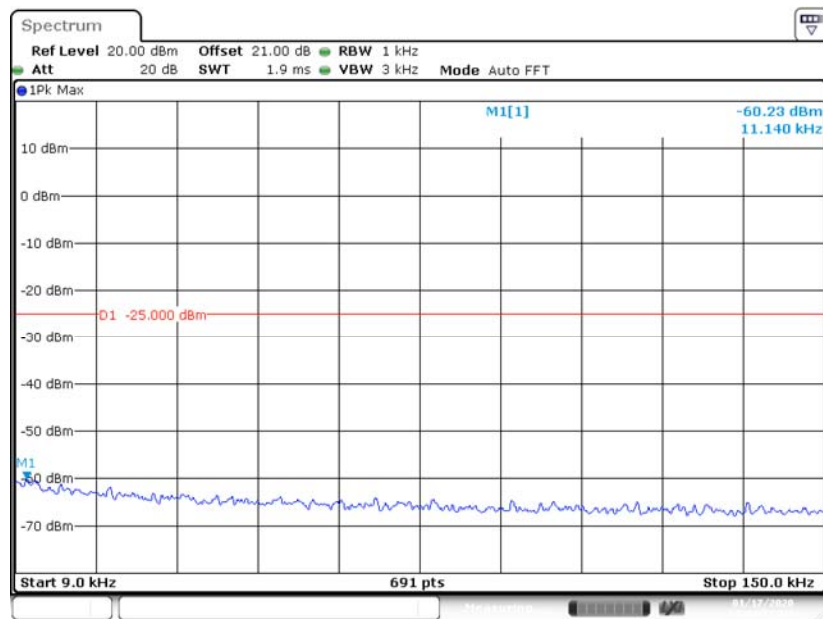


Date: 17 JAN 2020 09:33:38

High Channel (150kHz~30MHz)

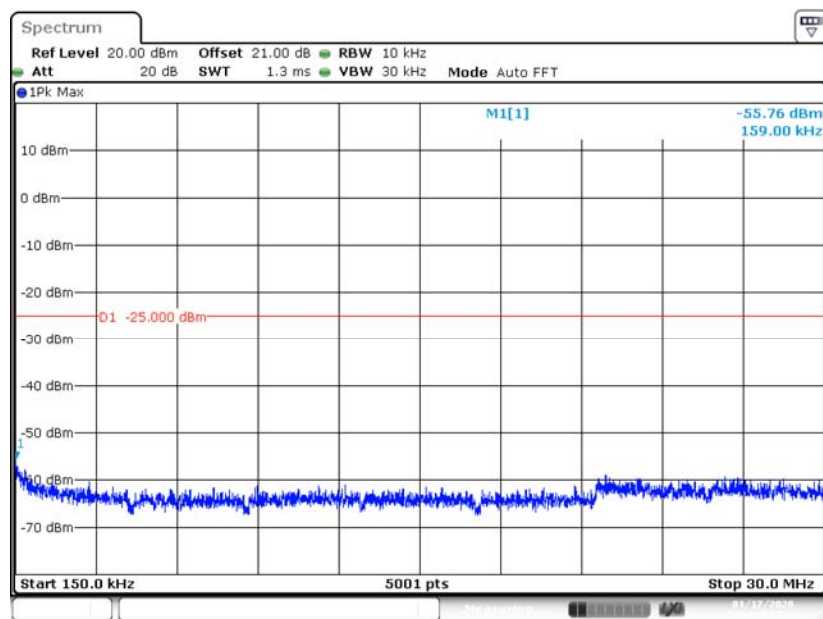


Date: 17 JAN 2020 09:39:02

High Channel (30MHz~1GHz)

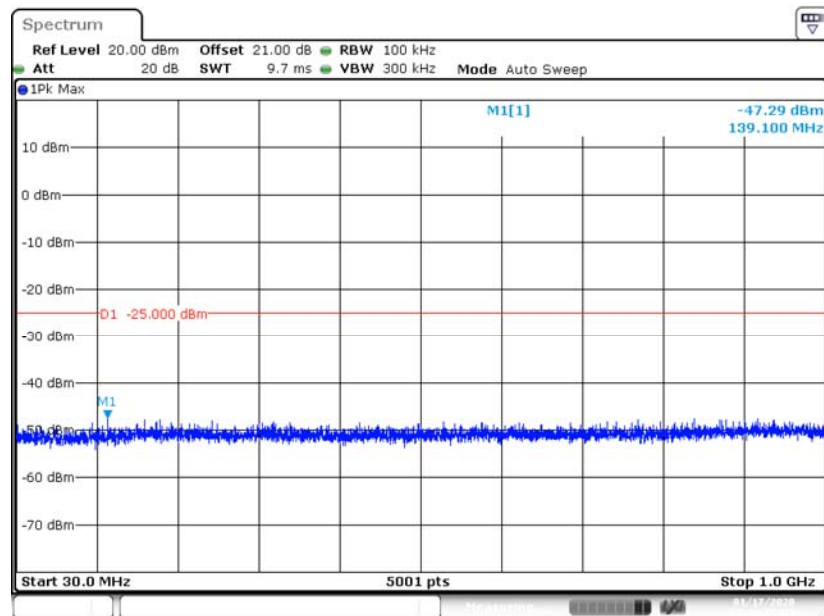

Date: 17 JAN 2020 09:43:43

High Channel (1GHz~40GHz)

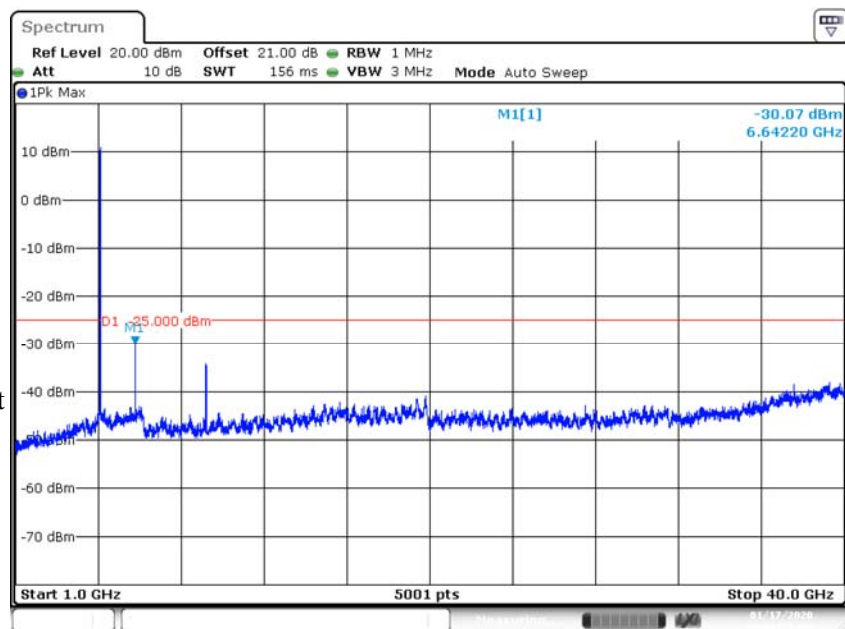


Date: 17 JAN 2020 09:48:24

Fundamental test


ANT 2

Low Channel (9kHz~150kHz)

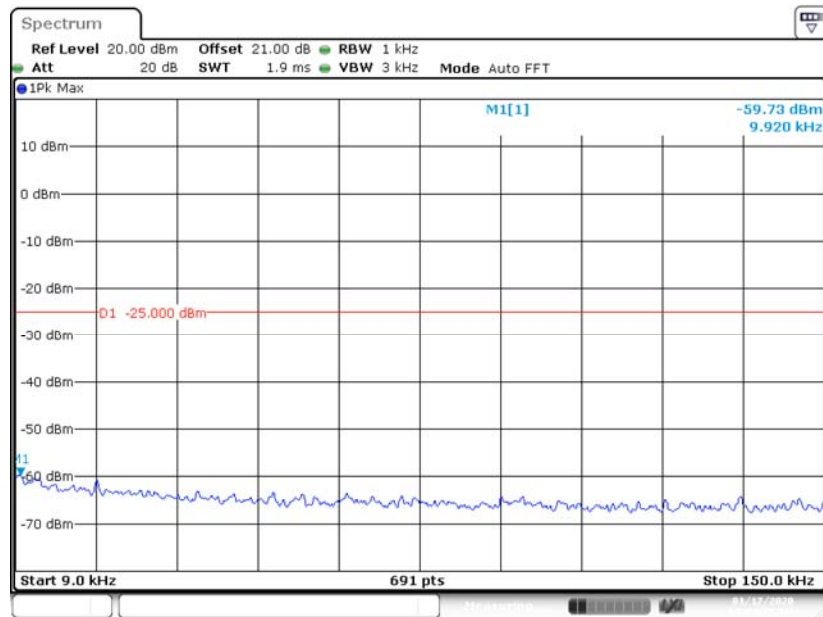


Date: 17 JAN 2020 09:34:06

Low Channel (150kHz~30MHz)

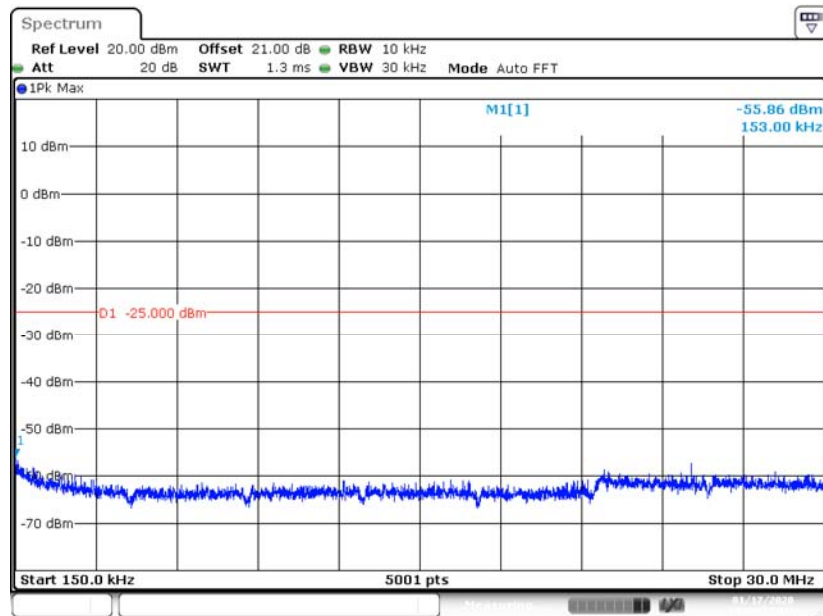


Date: 17 JAN 2020 09:39:27

Low Channel (30MHz~1GHz)

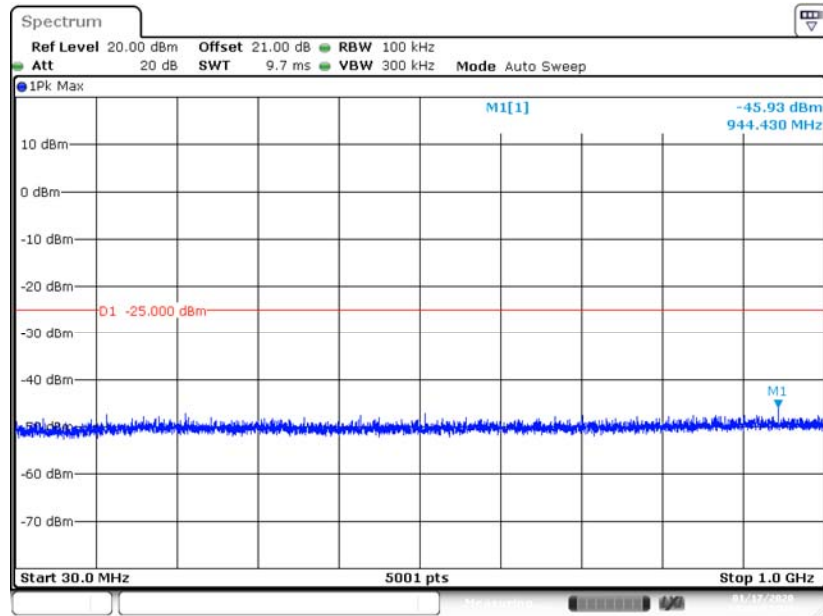

Date: 17.JAN.2020 09:43:53


Low Channel (1GHz~40GHz)

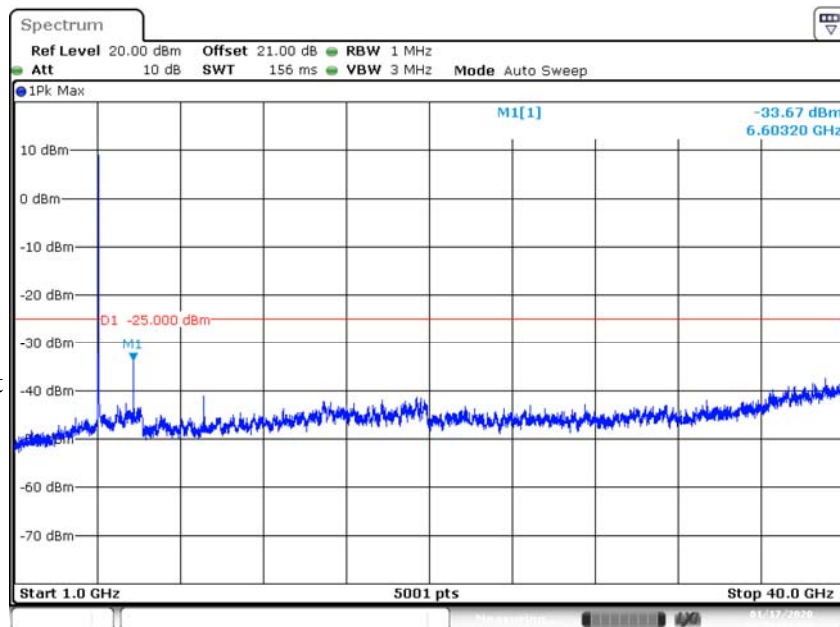

Date: 17.JAN.2020 09:50:44


Fundamental test

Middle Channel (9kHz~150kHz)

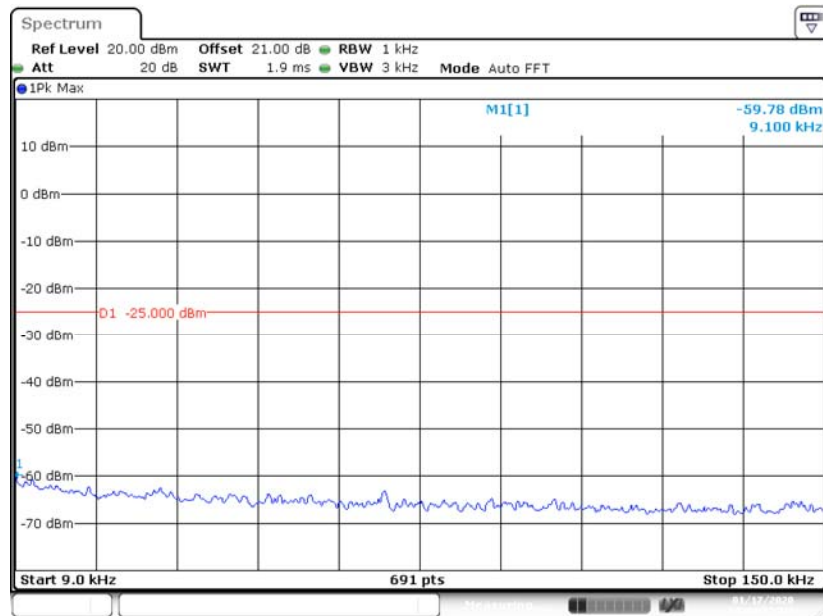


Date: 17.JAN.2020 09:34:32

Middle Channel (150kHz~30MHz)

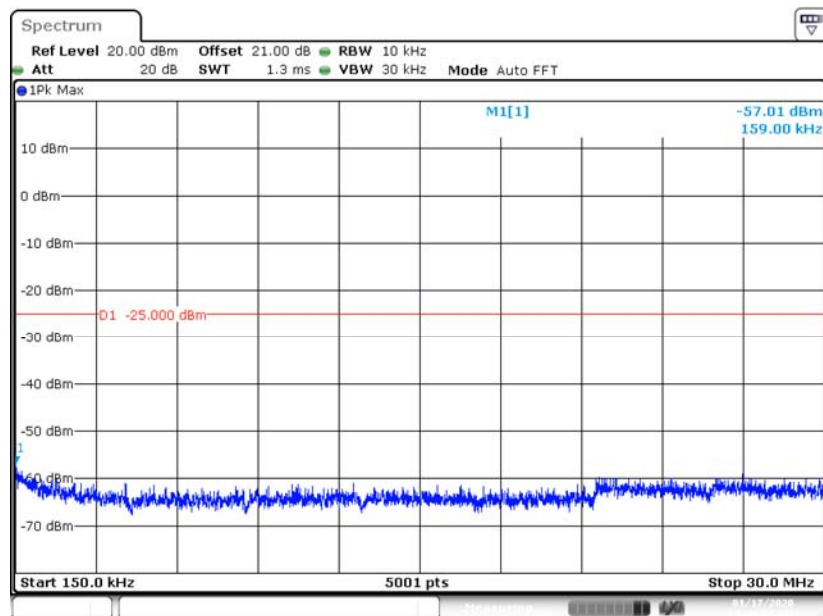


Date: 17.JAN.2020 09:39:57

Middle Channel (30MHz~1GHz)

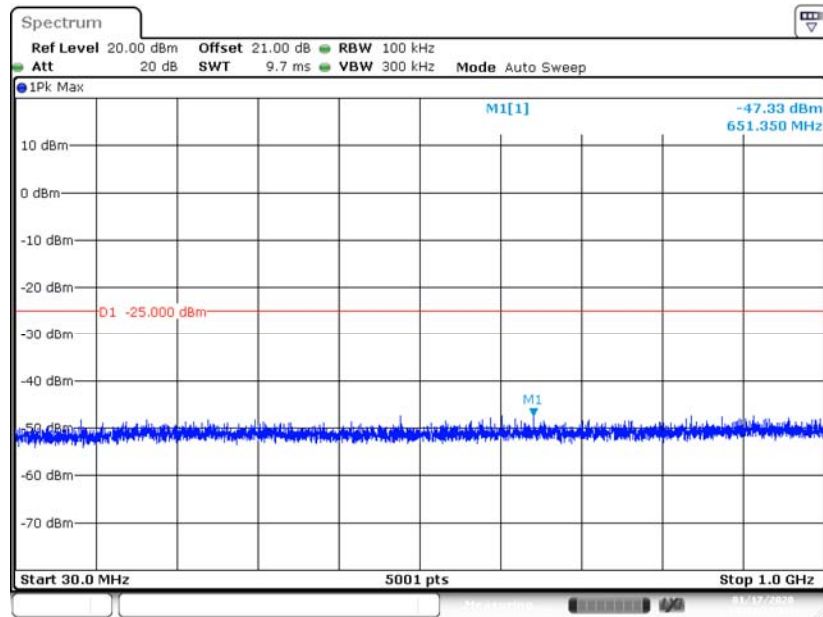

Date: 17 JAN 2020 09:44:13


Middle Channel (1GHz~40GHz)

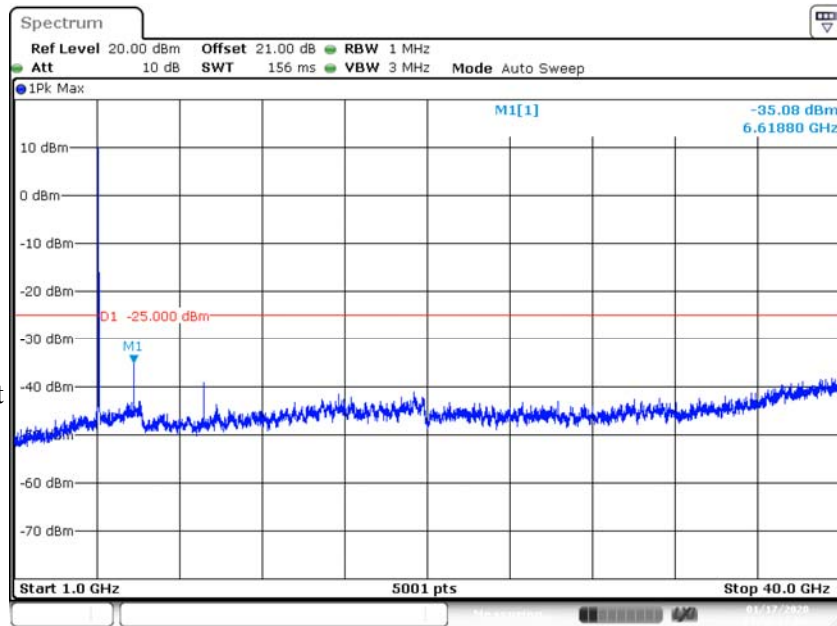

Date: 17 JAN 2020 09:50:13


Fundamental test

High Channel (9kHz~150kHz)

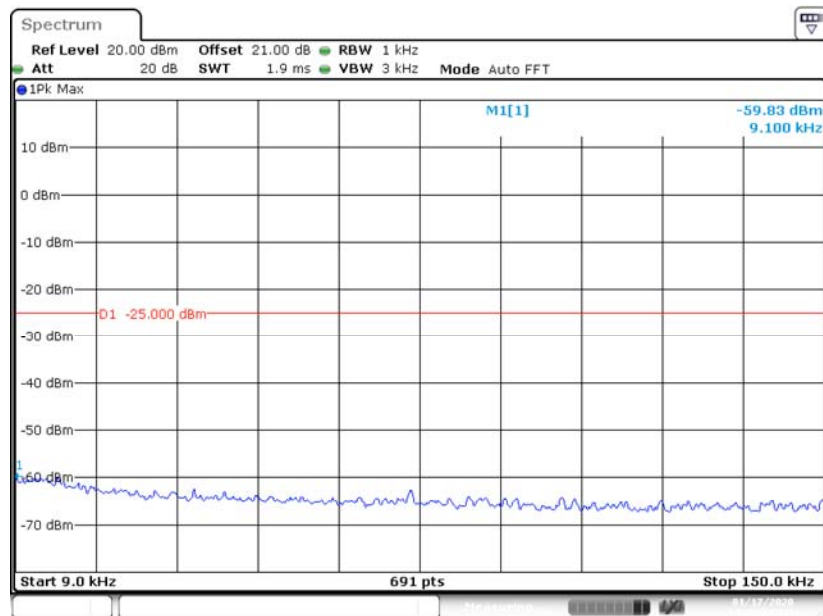


Date: 17.JAN.2020 09:35:08

High Channel (150kHz~30MHz)

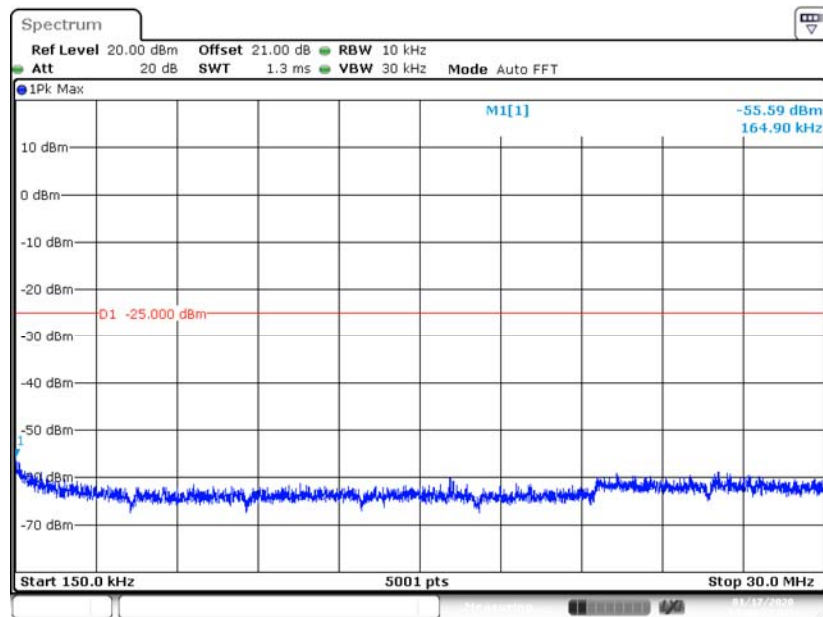


Date: 17.JAN.2020 09:40:16

High Channel (30MHz~1GHz)

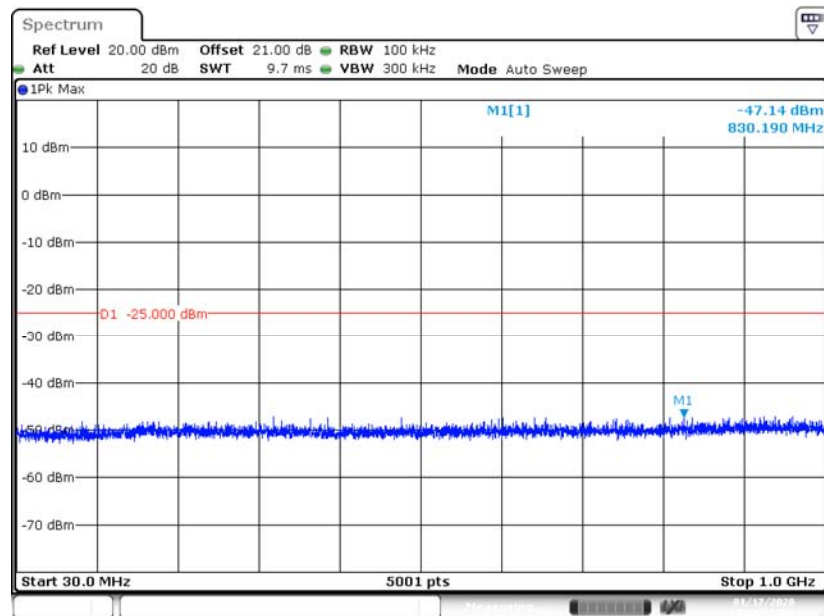

Date: 17 JAN 2020 09:44:22

High Channel (1GHz~40GHz)

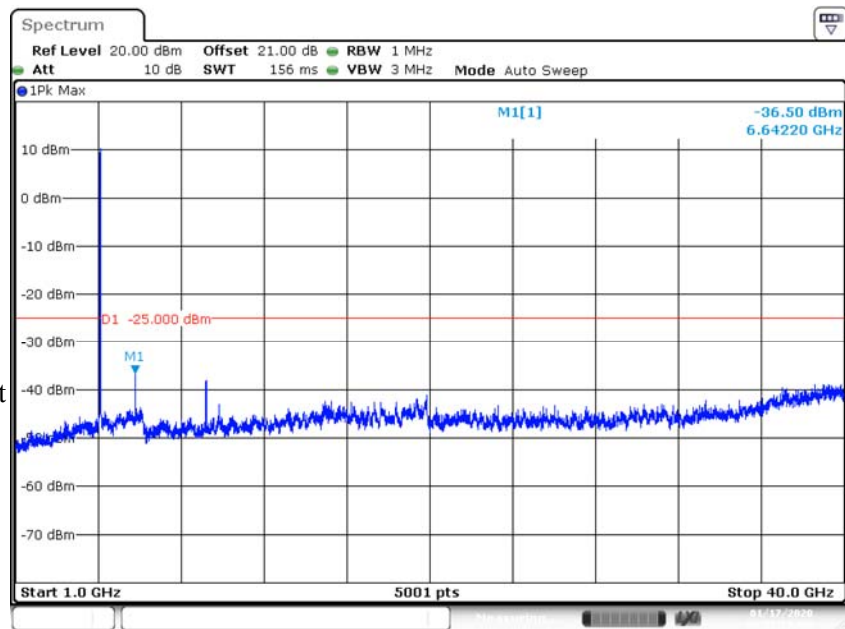

Date: 17 JAN 2020 09:51:31

Fundamental test

FCC § 2.1053, § 90.210 (m)(6)(7) - RADIATED SPURIOUS EMISSIONS**Applicable Standard**

FCC Part 2.1053, 90.210 (m)(6)(7)

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001)-the absolute level

Spurious attenuation limit in 50 dB or $55 + 10 \log (P)$ dB, whichever is the lesser attenuation.

Test Data**Environmental Conditions**

Temperature:	22.3 °C
Relative Humidity:	51 %
ATM Pressure:	101.1 kPa

The testing was performed by Stone Zhang on 2020-01-10.

EUT operation mode: Transmitting (ANT 1&ANT 2 transmitting simultaneously)

Test Result: Compliant.

30MHz - 40GHz:

Pre-scan with X,Y and Z axes of orientation, the worst case **Z-axis of orientation** was recorded

Frequency (MHz)	Receiver Reading (dBμV)	Turn Table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
Channel 4950MHz										
58.82	60.45	172	100	H	-41.05	0.27	-10.98	-52.30	-25.00	27.30
58.82	63.81	327	100	V	-37.69	0.27	-10.98	-48.94	-25.00	23.94
6600.00	54.02	329	150	H	-44.67	1.48	10.48	-35.67	-25.00	10.67
6600.00	52.10	158	150	V	-46.59	1.48	10.48	-37.59	-25.00	12.59
9900.00	50.73	173	200	H	-41.37	1.95	11.62	-31.70	-25.00	6.70
9900.00	49.97	162	200	V	-42.13	1.95	11.62	-32.46	-25.00	7.46
Channel 4965MHz										
58.82	61.48	113	200	H	-40.02	0.27	-10.98	-51.27	-25.00	26.27
58.82	64.86	328	200	V	-36.64	0.27	-10.98	-47.89	-25.00	22.89
6620.00	51.76	249	200	H	-46.89	1.49	10.47	-37.91	-25.00	12.91
6620.00	49.81	42	200	V	-48.84	1.49	10.47	-39.86	-25.00	14.86
9930.00	52.24	185	250	H	-39.81	1.95	11.64	-30.12	-25.00	5.12
9930.00	49.68	31	250	V	-42.37	1.95	11.64	-32.68	-25.00	7.68
Channel 4980MHz										
58.82	60.28	206	100	H	-41.22	0.27	-10.98	-52.47	-25.00	27.47
58.82	63.98	313	100	V	-37.52	0.27	-10.98	-48.77	-25.00	23.77
6640.00	52.36	238	200	H	-46.26	1.5	10.45	-37.31	-25.00	12.31
6640.00	49.61	184	200	V	-49.01	1.5	10.45	-40.06	-25.00	15.06
9960.00	51.02	164	150	H	-40.98	1.95	11.67	-31.26	-25.00	6.26
9960.00	47.90	173	150	V	-44.1	1.95	11.67	-34.38	-25.00	9.38

FCC § 2.1055 - FREQUENCY STABILITY

Applicable Standard

FCC Part 2.1055

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

Test Data

Environmental Conditions

Temperature:	22.3 °C
Relative Humidity:	51 %
ATM Pressure:	101.1 kPa

The testing was performed by Stone Zhang on 2020-01-10.

EUT Operation Mode: Transmitting

Test Result: Compliant.

ANT1

Temperature (°C)	Voltage (V _{DC})	f _L at Low Test Channel (MHz)	F _H at High Test Channel (MHz)	Limit
-40	3.3	4940.8903	4989.0575	f _L and f _H Within 4940~4990MHz range
-30		4940.8929	4989.0547	
-20		4940.8908	4989.06	
-10		4940.8955	4989.0544	
0		4940.8913	4989.0513	
10		4940.8916	4989.0593	
20		4940.8963	4989.0542	
30		4940.8971	4989.0596	
40		4940.8962	4989.0596	
50		4940.8991	4989.0591	
60		4940.8965	4989.0518	
70		4940.8911	4989.0591	

ANT2

Temperature (°C)	Voltage (V _{DC})	f _L at Low Test Channel (MHz)	F _H at High Test Channel (MHz)	Limit
-40	3.3	4940.8952	4989.0546	f _L and f _H Within 4940~4990MHz range
-30		4940.8907	4989.0553	
-20		4940.8972	4989.0584	
-10		4940.8938	4989.0581	
0		4940.8908	4989.055	
10		4940.899	4989.0529	
20		4940.8958	4989.0539	
30		4940.8970	4989.0555	
40		4940.8963	4989.0586	
50		4940.8903	4989.0527	
60		4940.8910	4989.0543	
70		4940.8903	4989.0526	

Note: As user manual required, only 3.3V constant voltage working with this device.

***** END OF REPORT*****