



FREQUENCY and POWER STABILITY vs TEMPERATURE and POWER SUPPLY. SPECTRUM and HARMONICS

SCREEN SERVICE BROADCASTING TECHNOLOGIES

VIA Giuseppe Di Vittorio, 17
25 125 BRESCIA, ITALIA

CONTENTS

1.1	PURPOSE	3
1.2	MEASURE	4
1.2.1	FREQUENCY AND RF POWER STABILITY AT CHANNEL 14 WITH INTERNAL REFERENCE ..	4
1.2.2	FREQUENCY AND RF POWER STABILITY AT CHANNEL 25 WITH INTERNAL REFERENCE ..	6
1.2.3	FREQUENCY AND RF POWER STABILITY AT CHANNEL 36 WITH INTERNAL REFERENCE ..	8
1.2.4	FREQUENCY STABILITY WITH EXTERNAL(GPS) REFERENCE	10
1.2.5	TEST BENCH.....	10
1.2.6	SPECTRUM	12
1.2.6.1	REFERENCE	12
1.2.6.2	SPECTRUM at channel 14.....	13
1.2.6.3	SPECTRUM at channel 25.....	14
1.2.6.4	SPECTRUM at channel 36.....	15

SCREEN SERVICE BROADCASTING TECHNOLOGIES

VIA Giuseppe Di Vittorio, 17
25 125 BRESCIA, ITALIA

1.1 PURPOSE

The document purpose is to give the sufficient and necessary information about:

1. CARRIER STABILITY
2. POWER STABILITY

Over:

- TEMPERATURE VARIATION: 0°C; 25°C; 50 °C
- POWER SUPPLY VARIATION: 90 to 264 VAC SINGLE PHASE

At rated output power which is 20.0 W under ATSC standard

By the results below (CHAPTER 1.2.1, 1.2.2, 1.2.3, 1.2.4 and 1.2.5) it turns out that:

- The frequency stability over temperature AND power supply variation is within +/- 1PPM
- The output power has no significant variation over temperature AND power supply

The chapter 1.2.6 gives the spurious frequency at the output of the equipment. No harmonics are present with a level higher than -70 dBc with reference to the nominal rated output power.

SCREEN SERVICE BROADCASTING TECHNOLOGIES

VIA Giuseppe Di Vittorio, 17
25 125 BRESCIA, ITALIA

1.2 MEASURE

1.2.1 FREQUENCY AND RF POWER STABILITY AT CHANNEL 14 WITH INTERNAL REFERENCE


TRANSMITTER BRAND: SCREEN SERVICE
MODEL: SDT 500 UB ARK 1
ECHO
FREQUENCY: UHF RANGE IV e V
CHANNEL SPACING: 6 MHz
FREQUENCY: 473 MHz
TEMPERATURE: 0° C
OUTPUT POWER:
DIGITAL: 20.1 W rms

FREQUENCY TOLERANCE
MFN/ FREE OFFSET:

MEASURE [HZ]: -367

POWER SUPPLY VARIATION:

MEASURE: 90 TO 264 VAC

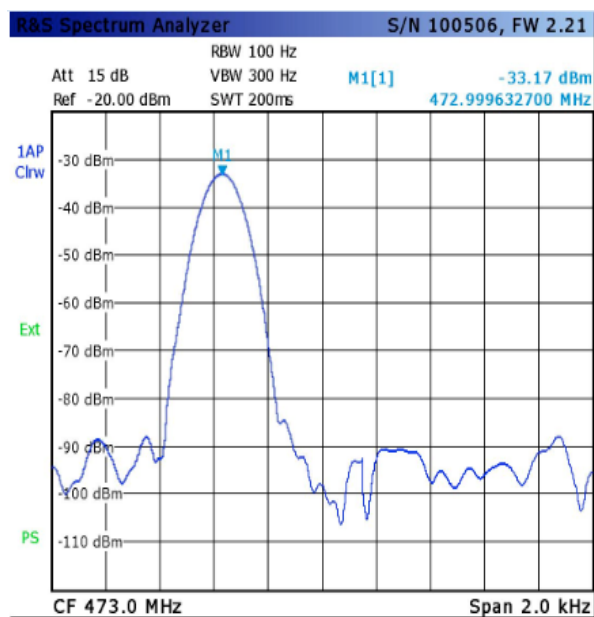


TRANSMITTER BRAND: SCREEN SERVICE
MODEL: SDT 500 UB ARK 1
ECHO
FREQUENCY: UHF RANGE
CHANNEL SPACING: 6 MHz
FREQUENCY: 473 MHz
TEMPERATURE: 25° C
OUTPUT POWER:
DIGITAL: 20.1 W rms

FREQUENCY TOLERANCE
MFN/ FREE OFFSET:

MEASURE [HZ]: -2

POWER SUPPLY VARIATION:

MEASURE: 90 TO 264 VAC

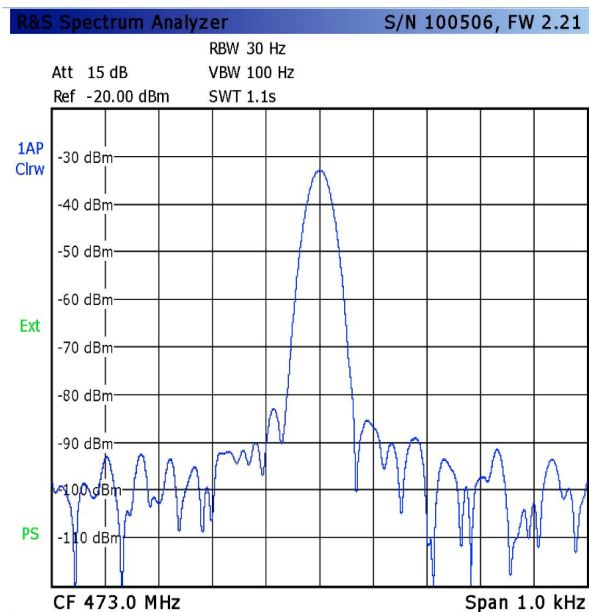

SCREEN SERVICE BROADCASTING TECHNOLOGIES

VIA Giuseppe Di Vittorio, 17
25 125 BRESCIA, ITALIA

TRANSMITTER BRAND: SCREEN SERVICE
MODEL: SDT 500 UB ARK 1


ECHO
FREQUENCY: UHF RANGE
CHANNEL SPACING: 6 MHz
FREQUENCY: 473 MHz
TEMPERATURE: 50° C
OUTPUT POWER:
DIGITAL: 20.1 W rms

FREQUENCY TOLERANCE
MFN/ FREE OFFSET:

MEASURE [HZ]: **+363**

POWER SUPPLY VARIATION:

MEASURE: 90 TO 264 VAC

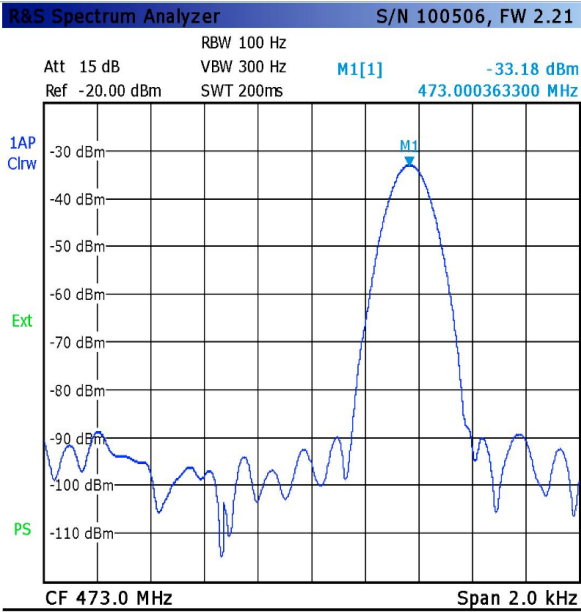

SCREEN SERVICE BROADCASTING TECHNOLOGIES

VIA Giuseppe Di Vittorio, 17
25 125 BRESCIA, ITALIA

1.2.2 FREQUENCY AND RF POWER STABILITY AT CHANNEL 25 WITH INTERNAL REFERENCE


TRANSMITTER BRAND: SCREEN SERVICE
MODEL: SDT 500 UB ARK 1
ECHO
FREQUENCY: UHF RANGE
CHANNEL SPACING: 6 MHz
FREQUENCY: 539 MHz
TEMPERATURE: 0° C
OUTPUT POWER:
DIGITAL: 20.1 W rms

FREQUENCY TOLERANCE
MFN/ FREE OFFSET:

MEASURE [HZ]: -379

POWER SUPPLY VARIATION:

MEASURE: 90 TO 264 VAC

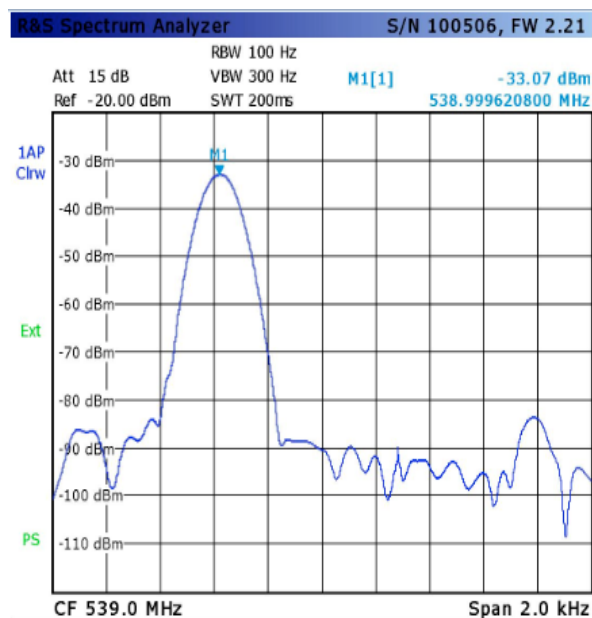


TRANSMITTER BRAND: SCREEN SERVICE
MODEL: SDT 500 UB ARK 1
ECHO
FREQUENCY: UHF RANGE
CHANNEL SPACING: 6 MHz
FREQUENCY: 666 MHz
TEMPERATURE: 25° C
OUTPUT POWER:
DIGITAL: 20.1 W rms

FREQUENCY TOLERANCE
MFN/ FREE OFFSET:

MEASURE [HZ]: -21

POWER SUPPLY VARIATION:

MEASURE: 90 TO 264 VAC

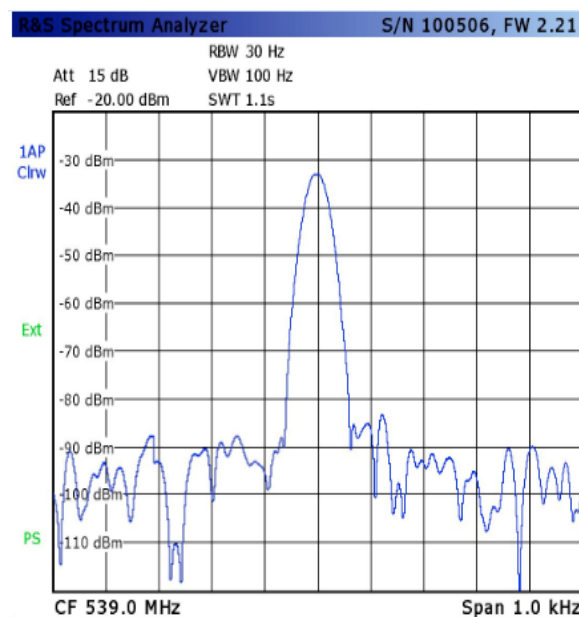

SCREEN SERVICE BROADCASTING TECHNOLOGIES

VIA Giuseppe Di Vittorio, 17
25 125 BRESCIA, ITALIA


TRANSMITTER BRAND: **SCREEN SERVICE**
MODEL: **SDT 500 UB ARK 1**
ECHO
FREQUENCY: **UHF RANGE**
CHANNEL SPACING: **6 MHz**
FREQUENCY: **539 MHz**
TEMPERATURE: **50° C**
OUTPUT POWER: **DIGITAL: 20.1 W rms**

FREQUENCY TOLERANCE
MFN/ FREE OFFSET:

MEASURE [HZ]: **+371**

POWER SUPPLY VARIATION:

MEASURE: **90 TO 264 VAC**

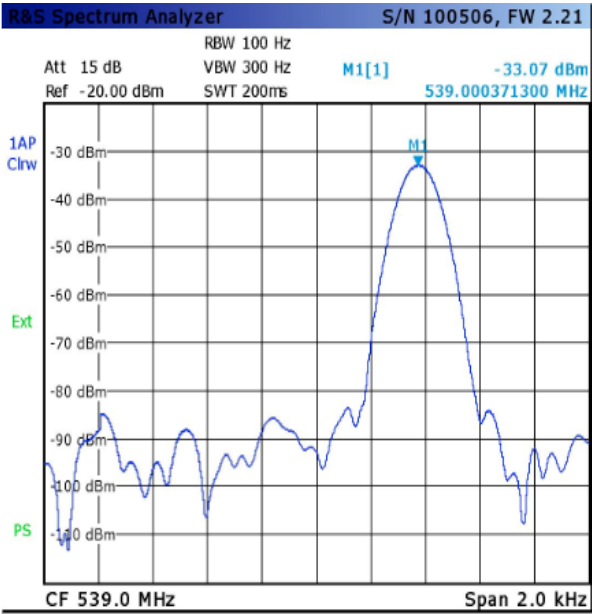

SCREEN SERVICE BROADCASTING TECHNOLOGIES

VIA Giuseppe Di Vittorio, 17
25 125 BRESCIA, ITALIA

1.2.3 FREQUENCY AND RF POWER STABILITY AT CHANNEL 36 WITH INTERNAL REFERENCE


TRANSMITTER BRAND: SCREEN SERVICE
MODEL: SDT 500 UB ARK 1
ECHO
FREQUENCY: UHF RANGE
CHANNEL SPACING: 6 MHz
FREQUENCY: 605 MHz
TEMPERATURE: 0 ° C
OUTPUT POWER:
DIGITAL: 20.1 W rms

FREQUENCY TOLERANCE
MFN/ FREE OFFSET:

MEASURE [HZ]: -419

POWER SUPPLY VARIATION:

MEASURE: 90 TO 264 VAC

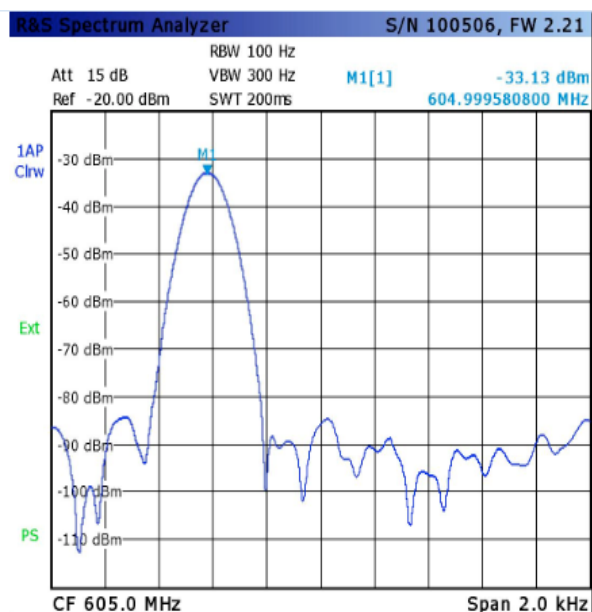


TRANSMITTER BRAND: SCREEN SERVICE
MODEL: SDT 500 UB ARK 1
ECHO
FREQUENCY: UHF RANGE
CHANNEL SPACING: 6 MHz
FREQUENCY: 605 MHz
TEMPERATURE: 25° C
OUTPUT POWER:
DIGITAL: 20.1 W rms

FREQUENCY TOLERANCE
MFN/ FREE OFFSET:

MEASURE [HZ]: -5

POWER SUPPLY VARIATION:

MEASURE: 90 TO 264 VAC

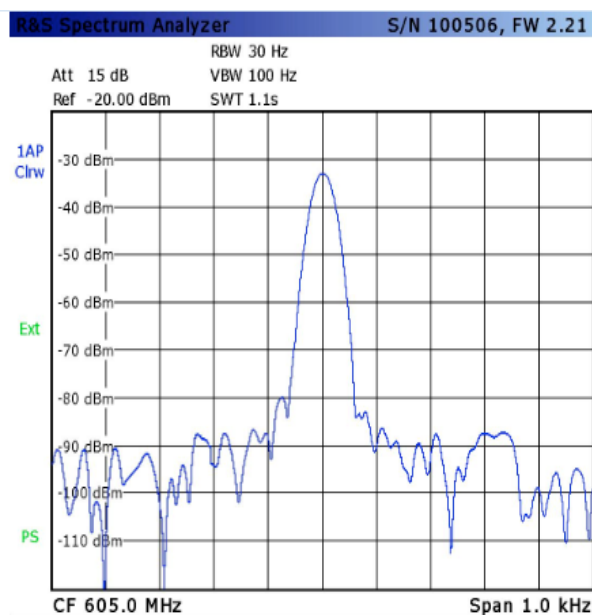

SCREEN SERVICE BROADCASTING TECHNOLOGIES

VIA Giuseppe Di Vittorio, 17
25 125 BRESCIA, ITALIA

TRANSMITTER BRAND: SCREEN SERVICE
MODEL: SDT 500 UB ARK 1


ECHO
FREQUENCY: UHF RANGE
CHANNEL SPACING: 6 MHz
FREQUENCY: 605 MHz
TEMPERATURE: 50° C
OUTPUT POWER:
DIGITAL: 20.1 W rms

FREQUENCY TOLERANCE
MFN/ FREE OFFSET:

MEASURE [HZ]: +407

POWER SUPPLY VARIATION:

MEASURE: 90 TO 264 VAC

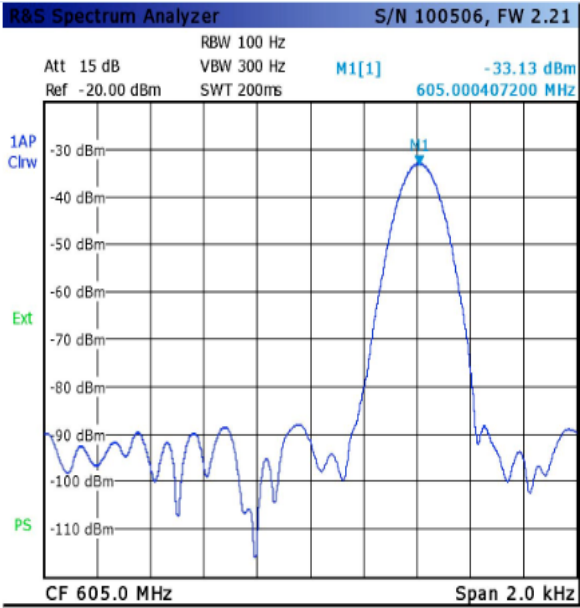

1.2.4 FREQUENCY STABILITY WITH EXTERNAL(GPS) REFERENCE

The GPS reference can be used because is an embedded function. When this function is active for example in the SFN (Single Frequency Network or other needs) the frequency variation temperature AND power supply is within +/- 1 HZ.

1.2.5 TEST BENCH

This chapter shows the used equipment for testing:

SDT 500 UB ARK 1 ECHO S/N 1137-46531

RF ATTENUATOR 76 dB +/-0.1

ETL R&S_S/N 100506

THERMAL CHAMBER_ANGELANTONI_HYGROS 600_S/N7024



SCREEN SERVICE BROADCASTING TECHNOLOGIES

VIA Giuseppe Di Vittorio, 17
25 125 BRESCIA, ITALIA



SCREEN SERVICE BROADCASTING TECHNOLOGIES

VIA Giuseppe Di Vittorio, 17
25 125 BRESCIA, ITALIA


1.2.6 SPECTRUM

This chapter shows the spurious frequency.

In particular 1.2.1.1 shows the test bench the other three pictures reports the spectrum at the three required frequencies.

NO HARMONICS ARE DETECTED above the noise of the instrument.


1.2.6.1 REFERENCE

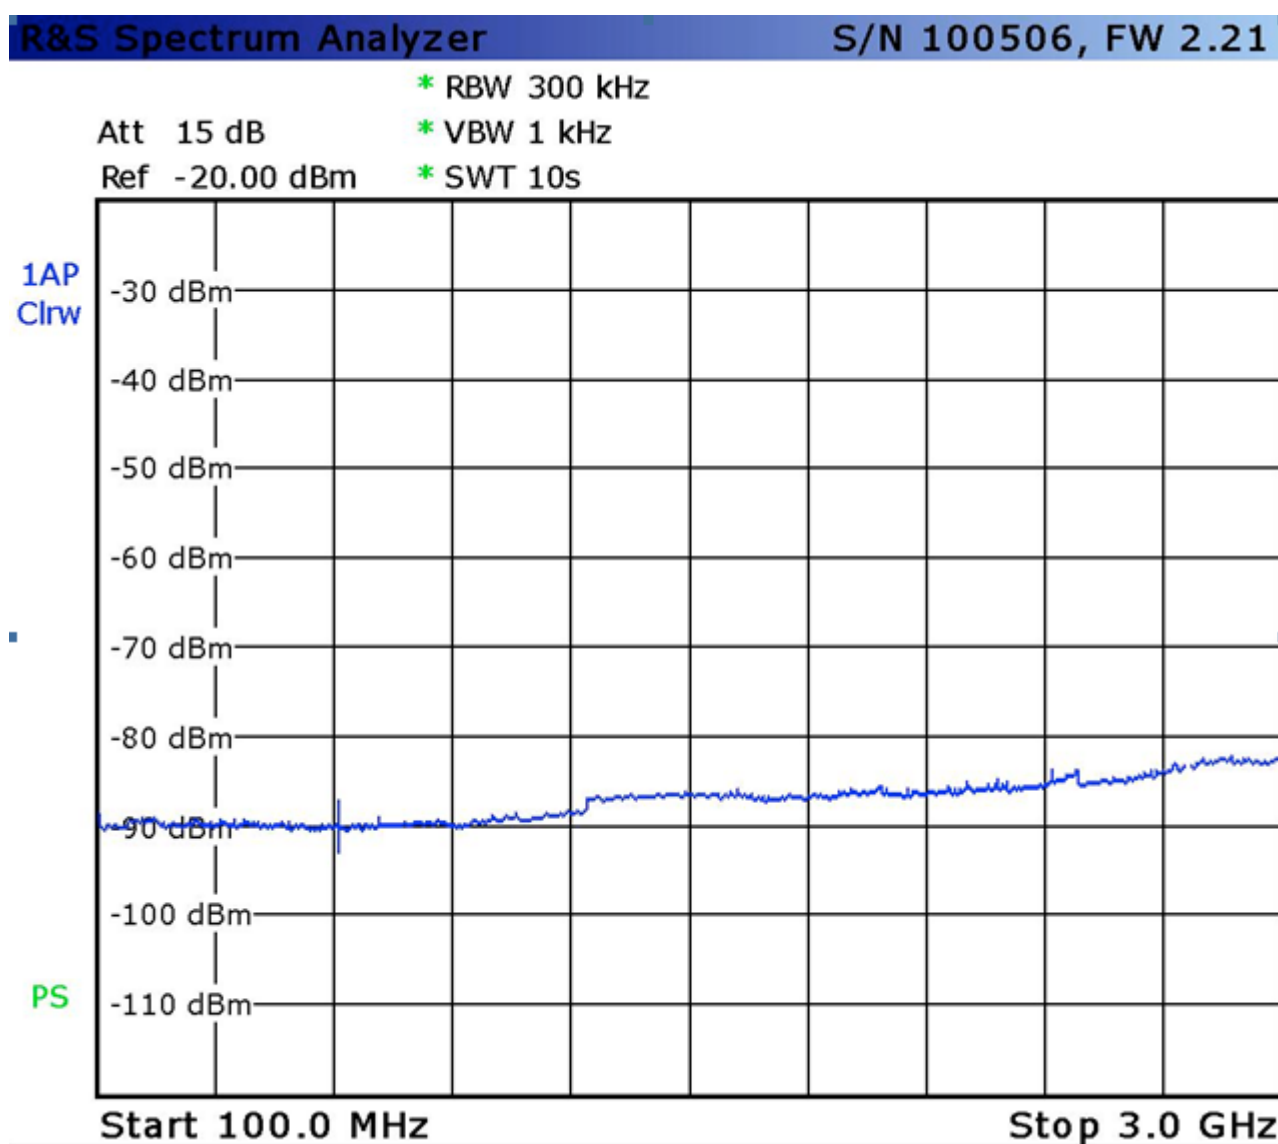

SCREEN SERVICE BROADCASTING TECHNOLOGIES

VIA Giuseppe Di Vittorio, 17
25 125 BRESCIA, ITALIA


1.2.6.2 SPECTRUM at channel 14

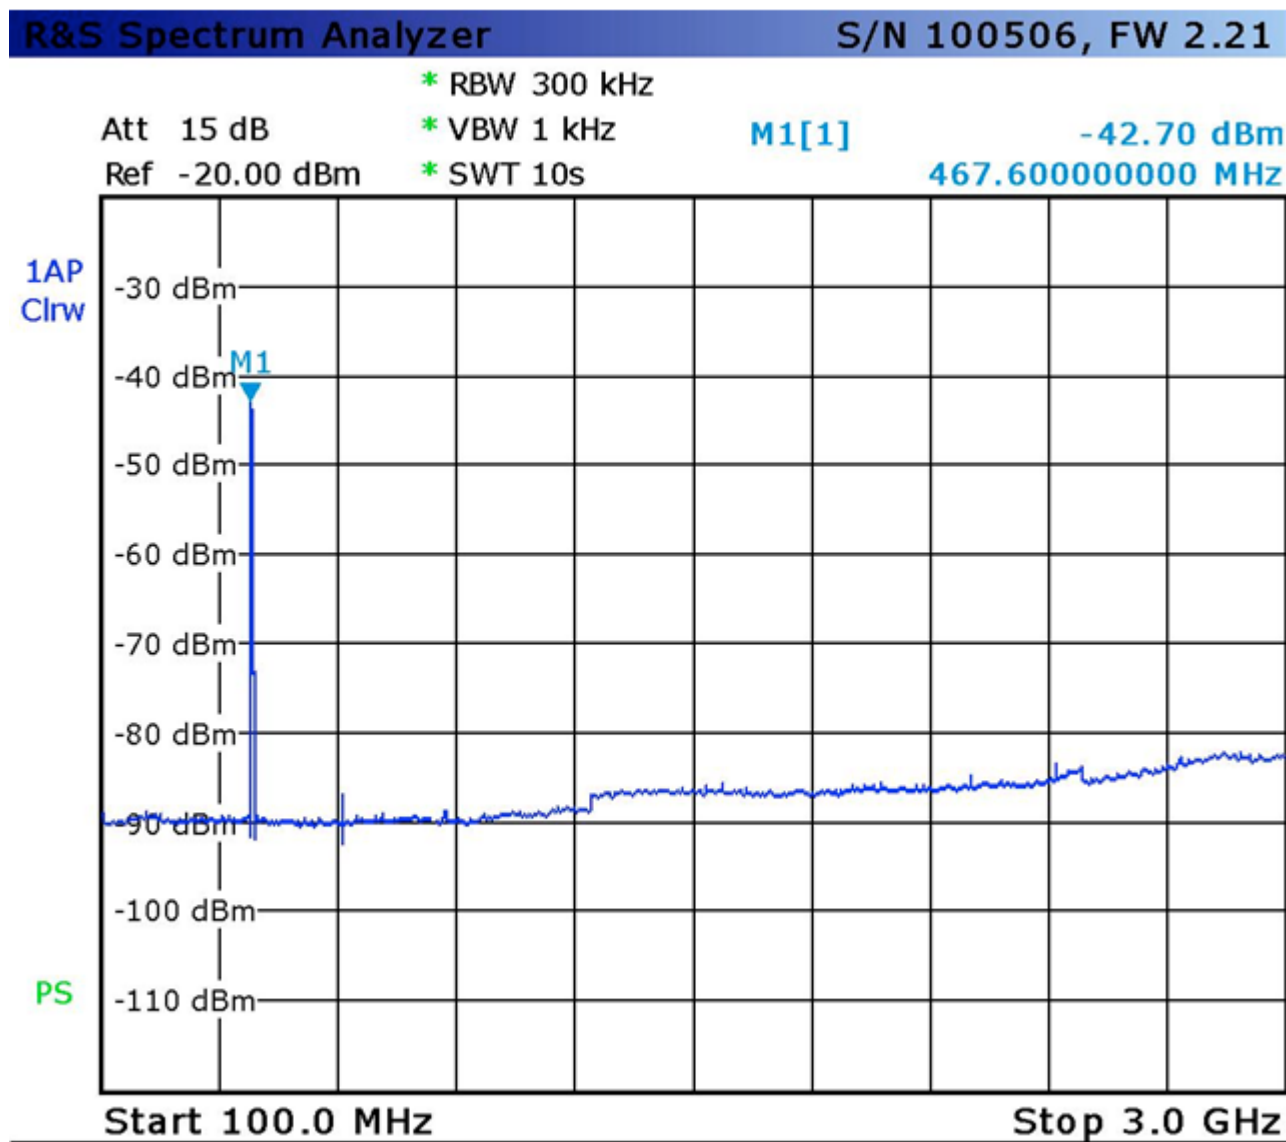

SCREEN SERVICE BROADCASTING TECHNOLOGIES

VIA Giuseppe Di Vittorio, 17
25 125 BRESCIA, ITALIA

1.2.6.3 SPECTRUM at channel 25

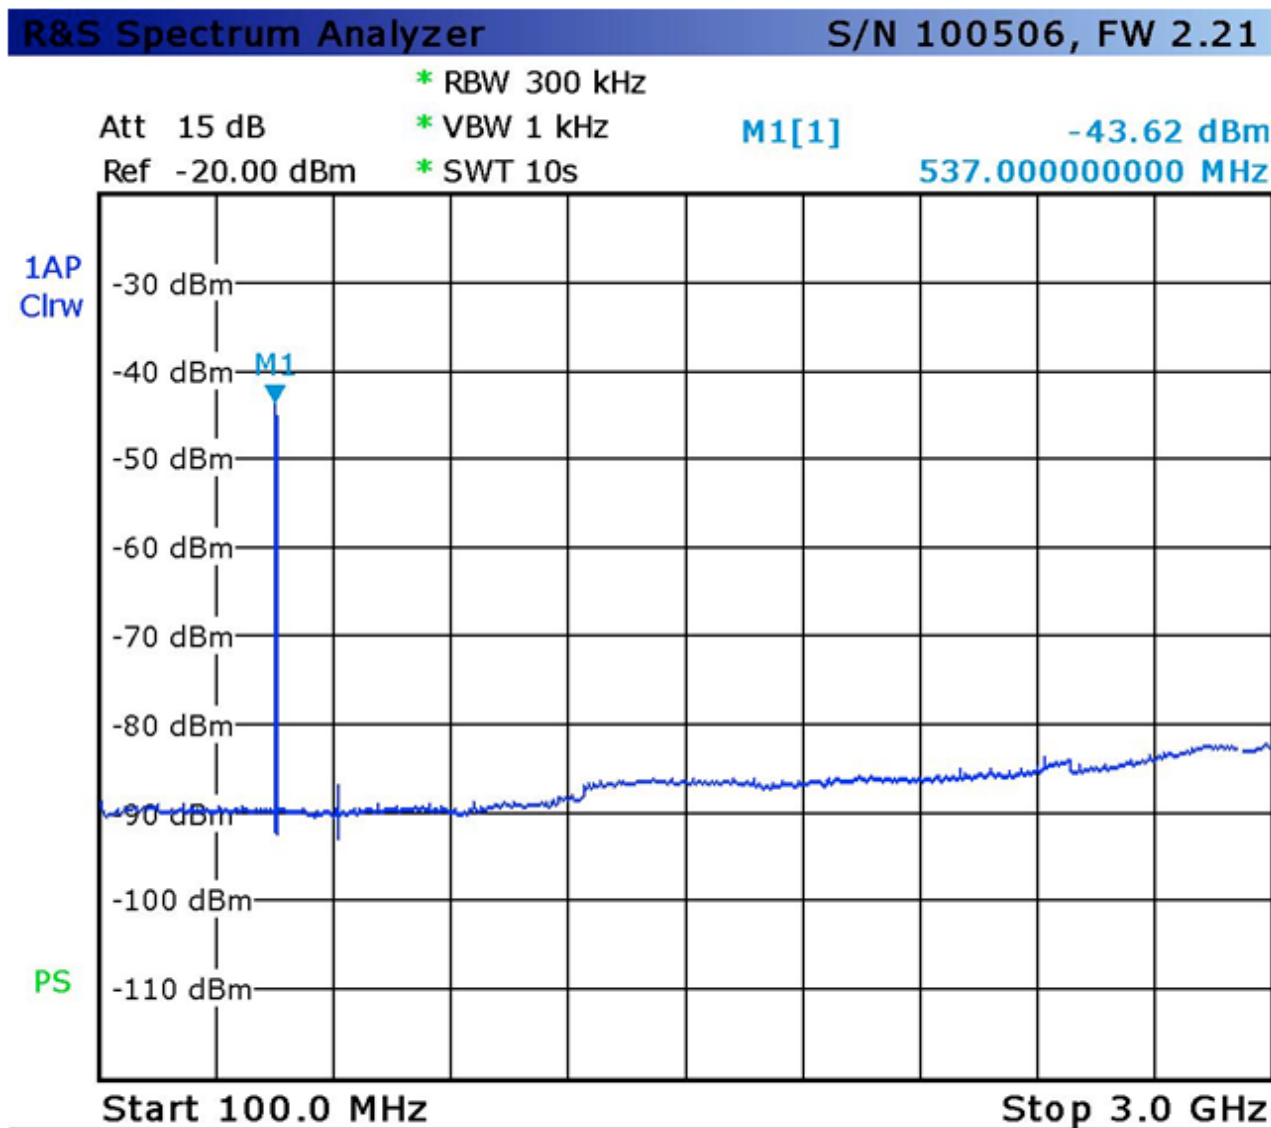

SCREEN SERVICE BROADCASTING TECHNOLOGIES

VIA Giuseppe Di Vittorio, 17
25 125 BRESCIA, ITALIA

1.2.6.4 SPECTRUM at channel 36

