

# TEST REPORT



Certification # 1367-01

Laboratory ID

PRODUCT SAFETY ENGINEERING, INC.  
12955 Bellamy Brothers Boulevard  
Dade City, Florida 33525 USA  
PH (352) 588-2209 FX (352) 588-2544

Submitter ID

NICE S.p.a.  
Via Pezza Alta, 13  
Z.I. Rustigne  
Oderzo, 31046

Report Issue Date: 02 JUL 01  
Sample S/N: None  
Sample Receipt Date: June 25, 2001  
Sample Test Date: see data sheets

Test Report Number: 00F534B  
Model Designation: FL01, FL02, FL04  
Product Description: Handheld Transmitter  
Marketing Approval \_\_\_\_\_

Description of non-standard test method or test practice: *None*

Estimated Measurement Uncertainty: *Not Applicable*

Special limitations of use: *None*

Traceability: *reference standards of measurement have been calibrated by a competent body using standards traceable to the NIST.*

According to testing performed at Product Safety Engineering, Inc., the above-mentioned unit is in compliance with the electromagnetic compatibility requirements defined in regulations indicated on page (3) of the test report. The test results contained herein relate only to the model(s) identified above. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Project Engineer, I hereby declare that the equipment tested as specified above conforms to the requirements indicated on page (3) of the test report.

Signature  Name David Foerstner

Title Engineering Group Leader Date 02 JULY 01

Reviewed by:  Date 02 JUL 01  
Approved Signatory \_\_\_\_\_

This report may only be reproduced in full with written permission from Product Safety Engineering, Inc.

Test Report Number 00F534B

Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544

## DIRECTORY - EMISSIONS

		Page(s)
<b>A) Documentation</b>		
Test report		1 - 10
Directory		2
Test Regulations		3
General Remarks		10
Test-setups (Photos)		11 - 12
<b>B) Test data</b>		
Conducted emissions	10/150 kHz - 30 MHZ	5, 9
Radiated emissions	10 kHz - 30 MHZ	5, 9
Radiated emissions	30 MHZ - 1000 MHZ	6, 9
Interference power	30 MHZ - 300 MHZ	6, 9
Equivalent Radiated emissions	1 GHz - 18 GHz	7, 9
Antenna Disturbance Voltage	30 MHZ - 1,000 MHz	7,9
<b>C) Appendix A</b>		
Test Equipment Calibration Information		A2
Test Data Sheets		A3 - A5
<b>D) Appendix B</b>		
System Under Test Description		B2 - B4
<b>E) Appendix C</b>		
Measurement Protocol		C1 - C2

*Test Report Number 00F534B*

## EMISSIONS TEST REGULATIONS :

The emissions tests were performed according to following regulations:

9 - EN 50081-1 : 1992

9 - EN 50081-2 : 1995

9 - EN 55011 : 1998 / A1:1999

9 - Group 1

9 - Group 2

9 - Class A

9 - Class B

9 - EN 55013 : 1990 / A12:1994 / A13:1996

9 - EN 55014 : 1993 /A1:1997

9 - Household appliances and similar

9 - Portable tools

9 - Semiconductor devices

9 - EN 55022 : 1998

9 - Class A

9 - Class B

9 -AS/NZS 3548:1995

9 - Class A

9 - Class B

9 - ICES-003

9 - Class A

9 - Class B

9 - CNS 13438

9 - Class A

9 - Class B

9 - VCCI : 1999

9 - Class A

9 - Class B

# - FCC Part 15

9 - Class A

# - Class B

# - Certification

9 - Verification

9 - Declaration of Conformity

9 - FCC Part 18

*Test Report Number 00F534B*

**Environmental conditions during testing:**

LAB                      OATS

Temperature: \*                      \_\_\_\_\_ : \_\_\_\_\_

Relative Humidity: \*\*                      \_\_\_\_\_ : \_\_\_\_\_

\* The ambient temperature during the testing was within the range of (50° - 104° F) unless indicted above.

\*\* The humidity levels during the testing was within the range of (10% - 90%) relative humidity unless indicated above.

Power supply system                      :   12   Volts   DC   Hz   Internal Battery  

**Sign Explanations:**

9 - not applicable

# - applicable

*Test Report Number 00F534B*

## Emissions Test Conditions: CONDUCTED EMISSIONS (Interference Voltage)

The *CONDUCTED EMISSIONS (INTERFERENCE VOLTAGE)* measurements were performed at the following test location:

# - Test not applicable

- 9 - Darby Test Site (Open Area Test Site)
- 9 - Darby Laboratory

### Test equipment used :

	Model Number	Manufacturer	Description	Serial Number
9 -	8028-50	Solar	50 Û LISN	829012, 829022
9 -	3825/2	Solar	50 Û LISN	924840
9 -	EMC-30	Electro-Metrics	EMI Receiver	191
9 -	8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
9 -	85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
9 -	85662A	Hewlett Packard	Analyzer Display	2403A07352
9 -	8028-50	Solar	50 Û LISN	903725, 903726
9 -	FCC-TLISN-T4	Fisher Custom Com.	Telecom ISN	20072

## Emissions Test Conditions: RADIATED EMISSIONS (Magnetic Field)

The *RADIATED EMISSIONS (MAGNETIC FIELD)* measurements were performed at the following test location:

- 9 - Darby Test Site (Open Area Test Site)
- 9 -
- 9 -

### at a test distance of :

- 9 - 3 meters
- 9 - 30 meters

# - Test not applicable

### Test equipment used :

	Model Number	Manufacturer	Description	Serial Number
9 -	96005	Eaton	Log Periodic Antenna	1099
9 -	BIA-25	Electro-Metrics	Biconical Antenna	4283
9 -	8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
9 -	85662A	Hewlett-Packard	Analyzer Display	2403A07352
9 -	85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
9 -	ALR-30M	Electro-Metrics	Loop Antenna	824
9 -	8447D	Hewlett Packard	Preamplifier	2944A06832
9 -	EMC-30	Electro-Metrics	EMI Receiver	191

Test Report Number 00F534B

## Emissions Test Conditions: RADIATED EMISSIONS (Electric Field)

The *RADIATED EMISSIONS (ELECTRIC FIELD)* measurements, in the frequency range of 30 MHZ-1000 MHZ, were tested in a horizontal and vertical polarization at the following test location :

9 - Test not applicable

# - Darby Site (Open Area Test Site)

9 - Darby Lab

9 -

at a test distance of :

# - 3 meters

9 - 10 meters

9 - 30 meters

Test equipment used :

	Model Number	Manufacturer	Description	Serial Number
# -	96005	Eaton	Log Periodic Antenna	1099
# -	BIA-25	Electro-Metrics	Biconical Antenna	4283
# -	8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
# -	85662A	Hewlett-Packard	Analyzer Display	2403A07352
# -	85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
# -	8447D	Hewlett-Packard	Preamplifier (26dB)	2944A06832
9 -	EMC-30	Electro-Metrics	EMI Receiver	191
9 -	8568B	Hewlett Packard	Spectrum Analyzer	2407A03213
9 -	85650A	Hewlett Packard	Quasi-Peak Adapter	2043A00358
9 -	85662A	Hewlett Packard	Analyzer Display	2340A05806
9 -	LPA30	Electro-Metrics	Log Periodic	2280
9 -	BIA 30	Electro-Metrics	Biconical Antenna	3852

## Emissions Test Conditions): INTERFERENCE POWER

The *INTERFERENCE POWER* measurements were performed by using the absorbing clamp on the mains and interface cables in the frequency range 30 MHZ - 300 MHZ at the following test location :

# - Test not applicable

9 - Darby Lab

9 -

9 -

Test equipment used :

	Model Number	Manufacturer	Description	Serial Number
9 -	MDS-21	Rhode&Schwarz	Absorbing Clamp	8608447020
9 -	8566B	Hewlett-Packard	Spectrum Analyzer	2421A00526
9 -	85662A	Hewlett-Packard	Analyzer Display	2403A07352
9 -	85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
9 -	8447D	Hewlett-Packard	Amplifier (26 dB)	2944A06832

Test Report Number 00F534B

**The EQUIVALENT RADIATED EMISSIONS measurements in the frequency range 1 GHz - 4.4 GHz were performed in a horizontal and vertical polarization at the following test location :**

#- Darby Test Site (Open Area Test Site)

9 -  
9 -  
9 -

**at a test distance of:**

9 - 1 meters  
# - 3 meters  
9 - 10 meters

**9 - Test not applicable**

**Test equipment used :**

	<b>Model Number</b>	<b>Manufacturer</b>	<b>Description</b>	<b>Serial Number</b>
# -	8566B	Hewlett-Packard	Spectrum Analyzer	2618A02898
# -	85662A	Hewlett-Packard	Analyzer Display	2542A11984
# -	85650A	Hewlett-Packard	Quasi-Peak Adapter	2043A00209
# -	8449B	Hewlett-Packard	Preamplifier	3008A00320
# -	3115	Electro-Mechanics	Double Ridge Guide Horn	3810

**The ANTENNA TERMINAL DISTURBANCE VOLTAGE in the frequency range 30 MHz - 1,000 MHz were performed.**

9 - Darby Test Site (Open Area Test Site)  
9 - Laboratory  
9 -  
9 -

**# - Test not applicable**

	<b>Model Number</b>	<b>Manufacturer</b>	<b>Description</b>	<b>Serial Number</b>
9 -	2F9-3C4-3C5	Wavecom	UHF PAL TV Modulator	185879
9 -	2F1-3C4-3C5	Wavecom	VHF PAL TV Modulator	157728
9 -	A-8000	IFR	Spectrum Analyzer	1306
9 -	8648B	Hewlett-Packard	Signal Generator	3623A01433
9 -	8648B	Hewlett-Packard	Signal Generator	3623A01477
9 -	LMV-182A	Leader	RMS Milli-Voltmeter	8010091
9 -	3202	Krhon-Hite	Active filter	5899
9 -	FMT115	Leaming	FM Modulator	NONE
9 -	371	UDT	Optical power meter	06657
9 -	TSG95	Tektronix	PAL video / Audio generator	B028883
9 -				

*Test Report Number 00F534B*

**Equipment Under Test (EUT) Test Operation Mode - Emission tests :**

**The device under test was operated under the following conditions during emissions testing:**

- 9 - Standby
- 9 - Test program (H - Pattern)
- 9 - Test program (color bar)
- 9 - Test program (customer specific)
- # - Practice operation
- 9 - Normal Operating Mode
- 9 -

**Configuration of the device under test:**

# - See System Under Test Information in Appendix B

**Rationale for EUT setup / configuration:**

---

---

---

---

---

---

*Test Report Number 00F534B*



## Emission Test Results:

### Conducted emissions 10/150/450 kHz - 30 MHZ

The requirements are 9 - MET 9 - NOT MET  
Minimum limit margin dB at MHZ  
Remarks:

### Radiated emissions (magnetic field) 10 kHz - 30 MHZ

The requirements are 9 - MET 9 - NOT MET  
Minimum limit margin dB at MHZ  
Remarks:

### Radiated emissions (electric field) 30 MHZ - 1000 MHZ

The requirements are # - MET 9 - NOT MET  
Minimum limit margin 15.4 dB at 434.0 MHZ  
Remarks:

### Interference Power at the mains and interface cables 30 MHZ - 300 MHZ

The requirements are 9 - MET 9 - NOT MET  
Minimum limit margin dB at MHZ  
Remarks:

### Radiated emissions GHz - GHz

The requirements are # - MET 9 - NOT MET  
Minimum limit margin 5.4 dB at 3.038 GHz  
Remarks:

### Antenna Terminal Disturbance Voltage 30 MHz - 1,000 MHz

The requirements are 9 - MET 9 - NOT MET  
Minimum limit margin dB at MHz  
Remarks:

Test Report Number 00F534B

**GENERAL REMARKS:**

**SUMMARY:**

The requirements according to the technical regulations are

# - met

9 - **not** met.

The device under test does

# - fulfill the general approval requirements mentioned on page 3.

9 - **not** fulfill the general approval requirements mentioned on page 3.

Testing Start Date                                          **June 25, 2001**          

Testing End Date:                                           **June 25, 2001**          

- PRODUCT SAFETY ENGINEERING INC -

*Test Report Number 00F534B*

**Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544**

Test-setup photo(s):

Conducted emission 450/150 kHz - 30 MHz

**N/A**

*Test Report Number 00F534B*

**Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544**

Test-setup photo(s):  
Radiated emission 30 MHz - 5000 MHz



*Test Report Number 00F534B*

**Product Safety Engineering, Inc 12955 Bellamy Brothers Blvd. Dade City, FL 33525  
Tel (352) 588-2209 Fax (352) 588-2544**

# **APPENDIX**

## **A**

# **Test Equipment Calibration Information & Test Data Sheets**

## TEST EQUIPMENT CALIBRATION INFORMATION

Manufacturer	Model	Description	Serial Number	Cal Due
Hewlett Packard	8566B	Spectrum Analyzer	2421A00526	09/08/01
Hewlett Packard	85662A	Display	2403A07352	09/08/01
Hewlett Packard	85650A	Quasi-Peak Adapter	2043A00209	09/09/01
Hewlett Packard	8447D	Preamp 0.1 - 1,000 MHZ	2944A06832	02/25/01
Hewlett Packard	8568B	Spectrum Analyzer	2407A03213	08/22/01
Hewlett Packard	85662A	Display	2340A05806	08/22/01
Hewlett Packard	85650A	Quasi-Peak Adapter	2043A00358	08/23/01
Hewlett Packard	8447D	Preamp 0.1 - 1,000 MHZ	2944A06901	05/27/01
Hewlett Packard	8447D	Preamp 0.1 - 1,000 MHZ	1937A03247	06/06/01
Hewlett Packard	8449B	Preamp 1 - 26.5 GHz	3008A00320	11/30/02
Hewlett Packard	8648B	Signal Generator	3443U00312	05/13/01
Hewlett Packard	8672A	Signal Generator	2211A02426	05/06/01
Eaton	96005	Log Periodic Antenna	1099	11/20/01
Electro-Metrics	LPA 30	Log Periodic Antenna	2280	09/29/01
Electro-Metrics	BIA 30	Biconical Antenna	3852	09/29/01
Electro-Metrics	BIA 25	Biconical Antenna	4283	11/20/01
Electro-Mechanics	3115	Double Ridge Guide Ant.	3810	05/27/01
Electro-Metrics	ALR30M	Magnetic Loop Antenna	824	11/13/01
Solar	8012	LISN	924840	12/01/01
Solar	8028	LISN	829012/809022	11/02/01
Solar	8028	LISN	903725/903726	10/17/01
Schwartzbeck	MDS-21	Absorbing Clamp	02581	11/28/01
Leader	LFG1310	Function Generator	8060233	02/01/01
Holaday Ind.	HI 4422	Isotropic Probe	90310	04/18/01
IFR Systems	A-8000	Spectrum Analyzer	1306	06/08/01
Fischer Custom	F-33-1	RF Current Probe	360	09/08/01
Electro-Metrics	EMC-30	EMI Receiver	191	11/20/01
Boonton	4220A	RF Power Meter	204103AA	11/15/01
Boonton	51011	RF Power Meter	28823	11/15/01

PRODUCT EMISSIONS

PRODUCT SAFETY ENGINEERING

Data File: FLO2 FCC-B 06-25-2001

No	EMISSION FREQUENCY MHz	SPEC LIMIT dBuV/m	MEASUREMENTS			POL	SITE		CORR FACTOR dB	COMMENTS
			ABS	dLIM dB	MODE		HGT cm	AZM deg		
1	245.958	46.0	20.7	-25.3	PK	V	100	315		
2	257.233	46.0	25.8	-20.2	PK	V	100	315		
3	399.96	46.0	19.8	-26.2	PK	H	100	270		
4	486.98	46.0	26.3	-19.7	PK	V	100	315		
5	651.69	46.0	19.8	-26.2	PK	H	100	270		
6	686.51	46.0	20.6	-25.4	PK	H	100	270		
7	869.04	46.0	23.6	-22.4	PK	V	100	225		

J. GARNER *(Signature)*  
 DATE: 6/25


# NICE FL02

Measured @ 3 Meters

Frequency (GHz)	Spec Limit (dBμV/M)	Measurement (dBμV/M)	Δ Limit	Polarity	Height (cm)
0.434	90.4	75.0	-15.4	Horizontal	200
0.868	70.4	53.7	-16.7	Horizontal	200
1.302	70.4	53.4	-17.0	Horizontal	100
1.736	70.4	42.4	-28.0	Horizontal	100
2.170	70.4	53.0	-17.4	Horizontal	100
2.604	70.4	51.8	-18.6	Horizontal	100
3.038	70.4	65.4	-5.0	Horizontal	100
3.472	70.4	43.1	-27.3	Horizontal	100
3.906	70.4	48.3	-22.1	Horizontal	100
4.340	70.4	46.8	-23.6	Horizontal	100

Calculations used to adjust the limit for average detector.

Peak limit at (434) MHz = (80.8) dBuV/m

J. GARNER 
DATE: <u>6/25</u>

Non-Rolling Code pulse train = (12) pulses at (1.32) ms and (1) pulse at (0.66) ms within (50) ms.

Worst case "on time" = (16.5) ms;  $(20 \log(16.5/50)) = (9.6)$  dB average correction.

Average limit =  $(80.8) + (9.6) = (90.4)$  dBuV/m



PRODUCT SAFETY ENGINEERING  
REF 64.6 dBμV ATTEN 0 dB

MKR Δ 389.4 KHZ  
-0.65 dB

HP


5 dB/

POS PK

MARKER Δ  
389.4 KHZ  
-0.65 dB

DL  
59.0  
dBμV

J. GARNER  
DATE: 9/5

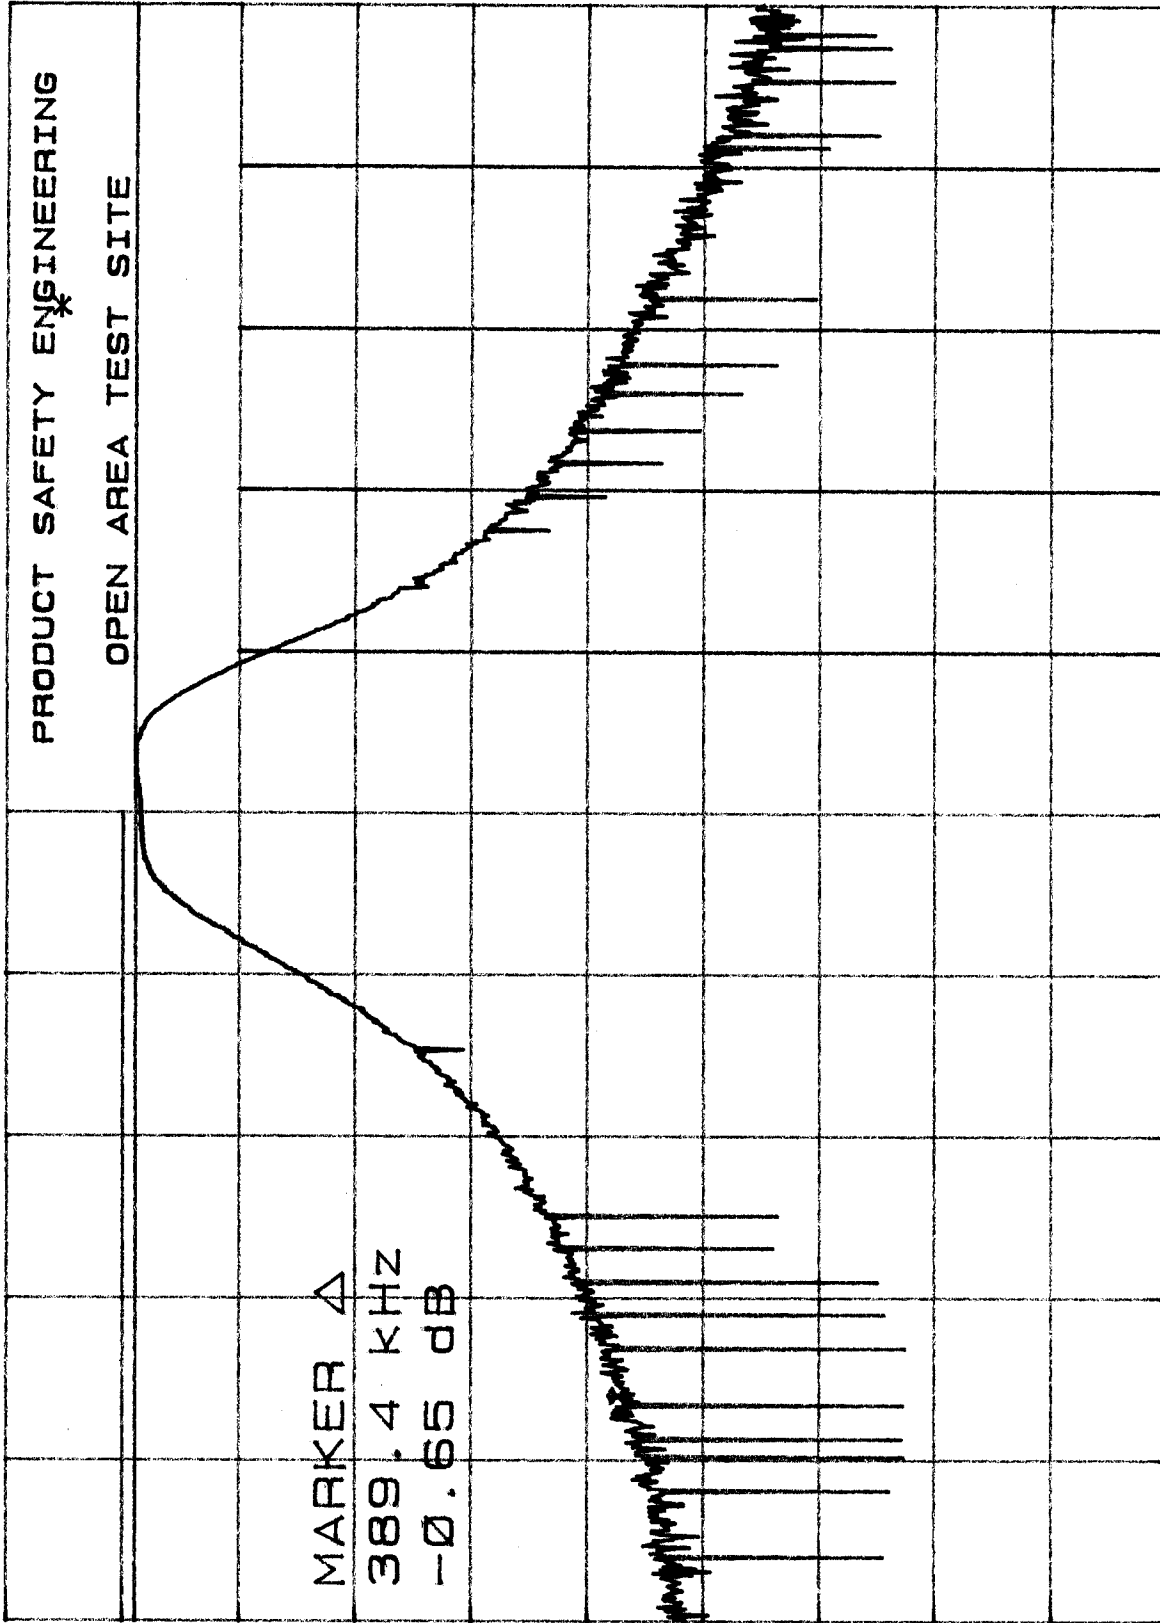

CENTER 499.917 MHZ  
RES BW 1 MHZ

VBW 1 MHZ

SPAN 599 KHZ  
SWP 100 msec

A5

# **APPENDIX**

## **B**

### **System Under Test Description**

# SYSTEM COMPONENTS

\*\*\*\*\*

DEVICE TYPE: EUT, NICE FL02

\*\*\*\*\*

# INTERFACE CABLES

\*\*\*\*\*

DEVICE TYPE: EUT            **N/A**

SHIELD:

LENGTH:

CONNECTOR TYPE:

PORT:

\*\*\*\*\*

# AC LINE CORDS

\*\*\*\*\*

DEVICE TYPE: EUT            **N/A**

SHIELD:

LENGTH:

CONNECTOR TYPE:

\*\*\*\*\*

# **APPENDIX**

## **C**

### **Measurement Protocol**

The test methodology followed during the collection of the data included within this technical report was ANSI C63.4:1992.

The EUT was powered with (120) VAC / (60) Hz during the collection of data included within.

The data is compared to the FCC Part 15 Class B limits.

The "EMI" instrumentation is capable of calculating the final emission level based on the following formula:

Level at the receiver (dB $\mu$ V) + Antenna Correction Factor (dB/M) + Cable Loss (dB) - Preamp Gain (dB) = Actual Level in dB $\mu$ V/M.

The sample calculation below is based on the actual test data collected:

Observed Level		<b>81.2</b>	dB $\mu$ V	
ACF	%	<b>17.2</b>	dB/M	
Cable Loss	%	<b>2.6</b>	dB	
Preamp Gain	&	<b><u>26.0</u></b>	dB	
Actual Level		<b>75.0</b>	dB $\mu$ V/M	@ 433.9 MHz

**Please have a company official review this report and sign.**

---