

ID Label/Location

NOTES:

1) LABEL MATERIAL:

* FACE SHEET.....GLOSS WHITE POLYESTER .002" THICK

* ADHESIVEACRYLIC. PRESSURE SENSITIVE.

ADHESIVE TO WITHSTAND TEMP. RANGE OF -40 C TO +150 C WITH
ZERO TO 100% HUMIDITY NON-CONDENSING FOR 20 YEAR PRODUCT LIFE.

* LINER.....SILICONE RELEASE .0026 THICK (NOMINAL)


2) PRINTING (PROCESS BLACK):

* ALL PRINTING TO BE DONE TO WITHSTAND TEMP. RANGE OF -40 C TO +150 C

WITH 0% TO 100% HUMIDITY NON-CONDENSING. INK MATERIAL SHALL BE

RESISTANT TO DEGRADATION FROM ULTRA-VIOLET LIGHT AND HUMIDITY AS
SPECIFIED IN UL 969 (MARKING AND LABELING SYSTEMS) OUTDOOR EXPOSURE TEST.

Drawing of label

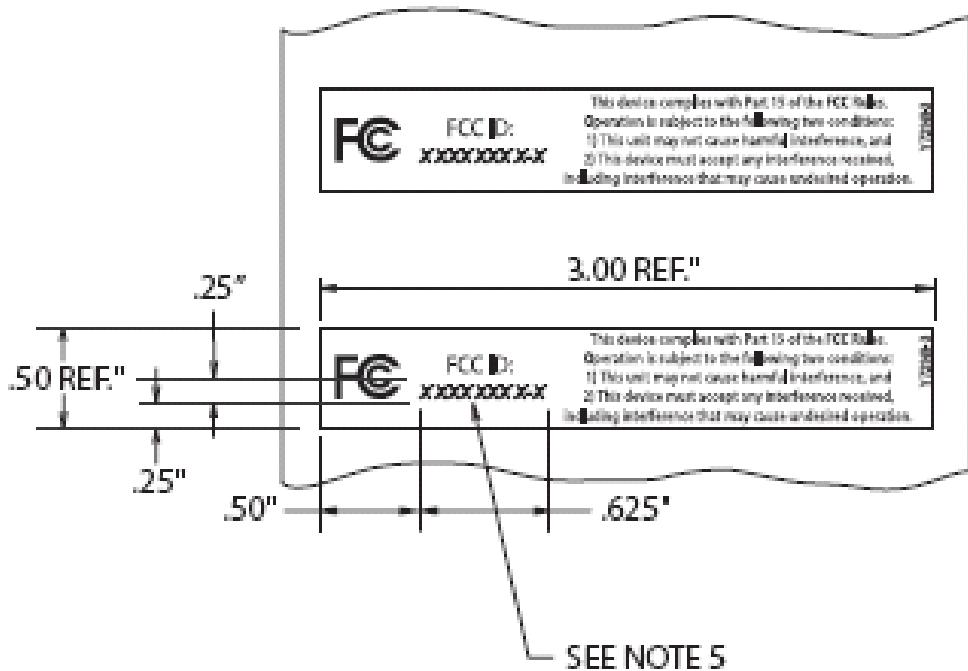

Photograph of EUT showing placement of label

