



**FCC 47 CFR PART 15 SUBPART C  
INDUSTRY (ISED) CANADA RSS-247 ISSUE 1**

**CERTIFICATION TEST REPORT**

**FOR**

**WIRELESS CAPABLE SECURITY CAMERA**

**HVIN: R12**

**PMN: AXIS M1065-LW**

**FCC ID: PNB-AXISM1065-LW**

**IC: 3919A-M1065LW**

**REPORT NUMBER: 11191821-E3**

**ISSUE DATE: 2016-09-21**

*Prepared for*  
**AXIS COMMUNICATIONS AB  
EMDALAVAGEN 14  
LUND  
SWEDEN, SE-223 69**

*Prepared by*  
**UL LLC  
12 LABORATORY DR.  
RESEARCH TRIANGLE PARK, NC 27709 USA  
TEL: (919) 549-1400**



NVLAP Lab code: 200246-0

Revision History

Ver.	Issue Date	Revisions	Revised By
1	2016-07-15	Initial Issue	Brian Kiewra
2	2016-07-21	Added model numbers and more EUT descriptive detail.	Brian Kiewra
3	2016-07-26	Added Line Conducted diagram.	Brian Kiewra
4	2016-08-11	Removed model variants, added HVIN and PMN. Made editorial changes to references throughout.	Brian Kiewra
5	2016-09-08	Lowered Bluetooth GFSK power data.	Brian Kiewra
6	2016-09-19	Lowered all Bluetooth power data. Retested output power, only (all other data considered worst-case at higher power setting). Included information on samples used for retesting in Section 5.6.	Jeff Moser
7	2016-09-20	Revised Test Equipment table, Section 6.	Jeff Moser
8	2016-09-21	Added clarifying information on power setting information and samples used.	Jeff Moser

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b>	<b>5</b>
<b>2. TEST METHODOLOGY</b>	<b>7</b>
<b>3. FACILITIES AND ACCREDITATION</b>	<b>7</b>
<b>4. CALIBRATION AND UNCERTAINTY</b>	<b>8</b>
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. SAMPLE CALCULATION	8
4.3. MEASUREMENT UNCERTAINTY	8
<b>5. EQUIPMENT UNDER TEST</b>	<b>9</b>
5.1. DESCRIPTION OF EUT	9
5.2. MAXIMUM OUTPUT POWER	9
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	9
5.4. SOFTWARE AND FIRMWARE	9
5.5. WORST-CASE CONFIGURATION AND MODE	10
5.6. DESCRIPTION OF TEST SETUP	11
<b>6. TEST AND MEASUREMENT EQUIPMENT</b>	<b>15</b>
<b>7. MEASUREMENT METHODS</b>	<b>18</b>
<b>8. ANTENNA PORT TEST RESULTS</b>	<b>19</b>
8.1. ON TIME AND DUTY CYCLE	19
8.2. BASIC DATA RATE GFSK MODULATION	21
8.2.1. 20 dB AND 99% BANDWIDTH	21
8.2.2. HOPPING FREQUENCY SEPARATION	26
8.2.3. NUMBER OF HOPPING CHANNELS	28
8.2.4. AVERAGE TIME OF OCCUPANCY	31
8.2.5. OUTPUT POWER	35
8.2.6. AVERAGE POWER	36
8.2.7. CONDUCTED SPURIOUS EMISSIONS	37
8.3. ENHANCED DATA RATE DQPSK MODULATION	42
8.3.1. 20 dB AND 99% BANDWIDTH	42
8.3.2. HOPPING FREQUENCY SEPARATION	47
8.3.3. NUMBER OF HOPPING CHANNELS	49
8.3.4. AVERAGE TIME OF OCCUPANCY	53
8.3.5. OUTPUT POWER	57

8.3.6.	AVERAGE POWER .....	58
8.3.7.	CONDUCTED SPURIOUS EMISSIONS.....	59
8.4.	<i>ENHANCED DATA RATE 8PSK MODULATION .....</i>	<i>64</i>
8.4.1.	20 dB AND 99% BANDWIDTH .....	64
8.4.2.	HOPPING FREQUENCY SEPARATION .....	69
8.4.3.	NUMBER OF HOPPING CHANNELS.....	71
8.4.4.	AVERAGE TIME OF OCCUPANCY .....	75
8.4.5.	OUTPUT POWER .....	79
8.4.6.	AVERAGE POWER .....	80
8.4.7.	CONDUCTED SPURIOUS EMISSIONS.....	81
<b>9.</b>	<b>RADIATED TEST RESULTS .....</b>	<b>86</b>
9.1.	<i>LIMITS AND PROCEDURE .....</i>	<i>86</i>
9.2.	<i>TRANSMITTER 1-18 GHz.....</i>	<i>87</i>
9.2.1.	BASIC DATA RATE GFSK MODULATION.....	87
9.2.2.	ENHANCED DATA RATE 8PSK MODULATION .....	94
9.3.	<i>WORST-CASE BELOW 1 GHz .....</i>	<i>101</i>
9.4.	<i>WORST-CASE 18 - 26GHz.....</i>	<i>102</i>
<b>10.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>103</b>
<b>11.</b>	<b>SETUP PHOTOS .....</b>	<b>106</b>

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** Axis Communications AB  
Emdalavagen 14  
Lund, Sweden, SE-223 69

**EUT DESCRIPTION:** Wireless Capable Security Camera

**HVIN:** R12  
**PMN:** AXIS M1065-LW

**SERIAL NUMBER:** Radiated: ACCC8E23D3A6  
Conducted: ACCC8E23D4CF, ACCC8E23D3B2,  
ACCC8E23D4CA (Power Only)

**DATE TESTED:** 2016-04-30 to 2016-06-22, 2016-08-24, 2016-09-15

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA (ISED CANADA) RSS-247 Issue 1	Pass
INDUSTRY CANADA (ISED CANADA) RSS-GEN Issue 4	Pass

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL LLC based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released  
For UL LLC By:



Jeffrey Moser  
EMC Program Manager  
UL – Consumer Technology Division

Prepared By:

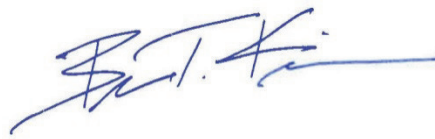

Brian Kiewra  
EMC Engineer  
UL – Consumer Technology Division

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013, RSS-GEN Issue 4, RSS-247 Issue 1.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 12 Laboratory Dr., Research Triangle Park, NC 27709, USA and 2800 Suite B, Perimeter Park Drive, Morrisville, NC 27560.

12 Laboratory Dr., RTP, NC 27709	
<input type="checkbox"/>	Chamber A
<input type="checkbox"/>	Chamber C

2800 Suite B Perimeter Park Dr., Morrisville, NC 27560	
<input type="checkbox"/>	Chamber NORTH
<input checked="" type="checkbox"/>	Chamber SOUTH

The onsite chambers are covered under ISED Canada company address code 2180C with site numbers 2180C -1 through 2180C-4, respectively.

UL LLC (RTP) is accredited by NVLAP, Laboratory Code 200246-0. The full scope of accreditation can be viewed at <http://www.nist.gov/nvlap/>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned}\text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m}\end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Total RF power, conducted	± 0.45 dB
RF power density, conducted	± 1.5 dB
Spurious emissions, conducted	± 2.94 dB
All emissions, radiated up to 40 GHz	± 5.36 dB
Temperature	± 0.07°C
Humidity	± 2.26% RH
DC and low frequency voltages	± 1.27%
Conducted Emissions (0.150-30MHz)	± 2.37dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a network surveillance camera that contains an 802.11 a/b/g/n and Bluetooth transceivers, manufactured by AXIS Communications AB, Lund, SWEDEN.

The EUT is provided with an Axis PS-U05 rev. 1 power supply.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	7.35	5.43
2402 - 2480	DQPSK	5.37	3.44
2402 - 2480	Enhanced 8PSK	5.72	3.73

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an internal inverted-f type antenna. The peak antenna gain is +1.3 dBi for 2.4 GHz band.

### 5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 6.15\_beta52.  
Special test firmware used for EMC was 15+snapshot\_20160511 (this firmware allows for simultaneously operation for Bluetooth and WLAN in order to reduce test set-ups).

## **5.5. WORST-CASE CONFIGURATION AND MODE**

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Manufacturer stated that EUT is only intended to operate installed in mounting bracket which is one fixed orientation; therefore, all final radiated testing was performed in stated position.

For Enhanced Data rate modes, 8DPSK is considered worst-case and only select tests were performed for the DQPSK mode. Additionally, unless noted in the test report, all tests were performed with the DH5 packet size as this was considered worst-case.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Lenovo	T440	RTP1014PC015NUR	NA
Bluetooth Tester	R&S	CBT	100913	NA

### I/O CABLES

I/O Cable List					
Cable No	Port	# of Identical ports	Connector Type	Cable Length (m)	Remarks
1	Antenna Port	1	RF	0.1m	NA
2	AC Mains	1	AC	>1m	NA
3	Ethernet	1	RJ45	>1m	CAT5E

### TEST SETUP

Test software exercised the radio card.

### SAMPLES USED

Radiated: ACCC8E23D3A6


Conducted: ACCC8E23D4CF, ACCC8E23D3B2, ACCC8E23D4CA (Power Only)

Note – Re-testing was required of the transmitter output power with reduced EUT power settings. All other tests were performed at the higher power settings (considered worst case).


Test	Power Level	Comment
20 dB/99% OBW	Maximum allowed	This was the default setting provided.
Hopping Frequency	Maximum allowed	This was the default setting provided.
Number of Hopping Channels	Maximum allowed	This was the default setting provided.
Average Time of Occupancy	Maximum allowed	This was the default setting provided.
Output Power	Reduced	Reduced power setting.
Conducted Emissions	Maximum allowed	This was the default setting provided.
Radiated Emissions	Maximum allowed	This was the default setting provided.
Line Conducted Emissions	Maximum allowed	This was the default setting provided.

### **SETUP DIAGRAM FOR TESTS**


#### **Conducted Setup**

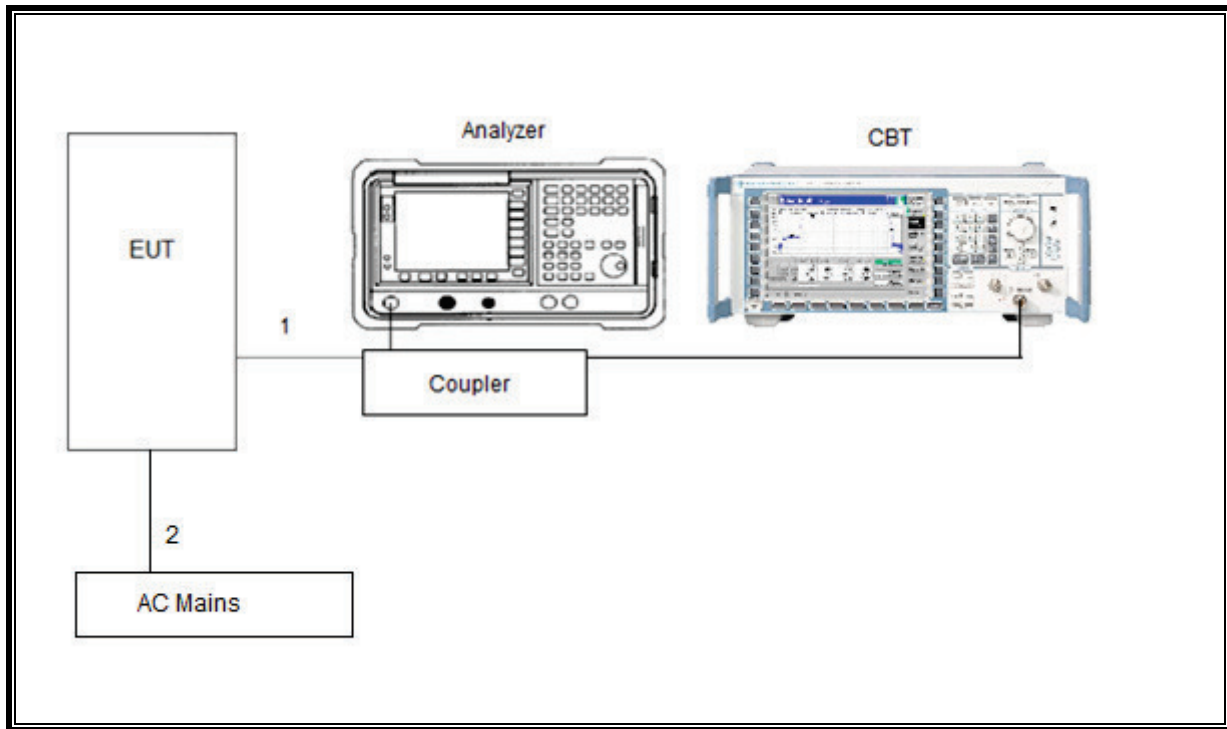

## Radiated Setup

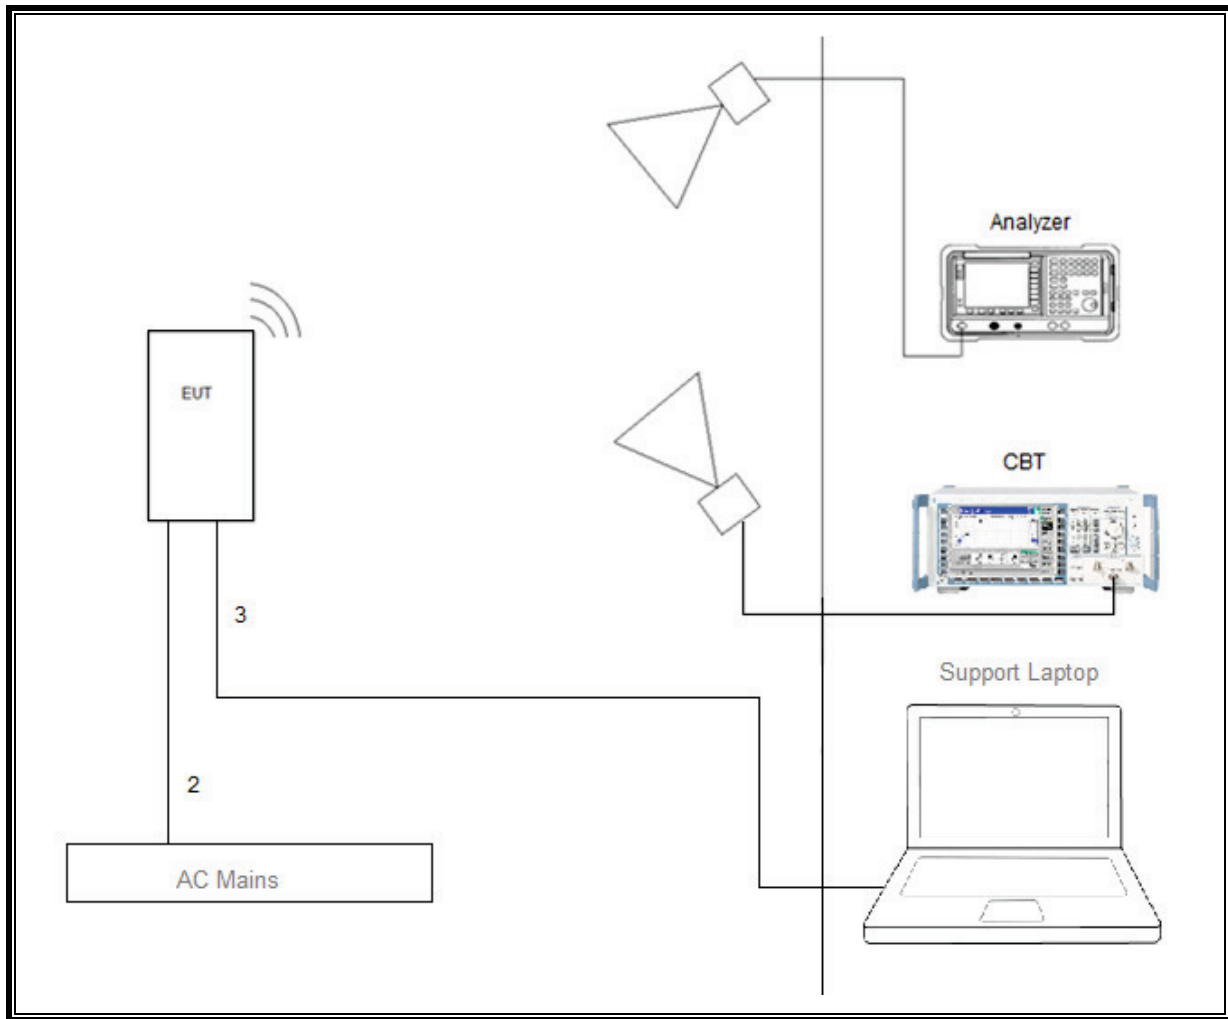

## Line Conducted Setup

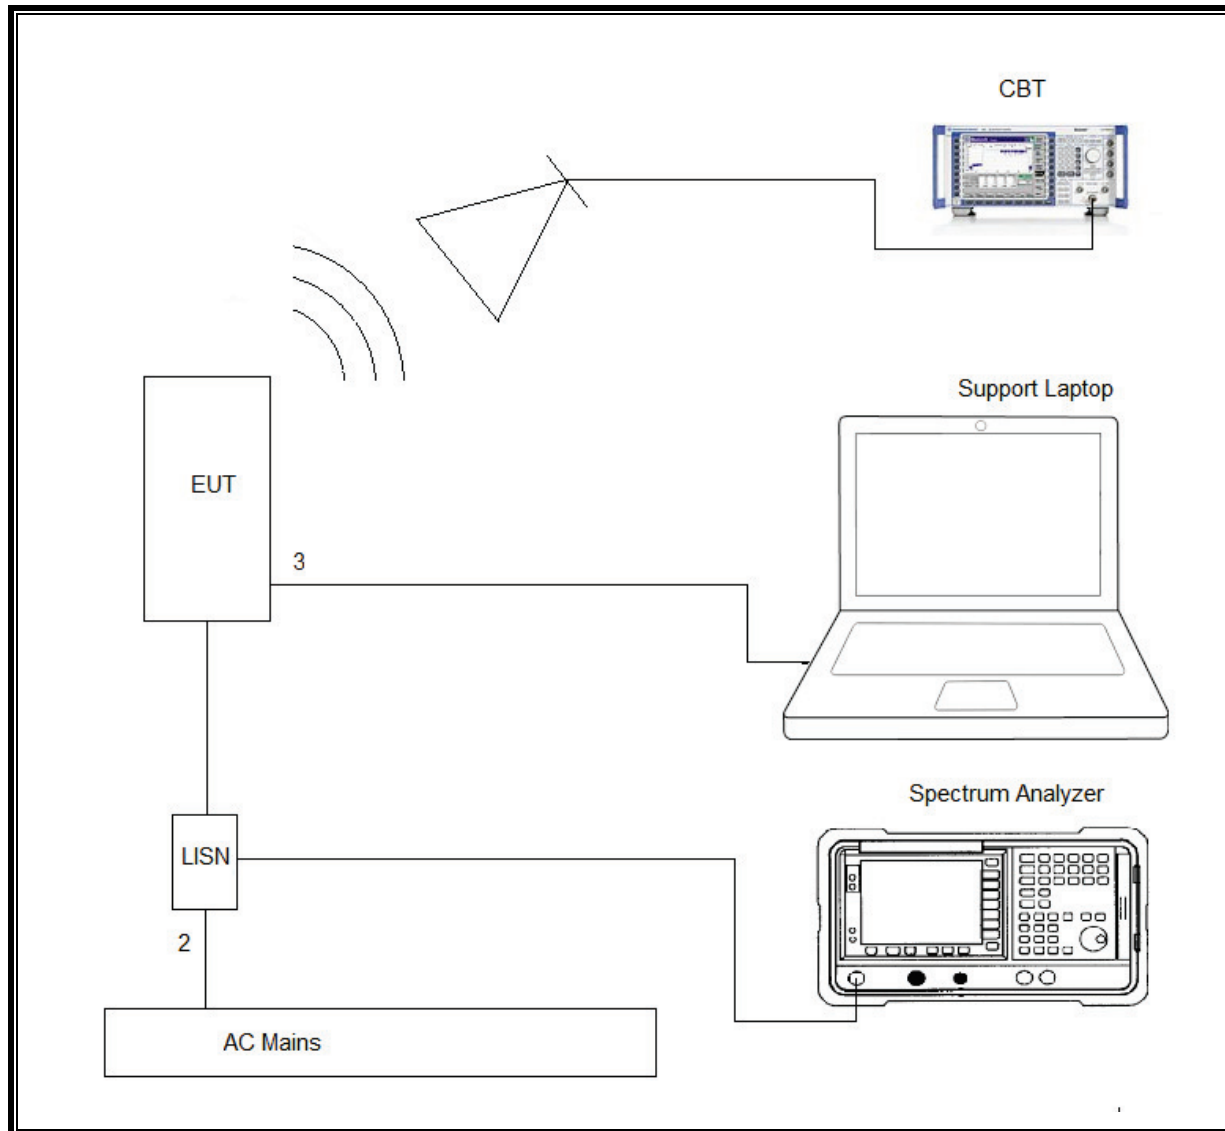

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville - South Chamber)

Equip. ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
	<b>0.009-30MHz</b>	<b>(Loop Ant.)</b>			
AT0079	Active Loop Antenna	ETS-Lindgren	6502	2015-12-08	2016-12-31
	<b>30-1000 MHz</b>				
AT0074	Hybrid Broadband Antenna	Sunol Sciences Corp.	JB3	2016-06-07	2017-06-30
	<b>1-18 GHz</b>				
AT0069	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2016-03-07	2017-03-31
	<b>18-40 GHz</b>				
AT0076	Horn Antenna, 18-26.5GHz	ARA	MWH-1826/B	2015-08-27	2016-08-31
	<b>Gain-Loss Chains</b>				
S-SAC01	Gain-loss string: 0.009-30MHz	Various	Various	2015-10-07	2016-10-31
S-SAC02	Gain-loss string: 30-1000MHz	Various	Various	2015-06-09	2016-06-30
S-SAC03	Gain-loss string: 1-18GHz	Various	Various	2015-08-22	2016-08-31
S-SAC04	Gain-loss string: 18-40GHz	Various	Various	2016-02-29	2017-02-28
	<b>Receiver &amp; Software</b>				
SA0025	Spectrum Analyzer	Agilent	N9030A	2016-03-17	2017-03-31
SA0026 (18-40GHz RSE)	Spectrum Analyzer	Agilent	N9030A	2016-02-24	2017-02-28
SOFTEMI	EMI Software	UL	Version 9.5	NA	NA
	<b>Additional Equipment used</b>				
HI0050	Temp/Humid/Pressure Meter	Cole-Parmer	99760-00	2015-07-01	2016-07-31
77491	CBT Blue Tooth Tester	Rohde & Schwarz	1153.9000.35	NA	NA

Note 1 – CBT was used to assist in controlling the EUT and not to measure emissions.

Note 2 – This test area was used prior to 2016-06-30.

Test Equipment Used - Wireless Conducted Measurement Equipment

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
<b>Conducted Room 1</b>					
SA0019	Spectrum Analyzer	Agilent Technologies	E4446A	2015-09-02	2016-09-30
PWM004	RF Power Meter	Keysight Technologies	N1911A	2015-06-08, 2016-06-22	2016-06-30, 2017-06-22
PWS004	Peak and Avg Power Sensor, 50MHz to 6GHz	Keysight Technologies	E9323A	2015-06-05, 2016-06-22	2016-06-30, 2017-06-22
HI0079	Temp/Humid/Pressure Meter	Springfield	PreciseTemp	2015-07-01	2016-07-31
HI0078	Temp/Humid/Pressure Meter	Springfield	PreciseTemp	2016-06-13	2017-06-13
<b>Conducted Room 2</b>					
SA0020	Spectrum Analyzer	Agilent Technologies	E4446A	2016-03-22	2017-03-31
PWM003	RF Power Meter	Keysight Technologies	N1911A	2015-06-08, 2016-06-21	2016-06-30, 2017-06-21
PWS003	Peak and Avg Power Sensor, 50MHz to 6GHz	Keysight Technologies	E9323A	2015-06-05, 2016-06-21	2016-06-30, 2017-06-21
HI0080	Temp/Humid/Pressure Meter	Springfield	PreciseTemp	2015-07-01	2016-07-31
HI0078	Temp/Humid/Pressure Meter	Springfield	PreciseTemp	2016-06-13	2017-06-13
<b>Common Equipment</b>					
77491	CBT Blue Tooth Tester	Rohde & Schwarz	1153.9000.35	NA	NA

Note 1 – CBT was used to assist in controlling the EUT and not to measure emissions.

Test Equipment Used - Line-Conducted Emissions – Voltage (Morrisville – Conducted 1)

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
CBL077	Coax cable, RG223, N-male to BNC-male, 20-ft.	Pasternack	PE3476-240	2016-06-15	2017-06-30
HI0079	Temp/Humid/Pressure Meter	Springfield Precision	PreciseTemp	2015-07-01	2016-07-31
LISN003	LISN, 50-ohm/50-uH, 2-conductor, 25A	Fischer Custom Com.	FCC-LISN-50-25-2-01-550V	2015-08-24	2016-08-31
LISN008	LISN, 50-ohm/50-uH, 2-conductor, 25A (For support gear only.)	Solar Electronics	8012-50-R-24-BNC	2015-09-03	2016-09-30
MM0167	Multi-meter	Agilent	U1232A	2015-08-17	2016-08-31
PRE0101521 (75141)	EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESCI 7	2015-08-26	2016-08-31
TL001	Transient Limiter, 0.009-30MHz	Com-Power	LIT-930A	2016-06-09	2017-06-30
PS214	AC Power Source	Elgar	CW2501M (s/n 1523A02396)	NA	NA
PS215	AC Power Source	Elgar	CW2501M (s/n 1523A02397)	NA	NA
SOFTEMI	EMI Software	UL	Version 9.5	NA	NA
	<b>Miscellaneous (if needed)</b>				
CDECABLE001	ANSI C63.4 1m extension cable.	UL	Per Annex B of ANSI C63.4	2016-06-04	2017-06-30
77491	CBT Blue Tooth Tester	Rohde & Schwarz	1153.9000.35	NA	NA

Note 1 – CBT was used to assist in controlling the EUT and not to measure emissions.

Note 2 – This test area was used prior to 2016-06-30.

## 7. MEASUREMENT METHODS

Duty Cycle: KDB 558074 Zero-Span Spectrum Analyzer Method

20 dB BW: ANSI C63.10 Section 6.9.2.

99% Occupied Bandwidth: ANSI C63.10-2013, Section 6.9.3

Hopping Frequency Separation: ANSI C63.10 Section 7.8.2

Number of Hopping Channels: ANSI C63.10 Section 7.8.3

Average Time of Occupancy: ANSI C63.10 Section 7.8.4

Output Power: ANSI C63.10 Section 7.8.5

Out-of-band emissions in non-restricted bands: ANSI C63.10 Section 7.8.6 & 7.8.8

Out-of-band emissions in restricted bands: ANSI C63.10:2013 Sections 6.3-6.6

Line Conducted Emissions: ANSI C63.10:2013 Sections 6.2

## 8. ANTENNA PORT TEST RESULTS

### 8.1. ON TIME AND DUTY CYCLE

#### LIMITS

None; for reporting purposes only.

#### PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method.

#### ON TIME AND DUTY CYCLE RESULTS



Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (kHz)
<b>2.4 GHz band (Hopping OFF)</b>						
Bluetooth GFSK	2.877	3.753	0.767	76.66%	1.15	0.348
Bluetooth 8PSK	2.893	3.753	0.771	77.08%	1.13	0.346

Tested by: John Manser  
Test date: 2016-06-21

Note – This test was performed at the maximum allowed power setting.

## DUTY CYCLE PLOTS

### HOPPING OFF

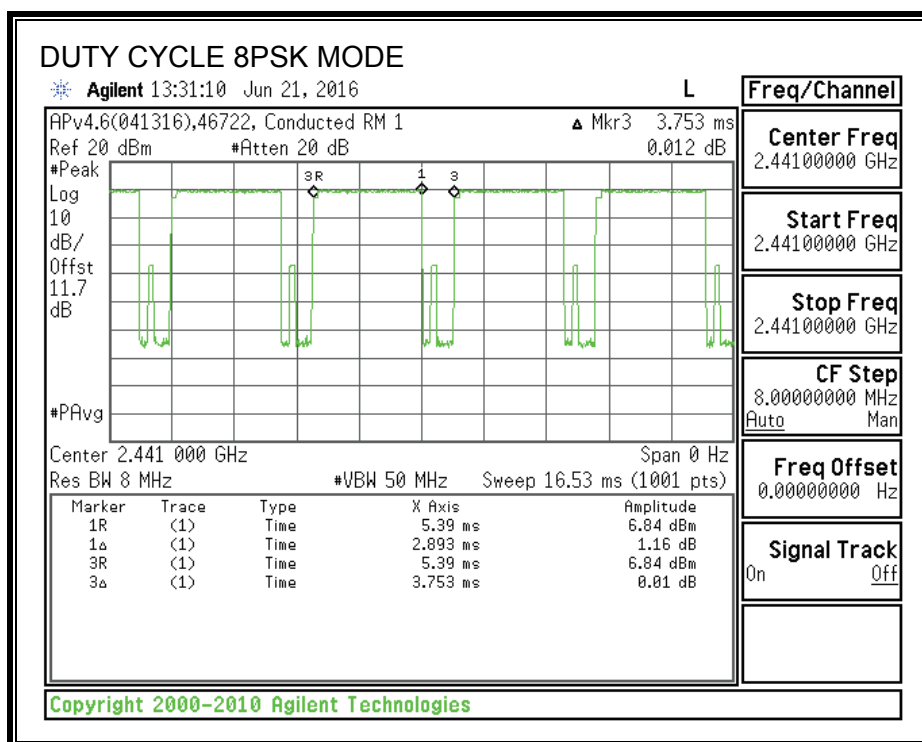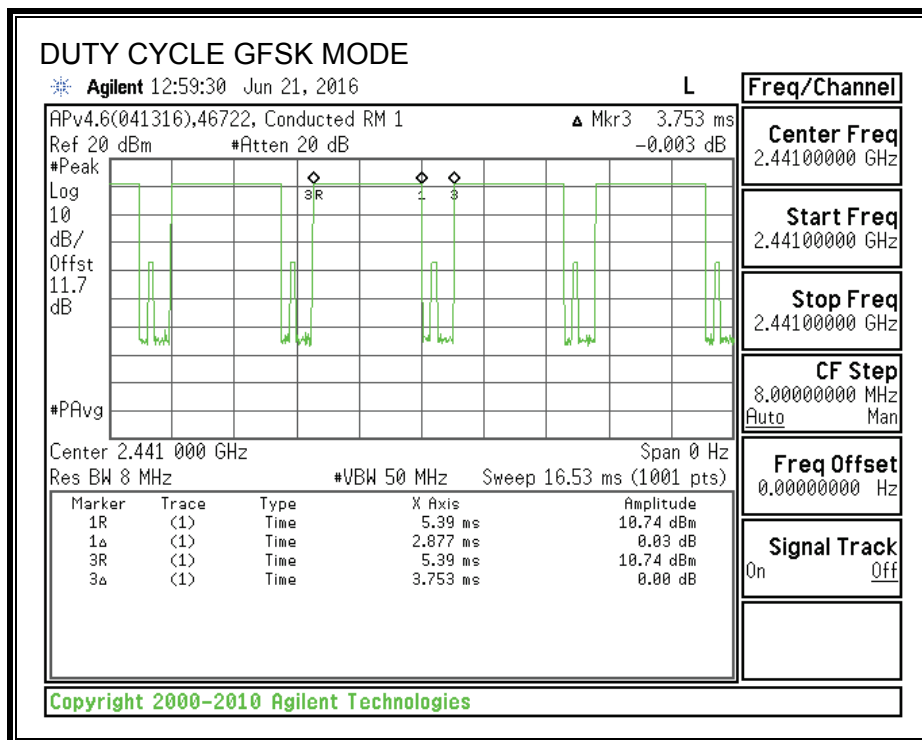

## 8.2. BASIC DATA RATE GFSK MODULATION

### 8.2.1. 20 dB AND 99% BANDWIDTH

#### LIMIT

None; for reporting purposes only. Test per FCC §15.247(a)(1); IC RSS-247 5.1 (1), RSS-Gen 6.6.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 1-5% of the 20 dB bandwidth and 99% Occupied Bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.



#### RESULTS


Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	926	895.3602
Middle	2441	932	892.6724
High	2480	938	889.7382

Tested by: John Manser  
Test date: 2016-06-21



Note – This test was performed at the maximum allowed power setting.


## 20 dB BANDWIDTH

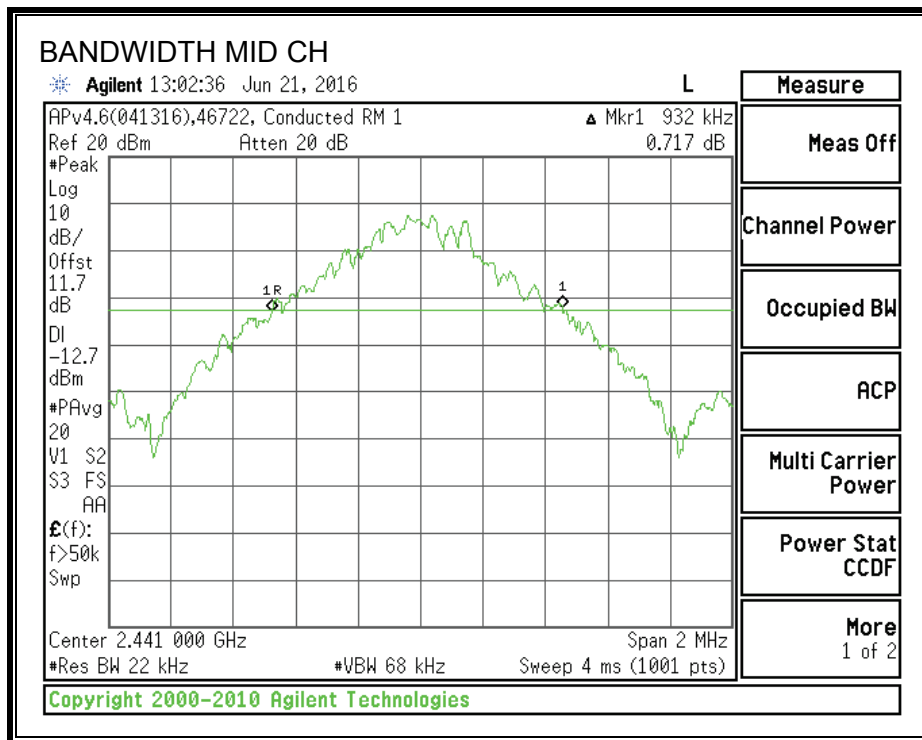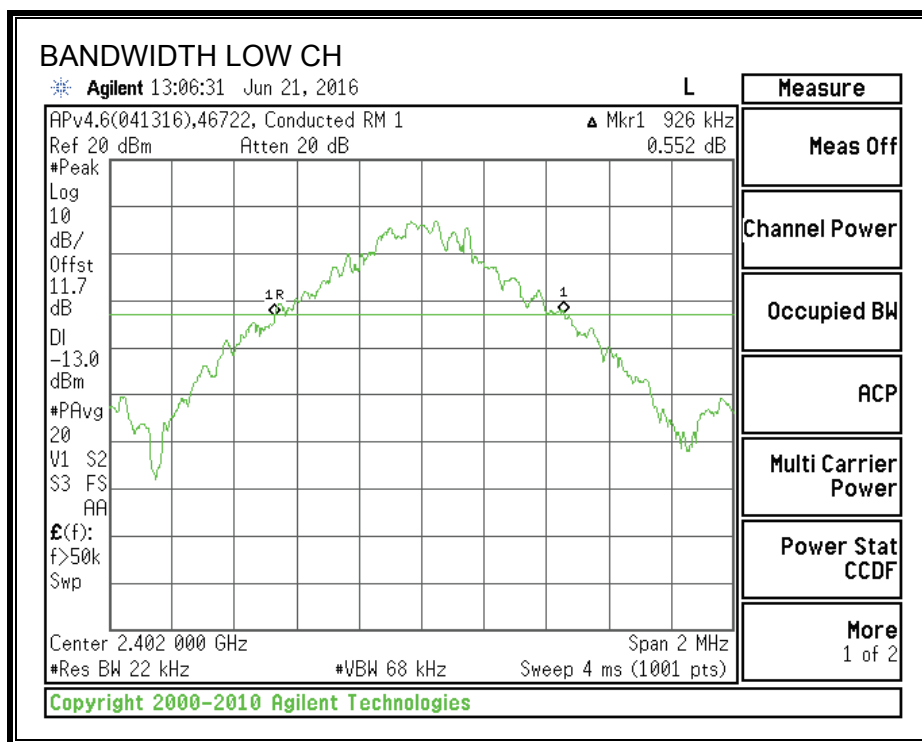

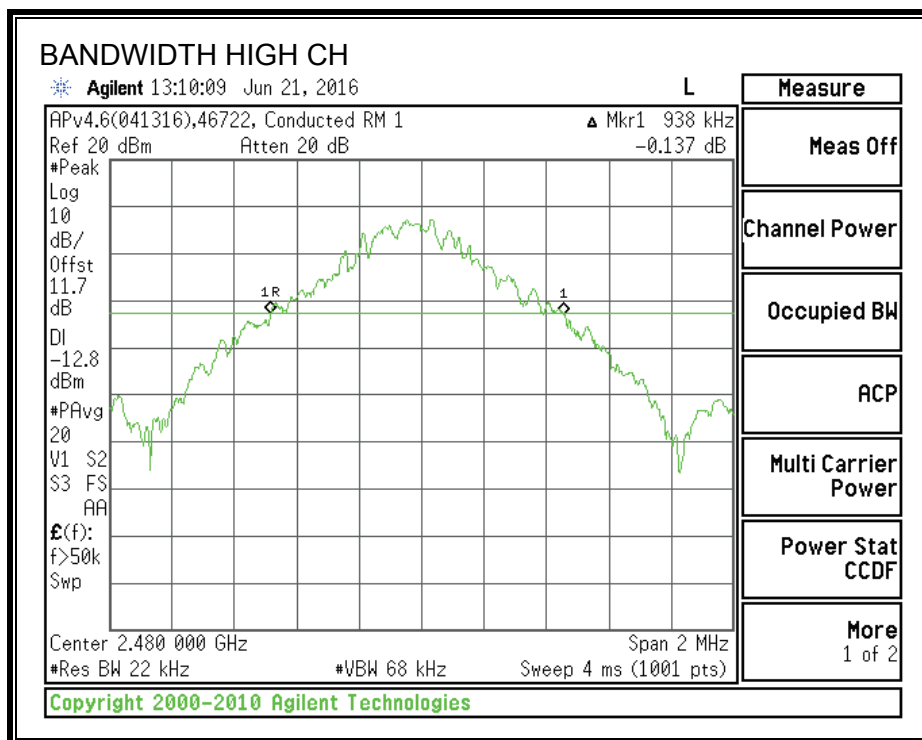

# **99% BANDWIDTH**

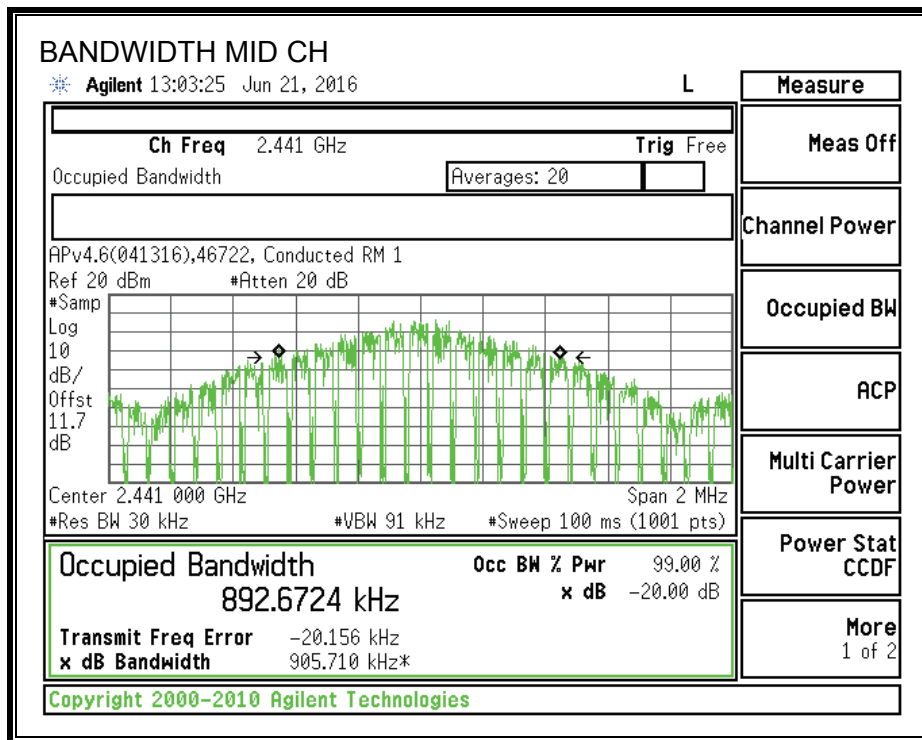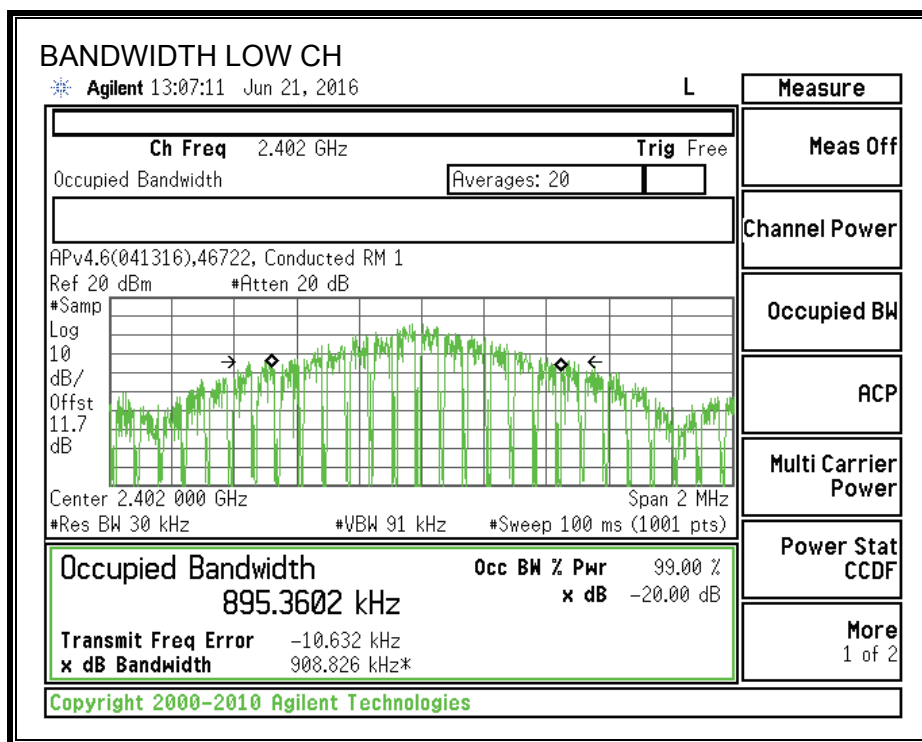

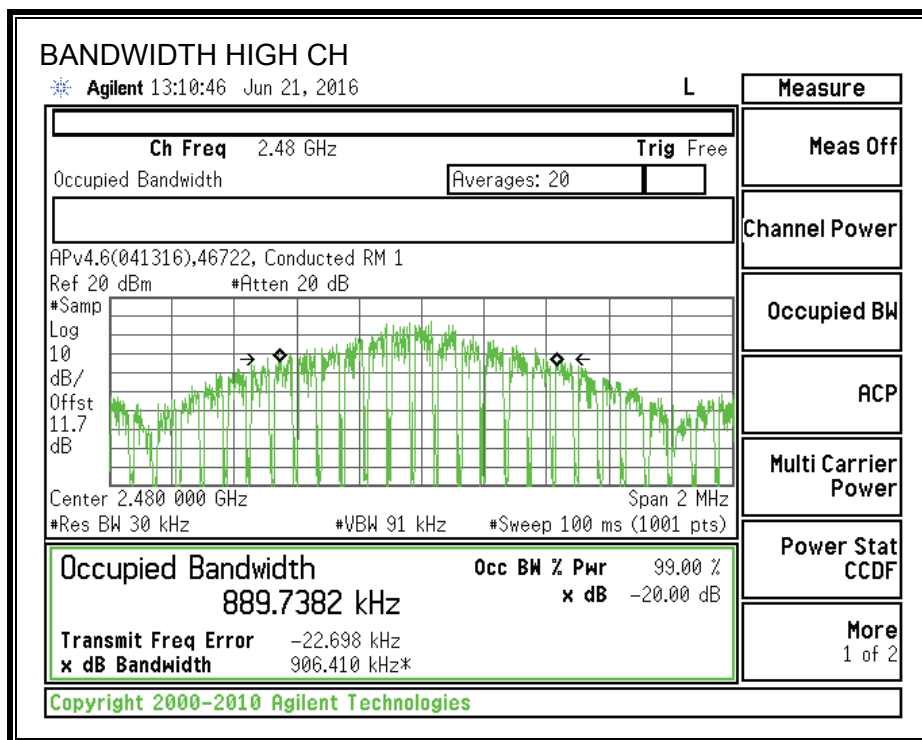

## **8.2.2. HOPPING FREQUENCY SEPARATION**

### **LIMIT**

FCC §15.247 (a) (1)

IC RSS-247 5.1 (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 3x RBW. The sweep time is coupled.


### **RESULTS**

Tested by: John Manser

Test date: 2016-06-21

Note – This test was performed at the maximum allowed power setting.

# HOPPING FREQUENCY SEPARATION

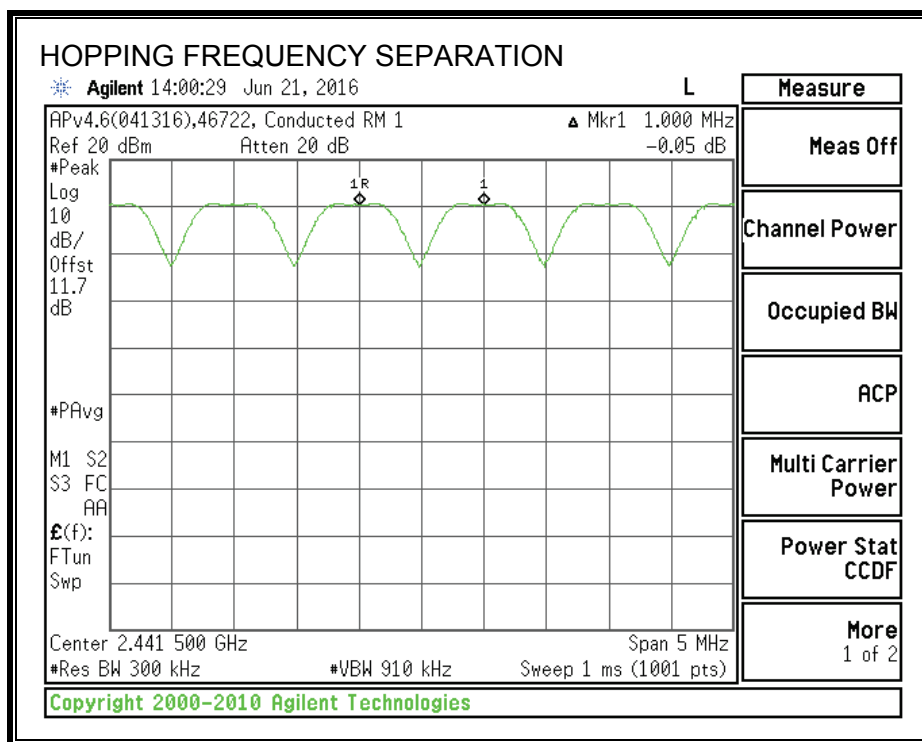

Ch. A	Ch. B	Ch. 1 to Ch. 2 Sep.	Max. 20 dB BW	Margin
(MHz)	(MHz)	(MHz)	(MHz)	(MHz)
2441	2442	1.000	0.938	-0.062

### **8.2.3. NUMBER OF HOPPING CHANNELS**

#### **LIMIT**

FCC §15.247 (a) (1) (iii)

IC RSS-247 5.1 (4)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

#### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps for visibility of the entire span. Then, smaller spans are set to more clearly identify the channels. The RBW is set to 30% of the channel spacing (approx. 300 kHz). The analyzer is set to Max Hold.



#### **RESULTS**



Normal Mode: 79 Channels observed.

Tested by: John Manser  
Test date: 2016-06-21

Note – This test was performed at the maximum allowed power setting.

# NUMBER OF HOPPING CHANNELS

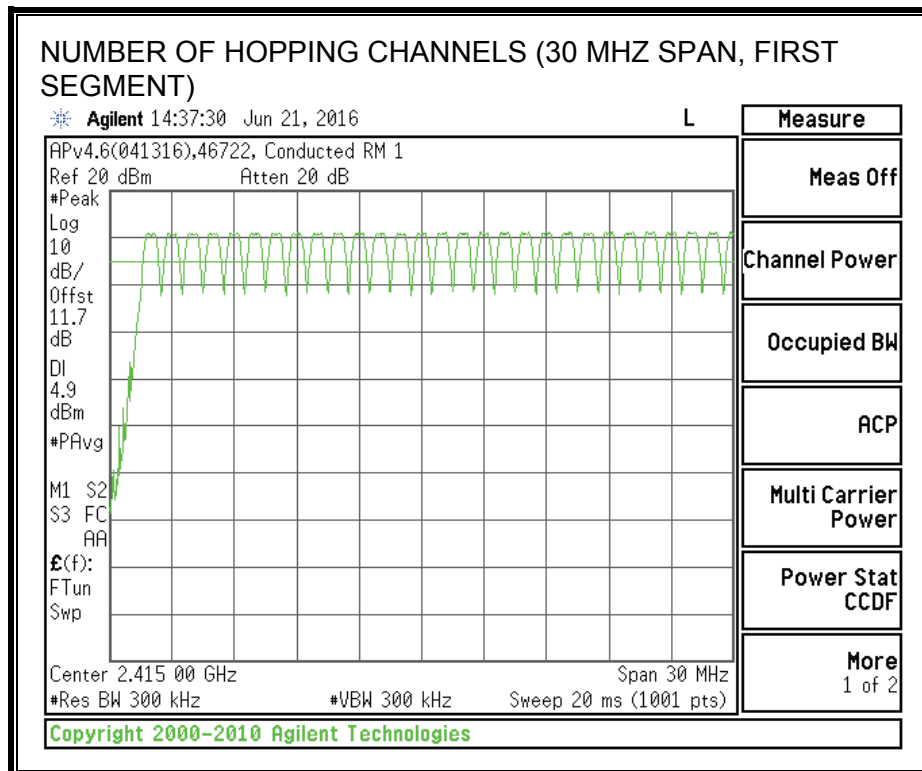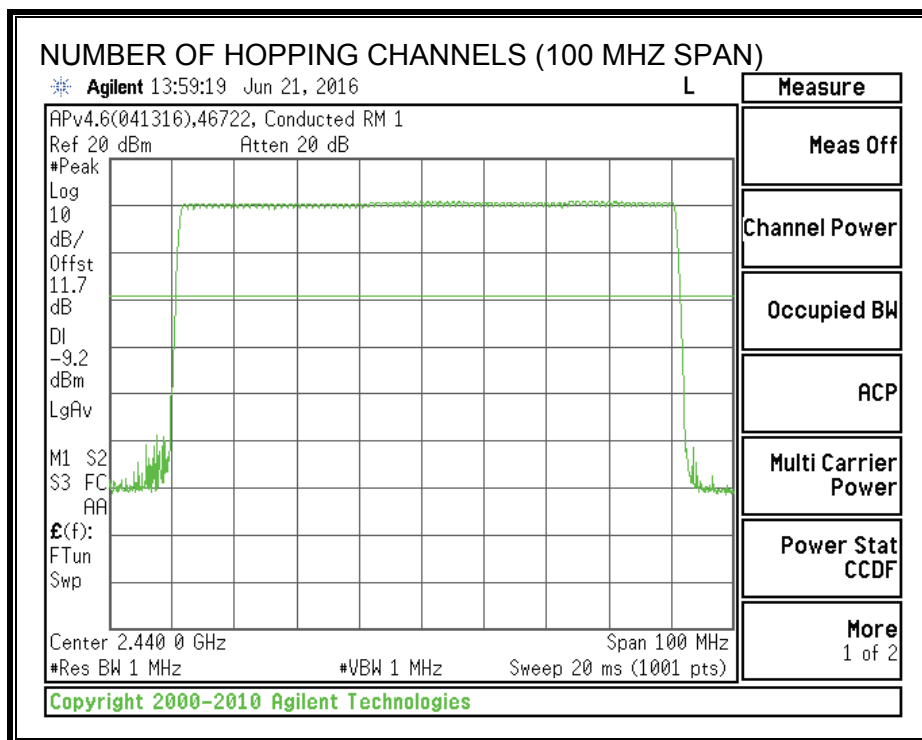

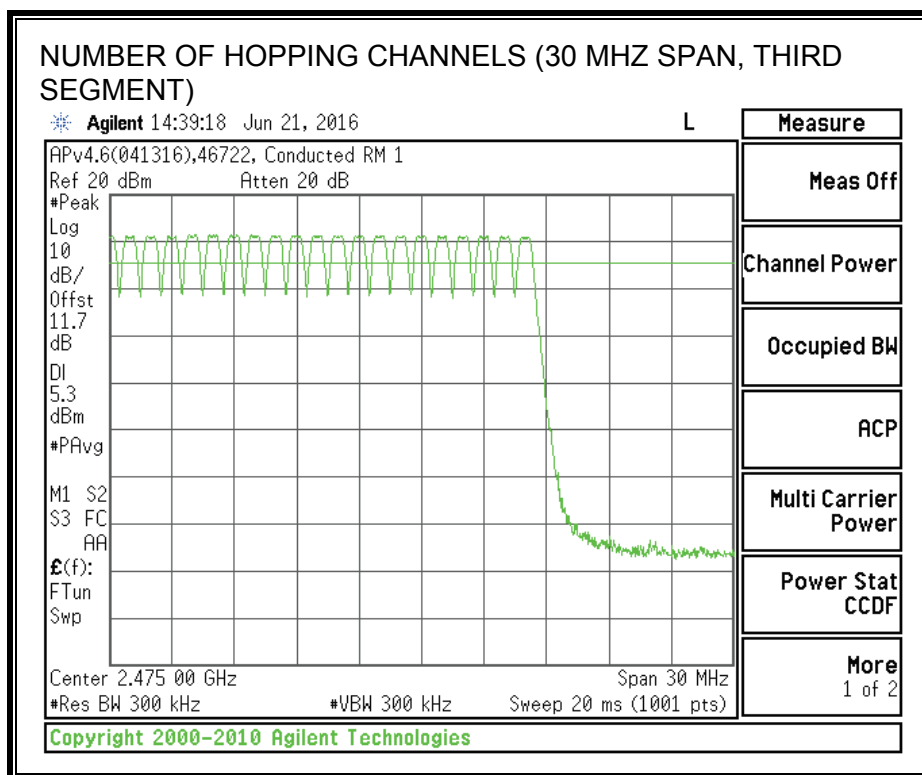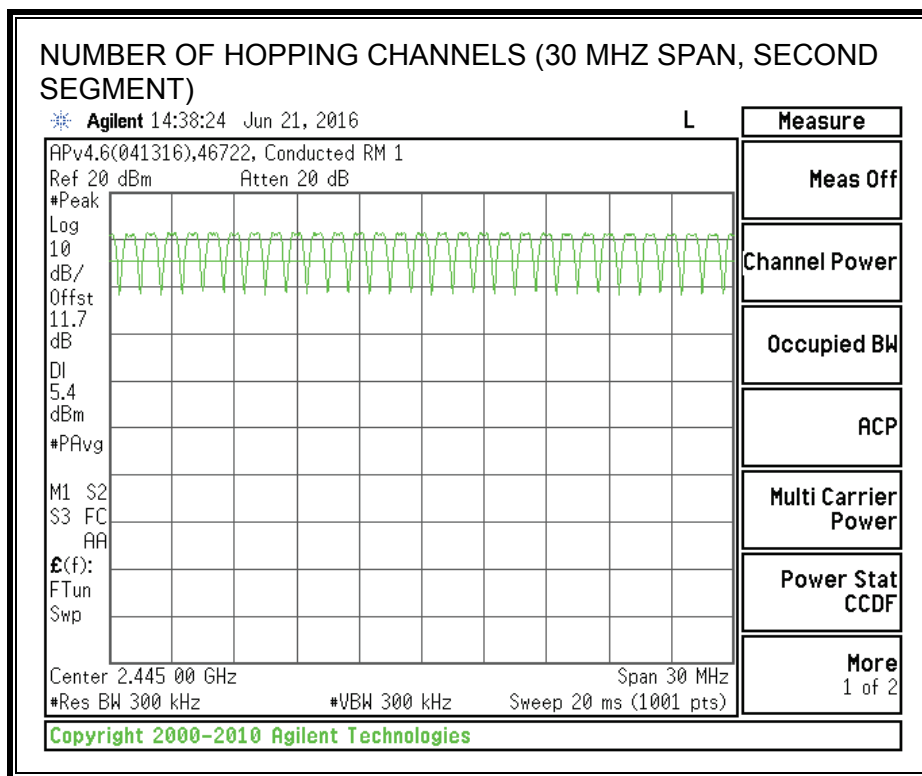

## 8.2.4. AVERAGE TIME OF OCCUPANCY

### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 5.1 (4)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$ .

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels \* 0.4 seconds) is equal to  $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{pulse width}$ .

### RESULTS



DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK Normal Mode					
DH1	0.412	31	0.128	0.4	-0.272
DH3	1.666	18	0.300	0.4	-0.100
DH5	2.92	13	0.380	0.4	-0.020
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
GFSK AFH Mode					
DH1	0.412	7.75	0.032	0.4	-0.368
DH3	1.666	4.5	0.075	0.4	-0.325
DH5	2.92	3.25	0.095	0.4	-0.305

Tested by: John Manser



Test date: 2016-06-21 to 2016-06-22

Note – This test was performed at the maximum allowed power setting.



# PULSE WIDTH - DH1

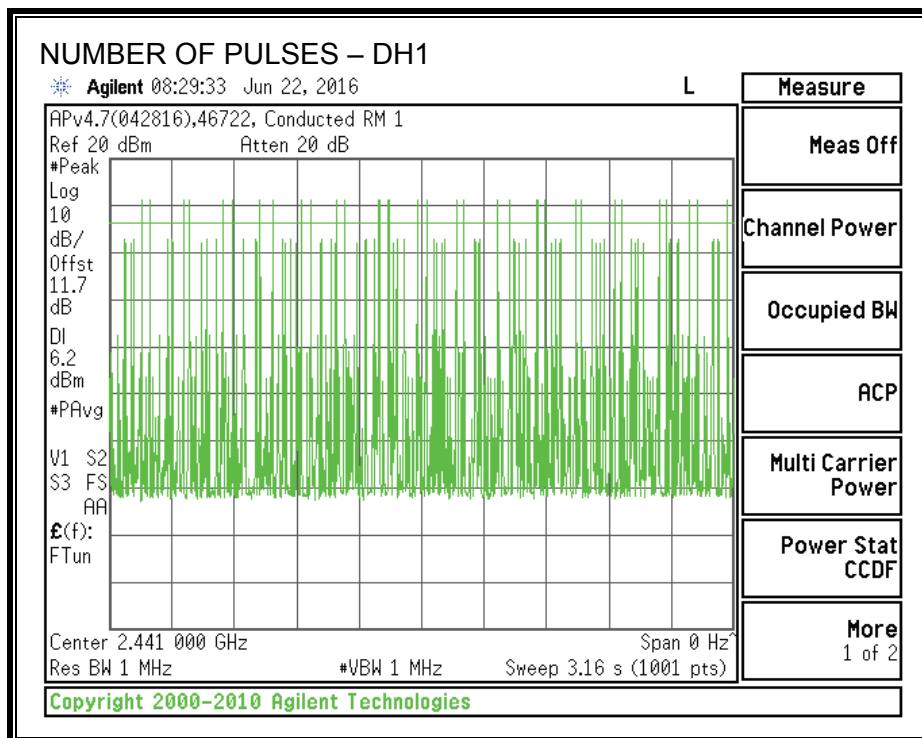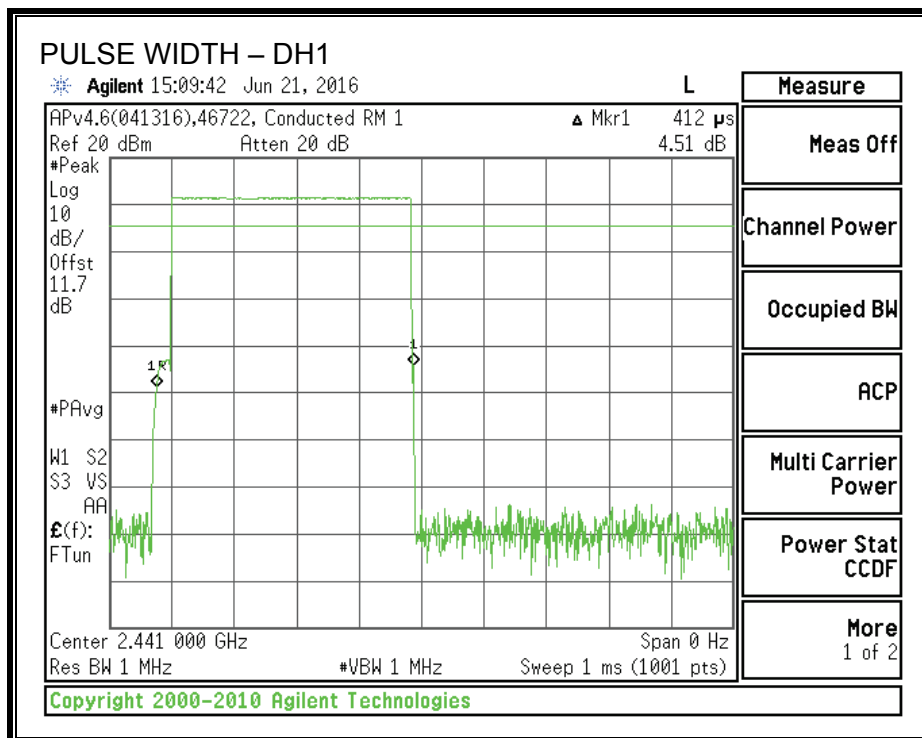

# **PULSE WIDTH – DH3**

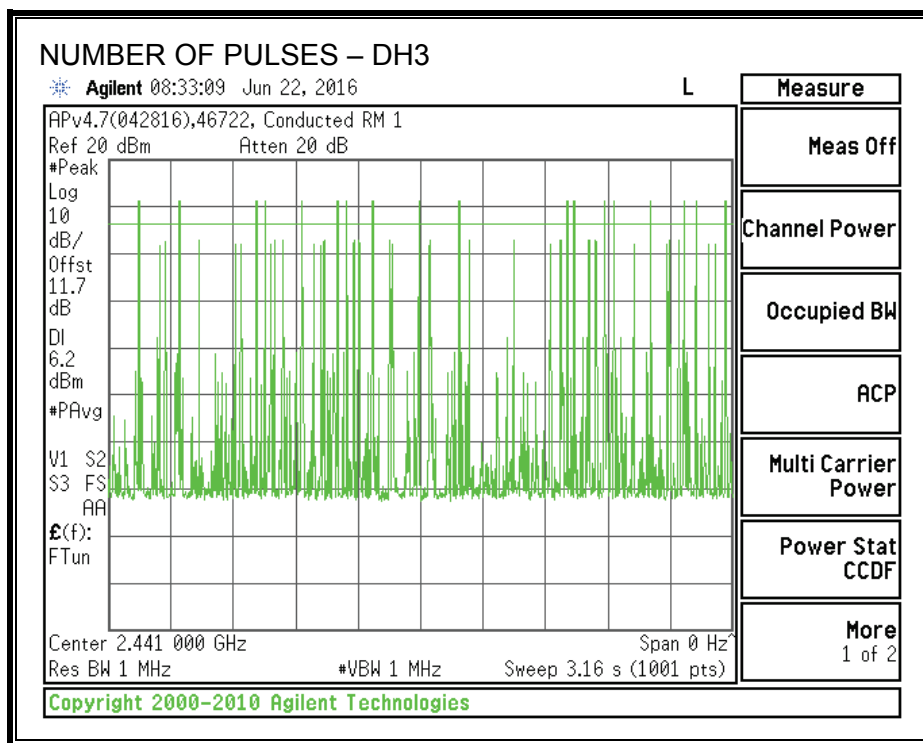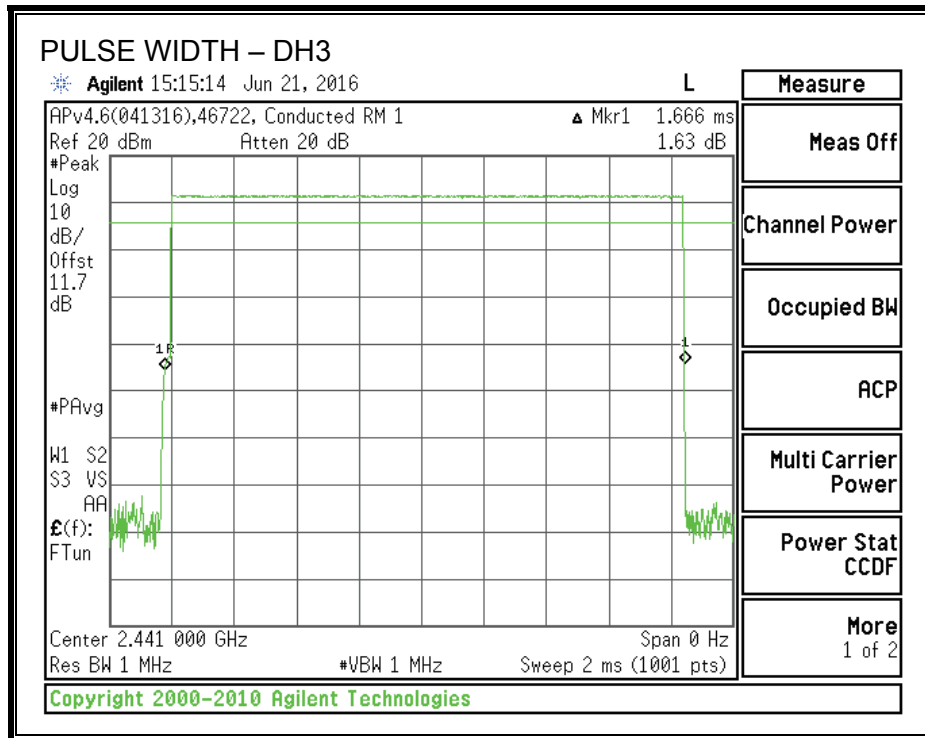

# PULSE WIDTH – DH5

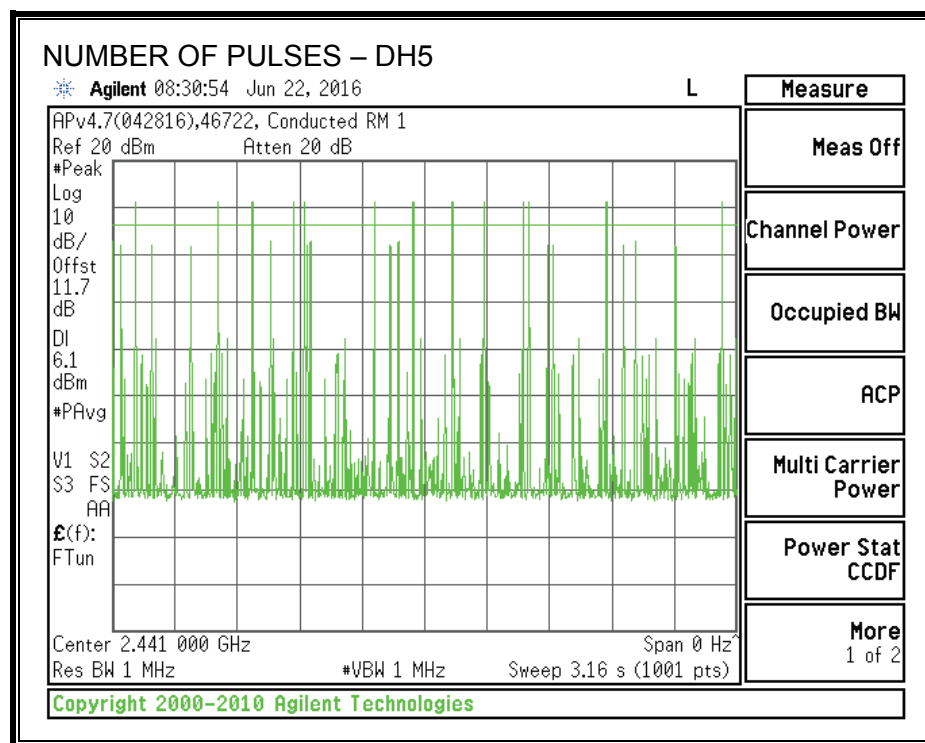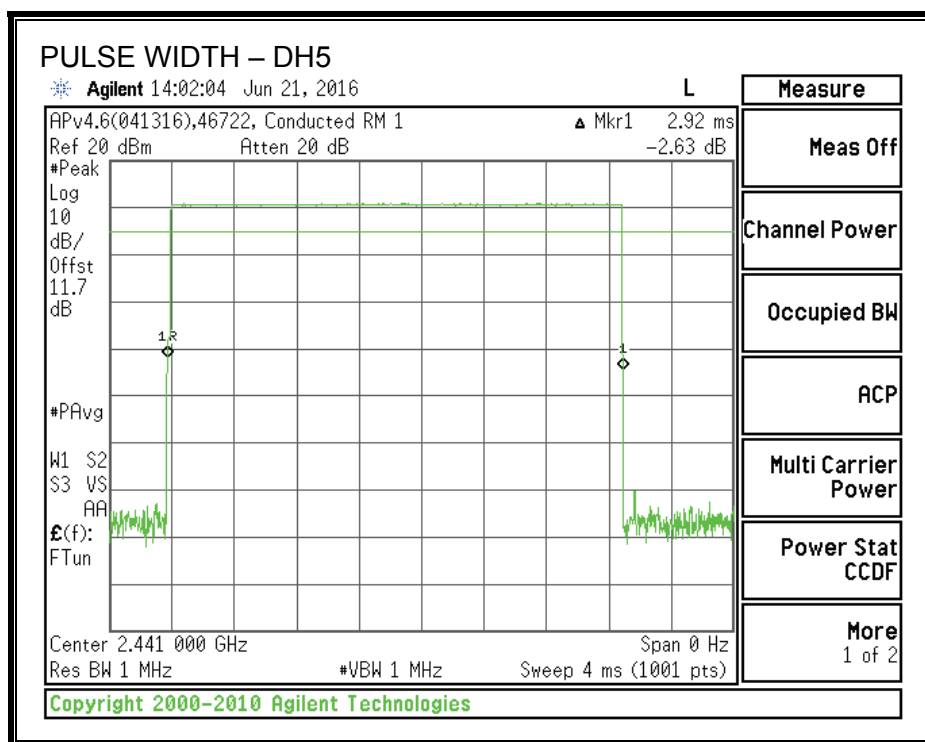

## 8.2.5. OUTPUT POWER

### LIMIT

§15.247 (b) (1)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247 5.4 (2)

For frequency hopping systems operating in the band 2400-2483.5 MHz and employing at least 75 hopping channels, the maximum peak conducted output power shall not exceed 1 W; for all other frequency hopping systems in the band, the maximum peak conducted output power shall not exceed 0.125 W.

### TEST PROCEDURE

The transmitter output was connected to a power meter equipped with a power sensor capable of measuring peak power. The cable assembly insertion loss of 11.7 dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

### RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Directional Gain (dBi)	Limit (dBm)	Margin (dB)
Low	2402	7.09	1.30	30	-22.91
Middle	2441	7.16	1.30	30	-22.84
High	2480	7.35	1.30	30	-22.65

Tested by: Nicklas Haydon/Jeff Cabrera  
Test date: 2016-08-24

Note – This test was performed at a reduced power setting.

## 8.2.6. AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

The transmitter output is connected to a power meter.

### RESULTS

The cable assembly insertion loss of 12.04 dB (including 10 dB pad and 2.04 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	6.89
Middle	2441	6.96
High	2480	7.15

Tested by: Nicklas Haydon/Jeff Cabrera  
Test date: 2016-08-24

Note – This test was performed at a reduced power setting.

## **8.2.7. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

#### **FCC §15.247 (d)**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### **IC RSS-247 5.5**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section A8.4 (4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

Tested by: John Manser  
Test date: 2016-06-21



Note – This test was performed at the maximum allowed power setting.

## RESULTS



### SPURIOUS EMISSIONS, LOW CHANNEL

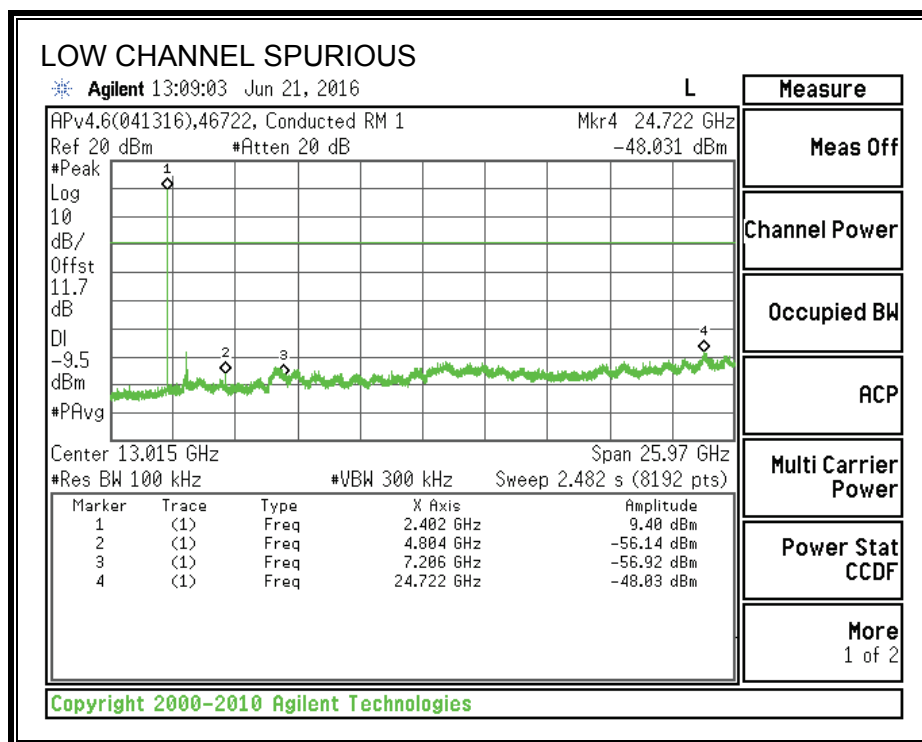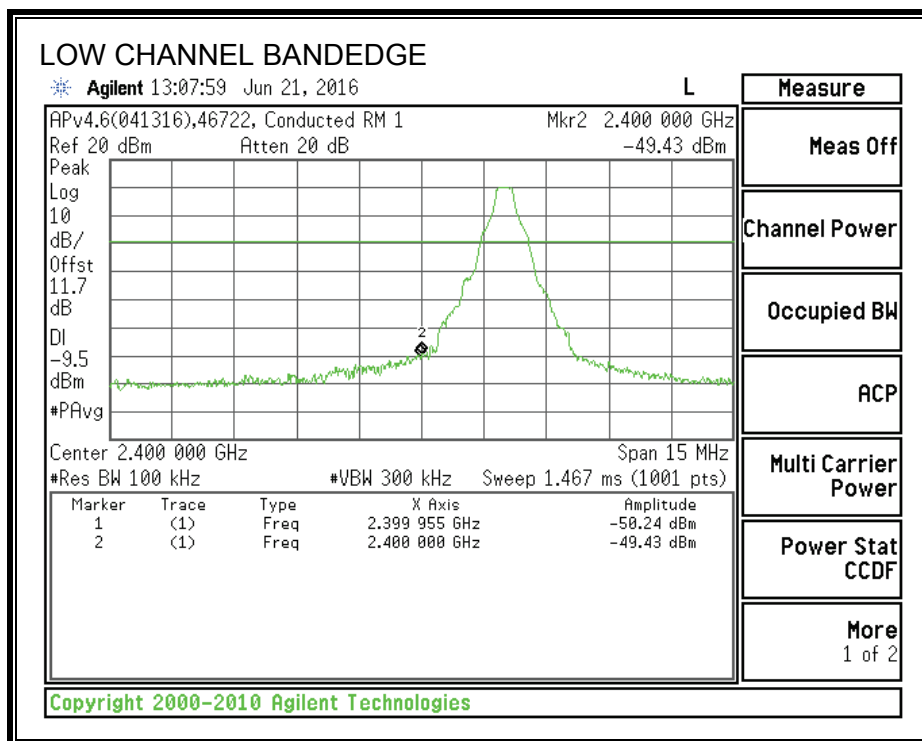



# SPURIOUS EMISSIONS, MID CHANNEL

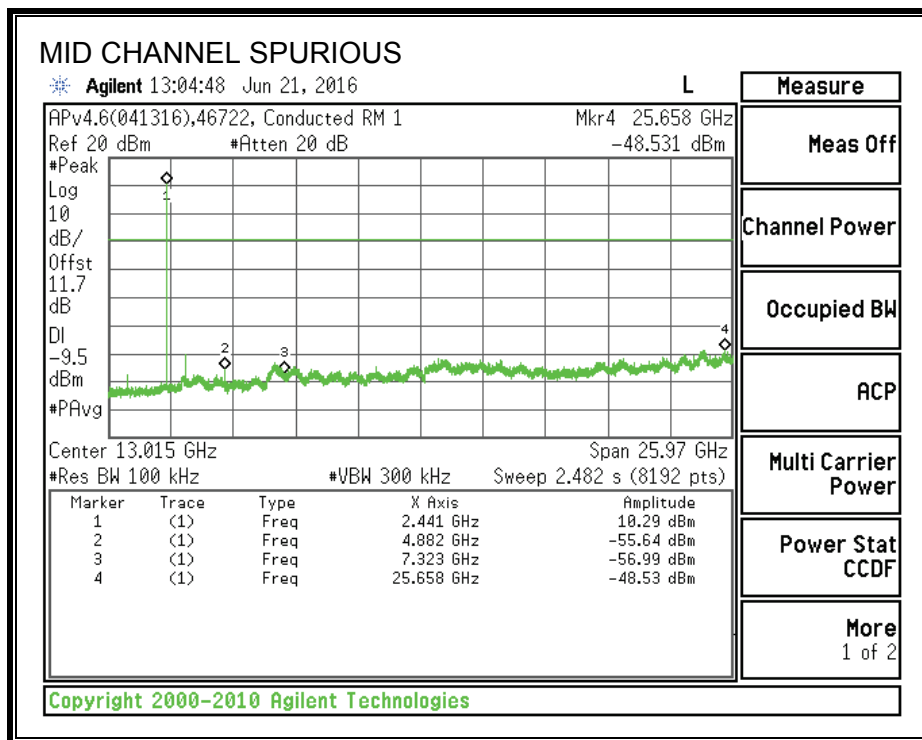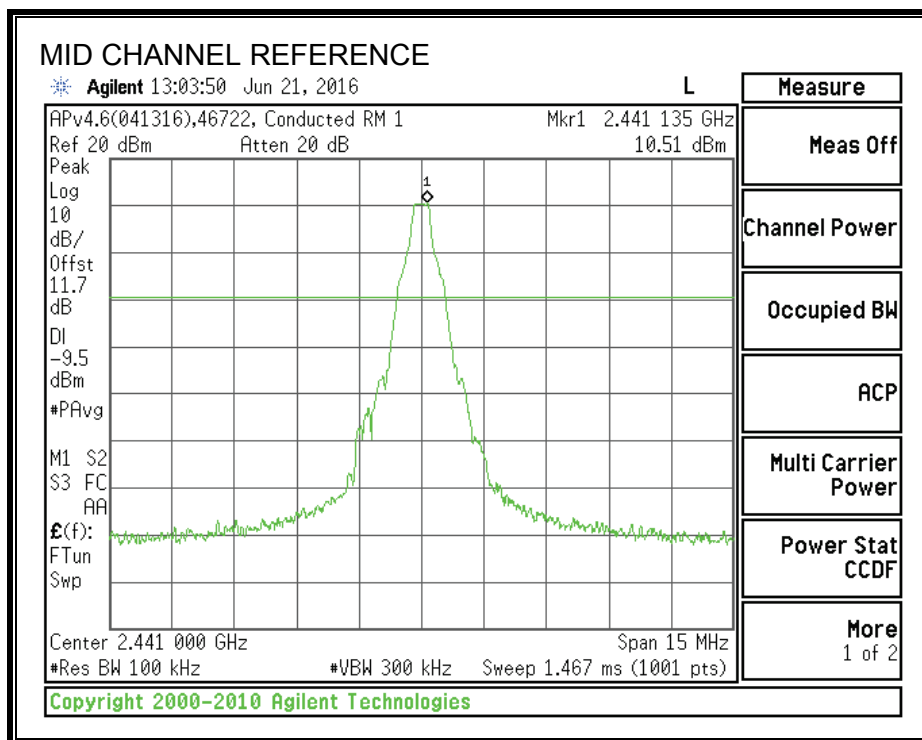

# **SPURIOUS EMISSIONS, HIGH CHANNEL**

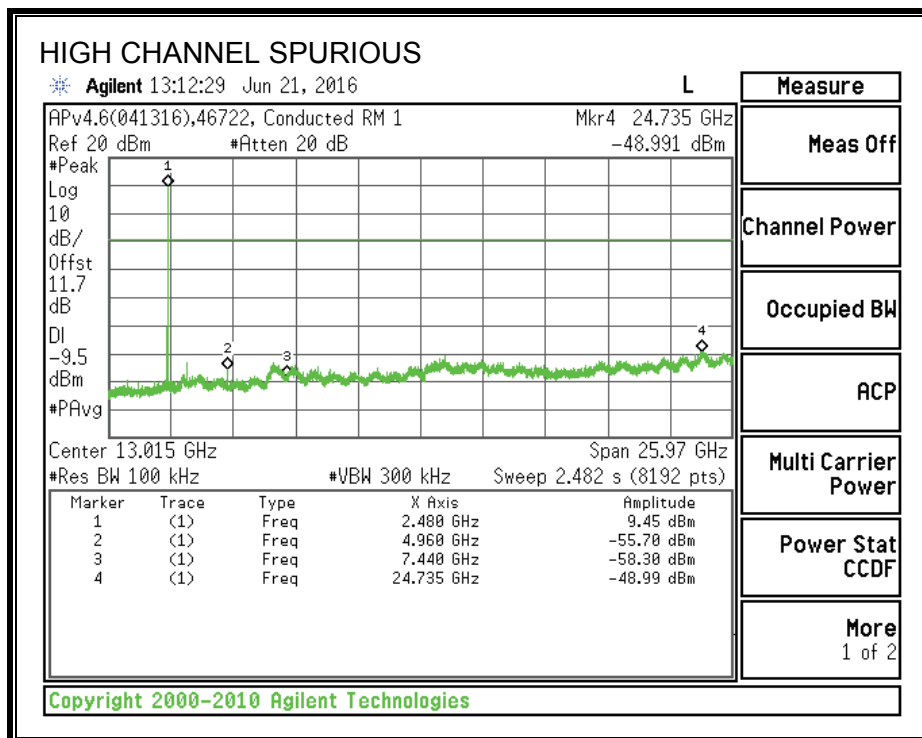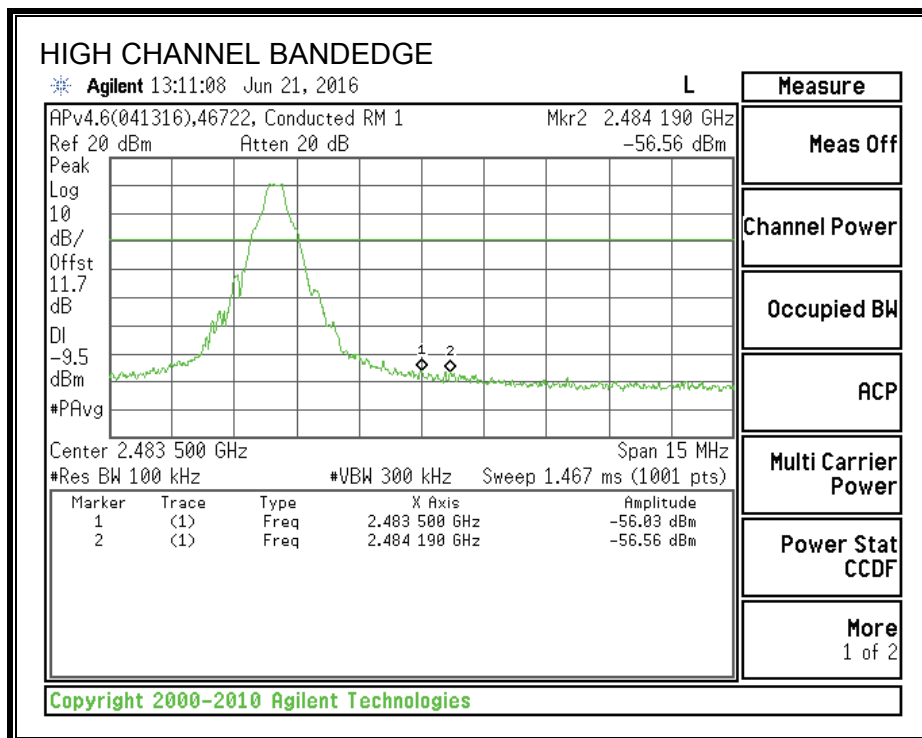

# SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

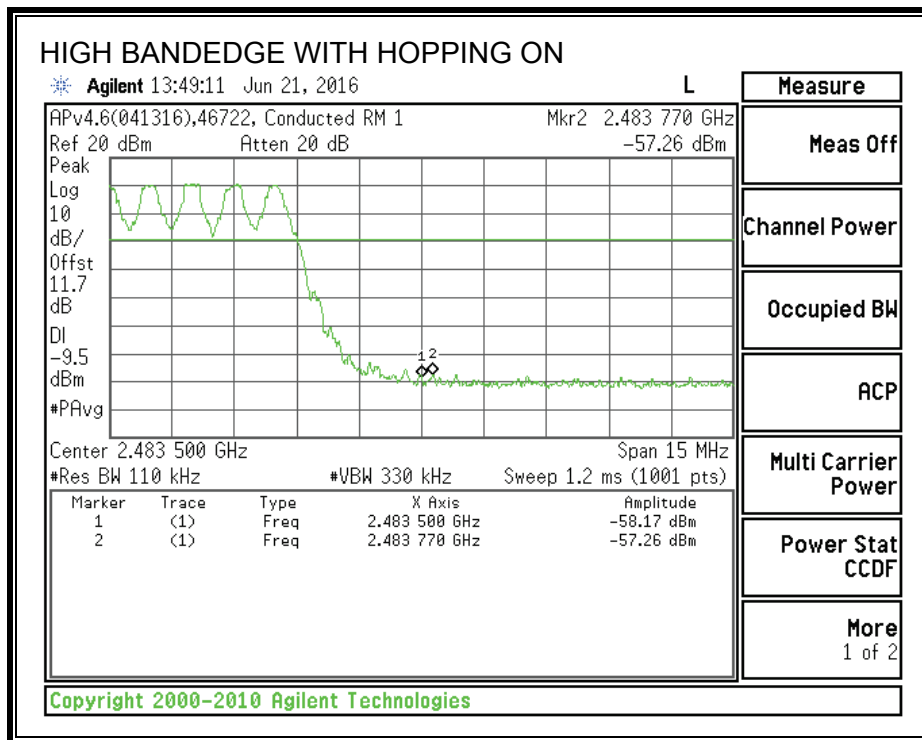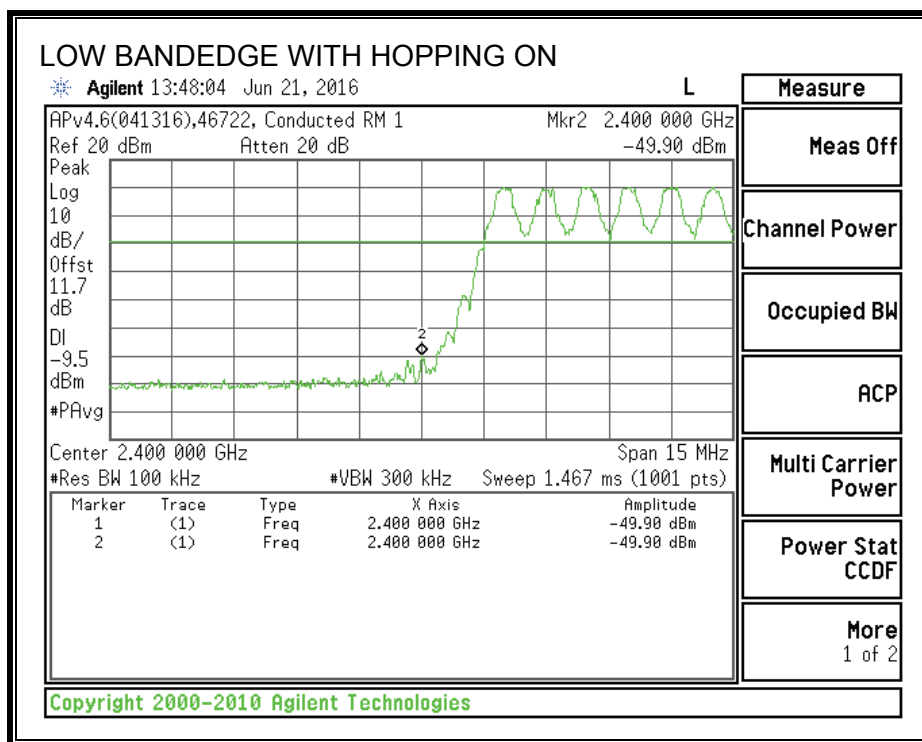

### 8.3. ENHANCED DATA RATE DQPSK MODULATION

#### 8.3.1. 20 dB AND 99% BANDWIDTH

##### LIMIT

None; for reporting purposes only. Test per FCC §15.247(a)(1); IC RSS-247 5.1 (1), RSS-Gen 6.6.

##### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 1-5% of the 20 dB bandwidth and 99% Occupied Bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.



##### RESULTS


Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	1347	1212.9
Middle	2441	1350	1221.9
High	2480	1341	1215.4

Tested by: John Manser  
Test date: 2016-06-21



Note – This test was performed at the maximum allowed power setting.


## 20 dB BANDWIDTH

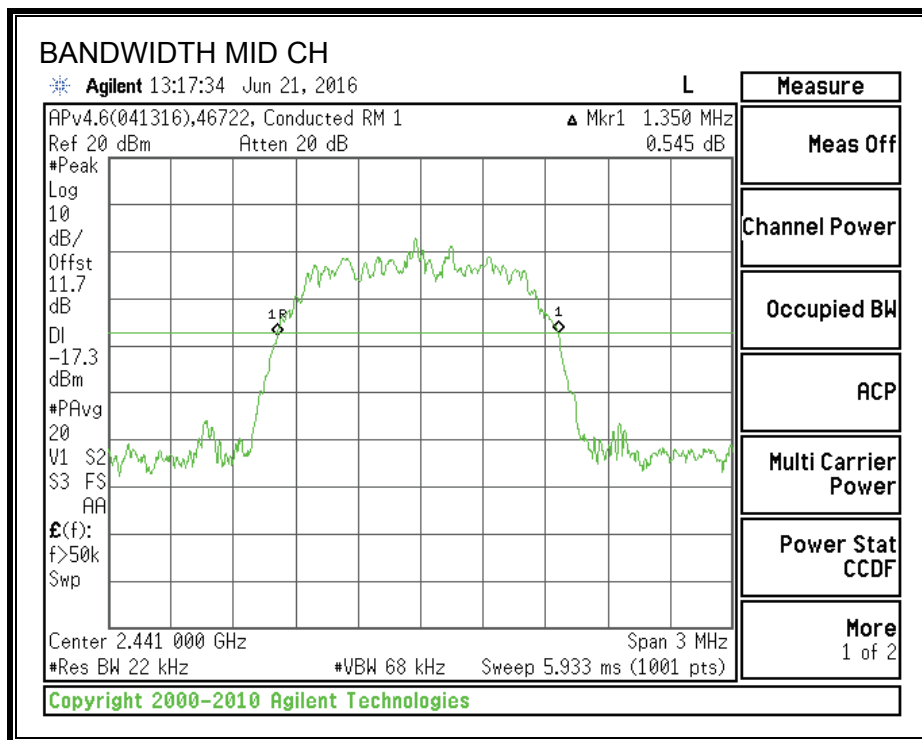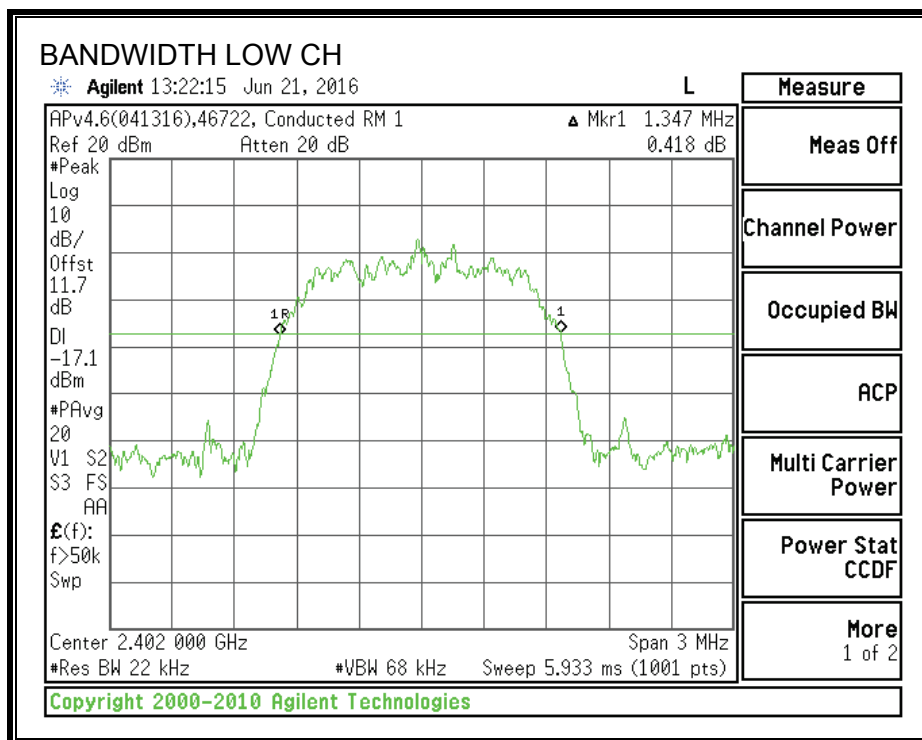

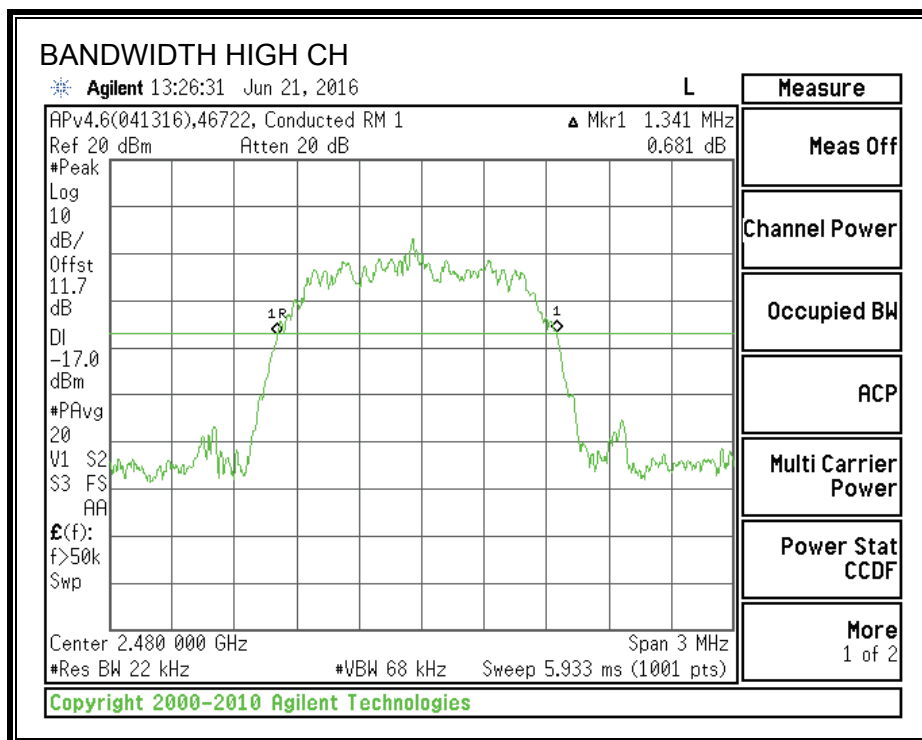

# **99% BANDWIDTH**

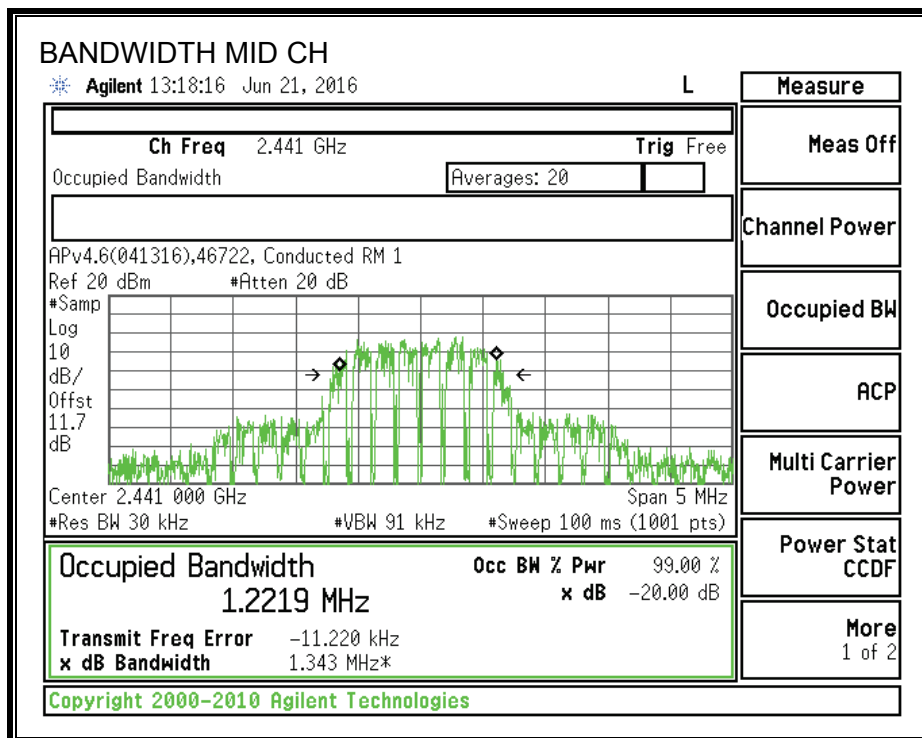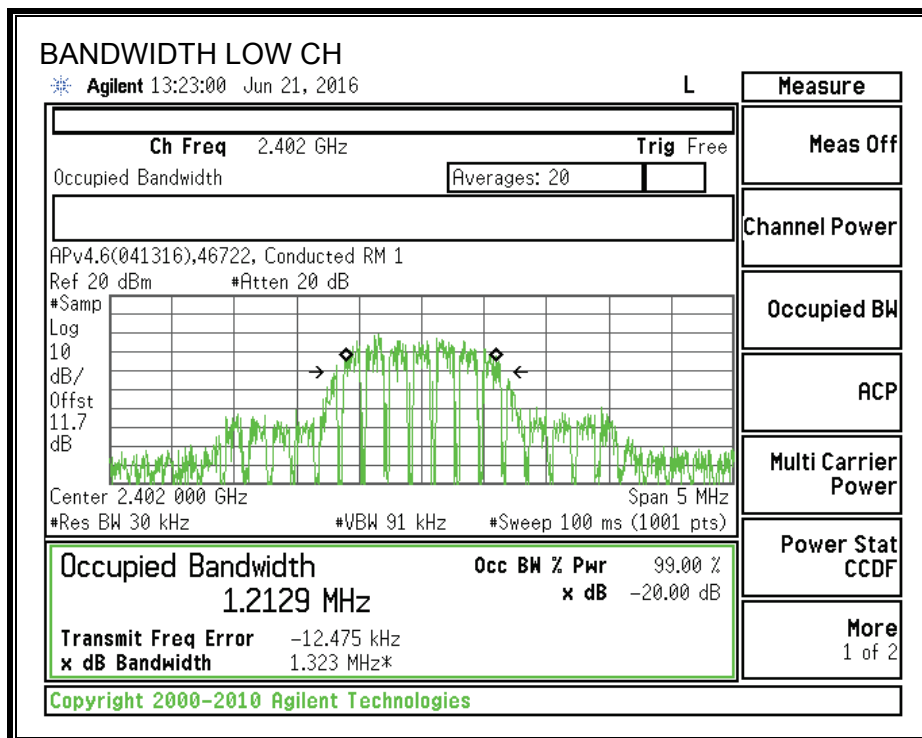

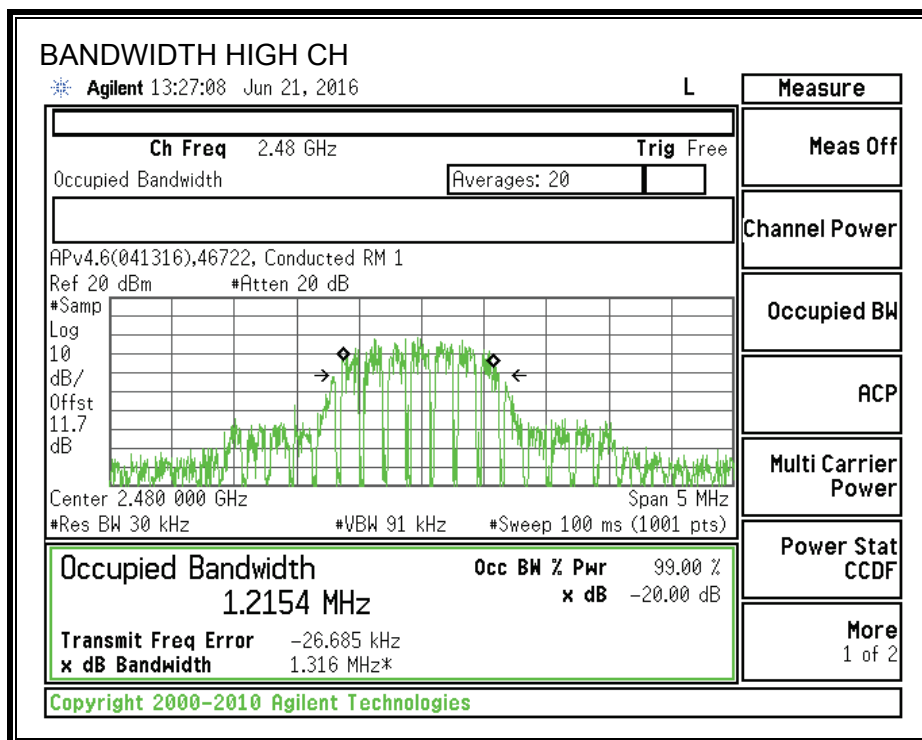

### **8.3.2. HOPPING FREQUENCY SEPARATION**

#### **LIMIT**

FCC §15.247 (a) (1)

IC RSS-247 5.1 (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 3x RBW. The sweep time is coupled.


#### **RESULTS**

Tested by: John Manser

Test date: 2016-06-21

Note – This test was performed at the maximum allowed power setting.

# HOPPING FREQUENCY SEPARATION

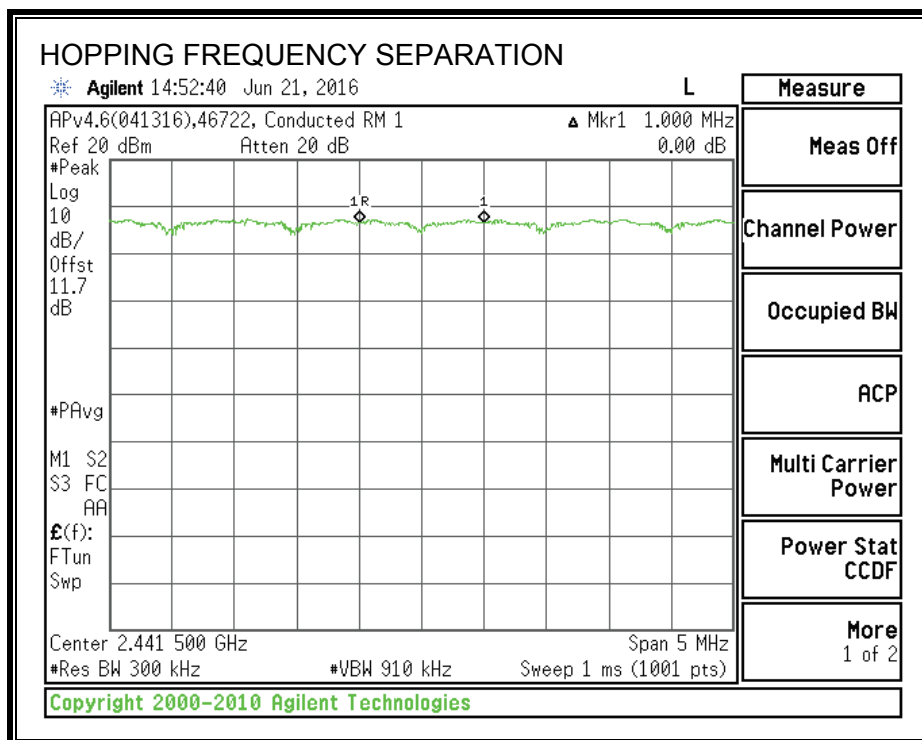

Ch. A	Ch. B	Ch. 1 to Ch. 2 Sep.	Max. 20 dB BW	2/3 20 dB Margin	Margin
(MHz)	(MHz)	(MHz)	(MHz)	(MHz)	(MHz)
2441	2442	1.000	1.350	0.900	-0.100

Note – The channel hopping separation of 1MHz is less than the 20 dB bandwidth (approx. 1.3 MHz). However, the output power is less than 125 mW and the channel separation is greater than 2/3 the 20 dB bandwidth (approx. 900 kHz).

### **8.3.3. NUMBER OF HOPPING CHANNELS**

#### **LIMIT**

FCC §15.247 (a) (1) (iii)

IC RSS-247 5.1 (4)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

#### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps for visibility of the entire span. Then, smaller spans are set to more clearly identify the channels. The RBW is set to 30% of the channel spacing (approx. 300 kHz). The analyzer is set to Max Hold.


#### **RESULTS**



Normal Mode: 79 Channels observed.


Tested by: John Manser  
Test date: 2016-06-21

Note – This test was performed at the maximum allowed power setting.

# **NUMBER OF HOPPING CHANNELS**

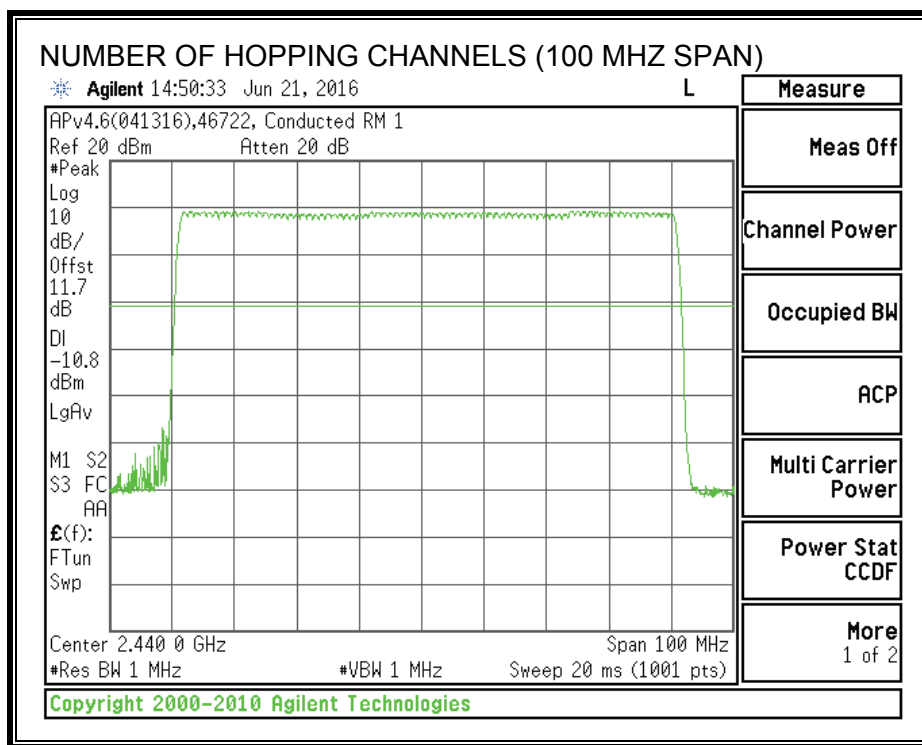

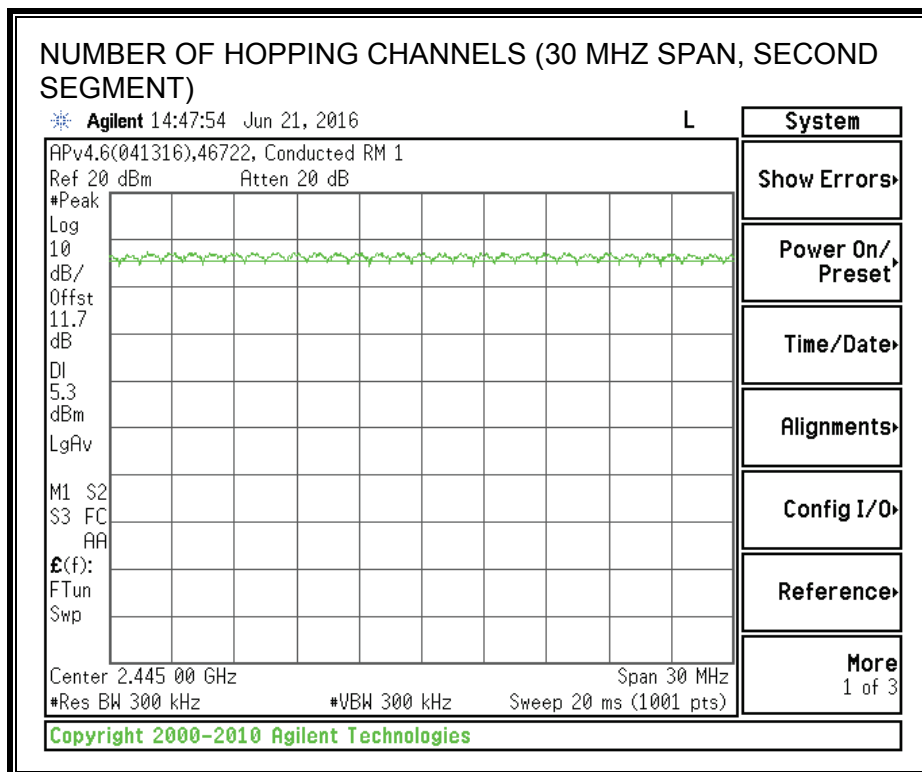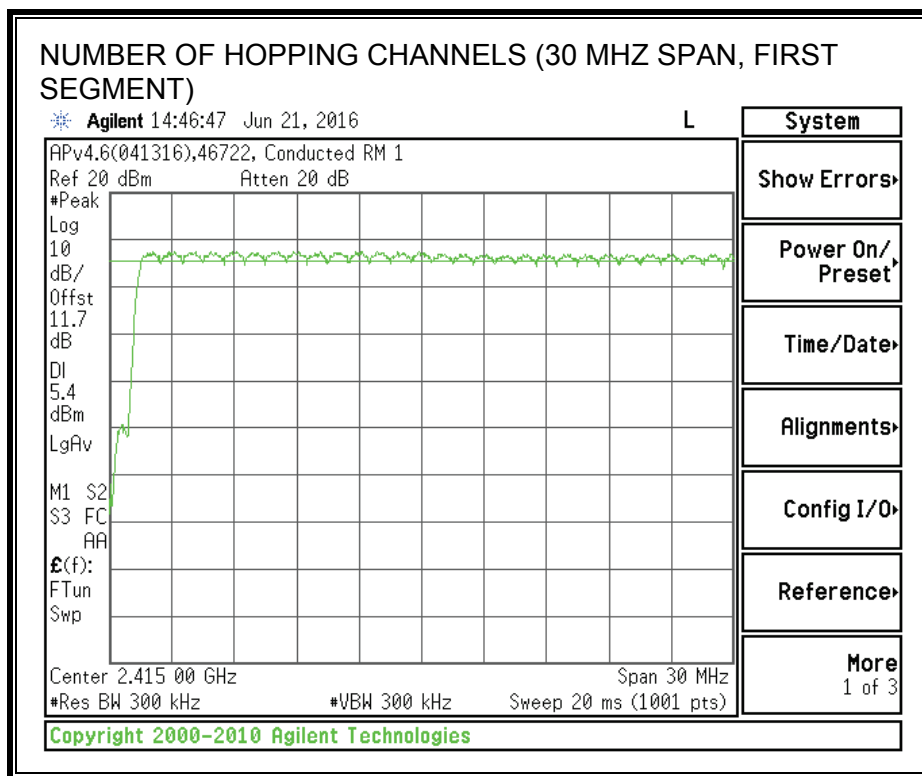

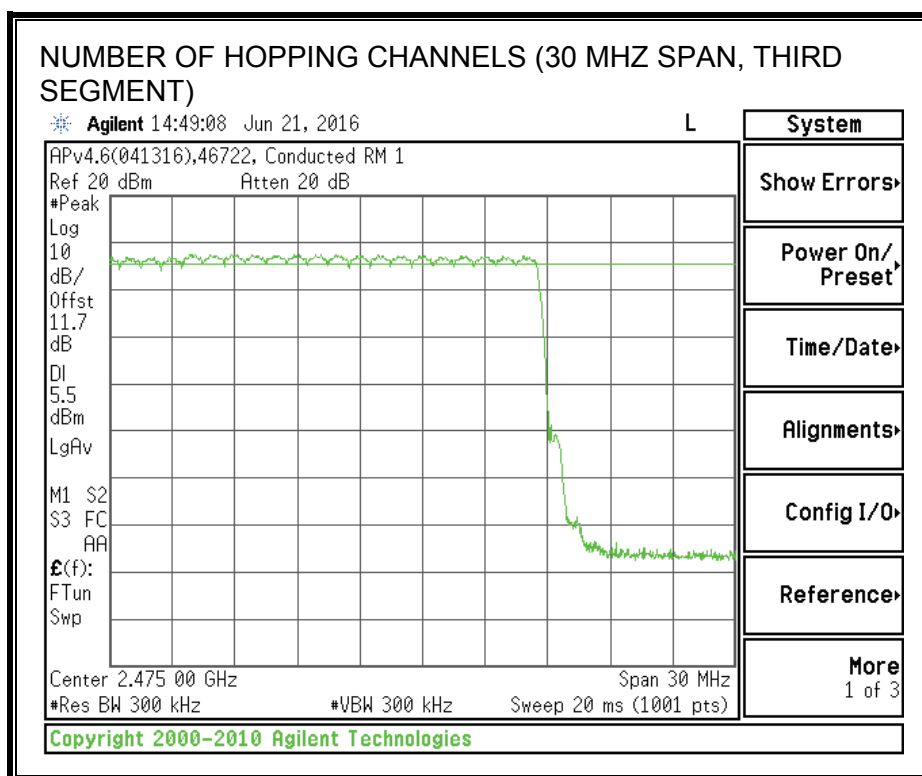

### 8.3.4. AVERAGE TIME OF OCCUPANCY

#### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 5.1 (4)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses was measured in a 3.12 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels \* 0.4 s) is equal to  $(31.6/3.12) * (\# \text{ of pulses in } 3.12 \text{ s}) * \text{pulse width}$ .

#### RESULTS

Time Of Occupancy = 10 \* xx pulses \* yy msec = zz msec

##### DQPSK Mode

DH Packet	Pulse Width (msec)	Number of Pulses in 3.12 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
DH1	0.418	32	0.135	0.4	-0.265
DH3	1.666	16	0.270	0.4	-0.130
DH5	2.912	13	0.383	0.4	-0.017


**Note:** for AFH (DQPSK) mode, please refer to the results of AFH (GFSK) mode; the channel selection and hopping rate are the same for both EDR and Basic Rate operation, data for Basic Rate on page 31 demonstrates compliance with channel occupancy when AFH is employed.

Tested by: John Manser


Test date: 2016-06-21 to 2016-06-22

Note – This test was performed at the maximum allowed power setting.


# **PULSE WIDTH - DH1**

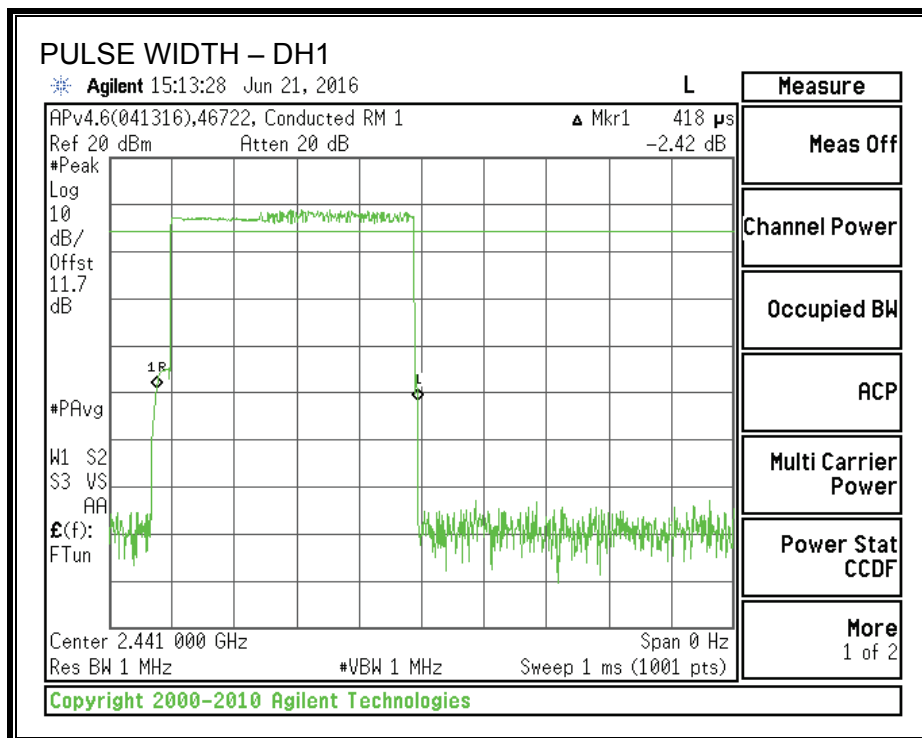


# **NUMBER OF PULSES IN 3.12 SECOND OBSERVATION PERIOD - DH1**

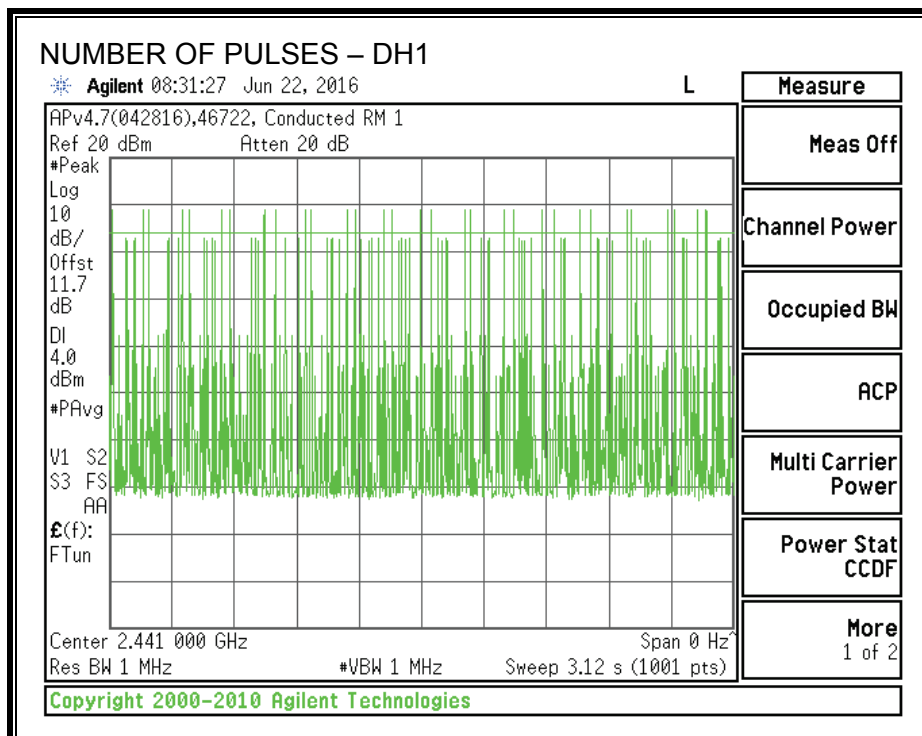


### PULSE WIDTH – DH3

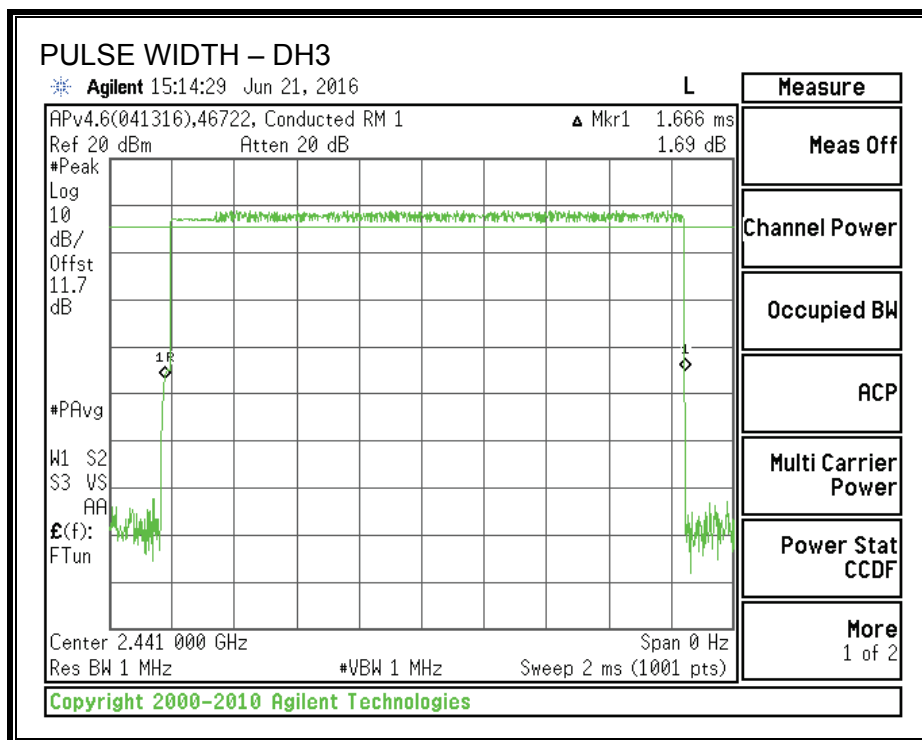


### NUMBER OF PULSES IN 3.12 SECOND OBSERVATION PERIOD – DH3

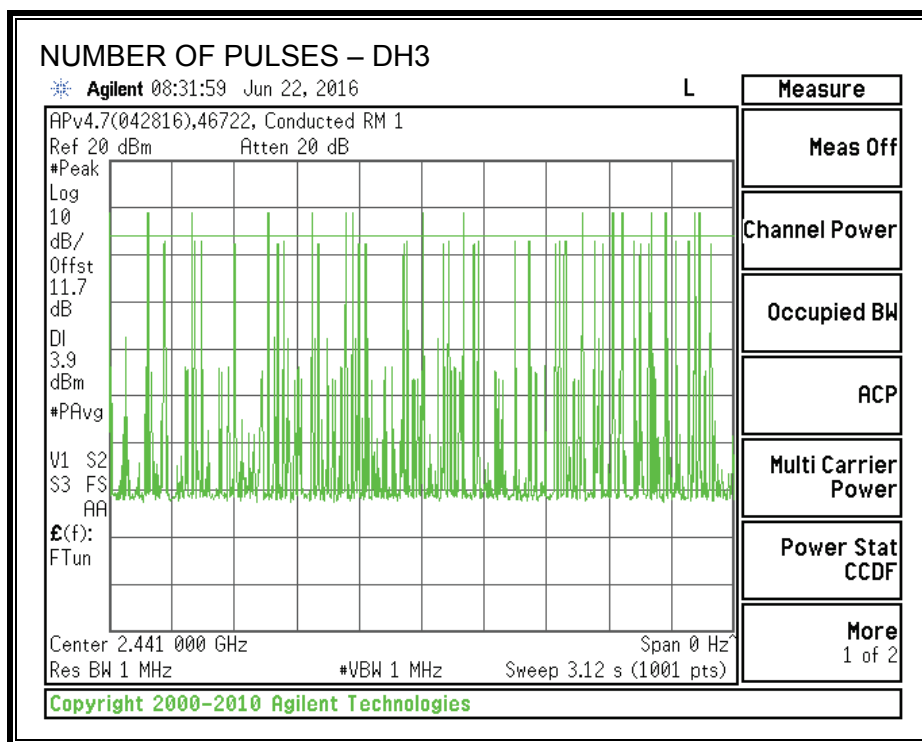

# **PULSE WIDTH – DH5**

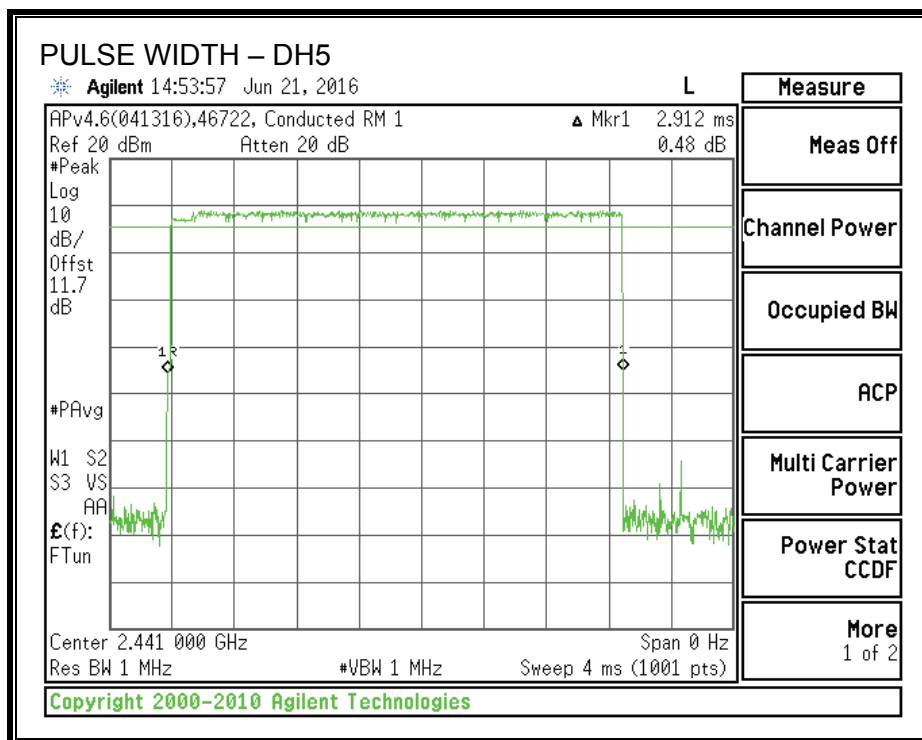

# **NUMBER OF PULSES IN 3.12 SECOND OBSERVATION PERIOD – DH5**

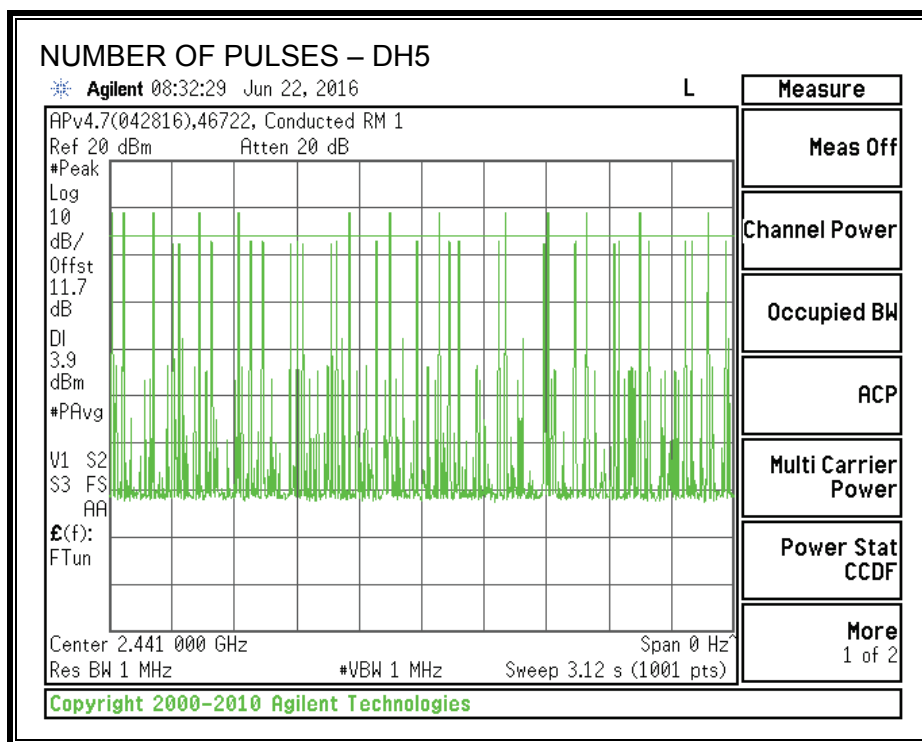

### 8.3.5. OUTPUT POWER

#### LIMIT

§15.247 (b) (1)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247 5.4 (2)

For frequency hopping systems operating in the band 2400-2483.5 MHz and employing at least 75 hopping channels, the maximum peak conducted output power shall not exceed 1 W; for all other frequency hopping systems in the band, the maximum peak conducted output power shall not exceed 0.125 W.

#### TEST PROCEDURE

The transmitter output was connected to a power meter equipped with a power sensor capable of measuring peak power. The cable assembly insertion loss of 12.04 dB (including 10 dB pad and 2.04 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### RESULTS

For DQPSK mode, the channel separation was limited to 2/3 the 20 dB bandwidth. Therefore, the output power was limited to 125 mW.

Channel	Frequency (MHz)	Output Power (dBm)	Directional Gain (dBi)	Limit (dBm)	Margin (dB)
Low	2402	5.37	1.30	21	-15.63
Middle	2441	5.01	1.30	21	-15.99
High	2480	5.00	1.30	21	-16.00

Tested by: Nicklas Haydon/Jeff Cabrera  
Test date: 2016-09-15

Note – This test was performed at a reduced power setting.

### 8.3.6. AVERAGE POWER

#### LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

The cable assembly insertion loss of 12.04 dB (including 10 dB pad and 2.04 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	2.70
Middle	2441	2.32
High	2480	2.23

Tested by: Nicklas Haydon/Jeff Cabrera  
Test date: 2016-09-15

Note – This test was performed at a reduced power setting.

### **8.3.7. CONDUCTED SPURIOUS EMISSIONS**

#### **LIMITS**

##### **FCC §15.247 (d)**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

##### **IC RSS-247 5.5**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section A8.4 (4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

#### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

Tested by: John Manser  
Test date: 2016-06-21



Note – This test was performed at the maximum allowed power setting.

## RESULTS



### SPURIOUS EMISSIONS, LOW CHANNEL

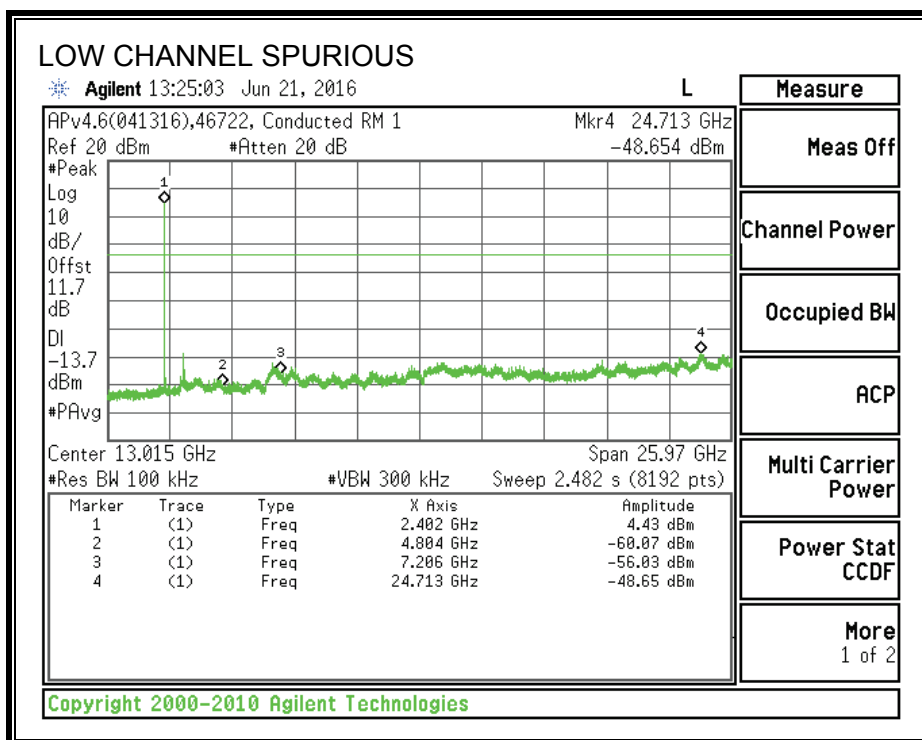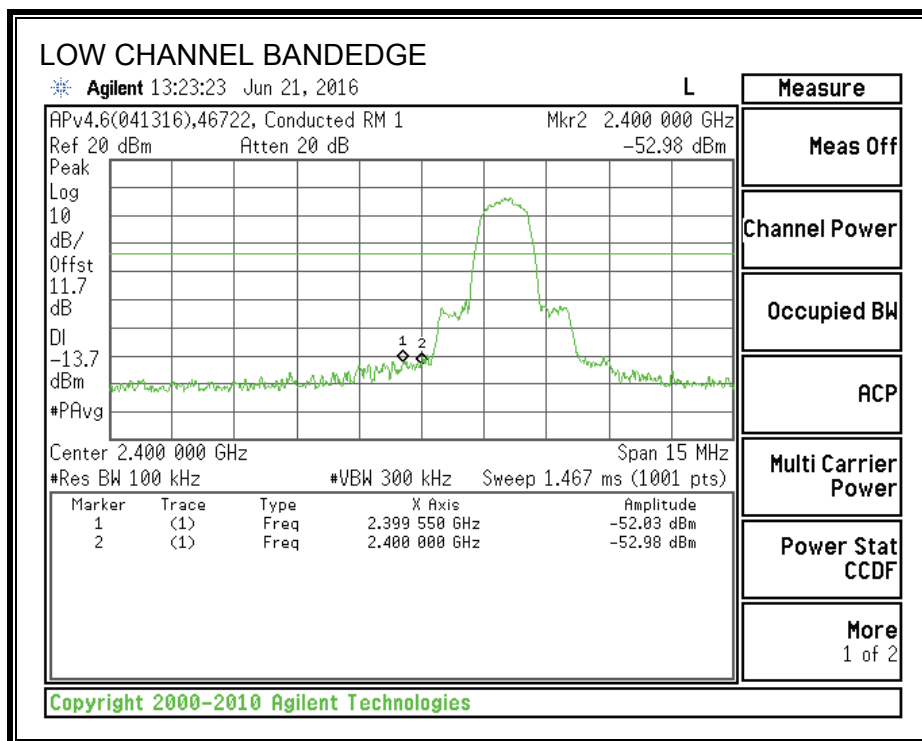



# **SPURIOUS EMISSIONS, MID CHANNEL**

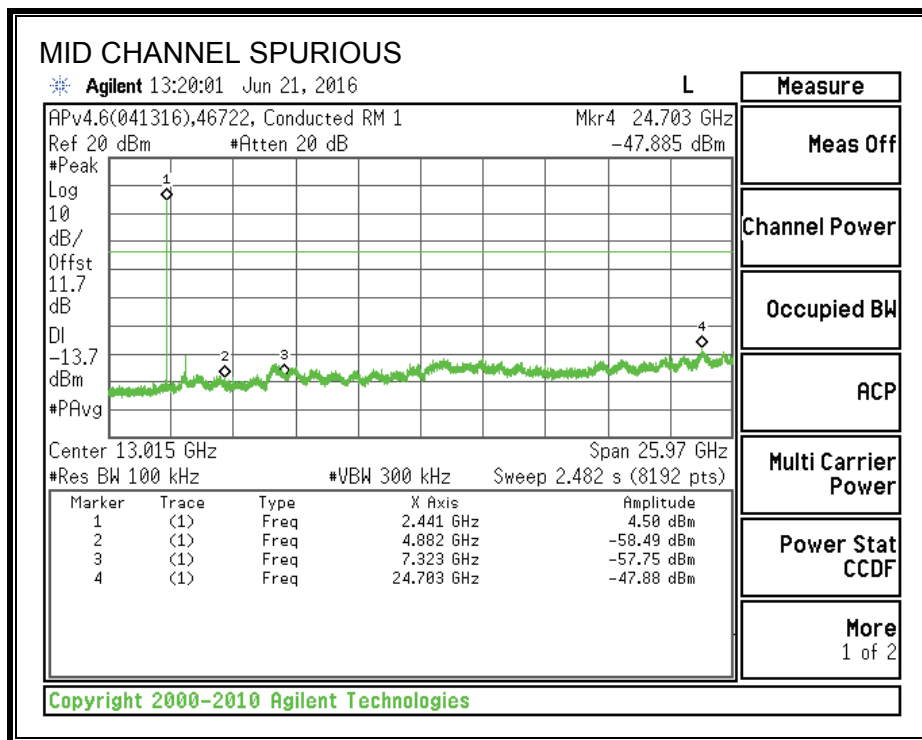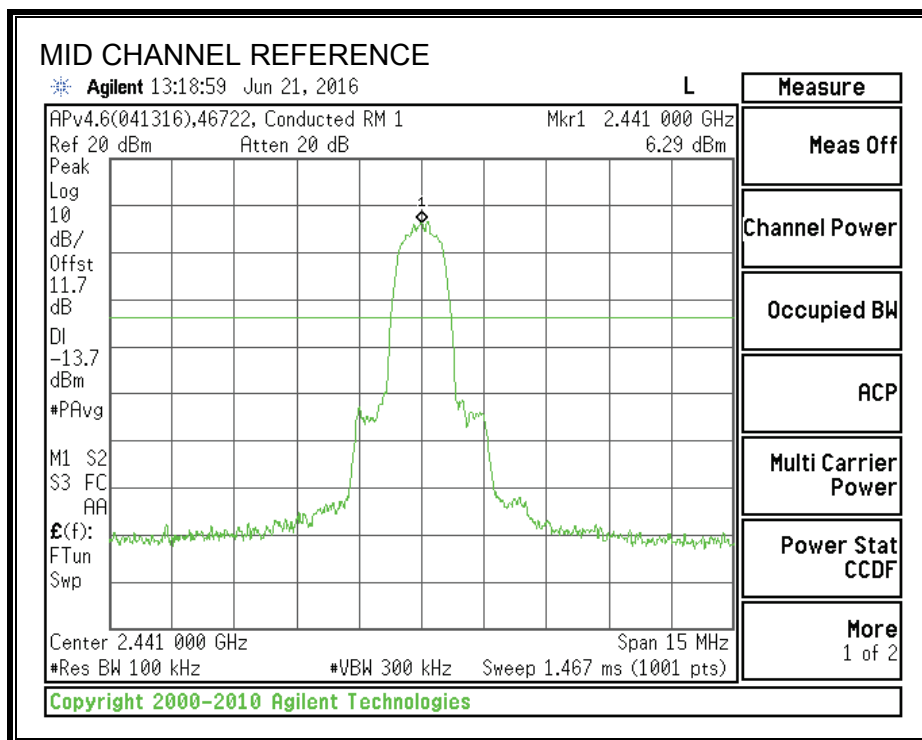

# SPURIOUS EMISSIONS, HIGH CHANNEL

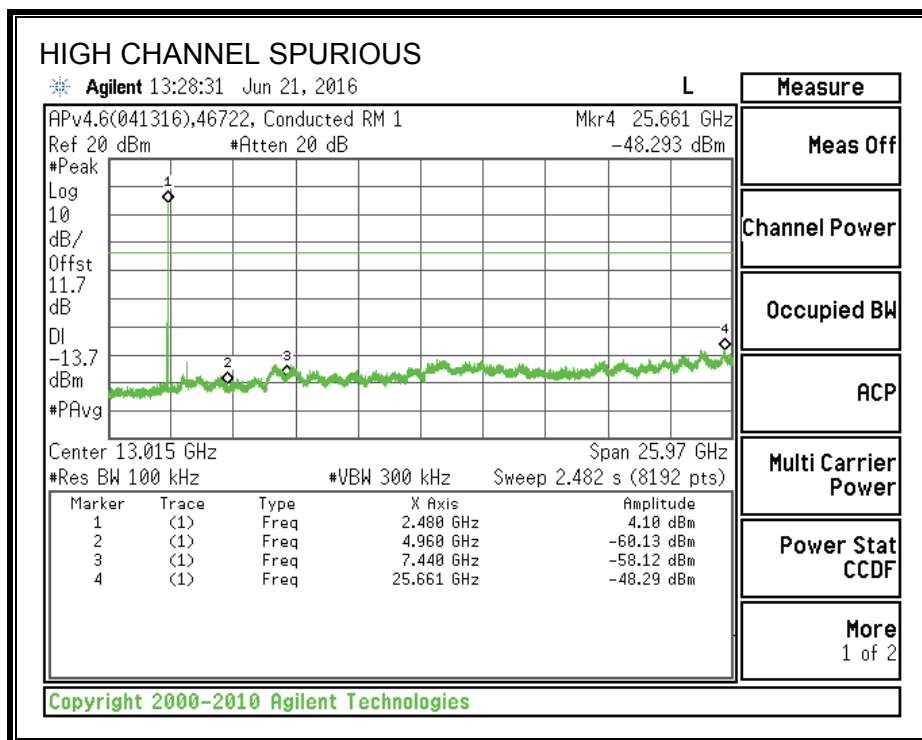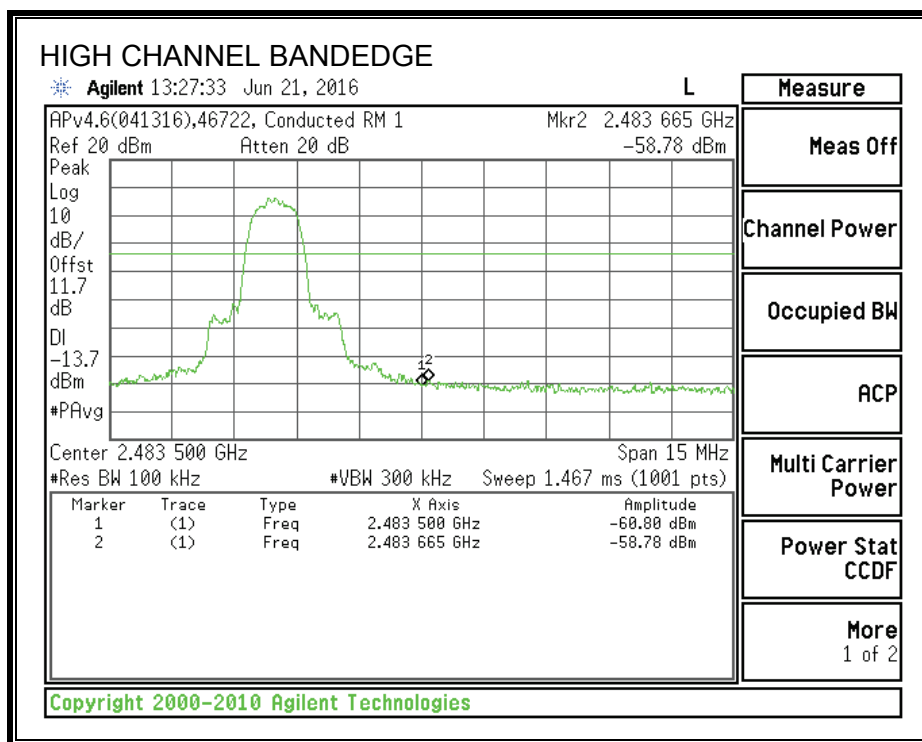

# SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

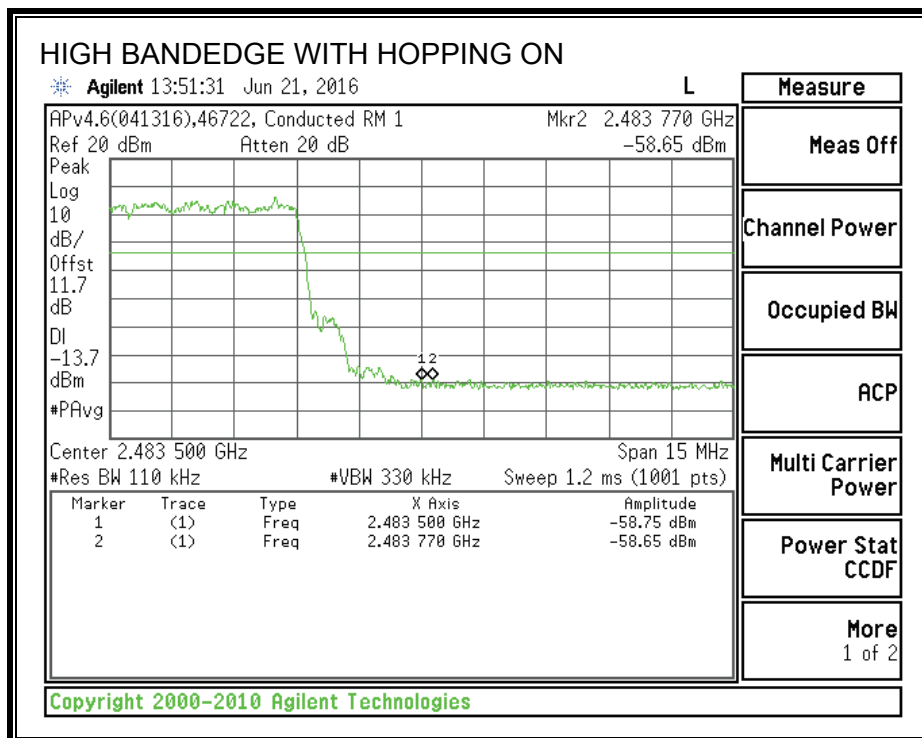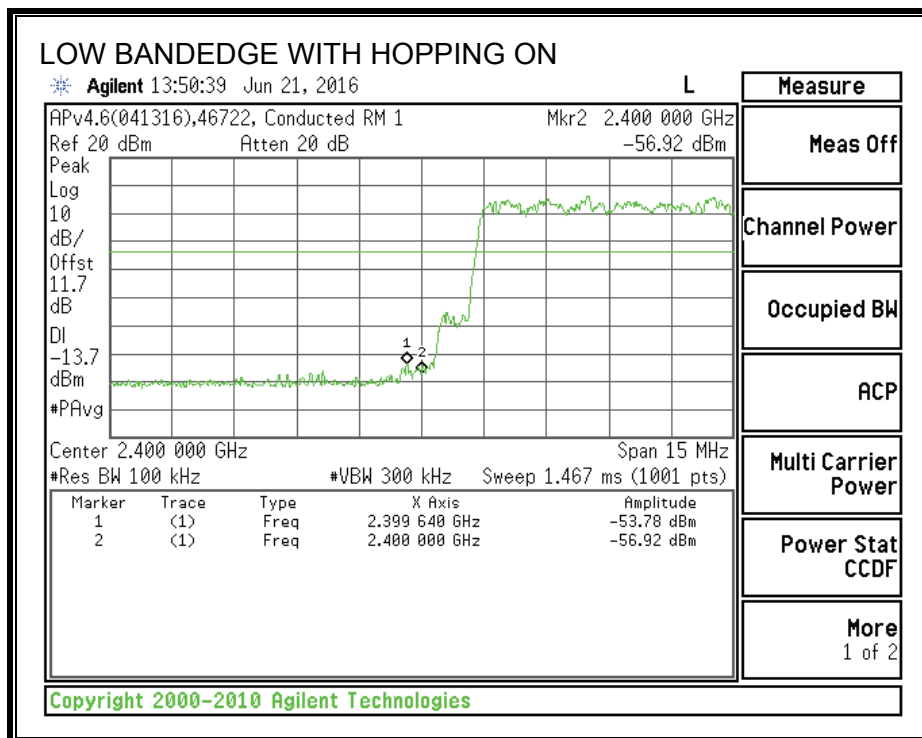

## 8.4. ENHANCED DATA RATE 8PSK MODULATION

### 8.4.1. 20 dB AND 99% BANDWIDTH

#### LIMIT

None; for reporting purposes only. Test per FCC §15.247(a)(1); IC RSS-247 5.1 (1), RSS-Gen 6.6.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 1-5% of the 20 dB bandwidth and 99% Occupied Bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.



#### RESULTS


Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	1344	1219.7
Middle	2441	1347	1216.2
High	2480	1356	1230.3

Tested by: John Manser  
Test date: 2016-06-21



Note – This test was performed at the maximum allowed power setting.


## 20 dB BANDWIDTH

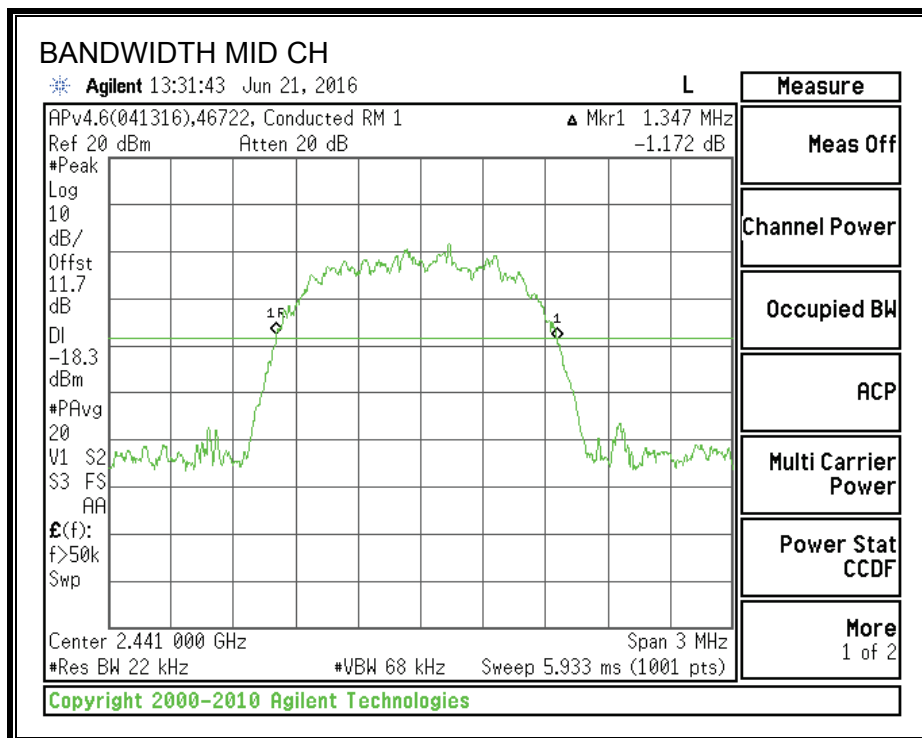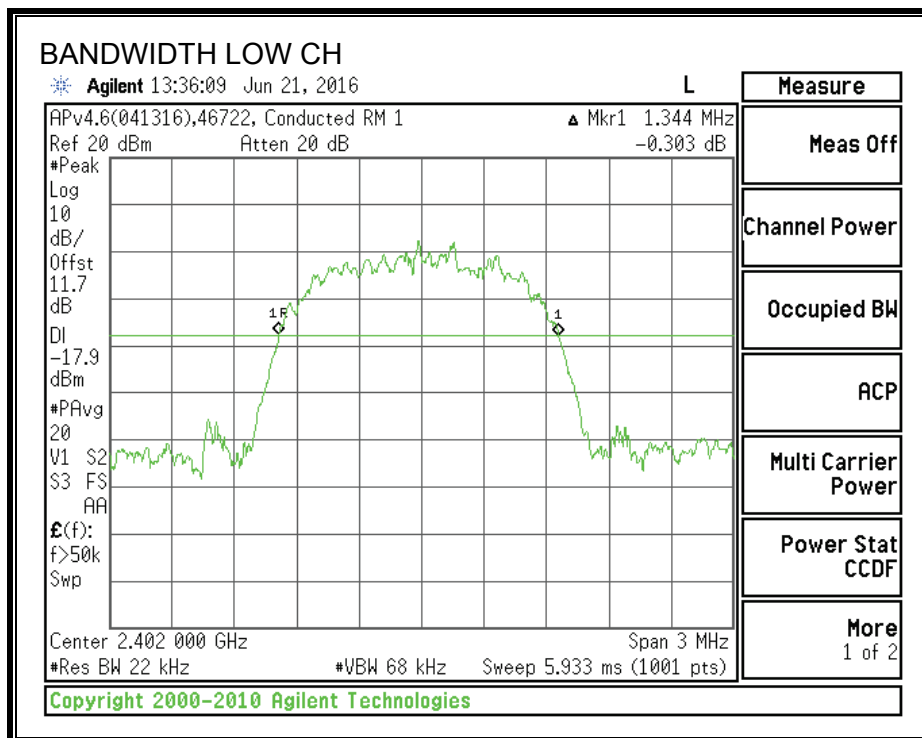

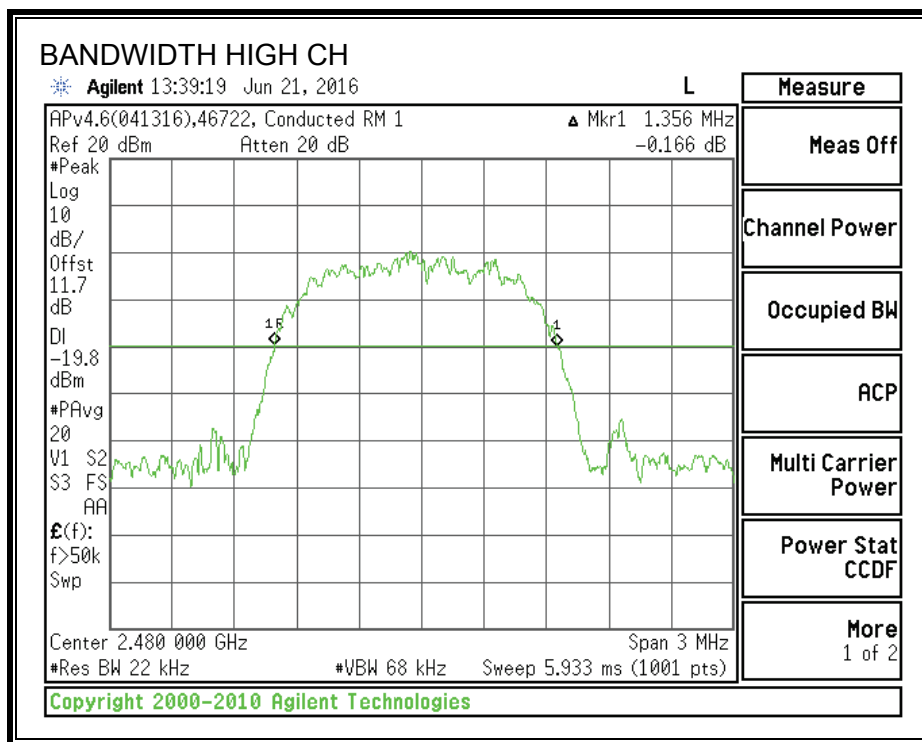

# **99% BANDWIDTH**

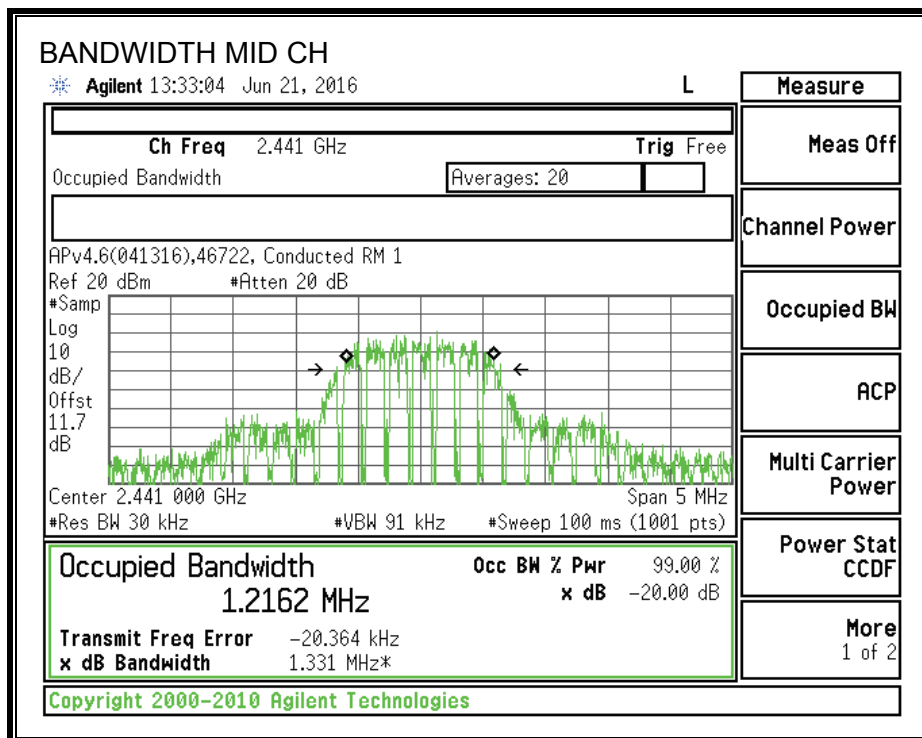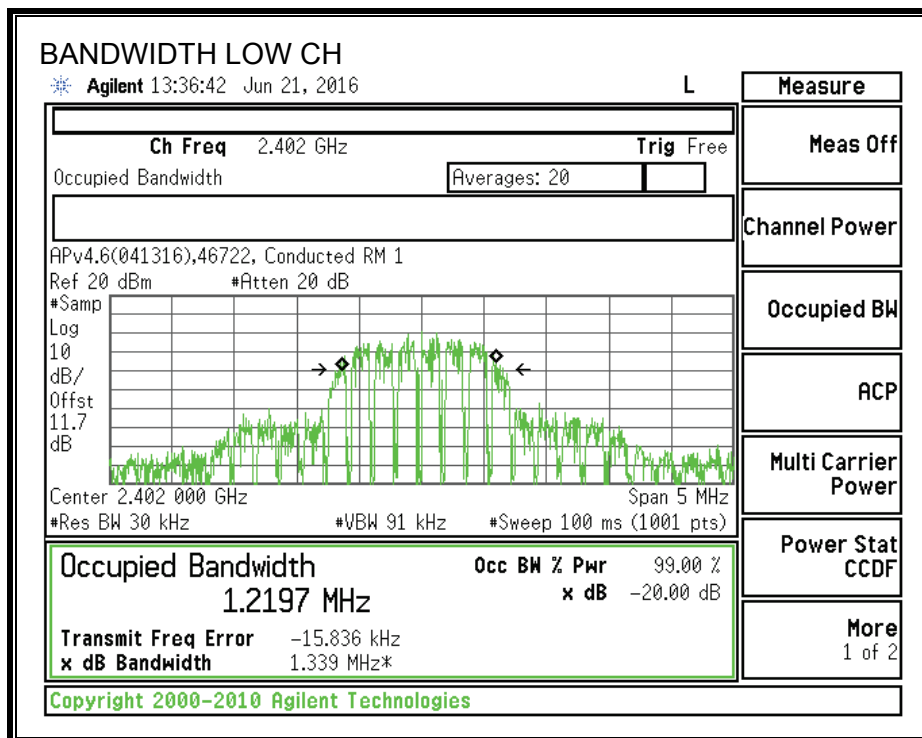

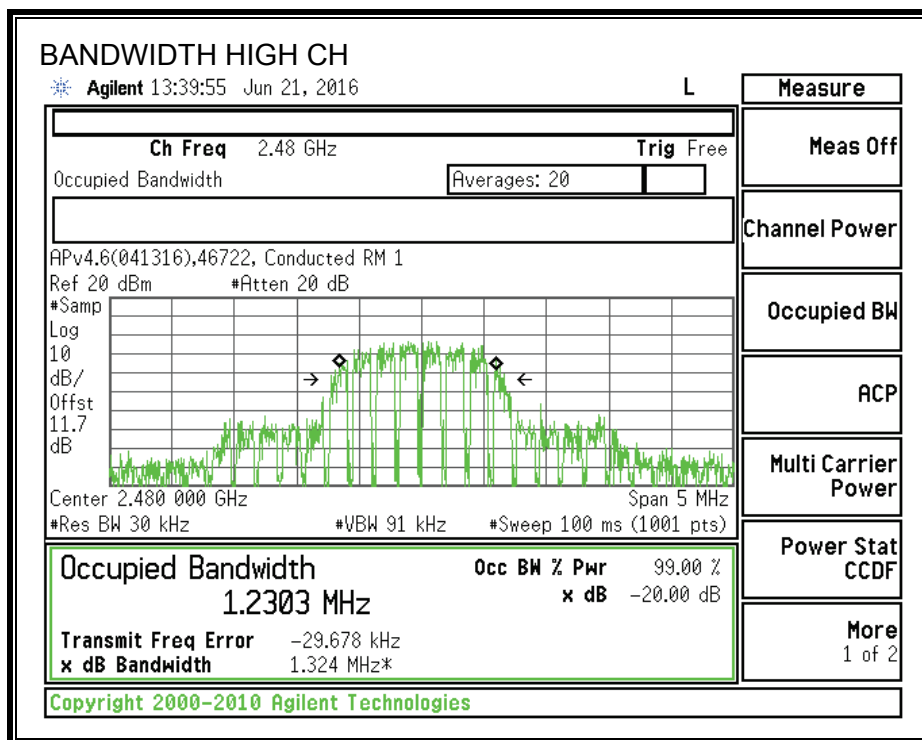

## **8.4.2. HOPPING FREQUENCY SEPARATION**

### **LIMIT**

FCC §15.247 (a) (1)

IC RSS-247 5.1 (2)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 3x RBW. The sweep time is coupled.

Tested by: John Manser  
Test date: 2016-06-21

Note – This test was performed at the maximum allowed power setting.

## RESULTS

### HOPPING FREQUENCY SEPARATION

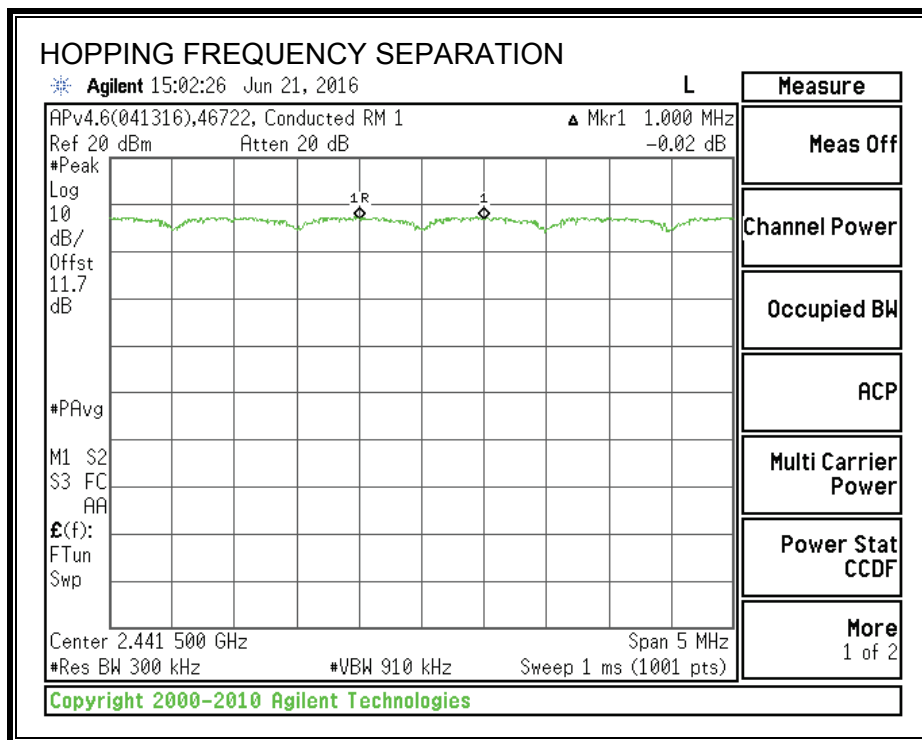

Ch. A	Ch. B	Ch. 1 to Ch. 2 Sep.	Max. 20 dB BW	2/3 20 dB Margin	Margin
(MHz)	(MHz)	(MHz)	(MHz)	(MHz)	(MHz)
2441	2442	1.000	1.356	0.904	-0.096

Note – The channel hopping separation of 1MHz is less than the 20 dB bandwidth (approx. 1.3 MHz). However, the output power is less than 125 mW and the channel separation is greater than 2/3 the 20 dB bandwidth (approx. 900 kHz).

### **8.4.3. NUMBER OF HOPPING CHANNELS**

#### **LIMIT**

FCC §15.247 (a) (1) (iii)

IC RSS-247 5.1 (4)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

#### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps for visibility of the entire span. Then, smaller spans are set to more clearly identify the channels. The RBW is set to 30% of the channel spacing (approx. 300 kHz). The analyzer is set to Max Hold.

#### **RESULTS**

Normal Mode: 79 Channels observed.


AFH Mode: min of 20 Channels declared.



Tested by: John Manser


Test date: 2016-06-21

Note – This test was performed at the maximum allowed power setting.

# **NUMBER OF HOPPING CHANNELS**

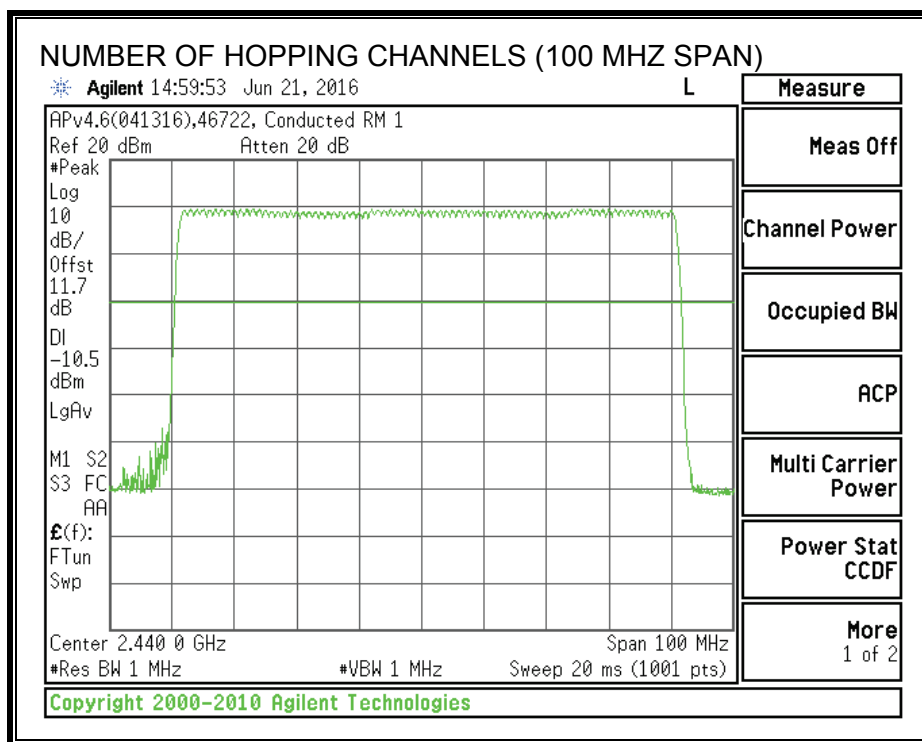

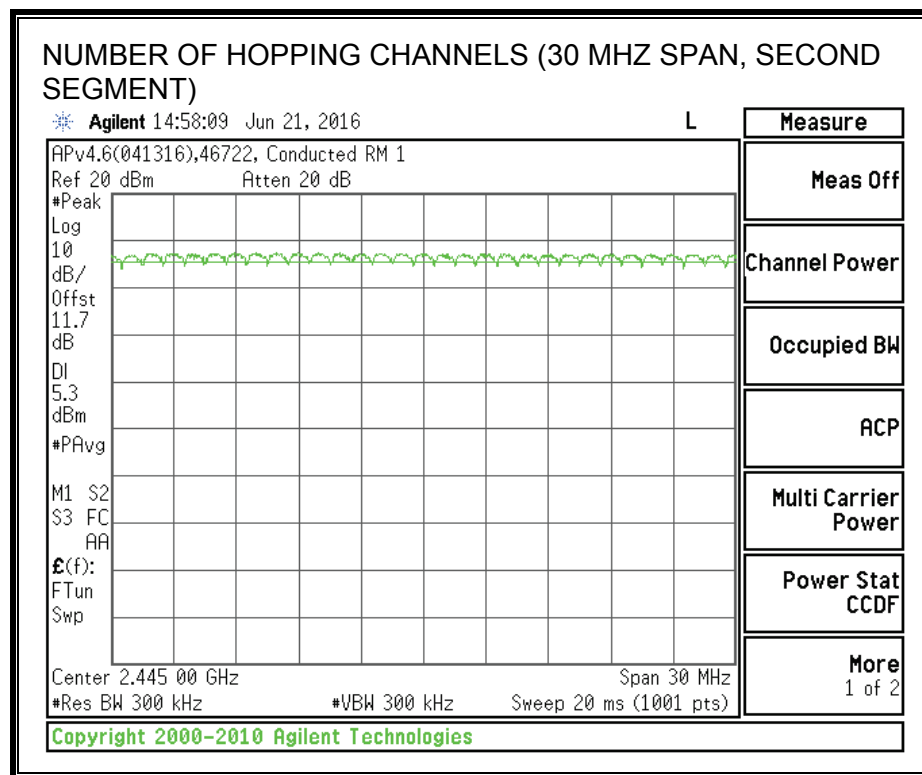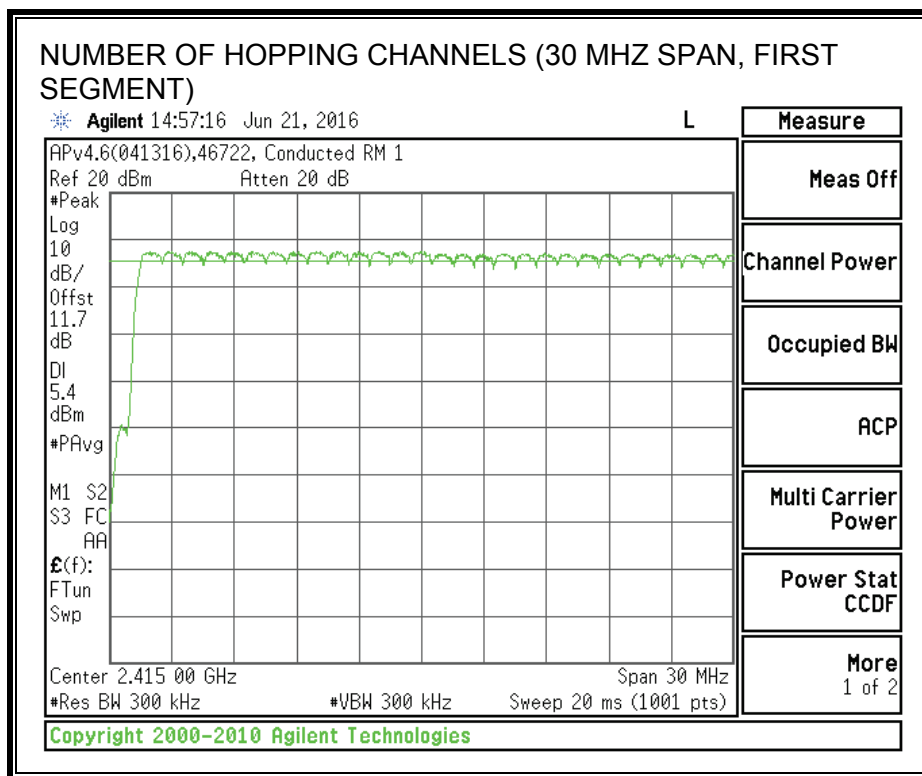

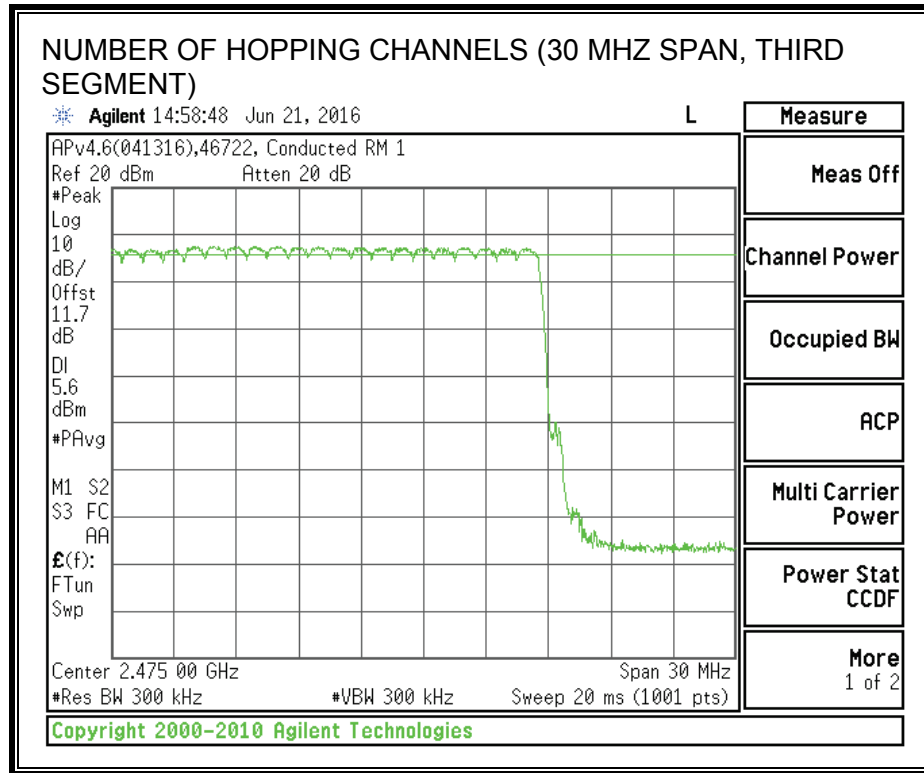

#### 8.4.4. AVERAGE TIME OF OCCUPANCY

##### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-247 5.1 (4)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

##### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses was measured in a 3.04 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels \* 0.4 s) is equal to  $(31.6/3.04) * (\# \text{ of pulses in } 3.04 \text{ s}) * \text{pulse width}$ .

##### RESULTS

Time Of Occupancy = 10 \* xx pulses \* yy msec = zz msec

##### 8PSK (EDR) Mode


DH Packet	Pulse Width (msec)	Number of Pulses in 3.04 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
DH1	0.418	30	0.130	0.4	-0.270
DH3	1.668	16	0.277	0.4	-0.123
DH5	2.916	12	0.364	0.4	-0.036

Note: for AFH (8PSK) mode, please refer to the results of AFH (GFSK) mode; the channel selection and hopping rate are the same for both EDR and Basic Rate operation, data for Basic Rate on page 31 demonstrates compliance with channel occupancy when AFH is employed.


Tested by: John Manser  
Test date: 2016-06-21 to 2016-06-22

Note – This test was performed at the maximum allowed power setting.


# **PULSE WIDTH - DH1**

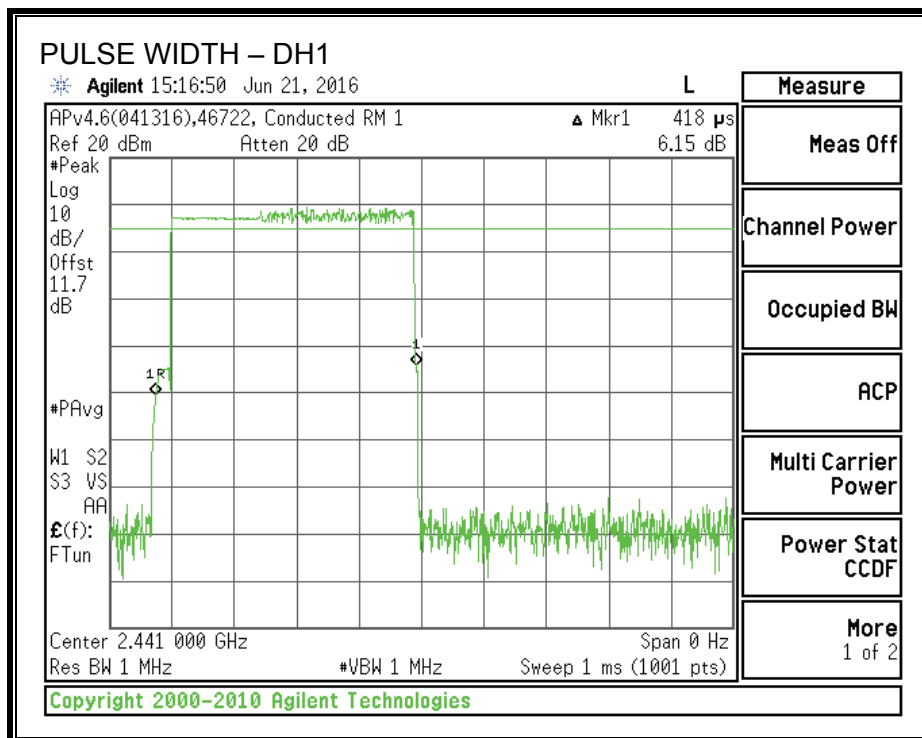


# **NUMBER OF PULSES IN 3.04 SECOND OBSERVATION PERIOD - DH1**

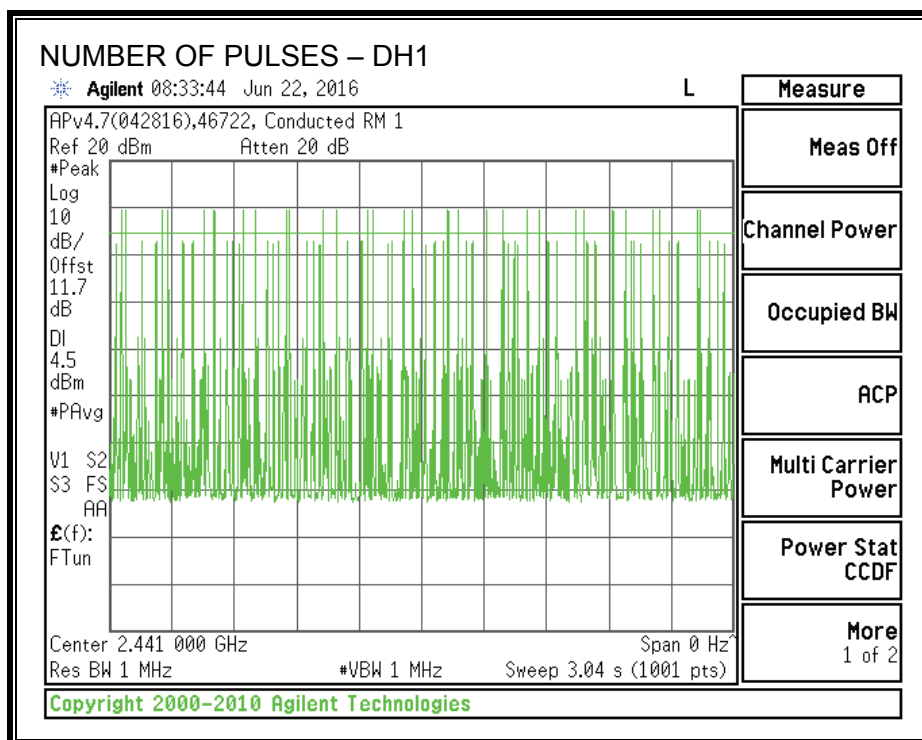


### PULSE WIDTH – DH3

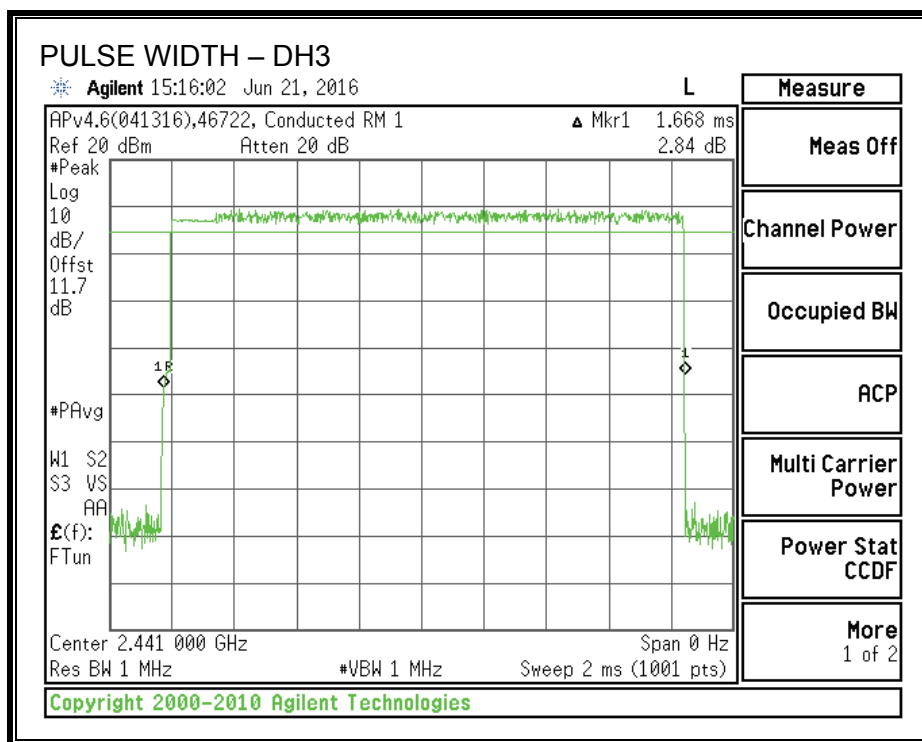


### NUMBER OF PULSES IN 3.04 SECOND OBSERVATION PERIOD – DH3

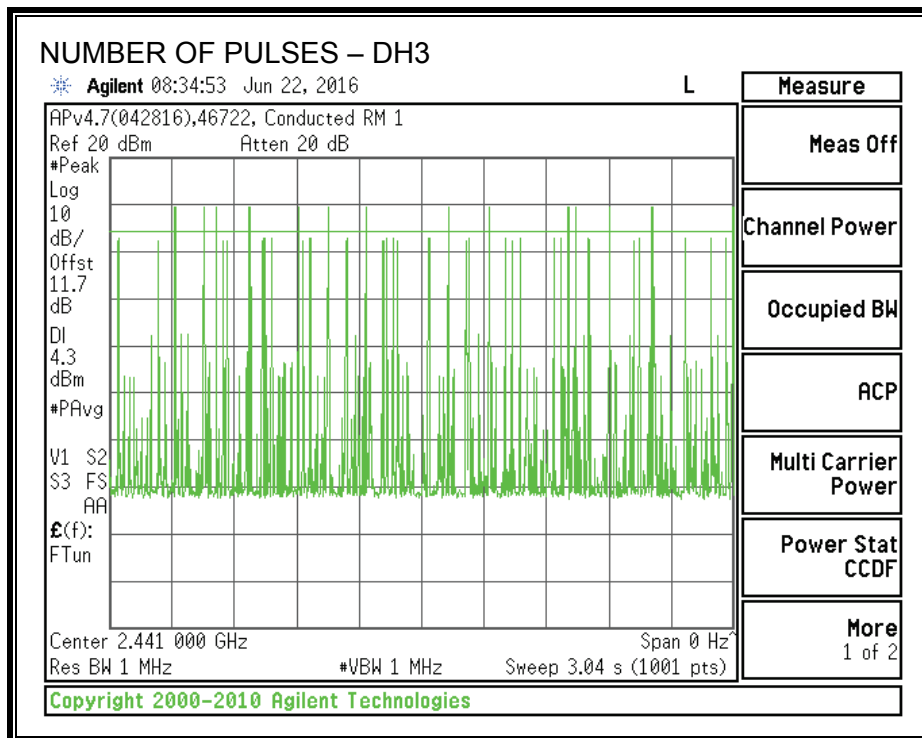

# PULSE WIDTH – DH5

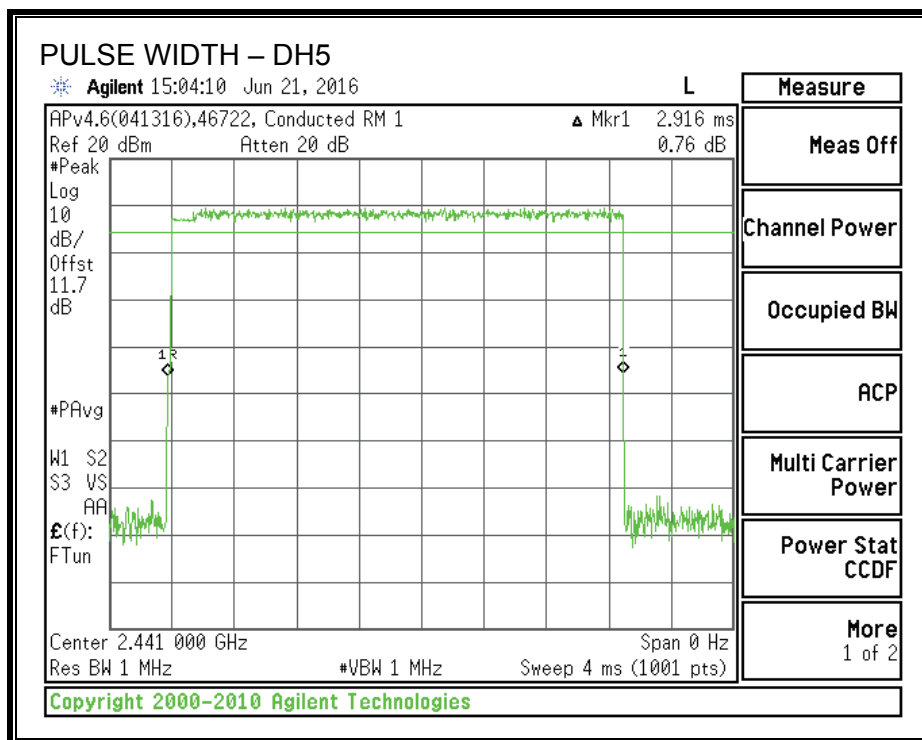

# NUMBER OF PULSES IN 3.04 SECOND OBSERVATION PERIOD – DH5

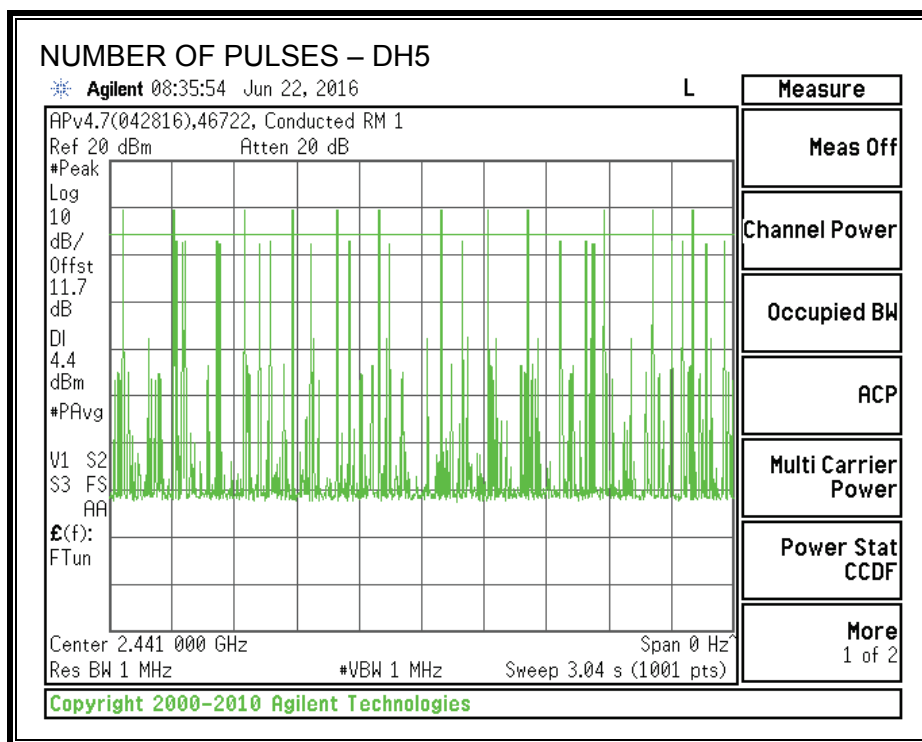

## 8.4.5. OUTPUT POWER

### LIMIT

#### §15.247 (b) (1)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

#### RSS-247 5.4 (2)

For frequency hopping systems operating in the band 2400-2483.5 MHz and employing at least 75 hopping channels, the maximum peak conducted output power shall not exceed 1 W; for all other frequency hopping systems in the band, the maximum peak conducted output power shall not exceed 0.125 W.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT. The cable assembly insertion loss of 12.04 dB (including 10 dB pad and 2.04 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

### RESULTS

For 8DPSK mode, the channel separation was limited to 2/3 the 20 dB bandwidth. Therefore, the output power was limited to 125 mW.

Channel	Frequency (MHz)	Output Power (dBm)	Directional Gain (dBi)	Limit (dBm)	Margin (dB)
Low	2402	5.72	1.30	21	-15.28
Middle	2441	5.44	1.30	21	-15.56
High	2480	5.39	1.30	21	-15.61

Tested by: Nicklas Haydon/Jeff Cabrera  
Test date: 2016-09-15

Note – This test was performed at a reduced power setting.

#### 8.4.6. AVERAGE POWER

##### LIMIT

None; for reporting purposes only.

##### TEST PROCEDURE

The transmitter output is connected to a power meter.

##### RESULTS

The cable assembly insertion loss of 12.04 dB (including 10 dB pad and 2.04 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	2.72
Middle	2441	2.42
High	2480	2.32

Tested by: Nicklas Haydon/Jeff Cabrera  
Test date: 2016-09-15

Note – This test was performed at a reduced power setting.

## **8.4.7. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

#### **FCC §15.247 (d)**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### **IC RSS-247 5.5**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section A8.4 (4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

Tested by: John Manser  
Test date: 2016-06-21



Note – This test was performed at the maximum allowed power setting.

## RESULTS



### SPURIOUS EMISSIONS, LOW CHANNEL

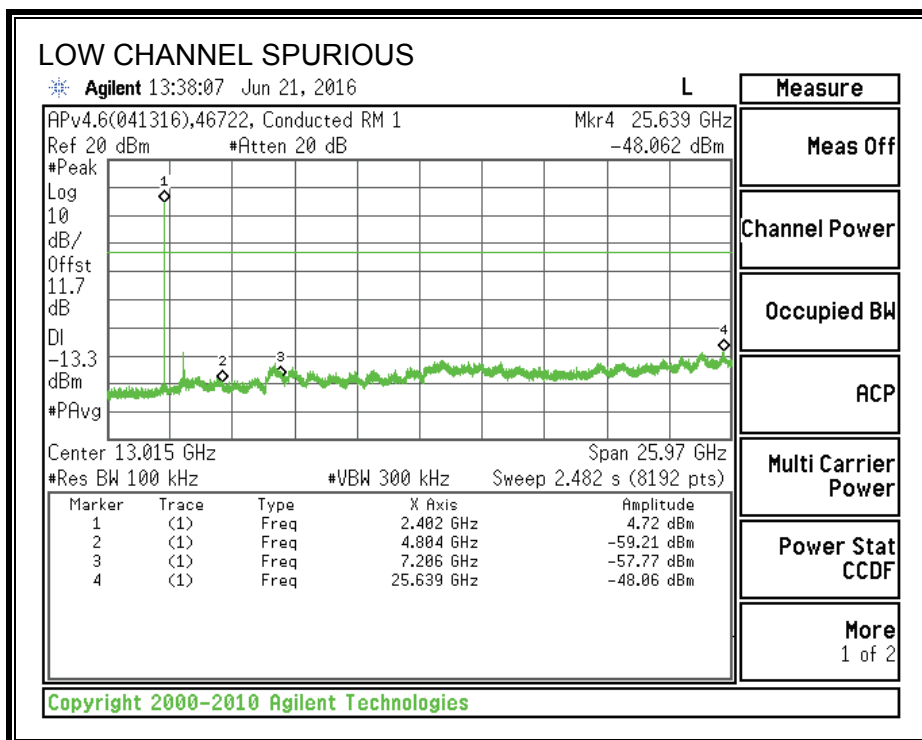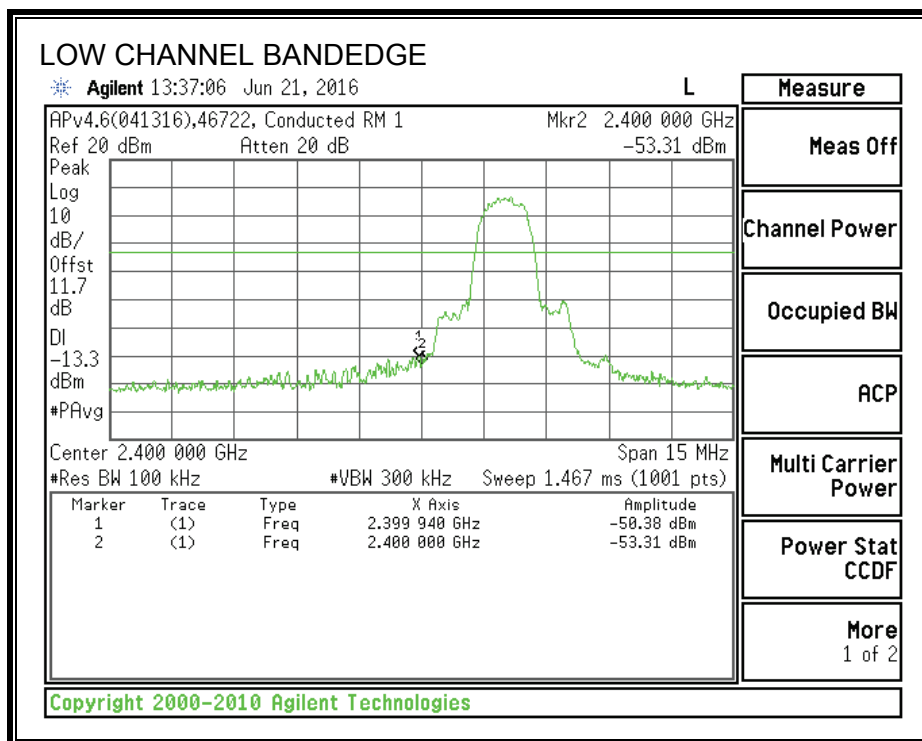



# **SPURIOUS EMISSIONS, MID CHANNEL**

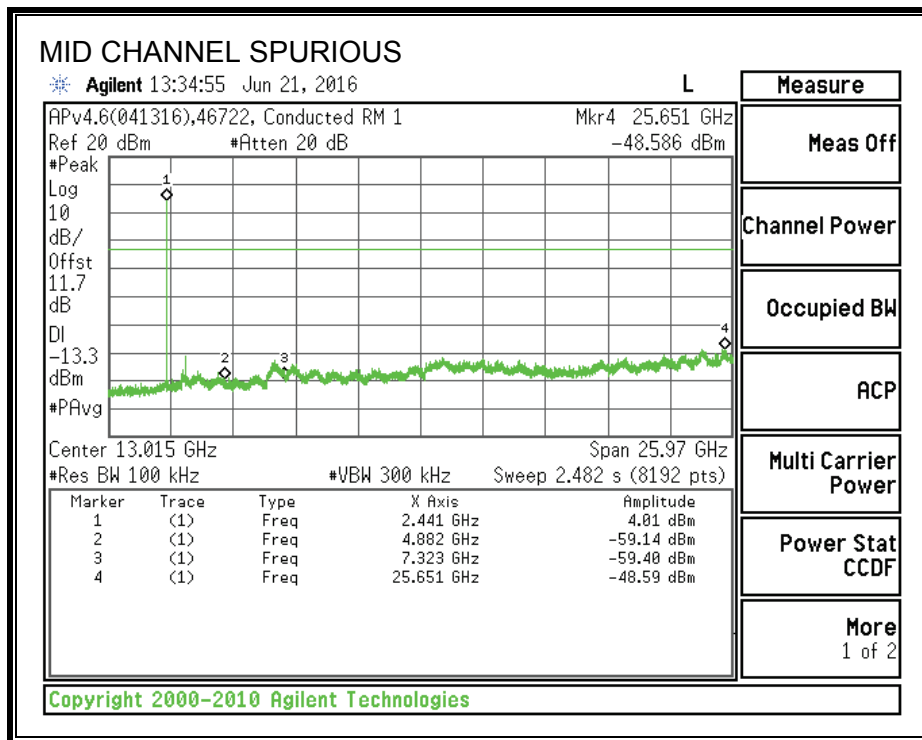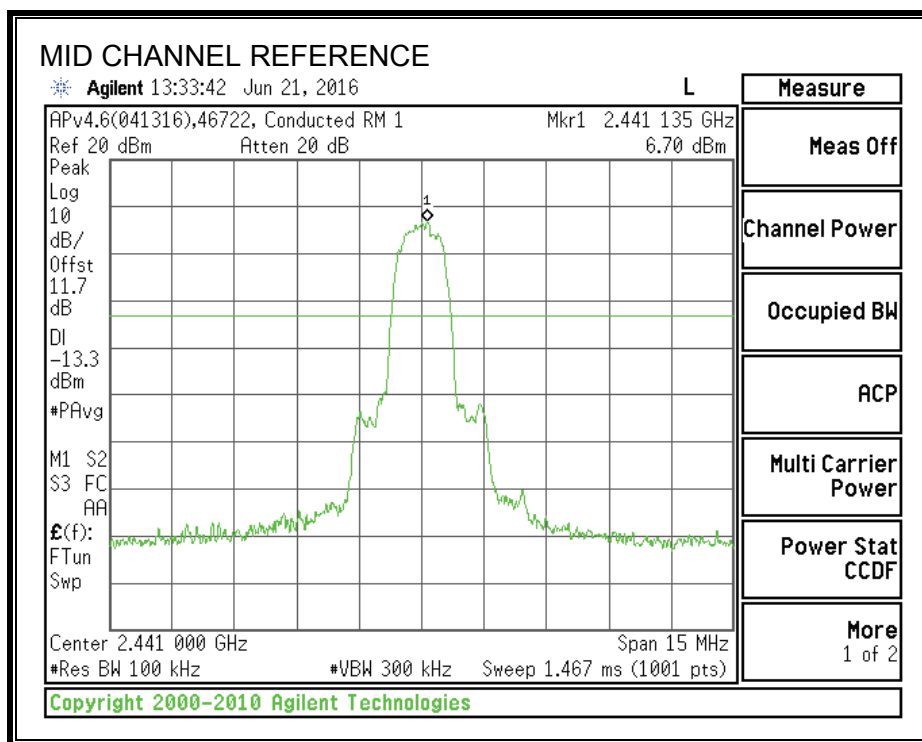

# **SPURIOUS EMISSIONS, HIGH CHANNEL**

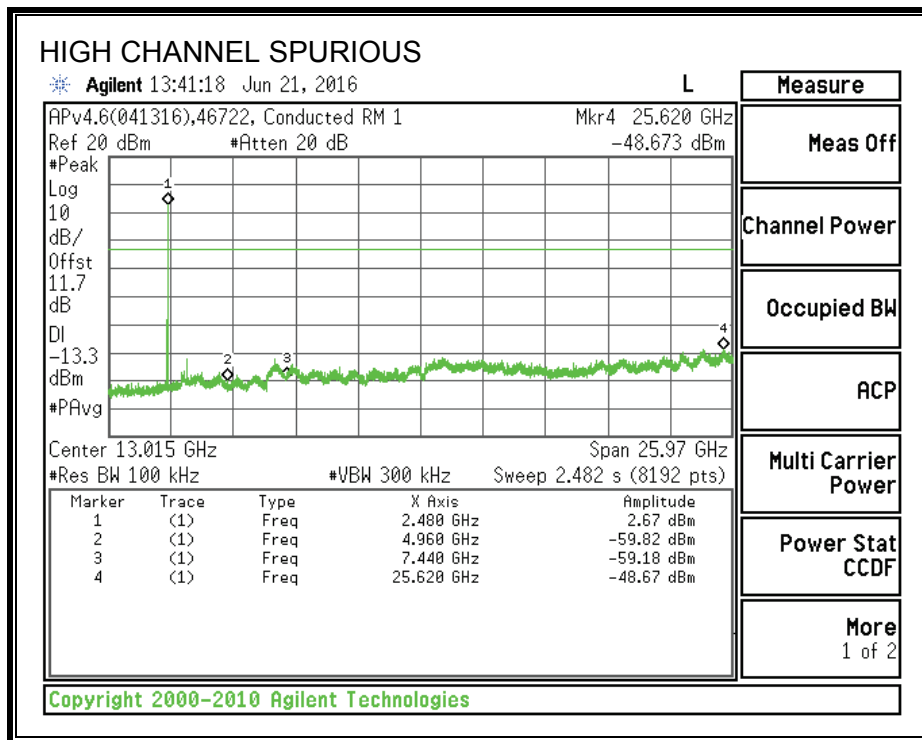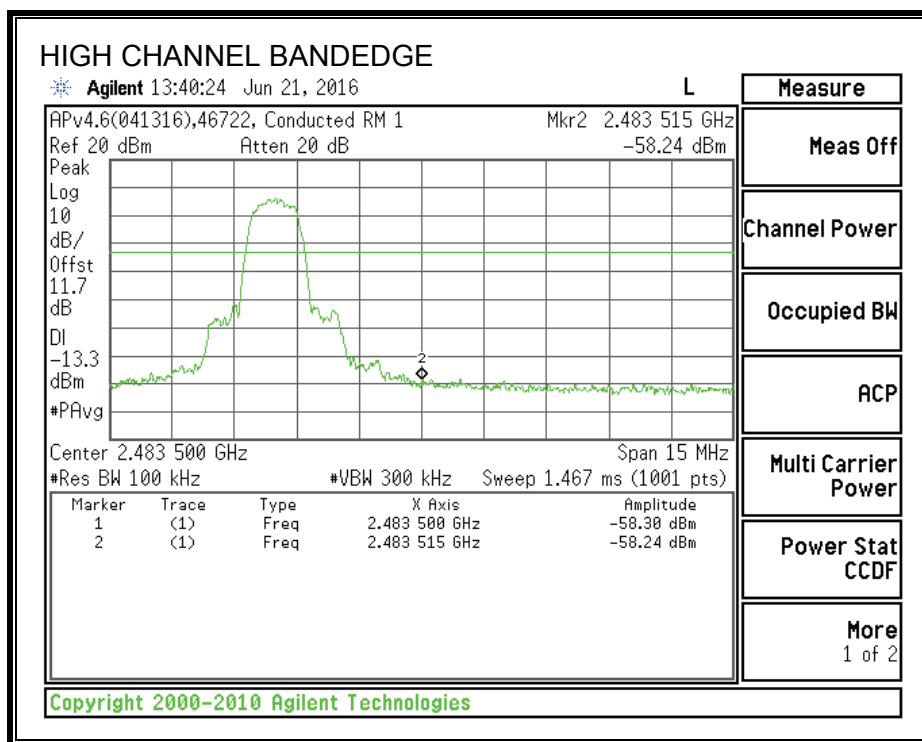

# SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

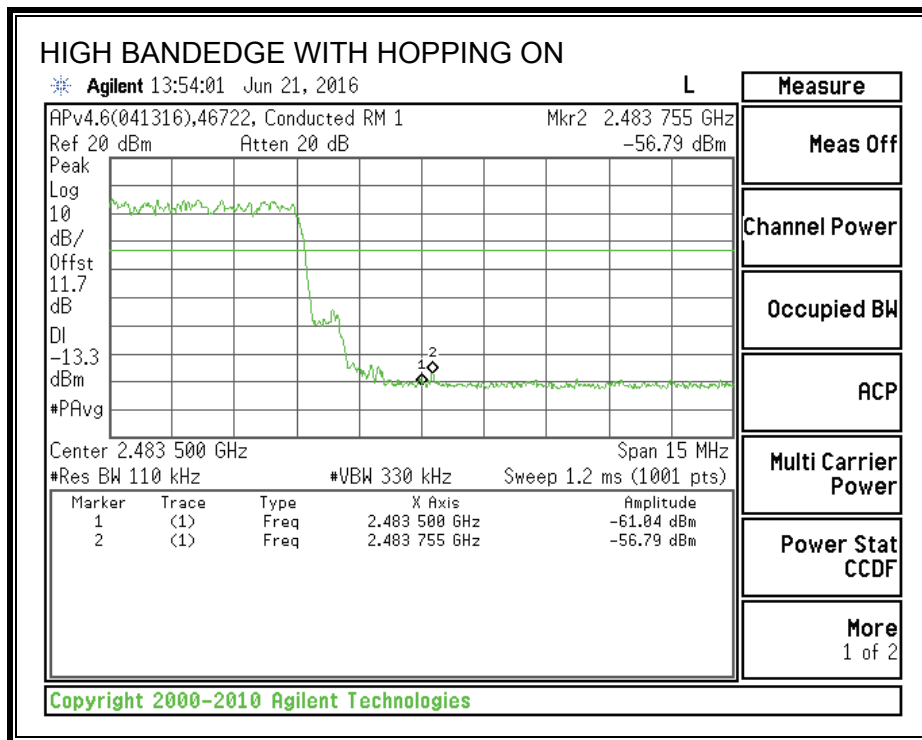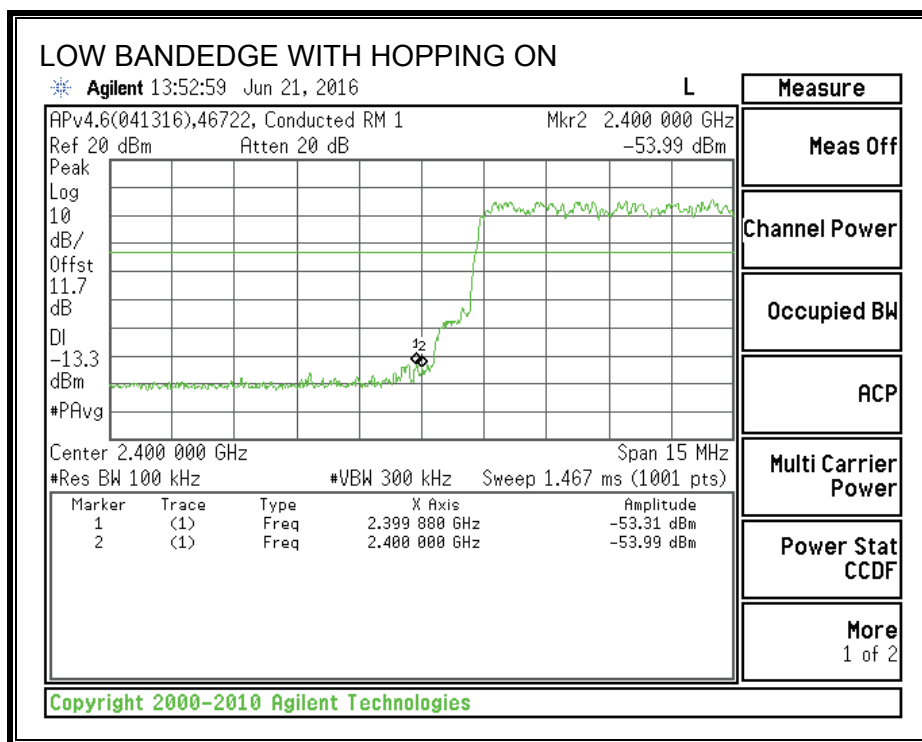

## 9. RADIATED TEST RESULTS

### 9.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205, §15.209, §15.247 (d)

IC RSS-GEN Clause 8.9 (Transmitter)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz measurements and 1.5 m above the ground plane for above 1GHz measurements. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 120 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements for the 30-1000 MHz range, 9 kHz for peak detection measurements or 9 kHz for quasi-peak detection measurements for the 0.15-30 MHz range and 200 Hz for peak detection measurements or 200 Hz for quasi-peak detection measurements for the 9 to 150 kHz range. Peak detection is used unless otherwise noted as quasi-peak.

For peak measurements above 1 GHz, the resolution bandwidth is set to 1 MHz and the video bandwidth is set to 3 MHz. For average measurements above 1GHz, the resolution bandwidth and video bandwidth are set as described in ANSI C63.10:2013 for the applicable measurement. The particular averaging method used for this test program was by measuring using a Peak detector with the resolution bandwidth set to 1MHz and a reduced video bandwidth, based on  $1/T_{on}$  where  $T_{on}$  is the transmit on time.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note – This test was performed at the maximum allowed power setting.

## 9.2. TRANSMITTER 1-18 GHz

### 9.2.1. BASIC DATA RATE GFSK MODULATION

#### RESTRICTED BANDEDGE (LOW CHANNEL)

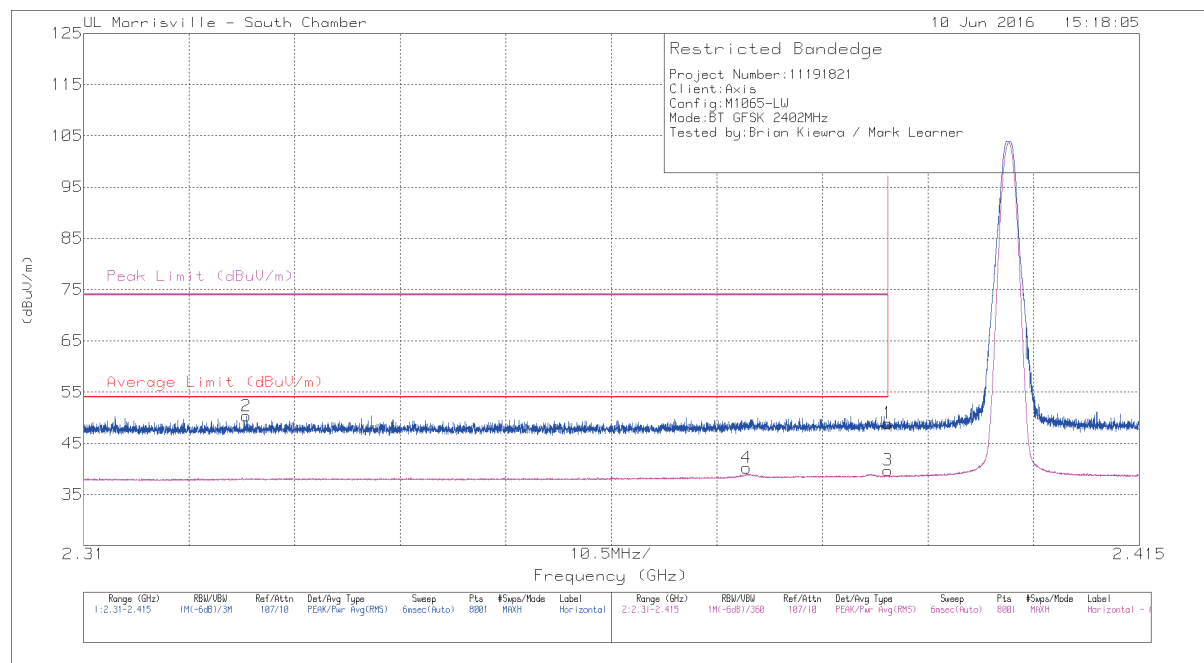


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0069 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.51	Pk	32.2	-24.8	48.91	-	-	74	-25.09	49	171	H
2	* 2.326	43.47	Pk	31.7	-24.8	50.37	-	-	74	-23.63	49	171	H
3	* 2.39	31.17	V1TR	32.2	-24.8	38.57	54	-15.43	-	-	49	171	H
4	* 2.376	31.78	V1TR	32.1	-24.8	39.08	54	-14.92	-	-	49	171	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

V1TR: VB=1/Ton, where: Ton is packet duration

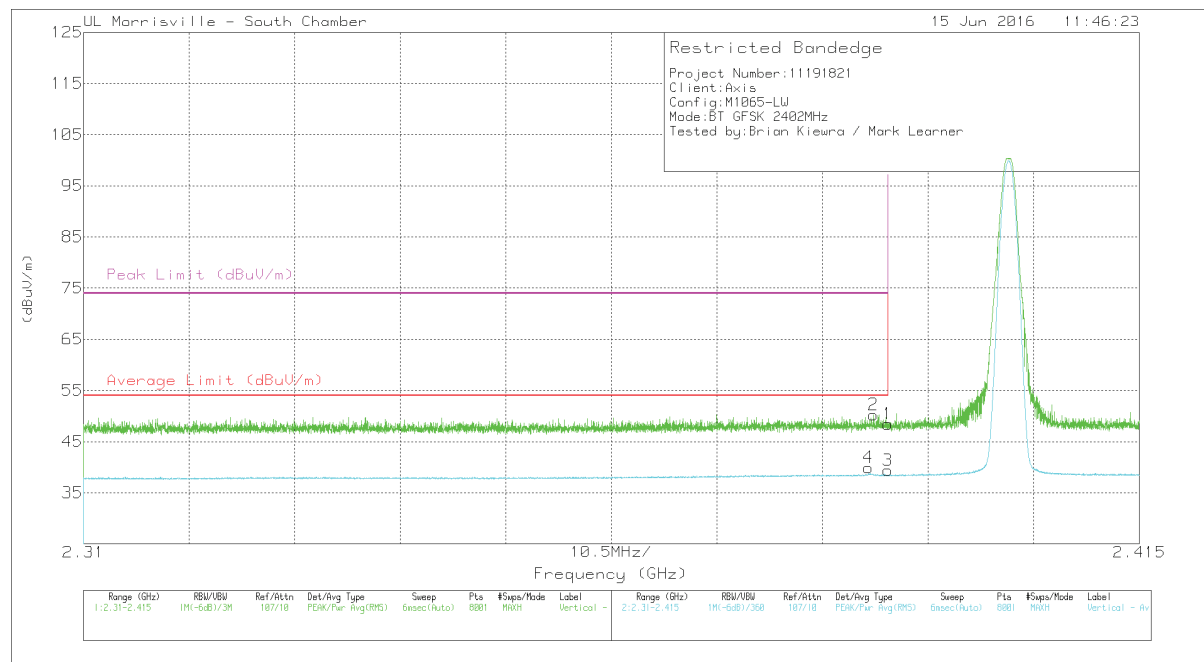


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0069 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.05	Pk	32.2	-24.8	48.45	-	-	74	-25.55	10	137	V
2	* 2.389	42.86	Pk	32.2	-24.8	50.26	-	-	74	-23.74	10	137	V
3	* 2.39	30.89	V1TR	32.2	-24.8	38.29	54	-15.71	-	-	10	137	V
4	* 2.388	31.41	V1TR	32.2	-24.8	38.81	54	-15.19	-	-	10	137	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

V1TR: VB=1/Ton, where: Ton is packet duration

# RESTRICTED BANDEDGE (HIGH CHANNEL)

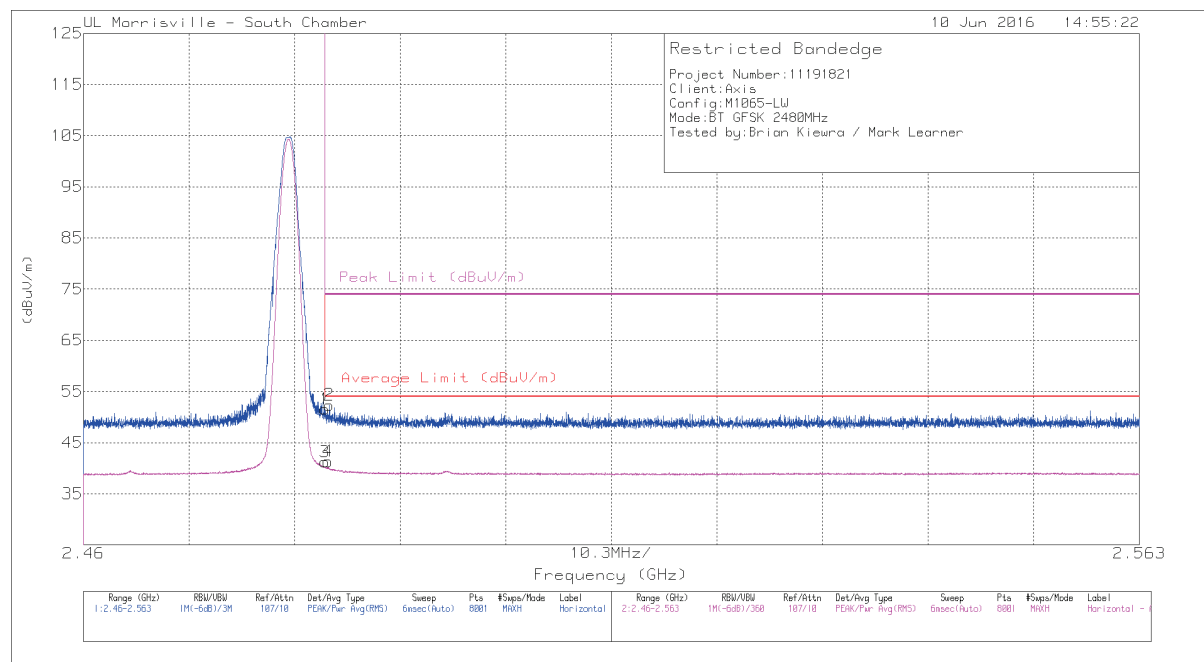


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0069 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	43.86	Pk	32.4	-24.7	51.56	-	-	74	-22.44	45	187	H
2	* 2.484	44.66	Pk	32.4	-24.7	52.36	-	-	74	-21.64	45	187	H
3	* 2.484	32.41	V1TR	32.4	-24.7	40.11	54	-13.89	-	-	45	187	H
4	* 2.484	32.48	V1TR	32.4	-24.7	40.18	54	-13.82	-	-	45	187	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

V1TR: VB=1/Ton, where: Ton is packet duration

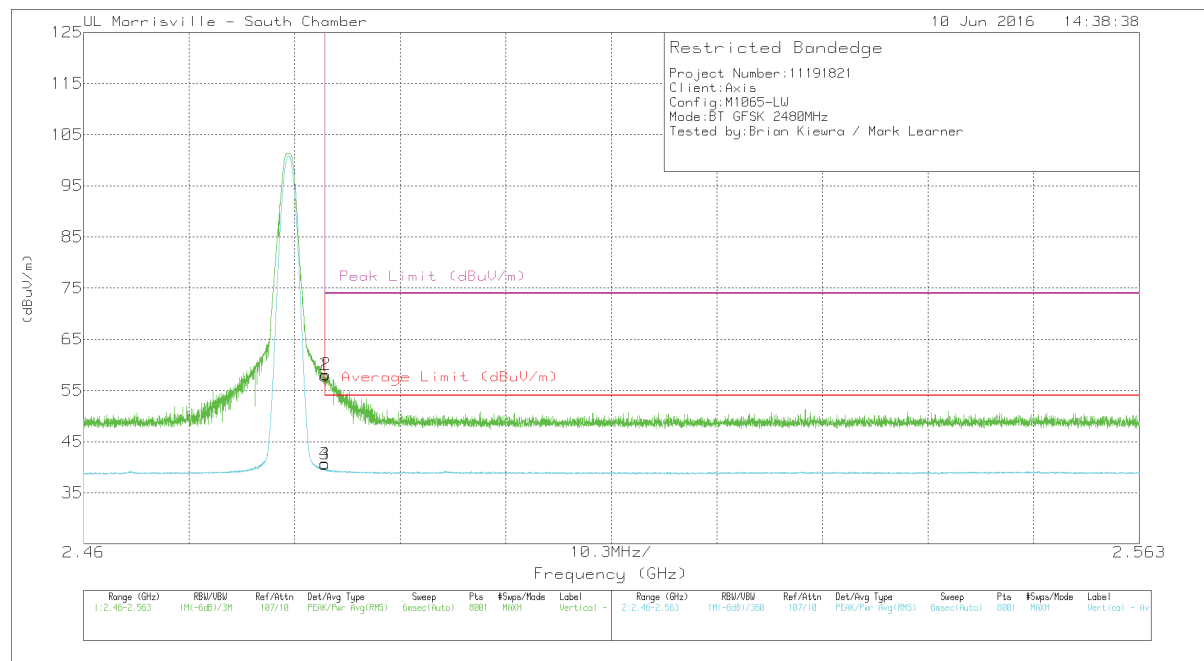


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0069 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.21	Pk	32.4	-24.7	57.91	-	-	74	-16.09	24	144	V
2	* 2.484	50.44	Pk	32.4	-24.7	58.14	-	-	74	-15.86	24	144	V
3	* 2.484	31.74	V1TR	32.4	-24.7	39.44	54	-14.56	-	-	24	144	V
4	* 2.484	31.9	V1TR	32.4	-24.7	39.6	54	-14.4	-	-	24	144	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


V1TR: VB=1/Ton, where: Ton is packet duration

## HARMONICS AND SPURIOUS EMISSIONS

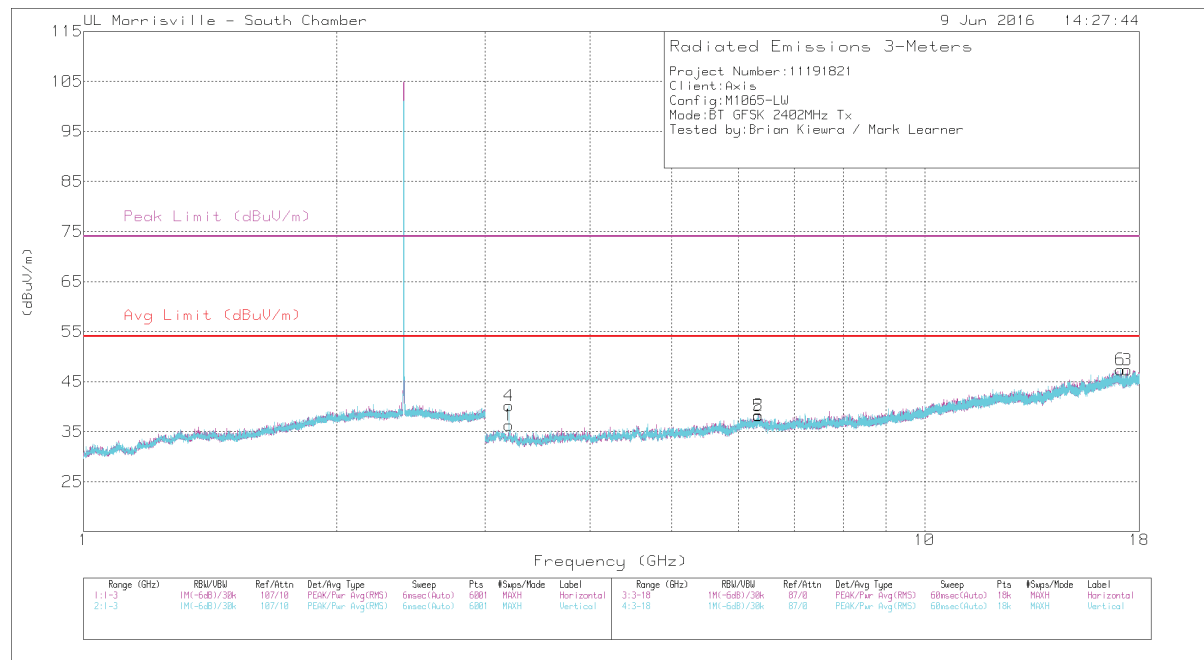

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0069 (dB/m)	Amp/Cbl/ fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.202	36.25	Pk	33.4	-33.4	36.25	-	-	-	-	0-360	102	H
2	6.346	31.42	Pk	35.5	-28.6	38.32	-	-	-	-	0-360	102	H
3	17.424	30.11	Pk	41.2	-24	47.31	-	-	-	-	0-360	199	H
4	3.202	40.21	Pk	33.4	-33.4	40.21	-	-	-	-	0-360	101	V
5	6.345	31.15	Pk	35.5	-28.5	38.15	-	-	-	-	0-360	101	V
6	17.079	30.1	Pk	41.4	-24.1	47.4	-	-	-	-	0-360	199	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
Pk - Peak detector

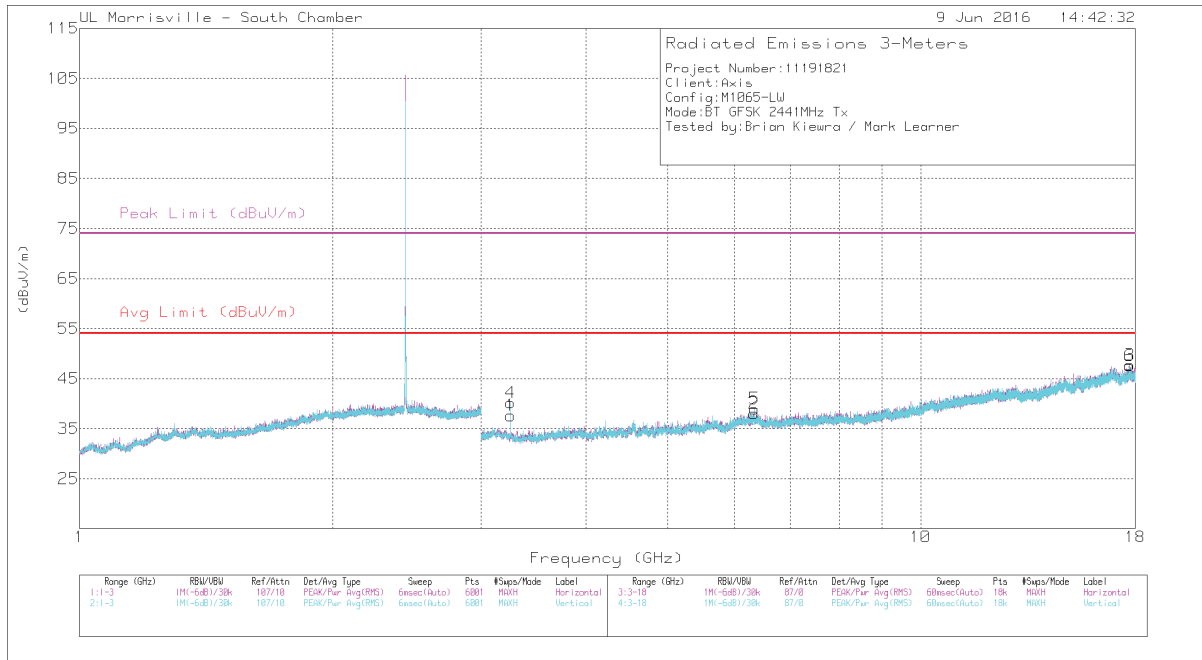


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0069 (dB/m)	Amp/Cbl/ fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 17.733	35.43	PK-U	41.2	-22.5	54.13	-	-	74	-19.87	275	198	H
	* 17.733	23.76	V1TR	41.2	-22.6	42.36	54	-11.64	-	-	275	198	H
6	* 17.733	35.35	PK-U	41.2	-22.5	54.05	-	-	74	-19.95	272	198	V
	* 17.735	23.8	V1TR	41.2	-22.5	42.5	54	-11.5	-	-	272	198	V
1	3.255	38.22	Pk	33.1	-33.7	37.62	-	-	-	-	0-360	199	H
2	6.339	31.19	Pk	35.5	-28.6	38.09	-	-	-	-	0-360	199	H
4	3.255	40.76	Pk	33.1	-33.7	40.16	-	-	-	-	0-360	102	V
5	6.341	31.97	Pk	35.5	-28.5	38.97	-	-	-	-	0-360	102	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

PK-U: Maximum Peak

V1TR: VB=1/Ton, where: Ton is packet duration

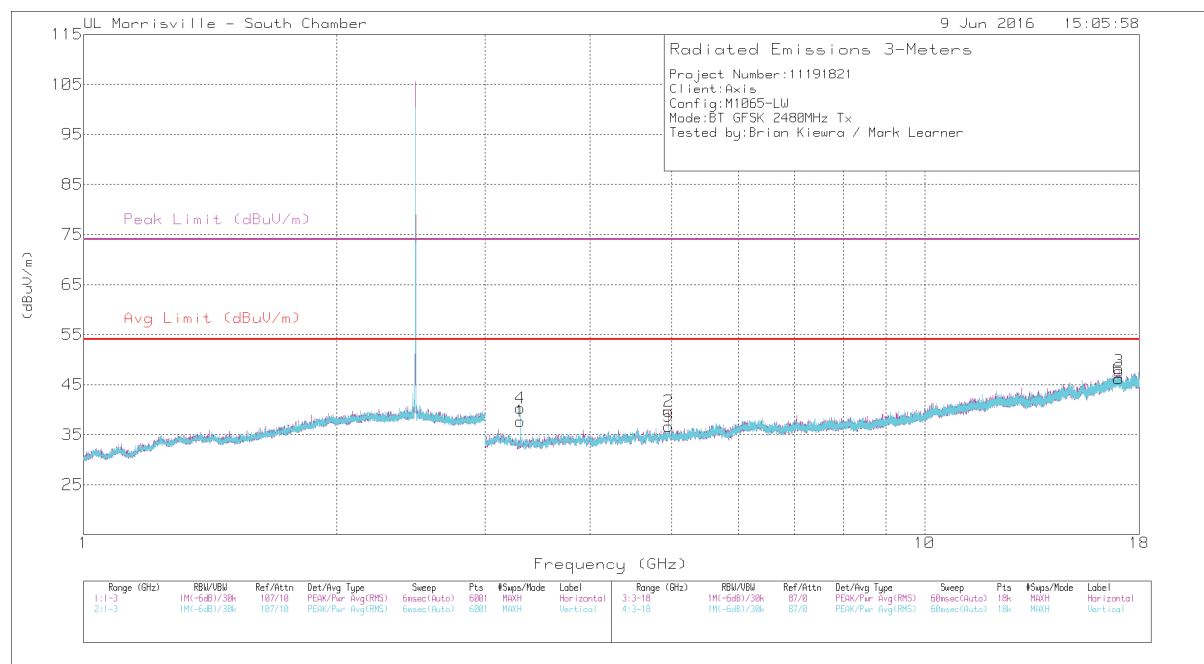

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0069 (dB/m)	Amp/Cbl/ ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.96	43.24	PK-U	34.1	-31.6	45.74	-	-	74	-28.26	357	121	H
	* 4.96	34.85	V1TR	34.1	-31.6	37.35	54	-16.65	-	-	357	121	H
5	* 4.96	42.08	PK-U	34.1	-31.6	44.58	-	-	74	-29.42	360	187	V
	* 4.96	31.31	V1TR	34.1	-31.6	33.81	54	-20.19	-	-	360	187	V
1	3.307	38.46	Pk	32.7	-33.5	37.66	-	-	-	-	0-360	102	H
3	17.024	30.74	Pk	41.5	-24.5	47.74	-	-	-	-	0-360	199	H
4	3.307	41.1	Pk	32.7	-33.5	40.3	-	-	-	-	0-360	102	V
6	17.017	29.32	Pk	41.5	-24.6	46.22	-	-	-	-	0-360	102	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

PK-U: Maximum Peak

V1TR: VB=1/Ton, where: Ton is packet duration

## 9.2.2. ENHANCED DATA RATE 8PSK MODULATION

### RESTRICTED BANDEDGE (LOW CHANNEL)

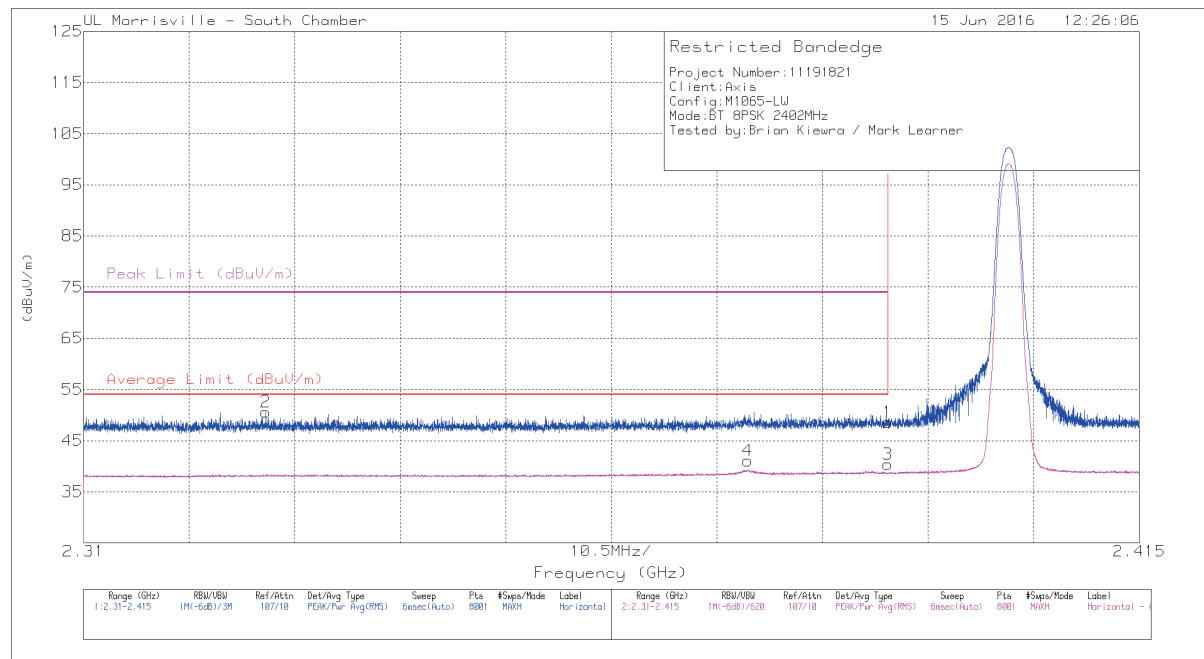


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0069 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.17	Pk	32.2	-24.8	48.57	-	-	74	-25.43	59	128	H
2	* 2.328	43.72	Pk	31.7	-24.8	50.62	-	-	74	-23.38	59	128	H
3	* 2.39	31.15	V1TR	32.2	-24.8	38.55	54	-15.45	-	-	59	128	H
4	* 2.376	31.94	V1TR	32.1	-24.8	39.24	54	-14.76	-	-	59	128	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

V1TR: VB=1/Ton, where: Ton is packet duration

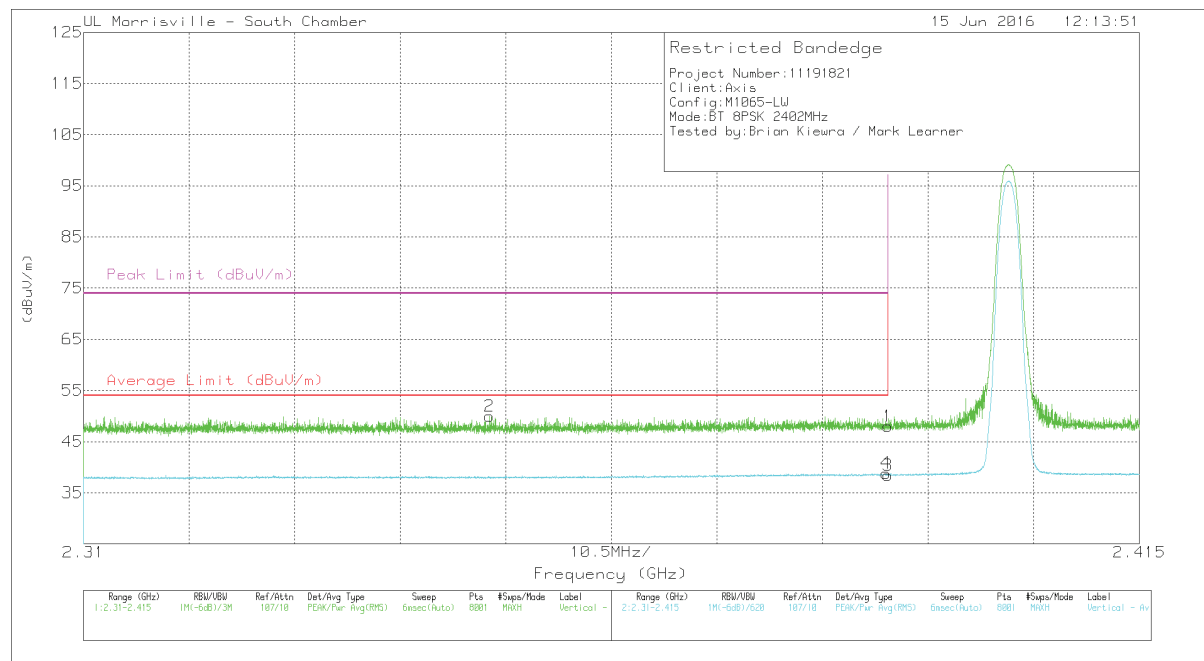


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0069 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.63	Pk	32.2	-24.8	48.03	-	-	74	-25.97	358	115	V
2	* 2.35	42.96	Pk	31.8	-24.8	49.96	-	-	74	-24.04	358	115	V
3	* 2.39	31.02	V1TR	32.2	-24.8	38.42	54	-15.58	-	-	358	115	V
4	* 2.39	31.44	V1TR	32.2	-24.8	38.84	54	-15.16	-	-	358	115	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

V1TR: VB=1/Ton, where: Ton is packet duration

# RESTRICTED BANDEDGE, (HIGH CHANNEL)

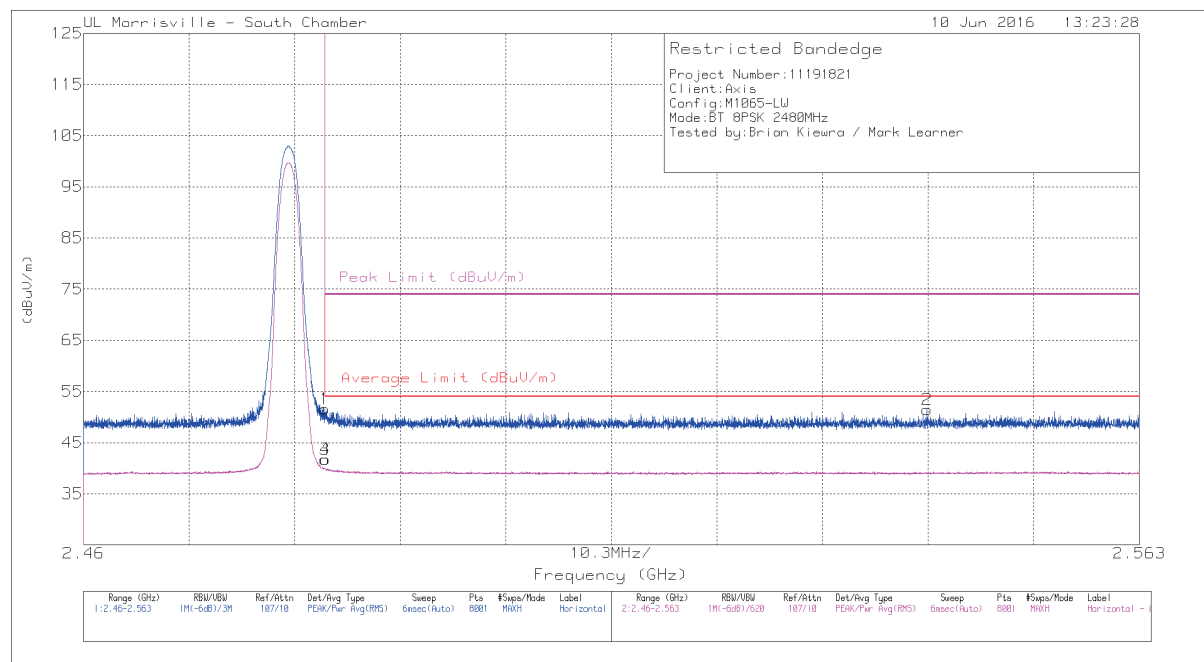


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0069 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	43.9	Pk	32.4	-24.7	51.6	-	-	74	-22.4	37	123	H
3	* 2.484	32.2	V1TR	32.4	-24.7	39.9	54	-14.1	-	-	37	123	H
4	* 2.484	32.24	V1TR	32.4	-24.7	39.94	54	-14.06	-	-	37	123	H
2	2.542	43.71	Pk	32.4	-24.7	51.41	-	-	74	-22.59	37	123	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

V1TR: VB=1/Ton, where: Ton is packet duration

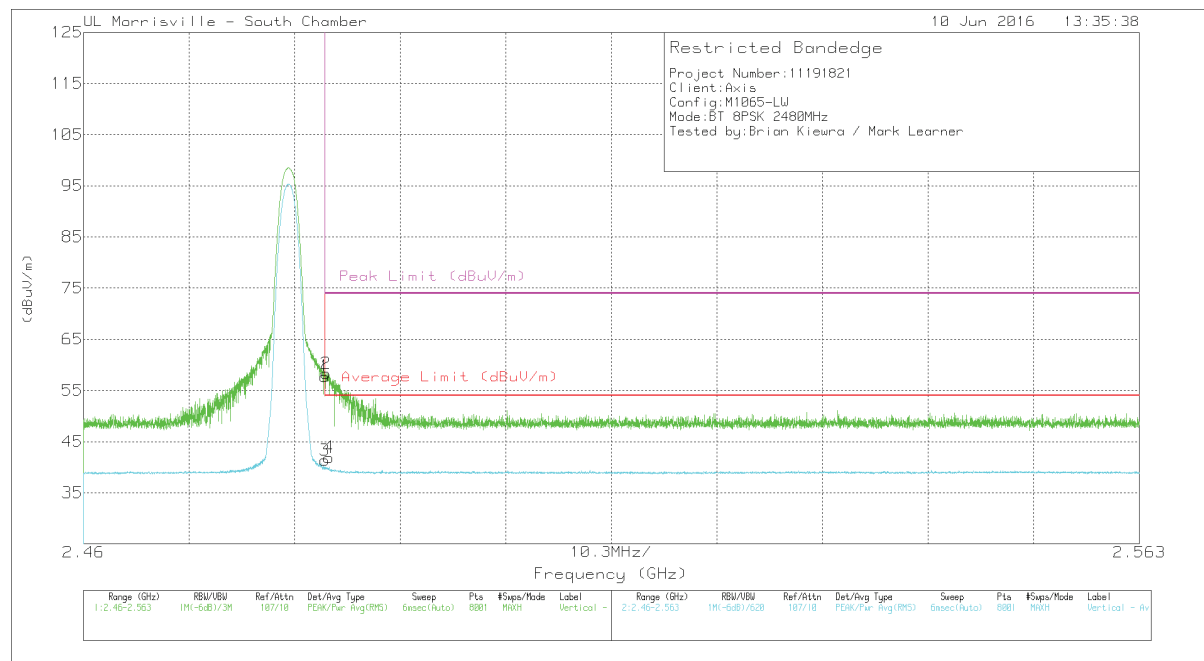


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0069 (dB/m)	Amp/Cbl/ Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	50.08	Pk	32.4	-24.7	57.78	-	-	74	-16.22	355	150	V
2	* 2.484	50.63	Pk	32.4	-24.7	58.33	-	-	74	-15.67	355	150	V
3	* 2.484	31.79	V1TR	32.4	-24.7	39.49	54	-14.51	-	-	355	150	V
4	* 2.484	32.36	V1TR	32.4	-24.7	40.06	54	-13.94	-	-	355	150	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


V1TR: VB=1/Ton, where: Ton is packet duration

## HARMONICS AND SPURIOUS EMISSIONS

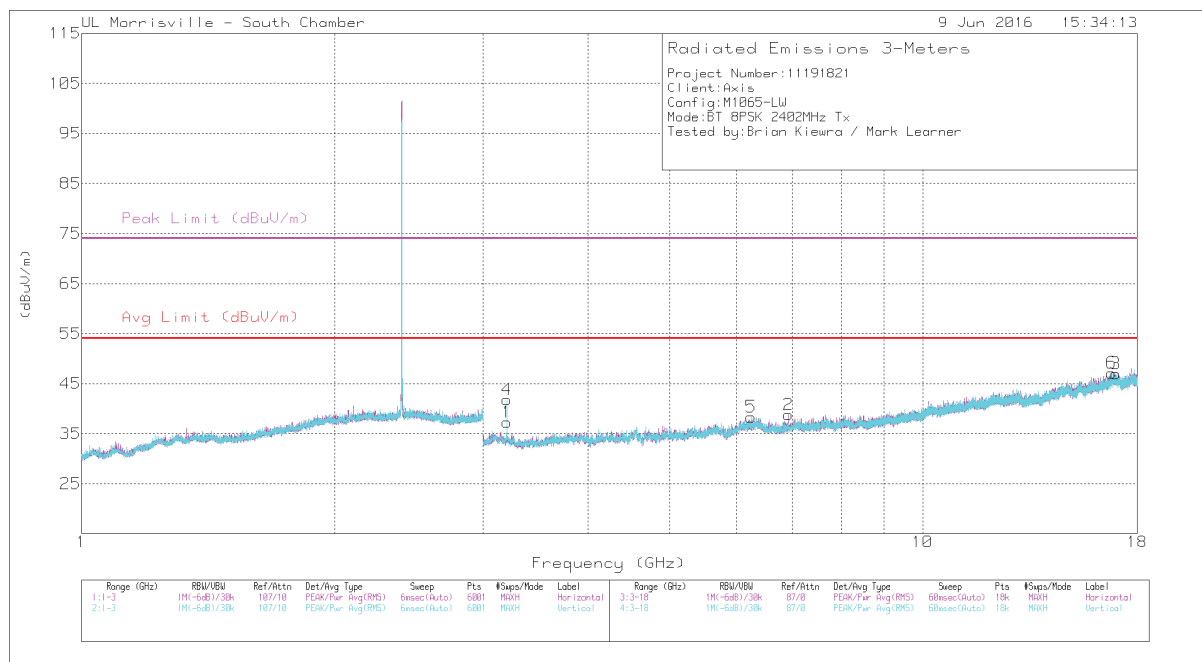

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0069 (dB/m)	Amp/Cbl/f ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	3.202	37.3	Pk	33.4	-33.4	37.3	-	-	-	-	0-360	102	H
2	6.922	32.11	Pk	35.5	-28.8	38.81	-	-	-	-	0-360	102	H
3	16.964	30	Pk	41.5	-24.5	47	-	-	-	-	0-360	199	H
4	3.202	41.8	Pk	33.4	-33.4	41.8	-	-	-	-	0-360	101	V
5	6.252	32.24	Pk	35.4	-29.3	38.34	-	-	-	-	0-360	101	V
6	16.769	30.45	Pk	41.6	-24.9	47.15	-	-	-	-	0-360	101	V

Pk - Peak detector

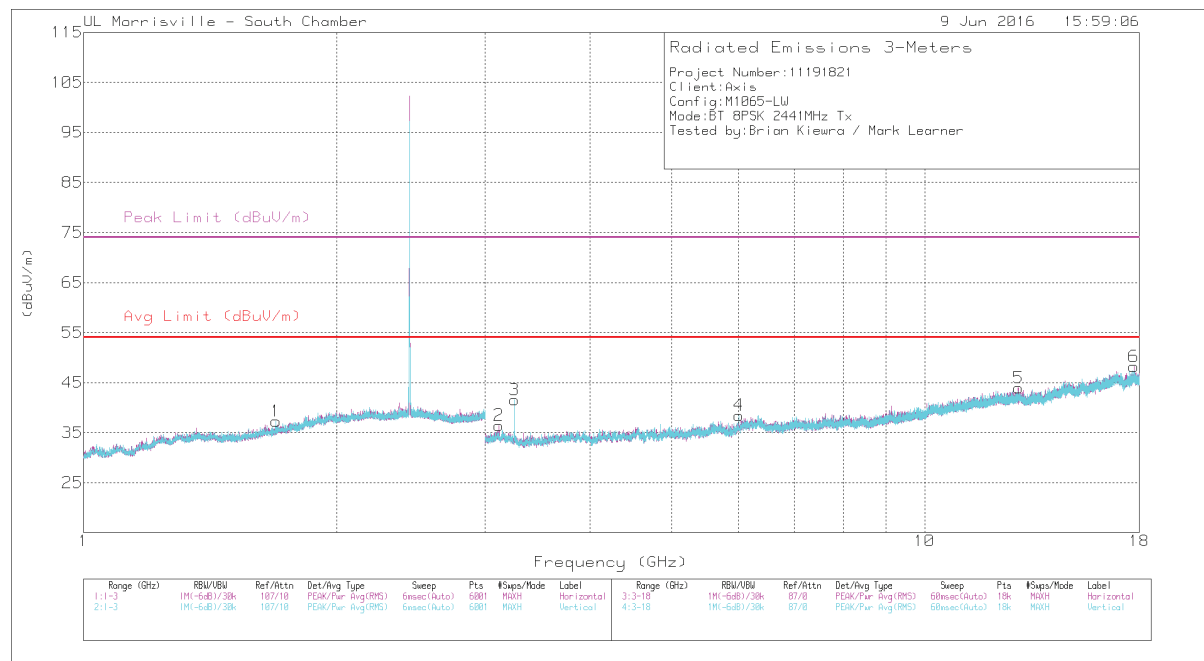


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0069 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 17.736	35.16	PK-U	41.2	-22.5	53.86	-	-	74	-20.14	109	102	H
	* 17.737	23.87	V1TR	41.2	-22.5	42.57	54	-11.43	-	-	109	102	H
1	* 1.693	35.75	PK-U	29	-22.3	42.45	-	-	74	-31.55	292	102	V
	* 1.692	24.07	V1TR	29	-22.4	30.67	54	-23.33	-	-	292	102	V
2	3.117	36.05	Pk	33.8	-33.4	36.45	-	-	-	-	0-360	102	H
5	12.934	29.78	Pk	39.2	-25	43.98	-	-	-	-	0-360	102	H
3	3.255	42.14	Pk	33.1	-33.7	41.54	-	-	-	-	0-360	102	V
4	6.015	32.38	Pk	35.1	-29	38.48	-	-	-	-	0-360	102	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

PK-U: Maximum Peak

V1TR: VB=1/Ton, where: Ton is packet duration

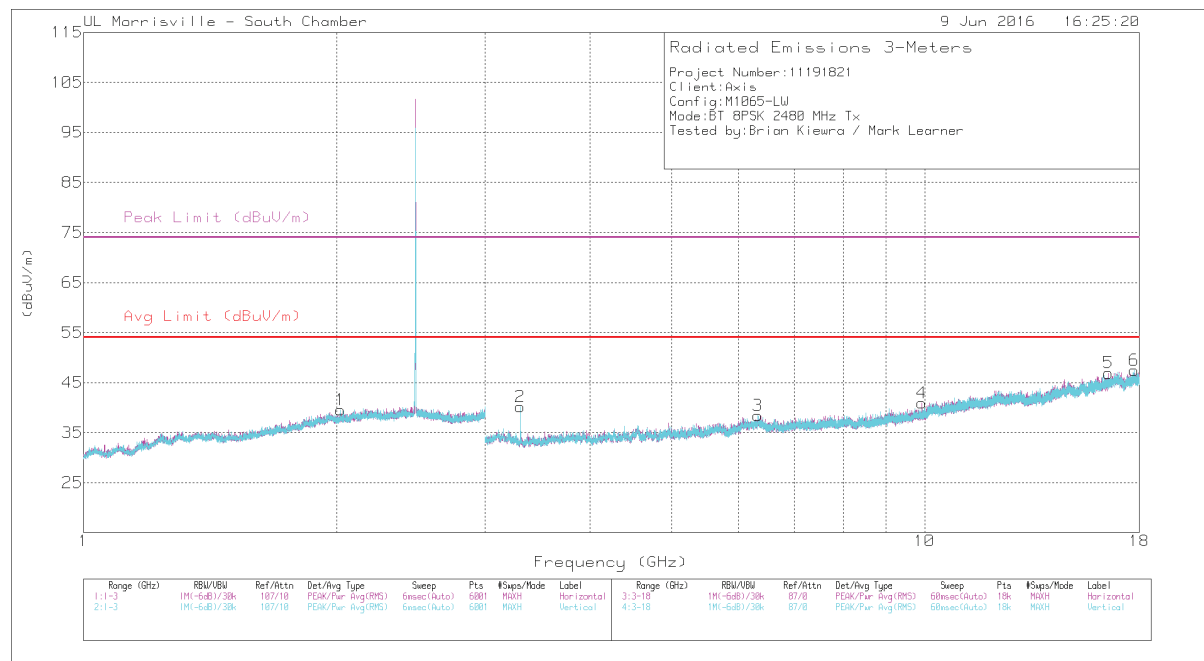

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0069 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
6	* 17.737	34.44	PK-U	41.2	-22.5	53.14	-	-	74	-20.86	231	198	V
	* 17.738	23.69	V1TR	41.2	-22.5	42.39	54	-11.61	-	-	231	198	V
4	9.919	30.45	Pk	37.1	-26.6	40.95	-	-	-	-	0-360	199	H
5	16.545	29.51	Pk	41.3	-23.9	46.91	-	-	-	-	0-360	102	H
1	2.02	31.34	Pk	31.2	-23	39.54	-	-	-	-	0-360	102	V
2	3.307	40.96	Pk	32.7	-33.5	40.16	-	-	-	-	0-360	102	V
3	6.336	31.62	Pk	35.4	-28.6	38.42	-	-	-	-	0-360	199	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

PK-U: Maximum Peak

V1TR: VB=1/Ton, where: Ton is packet duration

### 9.3. WORST-CASE BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

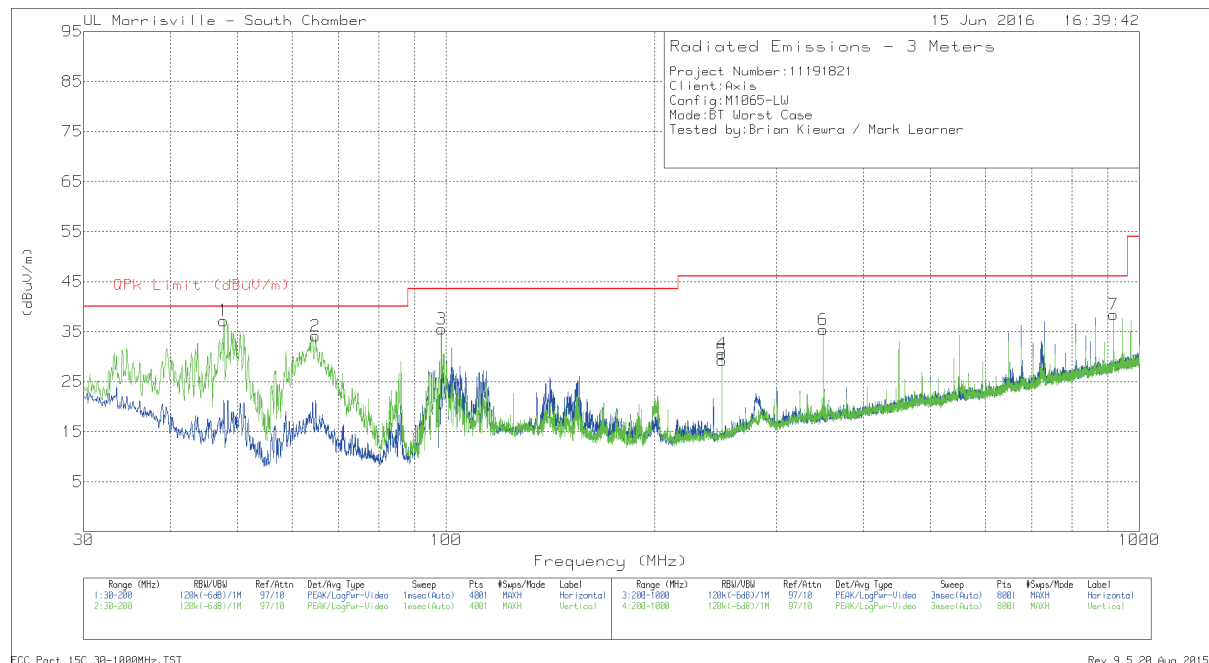

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AT0074 AF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 250.0144	43.55	Qp	16.1	-29.9	29.75	46.02	-16.27	219	117	H
5	* 249.9995	42.53	Qp	16.1	-29.9	28.73	46.02	-17.29	164	173	V
1	47.8052	54.8	Qp	13.4	-31.6	36.6	40	-3.4	341	111	V
2	64.7919	50.32	Qp	12.2	-31.4	31.12	40	-8.88	322	104	V
3	98.4675	52.69	Pk	13.9	-31.1	35.49	43.52	-8.03	0-360	102	V
6	350	45.6	Pk	19.2	-29.4	35.4	46.02	-10.62	0-360	102	V
7	918	38.2	Pk	27	-26.8	38.4	46.02	-7.62	0-360	102	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

Qp - Quasi-Peak detector

## 9.4. WORST-CASE 18 - 26GHz

### SPURIOUS EMISSIONS 18 to 26GHz (WORST-CASE CONFIGURATION)

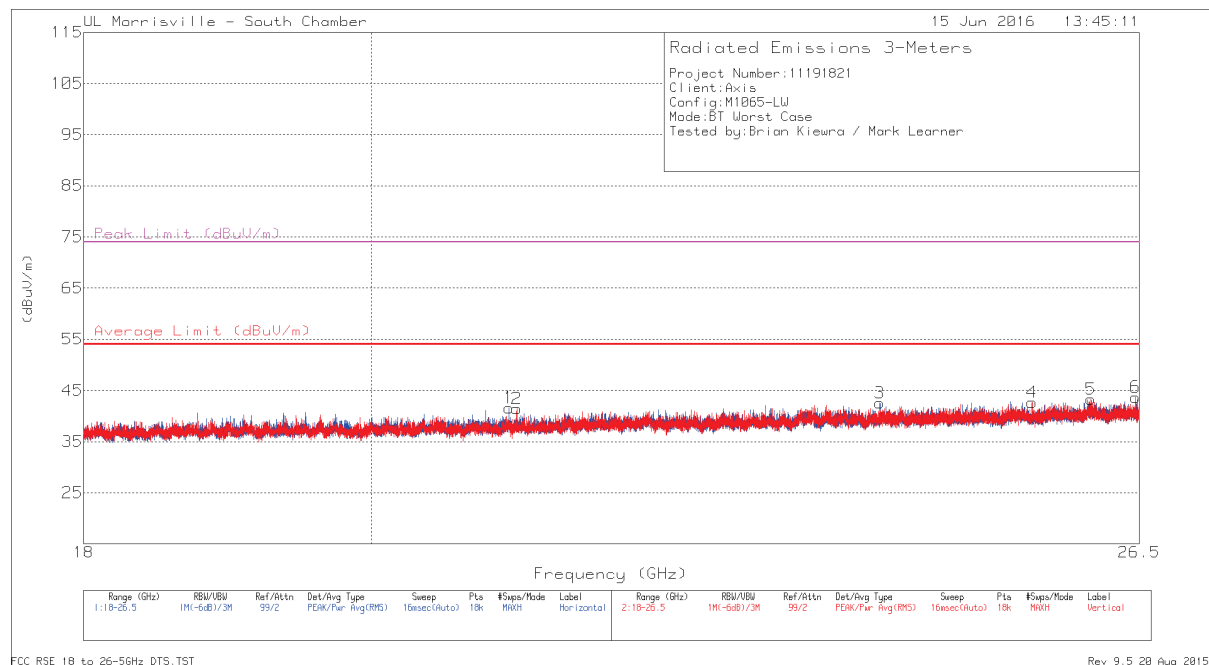

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0076 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 21.035	46.76	PK-U	33.4	-39.9	40.26	54	-13.74	74	-33.74	293	248	H
2	* 21.095	46.81	PK-U	33.4	-40.1	40.11	54	-13.89	74	-33.89	136	104	V
3	24.098	47.06	Pk	34.4	-38.9	42.56	-	-	74	-31.44	0-360	299	H
4	25.479	46.26	Pk	34.5	-38.1	42.66	-	-	74	-31.34	0-360	151	V
5	26.035	45.79	Pk	35.1	-37.6	43.29	-	-	74	-30.71	0-360	151	V
6	26.463	46.11	Pk	35	-37.4	43.71	-	-	74	-30.29	0-360	252	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

PK-U: Maximum Peak

V1TR: VB=1/Ton, where: Ton is packet duration

## 10. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 <sup>*</sup>	56 to 46 <sup>*</sup>
0.5-5	56	46
5-30	60	50

<sup>\*</sup> Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS

Note – This test was performed at the maximum allowed power setting.

## LINE 1 RESULTS

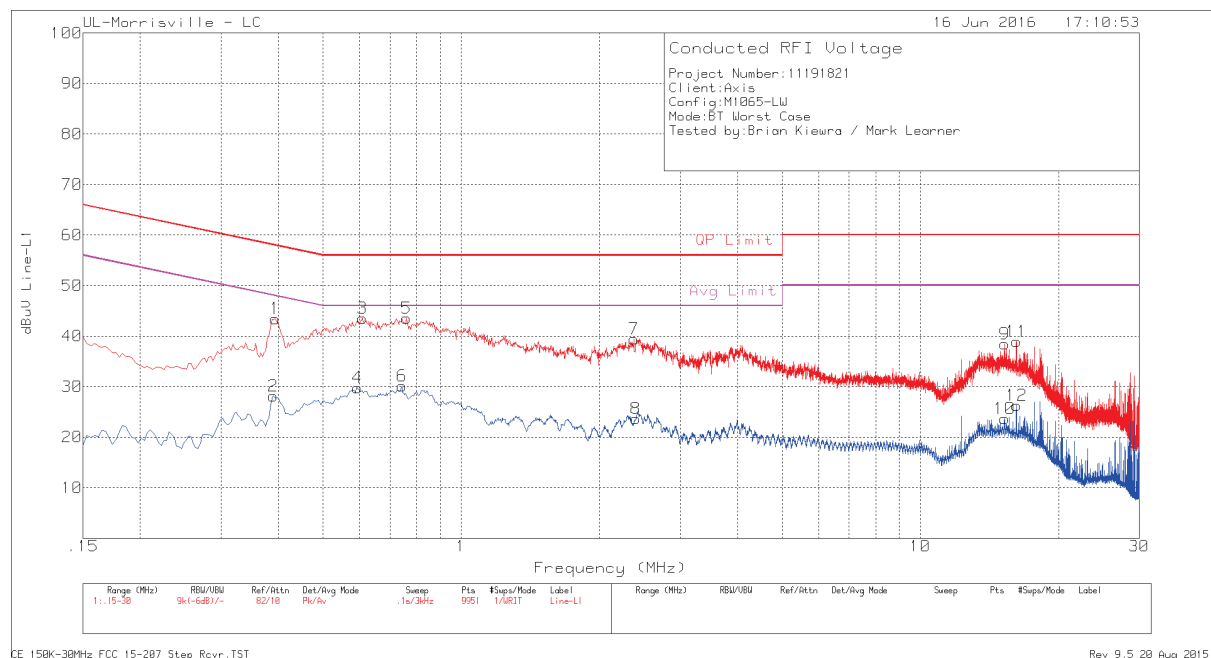


Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF [dB]	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit	Margin (dB)	Avg Limit	Margin (dB)
1	.393	33.38	Pk	.1	10	43.48	58	-14.52	-	-
2	.39	18.08	Av	.1	10	28.18	-	-	48.06	-19.88
3	.609	33.49	Pk	.1	10	43.59	56	-12.41	-	-
4	.594	19.72	Av	.1	10	29.82	-	-	46	-16.18
5	.759	33.58	Pk	0	10	43.58	56	-12.42	-	-
6	.744	20.13	Av	0	10	30.13	-	-	46	-15.87
7	2.379	29.27	Pk	.1	10.1	39.47	56	-16.53	-	-
8	2.403	13.52	Av	.1	10.1	23.72	-	-	46	-22.28
9	15.252	27.89	Pk	.2	10.4	38.49	60	-21.51	-	-
10	15.252	13.04	Av	.2	10.4	23.64	-	-	50	-26.36
11	16.227	28.23	Pk	.2	10.5	38.93	60	-21.07	-	-
12	16.227	15.61	Av	.2	10.5	26.31	-	-	50	-23.69

Pk - Peak detector

Av - Average detection

## LINE 2 RESULTS

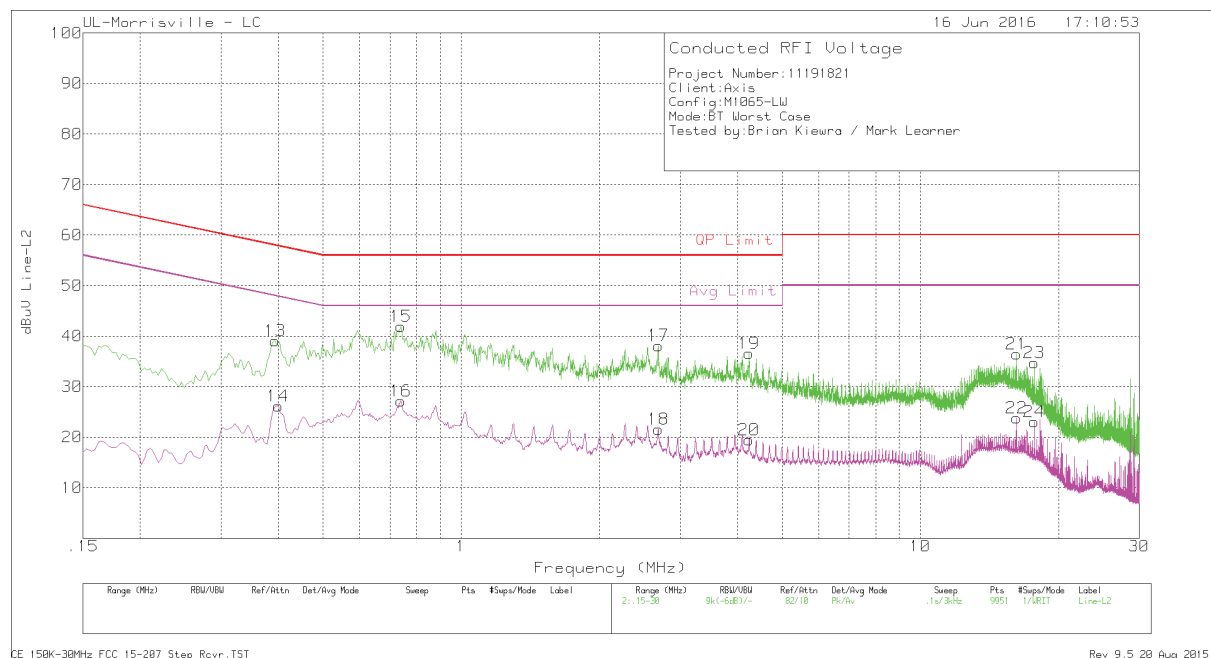

Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF [dB]	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit	Margin (dB)	Avg Limit	Margin (dB)
13	.393	28.99	Pk	.1	10	39.09	58	-18.91	-	-
14	.399	16.04	Av	.1	10	26.14	-	-	47.87	-21.73
15	.738	31.97	Pk	0	10	41.97	56	-14.03	-	-
16	.738	17.21	Av	0	10	27.21	-	-	46	-18.79
17	2.688	28.04	Pk	0	10.1	38.14	56	-17.86	-	-
18	2.688	11.46	Av	0	10.1	21.56	-	-	46	-24.44
19	4.236	26.43	Pk	.1	10.1	36.63	56	-19.37	-	-
20	4.236	9.24	Av	.1	10.1	19.44	-	-	46	-26.56
21	16.23	25.91	Pk	.1	10.5	36.51	60	-23.49	-	-
22	16.23	13.16	Av	.1	10.5	23.76	-	-	50	-26.24
23	17.694	24	Pk	.2	10.5	34.7	60	-25.3	-	-
24	17.694	12.31	Av	.2	10.5	23.01	-	-	50	-26.99

Pk - Peak detector

Av - Average detection