

Power Input: 2.08-0.89A,
12-28VDC, max 25W
Or PoE 0.47-0.44A

Powered Device,
50-57VDC
Power Classification:
Class 4, max 25W
(IEEE 802.3 at compliant)

CAN ICES-3 (A)/NMB-3(A)
IC: 3919A-Q1656DLE
HVIN:1.0

FCC, see manual
FCC ID:
PNB-AXISQ1656-DLE

U/A: 2380710 ID:


AXIS Q1656-DLE
P/N: 02420-001-01
S/N: ACCC8EC57C23



Axis Communications AB
Gränden 1
SE-22369 Lund
SWEDEN

R-R-PNB-Q1656-DLE

IP66
Type 4x

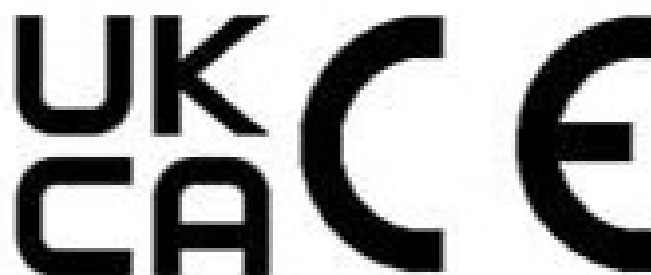

Engineered
in Sweden



2519518r2

Country of Origin: POLAND