

FCC PART 15.231



TEST REPORT

For

Coast Distribution System, Inc. Hangzhou Representative Office

Floor 2, Room 200, No.10 Jiaqi Road, Xianlin Industrial Area, Yuhang, Hangzhou, 311122,
China

FCC ID: PNCM558

Report Type: Original Report	Product Type: Remote Control
Test Engineer: Ares Liu	
Report Number: R1SH120809050-00	
Report Date: 2012-08-23	
Reviewed By: Ivan Cao EMC Engineer	
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION.....	4
JUSTIFICATION	4
EQUIPMENT MODIFICATIONS	4
BLOCK DIAGRAM OF TEST SETUP	4
SUMMARY OF TEST RESULTS.....	5
FCC §15.203 - ANTENNA REQUIREMENT.....	6
APPLICABLE STANDARD	6
FCC §15.205, §15.209, §15.231 (B) - RADIATED EMISSIONS	7
MEASUREMENT UNCERTAINTY.....	7
EUT SETUP	7
EMI TEST RECEIVER SETUP.....	8
TEST EQUIPMENT LIST AND DETAILS.....	8
TEST PROCEDURE	8
APPLICABLE STANDARD	9
CORRECTED AMPLITUDE & MARGIN CALCULATION	9
TEST RESULTS SUMMARY	9
TEST DATA	9
FCC §15.231(C) – 20 DB BANDWIDTH TESTING	13
REQUIREMENT	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST PROCEDURE	13
TEST DATA	13
ENVIRONMENTAL CONDITIONS.....	13
FCC §15.231(A) - DEACTIVATION TESTING	15
APPLICABLE STANDARD	15
EUT SETUP	15
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST DATA	16

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Coast Distribution System, Inc. Hangzhou Representative Office's* product, model number: *M558-2R5001 (FCC ID: PNCM558)* (the "EUT") in this report is a Remote Control, which was measured approximately: 5.7 cm (L) x 3.0cm (W) x 1.0 cm (H), rated input voltage: DC 12V from battery.

All measurement and test data in this report was gathered from production sample serial number: 120809050 (Assigned by BACL, Dongguan). The EUT was received on 2012-08-15.

Objective

This document is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4-2009.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209, 15.35(c) and 15.231 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 - 2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION


Justification

The system was configured in testing mode which was provided by manufacturer.

Equipment Modifications

No modifications were made to the unit tested.

Block Diagram of Test Setup

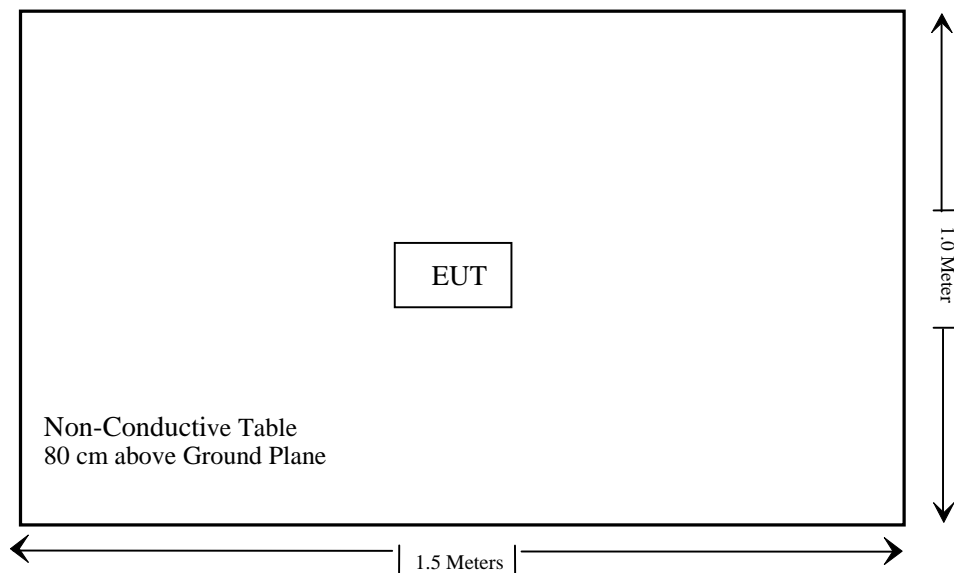

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	N/A*
§15.205, §15.209, §15.231 (b)	Radiated Emissions	Compliance
§15.231 (c)	20dB Band Width Testing	Compliance
§15.231 (a)(1)	Deactivation Testing	Compliance

Note: N/A * The EUT is powered by battery only.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result: Compliant.

The EUT has an internal antenna soldered on the PCB, which complied with 15.203. Please refer to the EUT Internal photos.


FCC §15.205, §15.209, §15.231 (b) - RADIATED EMISSIONS**Measurement Uncertainty**

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements and the best estimate of the uncertainty of a radiation emission measurement at Bay Area Compliance Laboratories Corp. (Dongguan) is 4.0 dB. ($k=2$, 95% level of confidence)

EUT Setup

Below 1 GHz:

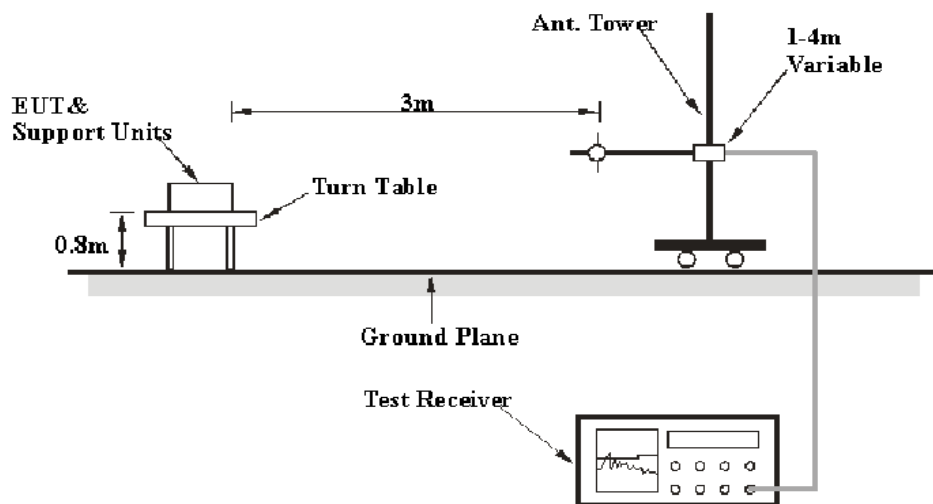

Above 1 GHz:

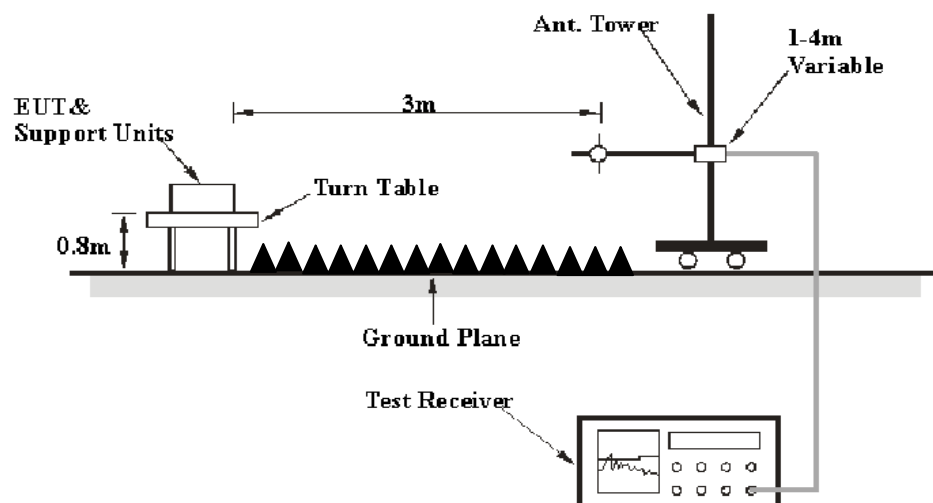

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4 - 2009. The specification used was the FCC 15 § 15.209, 15.205 and 15.231.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 5 GHz.

During the radiated emission test, the test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>Detector</i>
30MHz – 1000 MHz	100 kHz	300 kHz	PK
1000 MHz – 5000 MHz	1 MHz	3 MHz	PK

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101121	2011-10-8	2012-10-7
Sunol Sciences	Hybrid Antennas	JB3	A060611-1	2011-9-6	2013-9-5
HP	Pre-amplifier	8447E	2434A02181	2011-10-8	2012-10-7
R&S	Spectrum Analyzer	FSEM 30	1079 8500	2011-10-9	2012-10-8
Dayang	Horn Antenna	OMCDH10180	10279001B	2010-7-30	2015-7-29
Mini-Circuits	Wideband Amplifier	ZVA-183-S+	96901149	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

According to §15.231, Intentional radiators operating under the provisions of this Section shall demonstrate compliance with the limits on the field strength of emissions, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector

Applicable Standard

According to §15.231 (b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field Strength of Fundamental (Microvolts /meter)	Field Strength of spurious emissions ((Microvolts /meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	1,250 to 3,370 *	125 to 375 *
174-260	3,750	375
260-470	3,750 to 12, 500*	375 to 1,250*
Above 470	12,500	1,250

*Linear interpolations.

The above field strength limits are specified at a distance of 3-meters the tighter limits apply at the band edges.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 5.8 dB means the emission is 5.8 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the data in the following table, the EUT complied with the CFR47 §15.205, §15.209, §15.231 (b), with the worst margin reading of:

8.53 dB at 1890 MHz in the Vertical polarization

Test Data

Environmental Conditions

Temperature:	25.1 ° C
Relative Humidity:	65 %
ATM Pressure:	100.0 kPa

The testing was performed by Ares Liu on 2012-08-21.

Test mode: Transmitting


Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	15.231/15.209	
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)	(dB)	(dB)	(dBμV/m)	Limit (dBμV/m)	Margin (dB)
Operating Frequency:315 MHz									
1890.00	43.21	AV	V	28.07	3.41	27.61	47.09	55.62	8.53
1260.00	42.08	AV	V	25.26	2.68	27.20	42.82	55.62	12.80
1575.00	37.95	AV	V	26.00	3.11	27.45	39.61	54.00	14.39
944.86	36.32	AV	H	23.18	3.72	22.10	41.13	55.62	14.49
629.92	37.88	AV	H	20.02	3.06	22.28	38.68	55.62	16.94
314.96	61.01	AV	H	14.42	2.19	21.56	56.07	75.62	19.55
1890.00	50.32	PK	V	28.07	3.41	27.61	54.20	75.62	21.42
1260.00	49.19	PK	V	25.26	2.68	27.20	49.92	75.62	25.70
1575.00	45.06	PK	V	26.00	3.11	27.45	46.72	74.00	27.29
314.96	53.18	AV	V	14.42	2.19	21.56	48.24	75.62	27.38
944.86	43.43	PK	H	23.18	3.72	22.10	48.23	75.62	27.39
629.92	44.99	PK	H	20.02	3.06	22.28	45.79	75.62	29.83
314.96	68.12	PK	H	14.42	2.19	21.56	63.17	95.62	32.45
314.96	60.29	PK	V	14.42	2.19	21.56	55.34	95.62	40.28

*Within measurement uncertainty!


Note:

Duty cycle correction factor = $20 \cdot \log (T_{ON}/T_{on+off}) = 20 \cdot \log \{(11 \cdot 0.37 \text{ ms} + 14 \cdot 0.97 \text{ ms})/40\text{ms}\} = -7.106 \text{ dB}$

Please refer to following plot.

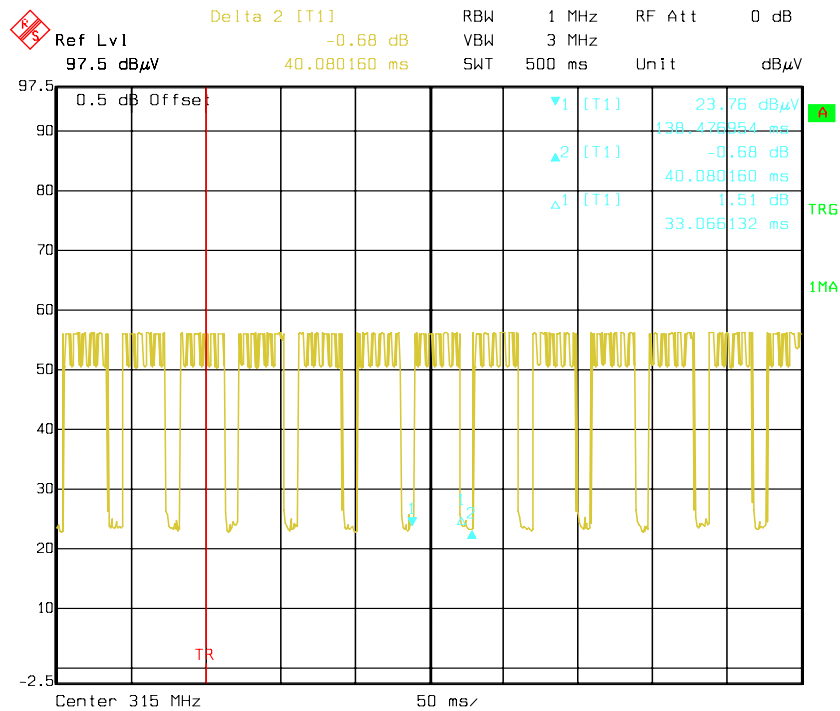
Ton+Toff=40ms

Date: 21.AUG.2012 11:08:55

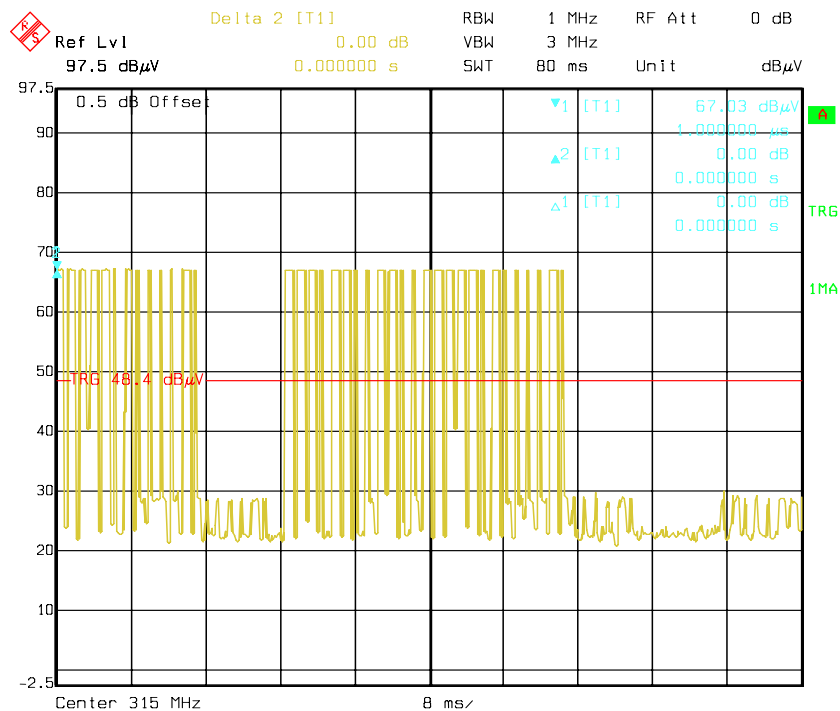
14*longer pulse and 11*shorter pulse

Date: 21.AUG.2012 11:13:01

Longer pulse=0.97ms

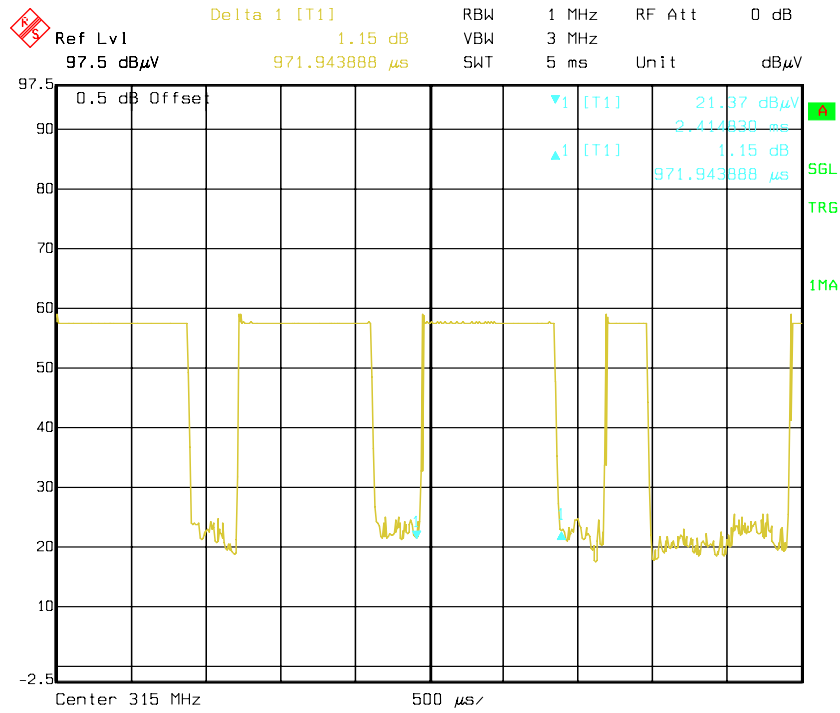

Shorter pulse=0.37ms

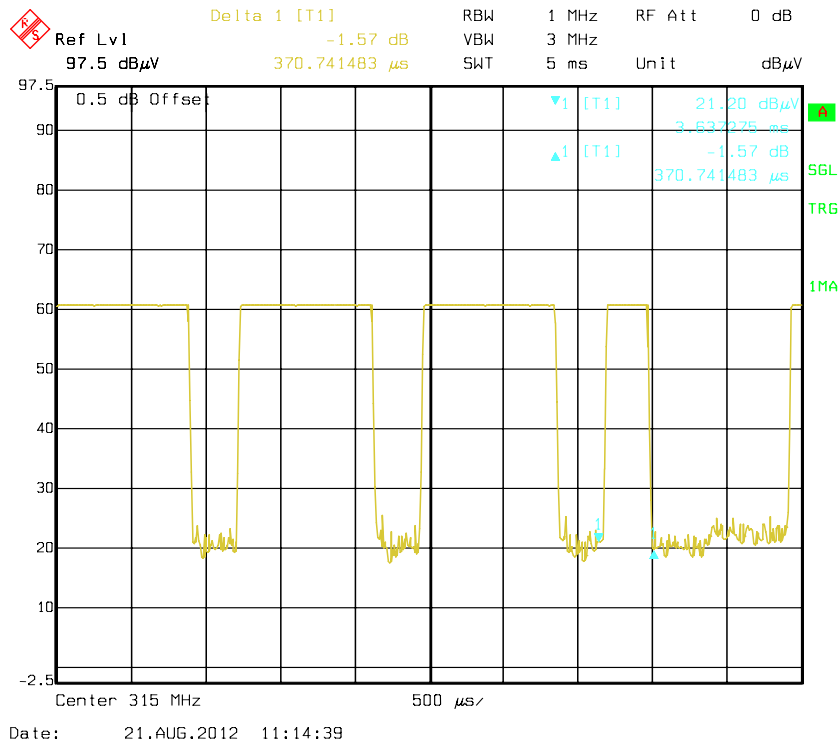

FCC §15.231(c) – 20 dB BANDWIDTH TESTING

Requirement

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16
HP	Amplifier	HP8447E	1937A01046	2011-11-24	2012-11-23
Sunol Sciences	Bilog Antenna	JB1	A040904-2	2011-11-28	2012-11-27

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Test Procedure

With the EUT's antenna attached, the waveform was received by the test antenna which was connected to the spectrum analyzer, plot the 20 dB bandwidth.

Test Data

Environmental Conditions

Temperature:	26.8° C
Relative Humidity:	62%
ATM Pressure:	100.9 kPa

The testing was performed by Ares Liu on 2012-08-21.


Test Mode: Transmitting

Please refer to following table and plot.

Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Limit (kHz)	Result
315	10.90	787.5	Pass

Note: Limit = 0.25% * Center Frequency = 0.25% * 315 MHz = 0.7875 MHz

20 dB Bandwidth

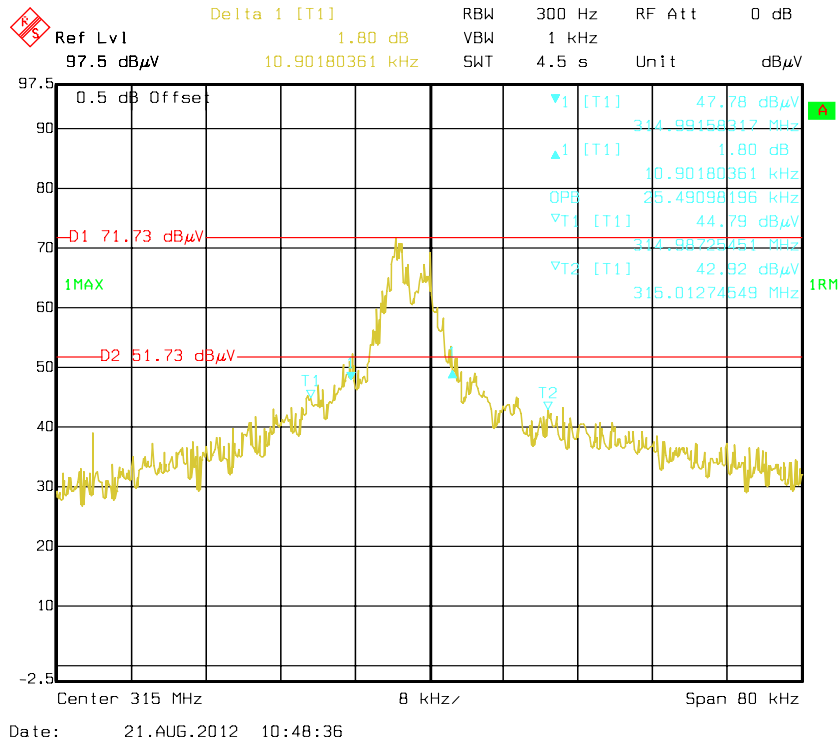


FCC §15.231(a) - DEACTIVATION TESTING

Applicable Standard

Per 15.231(a) (1), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

EUT Setup

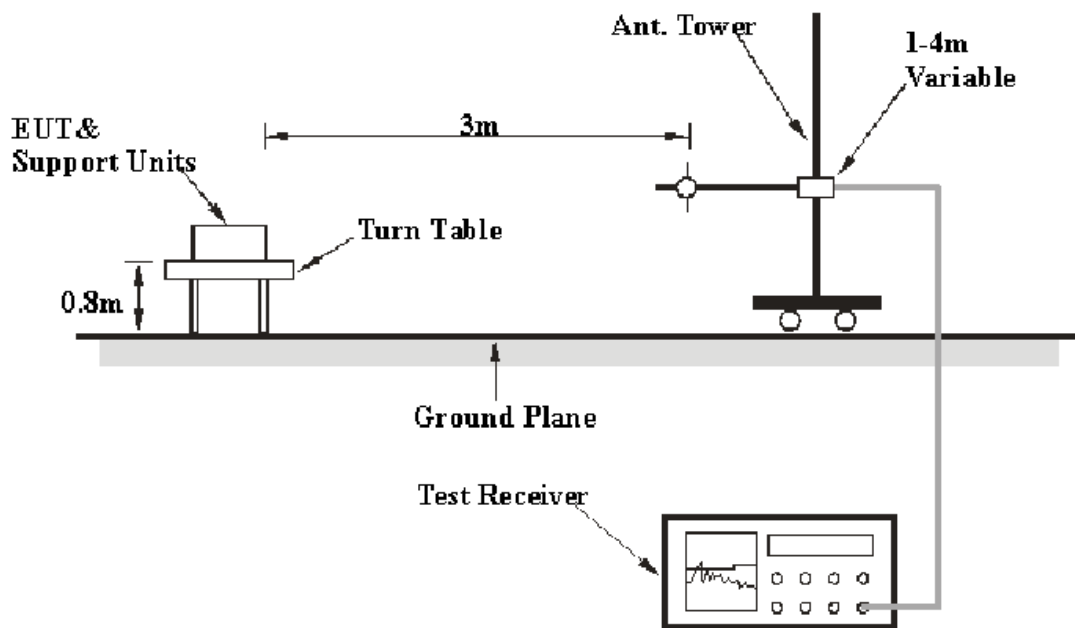

The deactivation test was performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4 - 2009. The specification used was the FCC 15.231(a) limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16
HP	Amplifier	8447E	1937A01046	2011-11-24	2012-11-23
Sunol Sciences	Bilog Antenna	JB1	A040904-2	2011-11-28	2012-11-27

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Test Data**Environmental Conditions**


Temperature:	25.3 °C
Relative Humidity:	59 %
ATM Pressure:	100.2 kPa

The testing was performed by Ares Liu on 2012-08-23.

Test Mode: Transmitting

Test Result: Compliance. Please refer to following plot.

Deactivate Time (s)	Limit	Result
0.390	<5s	Pass

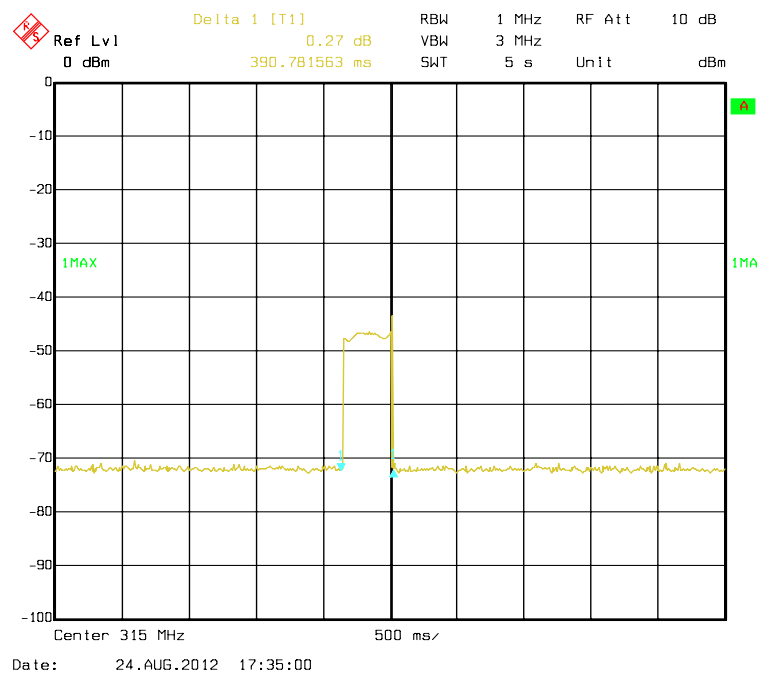

*****END OF REPORT*****