

Date: Aug. 22,2020

Page 104 of 116

**Test Laboratory: AGC Lab** 

LTE Band 14 Mid-Face up (1 RB#0) DUT: POC Radio; Type: IP-79

Communication System: LTE; Communication System Band: LTE Band 14; Duty Cycle:1:1; Conv.F=4.97; Frequency: 793 MHz; Medium parameters used: f = 750 MHz;  $\sigma = 0.94$  mho/m;  $\epsilon = 41.35$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ C): 20.9, Liquid temperature ( $^{\circ}$ C): 20.7

**SATIMO Configuration:** 

Probe: SSE5; Calibrated: Jun. 04,2019; Serial No.: SN 22/16 EP315


Sensor-Surface: 4mm (Mechanical Surface Detection)

Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4\_02\_35


Configuration/ LTE Band 14 Mid-Face up/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 14 Mid-Face up/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;

Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Face up
Band	LTE Band 1
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

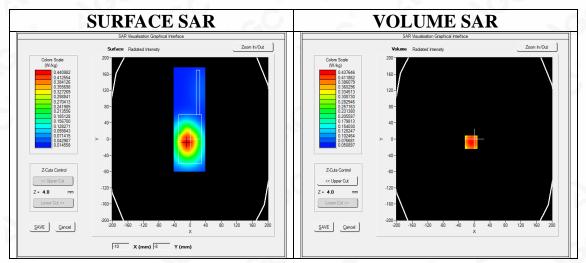



Maximum location: X=-8.00, Y=-8.00 SAR Peak: 0.56 W/kg

SAR 10g (W/Kg)	0.307095
SAR 1g (W/Kg)	0.424778





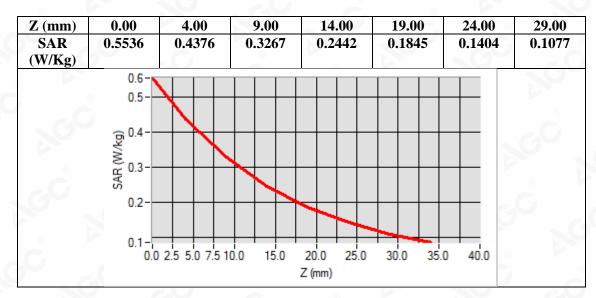

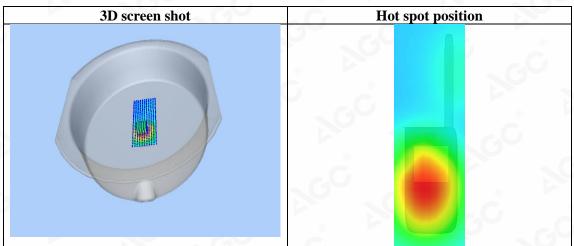



Page 106 of 116

Test Laboratory: AGC Lab Date: Aug. 28,2020

LTE Band 66 Mid-Body-Back (1 RB#0) DUT: POC Radio; Type: IP-79

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=4.05; Frequency:1755 MHz; Medium parameters used: f = 1750 MHz;  $\sigma = 1.38$  mho/m;  $\epsilon r = 38.82$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature (°C): 20.8, Liquid temperature (°C): 20.5

**SATIMO Configuration:** 

Probe: SSE5; Calibrated: Jun. 04,2019; Serial No.: SN 22/16 EP315


Sensor-Surface: 4mm (Mechanical Surface Detection)

Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4 02 35

Configuration/ LTE Band 66 Mid-Body-back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 66 Mid-Body-back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 66
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

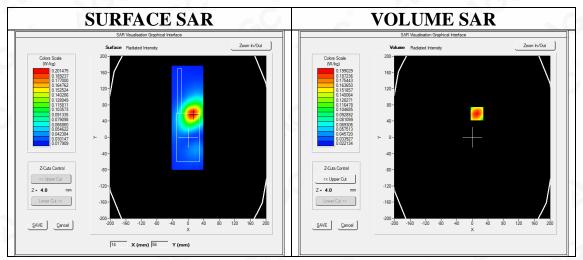


Maximum location: X=12.00, Y=58.00


SAR Peak: 0.28 W/kg

<b>SAR 10g (W/Kg)</b>	0.121596
SAR 1g (W/Kg)	0.190772





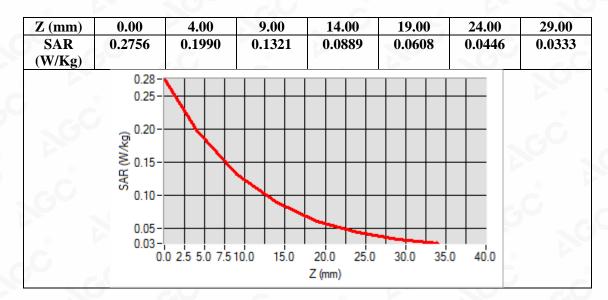

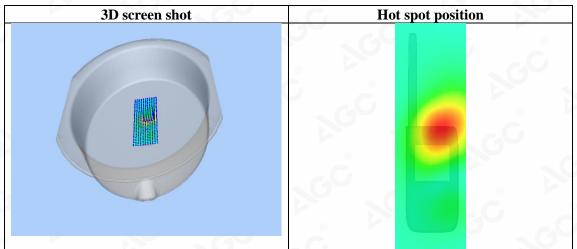



Date: Aug. 28,2020

Page 108 of 116

**Test Laboratory: AGC Lab** 

LTE Band 66 Mid-Face up (1 RB#0) DUT: POC Radio; Type: IP-79

Communication System: LTE; Communication System Band: LTE Band 66; Duty Cycle:1:1; Conv.F=4.05; Frequency:1755 MHz; Medium parameters used: f = 1750 MHz;  $\sigma = 1.38$  mho/m;  $\epsilon r = 38.82$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient temperature (°C): 20.8, Liquid temperature (°C): 20.5

**SATIMO Configuration:** 

Probe: SSE5; Calibrated: Jun. 04,2019; Serial No.: SN 22/16 EP315


Sensor-Surface: 4mm (Mechanical Surface Detection)

Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4\_02\_35

Configuration/ LTE Band 66 Mid-Face up/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 66 Mid-Face up/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Face up
Band	LTE Band 66
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

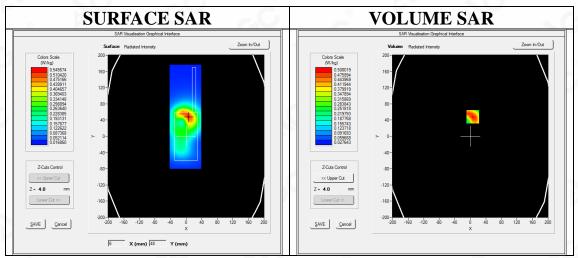


Maximum location: X=6.00, Y=48.00


SAR Peak: 0.73 W/kg

<b>SAR 10g (W/Kg)</b>	0.294284
SAR 1g (W/Kg)	0.483428





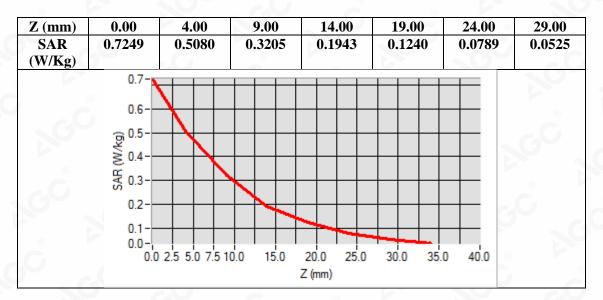

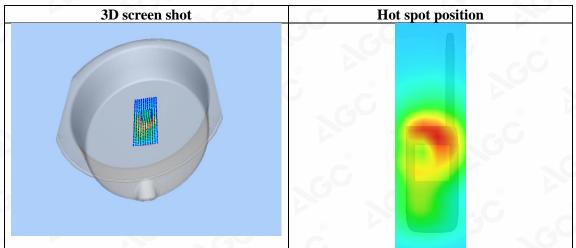



Page 110 of 116

Test Laboratory: AGC Lab Date: Aug. 22,2020

LTE Band 71 Mid-Body-Back (1 RB#0) DUT: POC Radio; Type: IP-79

Communication System: LTE; Communication System Band: LTE Band 71; Duty Cycle:1:1; Conv.F=4.97; Frequency: 683 MHz; Medium parameters used: f = 750 MHz;  $\sigma = 0.86$  mho/m;  $\epsilon r = 44.05$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ ): 20.9, Liquid temperature ( $^{\circ}$ ): 20.7

**SATIMO Configuration:** 

Probe: SSE5; Calibrated: Jun. 04,2019; Serial No.: SN 22/16 EP315


Sensor-Surface: 4mm (Mechanical Surface Detection)

Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4 02 35

Configuration/ LTE Band 71 Mid-Body-back/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 71 Mid-Body-back/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Body Back
Band	LTE Band 71
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

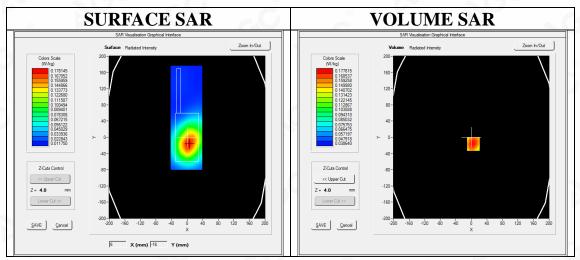


Maximum location: X=14.00, Y=-8.00


SAR Peak: 0.02 W/kg

<b>SAR 10g (W/Kg)</b>	0.013480
SAR 1g (W/Kg)	0.014899





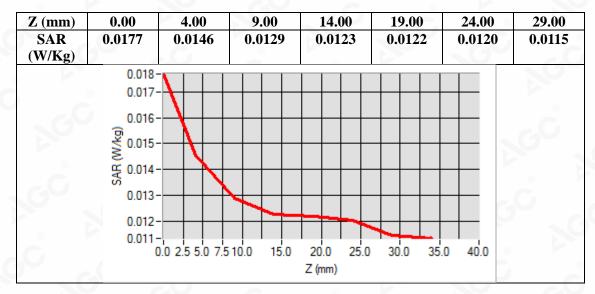

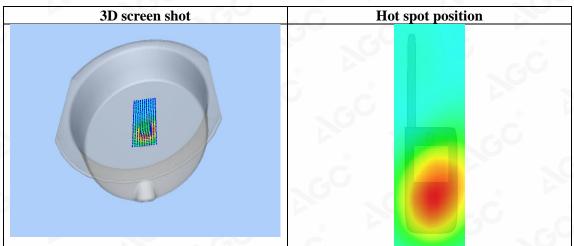



Date: Aug. 22,2020

Page 112 of 116

**Test Laboratory: AGC Lab** 

LTE Band 71 Mid-Face up (1 RB#0) DUT: POC Radio; Type: IP-79

Communication System: LTE; Communication System Band: LTE Band 71; Duty Cycle:1:1; Conv.F=4.97; Frequency: 683 MHz; Medium parameters used: f = 750 MHz;  $\sigma = 0.86$  mho/m;  $\epsilon r = 44.05$ ;  $\rho = 1000$  kg/m<sup>3</sup>;

Phantom section: Flat Section

Ambient temperature ( $^{\circ}$ C): 20.9, Liquid temperature ( $^{\circ}$ C): 20.7

**SATIMO Configuration:** 

Probe: SSE5; Calibrated: Jun. 04,2019; Serial No.: SN 22/16 EP315


Sensor-Surface: 4mm (Mechanical Surface Detection)

Phantom: ELLI39 Phantom

Measurement SW: OpenSAR V4\_02\_35

Configuration/ LTE Band 71 Mid-Face up/Area Scan: Measurement grid: dx=8mm, dy=8mm Configuration/ LTE Band 71 Mid-Face up/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5m;


Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	ELLI
Device Position	Face up
Band	LTE Band 71
Channels	Middle
Signal	OFDM (Crest factor: 1.0)

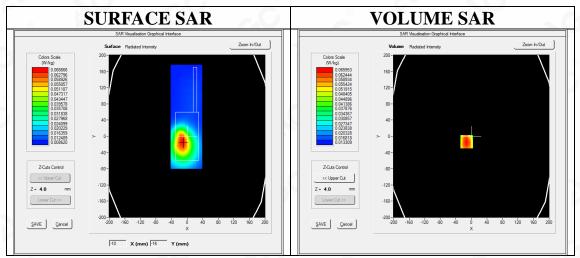


Maximum location: X=-12.00, Y=-13.00


SAR Peak: 0.09 W/kg

<b>SAR 10g (W/Kg)</b>	0.048361
SAR 1g (W/Kg)	0.066530





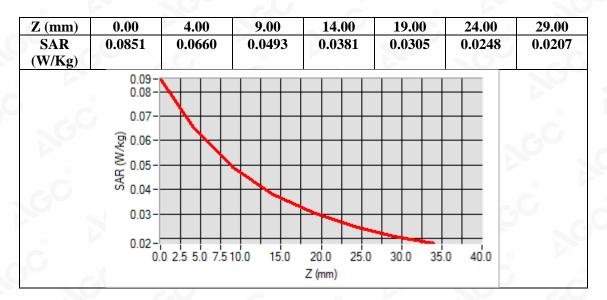

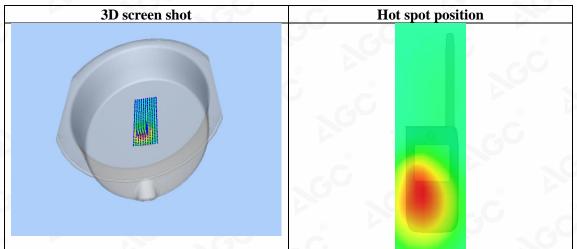



Page 114 of 116

## **APPENDIX C. TEST SETUP PHOTOGRAPHS**

Back Touch with all accessories



Face up with 10mm Separation Distance.




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Residual



Page 115 of 116

## DEPTH OF THE LIQUID IN THE PHANTOM—ZOOM IN

Note: The position used in the measurement were according to IEEE 1528-2013

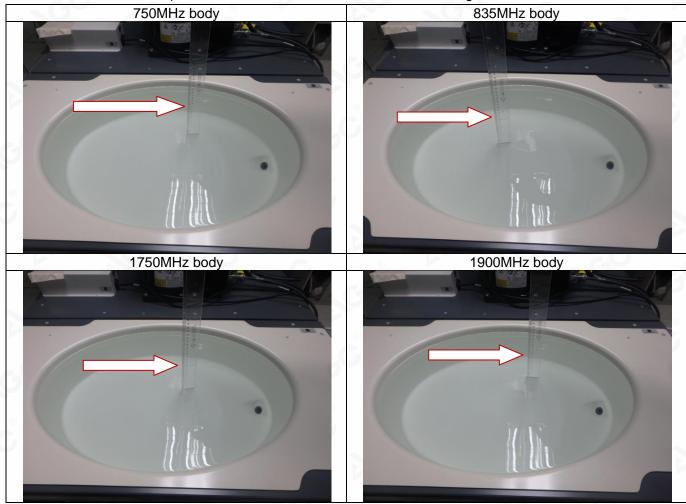

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Residual Residual



Page 116 of 116

## **APPENDIX D. CALIBRATION DATA**

Refer to Attached files.



## Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3.The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. The non-CMA report issued by AGC is only permitted to be used by the client as internal reference use and shall not be used for public demonstration purpose.
- 5. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 6. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 7. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 9. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 10. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

he test report.