
FCC Part 90 Test Report

Report No.: AGC01039170301FE09

FCC ID : POD-DMR
PRODUCT DESIGNATION : DMR Digital Transceiver
BRAND NAME : TYT
MODEL NAME : MD-280V, MD-580V, MD-680V, MD-750V
CLIENT : TYT ELECTRONICS CO., LTD
DATE OF ISSUE : Mar,31, 2017
STANDARD(S) : FCC Part 90 Rules
: FCC Part 22 Rules
REPORT VERSION : V 1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Mar,31, 2017	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE..... 5

2. GENERAL INFORMATION 6

2.1 PRODUCT DESCRIPTION 6

2.2 RELATED SUBMITTAL(S) / GRANT (S)..... 7

2.3 TEST METHODOLOGY 8

2.4 TEST FACILITY 8

2.5 SPECIAL ACCESSORIES..... 8

2.6 EQUIPMENT MODIFICATIONS..... 8

3. SYSTEM TEST CONFIGURATION 9

3.1 EUT CONFIGURATION 9

3.2 EUT EXERCISE 9

3.3 GENERAL TECHNICAL REQUIREMENTS..... 9

3.4 CONFIGURATION OF TESTED SYSTEM 10

3.5. SUMMARY OF TEST RESULTS..... 10

4. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION..... 11

5. DESCRIPTION OF TEST MODES 12

6. FREQUENCY TOLERANCE 13

6.1 PROVISIONS APPLICABLE 13

6.2 MEASUREMENT PROCEDURE 13

6.3 TEST SETUP BLOCK DIAGRAM 14

6.4 TEST RESULT..... 15

7. EMISSION BANDWIDTH 23

7.1 PROVISIONS APPLICABLE 27

7.2 MEASUREMENT PROCEDURE 27

7.3 TEST SETUP BLOCK DIAGRAM 27

7.4 MEASUREMENT RESULT..... 28

8. UNWANTED RADIATION..... 33

8.1 PROVISIONS APPLICABLE 36

8.2 MEASUREMENT PROCEDURE 36

8.3 TEST SETUP BLOCK DIAGRAM 37

8.4 MEASUREMENT RESULTS: 39

8.5 EMISSION MASK PLOT 53

9. MODULATION CHARACTERISTICS 55

9.1 PROVISIONS APPLICABLE 56

9.2 MEASUREMENT METHOD..... 56

9.3 MEASUREMENT RESULT..... 57

- 10. MAXIMUM TRANSMITTER POWER 66**
 - 10.1 PROVISIONS APPLICABLE 69
 - 10.2 TEST PROCEDURE 69
 - 10.3 TEST CONFIGURATION 69
 - 10.4 TEST RESULT 71
 - 10.5 CONDUCT SPURIOUS PLOT 74

- 11. TRANSMITTER FREQUENCY BEHAVIOR 88**
 - 11.1 PROVISIONS APPLICABLE 88
 - 11.2 TEST METHOD 88
 - 11.3 DESCRIBE LIMIT LINE OF TRANSMITTER FREQUENCY BEHAVIOR 89
 - 11.4 MEASURE RESULT 91

- 12. AUDIO LOW PASS FILTER RESPONSE 92**
 - 12.1 LIMITS 92
 - 12.2. METHOD OF MEASUREMENTS 92
 - 12.3 TEST DATA 93

- APPENDIX I: PHOTOGRAPHS OF SETUP 95**

- APPENDIX II: EXTERNAL VIEW OF EUT 96**

1. VERIFICATION OF COMPLIANCE

Applicant	TYT ELECTRONICS CO., LTD
Address	Block 39-1, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian, China
Manufacturer	TYT ELECTRONICS CO., LTD
Address	Block 39-1, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian, China
Product Designation	DMR Digital Transceiver
Brand Name	TYT
Test Model	MD-280V
Series Model	MD-580V, MD-680V, MD-750V
Difference description	All the same except for the model name and appearance shape.
Date of Test	Mar,25, 2017 to Mar,31, 2017

WE HEREBY CERTIFY THAT:

The above equipment was tested by Dong guan Precise Testing Service Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 90 and FCC Rules Part 22 requirements. The test results of this report relate only to the tested sample identified in this report.

Tested by

Steven Zhou

Steven Zhou(Zhou Pengyun) Mar,31, 2017

Reviewed by

Bart Xie

Bart Xie(Xie Xiaobin) Mar,31, 2017

Approved by

Solger Zhang

Solger Zhang(Zhang Hongyi)
Authorized Officer Mar,31, 2017

2. GENERAL INFORMATION

2.1 PRODUCT DESCRIPTION

The EUT is a DMR Digital Transceiver designed for voice/data communication. It is designed by way of utilizing the F3E/4FSK modulation achieves the system operating.

A major technical description of EUT is described as following:

Communication Type	Voice / Data
Hardware Version	V1.0
Software Version	MD280-d12.32
Emission Type	10K3F3E, 9K74FXW
Modulation	F3E/4FSK
Emission Bandwidth	Analog:10.18KHz(5W),10.30 KHz(1W) Digital:9.740KHz(5W),9.363 KHz(1W)
Peak Frequency Deviation	Analog:1.75KHz Digital:1.82KHz
Audio Frequency Response	Analog:10.88 dB Digital:10.98 dB
Maximum Transmitter Power	Analog: 36.92 dBm(5W), 29.90 dBm (1W) Digital: 36.89 dBm(5W), 29.86 dBm (1W)
Output power Modification	1W/5W (It was fixed by the manufacturer, any individual can't arbitrarily change it.)
Data Rate	9600bps/12.5KHz(Channel Spacing)
Antenna Designation	Detachable
Antenna Gain	1.21 dBi
Antenna Length	9.5 cm
Power Supply	DC 7.4V, 2000mAh (by battery)
Adapter Parameter	Input: AC 100-240V, 50/60Hz, 0.2A Output: DC 12V, 0.5A
Limiting Voltage	DC 6.0 V-DC 8.51V
Operation Frequency Range and Channel	Frequency Range: 136MHz to 174MHz Channel Separation:12.5KHz (Analog), 12.5KHz(Digital)
	Bottom Channel: 136.025MHz Middle Channel:151.85MHz Middle Channel:155.025MHz Middle Channel:161.61MHz Top Channel: 173.975MHz
Frequency Tolerance	1.232ppm

Frequency Range (MHz)	Rated Transmit Power(W)(Conducted)	Transmit Mode/Emission Designator
136-174	1W/5W	11K0F3E(Analog Voice; NB)
136-174	1W/5W	11K0FXD/11K0FXW(9600Data/Digital Voice; NB)

Channel No. (6.25KHz)	Channel No. (12.5KHz)	12.5KHz Channel Spaced 400MHz Band Plan(MHz)
1	1-2	136.025
2		
3	3-4	155.025
4		
5	5-6	173.975
6		

FCC Rules and Regulations Part 2.202: Necessary Bandwidth and Emission Bandwidth
Voice –FM Analog (12.5KHz)

Calculation:

Max modulation (M) in kHz : 3.0

Max deviation(D) in kHz:2.5

Constant factor (K): 1(assumed)

$B_n = 2XM + 2XDK = 11.0 \text{ KHz}$

Emission designator: 11K0F3E

9600 Digital Voice/data (12.5KHz)

Calculation:

Data rate in bps(R)=9600

Deviation Peak deviation of carrier(D)=2359.585

Constant factor (K): 1 (default)

$B_n = 3.86D + 1.27RK = 3.86(2359.585) + 0.27(9600)(1) = 11.7 \text{ KHz}$

Emission designator: 11K0FXD

2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: POD-DMR, filing to comply with Part 2, Part 22, and Part 90 of the Federal Communication Commission rules.

2.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

2.4 TEST FACILITY

The test site used to collect the radiated data is located on the address of Dong guan Precise Testing Service Co., Ltd. The test site is constructed and calibrated to meet the FCC requirements in documents TIA/EIA 603.

2.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

3. SYSTEM TEST CONFIGURATION

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

3.3 GENERAL TECHNICAL REQUIREMENTS

For FCC Part 90& Part 22 requirements:

- (1). Section 90.205 & 22.565: RF Output Power
- (2). Section 90.207: Modulation Characteristic
- (3). Section 90.209 & 22.359: Occupied Bandwidth
- (4). Section 90.210 & 22.359: Emission Mask
- (5). Section 90.213 & 22.355: Frequency Tolerance
- (6). Section 90.214: Transient Frequency Behavior

3.4 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

Item	Equipment	Model No.	Identifier	Note
1	DMR Digital Transceiver	MD-280V	FCC ID: POD-DMR	EUT

3.5. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§90.205 & 22.565	Maximum Transmitter Power	Compliant
§90.207	Modulation Characteristic	Compliant
§90.209& 22.359	Occupied Bandwidth	Compliant
§90.210& 22.359	Emission Mask	Compliant
§90.213& 22.355	Frequency Tolerance	Compliant
§90.214	Transient Frequency Behavior	Compliant

4. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China.
Description	The test site is constructed and calibrated to meet the FCC requirements in documents TIA/EIA 603
FCC Registration No.	371540

List of Equipments Used

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NO.	Cal. Date	Cal. Due
CLIMATE CHAMBER	EXPERY	TN-400	TN2007SR038	2016.07.02	2017.07.01
ATTENUATOR	WEINSCHTEL CORP	58-30-33	ML030	2016.07.02	2017.07.01
DC POWER SUPPLY	ZHAOXIN	RXN-605D	N/A	2016.07.02	2017.07.01
MODULATION ANALYZER	HP	8920B	3104A03367	2016.07.02	2017.07.01
SIGNAL GENERATOR	AGILENT	E4421B	122501288	2016.07.03	2017.07.02
SIGNAL GENERATOR	R&S	SMT03	A0304261	2016.07.03	2017.07.02
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	2016.07.03	2017.07.02
Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3355	2016.07.03	2017.07.02
Substitution Antenna	SCHWARZBECK	VULB9160	9168-494	2016.07.03	2017.07.02
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	2016.07.03	2017.07.02
RF Cable	SCHWARZBECK	AK9515E	96221	2016.07.03	2017.07.02
3m Anechoic Chamber	CHENGYU	966	PTS-001	2016.06.03	2017.06.02
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Active loop antenna (9K-30MHz)	Schwarzbeck	FMZB1519	1519-038	2016.06.03	2017.06.02
Spectrum analyzer	Agilent	E4407B	MY46185649	2016.06.03	2017.06.02
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	2016.06.03	2017.06.02
Substitution ANTENNA	EM	EM-AH-10180	67	2016.06.03	2017.06.02
Modulation Domain Analyzer	HP	53310A	3121A02467	2016.06.03	2017.06.02
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	2016.06.03	2017.06.02
RF Cable	SCHWARZBECK	AK9515E	96222	2016.06.03	2017.06.02
Shielded Room	CHENGYU	843	PTS-002	2016.06.03	2017.06.02

NOTE: 8920B can generate audio modulation frequency.

5. DESCRIPTION OF TEST MODES

RF TEST MODES

The EUT (DMR Digital Transceiver) has been tested in transmitting. (The top channel, the middle channel and the bottom channel) are chosen for testing at each channel separation.

Analog (Transmitting mode):

No.	TEST MODES	CHANNEL SEPARATION
1	Low Channel	12.5 KHz
2	Middle Channel	12.5 KHz
3	High Channel	12.5 KHz

Digital (Transmitting mode):

No.	TEST MODES	CHANNEL SEPARATION
1	Low Channel	12.5 KHz
2	Middle Channel	12.5 KHz
3	High Channel	12.5 KHz

Note: Only the result of the worst case was recorded in the report.

6. FREQUENCY TOLERANCE

6.1 PROVISIONS APPLICABLE

- a). According to FCC §2.1055, § 22.355 and §90.213, the frequency stability shall be measured with variation of ambient temperature from -30°C to $+50^{\circ}\text{C}$ centigrade.
- b). According to FCC Part 2 Section 2.1055(d)(2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
- c). According to FCC Part 90 Section 90.213, the frequency tolerance must be maintained within 0.00025% for 12.5 KHz channel separation and 0.0001% for 6.25 KHz channel separation.

6.2 MEASUREMENT PROCEDURE


6.2.1 Frequency stability versus environmental temperature

1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz. Record this frequency as reference frequency.
3. Set the temperature of chamber to 50°C . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

6.2.2 Frequency stability versus input voltage

1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15°C to 25°C . Otherwise, an environment chamber set for a temperature of 20°C shall be used. The EUT shall be powered by DC 7.4V.
2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

6.3 TEST SETUP BLOCK DIAGRAM

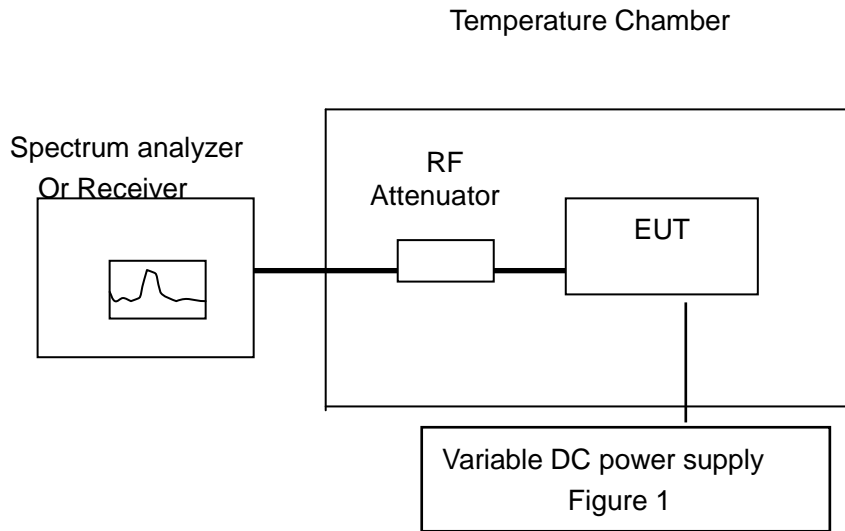

6.4 TEST RESULT

Analog:

(1) Frequency stability versus input voltage (Supply nominal voltage is 7.4V) **-5W**

Environment Temperature(°C)	Power (V)	Reference Frequency			Limit: ppm
		136.025MHz	155.025MHz	173.975MHz	
50	DC 7.40	0.279	0.974	0.874	5
40	DC 7.40	0.676	0.897	0.782	
30	DC 7.40	0.426	0.980	0.661	
20	DC 7.40	0.088	0.742	0.839	
10	DC 7.40	0.404	0.961	0.793	
0	DC 7.40	0.493	0.877	0.673	
-10	DC 7.40	0.265	0.974	0.966	
-20	DC 7.40	0.802	0.845	0.971	
-30	DC 7.40	0.743	0.826	0.799	
Result	Pass				

Environment Temperature(°C)	Power (V)	Reference Frequency		Limit: ppm
		151.85MHz	161.61MHz	
50	DC 7.40 V	0.691	0.842	5
40	DC 7.40 V	0.830	0.712	
30	DC 7.40 V	0.850	0.922	
20	DC 7.40 V	0.896	0.730	
10	DC 7.40 V	0.823	0.959	
0	DC 7.40 V	0.981	0.755	
-10	DC 7.40 V	1.067	0.854	
-20	DC 7.40 V	0.691	0.773	
-30	DC 7.40 V	0.738	0.811	
Result	Pass			

(2) Frequency stability versus input voltage (Battery Limiting voltage is 6.29V) **-5W**

Environment Temperature(°C)	Power (V)	Reference Frequency			Limit: ppm
		136.025MHz	155.025MHz	173.975MHz	
50	DC 6.29	0.301	0.368	0.293	5
40	DC 6.29	0.603	0.439	0.161	
30	DC 6.29	0.500	0.445	0.207	
20	DC 6.29	0.537	0.116	0.874	
10	DC 6.29	0.382	0.968	0.552	
0	DC 6.29	0.360	0.439	0.167	
-10	DC 6.29	0.500	0.245	0.224	
-20	DC 6.29	0.529	1.232	0.098	
-30	DC 6.29	0.360	0.574	0.489	
Result	Pass				

Environment Temperature(°C)	Power	Reference Frequency		Limit: ppm
	(V)	151.85MHz	161.61MHz	
50	DC 6.29	0.672	0.749	5
40	DC 6.29	0.896	0.842	
30	DC 6.29	0.823	0.767	
20	DC 6.29	0.955	0.767	
10	DC 6.29	0.764	0.798	
0	DC 6.29	0.869	0.811	
-10	DC 6.29	0.850	0.631	
-20	DC 6.29	0.691	0.718	
-30	DC 6.29	0.896	0.644	
Result	Pass			

(3) Frequency stability versus input voltage (Battery Fully Charged voltage is 8.51V) **-5W**

Environment Temperature(°C)	Power	Reference Frequency			Limit: ppm
	(V)	136.025MHz	155.025MHz	173.975MHz	
50	DC 8.51	0.626	0.503	0.489	5
40	DC 8.51	0.353	0.123	0.494	
30	DC 8.51	0.287	0.490	0.471	
20	DC 8.51	1.139	0.548	0.362	
10	DC 8.51	0.684	0.445	0.391	
0	DC 8.51	0.698	0.393	0.546	
-10	DC 8.51	0.412	0.426	0.500	
-20	DC 8.51	0.573	0.619	0.546	
-30	DC 8.51	1.015	0.961	0.425	
Result	Pass				

Environment Temperature(°C)	Power	Reference Frequency		Limit: ppm
	(V)	151.85MHz	161.61MHz	
50	DC 8.51	0.757	0.650	5
40	DC 8.51	0.830	0.842	
30	DC 8.51	0.863	0.532	
20	DC 8.51	1.067	0.582	
10	DC 8.51	0.757	0.551	
0	DC 8.51	0.718	0.532	
-10	DC 8.51	0.843	0.606	
-20	DC 8.51	0.408	0.575	
-30	DC 8.51	0.632	0.520	
Result	Pass			

(4) Frequency stability versus input voltage (Battery endpoint is 6V) -5W

Environment Temperature(°C)	Power (V)	Reference Frequency			Limit: ppm
		136.025MHz	155.025MHz	173.975MHz	
50	DC 6.00	0.632	0.684	0.782	5
40	DC 6.00	0.507	0.593	0.512	
30	DC 6.00	0.573	0.445	0.276	
20	DC 6.00	0.603	0.548	0.782	
10	DC 6.00	0.338	0.439	0.494	
0	DC 6.00	0.426	0.587	0.489	
-10	DC 6.00	0.463	0.103	0.282	
-20	DC 6.00	0.471	0.793	0.489	
-30	DC 6.00	0.728	0.555	0.397	
Result	Pass				

Environment Temperature(°C)	Power (V)	Reference Frequency		Limit: ppm
		151.85MHz	161.61MHz	
50	DC 6.00 V	0.718	0.656	5
40	DC 6.00 V	0.797	0.569	
30	DC 6.00 V	0.869	0.588	
20	DC 6.00 V	0.777	0.390	
10	DC 6.00 V	0.784	0.520	
0	DC 6.00 V	0.830	0.235	
-10	DC 6.00 V	0.889	0.600	
-20	DC 6.00 V	0.830	0.613	
-30	DC 6.00 V	0.882	0.594	
Result	Pass			

(1) Frequency stability versus input voltage (Supply nominal voltage is 7.4V)-1W

Environment Temperature(°C)	Power (V)	Reference Frequency			Limit: ppm
		136.025MHz	155.025MHz	173.975MHz	
50	DC 7.40	0.823	0.877	0.724	5
40	DC 7.40	0.706	0.974	0.759	
30	DC 7.40	0.625	1.193	0.868	
20	DC 7.40	0.559	0.677	0.937	
10	DC 7.40	0.507	0.722	0.724	
0	DC 7.40	0.382	0.703	0.696	
-10	DC 7.40	0.338	0.806	0.684	
-20	DC 7.40	0.287	0.781	0.736	
-30	DC 7.40	0.353	0.851	0.696	
Result	Pass				

Environment Temperature(°C)	Power	Reference Frequency		Limit:
	(V)	151.85MHz	161.61MHz	ppm
50	DC 7.40 V	0.711	0.588	5
40	DC 7.40 V	0.797	0.780	
30	DC 7.40 V	0.817	0.817	
20	DC 7.40 V	0.843	0.941	
10	DC 7.40 V	0.810	0.811	
0	DC 7.40 V	0.191	0.879	
-10	DC 7.40 V	0.230	0.835	
-20	DC 7.40 V	0.652	0.934	
-30	DC 7.40 V	0.553	0.811	
Result	Pass			

(2) Frequency stability versus input voltage (Battery Limiting voltage is 6.29V) -1W

Environment Temperature(°C)	Power	Reference Frequency			Limit:
	(V)	136.025MHz	155.025MHz	173.975MHz	ppm
50	DC 6.29	0.478	0.619	0.604	5
40	DC 6.29	0.823	0.555	0.391	
30	DC 6.29	0.743	0.374	0.397	
20	DC 6.29	0.382	0.593	0.931	
10	DC 6.29	0.706	0.548	0.362	
0	DC 6.29	0.426	0.290	0.569	
-10	DC 6.29	0.507	0.445	0.086	
-20	DC 6.29	0.867	0.374	0.385	
-30	DC 6.29	0.478	0.742	0.333	
Result	Pass				

Environment Temperature(°C)	Power	Reference Frequency		Limit:
	(V)	151.85MHz	161.61MHz	ppm
50	DC 6.29	0.823	0.674	5
40	DC 6.29	0.882	0.817	
30	DC 6.29	0.896	0.668	
20	DC 6.29	0.869	0.817	
10	DC 6.29	0.777	0.674	
0	DC 6.29	0.738	0.780	
-10	DC 6.29	0.863	0.792	
-20	DC 6.29	0.718	0.773	
-30	DC 6.29	0.672	0.780	
Result	Pass			

(3) Frequency stability versus input voltage (Battery Fully Charged voltage is 8.51V) -1W

Environment Temperature(°C)	Power (V)	Reference Frequency			Limit: ppm
		136.025MHz	155.025MHz	173.975MHz	
50	DC 8.51	0.434	0.374	0.604	5
40	DC 8.51	0.507	0.619	0.546	
30	DC 8.51	0.412	0.522	0.356	
20	DC 8.51	0.640	0.742	0.535	
10	DC 8.51	0.456	0.406	0.489	
0	DC 8.51	0.632	0.335	0.362	
-10	DC 8.51	0.537	0.181	0.109	
-20	DC 8.51	0.426	0.406	0.333	
-30	DC 8.51	0.875	0.574	0.397	
Result	Pass				

Environment Temperature(°C)	Power (V)	Reference Frequency		Limit: ppm
		151.85MHz	161.61MHz	
50	DC 8.51	0.935	0.668	5
40	DC 8.51	0.764	0.780	
30	DC 8.51	0.810	0.575	
20	DC 8.51	0.698	0.755	
10	DC 8.51	0.823	0.650	
0	DC 8.51	0.691	0.718	
-10	DC 8.51	0.757	0.767	
-20	DC 8.51	0.869	0.668	
-30	DC 8.51	0.718	0.532	
Result	Pass			

(4) Frequency stability versus input voltage(Battery endpoint is 6V) -1W

Environment Temperature(°C)	Power (V)	Reference Frequency			Limit: ppm
		136.025MHz	155.025MHz	173.975MHz	
50	DC 6.00	0.890	0.400	0.310	5
40	DC 6.00	0.926	0.181	0.627	
30	DC 6.00	0.970	0.445	0.736	
20	DC 6.00	0.434	0.361	0.477	
10	DC 6.00	0.493	0.097	0.397	
0	DC 6.00	0.684	0.419	0.299	
-10	DC 6.00	0.456	0.374	0.362	
-20	DC 6.00	0.184	0.116	0.356	
-30	DC 6.00	0.625	0.548	0.494	
Result	Pass				

Environment Temperature(°C)	Power	Reference Frequency		Limit:
	(V)	151.85MHz	161.61MHz	ppm
50	DC 6.00 V	0.626	0.811	5
40	DC 6.00 V	0.803	0.668	
30	DC 6.00 V	0.757	0.507	
20	DC 6.00 V	0.698	0.384	
10	DC 6.00 V	0.817	0.507	
0	DC 6.00 V	0.691	0.053	
-10	DC 6.00 V	0.869	0.651	
-20	DC 6.00 V	0.685	0.217	
-30	DC 6.00 V	0.797	0.569	
Result	Pass			

Digital:

(1) Frequency stability versus input voltage (Supply nominal voltage is 7.4V) **-5W**

Environment Temperature(°C)	Power (V)	Reference Frequency			Limit: ppm
		136.025MHz	155.025MHz	173.975MHz	
50	DC 7.40	0.456	0.980	0.667	5
40	DC 7.40	0.382	1.051	0.782	
30	DC 7.40	0.551	1.058	0.736	
20	DC 7.40	0.654	0.980	0.701	
10	DC 7.40	0.456	0.877	0.782	
0	DC 7.40	0.132	0.748	0.667	
-10	DC 7.40	0.507	0.697	0.724	
-20	DC 7.40	0.632	0.877	0.782	
-30	DC 7.40	0.654	0.781	0.684	
Result	Pass				

Environment Temperature(°C)	Power (V)	Reference Frequency		Limit: ppm
		151.85MHz	161.61MHz	
50	DC 7.40 V	0.784	0.668	5
40	DC 7.40 V	0.810	0.842	
30	DC 7.40 V	0.777	0.712	
20	DC 7.40 V	0.863	0.594	
10	DC 7.40 V	0.626	0.773	
0	DC 7.40 V	0.415	0.712	
-10	DC 7.40 V	0.691	0.668	
-20	DC 7.40 V	0.691	0.817	
-30	DC 7.40 V	0.757	0.953	
Result	Pass			

(2) Frequency stability versus input voltage (Battery Limiting voltage is 6.29V) **-5W**

Environment Temperature(°C)	Power (V)	Reference Frequency			Limit: ppm
		136.025MHz	155.025MHz	173.975MHz	
50	DC 6.29	0.412	0.742	0.339	5
40	DC 6.29	0.191	0.232	0.374	
30	DC 6.29	0.706	0.335	0.224	
20	DC 6.29	0.625	0.342	0.483	
10	DC 6.29	0.338	0.406	0.333	
0	DC 6.29	0.287	0.368	0.109	
-10	DC 6.29	0.478	0.445	0.305	
-20	DC 6.29	0.507	0.123	0.397	
-30	DC 6.29	0.426	0.555	0.322	
Result	Pass				

Environment Temperature(°C)	Power (V)	Reference Frequency		Limit: ppm
		151.85MHz	161.61MHz	
50	DC 6.29	0.494	0.773	5
40	DC 6.29	0.606	0.693	
30	DC 6.29	0.738	0.829	
20	DC 6.29	0.454	0.588	
10	DC 6.29	0.389	0.749	
0	DC 6.29	0.448	0.842	
-10	DC 6.29	0.757	0.514	
-20	DC 6.29	0.698	0.588	
-30	DC 6.29	0.738	0.724	
Result	Pass			

(3) Frequency stability versus input voltage (Battery Fully Charged voltage is 8.51V) **-5W**

Environment Temperature(°C)	Power (V)	Reference Frequency			Limit: ppm
		136.025MHz	155.025MHz	173.975MHz	
50	DC 8.51	0.632	0.374	0.517	5
40	DC 8.51	0.706	0.593	0.115	
30	DC 8.51	0.191	0.329	0.690	
20	DC 8.51	0.154	0.406	0.057	
10	DC 8.51	0.507	0.374	1.092	
0	DC 8.51	0.265	0.871	0.747	
-10	DC 8.51	0.375	0.722	0.230	
-20	DC 8.51	0.485	0.748	0.322	
-30	DC 8.51	0.772	0.535	0.862	
Result	Pass				

Environment Temperature(°C)	Power (V)	Reference Frequency		Limit: ppm
		151.85MHz	161.61MHz	
50	DC 8.51	0.165	0.514	5
40	DC 8.51	0.711	0.761	
30	DC 8.51	0.612	0.569	
20	DC 8.51	0.171	0.520	
10	DC 8.51	0.705	0.470	
0	DC 8.51	0.566	0.563	
-10	DC 8.51	0.520	0.532	
-20	DC 8.51	0.586	0.359	
-30	DC 8.51	0.257	0.390	
Result	Pass			

(4) Frequency stability versus input voltage (Battery endpoint is 6V) **-5W**

Environment Temperature(°C)	Power (V)	Reference Frequency			Limit: ppm
		136.025MHz	155.025MHz	173.975MHz	
50	DC 6.00	0.382	0.729	0.333	5
40	DC 6.00	0.507	0.361	0.506	
30	DC 6.00	0.426	0.342	0.397	
20	DC 6.00	0.353	0.445	0.466	
10	DC 6.00	0.573	0.484	0.552	
0	DC 6.00	0.522	0.335	0.351	
-10	DC 6.00	0.463	0.619	0.333	
-20	DC 6.00	0.419	0.303	0.489	
-30	DC 6.00	0.595	0.593	0.397	
Result	Pass				

Environment Temperature(°C)	Power (V)	Reference Frequency		Limit: ppm
		151.85MHz	161.61MHz	
50	DC 6.00 V	0.652	0.798	5
40	DC 6.00 V	0.678	0.093	
30	DC 6.00 V	0.797	0.241	
20	DC 6.00 V	0.711	0.526	
10	DC 6.00 V	0.942	0.563	
0	DC 6.00 V	0.705	0.241	
-10	DC 6.00 V	0.514	0.563	
-20	DC 6.00 V	0.665	0.761	
-30	DC 6.00 V	0.896	0.730	
Result	Pass			

(1) Frequency stability versus input voltage (Supply nominal voltage is 7.4V) **--1W**

Environment Temperature(°C)	Power (V)	Reference Frequency			Limit: ppm
		136.025MHz	155.025MHz	173.975MHz	
50	DC 7.40	0.426	0.703	0.609	5
40	DC 7.40	0.706	0.600	0.736	
30	DC 7.40	0.471	0.374	1.127	
20	DC 7.40	0.478	0.310	0.615	
10	DC 7.40	0.625	0.445	0.879	
0	DC 7.40	0.206	0.348	0.483	
-10	DC 7.40	0.698	0.535	0.678	
-20	DC 7.40	0.595	0.568	0.604	
-30	DC 7.40	0.586	0.606	0.782	
Result	Pass				

Environment Temperature(°C)	Power	Reference Frequency		Limit: ppm
	(V)	151.85MHz	161.61MHz	
50	DC 7.40 V	0.764	0.532	5
40	DC 7.40 V	0.711	0.712	
30	DC 7.40 V	0.770	0.786	
20	DC 7.40 V	0.830	0.842	
10	DC 7.40 V	0.685	0.773	
0	DC 7.40 V	0.369	0.811	
-10	DC 7.40 V	0.560	0.594	
-20	DC 7.40 V	0.494	0.606	
-30	DC 7.40 V	0.441	0.365	
Result	Pass			

(2) Frequency stability versus input voltage (Battery Limiting voltage is 6.29V) --1W

Environment Temperature(°C)	Power	Reference Frequency			Limit: ppm
	(V)	136.025MHz	155.025MHz	173.975MHz	
50	DC 6.29	0.537	0.677	0.598	5
40	DC 6.29	0.618	0.626	0.523	
30	DC 6.29	0.845	0.639	0.397	
20	DC 6.29	0.919	0.548	0.437	
10	DC 6.29	0.706	3.612	0.477	
0	DC 6.29	0.500	0.548	0.397	
-10	DC 6.29	0.912	0.477	0.276	
-20	DC 6.29	0.992	0.439	0.397	
-30	DC 6.29	0.720	0.877	0.494	
Result	Pass				

Environment Temperature(°C)	Power	Reference Frequency		Limit: ppm
	(V)	151.85MHz	161.61MHz	
50	DC 6.29	0.672	0.712	5
40	DC 6.29	0.632	0.848	
30	DC 6.29	0.547	0.538	
20	DC 6.29	0.691	0.594	
10	DC 6.29	0.896	0.514	
0	DC 6.29	0.817	0.520	
-10	DC 6.29	0.797	0.637	
-20	DC 6.29	0.869	0.835	
-30	DC 6.29	0.968	0.786	
Result	Pass			

(3) Frequency stability versus input voltage (Battery Fully Charged voltage is 8.51V) --1W

Environment Temperature(°C)	Power (V)	Reference Frequency			Limit: ppm
		136.025MHz	155.025MHz	173.975MHz	
50	DC 8.51	0.360	0.374	0.362	5
40	DC 8.51	0.426	0.342	0.644	
30	DC 8.51	0.507	0.619	0.592	
20	DC 8.51	0.610	0.335	0.598	
10	DC 8.51	0.507	0.735	0.874	
0	DC 8.51	0.456	0.722	0.937	
-10	DC 8.51	0.647	0.632	0.713	
-20	DC 8.51	0.603	0.652	0.983	
-30	DC 8.51	0.618	0.606	0.724	
Result	Pass				

Environment Temperature(°C)	Power (V)	Reference Frequency		Limit: ppm
		151.85MHz	161.61MHz	
50	DC 8.51	0.757	0.545	5
40	DC 8.51	0.869	0.594	
30	DC 8.51	0.586	0.390	
20	DC 8.51	0.606	0.817	
10	DC 8.51	0.356	0.532	
0	DC 8.51	0.764	0.594	
-10	DC 8.51	0.678	0.520	
-20	DC 8.51	0.698	0.421	
-30	DC 8.51	0.626	0.464	
Result	Pass			

(4) Frequency stability versus input voltage (Battery endpoint is 6V) --1W

Environment Temperature(°C)	Power (V)	Reference Frequency			Limit: ppm
		136.025MHz	155.025MHz	173.975MHz	
50	DC 6.00	0.507	0.987	0.489	5
40	DC 6.00	0.750	0.439	0.552	
30	DC 6.00	0.485	0.406	0.310	
20	DC 6.00	0.750	0.561	0.431	
10	DC 6.00	0.640	0.619	0.391	
0	DC 6.00	0.706	0.097	0.489	
-10	DC 6.00	0.419	0.742	0.581	
-20	DC 6.00	0.632	0.374	0.931	
-30	DC 6.00	0.500	0.406	1.012	
Result	Pass				

Environment Temperature(°C)	Power	Reference Frequency		Limit:
	(V)	151.85MHz	161.61MHz	ppm
50	DC 6.00 V	0.823	0.650	5
40	DC 6.00 V	0.718	0.390	
30	DC 6.00 V	0.830	0.569	
20	DC 6.00 V	0.797	0.773	
10	DC 6.00 V	0.889	0.390	
0	DC 6.00 V	0.698	0.483	
-10	DC 6.00 V	0.797	0.223	
-20	DC 6.00 V	0.869	0.155	
-30	DC 6.00 V	0.705	0.093	
Result	Pass			

7. EMISSION BANDWIDTH

7.1 PROVISIONS APPLICABLE


FCC Part 90 & FCC Part 22:

The authorized bandwidth shall be 11.25 KHz for 12.5 KHz channel separation and 6 KHz for 6.25 KHz channel separation.

7.2 MEASUREMENT PROCEDURE

- 1). The EUT was modulated by 2.5 KHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing).
- 2). Set SPA Center Frequency = fundamental frequency, RBW=100 Hz, VBW= 300 Hz, Span =50 KHz.
- 3). Set SPA Max hold. Mark peak, -26 dB.

7.3 TEST SETUP BLOCK DIAGRAM

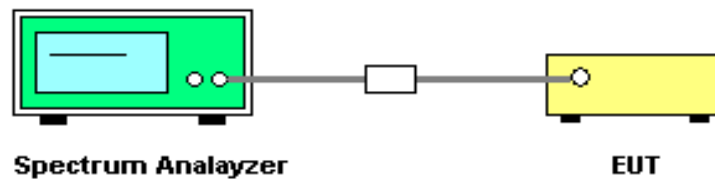


7.4 MEASUREMENT RESULT


Analog:

26 dB Bandwidth Measurement Result-5W			
Operating Frequency	12.5 KHz Channel Separation		
	Test Data	Limits	Result
136.025MHz	8.435KHz	11.25 KHz	Pass
151.850MHz	10.17KHz	11.25 KHz	Pass
155.025MHz	8.431KHz	11.25 KHz	Pass
161.61 MHz	10.18KHz	11.25 KHz	Pass
173.975MHz	8.406KHz	11.25 KHz	Pass


Occupied bandwidth of Low Channel (136.025MHz) @ 12.5 KHz Channel Separation

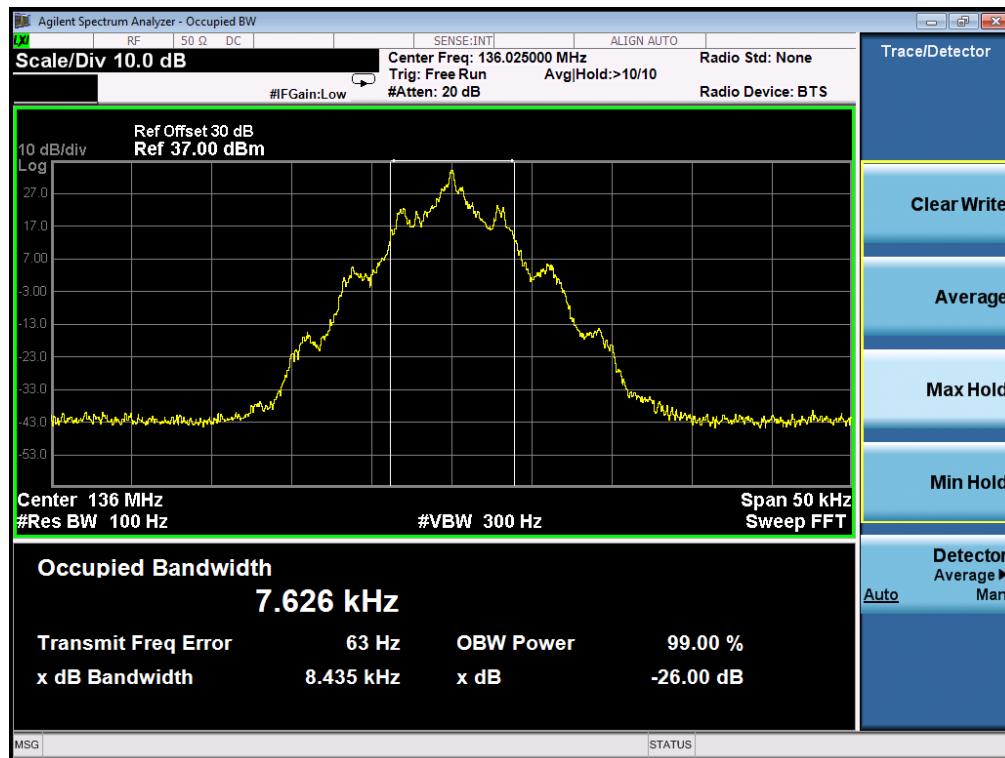

Occupied bandwidth of Middle Channel (151.850 MHz)-5W

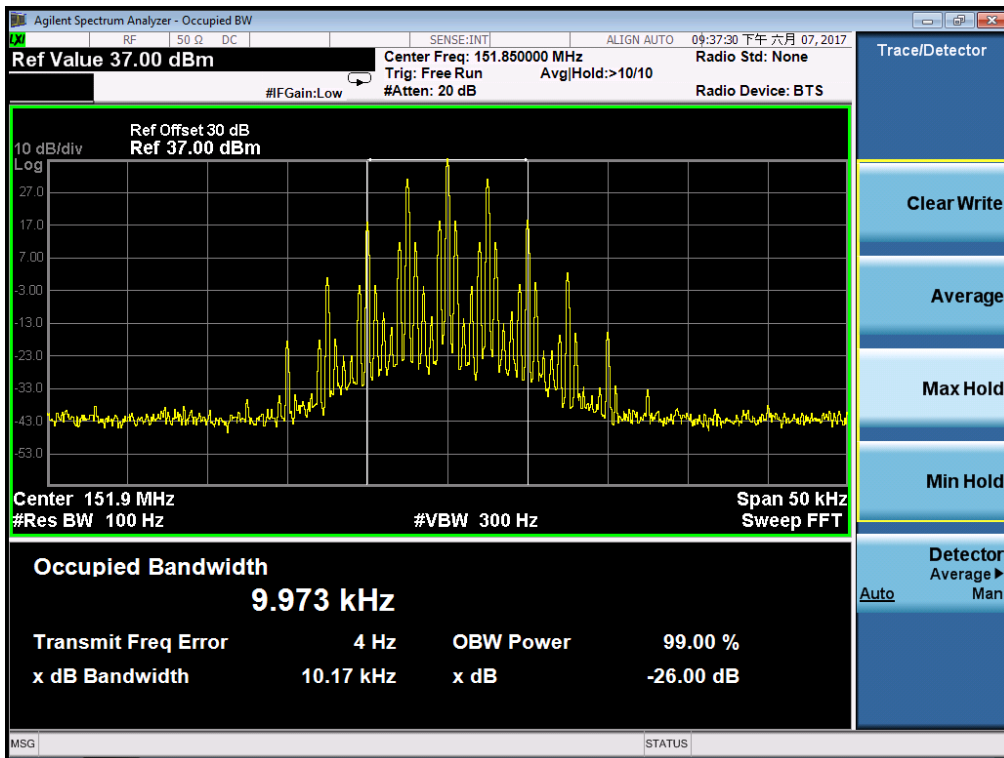


Occupied bandwidth of Middle Channel (161.610 MHz)-5W

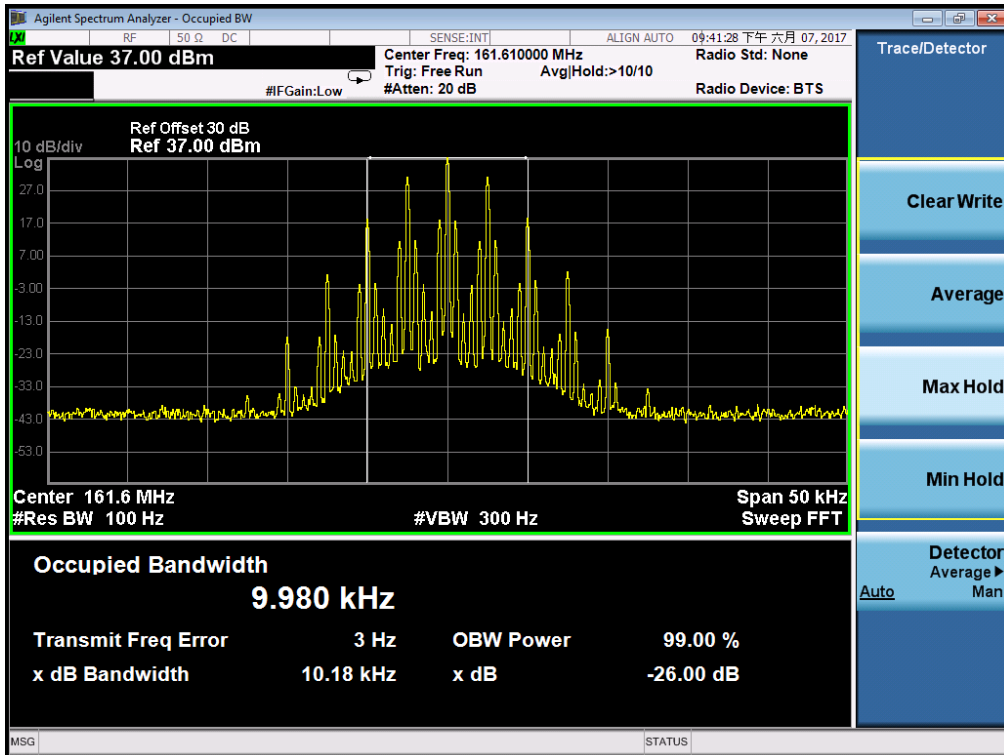


26 dB Bandwidth Measurement Result-1W			
Operating Frequency	12.5 KHz Channel Separation		
	Test Data	Limits	Result
136.025MHz	8.432KHz	11.25 KHz	Pass
151.850MHz	10.30KHz	11.25 KHz	Pass
155.025MHz	8.416KHz	11.25 KHz	Pass
161.61 MHz	10.18KHz	11.25 KHz	Pass
173.975MHz	8.426KHz	11.25 KHz	Pass


Occupied bandwidth of Low Channel (136.025MHz) @ 12.5 KHz Channel Separation

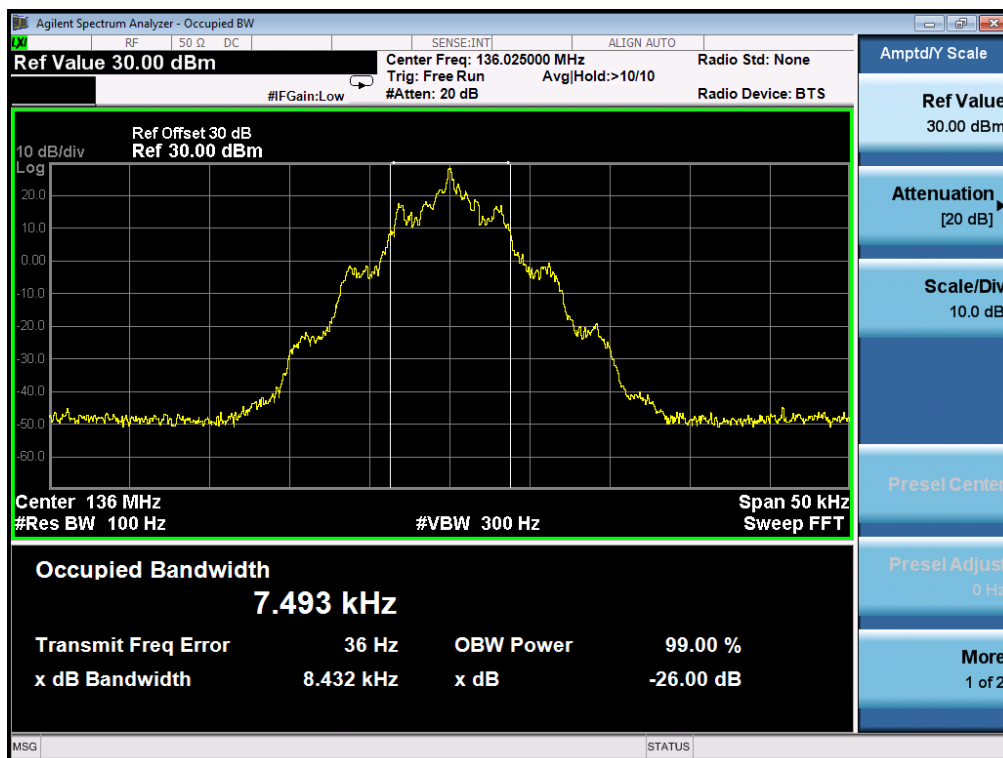

Occupied bandwidth of Middle Channel (151.850 MHz)-1W

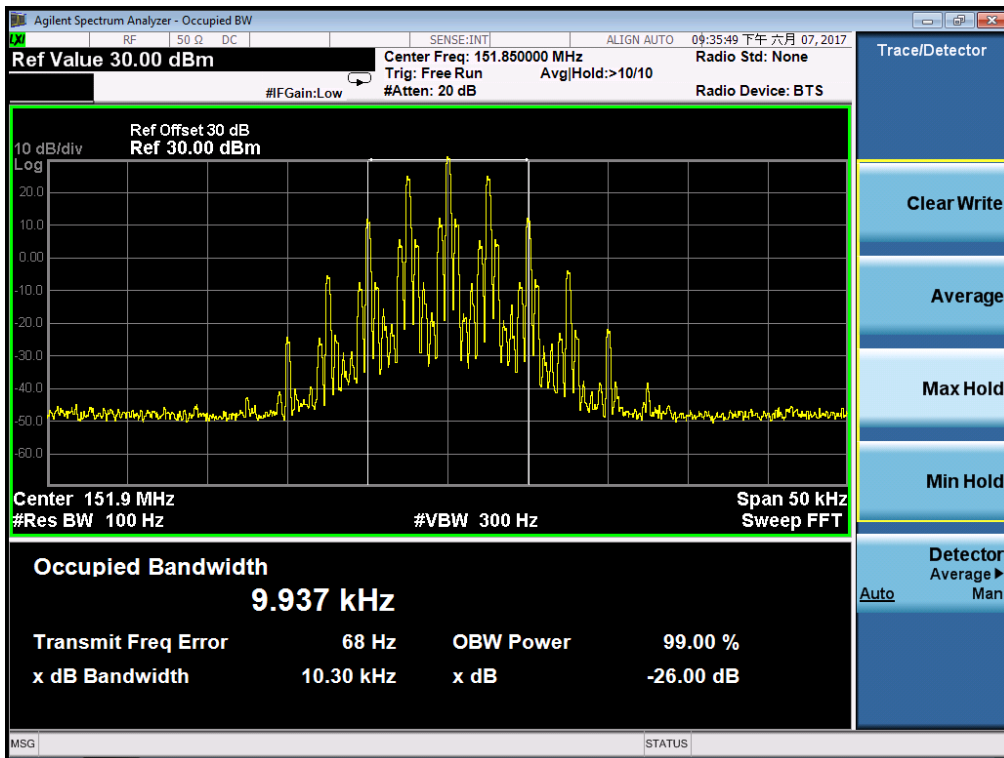

Occupied bandwidth of Middle Channel (161.610 MHz)-1W

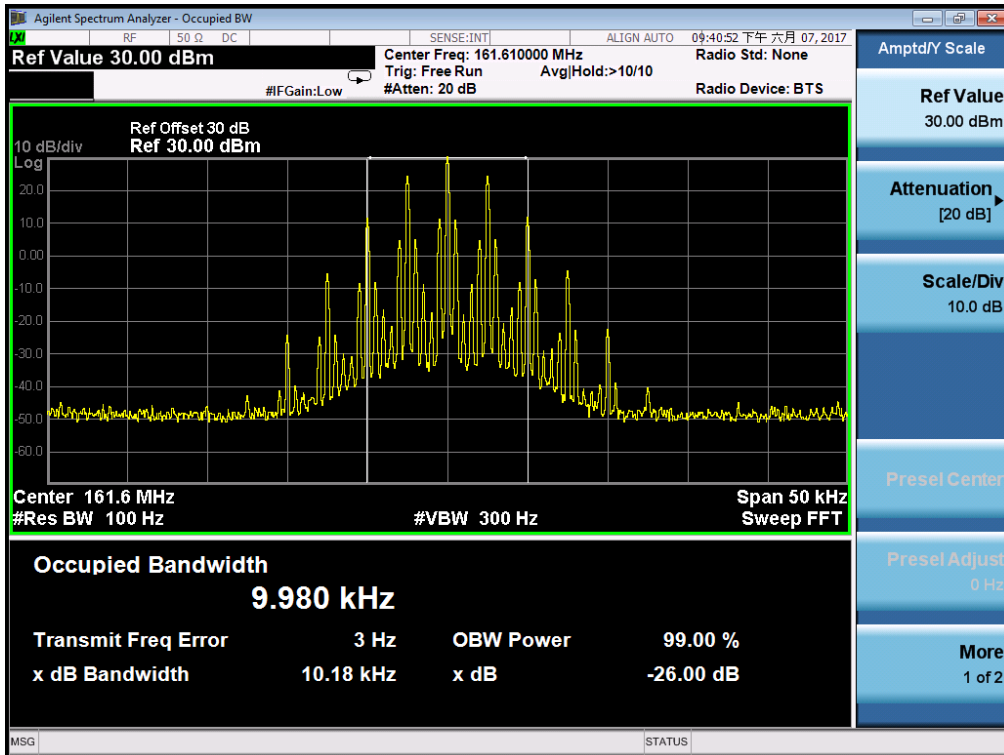


Digital:


TEST RESULTS

26 DB BANDWIDTH MEASUREMENT RESULT-5W			
Operating Frequency	12.5 KHz Channel Separation		
	Test Data	Limits	Result
136.025MHz	9.740KHz	11.25 KHz	Pass
151.850MHz	9.248KHz	11.25 KHz	Pass
155.025MHz	9.726KHz	11.25 KHz	Pass
161.61 MHz	8.814KHz	11.25 KHz	Pass
173.975MHz	8.719KHz	11.25 KHz	Pass


Occupied bandwidth of Low Channel (136.025MHz) @ 12.5 KHz Channel Separation

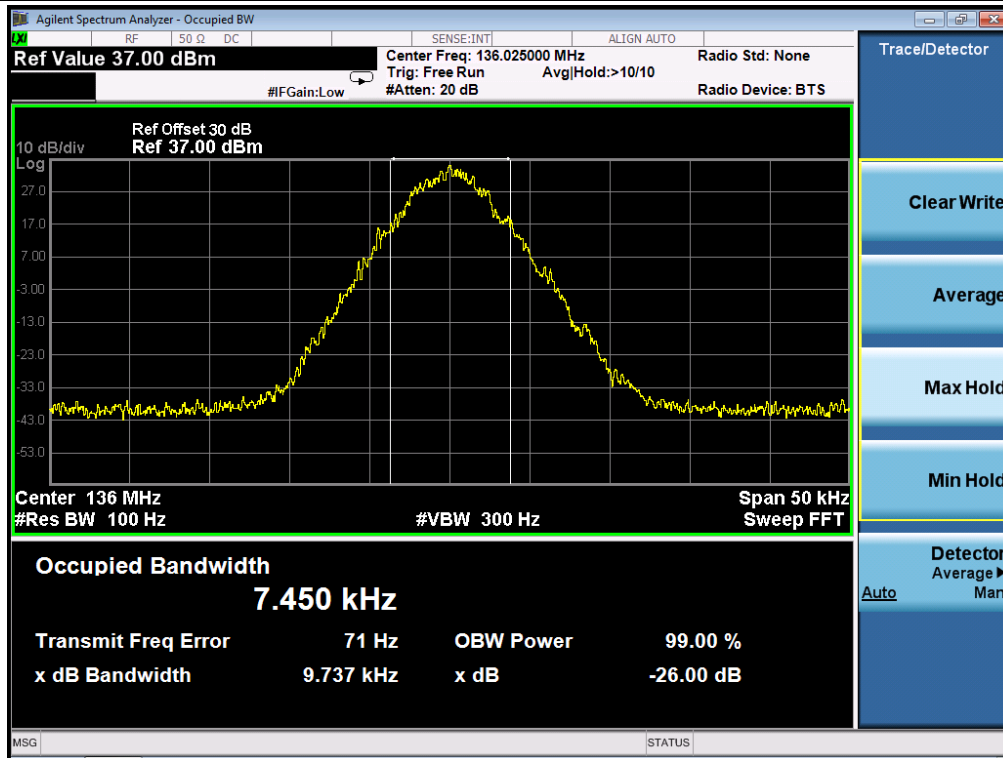

Occupied bandwidth of Middle Channel (151.850 MHz)-5W

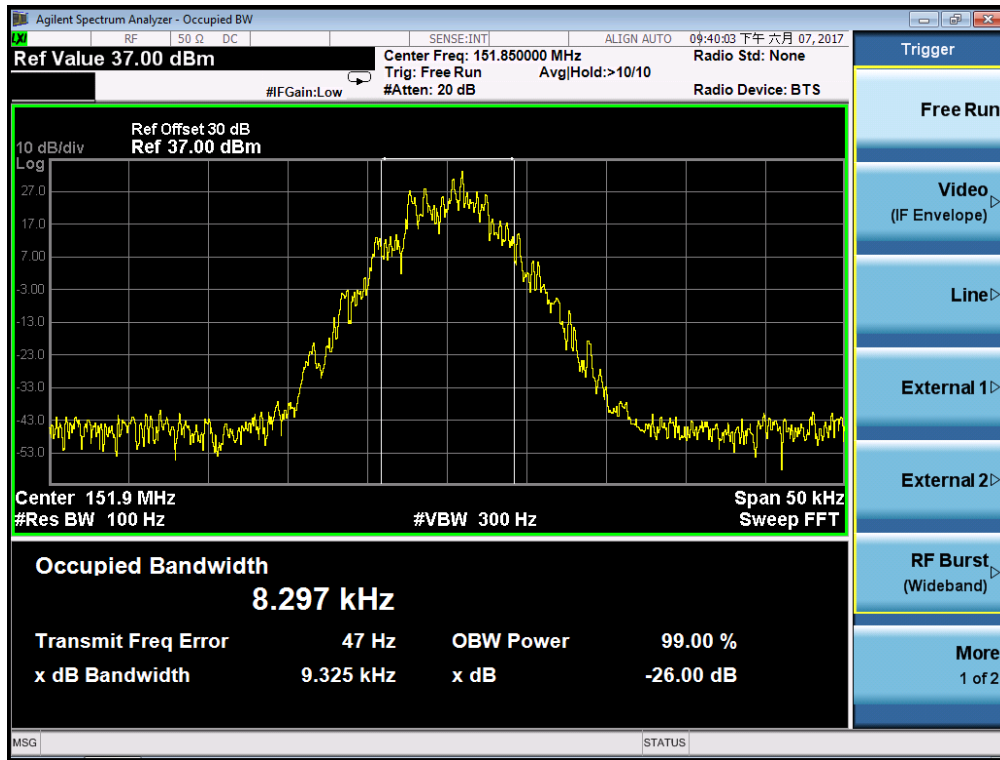


Occupied bandwidth of Middle Channel (161.610 MHz)-5W

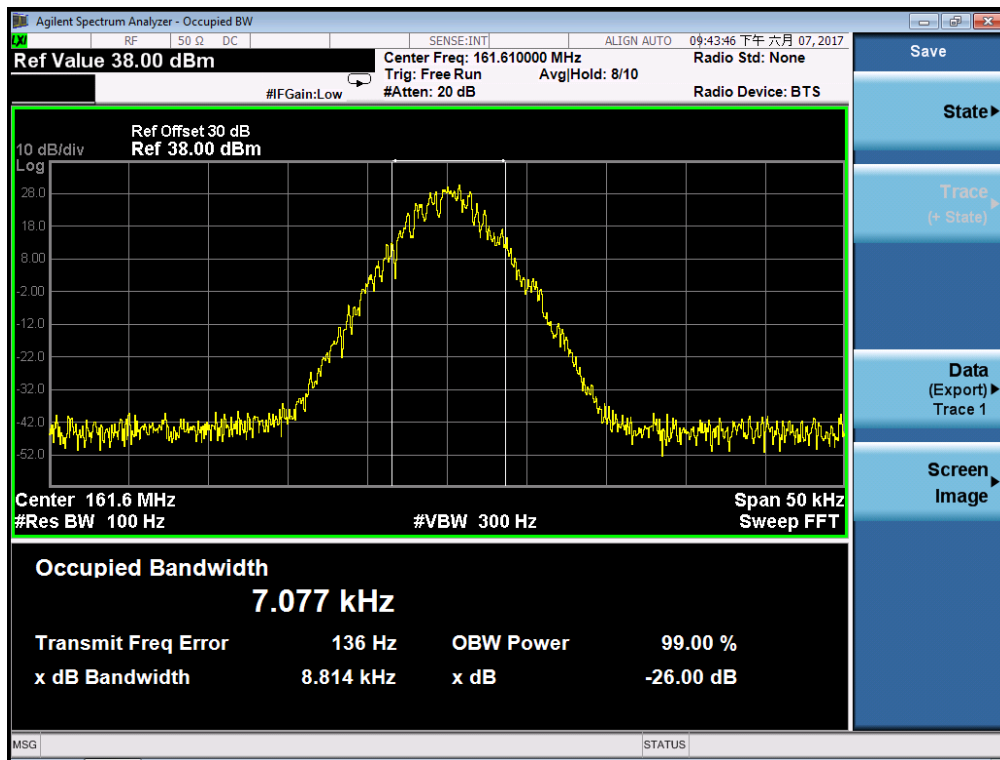


TEST RESULTS

26 DB BANDWIDTH MEASUREMENT RESULT-1W			
Operating Frequency	12.5 KHz Channel Separation		
	Test Data	Limits	Result
136.025MHz	9.363KHz	11.25 KHz	Pass
151.850MHz	9.248KHz	11.25 KHz	Pass
155.025MHz	9.352KHz	11.25 KHz	Pass
161.610MHz	9.264KHz	11.25 KHz	Pass
173.975MHz	9.348KHz	11.25 KHz	Pass


Occupied bandwidth of Low Channel (136.025MHz) @ 12.5 KHz Channel Separation

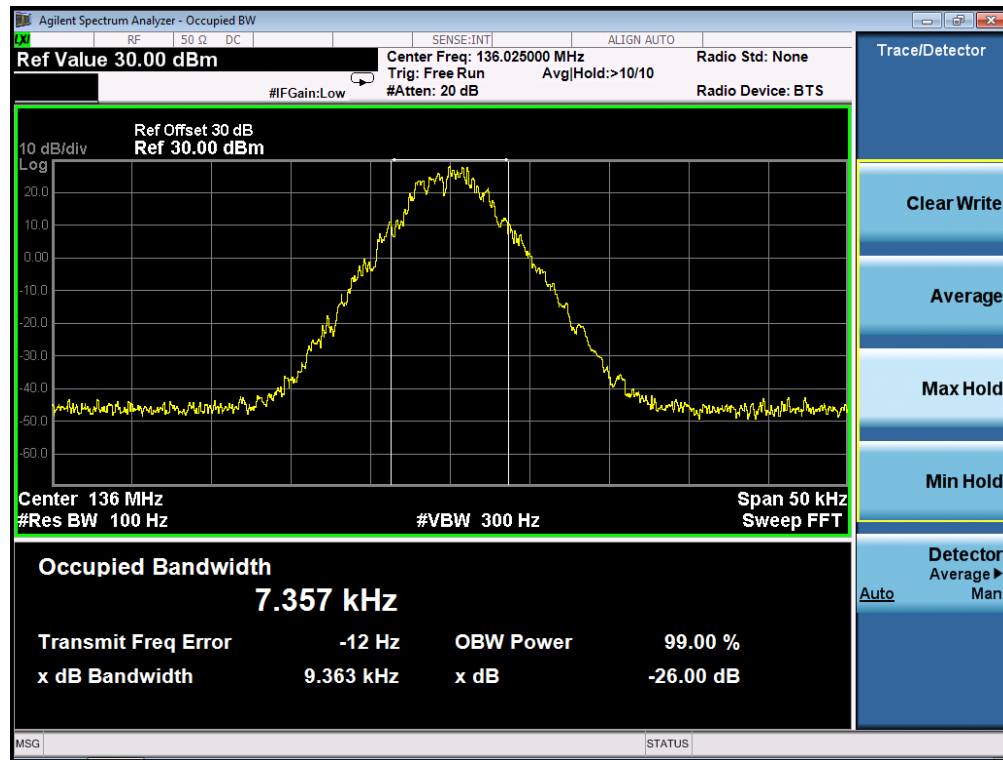

Occupied bandwidth of Middle Channel (151.850 MHz)-1W

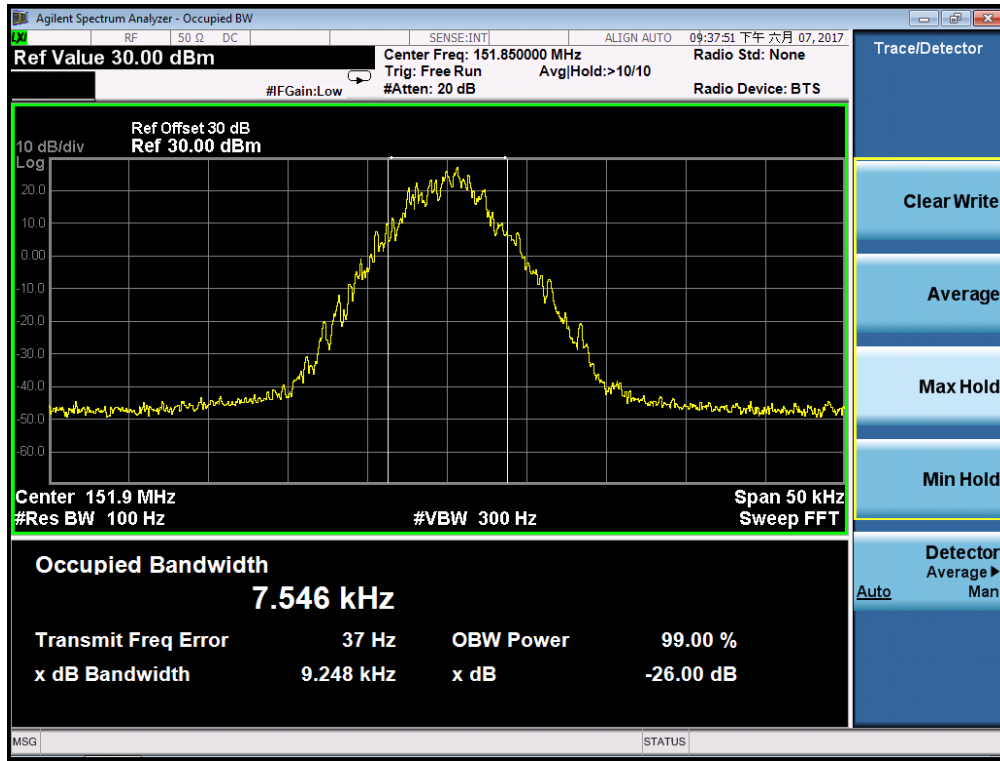

Occupied bandwidth of Middle Channel (161.610 MHz)-1W

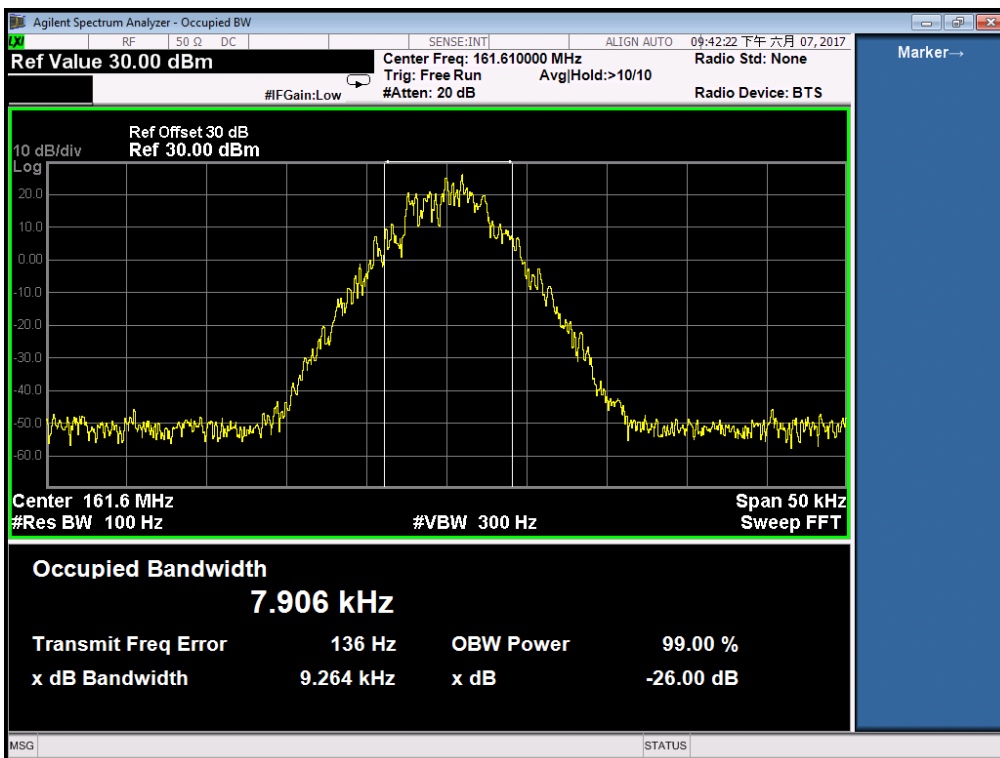

Note: All the test frequencies had been tested, but only the worst data was recorded.

8. UNWANTED RADIATION

8.1 PROVISIONS APPLICABLE

8.1.1 According to FCC §2.1049, §22.359 and §90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with each channel separation.

Emission Mask D -for 12.5 KHz Channel Separation:

- (1).On any frequency removed from the center of the authorized bandwidth f_0 to 5.625 KHz removed from f_0 : Zero dB.
- (2).On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (f_d in KHz) f_0 of more than 5.625 KHz but no more than 12.5 KHz: At least $7.27(f_d - 2.88 \text{ KHz})$ dB
- (3).On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (f_d in KHz) f_0 of more than 12.5 KHz: At least $50 + 10 \log(P)$ dB or 70 dB, which ever is lesser attenuation.

8.2 MEASUREMENT PROCEDURE

- (1)On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- (2)The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3)The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4)The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5)The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6)The transmitter shall than be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7)The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.

- (8)The maximum signal level detected by the measuring receiver shall be noted.
- (9)The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11)The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12)The substitution antenna shall be connected to a calibrated signal generator.
- (13)If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.

(14)The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.

(15)The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.



(16)The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.

(17)The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.



8.3 TEST SETUP BLOCK DIAGRAM

SUBSTITUTION METHOD: (Radiated Emissions)

Radiated Below 1GHz

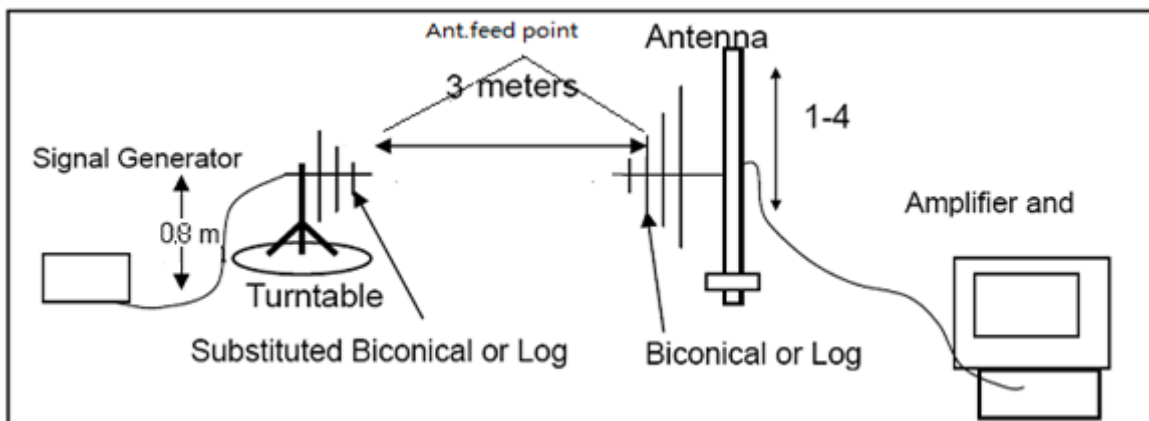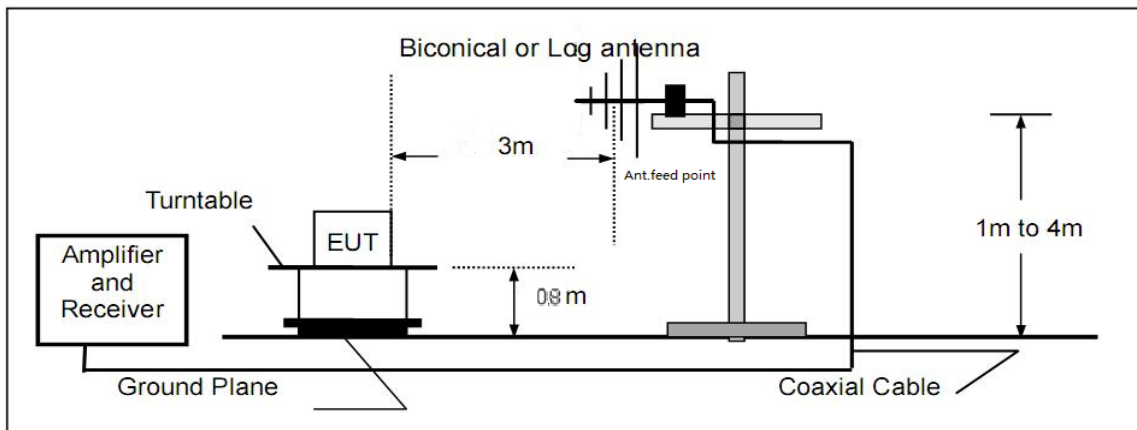

Radiated Above 1 GHz

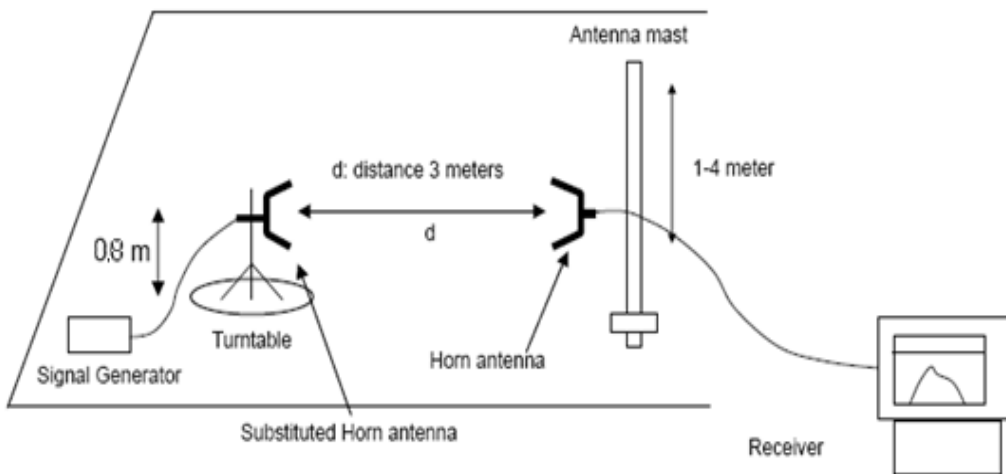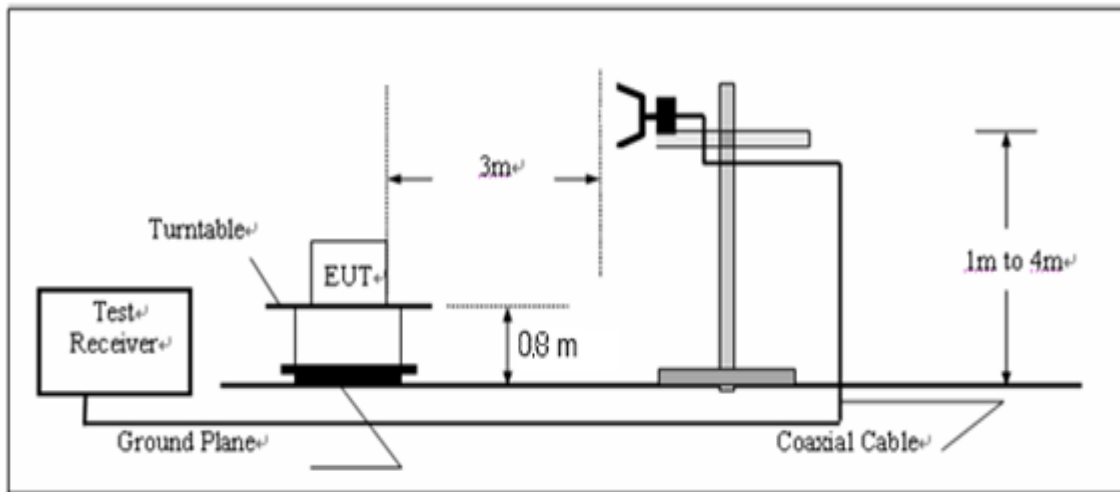

8.4 MEASUREMENT RESULTS:

Applicable Standard

FCC §2.1053, §22.359 and §90.210

On any frequency removed from the center of the authorized bandwidth by a displacement

Frequency (fd in KHz)for of more than 12.5 KHz: at least 50+10 log(P) dB or 70 dB, whichever is lesser attenuation.

Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100 kHz for below 1GHz_{th} and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10 harmonic.

Limit: At least 50+10 log (P) =50+10log (5) =57 (dB)—5W

At least 50+10 log (P) =50+10log (1) =50 (dB)—1W

Analog:

TEST RESULTS--5W

Measurement Result for 12.5 KHz Channel Separation @ 136.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
136.025	H	0		pass
272.050	H	71.35	57	pass
408.08	H	72.59	57	pass
544.100	H	72.16	57	pass
680.125	H	73.28	57	pass
816.150	H	76.96	57	pass
952.175	H	75.26	57	pass
1088.200	H	80.21	57	pass
1224.225	H	81.69	57	pass
1360.250	H	82.16	57	pass

Emission Frequency (MHz)	Ant. Polarity(H/H)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
136.025	V	0		pass
272.050	V	69.28	57	pass
408.08	V	70.56	57	pass
544.100	V	71.16	57	pass
680.125	V	75.18	57	pass
816.150	V	76.86	57	pass
952.175	V	75.52	57	pass
1088.200	V	78.46	57	pass
1224.225	V	79.58	57	pass
1360.250	V	81.96	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 151.850MHz-5W

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
151.850	H	0		pass
303.700	H	69.24	57	pass
455.550	H	70.53	57	pass
607.400	H	70.38	57	pass
759.250	H	73.61	57	pass
911.100	H	76.83	57	pass
1062.950	H	77.74	57	pass
1214.800	H	78.38	57	pass
1366.650	H	81.69	57	pass
1518.500	H	80.84	57	pass

Emission Frequency (MHz)	Ant. Polarity(H/H)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
151.850	V	0		pass
303.700	V	69.53	57	pass
455.550	V	70.51	57	pass
607.400	V	70.96	57	pass
759.250	V	72.59	57	pass
911.100	V	74.42	57	pass
1062.950	V	78.58	57	pass
1214.800	V	79.46	57	pass
1366.650	V	81.53	57	pass
1518.500	V	82.25	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 155.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
155.025	H	0		pass
310.050	H	70.19	57	pass
465.075	H	72.85	57	pass
620.100	H	71.63	57	pass
775.125	H	73.69	57	pass
930.150	H	74.58	57	pass
1085.175	H	76.69	57	pass
1240.200	H	79.18	57	pass
1395.225	H	80.38	57	pass
1550.250	H	82.17	57	pass

Emission Frequency (MHz)	Ant. Polarity(H/H)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
155.000	V	0		pass
310.000	V	68.59	57	pass
465.000	V	69.54	57	pass
620.000	V	72.87	57	pass
775.000	V	75.63	57	pass
930.000	V	76.08	57	pass
1085.000	V	79.69	57	pass
1240.000	V	80.57	57	pass
1395.000	V	80.28	57	pass
1550.000	V	81.63	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 161.610MHz-5W

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
161.610	H	0		pass
323.220	H	70.19	57	pass
484.83	H	71.27	57	pass
646.440	H	72.63	57	pass
808.050	H	73.74	57	pass
969.660	H	75.28	57	pass
1131.270	H	77.52	57	pass
1292.880	H	79.49	57	pass
1454.490	H	81.68	57	pass
1616.100	H	82.34	57	pass

Emission Frequency (MHz)	Ant. Polarity(H/H)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
161.610	V	0		pass
323.220	V	70.86	57	pass
484.83	V	70.29	57	pass
646.440	V	71.42	57	pass
808.050	V	71.59	57	pass
969.660	V	72.63	57	pass
1131.270	V	75.72	57	pass
1292.880	V	76.61	57	pass
1454.490	V	78.94	57	pass
1616.100	V	79.64	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 173.975MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
173.975	H	0		pass
347.950	H	70.58	57	pass
521.925	H	72.93	57	pass
695.900	H	73.53	57	pass
869.875	H	74.42	57	pass
1043.850	H	75.85	57	pass
1217.825	H	76.63	57	pass
1391.800	H	78.63	57	pass
1565.775	H	80.18	57	pass
1739.750	H	81.69	57	pass

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
173.975	V	0		pass
347.950	V	70.42	57	pass
521.925	V	71.19	57	pass
695.900	V	73.63	57	pass
869.875	V	74.28	57	pass
1043.850	V	75.57	57	pass
1217.825	V	77.36	57	pass
1391.800	V	79.65	57	pass
1565.775	V	80.36	57	pass
1739.750	V	81.69	57	pass

TEST RESULTS--1W**Measurement Result for 12.5 KHz Channel Separation @ 136.025MHz**

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
136.025	H	0		pass
272.050	H	73.26	50	pass
408.08	H	72.38	50	pass
544.100	H	74.26	50	pass
680.125	H	75.63	50	pass
816.150	H	75.96	50	pass
952.175	H	77.18	50	pass
1088.200	H	80.69	50	pass
1224.225	H	81.28	50	pass
1360.250	H	82.36	50	pass

Emission Frequency (MHz)	Ant. Polarity(H/H)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
136.025	V	0		pass
272.050	V	71.16	50	pass
408.08	V	72.25	50	pass
544.100	V	72.69	50	pass
680.125	V	72.52	50	pass
816.150	V	75.36	50	pass
952.175	V	76.58	50	pass
1088.200	V	76.36	50	pass
1224.225	V	80.52	50	pass
1360.250	V	83.27	50	pass

Measurement Result for 12.5 KHz Channel Separation @ 151.850MHz-1W

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
151.850	H	0		pass
303.700	H	69.35	50	pass
455.550	H	70.39	50	pass
607.400	H	71.54	50	pass
759.250	H	72.63	50	pass
911.100	H	75.58	50	pass
1062.950	H	76.71	50	pass
1214.800	H	79.53	50	pass
1366.650	H	80.29	50	pass
1518.500	H	80.51	50	pass

Emission Frequency (MHz)	Ant. Polarity(H/H)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
151.85	V	0		pass
303.7	V	70.38	50	pass
455.55	V	71.42	50	pass
607.4	V	73.18	50	pass
759.25	V	73.63	50	pass
911.1	V	75.87	50	pass
1062.95	V	75.35	50	pass
1214.8	V	77.96	50	pass
1366.65	V	78.15	50	pass
1518.5	V	79.39	50	pass

Measurement Result for 12.5 KHz Channel Separation @ 155.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
155.025	H	0		pass
310.050	H	72.69	50	pass
465.075	H	71.62	50	pass
620.100	H	73.58	50	pass
775.125	H	75.53	50	pass
930.150	H	74.16	50	pass
1085.175	H	78.86	50	pass
1240.200	H	79.85	50	pass
1395.225	H	83.69	50	pass
1550.250	H	84.57	50	pass

Emission Frequency (MHz)	Ant. Polarity(H/H)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
155.000	V	0		pass
310.000	V	72.58	50	pass
465.000	V	73.36	50	pass
620.000	V	74.27	50	pass
775.000	V	75.36	50	pass
930.000	V	77.17	50	pass
1085.000	V	78.58	50	pass
1240.000	V	80.75	50	pass
1395.000	V	82.63	50	pass
1550.000	V	82.22	50	pass

Measurement Result for 12.5 KHz Channel Separation @ 161.10MHz-1W

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
161.610	H	0		pass
323.220	H	71.63	50	pass
484.830	H	72.15	50	pass
646.440	H	73.35	50	pass
808.050	H	76.85	50	pass
969.660	H	77.36	50	pass
1131.270	H	79.28	50	pass
1292.880	H	78.46	50	pass
1454.490	H	80.52	50	pass
1616.100	H	79.36	50	pass

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
173.975	V	0		pass
347.950	V	70.29	50	pass
521.925	V	71.36	50	pass
695.900	V	73.24	50	pass
869.875	V	75.13	50	pass
1043.850	V	76.27	50	pass
1217.825	V	77.63	50	pass
1391.800	V	80.55	50	pass
1565.775	V	81.63	50	pass
1739.750	V	81.19	50	pass

Measurement Result for 12.5 KHz Channel Separation @ 173.975MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
173.975	H	0		pass
347.950	H	71.58	50	pass
521.925	H	73.31	50	pass
695.900	H	74.57	50	pass
869.875	H	75.85	50	pass
1043.850	H	76.06	50	pass
1217.825	H	78.17	50	pass
1391.800	H	79.36	50	pass
1565.775	H	81.82	50	pass
1739.750	H	82.05	50	pass

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
173.975	V	0		pass
347.950	V	71.62	50	pass
521.925	V	72.58	50	pass
695.900	V	76.63	50	pass
869.875	V	75.15	50	pass
1043.850	V	78.26	50	pass
1217.825	V	79.58	50	pass
1391.800	V	78.52	50	pass
1565.775	V	80.96	50	pass
1739.750	V	81.17	50	pass

Digital:

TEST RESULTS-5W

Measurement Result for 12.5 KHz Channel Separation @ 136.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
136.025	H	0		pass
272.050	H	71.28	57	pass
408.08	H	72.36	57	pass
544.100	H	72.24	57	pass
680.125	H	74.52	57	pass
816.150	H	75.63	57	pass
952.175	H	77.14	57	pass
1088.200	H	80.05	57	pass
1224.225	H	81.36	57	pass
1360.250	H	82.69	57	pass

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
136.025	V	0		pass
272.050	V	71.51	57	pass
408.08	V	71.63	57	pass
544.100	V	72.16	57	pass
680.125	V	73.25	57	pass
816.150	V	74.96	57	pass
952.175	V	76.36	57	pass
1088.200	V	78.42	57	pass
1224.225	V	80.02	57	pass
1360.250	V	81.08	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 151.850MHz-5W

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
151.850	H	0		pass
303.700	H	70.36	57	pass
455.55	H	71.31	57	pass
607.400	H	72.52	57	pass
759.250	H	73.68	57	pass
911.100	H	74.79	57	pass
1062.950	H	77.15	57	pass
1214.800	H	80.63	57	pass
1366.650	H	80.89	57	pass
1518.500	H	81.62	57	pass

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
151.850	V	0		pass
303.700	V	71.69	57	pass
455.55	V	70.51	57	pass
607.400	V	72.37	57	pass
759.250	V	72.62	57	pass
911.100	V	74.67	57	pass
1062.950	V	75.86	57	pass
1214.800	V	77.61	57	pass
1366.650	V	79.28	57	pass
1518.500	V	80.64	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 155.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
155.025	H	0		pass
310.050	H	71.58	57	pass
465.075	H	72.63	57	pass
620.100	H	73.14	57	pass
775.125	H	75.63	57	pass
930.150	H	76.96	57	pass
1085.175	H	78.58	57	pass
1240.200	H	79.64	57	pass
1395.225	H	80.75	57	pass
1550.250	H	81.28	57	pass

Emission Frequency (MHz)	Ant. Polarity(H/H)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
155.025	V	0		pass
310.050	V	69.25	57	pass
465.08	V	70.36	57	pass
620.100	V	70.15	57	pass
775.125	V	72.47	57	pass
930.150	V	73.25	57	pass
1085.175	V	74.36	57	pass
1240.200	V	75.23	57	pass
1395.225	V	78.74	57	pass
1550.250	V	80.65	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 161.61MHz-5W

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
161.610	H	0		pass
323.220	H	70.62	57	pass
484.83	H	71.74	57	pass
646.440	H	72.16	57	pass
808.050	H	71.95	57	pass
969.660	H	73.83	57	pass
1131.270	H	77.16	57	pass
1292.880	H	79.96	57	pass
1454.490	H	81.43	57	pass
1616.100	H	80.58	57	pass

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
161.610	V	0		pass
323.220	V	71.39	57	pass
484.83	V	70.52	57	pass
646.440	V	71.76	57	pass
808.050	V	72.51	57	pass
969.660	V	73.67	57	pass
1131.270	V	76.86	57	pass
1292.880	V	77.53	57	pass
1454.490	V	81.42	57	pass
1616.100	V	81.96	57	pass

Measurement Result for 12.5 KHz Channel Separation @ 173.975MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
173.975	H	0		pass
347.950	H	70.54	57	pass
521.925	H	71.69	57	pass
695.900	H	72.52	57	pass
869.875	H	73.36	57	pass
1043.850	H	74.14	57	pass
1217.825	H	75.75	57	pass
1391.800	H	78.16	57	pass
1565.775	H	79.85	57	pass
1739.750	H	80.15	57	pass

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
173.975	V	0		pass
347.950	V	71.52	57	pass
521.925	V	72.69	57	pass
695.900	V	73.52	57	pass
869.875	V	75.36	57	pass
1043.850	V	75.29	57	pass
1217.825	V	76.58	57	pass
1391.800	V	78.63	57	pass
1565.775	V	80.14	57	pass
1739.750	V	81.86	57	pass

TEST RESULTS-1W

Measurement Result for 12.5 KHz Channel Separation @ 136.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
136.025	H	0		pass
272.050	H	73.36	50	pass
408.08	H	74.85	50	pass
544.100	H	75.69	50	pass
680.125	H	75.57	50	pass
816.150	H	78.53	50	pass
952.175	H	79.56	50	pass
1088.200	H	80.36	50	pass
1224.225	H	81.57	50	pass
1360.250	H	83.16	50	pass

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
136.025	V	0		pass
272.050	V	70.25	50	pass
408.08	V	71.62	50	pass
544.100	V	73.23	50	pass
680.125	V	74.58	50	pass
816.150	V	75.96	50	pass
952.175	V	77.24	50	pass
1088.200	V	78.58	50	pass
1224.225	V	79.69	50	pass
1360.250	V	80.16	50	pass

Measurement Result for 12.5 KHz Channel Separation @ 151.850MHz-1W

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
151.850	H	0		pass
303.700	H	69.28	50	pass
455.55	H	71.96	50	pass
607.400	H	73.18	50	pass
759.250	H	75.64	50	pass
911.100	H	75.66	50	pass
1062.950	H	76.88	50	pass
1214.800	H	77.96	50	pass
1366.650	H	79.42	50	pass
1518.500	H	80.35	50	pass

Emission Frequency (MHz)	Ant. Polarity(H/H)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
151.850	V	0		pass
303.700	V	71.29	50	pass
455.55	V	72.52	50	pass
607.400	V	73.36	50	pass
759.250	V	75.84	50	pass
911.100	V	74.57	50	pass
1062.950	V	76.68	50	pass
1214.800	V	75.35	50	pass
1366.650	V	81.16	50	pass
1518.500	V	80.91	50	pass

Measurement Result for 12.5 KHz Channel Separation @ 155.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
155.025	H	0		pass
310.050	H	71.26	50	pass
465.075	H	72.15	50	pass
620.100	H	75.62	50	pass
775.125	H	75.69	50	pass
930.150	H	77.74	50	pass
1085.175	H	76.63	50	pass
1240.200	H	78.28	50	pass
1395.225	H	81.15	50	pass
1550.250	H	82.47	50	pass

Emission Frequency (MHz)	Ant. Polarity(H/H)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
155.025	V	0		pass
310.050	V	73.21	50	pass
465.08	V	74.63	50	pass
620.100	V	75.85	50	pass
775.125	V	76.47	50	pass
930.150	V	77.58	50	pass
1085.175	V	78.57	50	pass
1240.200	V	79.25	50	pass
1395.225	V	80.36	50	pass
1550.250	V	81.14	50	pass

Measurement Result for 12.5 KHz Channel Separation @ 161.610MHz-1W

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
161.610	H	0		pass
323.220	H	69.53	50	pass
484.83	H	71.65	50	pass
646.440	H	73.34	50	pass
808.050	H	74.87	50	pass
969.660	H	75.49	50	pass
1131.270	H	76.66	50	pass
1292.880	H	76.37	50	pass
1454.490	H	79.46	50	pass
1616.100	H	80.83	50	pass

Emission Frequency (MHz)	Ant. Polarity(H/H)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
161.610	V	0		pass
323.220	V	71.53	50	pass
484.83	V	72.46	50	pass
646.440	V	74.78	50	pass
808.050	V	74.66	50	pass
969.660	V	76.85	50	pass
1131.270	V	75.54	50	pass
1292.880	V	76.55	50	pass
1454.490	V	79.49	50	pass
1616.100	V	80.26	50	pass

Measurement Result for 12.5 KHz Channel Separation @ 173.975MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
173.975	H	0		pass
347.950	H	72.24	50	pass
521.925	H	73.25	50	pass
695.900	H	72.18	50	pass
869.875	H	73.47	50	pass
1043.850	H	75.69	50	pass
1217.825	H	76.25	50	pass
1391.800	H	77.38	50	pass
1565.775	H	80.47	50	pass
1739.750	H	82.63	50	pass

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
173.975	V	0		pass
347.950	V	72.25	50	pass
521.925	V	73.36	50	pass
695.900	V	75.15	50	pass
869.875	V	76.57	50	pass
1043.850	V	77.86	50	pass
1217.825	V	78.93	50	pass
1391.800	V	79.28	50	pass
1565.775	V	81.28	50	pass
1739.750	V	82.69	50	pass


8.5 EMISSION MASK PLOT

The detailed procedure employed for Emission Mask measurements are specified as following:


- The transmitter shall be modulated by a 2.5 kHz audio signal,
- The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz.

Analog:

The Worst Emission Mask (136.025MHz) for 12.5 KHz channel Separation (5W)

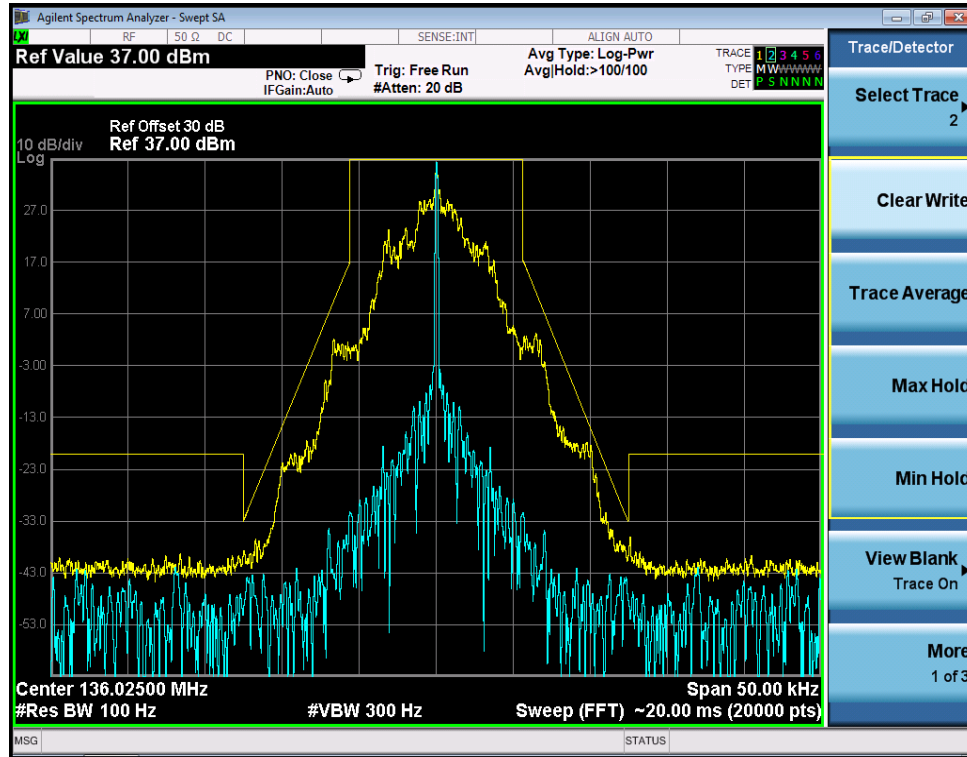


The Worst Emission Mask (136.025MHz) for 12.5 KHz channel Separation (1W)

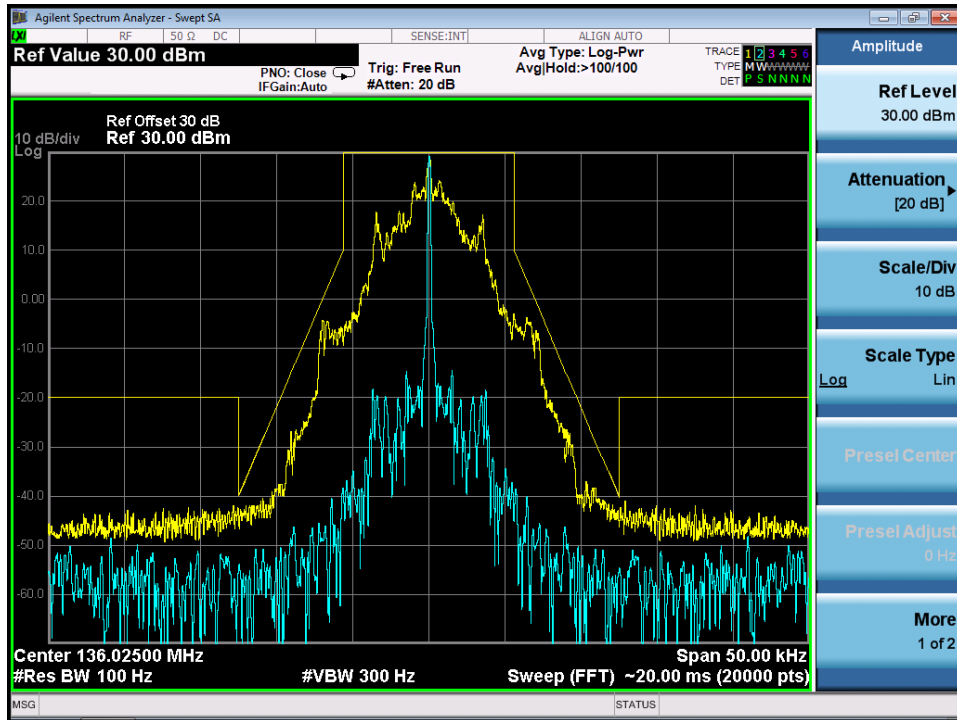


Digital:

The Worst Emission Mask (136.025MHz) for 12.5 KHz channel Separation (5W)

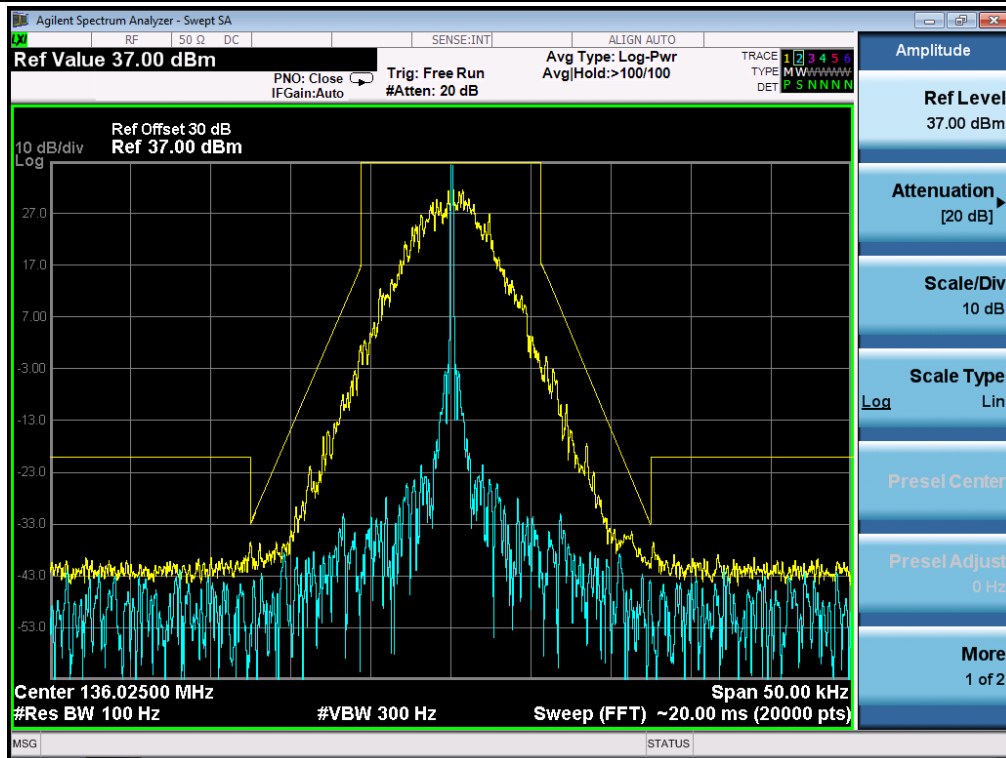

The Worst Emission Mask (136.025MHz) for 12.5 KHz channel Separation (1W)

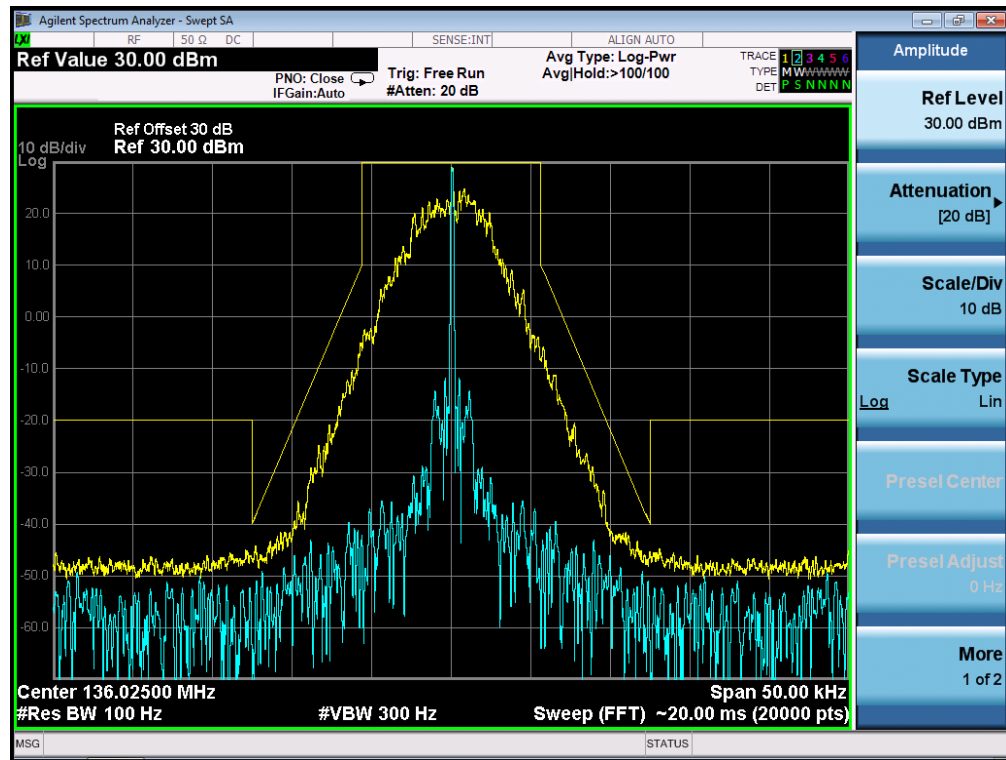

Note: All the test frequencies had been tested, but only the worst data was recorded.

9. MODULATION CHARACTERISTICS

9.1 PROVISIONS APPLICABLE

According to CFR 47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

9.2 MEASUREMENT METHOD

9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from -20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

9.2.2 Audio Frequency Response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0 dB).
- (3). Vary the Audio frequency from 100 Hz to 10 KHz and record the frequency deviation.
- (4). Audio Frequency Response = $20\log_{10}(\text{Deviation of test frequency}/\text{Deviation of 1 KHz reference})$.

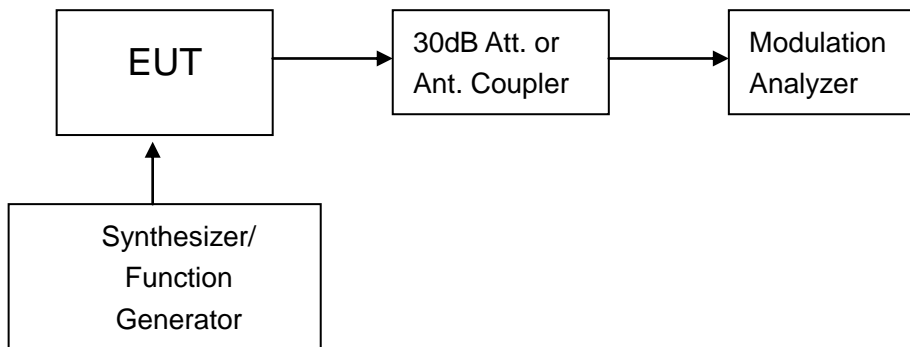


Figure 1: Modulation characteristic measurement configuration

9.3 MEASUREMENT RESULT


Analog:

TEST RESULTS—5W

(A). MODULATION LIMIT

Low Channel @ 12.5 KHz Channel Separations

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.26	0.81	0.85	0.91
-15	0.32	0.96	0.97	1.05
-10	0.49	1.25	1.26	1.37
-5	0.52	1.32	1.45	1.48
0	0.63	1.54	1.56	1.62
+5	0.71	1.63	1.73	1.85
+10	0.88	1.72	1.76	1.83
+15	0.94	1.64	1.73	1.76
+20	0.88	1.56	1.65	1.71

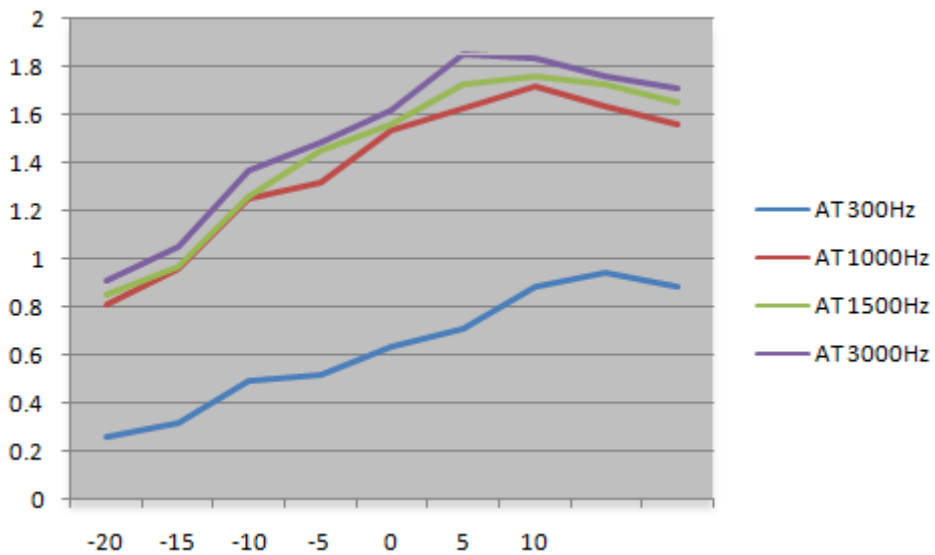


Note: All the modes had been tested, but only the worst data recorded in the report.

(B). AUDIO FREQUENCY RESPONSE:

Low Channel @ 12.5 KHz Channel Separations

Frequency (Hz)	Deviation (KHz)	Audio Frequency Response(dB)
100	--	--
200	--	--
300	0.11	-13.15
400	0.18	-8.87
500	0.26	-5.68
600	0.25	-6.02
700	0.33	-3.61
800	0.36	-2.85
900	0.42	-1.51
1000	0.55	0.83
1200	0.62	1.87
1400	0.63	2.01
1600	0.74	3.41
1800	0.93	5.39
2000	0.97	5.76
2400	1.22	7.75
2500	1.44	9.19
2800	1.72	10.73
3000	1.73	10.78
3200	1.70	10.63
3600	1.55	9.83
4000	1.01	6.11
4500	0.85	4.61
5000	0.74	3.41
5500	0.56	0.98
6000	0.15	-10.46
6500	0.11	-13.15
7000	0.04	-21.94
7500	0.01	-33.98
9000	--	--
10000	--	--
14000	--	--
18000	--	--
20000	--	--
30000	--	--

Frequency Response of Low Channel **12.5 KHz Channel Separations**

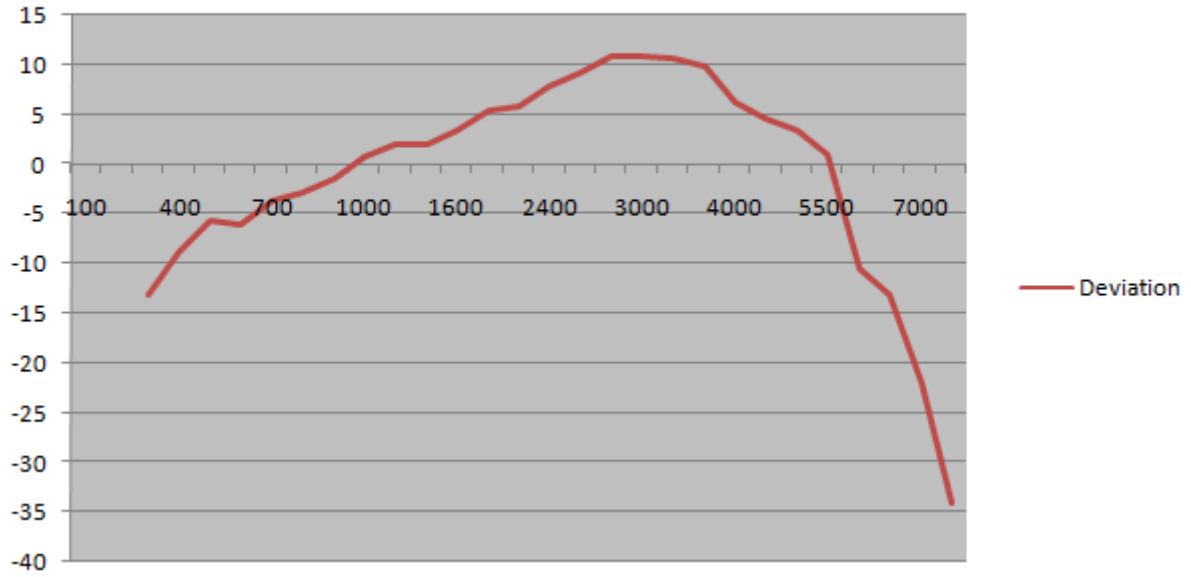


Note: All the modes had been tested, but only the worst data recorded in the report.

TEST RESULTS—1W
(A). MODULATION LIMIT

Low Channel @ 12.5 KHz Channel Separations

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.21	0.79	0.82	0.89
-15	0.31	0.89	0.95	1.03
-10	0.45	1.22	1.23	1.29
-5	0.51	1.29	1.42	1.46
0	0.59	1.39	1.53	1.64
+5	0.71	1.49	1.72	1.84
+10	0.82	1.65	1.75	1.85
+15	0.91	1.62	1.72	1.75
+20	0.86	1.53	1.61	1.69

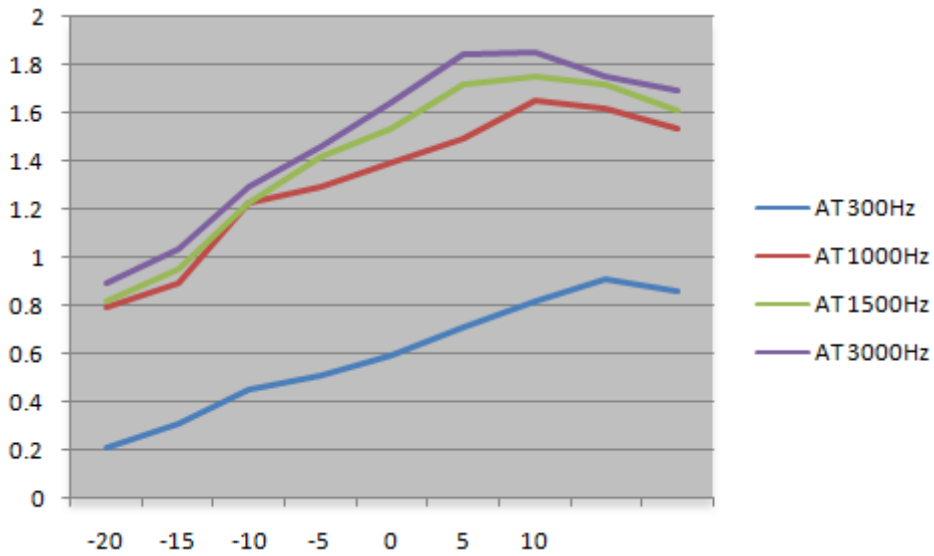

Note: All the modes had been tested, but only the worst data recorded in the report.


(B). AUDIO FREQUENCY RESPONSE:

Low Channel @ 12.5 KHz Channel Separations

Frequency (Hz)	Deviation (KHz)	Audio Frequency Response(dB)
100	--	--
200	--	--
300	0.09	-14.89
400	0.12	-12.40
500	0.21	-7.54
600	0.25	-6.02
700	0.31	-4.15
800	0.34	-3.35
900	0.39	-2.16
1000	0.42	-1.51
1200	0.51	0.17
1400	0.64	2.14
1600	0.72	3.17
1800	0.84	4.51
2000	0.92	5.30
2400	1.16	7.31
2500	1.43	9.13
2800	1.52	9.66
3000	1.71	10.68
3200	1.75	10.88
3600	1.44	9.19
4000	1.01	6.11
4500	0.86	4.71
5000	0.72	3.17
5500	0.45	-0.92
6000	0.16	-9.90
6500	0.03	-24.44
7000	0.02	-27.96
7500	0.01	-33.98
9000	--	--
10000	--	--
14000	--	--
18000	--	--
20000	--	--
30000	--	--

Frequency Response of Low Channel

12.5 KHz Channel Separations

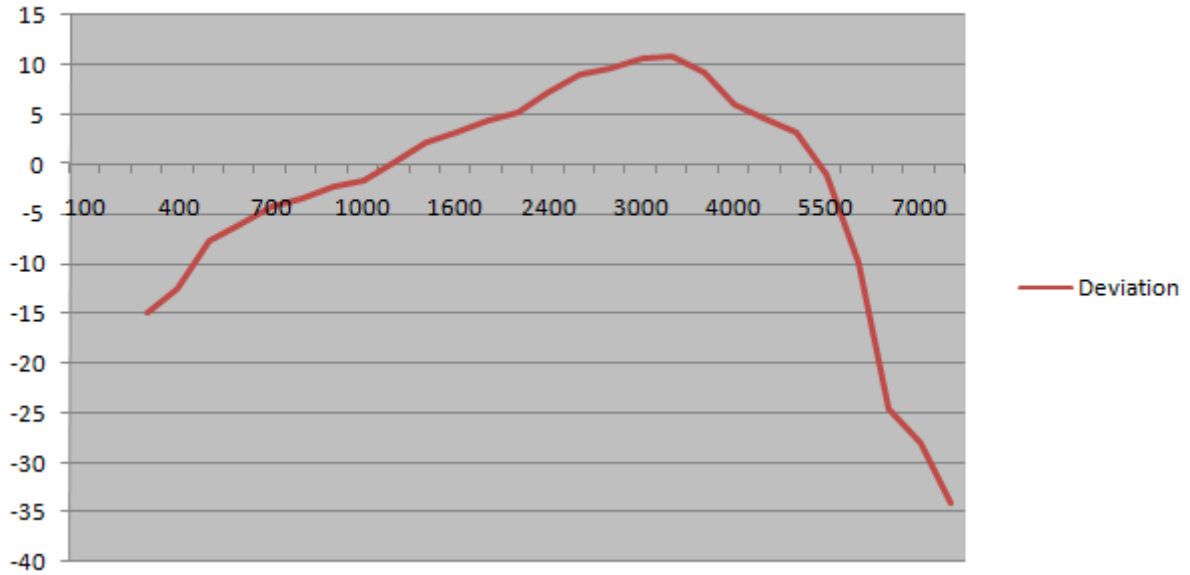

Note: All the modes had been tested, but only the worst data recorded in the report.


Digital:

TEST RESULTS—5W

(A). MODULATION LIMIT:

Low Channel @ 12.5 KHz Channel Separations

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.25	0.83	0.88	0.98
1	0.34	0.91	1.02	1.04
-10	0.63	1.15	1.26	1.36
-5	0.59	1.37	1.43	1.41
0	0.65	1.55	1.63	1.69
+5	0.72	1.63	1.75	1.87
+10	0.80	1.73	1.84	1.93
+15	0.78	1.65	1.75	1.83
+20	0.72	1.56	1.62	1.72

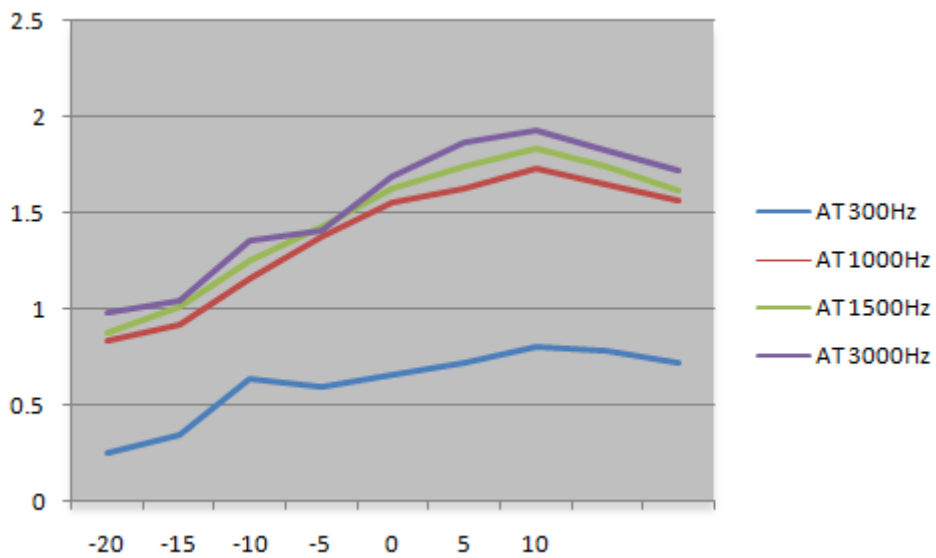


Note: All the modes had been tested, but only the worst data recorded in the report.

(B). AUDIO FREQUENCY RESPONSE:

Low Channel @ 12.5 KHz Channel Separations

Frequency (Hz)	Deviation (KHz)	Audio Frequency Response(dB)
100	--	--
200	--	--
300	0.13	-11.70
400	0.21	-7.54
500	0.25	-6.02
600	0.32	-3.88
700	0.36	-2.85
800	0.35	-3.10
900	0.43	-1.31
1000	0.55	0.83
1200	0.61	1.73
1400	0.66	2.41
1600	0.74	3.41
1800	0.98	5.85
2000	0.94	5.48
2400	1.25	7.96
2500	1.46	9.31
2800	1.64	10.32
3000	1.77	10.98
3200	1.72	10.73
3600	1.54	9.77
4000	1.06	6.53
4500	0.81	4.19
5000	0.75	3.52
5500	0.54	0.67
6000	0.13	-11.70
6500	0.11	-13.15
7000	0.04	-21.94
7500	0.01	-33.98
9000	--	--
10000	--	--
14000	--	--
18000	--	--
20000	--	--
30000	--	--

Frequency Response of Low Channel Channel
12.5 KHz Channel Separations

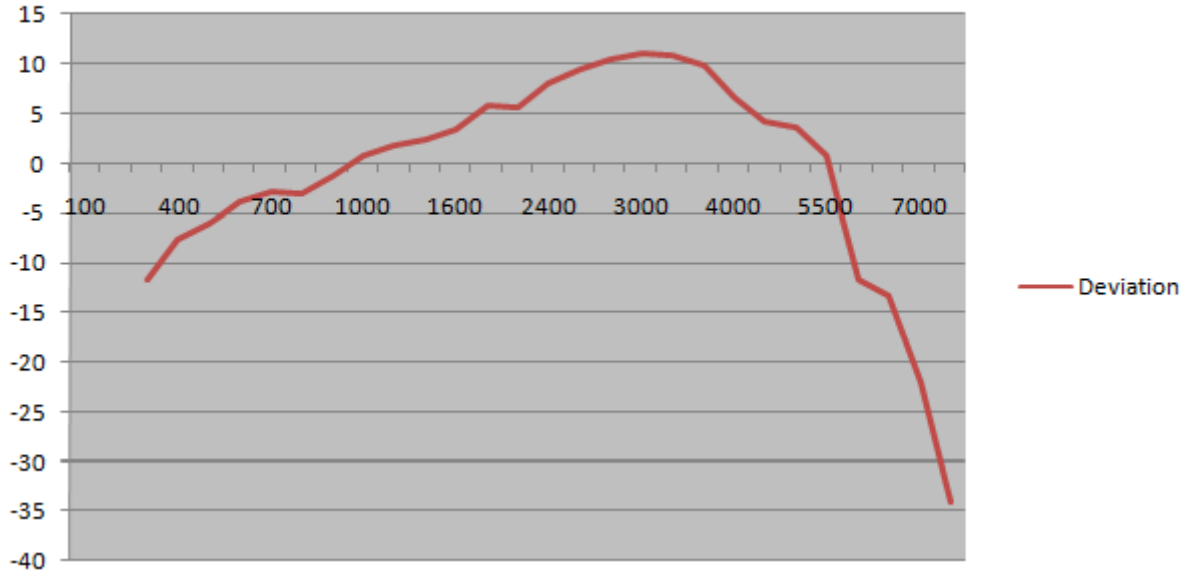


Note: All the modes had been tested, but only the worst data recorded in the report.

TEST RESULTS—1W

(A). MODULATION LIMIT:

Low Channel @ 12.5 KHz Channel Separations

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.19	0.55	0.71	0.91
1	0.28	0.74	0.84	1.05
-10	0.31	1.06	1.16	1.17
-5	0.42	1.15	1.25	1.36
0	0.52	1.38	1.51	1.55
+5	0.74	1.66	1.68	1.77
+10	0.86	1.71	1.76	1.86
+15	0.85	1.66	1.82	1.95
+20	0.96	1.54	1.68	1.92

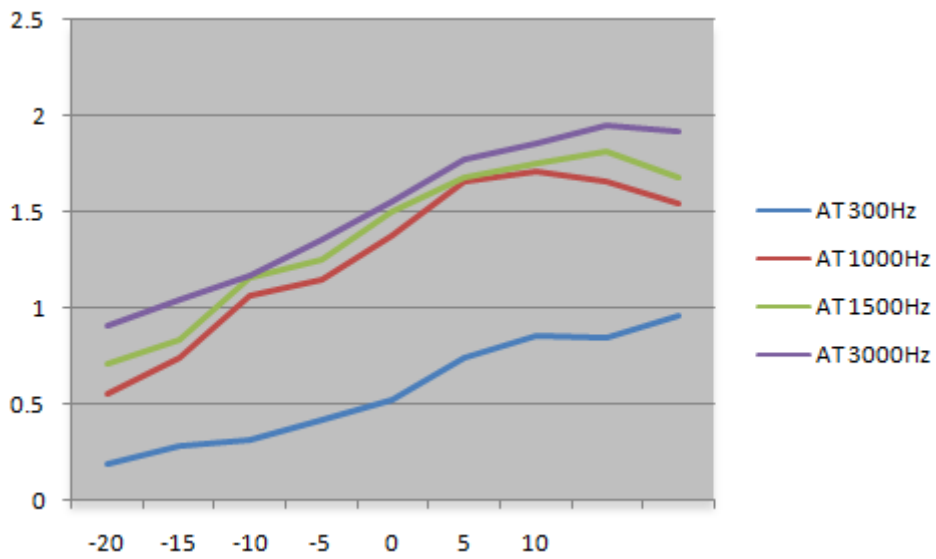

Note: All the modes had been tested, but only the worst data recorded in the report.


(B). AUDIO FREQUENCY RESPONSE:

low Channel @ 12.5 KHz Channel Separations

Frequency (Hz)	Deviation (KHz)	Audio Frequency Response(dB)
100	--	--
200	--	--
300	0.09	-14.89
400	0.16	-9.90
500	0.23	-6.74
600	0.25	-6.02
700	0.32	-3.88
800	0.36	-2.85
900	0.45	-0.92
1000	0.47	-0.54
1200	0.56	0.98
1400	0.65	2.28
1600	0.76	3.64
1800	0.88	4.91
2000	0.96	5.67
2400	1.15	7.23
2500	1.46	9.31
2800	1.55	9.83
3000	1.73	10.78
3200	1.82	11.22
3600	1.45	9.25
4000	1.01	6.11
4500	0.85	4.61
5000	0.66	2.41
5500	0.44	-1.11
6000	0.15	-10.46
6500	0.05	-20.00
7000	0.02	-27.96
7500	0.01	-33.98
9000	--	--
10000	--	--
14000	--	--
18000	--	--
20000	--	--
30000	--	--

Frequency Response of low Channel

12.5 KHz Channel Separations

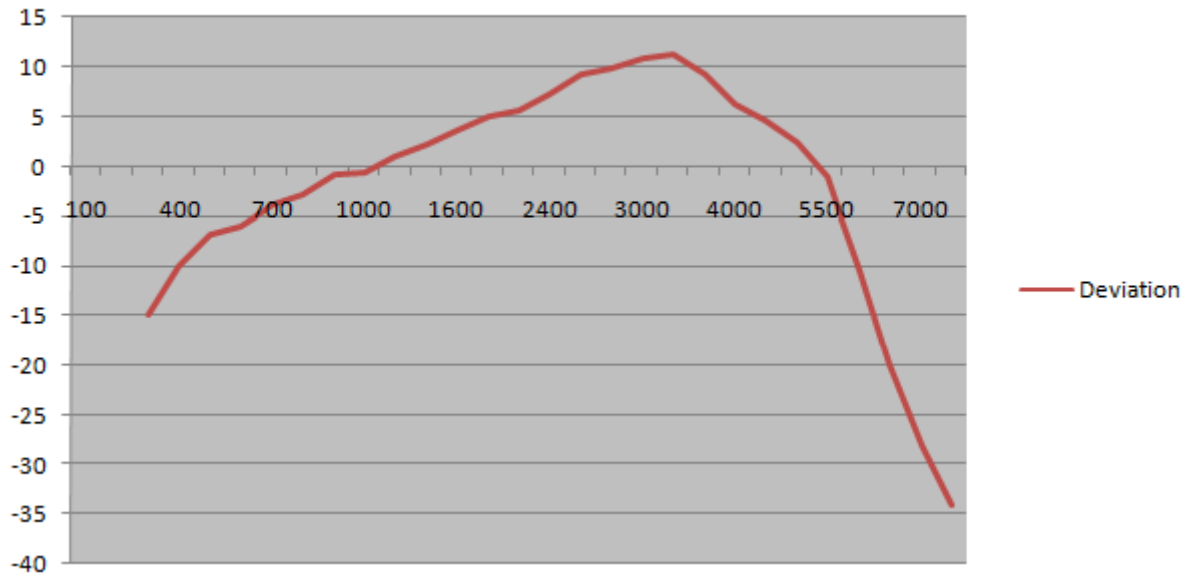

Note: All the modes had been tested, but only the worst data recorded in the report.

10. MAXIMUM TRANSMITTER POWER

10.1 PROVISIONS APPLICABLE


Per FCC §2.1046 § 22.565 and §90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area.

10.2 TEST PROCEDURE


The RF output of Two-way Radio was conducted to a spectrum analyzer through an appropriate attenuator.


10.3 TEST CONFIGURATION

Conducted Output Power:


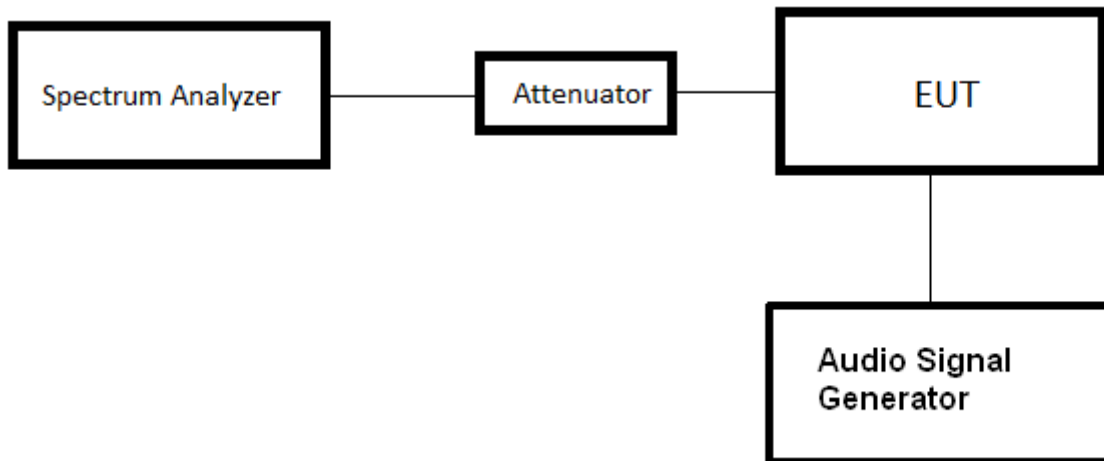


Effective Radiated Power :

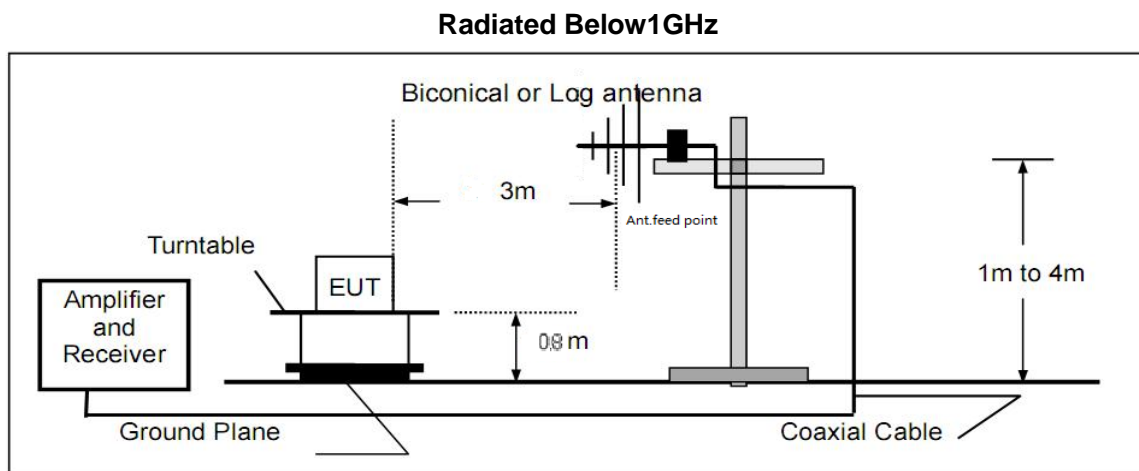

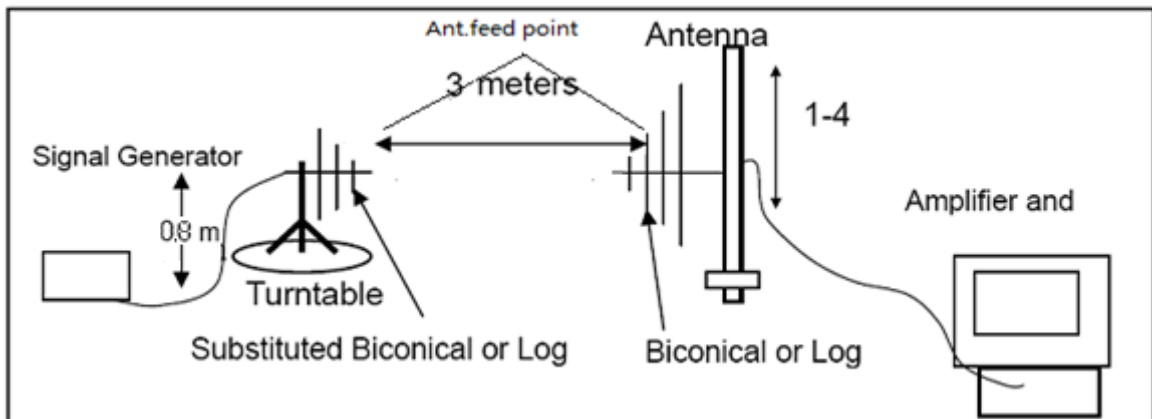

Radiated Above 1 GHz

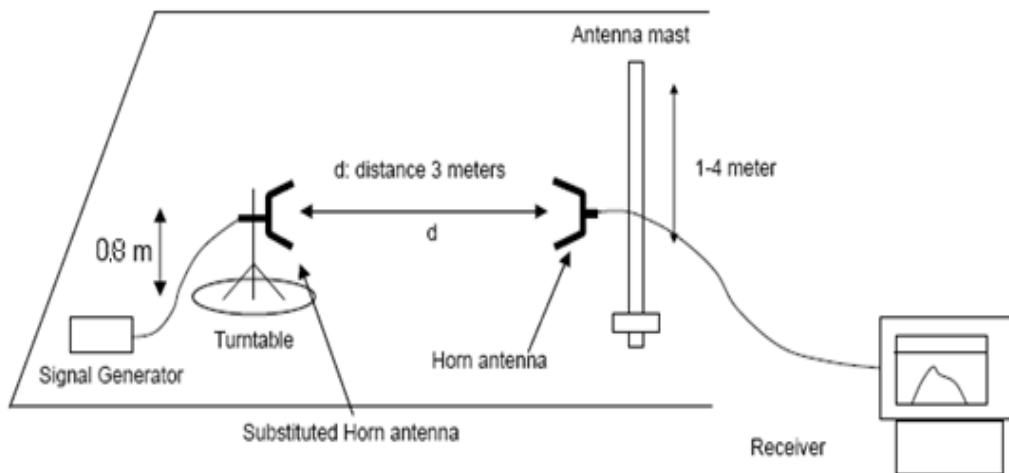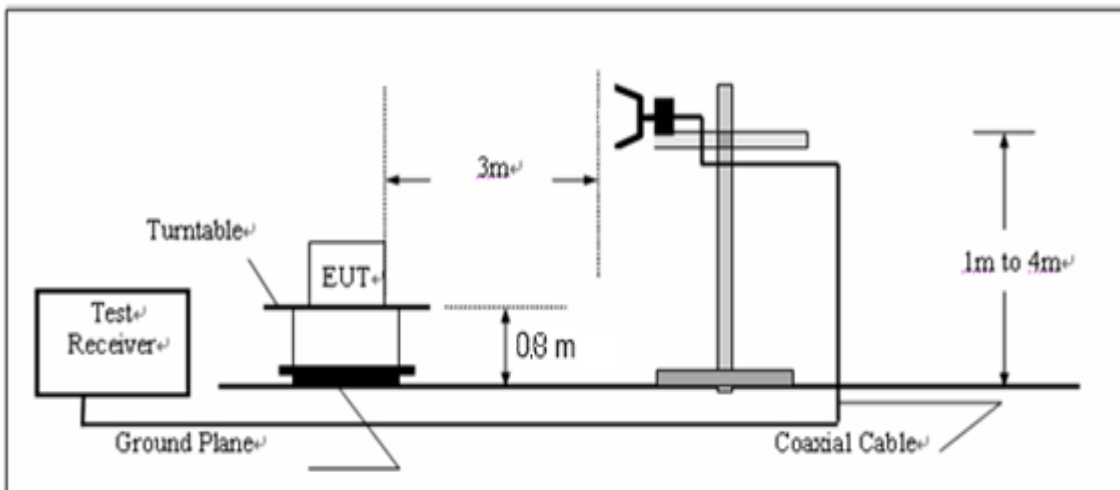

10.4 TEST RESULT

The maximum Conducted Power (CP) is

Analog: 5W/1 W for 12.5 KHz Channel Separation

Digital: 5W/1 W for 12.5 KHz Channel Separation

Calculation Formula: $CP = R + A + L$

* Note:

CP: The final Conducted Power

R : The reading value from spectrum analyzer

A : The attenuation value of the used attenuator

L : The loss of all connection cables

Analog:

Conducted Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 36.99dBm(5W)
12.5 KHz	Bottom(136.025MHz)	36.92
	Middle(151.850MHz)	36.85
	Middle(155.025MHz)	36.82
	Middle(161.610MHz)	36.77
	Top (173.975MHz)	36.79

Radiated Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 36.99dBm(5W)
12.5 KHz	Bottom(136.025MHz)	36.88
	Middle(151.850MHz)	36.84
	Middle(155.025MHz)	36.86
	Middle(161.610MHz)	36.82
	Top (173.975MHz)	36.78

Conducted Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 30dBm(1W)
12.5 KHz	Bottom(136.025MHz)	29.90
	Middle(151.850MHz)	29.83
	Middle(155.025MHz)	29.79
	Middle(161.610MHz)	29.51
	Top (173.975MHz)	29.88

Radiated Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 30dBm(1W)
12.5 KHz	Bottom(136.025MHz)	29.83
	Middle(151.850MHz)	29.78
	Middle(155.025MHz)	29.81
	Middle(161.610MHz)	29.75
	Top (173.975MHz)	29.87

Digital:

Date + voice:

Conducted Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 36.99dBm(5W)
12.5 KHz	Bottom(136.025MHz)	36.79
	Middle(151.850MHz)	36.87
	Middle(155.025MHz)	36.89
	Middle(161.610MHz)	36.79
	Top (173.975MHz)	36.76

Radiated Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 36.99dBm(5W)
12.5 KHz	Bottom(136.025MHz)	36.83
	Middle(151.850MHz)	36.85
	Middle(155.025MHz)	36.76
	Middle(161.610MHz)	36.82
	Top (173.975MHz)	36.74

Date transmission mode:

Conducted Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 36.99dBm(5W)
12.5 KHz	Bottom(136.025MHz)	36.83
	Middle(151.850MHz)	36.78
	Middle(155.025MHz)	36.77
	Middle(161.610MHz)	36.81
	Top (173.975MHz)	36.75

Radiated Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 36.99dBm(5W)
12.5 KHz	Bottom(136.025MHz)	36.84
	Middle(151.850MHz)	36.82
	Middle(155.025MHz)	36.78
	Middle(161.610MHz)	36.82
	Top (173.975MHz)	36.83

Date + voice:

Conducted Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 30dBm(1W)
12.5 KHz	Bottom(136.025MHz)	29.84
	Middle(151.850MHz)	29.78
	Middle(155.025MHz)	29.86
	Middle(161.610MHz)	29.76
	Top (173.975MHz)	29.83


Radiated Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 30dBm(1W)
12.5 KHz	Bottom(136.025MHz)	29.85
	Middle(151.850MHz)	29.81
	Middle(155.025MHz)	29.94
	Middle(161.610MHz)	29.76
	Top (173.975MHz)	29.83

Date transmission mode:


Conducted Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 30dBm(1W)
12.5 KHz	Bottom(136.025MHz)	29.79
	Middle(151.850MHz)	29.78
	Middle(155.025MHz)	29.73
	Middle(161.610MHz)	29.81
	Top (173.975MHz)	29.76

Radiated Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 30dBm(1W)
12.5 KHz	Bottom(136.025MHz)	29.81
	Middle(151.850MHz)	29.78
	Middle(155.025MHz)	29.79
	Middle(161.610MHz)	29.75
	Top (173.975MHz)	29.82

Conducted Spurious Emission (worst) @151.850 MHz With 12.5 KHz Channel Separation-1W
 30MHz-1GHz

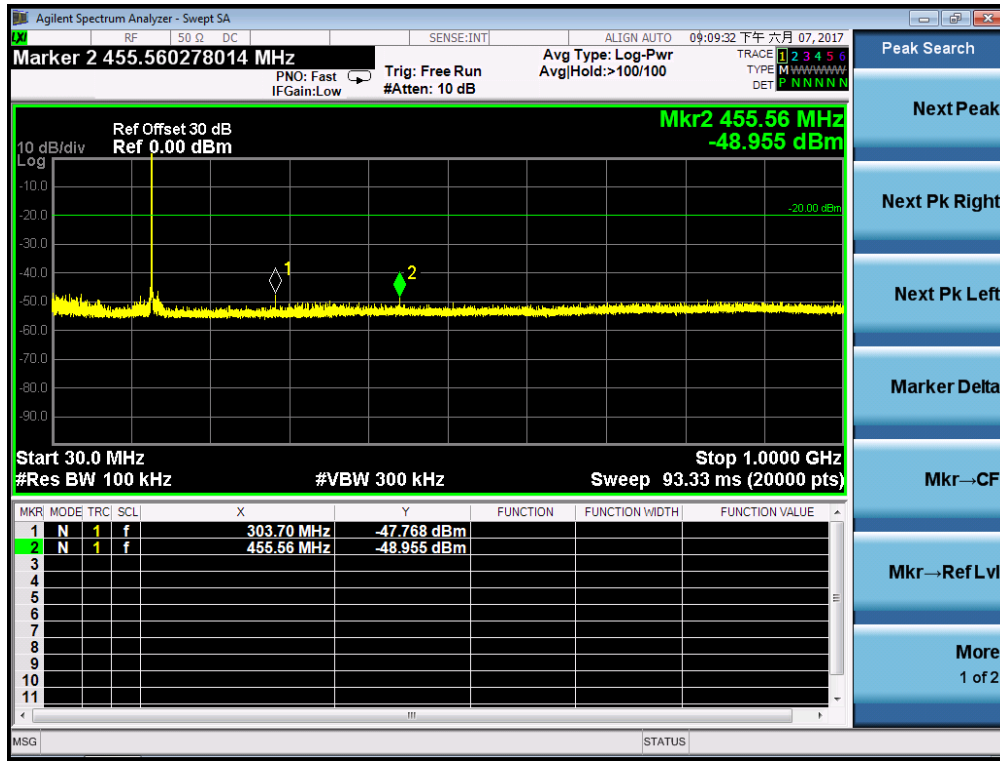


Conduct Spurious Emission (worst) @ 151.850MHz With 12.5 KHz Channel Separation-1W
 1GHz-12.75GHz

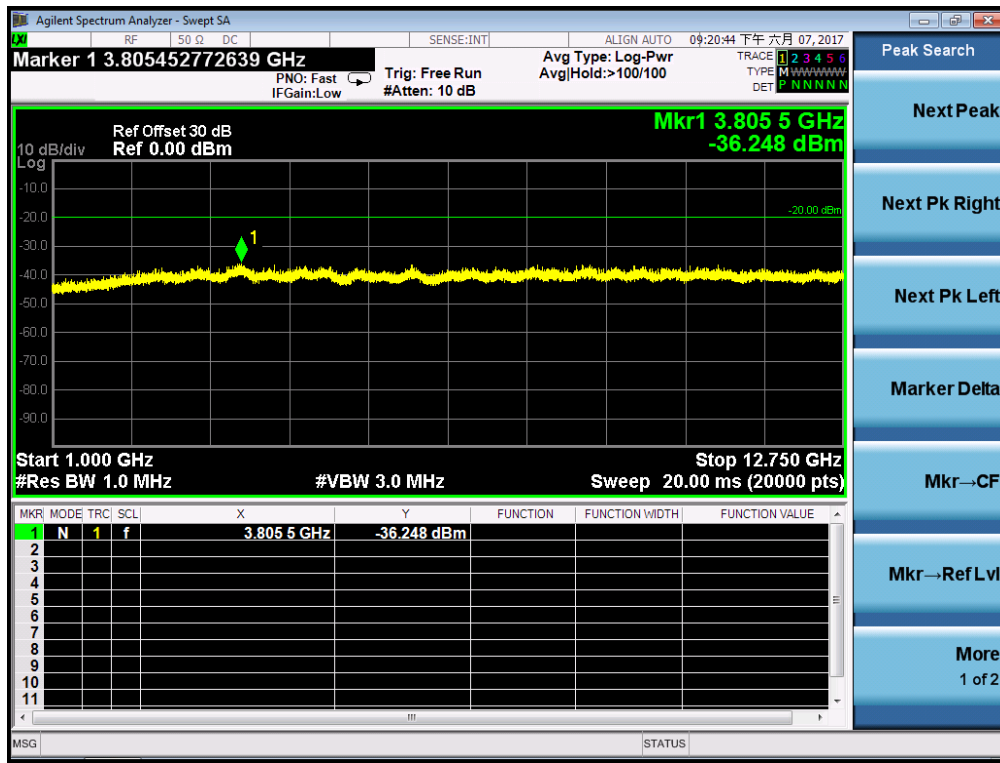


Conducted Spurious Emission (worst) @161.610 MHz With 12.5 KHz Channel Separation-1W


Conducted Spurious Emission (worst) @151.850 MHz With 12.5 KHz Channel Separation-5W
 30MHz-1GHz

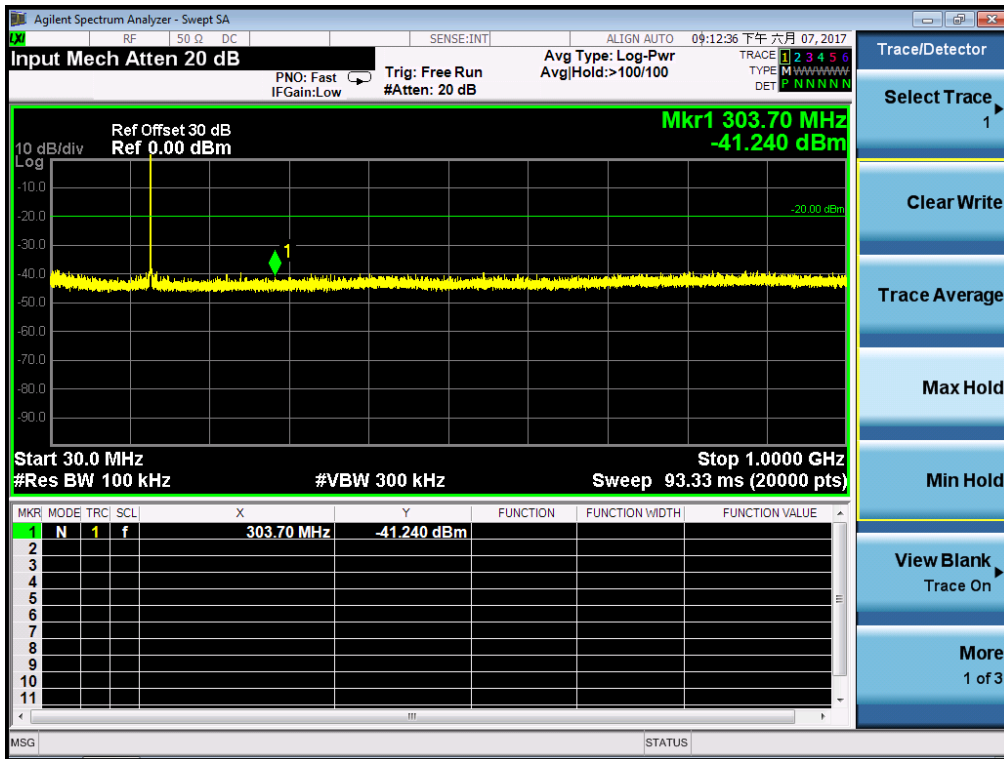


Conduct Spurious Emission (worst) @ 151.850MHz With 12.5 KHz Channel Separation-5W
 1GHz-12.75GHz

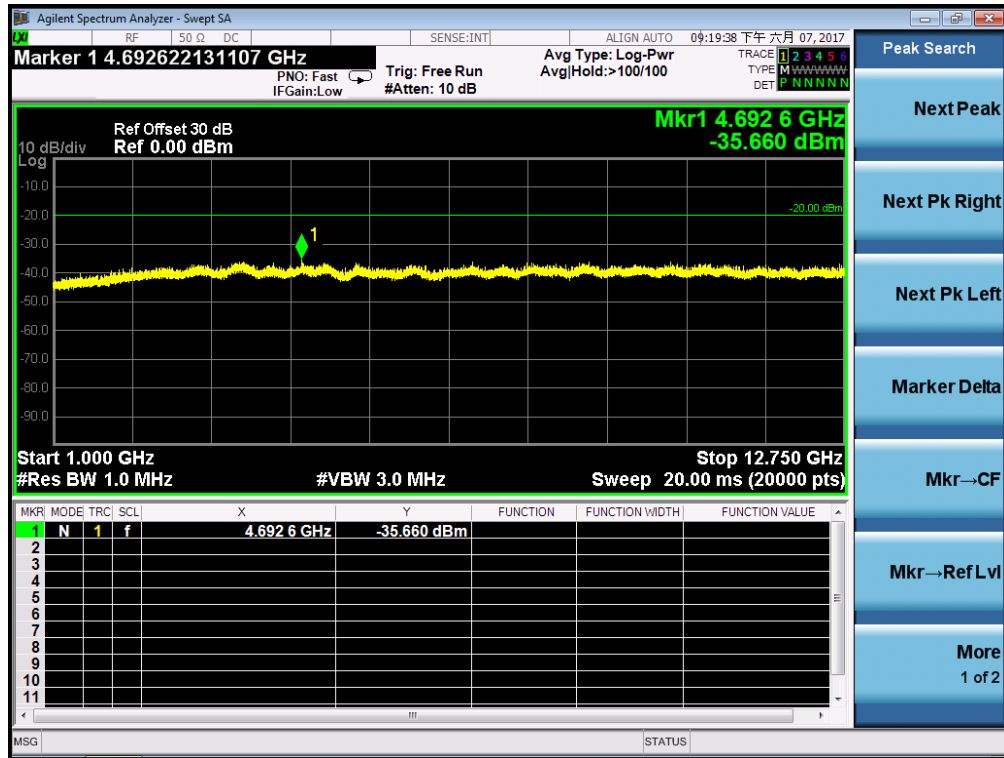

Conducted Spurious Emission (worst) @161.610 MHz With 12.5 KHz Channel Separation-5W
 30MHz-1GHz

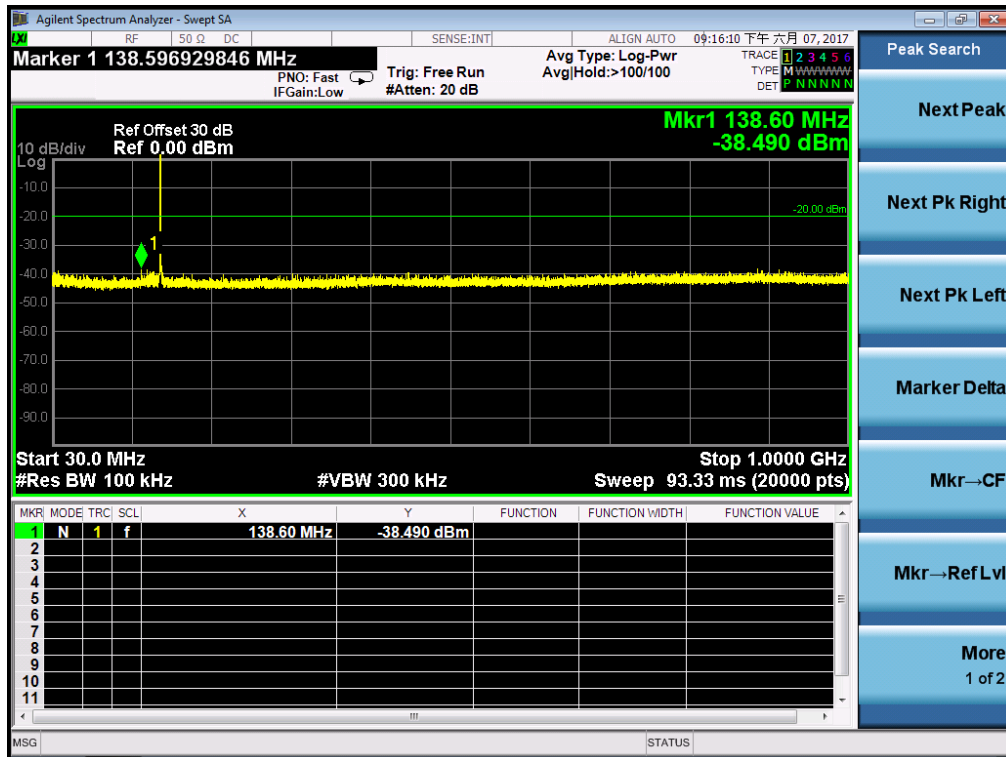

Conduct Spurious Emission (worst) @ 161.610MHz With 12.5 KHz Channel Separation-5W
 1GHz-12.75GHz

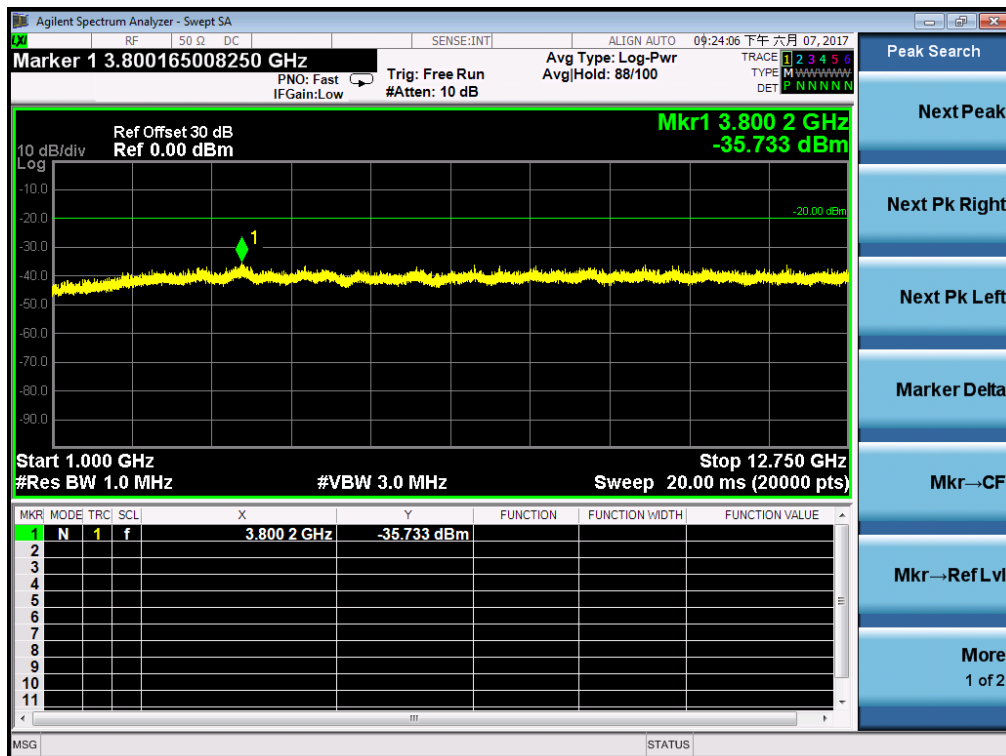

Note: only result the worst case in this part.

11. TRANSMITTER FREQUENCY BEHAVIOR

11.1 PROVISIONS APPLICABLE

Section 90.214

Time intervals ^{1, 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t_1^4	± 25.0 kHz	5.0 ms	10.0 ms
t_2	± 12.5 kHz	20.0 ms	25.0 ms
t_3^4	± 25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t_1^4	± 12.5 kHz	5.0 ms	10.0 ms
t_2	± 6.25 kHz	20.0 ms	25.0 ms
t_3^4	± 12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t_1^4	± 6.25 kHz	5.0 ms	10.0 ms
t_2	± 3.125 kHz	20.0 ms	25.0 ms
t_3^4	± 6.25 kHz	5.0 ms	10.0 ms

¹ t_{on} is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t_1 is the time period immediately following t_{on} .

t_2 is the time period immediately following t_1 .

t_3 is the time period from the instant when the transmitter is turned off until t_{off} .

t_{off} is the instant when the 1 kHz test signal starts to rise.

² During the time from the end of t_2 to the beginning of t_3 , the frequency difference must not exceed the limits specified in §90.213.

³ Difference between the actual transmitter frequency and the assigned transmitter frequency.

⁴ If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

11.2 TEST METHOD

TIA/EIA-603 2.2.19.3

11.3 DESCRIBE LIMIT LINE OF TRANSMITTER FREQUENCY BEHAVIOR


ton: The switch-on instant t_{on} of a transmitter is defined by the condition when the output power, measured at the antenna terminal, exceeds 0,1 % of the full output power (-30 dBc).


t1: period of time starting at t_{on} and finishing according to above 11.1

t2: period of time starting at the end of t_1 and finishing according to above 11.1

toff: switch-off instant defined by the condition when the output power falls below 0,1 % of the full output power (-30 dBc).


t3: period of time that finishing at t_{off} and starting according to above 11.1

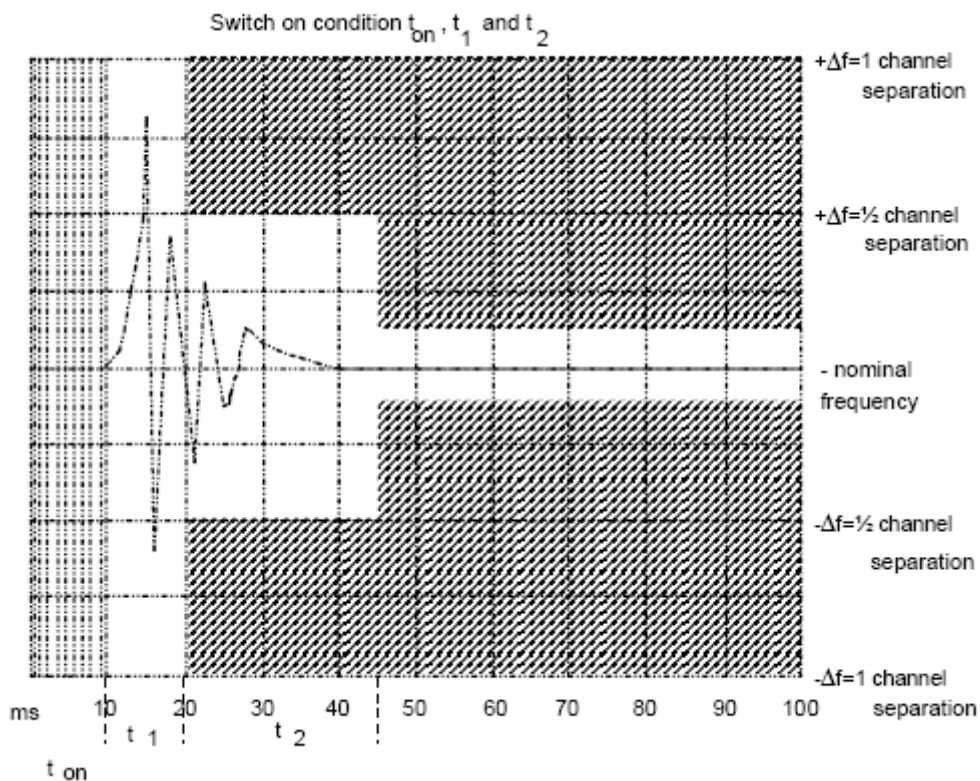

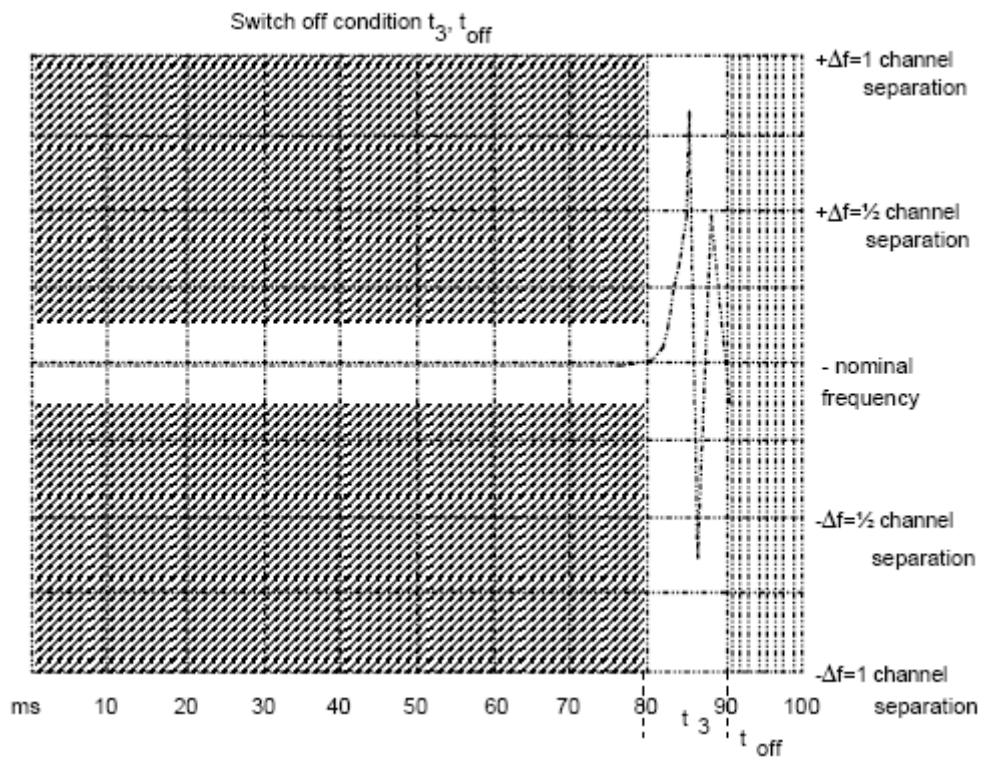


11.4 MEASURE RESULT

Transmitter Frequency Behavior @ 12.5 KHz Channel Separation--Off to On

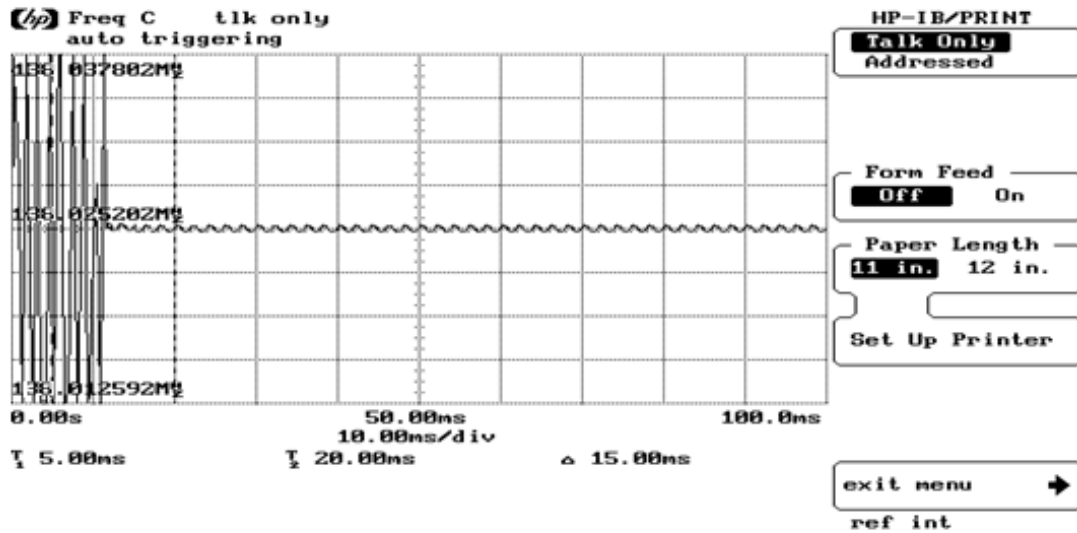

Transmitter Frequency Behavior @ 12.5 KHz Channel Separation--On to Off

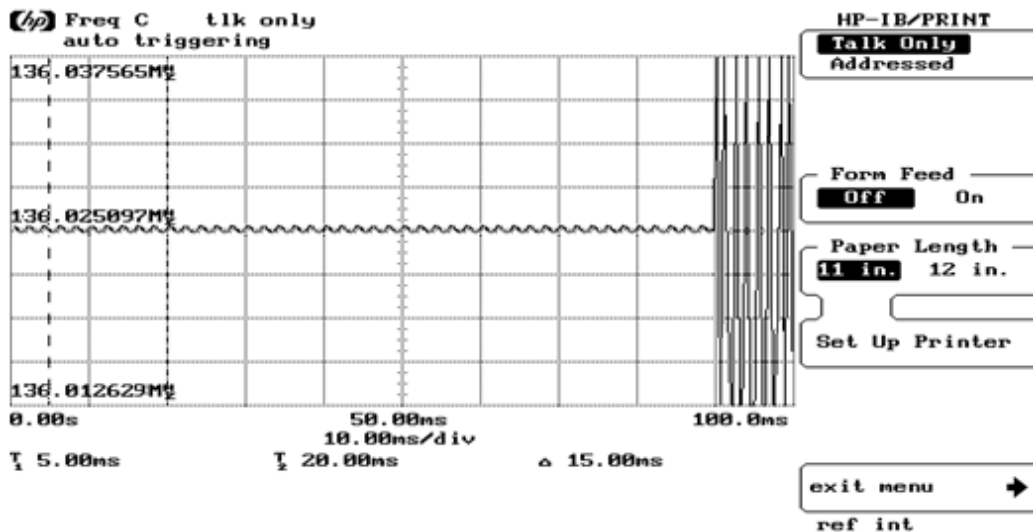

12. AUDIO LOW PASS FILTER RESPONSE

12.1 LIMITS

2.1047(a): Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

90.242(b)(8): Recommended audio filter attenuation characteristics are given below:

Audio band	Minimum Attenuation Rel. to 1 KHz Attenuation
3 – 20 KHz 20 – 30 KHz	$60 \log_{10}(f/3)$ dB where f is in KHz 50dB

12.2. METHOD OF MEASUREMENTS


The rated audio input signal was applied to the input of the audio low-pass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT Digital Spectrum Analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 KHz.

12.3 TEST DATA

12.5 KHZ CHANNEL SPACING, F3E, FREQUENCY OF ALL MODULATION STATES R VHF)

Frequency	Audio In	Audio out	Attenuation	Attenuation	Recommended
(KHz)	(dBV)	(dBV)	(Out_In)	Rel.to 3 KHz	Attenuation
			dB	(dB)	(dB)
0.1	-76.15	-31.19	46.38	-36.52	
0.2	-76.15	-17.36	58.24	-25.61	
0.4	-76.15	-6.25	71.63	-12.82	
0.6	-76.15	0.43	74.22	-6.41	
0.8	-76.15	4.15	78.93	-2.91	
1.0	-76.15	7.14	83.61	-0.02	
1.5	-76.15	8.26	84.86	2.15	
2.0	-76.15	8.94	85.32	1.5	
2.5	-76.15	7.56	83.85	0.66	
3.0	-76.15	6.22	82.51	-1.83	0
3.5	-76.15	2.67	78.44	-4.94	-5
4.0	-76.15	-2.31	74.64	-9.41	-7
4.5	-76.15	-9.22	68.22	-16.5	-13
5.0	-76.15	-15.1	60.63	-21.72	-14
6.0	-76.15	-21.24	54.14	-28.61	-17
7.0	-76.15	-31.63	46.23	-36.45	-21
8.0	-76.15	-39.22	37.95	-47.64	-26
9.0	-76.15	-61.94	15.14	-66.86	-27
10.0	-76.15	-61.94	15.14	-66.42	-30
12.0	-76.15	-61.94	15.14	-66.42	-36
14.0	-76.15	-61.94	15.14	-66.42	-41
16.0	-76.15	-61.94	15.14	-66.42	-43
18.0	-76.15	-61.94	15.14	-66.42	-46
20.0	-76.15	-61.94	15.14	-66.42	-47
25.0	-76.15	-61.94	15.14	-66.42	-48
30.0	-76.15	-61.94	15.14	-66.42	-48
35.0	-76.15	-61.94	15.14	-66.42	-48
40.0	-76.15	-61.94	15.14	-66.42	-48
45.0	-76.15	-61.94	15.14	-66.42	-48
50.0	-76.15	-61.94	15.14	-66.42	-48



Note: Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 KHz in comparison with the recommended audio filter attenuation.

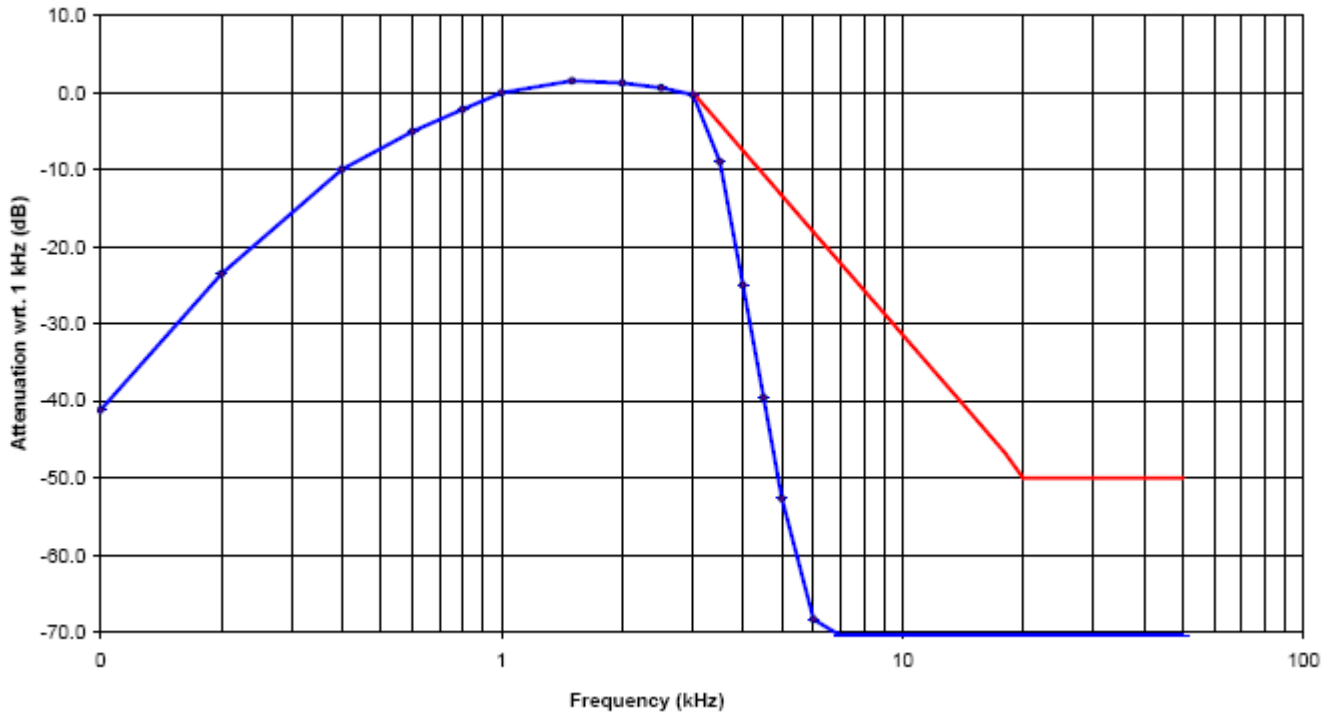

Note: All the UHF and the VHF had been test, but only the worst data recorded in the reported.

APPENDIX I: PHOTOGRAPHS OF SETUP

RADIATED EMISSION TEST SETUP

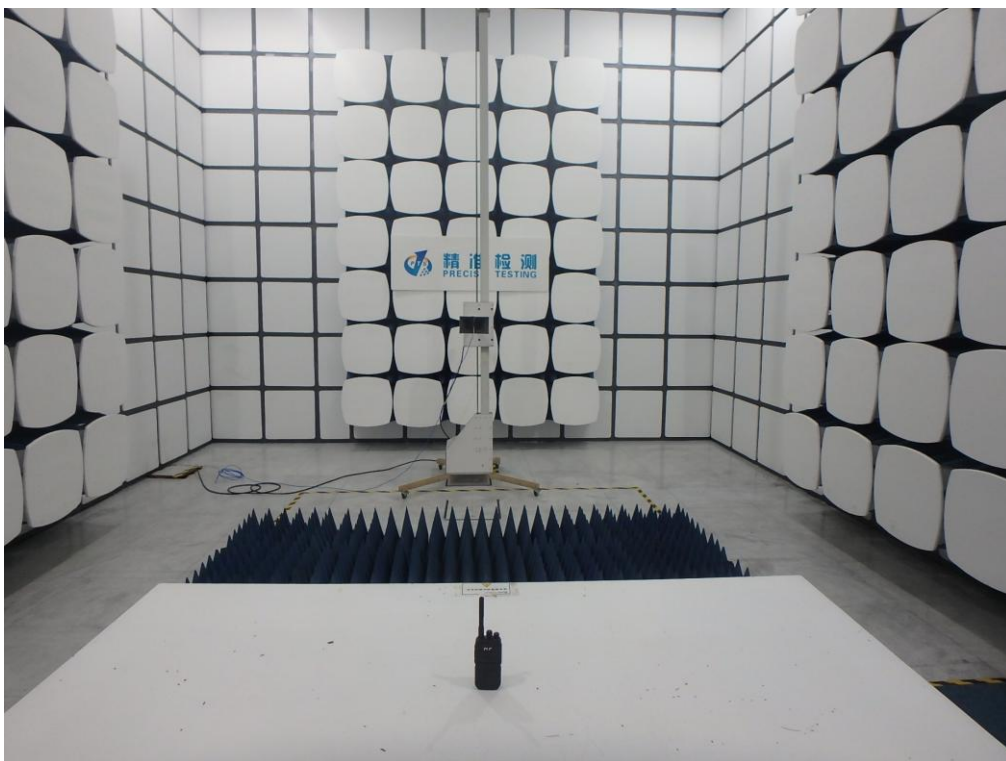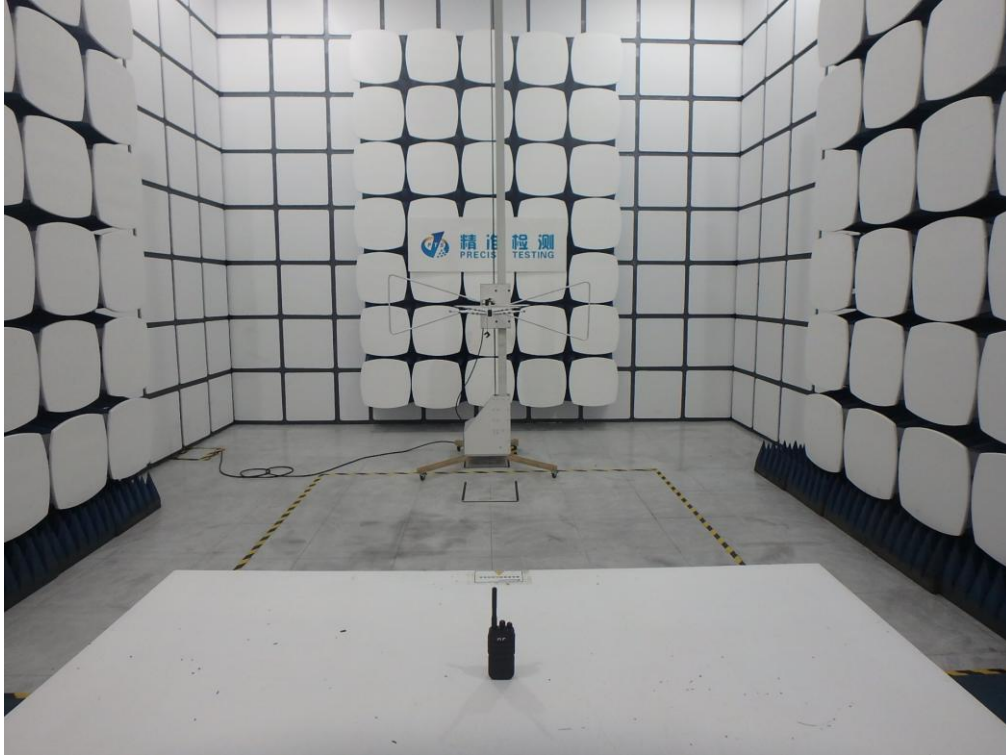

APPENDIX II: EXTERNAL VIEW OF EUT

ALL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT



THE LABEL OF POWER ADAPTER MARKETED




OPEN VIEW OF EUT-1




OPEN VIEW OF EUT-2



INTERNAL VIEW OF EUT-1

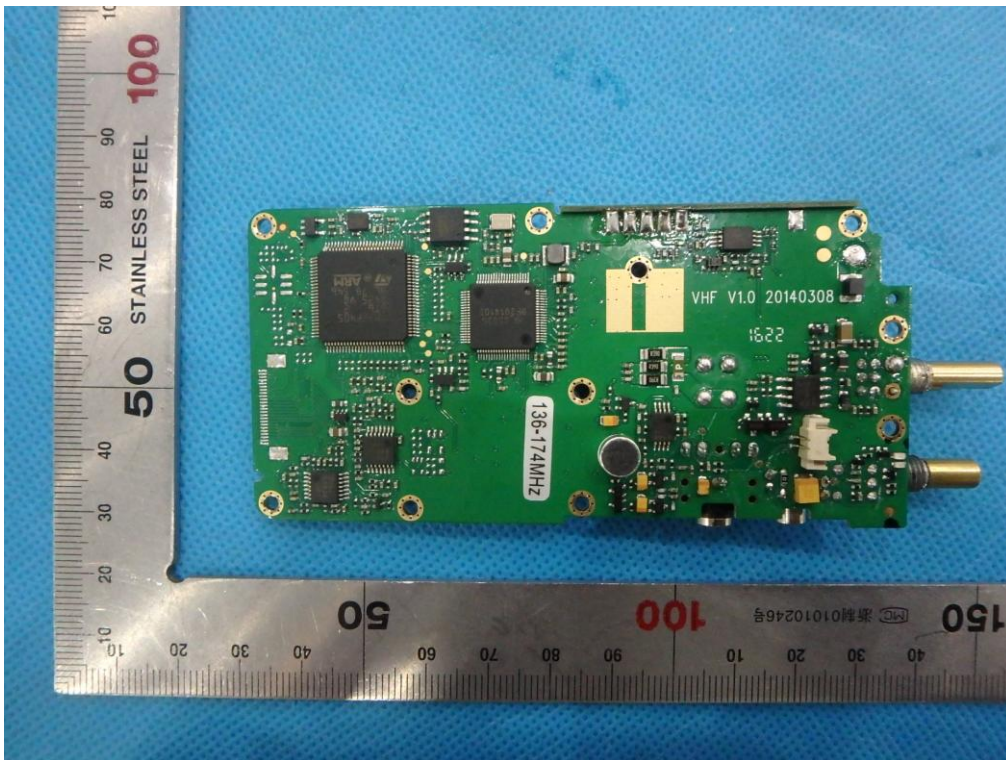

INTERNAL VIEW OF EUT-2

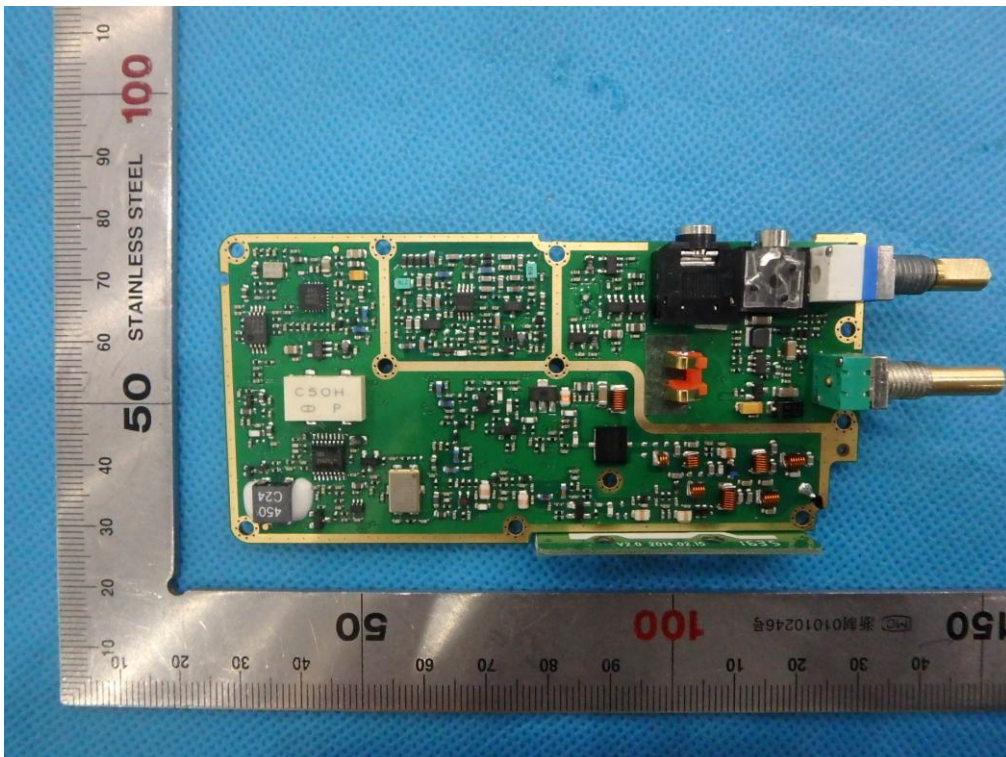

----END OF REPORT----