

WCD	MA 1900_RMC 12.2kps	MCH	WCD	MA 1900_RMC 12.2kps	МСН
Spectrum Analyzer 1 Swept SA KEYSIGHT Input: RF RL Align: Auto Freq Re	ons: Off Preamp: Off Gate: Off Avg Hold: 20/100 N f: Int (S) IE Gain: Low Trig: Erop Run	2 3 4 5 6 KE	ept SA	t(S) IE Gain: Low Trig: Free Run	3 4 5 6 w w w w
1 Spectrum	Sig Track. Off A Ref Lvi Offset 15.26 dB Ref Level 30.00 dBm	Mkr1 10.702 4 GHz 1s		Sig Track: Off A A Ref Lvi Offset 14.99 dB Ref Level 30.00 dBm	A A A A Mkr1 18.968 8 GHz -32.13 dBm
20.0		20			
0.00		0.0			
-10.0		-10 -20			UL1-13.00 dBm
-30.0 -40.0			1.0 1.0 <mark>Vid in die der kentel als die uit vid die besterne die die die die die die die die die di</mark>	terreter fielding of the Ampleon statistic products and the second statistical statistics and the second statistics a	alasina ang tiga ndisi na tanàng tina dala dan aliyakini dina di Alasina ang tiga ndisi na tanàng tina dala dan aliyakini dina di
-50.0					
Start 7.000 GHz #Res BW 1.0 MHz	#Video BW 3.0 MHz*	Sweep ~12.6 ms (6800 pts) #Re	rt 13.600 GHz es BW 1.0 MHz	#Video BW 3.0 MHz*	Stop 20.000 GHz Sweep ~13.1 ms (6400 pts)
), 2021 55 PM				
WCD	MA 1900_RMC 12.2kps	_HCH	WCD	MA 1900_RMC 12.2kps	_HCH
	Đ	Sw	ectrum Analyzer 1 +		
KEYSIGHT Input RF Input Z: R L Coupling: DC Correcti Align: Auto Freq Re	ons:Off Preamp:Off Gate:Off Avg Hold:>100/100 f:Int (S) IF Gain:Low Trig:Free Run		Align: Auto Freq Ref: In	t(S) IF Gain: Low Trig: Free Run	A A A A
1 Spectrum Scale/Div 10 dB Log	Ref Lvi Offset 14.63 dB Ref Level 30.00 dBm		ale/Div 10 dB	Ref Lvi Offset 18.77 dB Ref Level 30.00 dBm	Mkr2 6.072 8 GHz -19.90 dBm
20.0		20	1.0		
0.00		0.0	00 I.0		UL1 -13 UV d8m
-20.0 -30.0			10 10 <mark>on state bit with the state of state of the state </mark>	an de serve proventie de la contra contra de la desta de la desta de la contra de la contra de la contra de la c	
-40.0 hylayktrony, and well all constants and a second sec	มากสหร่างการการการการการการการการการการการการการก	พระมีสุดการจะสำนักที่จะสามารถสายเป็นสูงไม่สีของร -50			
-60.0	#Video BW 3.0 MHz*	Stop 1.0000 GHz Sta	10	#Video BW 3.0 MHz*	Stop 7.000 GHz
Start 0.0300 GHz #Res BW 1.0 MHz	2. 2021 🗩 🛆	Sweep ~1.40 ms (1000 pts) #R	nt 1.000 GHz es BW 1.0 MHz C C 19, 2 9:40:32 f		Sweep ~11.4 ms (6200 pts)
WCD	MA 1900_RMC 12.2kps	НСН	WCD	MA 1900_RMC 12.2kps	НСН
Swept SA KEYSIGHT Input RF Input Z:	ons:Off Preamp:Off Gate:Off Avg Hold:20/100 f:Int (S) IF Gain:Low Trig:Free Run	2 3 4 5 6 KE	EYSIGHT Input: RF Coupling: DC Align: Auto	t(S) IF Gain: Low Trig: Free Run	3 4 5 6 www.w
1 Spectrum Scale/Div 10 dB	Sig Track: Off P Ref Lvi Offset 15.26 dB Ref Level 30.00 dBm	Mkr1 10.502 4 GHz 1s -33.19 dBm set	ipoctrum v ale/Div 10 dB	Sig Track: Off A A Ref Lvi Offset 14.99 dB Ref Level 30.00 dBm	A A A A Mkr1 18.946 8 GHz -30.83 dBm
20.0		20			
0.00		0.0			
-20.0		-10 -20			0L1-13-00 alem
-300 -40.0 distance (see distance) -40.0		-30 A Mithile And Andread A that a survey of the start and the An -40	1.0 Mariji Marija potra Marija ile nativi Manusia podri 1.0	nen e dela della presenta della della della della presenta della della presenta della della della della della d	nin men fan en eksene en skillen fan en en fan eksene en fan fan en eksene eksene eksene fan eksene eksene eks
-60.0		-50			
Start 7.000 GHz #Res BW 1.0 MHz	#Video BW 3.0 MHz*		urt 13.600 GHz es BW 1.0 MHz う	#Video BW 3.0 MHz*	Stop 20.000 GHz Sweep ~13.1 ms (6400 pts)
9:40:	39 PM 💬 👝		9:40:50		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written approver, and the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuerce of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.


 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



Report No.: AGC02931211001FE03 Page 39 of 57

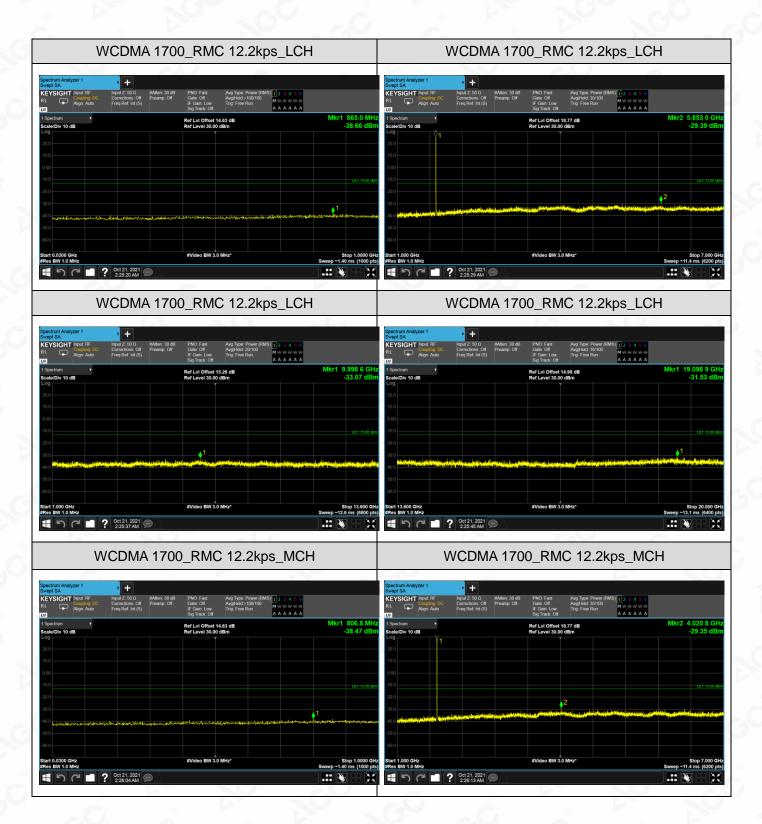


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



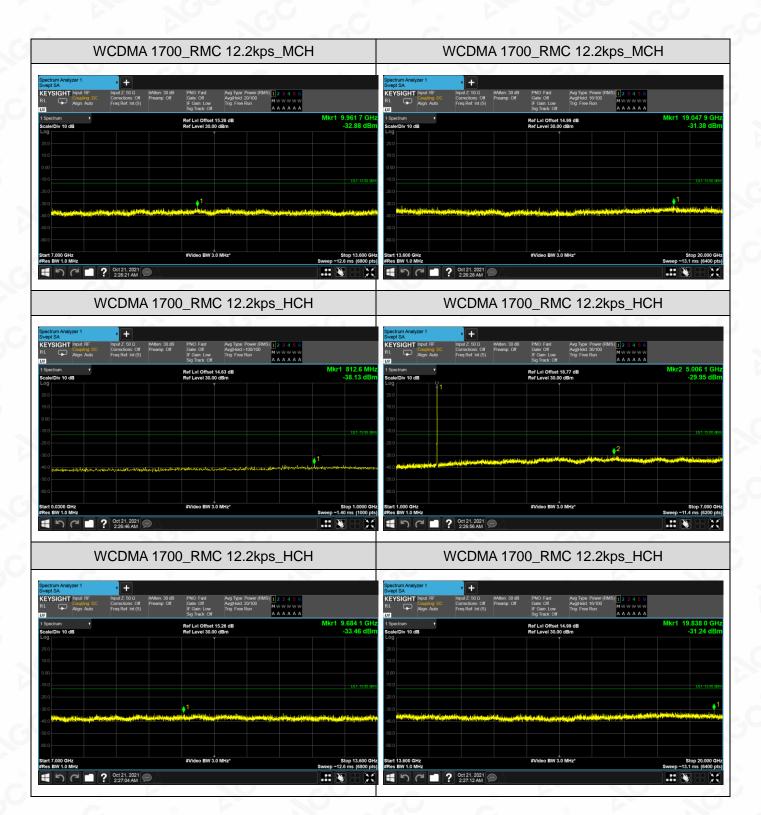

Note:1. Below 30MHZ no Spurious found and above is the worst mode data.

2. As no emission found in standby or receive mode, no recording in this report.



13. RADIATED SPURIOUS EMISSION

13.1. PROVISIONS APPLICABLE

(A) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm.

At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

(B) For specific criteria, please refer to the description in section 9.2 of the report for corresponding evaluation.

13.2. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz



Report No.: AGC02931211001FE03 Page 42 of 57

- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- 11. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT.

The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;

Result(dBm) = Pg(dBm) + Factor(dB)


Factor(dB) = Ant Gain(dB)-Cable Loss(dB) + Power Splitter(dB) (Above 1GHz)

Factor(dB) = Ant Gain(dB)-Cable Loss(dB) (Below 1GHz)


Where: Pgis the generator output power into the substitution antenna.

If the fundalmatal frequency is below 1GHz, RF output power has been converted to EIRP. EIRP(dBm) = ERP(dBm) + 2.15

13.3. MEASUREMENT setup

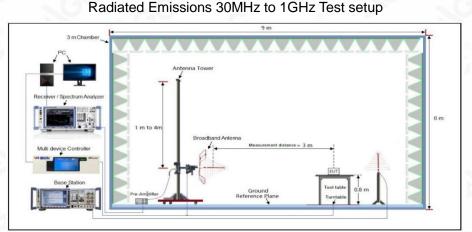

Radiated Emissions Above 1GHz Test setup

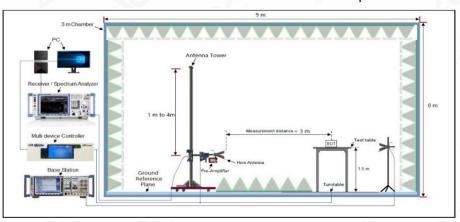

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Specificated Psetrog/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



12.4 MEASUREMENT RESULT

The measurement Below 1GHz data as follows

			WCD	MA Band II			
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
			RMC 12.2kbp	s_ Lowest C	hannel		
1	159.759	-61.40	15.52	-45.88	-13.00	-32.88	Horizontal
2	240.144	-59.65	16.75	-42.90	-13.00	-29.90	Horizontal
3	754.963	-57.33	19.35	-37.98	-13.00	-24.98	Horizontal
4	46.708	-63.34	10.44	-52.90	-13.00	-39.90	Vertical
5	433.340	-55.72	17.75	-37.97	-13.00	-24.97	Vertical
6	502.247	-54.33	18.66	-35.67	-13.00	-22.67	Vertical
			RMC 12.2kbp	s_ Middle Cl	nannel		
1	31.735	-57.41	9.78	-47.63	-13.00	-34.63	Horizontal
2	159.759	-60.03	13.75	-46.28	-13.00	-33.28	Horizontal
3	240.144	-56.17	16.75	-39.42	-13.00	-26.42	Horizontal
4	43.233	-59.51	10.23	-49.28	-13.00	-36.28	Vertical
5	433.340	-58.04	17.75	-40.29	-13.00	-27.29	Vertical
6	498.730	-53.94	18.02	-35.92	-13.00	-22.92	Vertical
			RMC 12.2kbp	s_ Highest C	hannel		
1	159.759	-59.52	13.75	-45.77	-13.00	-32.77	Horizontal
2	240.144	-60.22	16.75	-43.47	-13.00	-30.47	Horizontal
3	679.435	-56.19	19.01	-37.18	-13.00	-24.18	Horizontal
4	43.233	-59.50	10.23	-49.27	-13.00	-36.27	Vertical
5	433.340	-58.65	17.75	-40.90	-13.00	-27.90	Vertical
6	498.730	-63.79	18.02	-45.77	-13.00	-32.77	Vertical

			WCDI	MA Band IV			
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
			RMC 12.2kbp	s_ Lowest Cl	hannel		
1	159.759	-63.82	15.52	-49.65	-13.00	-35.30	Horizontal
2	240.144	-59.44	16.75	-43.15	-13.00	-29.69	Horizontal
3	754.963	-55.68	19.35	-38.41	-13.00	-23.33	Horizontal
4	46.708	-60.55	10.44	-51.86	-13.00	-37.11	Vertical
5	433.340	-58.84	17.75	-41.63	-13.00	-28.09	Vertical
6	502.247	-56.77	18.66	-40.23	-13.00	-25.11	Vertical
			RMC 12.2kbp	s_ Middle Ch	nannel		
1	31.735	-62.04	9.78	-52.72	-13.00	-39.26	Horizontal
2	159.759	-61.10	13.75	-48.96	-13.00	-34.35	Horizontal
3	240.144	-59.14	16.75	-43.93	-13.00	-29.39	Horizontal
4	43.233	-60.67	10.23	-51.54	-13.00	-37.44	Vertical
5	433.340	-60.17	17.75	-43.11	-13.00	-29.42	Vertical
6	498.730	-57.34	18.02	-40.29	-13.00	-26.32	Vertical
			RMC 12.2kbp	s_ Highest C	hannel		
1	159.759	-62.35	13.75	-48.88	-13.00	-35.60	Horizontal
2	240.144	-61.58	16.75	-45.16	-13.00	-31.83	Horizontal
3	679.435	-57.10	19.01	-38.09	-13.00	-25.09	Horizontal
4	43.233	-60.93	10.23	-52.13	-13.00	-37.70	Vertical
5	433.340	-59.31	17.75	-43.24	-13.00	-28.56	Vertical
6	498.730	-56.25	18.02	-40.69	-13.00	-25.23	Vertical

Report No.: AGC02931211001FE03 Page 45 of 57

			WCD	MA Band V			
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
			RMC 12.2kbp	s_ Lowest Cl	hannel		
1	159.759	-65.83	15.52	-50.31	-13.00	-37.31	Horizontal
2	240.144	-62.00	16.75	-45.25	-13.00	-32.25	Horizontal
3	754.963	-57.55	19.35	-38.20	-13.00	-25.2	Horizontal
4	46.708	-63.30	10.44	-52.86	-13.00	-39.86	Vertical
5	433.340	-60.85	17.75	-43.10	-13.00	-30.1	Vertical
6	502.247	-57.91	18.66	-39.25	-13.00	-26.25	Vertical
			RMC 12.2kbp	s_ Middle Ch	nannel		
1	31.735	-60.79	9.78	-51.01	-13.00	-38.01	Horizontal
2	159.759	-61.48	13.75	-47.73	-13.00	-34.73	Horizontal
3	240.144	-57.59	16.75	-40.84	-13.00	-27.84	Horizontal
4	43.233	-61.42	10.23	-51.19	-13.00	-38.19	Vertical
5	433.340	-60.73	17.75	-42.98	-13.00	-29.98	Vertical
6	498.730	-54.89	18.02	-36.87	-13.00	-23.87	Vertical
			RMC 12.2kbps	s_ Highest C	hannel		
1	159.759	-61.68	13.75	-47.93	-13.00	-34.93	Horizontal
2	240.144	-58.86	16.75	-42.11	-13.00	-29.11	Horizontal
3	679.435	-56.06	19.01	-37.05	-13.00	-24.05	Horizontal
4	43.233	-61.34	10.23	-51.11	-13.00	-38.11	Vertical
5	433.340	-57.60	17.75	-39.85	-13.00	-26.85	Vertical
6	498.730	-57.51	18.02	-39.49	-13.00	-26.49	Vertical



Report No.: AGC02931211001FE03 Page 46 of 57

			WCD	MA Band II			
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
Nor	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
			RMC 12.2kbp	s_ Lowest Ch	annel		
1	3704.800	-82.84	31.09	-51.75	-13.00	-38.75	Horizontal
2	5557.200	-89.55	34.14	-55.41	-13.00	-42.41	Horizontal
3	3704.800	-81.01	33.13	-47.88	-13.00	-34.88	Vertical
4	5557.200	-85.94	32.66	-53.28	-13.00	-40.28	Vertical
	<u>.</u>		RMC 12.2kbp	s_ Middle Ch	annel		
1	3760.000	-88.38	31.09	-57.29	-13.00	-44.29	Horizontal
2	5640.000	-88.19	34.14	-54.05	-13.00	-41.05	Horizontal
3	3760.000	-91.41	33.13	-58.28	-13.00	-45.28	Vertical
4	5640.000	-86.33	32.66	-53.67	-13.00	-40.67	Vertical
	<u>.</u>		RMC 12.2kbp	s_ Highest Cl	nannel		
1	3815.200	-88.83	31.09	-57.74	-13.00	-44.74	Horizontal
2	5722.800	-87.83	34.14	-53.69	-13.00	-40.69	Horizontal
3	3815.200	-90.61	33.13	-57.48	-13.00	-44.48	Vertical
4	5722.800	-84.85	32.66	-52.19	-13.00	-39.19	Vertical

The measurement Above 1GHz data as follows



			WCD	MA Band IV			
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
			RMC 12.2kbp	s_ Lowest Ch	annel		
1	3424.800	-90.38	32.11	-58.27	-13.00	-45.27	Horizontal
2	5137.200	-87.88	33.21	-54.67	-13.00	-41.67	Horizontal
3	3424.800	-90.52	32.09	-58.43	-13.00	-45.43	Vertical
4	5137.200	-87.67	34.03	-53.64	-13.00	-40.64	Vertical
	<u> </u>		RMC 12.2kbp	s_ Middle Cha	annel		
1	3464.800	-89.03	32.11	-56.92	-13.00	-43.92	Horizontal
2	5197.200	-87.05	33.21	-53.84	-13.00	-40.84	Horizontal
3	3464.800	-90.41	32.09	-58.32	-13.00	-45.32	Vertical
4	5197.200	-86.86	34.03	-52.83	-13.00	-39.83	Vertical
			RMC 12.2kbps	s_ Highest Ch	annel		
1	3505.200	-89.28	32.11	-57.17	-13.00	-44.17	Horizontal
2	5257.800	-87.22	33.21	-54.01	-13.00	-41.01	Horizontal
3	3505.200	-90.19	32.09	-58.10	-13.00	-45.1	Vertical
4	5257.800	-86.91	34.03	-52.88	-13.00	-39.88	Vertical

		WCDI	MA Band V			
Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
		RMC 12.2kbps	s_ Lowest Ch	annel		
1652.800	-83.66	23.12	-60.54	-13	-47.54	Horizontal
2479.200	-86.6	28.47	-58.13	-13	-45.13	Horizontal
1652.800	-83.52	23.12	-60.4	-13	-47.40	Vertical
2479.200	-83.77	28.47	-55.3	-13	-42.3	Vertical
		RMC 12.2kbp	s_ Middle Ch	annel		
1672.800	-83.93	23.12	-60.81	-13	-47.81	Horizontal
2509.200	-86.63	28.47	-58.16	-13	-45.16	Horizontal
1672.800	-83.95	23.12	-60.83	-13	-47.83	Vertical
2509.200	-84.02	28.47	-55.55	-13	-42.55	Vertical
		RMC 12.2kbps	s_ Highest Ch	nannel		
1693.200	-80.74	23.12	-57.62	-13	-44.62	Horizontal
2539.800	-81.98	28.47	-53.51	-13	-40.51	Horizontal
1693.200	-81.59	23.12	-58.47	-13	-45.47	Vertical
2539.800	-81.38	28.47	-52.91	-13	-39.91	Vertical
	(MHz) 1652.800 2479.200 1652.800 2479.200 1672.800 2509.200 1672.800 2509.200 1673.200 2539.800 1693.200	FrequencyReading(MHz)(dBm)(dBm)(dBm)1652.800-83.662479.200-86.61652.800-83.522479.200-83.771672.800-83.932509.200-86.631672.800-83.952509.200-84.021693.200-80.742539.800-81.981693.200-81.59	Frequency SA Reading Correction factor (MHz) (dBm) (dB/m) (MHz) (dBm) (dB/m) 1652.800 -83.66 23.12 2479.200 -86.6 28.47 1652.800 -83.52 23.12 2479.200 -83.77 28.47 1652.800 -83.77 28.47 1652.800 -83.93 23.12 2479.200 -83.93 23.12 1672.800 -83.93 23.12 1672.800 -83.93 23.12 2509.200 -86.63 28.47 1672.800 -83.95 23.12 2509.200 -84.02 28.47 1672.800 -84.02 28.47 1693.200 -80.74 23.12 1693.200 -81.98 28.47 1693.200 -81.98 28.47 1693.200 -81.98 28.47	Frequency Reading factor Result (MHz) (dBm) (dBm) (dBm) RMC 12.2kbps_Lowest Ch 1652.800 -83.66 23.12 -60.54 2479.200 -86.6 28.47 -58.13 1652.800 -83.52 23.12 -60.4 2479.200 -83.77 28.47 -55.3 2479.200 -83.77 28.47 -55.3 Common C	FrequencySA ReadingCorrection factorEIRP ResultLimit(MHz)(dBm)(dBm)(dBm)(dBm)(MHz)(dBm)(dBm)(dBm)(dBm)RMC 12.2kbps-Lowest Channel1652.800-83.6623.12-60.54-132479.200-86.628.47-58.13-131652.800-83.5223.12-60.4-132479.200-83.7728.47-55.3-132479.200-83.7728.47-55.3-131672.800-83.9323.12-60.81-131672.800-86.6328.47-58.16-131672.800-83.9523.12-60.83-131672.800-84.0228.47-55.55-131693.200-80.7423.12-57.62-131693.200-81.9828.47-53.51-131693.200-81.5923.12-58.47-13	FrequencySA ReadingCorrection factorEIRP ResultLimitMargin(MHz)(dBm)(dBm)(dBm)(dBm)(dB)(MHz)(dBm)(dBm)(dBm)(dBm)(dB)(MHz)(dBm)(dBm)(dBm)(dBm)(dB)(MHz)(dBm)(dBm)(dBm)(dBm)(dB)(MHz)(dBm)(dBm)(dBm)(dBm)(dBm)(MHz)(dBm)(dBm)(dBm)(dBm)(dBm)(MHz)-83.6623.12-60.54-13-47.542479.200-83.6623.12-60.4-13-47.402479.200-83.7728.47-55.3-13-42.32479.200-83.7728.47-55.3-13-47.812509.200-86.6328.47-58.16-13-45.161672.800-83.9523.12-60.83-13-47.832509.200-84.0228.47-55.55-13-42.552509.200-84.0228.47-55.55-13-42.551693.200-80.7423.12-57.62-13-44.622539.800-81.9828.47-53.51-13-40.511693.200-81.5923.12-58.47-13-45.47

Note:

1.Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.

2.Result = Reading + Correct Factor.

3.Margin = Result – Limit

4.he device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test. Subsequently, only the worst case emissions are reported.



14. FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

14.1 PROVISIONS APPLICABLE

14.1.1 For Hand carried battery powered equipment

- Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:
- a.) Temperature: The temperature is varied from -20°C to +50°C in 10°C increments using an environmental chamber.
- b.) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

14.1.2 For equipment powered by primary supply voltage

- 1 The carrier frequency of the transmitter is measured at room temperature (20°C to provide a
- 2 reference).
- 3 The equipment is turned on in a "standby" condition for fifteen minutes before applying power to
- 4 the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 5 Frequency measurements are made at 10°C intervals ranging from -20°C to +50°C. A period of at
- 6 least one half-hour is provided to allow stabilization of the equipment at each temperature level.

14.2 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

7 Measure the carrier frequency at room temperature.

8 Subject the EUT to overnight soak at -20°C. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on channel 20175 for LTE band 4 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.

9 Repeat the above measurements at 10° C increments from -20° C to $+50^{\circ}$ C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.

10 Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from



minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.


11 Subject the EUT to overnight soak at +50°C.

12 With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.

13 Repeat the above measurements at 10° C increments from $+50^{\circ}$ C to -20° C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.

14 At all temperature levels hold the temperature to +/- 0.5° during the measurement procedure.

14.3 MEASUREMENT SETUP

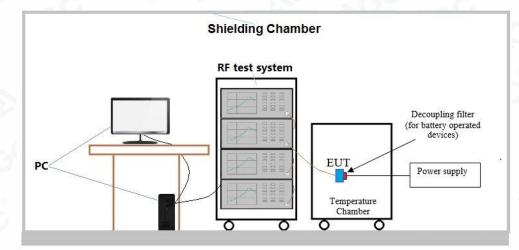

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stead festing/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day Safter the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com

Web: http://cn.agc-cert.com/



13.4 MEASUREMENT RESULT

Frequency Error vs. Voltage:

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Vardiat
Band	Mode	Channel	Temp.	Volt.(V)	(Hz)	(ppm)	(ppm)	Verdict
		C C	TN	VL	-0.90	-0.001089	±2.5	PASS
	G	LCH	ΤN	VN	1.21	0.001464	±2.5	PASS
8			TN	VH	3.30	0.003993	±2.5	PASS
GO	Č	0	TN	VL	1.08	0.001291	±2.5	PASS
WCDMA850	UMTS	MCH	TN	VN	1.97	0.002355	±2.5	PASS
			TN	VH	1.45	0.001734	±2.5	PASS
		®	TN	VL	-0.21	-0.000248	±2.5	PASS
	.0	НСН	TN	VN	0.40	0.000472	±2.5	PASS
8			TN	VH	2.20	0.002599	±2.5	PASS

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Vardiat
Band	Mode	Channel	Temp.	Volt.(V)	(Hz)	(ppm)	Verdict
<i>c.</i> 0	8	8	TN	VL	3.94	0.002301	PASS
	G ^O	LCH	TN	VN	3.05	0.001781	PASS
8		2 . 6	TN	VH	2.01	0.001174	PASS
		S MCH	TN	VL	-2.12	-0.001224	PASS
WCDMA17	UMTS		TN	VN	-8.15	-0.004704	PASS
00			TN	VH	-2.55	-0.001472	PASS
8	©.		TN	VL	-11.17	-0.006374	PASS
		НСН	TN	VN	-10.88	-0.006208	PASS
		G	TN	VH	-6.58	-0.003755	PASS

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



Report No.: AGC02931211001FE03 Page 52 of 57

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	
Band	Mode	Channel	Temp.	Volt.(V)	(Hz)	(ppm)	Verdict
	C		TN	○ VL	-3.85	-0.002078	PASS
		LCH	TN	VN VN	-1.83	-0.000988	PASS
	3	0	TN	VH	-4.44	-0.002397	PASS
	30	~.C	TN	VL	-9.78	-0.005202	PASS
WCDMA1900	UMTS	МСН	TN	VN	-2.37	-0.001261	PASS
	8	8	TN	VH	-5.77	-0.003069	PASS
		C	TN	VL	-5.60	-0.002936	PASS
		НСН	TN	VN	-11.40	-0.005976	PASS
	C		TN	VH	1.33	0.000697	PASS

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



Frequency Error vs. Temperature:

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Limit	Verdict
Band	Mode	Channel	Volt.	Tem. (℃)	(Hz)	(ppm)	(ppm)	VEIGICI
8		k.	VN	-20	4.44	0.005373	±2.5	PASS
	8		VN	-10	3.98	0.004816	±2.5	PASS
			VN	0	3.43	0.004151	±2.5	PASS
			VN	10	0.70	0.000847	±2.5	PASS
WCDMA850 UM	UMTS	LCH	VN	20	0.92	0.001113	±2.5	PASS
		0.5	VN	30	3.48	0.004211	±2.5	PASS
			VN	40	-1.83	-0.002214	±2.5	PASS
		8	VN	50	3.71	0.004489	±2.5	PASS
	. 6	0	VN	-20	-0.05	-0.000061	±2.5	PASS
	UMTS	МСН	VN	-10	2.01	0.002432	±2.5	PASS
			VN	0	4.58	0.005476	±2.5	PASS
			VN	10	1.17	0.001399	±2.5	PASS
WCDMA850			VN	20	1.02	0.001220	±2.5	PASS
			VN	30	4.07	0.004866	±2.5	PASS
			VN ©	40	2.29	0.002738	±2.5	PASS
		0	VN	50	4.68	0.005595	±2.5	PASS
		0	VN	-20	0.98	0.001172	±2.5	PASS
		G	VN	-10	2.15	0.002540	±2.5	PASS
			VN	0	0.73	0.000862	±2.5	PASS
			VN	10	1.88	0.002221	±2.5	PASS
WCDMA850	UMTS	HCH	VN	20	-1.31	-0.001547	±2.5	PASS
		~GU	VN	30	1.48	0.001748	±2.5	PASS
	®		VN	40	1.24	0.001465	±2.5	PASS
	G	8	VN	50	3.20	0.003780	±2.5	PASS



Report No.: AGC02931211001FE03 Page 54 of 57

Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Verdict
Band	Mode	Channel	Volt.	Tem. (℃)	(Hz)	(ppm)	verdict
	GU	<i>c</i> .C	VN	-20	2.79	0.001629	PASS
		20	VN	-10	-4.21	-0.002458	PASS
	0	0	VN	0	5.13	0.002996	PASS
WODMA 4700			VN	10	4.93	0.002879	PASS
WCDMA1700	UMTS	LCH	VN	20	3.57	0.002085	PASS
		8	VN	30	6.23	0.003638	PASS
		5	[©] VN	40	4.24	0.002476	PASS
			VN	50	4.76	0.002780	PASS
- G	®		VN	-20	-5.13	-0.002961	PASS
	GO	МСН	VN	-10	-6.38	-0.003683	PASS
			VN	0	-1.98	-0.001143	PASS
WODMA 4700	UMTS		VN	10	-4.55	-0.002626	PASS
WCDMA1700			VN	20	3.66	0.002113	PASS
			VN	30	0.43	0.000248	PASS
			VN	40	-1.51	-0.000872	PASS
	- (◎ VN	50	-4.03	-0.002326	PASS
©	20		VN	-20	-4.96	-0.002830	PASS
	0		VN	-10	-9.99	-0.005700	PASS
	C	©	VN	0	-7.86	-0.004485	PASS
WODMA 4700			VN	10	-6.33	-0.003612	PASS
WCDMA1700	UMTS	НСН	VN	20	-11.95	-0.006819	PASS
	G	8	VN	30	-6.33	-0.003612	PASS
		30	VN	40	-5.75	-0.003281	PASS
			VN	50	-10.39	-0.005929	PASS

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stead of the stand in the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC02931211001FE03 Page 55 of 57


					La Y		
Test	Test	Test	Test	Test	Freq.Error	Freq.vs.rated	Verdict
Band	Mode	Channel	Volt.	Tem. (℃)	(Hz)	(ppm)	
WCDMA1900	UMTS	LCH	VN	-20	-3.89	-0.002100	PASS
			VN	-10	-4.84	-0.002613	PASS
			VN	0	-1.80	-0.000972	PASS
			VN	10	-0.60	-0.000324	PASS
			VN	20	1.37	0.000740	PASS
			VN	30	3.89	0.002100	PASS
			VN	40	-2.82	-0.001522	PASS
			VN	50	-2.27	-0.001225	PASS
WCDMA1900	UMTS	МСН	VN	-20	-6.00	-0.003239	PASS
			VN	-10	4.44	0.002397	PASS
			VN	0	-8.54	-0.004543	PASS
			VN	10	-4.62	-0.002457	PASS
			VN	20	0.98	0.000521	PASS
			VN	30	-4.26	-0.002266	PASS
			VN	40	0.06	0.000032	PASS
			ା VN	50	-1.42	-0.000755	PASS
WCDMA1900	UMTS	нсн	VN	-20	-1.75	-0.000931	PASS
			VN	-10	0.14	0.000074	PASS
			VN	0	-3.94	-0.002065	PASS
			VN	10	-0.69	-0.000362	PASS
			VN	20	-4.81	-0.002521	PASS
			VN	30	-0.85	-0.000446	PASS
			VN	40	-1.36	-0.000713	PASS
			VN	50	-9.96	-0.005221	PASS

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the stead of the stand in the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC02931211001FE03 Page 56 of 57

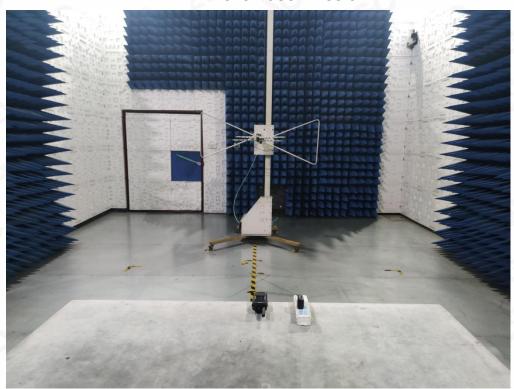

APPENDIX A: PHOTOGRAPHS OF TEST SETUP RADIATED SPURIOUS EMISSION

RADIATED SPURIOUS ABOVE 1G EMISSION



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the submitted restriction of AGE the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com



Report No.: AGC02931211001FE03 Page 57 of 57

APPENDIX B: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC02931211001AP01

----END OF REPORT----

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Festiva/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter approximation of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agc-cert.com

Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the solution of a stamp of the test results for the test results and the test of the test of the test results of the test results of the test report is not permitted without the writter apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issues of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.