



Measurement of RF Interference  
T-Patch GPS  
Frequency Hopping Spread Spectrum  
Transmitter

For Digital Matter Embedded  
Johannesburg, South Africa 53224

P.O. Number DME85  
Date Tested August 23 through September 19, 2012  
Test Personnel Richard King  
Test Specification FCC "Code of Federal Regulations" Title 47  
Part 15, Subpart C, Section 15.247 for Frequency  
Hopping Intentional Radiators Operating within the  
902-928MHz

Industry Canada RSS-210, Annex 8, for Frequency  
Hopping Systems Operating in the Bands 902-  
928MHz

Industry Canada RSS-GEN

Test Report By: *RICHARD E. KING*  
Richard King  
EMC Engineer

Requested By:  
Ardrian Pickles  
Digital Matter Embedded

Approved By: *Raymond J. Klouda*  
Raymond J. Klouda  
Registered Professional  
Engineer of Illinois - 44894



TABLE OF CONTENTS

PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
1.	Introduction.....	5
1.1.	Scope of Tests.....	5
1.2.	Purpose .....	5
1.3.	Deviations, Additions and Exclusions.....	5
1.4.	EMC Laboratory Identification .....	5
1.5.	Laboratory Conditions.....	5
2.	Applicable Documents.....	5
3.	EUT Setup and Operation .....	6
3.1.	General Description .....	6
3.1.1.	Power Input.....	6
3.1.2.	Peripheral Equipment .....	6
3.1.3.	Signal Input/Output Leads .....	6
3.1.4.	Grounding .....	6
3.2.	Operational Mode .....	6
3.3.	EUT Modifications.....	6
4.	Test Facility and Test Instrumentation .....	6
4.1.	Shielded Enclosure.....	6
4.2.	Test Instrumentation .....	6
4.3.	Calibration Traceability .....	6
5.	Test Procedures .....	7
5.1.	Carrier Frequency Separation: .....	7
5.1.1.	Requirements.....	7
5.1.2.	Procedures.....	7
5.1.3.	Results .....	7
5.2.	Number of Hopping Frequencies.....	7
5.2.1.	Requirements.....	7
5.2.2.	Procedures.....	7
5.2.3.	Results .....	7
5.3.	Time of Occupancy.....	7
5.3.1.	Requirement.....	7
5.3.2.	Procedures.....	7
5.3.3.	Results .....	8
5.4.	20dB Bandwidth.....	8
5.4.1.	Requirement.....	8
5.4.2.	Procedures.....	8
5.4.3.	Results .....	8
5.5.	Peak Output Power.....	8
5.5.1.	Requirement.....	8
5.5.2.	Procedures.....	9
5.5.3.	Results .....	9
5.6.	Radiated Spurious Emissions.....	9
5.6.1.	Requirement.....	9

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.



**TABLE OF CONTENTS**

PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
5.6.2.	Procedures.....	9
5.6.3.	Results.....	10
5.7.	Bandedge Compliance.....	10
5.7.1.	Requirement.....	10
5.7.2.	Procedures.....	11
5.7.2.1	Low Band Edge.....	11
5.7.2.2	High Band Edge.....	11
5.7.3.	Results.....	11
6.	Other Test Conditions.....	11
6.1.	Test Personnel and Witnesses.....	11
6.2.	Disposition of the EUT.....	12
7.	Conclusions.....	12
8.	Certification.....	12
9.	Equipment List.....	13

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.



**REVISION HISTORY**

Revision	Date	Description
—	27 September 2012	Initial release

## Measurement of RF Emissions from a Model T-Patch GPS F.H.S.S Transmitter

### 1. INTRODUCTION

#### 1.1. Scope of Tests

This report presents the results of the radio interference measurements performed on a Small TAG transmitter, Model No. T-Patch GPS, no serial number was assigned, (hereinafter referred to as the Equipment Under Test (EUT)). The EUT was manufactured and submitted for testing by Digital Matter Embedded located in Johannesburg, South Africa.

#### 1.2. Purpose

The test series was performed to determine if the EUT meets the conducted and radiated RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.207 and 15.247 for Intentional Radiators. The test series was also performed to determine if the EUT meets the conducted RF emission requirements of the Industry Canada Radio Standards Specification, RSS-Gen, Section 7.2.2 and the radiated RF emission requirements of the Industry Canada Radio Standards Specification, RSS-210, Annex 8 for transmitters. Testing was performed in accordance with ANSI C63.4-2009.

#### 1.3. Deviations, Additions and Exclusions

There were no deviations, additions to, or exclusions from the test specification during this test series.

#### 1.4. EMC Laboratory Identification

This series of tests was performed by Elite Electronic Engineering Incorporated of Downers Grove, Illinois. The laboratory is accredited by The American Association for Laboratory Accreditation (A2LA). A2LA Certificate Number: 1786.01.

#### 1.5. Laboratory Conditions

The temperature at the time of the test was 24°C and the relative humidity was 28%.

### 2. APPLICABLE DOCUMENTS

The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subpart C, dated 1 October 2011
- FCC Public Notice, DA 00-705, "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems", Released March 30, 2000
- ANSI C63.4-2009, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
- Industry Canada Radio Standards Specification, RSS-Gen, "General Requirements and Information for the Certification of Radiocommunication Equipment", Issue 3, December 2010
- Industry Canada Radio Standards Specification, RSS-210, "Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment", Issue 8, December 2010

### 3. EUT SETUP AND OPERATION

#### 3.1. General Description

The EUT is a Digital Matter Embedded, Small TAG, Model No. T-Patch GPS. A block diagram of the EUT setup is shown as Figure 1.

##### 3.1.1. Power Input

The EUT typically obtains 3VDC from two AA batteries.

##### 3.1.2. Peripheral Equipment

No peripheral equipment was submitted with the EUT.

##### 3.1.3. Signal Input/Output Leads

The test items does not utilize any interconnect cables.

##### 3.1.4. Grounding

The EUT was ungrounded during the tests.

#### 3.2. Operational Mode

For all tests, the test item and peripheral equipment was placed on an 80cm high non-conductive stand. The test item was energized. The unit was programmed to operate in one of the following modes:

- Transmit at 902.25MHz
- Transmit at 915MHz
- Transmit at 927.75MHz
- Frequency Hopping Enabled

#### 3.3. EUT Modifications

No test item modifications were needed to meet the specification requirements for FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C.

### 4. TEST FACILITY AND TEST INSTRUMENTATION

#### 4.1. Shielded Enclosure

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. With the exception of the floor, the reflective surfaces of the shielded chamber are lined with ferrite tiles on the walls and ceiling. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2009 for site attenuation.

#### 4.2. Test Instrumentation

The test instrumentation and auxiliary equipment used during the tests are listed in Table 9-1.

#### 4.3. Calibration Traceability

Test equipment is maintained and calibrated on a regular basis. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

## 5. TEST PROCEDURES

### 5.1. Carrier Frequency Separation:

#### 5.1.1. Requirements

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

#### 5.1.2. Procedures

The EUT was set up inside the chamber. With the hopping function enabled, the EUT was allowed to transmit continuously.

The resolution bandwidth (RBW) was set to  $\geq$  to 1% of the span. The peak detector and 'Max-Hold' function was engaged. The span was set wide enough to capture the peaks of at least two adjacent channels. When, the trace had stabilized after multiple scans. The marker-delta function was used to determine the separation between the peaks of the adjacent channels. The analyzer's display was plotted using a 'screen dump' utility.

#### 5.1.3. Results

Page 16 shows the results of the carrier frequency separation measurements. As can be seen from this plot, the separation is 452.9kHz which is greater than the 20dB bandwidth (168.33kHz).

### 5.2. Number of Hopping Frequencies

#### 5.2.1. Requirements

Per section 15.247(a)(1)(i), for frequency hopping systems operating in the 902-928MHz band: The frequency hopping system shall use at least 50 hopping frequencies if the 20dB bandwidth is less than 250kHz. If the 20dB bandwidth is greater than 250kHz the frequency hopping system shall use at least 25 hopping frequencies.

#### 5.2.2. Procedures

The EUT was set up inside the chamber. With the hopping function enabled, the EUT was allowed to transmit continuously.

The resolution bandwidth (RBW) was set to 100kHz. The peak detector and 'Max-Hold' function was engaged. The span was set wide enough to capture the entire frequency band of operation.

The EUT's signal was allowed to stabilize after multiple scans. The number of hopping frequencies was counted. The analyzer's display was plotted using a 'screen dump' utility.

#### 5.2.3. Results

Pages 17 and 18 show the number of hopping frequencies. As can be seen from these plots, the number of frequencies is 50 per hop table which is greater than the minimum required.

### 5.3. Time of Occupancy

#### 5.3.1. Requirement

Per section 15.247(a)(1)(i), For frequency hopping systems operating in the 902-928MHz band: the average time of occupancy shall not be greater than 0.4 seconds within a 20 second period if the 20dB bandwidth is less than 250kHz. If the 20dB bandwidth is greater than 250kHz, the average time of occupancy shall not be greater than 0.4 seconds within a 10 second period.

#### 5.3.2. Procedures

The EUT was set up inside the chamber. The output of the EUT was connected to the spectrum analyzer. With

the hopping function enabled, the EUT was allowed to transmit continuously.

The resolution bandwidth (RBW) was set to 100 kHz. The peak detector and 'Max-Hold' function was engaged. With the span set to 0Hz, the sweep time was adjusted to capture a single event in order to measure the dwell time per hop. Then, the sweep time was expanded to capture the average time between hops. When the trace had stabilized after multiple scans, the time between hops was measured. The analyzer's display was plotted using a 'screen dump' utility.

The dwell time in the specified time period was then calculated from dwell time per hop multiplied by the number of hops in the specified time period.

#### 5.3.3. Results

Pages 19 and 20 show the plots for the time of occupancy (dwell time). As can be seen from the plots, when set for the Maximum power setting, the time of occupancy can be determined by dwell time/hop (47.2 mS) multiplied by number of hops (1) in a 20 second period. This calculated value is equal to 0.0472 seconds, which is less than the 0.4 seconds maximum allowed.

### 5.4. 20dB Bandwidth

#### 5.4.1. Requirement

Per 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Per section 15.247(a)(1)(i), for frequency hopping systems operating in the 902-928MHz band, the 20dB bandwidth shall be measured for determination of the carrier frequency separation limits and must not exceed 500 kHz. If the 20dB bandwidth of the hopping channel is less than 250kHz, the system shall use at least 50 hopping channels. If the 20dB bandwidth of the hopping channel is 250kHz or greater (but not greater than 500kHz), the system shall use at least 25 hopping channels.

#### 5.4.2. Procedures

The EUT was setup inside the chamber. With the hopping function disabled, the EUT was allowed to transmit continuously. The frequency hopping channel was set separately to low, middle, and high hopping channels. The resolution bandwidth (RBW) was set to  $\geq$  to 1% of the 20 dB BW.

The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The analyzer's display was plotted using a 'screen dump' utility.

#### 5.4.3. Results

The plots on pages 21 through 23 show that the maximum 20 dB bandwidth was 168.33kHz. The 99% bandwidth was measured to be 164.32kHz. Therefore, since the 20dB bandwidth of the hopping channel is less than 250kHz, the system shall use at least 50 hopping channels.

### 5.5. Peak Output Power

#### 5.5.1. Requirement

Per section 15.247(b)(2), for frequency hopping systems operating in the 902-928MHz band and employing 50 hopping channels or more, the maximum peak output conducted power shall not be greater than 1W (30dBm).

Per section 15.247(b)(4), this limit is based on the use of antennas with directional gains that do not exceed 6dBi. Since the limit allows for a 6dBi antenna gain, the maximum EIRP can be increased by 6dB to 4 watts (36dBm) for a transmitter with at least 50 hopping channels.





5.5.2.Procedures

The EUT was placed on the non-conductive stand and set to transmit. A bilog antenna was placed at a test distance of 3 meters from the EUT. The resolution bandwidth (RBW) of the spectrum analyzer was set to greater than the 20dB bandwidth. The span was set to approximately 5 times the 20 dB bandwidth. The EUT was maximized for worst case emissions (or maximum output power) at the measuring antenna. The maximum meter reading was recorded. The peak power output was measured for the low, middle and high hopping frequencies.

The equivalent power was determined from the field intensity levels measured at 3 meters using the substitution method. To determine the emission power, a dipole antenna was then set in place of the EUT and connected to a calibrated signal generator. The output of the signal generator was adjusted to match the received level at the spectrum analyzer. The signal level was recorded. The reading was then corrected to compensate for cable loss as required. The peak power output was calculated for low, middle, and high hopping frequencies.

5.5.3.Results

The results are presented on page 24. The maximum EIRP measured from the transmittr was 8.2 dBm which meets the De Facto 36 dBm limit.

5.6. Radiated Spurious Emissions

5.6.1.Requirement

Per section 15.247(c), the spurious emissions in any 100 kHz BW outside the frequency band must be at least 20dB below the highest 100 kHz BW level measured within the band. In addition, Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Paragraph 15.209(a) has the following radiated emission limits:

Frequency MHz	Field Strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30.0-88.0	100	3
88.0-216.0	150	3
216.0-960.0	200	3
Above 960	500	3

5.6.2.Procedures

Radiated measurements were performed in a 32ft. x 20ft. x 14ft. high shielded enclosure. The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

Preliminary radiated emissions tests were performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the EUT. The entire frequency range from 30MHz to 10.0GHz was investigated using a peak detector function.

The final open field emission tests were then manually performed over the frequency range of 30MHz to 10.0GHz.

For all emissions in the restricted bands, the following procedure was used:

- a) The field strengths of all emissions below 1 GHz were measured using a bi-log antenna. The bi-log antenna was positioned at a 3 meter distance from the EUT. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
- b) The field strengths of all emissions above 1 GHz were measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the EUT. A peak detector with a resolution bandwidth of 1 MHz was used on the spectrum analyzer.
- c) To ensure that maximum or worst case emission levels were measured, the following steps were taken when taking all measurements:
  - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
  - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
  - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
  - iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer. The measuring antenna was not raised or lowered to ensure maximized readings, instead the EUT was rotated through all axis to ensure the maximum readings were recorded for the EUT.
- d) For all radiated emissions measurements below 1 GHz, if the peak reading is below the limits listed in 15.209(a), no further measurements are required. If however, the peak readings exceed the limits listed in 15.209(a), then the emissions are remeasured using a quasi-peak detector.
- e) For all radiated emissions measurements above 1 GHz, the peak readings must comply with the 15.35(b) limits. 15.35(b) states that when average radiated emissions measurements are specified, there also is a limit on the peak level of the radiated emissions. The limit on the peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. Therefore, all peak readings above 1 GHz must be no greater than 20 dB above the limits specified in 15.209(a).
- f) Next, for all radiated emissions measurements above 1GHz, the resolution bandwidth was set to 1MHz. The analyzer was set to linear mode with a 10Hz video bandwidth in order to simulate an average detector. An average reading was taken. If the dwell time per channel of the hopping signal is less than 100msec, then the reading obtained with the 10 Hz video bandwidth may be further adjusted by a "duty cycle correction factor", derived from  $20 \cdot \log(\text{dwell time}/100\text{msec})$ . These readings must be no greater than the limits specified in 15.209(a).

### 5.6.3.Results

The preliminary emissions levels were plotted. These plots are presented on pages 25 through 36. These plots show that the radiated spurious emissions were at least 20 dB below the level of the fundamental.

The harmonics and any other emissions that fall in the restricted frequency bands were then re-measured manually. This data is shown in the tables on pages 37 through 42. The field intensities levels for the harmonics in the restricted band were within the limit.

## 5.7. Bandedge Compliance

### 5.7.1.Requirement

Per section 15.247(d), the emissions at the band-edges must be at least 20dB below the highest level measured within the band but attenuation below the general limits listed in 15.209(a) is not required.

## 5.7.2.Procedures

### 5.7.2.1 Low Band Edge

- 1) The test item was set to transmit continuously at the channel closest to the low band-edge (hopping function disabled).
- 2) To determine the band edge compliance, the following spectrum analyzer settings were used:
  - a. Center frequency = low band-edge frequency.
  - b. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation.
  - c. Resolution bandwidth (RBW) was set to 100kHz.
  - d. The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.
  - e. The marker was set on the peak of the in-band emissions. A display line was placed 20dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20dB down display line. (All emissions to the left of the center frequency (band-edge) must be below the display line.)
  - f. The analyzer's display was plotted using a 'screen dump' utility.
- 3) Step 2) was repeated with the frequency hopping function enabled.

### 5.7.2.2 High Band Edge

- 1) The test item was set to transmit continuously at the channel closest to the high band-edge (hopping function disabled).
- 2) To determine the band edge compliance, the following spectrum analyzer settings were used:
  - a. Center frequency = high band-edge frequency.
  - b. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation.
  - c. Resolution bandwidth (RBW) was set to 100kHz.
  - d. The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.
  - e. The marker was set on the peak of the in-band emissions. A display line was placed 20dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20dB down display line. (All emissions to the right of the center frequency (band-edge) must be below the display line.)
  - f. The analyzer's display was plotted using a 'screen dump' utility.
  - g. Step 2) was repeated with the frequency hopping function enabled.

## 5.7.3.Results

Pages 43 through 46 show the band-edge compliance results. As can be seen from these plots, the emissions at the band-edge are within the limits.

## 6. OTHER TEST CONDITIONS

### 6.1. Test Personnel and Witnesses

All tests were performed by qualified personnel from Elite Electronic Engineering Incorporated.



## 6.2. Disposition of the EUT

The EUT and all associated equipment were returned to Digital Matter Embedded upon completion of the tests.

## 7. CONCLUSIONS

It was determined that the Digital Matter Embedded Small TAG, Model No. T-Patch GPS, did fully meet the radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Section 15.207 and 15.247 for Intentional Radiators, when tested per ANSI C63.4-2009.

It was determined that the Digital Matter Embedded Small TAG, Model No. T-Patch GPS, did fully meet the radiated emissions requirements of the Industry Canada Radio Standards Specification, RSS-Gen. Section 7.2.2 and the radiated emissions requirements of the Industry Canada Radio Standards Specification RSS-210, Annex 8 for transmitters, when tested per ANSI C63.4-2009.

## 8. CERTIFICATION

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specifications.

The data presented in this test report pertains to the EUT at the test date. Any electrical or mechanical modification made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification.

This report must not be used to claim product endorsement by NVLAP or any agency of the US Government.



### 9. EQUIPMENT LIST

Table 9-1 Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
APW9	PREAMPLIFIER	PLANAR	PE2-35-120-5R0-10-12-SFF	PL8527	1-20GHz	3/19/2012	3/19/2013
NDQ0	TUNED DIPOLE ANTENNA	EMCO	3121C-DB4	311	400-1000MHZ	4/5/2012	4/5/2013
NTA3	BILOG ANTENNA	TESEQ	6112D	28040	25-1000MHz	2/16/2012	2/16/2013
NWP1	DOUBLE RIDGED WAVEGUIDE ANTENNA	EATON	3115	2100	1GHZ-12.4GHZ	3/6/2012	3/6/2013
RBA0	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB26	100145	20HZ-26.5GHZ	3/8/2012	3/8/2013
RBB0	EMI TEST RECEIVER 20HZ TO 40 GHZ.	ROHDE & SCHWARZ	ESIB40	100250	20 HZ TO 40GHZ	3/5/2012	3/5/2013
SES1	24VDC POWER SUPPLY	P TRANS	FS-32024-1M	002	18-27VDC	NOTE 1	
T1D2	10DB 20W ATTENUATOR	NARDA	768-10	6	DC-11GHZ	1/6/2012	1/6/2013
XPQ2	HIGH PASS FILTER	K&L MICROWAVE	4IH30-1804/T10000-0	3	1.8-10GHZ	11/15/2011	11/15/2012

N/A: Not Applicable

Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.


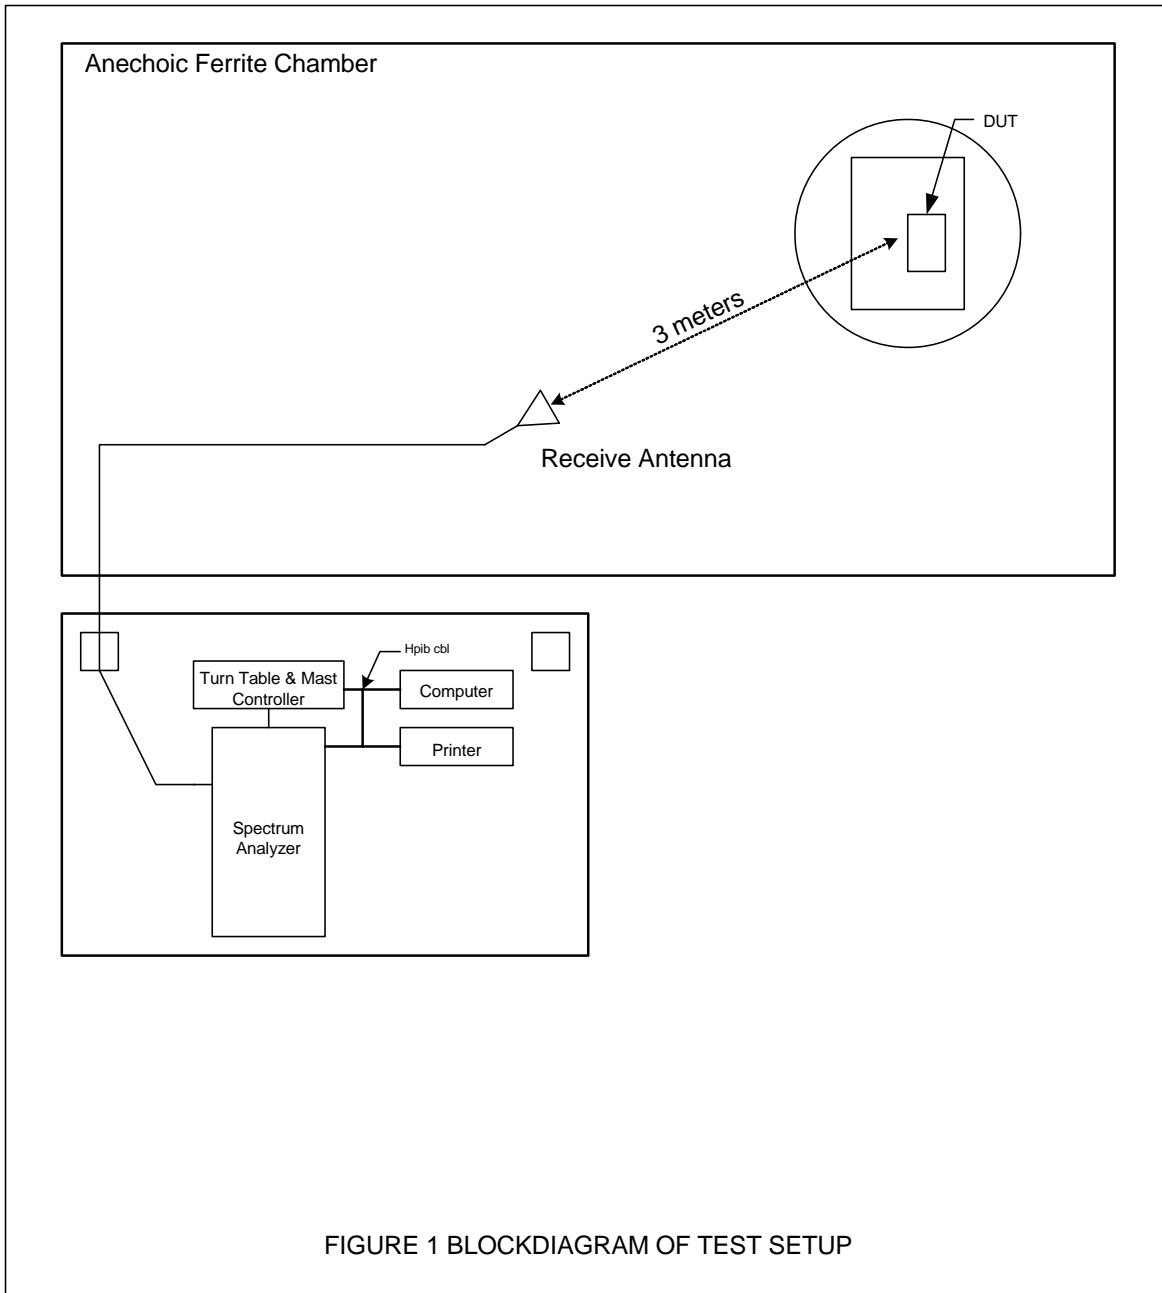


Figure 2




Test Setup for Radiated Emissions, below 1GHz – Horizontal Polarization

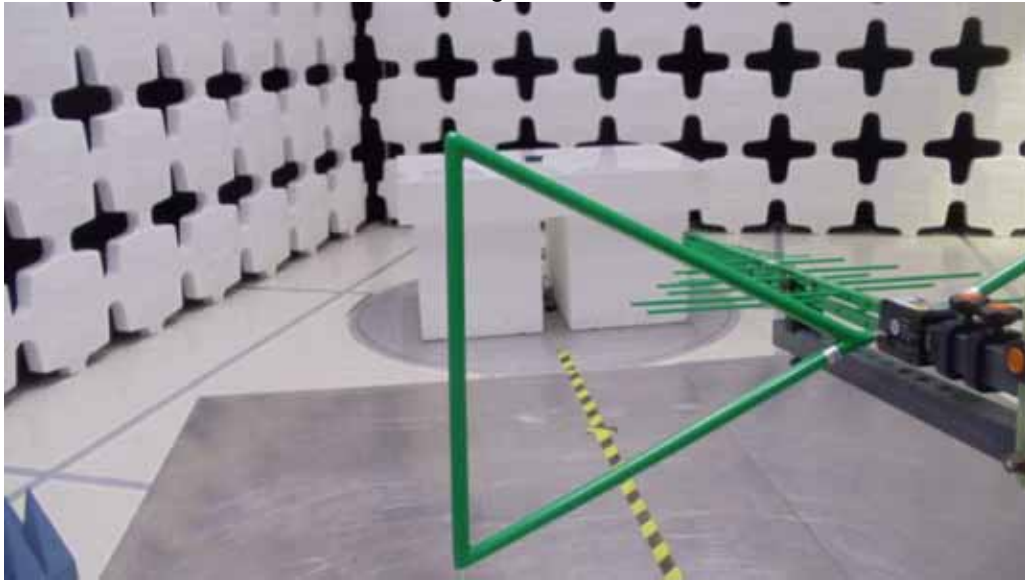

Test Setup for Radiated Emissions, below 1GHz – Vertical Polarization



Delta 1 [T3] RBW 100 kHz RF Att 20 dB  
 Ref Lvl 0.17 dB VBW 1 MHz  
 107 dB $\mu$ V 452.90581162 kHz SWT 5 ms Unit dB $\mu$ V

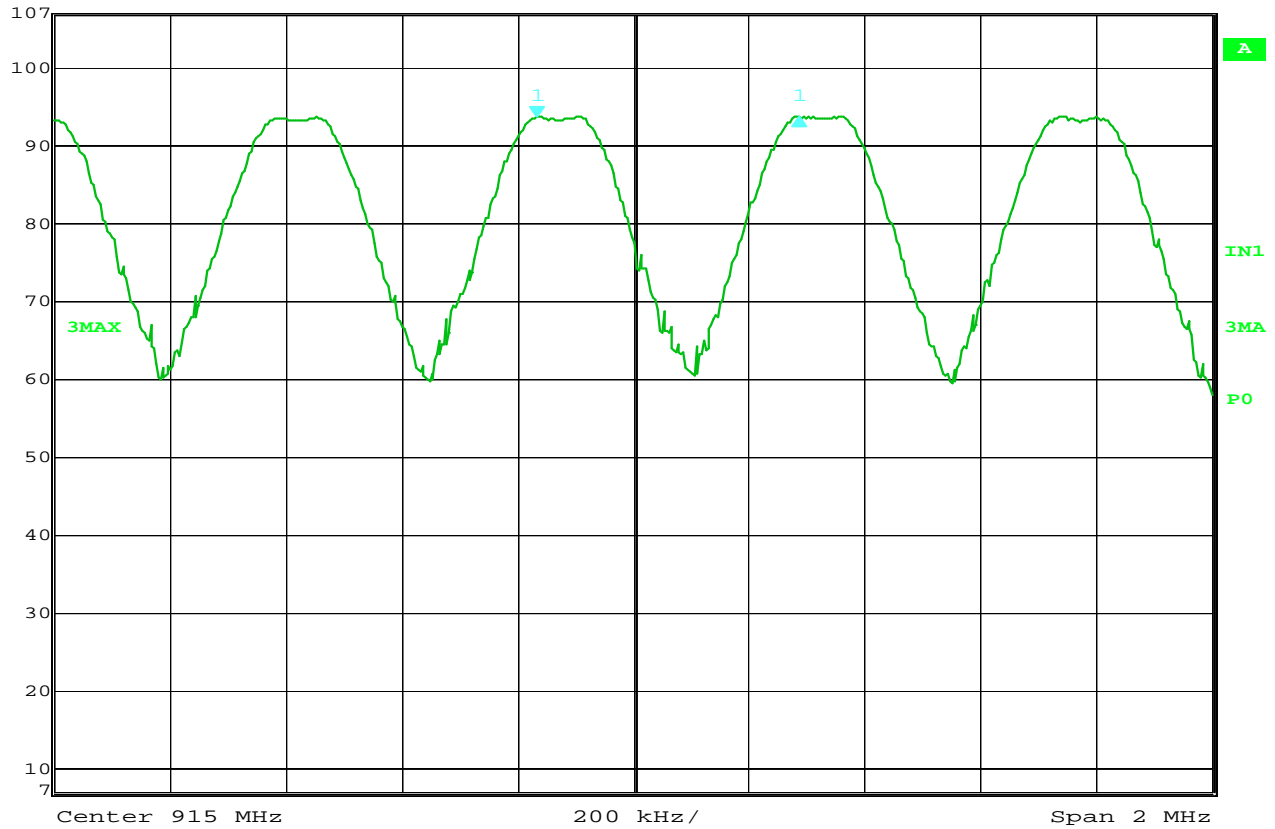

Date: 22.AUG.2012 06:54:31


**15.247(a) Carrier Frequency Separation**

MANUFACTURER : Digital Matter Embedded  
 MODEL NUMBER : T-Patch GPS  
 TEST MODE : Hopping enabled  
 TEST PARAMETERS : Carrier Frequency Separation  
 NOTES : Maximum Power Setting  
 NOTES : Carrier Frequency Separation = 452.9kHz





Ref Lvl	112 dB $\mu$ V	Marker 1 [T3]	98.46 dB $\mu$ V	RBW	100 kHz	RF Att	20 dB
			902.28456914 MHz	VBW	1 MHz		
				SWT	7.5 ms	Unit	dB $\mu$ V

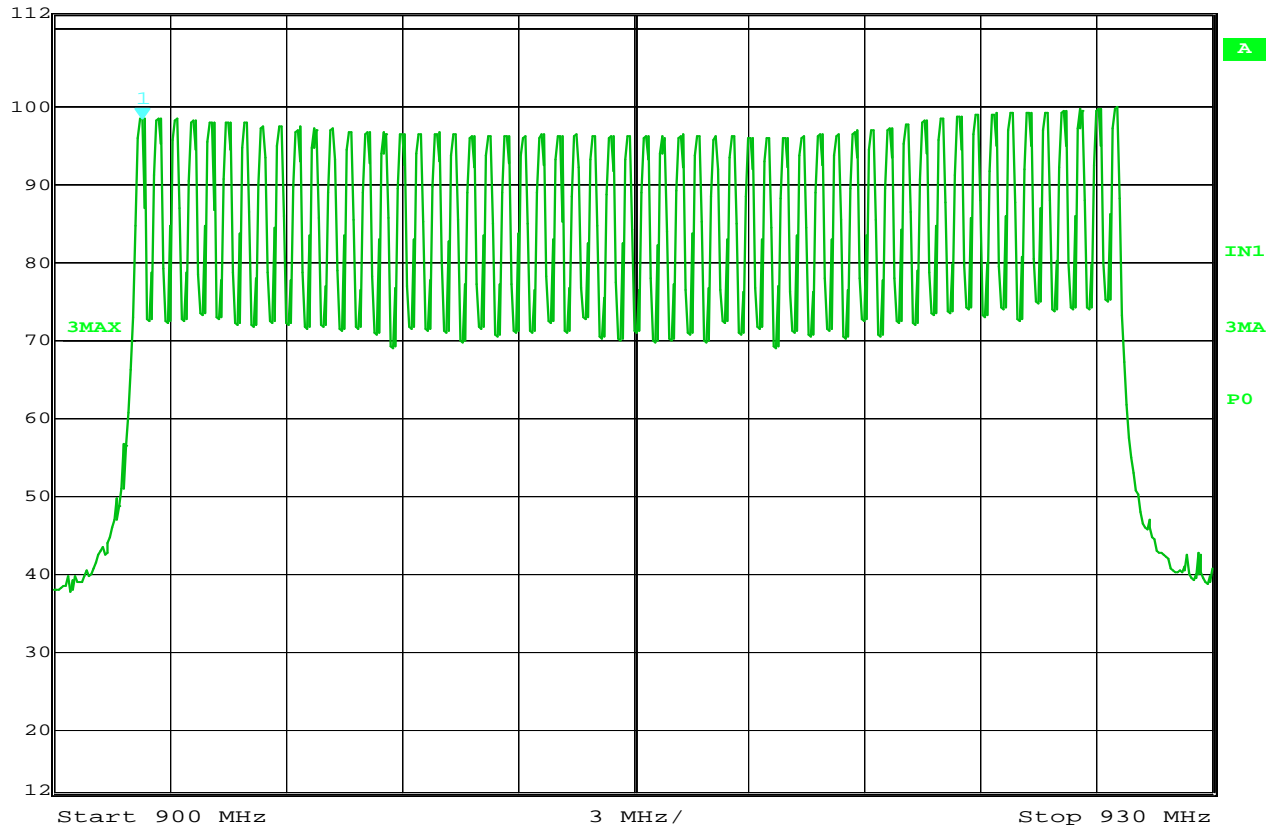

Date: 22.AUG.2012 09:25:18


### 15.247(a) Number of Hopping Frequencies

MANUFACTURER : Digital Matter Embedded  
 MODEL NUMBER : T-Patch GPS  
 TEST MODE : Hopping enabled  
 TEST PARAMETERS : Number of Hopping Frequencies Hop Table 1  
 NOTES : Maximum Power Setting  
 NOTES : Number of Hopping Frequencies = 50



Ref Lvl  
97 dBμV

RBW 100 kHz RF Att 20 dB  
VBW 1 MHz  
SWT 7.5 ms Unit dBμV

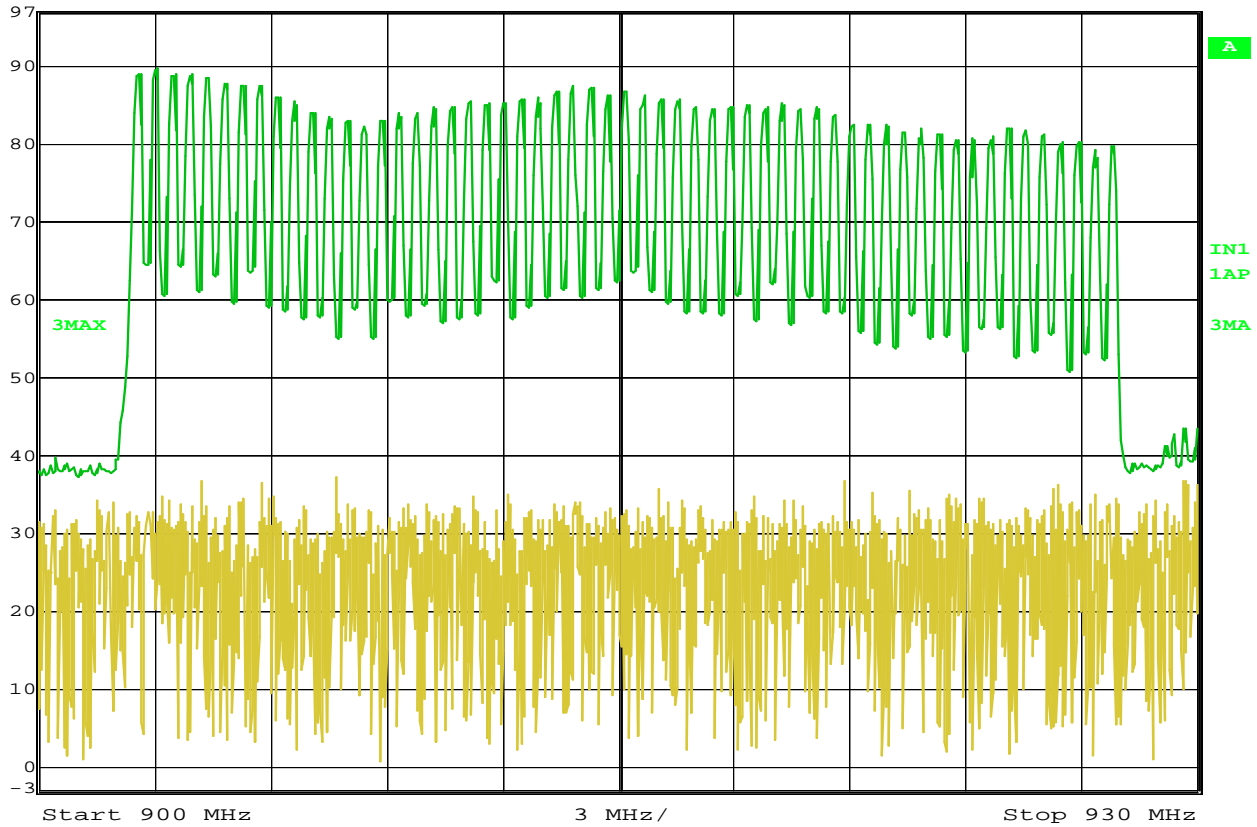


Date: 7.SEP.2012 06:09:51

### 15.247(a) Number of Hopping Frequencies

MANUFACTURER : Digital Matter Embedded  
 MODEL NUMBER : T-Patch GPS  
 TEST MODE : Hopping enabled  
 TEST PARAMETERS : Number of Hopping Frequencies Hop table 3  
 NOTES : Maximum Power Setting  
 NOTES : Number of Hopping Frequencies = 50



	Delta 1 [T3]	RBW	100 kHz	RF Att	20 dB
Ref Lvl	-8.40 dB	VBW	1 MHz		
107 dB $\mu$ V	47.895792 ms	SWT	100 ms	Unit	dB $\mu$ V

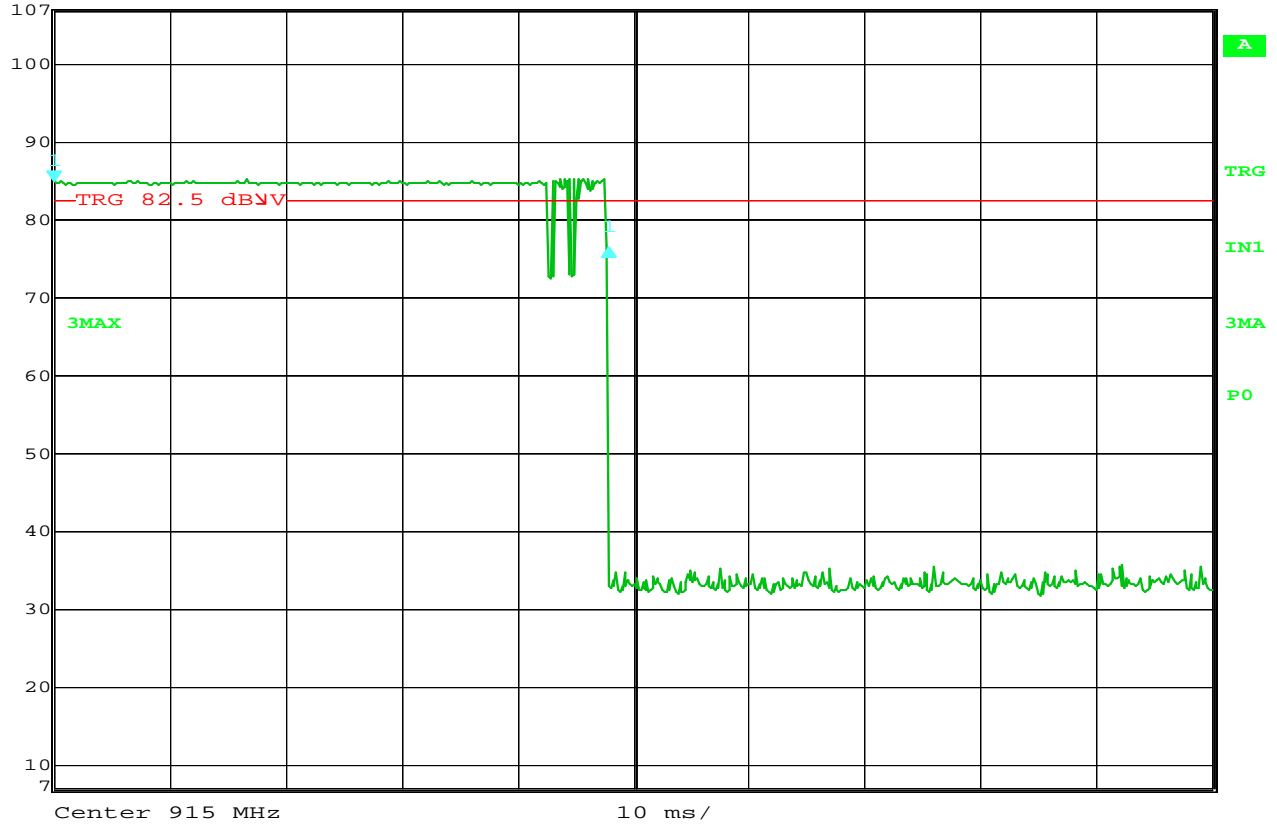


Date: 22.AUG.2012 06:48:21

### 15.247(a) Time of Occupancy

MANUFACTURER : Digital Matter Embedded  
 MODEL NUMBER : T-Patch GPS  
 TEST MODE : Hopping enabled  
 TEST PARAMETERS : Time of Occupancy  
 NOTES : Maximum Power Setting



	Delta 1 [T3]	RBW	100 kHz	RF Att	0 dB
Ref Lvl	0.00 dB	VBW	100 kHz		
87 dB $\mu$ V	0.00000000 Hz	SWT	20 s	Unit	dB $\mu$ V

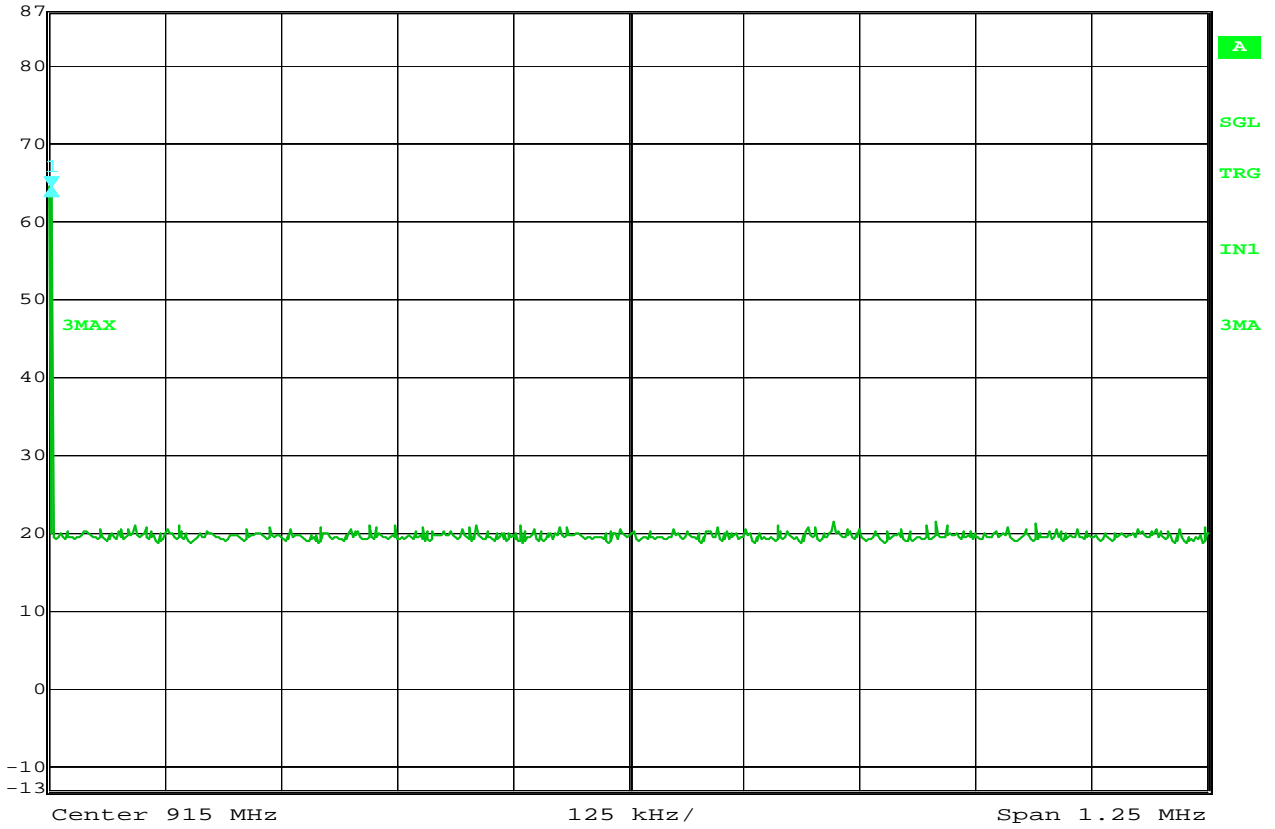


Date: 19.SEP.2012 15:14:26

### 15.247(a) Time of Occupancy

MANUFACTURER : Digital Matter Embedded  
 MODEL NUMBER : T-Patch GPS  
 TEST MODE : Hopping enabled  
 TEST PARAMETERS : Time of Occupancy  
 NOTES : Maximum Power Setting



	Delta 1 [T3]	RBW	30 kHz	RF Att	30 dB
Ref Lvl	0.31 dB	VBW	300 kHz		
102 dBμV	168.33667335 kHz	SWT	6 ms	Unit	dBμV

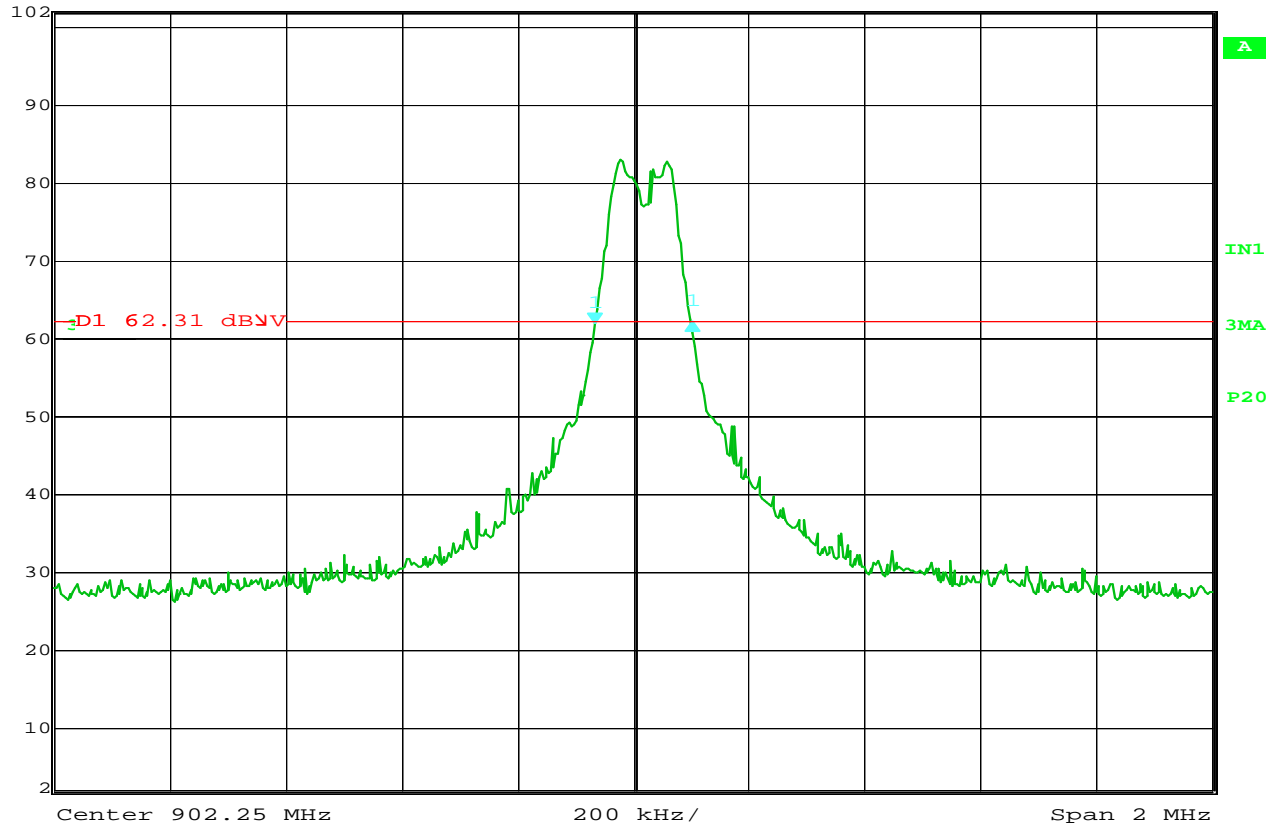


Date: 24.AUG.2012 12:24:55

### 15.247(a) 20dB Bandwidth

MANUFACTURER : Digital Matter Embedded  
 MODEL NUMBER : T-Patch GPS  
 TEST MODE : Tx @ 902.25MHz  
 TEST PARAMETERS : 20 dB Bandwidth  
 NOTES : 20 dB Bandwidth = 168.33kHz  
 NOTES : Maximum Power Setting



	Delta 1 [T3]	RBW	30 kHz	RF Att	30 dB
Ref Lvl	-0.39 dB	VBW	300 kHz		
102 dBμV	164.32865731 kHz	SWT	6 ms	Unit	dBμV

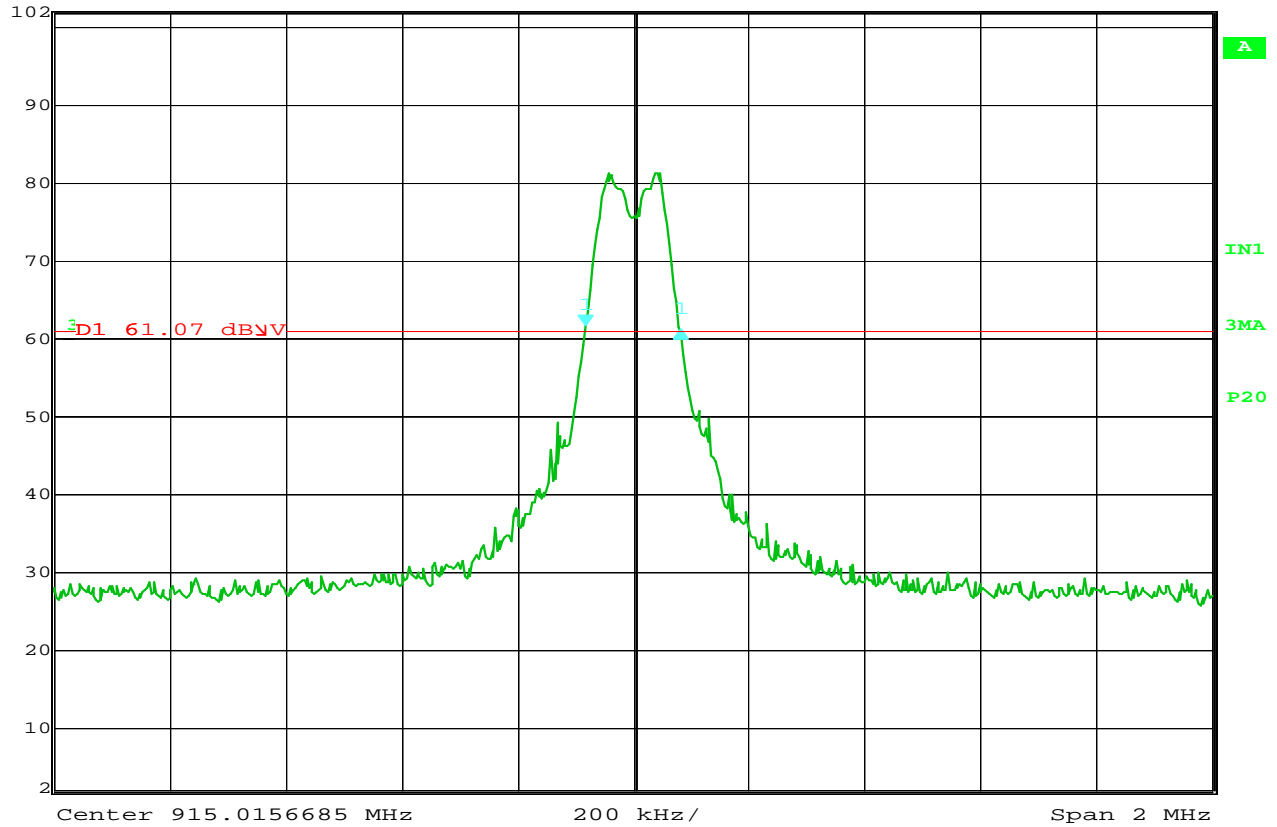


Date: 24.AUG.2012 12:08:21

### 15.247(a) 20dB Bandwidth

MANUFACTURER : Digital Matter Embedded  
 MODEL NUMBER : T-Patch GPS  
 TEST MODE : Tx @ 915MHz  
 TEST PARAMETERS : 20 dB Bandwidth  
 NOTES : 20 dB Bandwidth = 164.32kHz  
 NOTES : Maximum Power Setting



	Delta 1 [T3]	RBW	30 kHz	RF Att	30 dB
Ref Lvl	0.07 dB	VBW	300 kHz		
102 dBμV	168.33667335 kHz	SWT	6 ms	Unit	dBμV

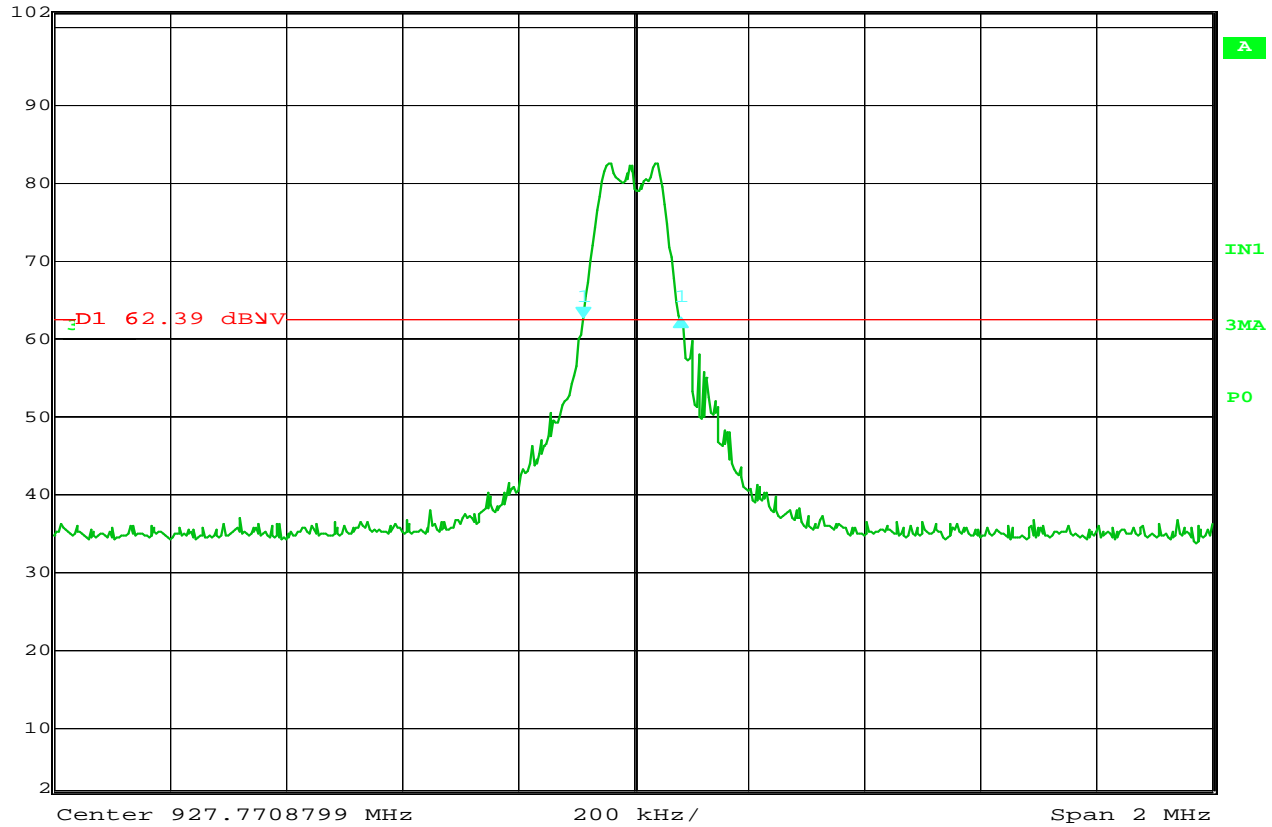

Date: 24.AUG.2012 11:49:03

### 15.247(a) 20dB Bandwidth

MANUFACTURER : Digital Matter Embedded  
 MODEL NUMBER : T-Patch GPS  
 TEST MODE : Tx @ 927.75MHz  
 TEST PARAMETERS : 20 dB Bandwidth  
 NOTES : 20 dB Bandwidth = 168.33kHz  
 NOTES : Maximum Power Setting



Manufacturer : Digital Matter Embedded  
Test Item : Small TAG  
Model No. : T-Patch GPS  
Test Specification : FCC Part 15, Subpart C, Section 15.247, Peak Output Power  
Date : August 23, 2012  
Notes : Maximum Power Setting

Frequency MHz	Antenna Polarity	Meter Reading dBuV	Matched Signal Generator Reading dBm	Antenna Gain dB	Cable Loss dB	EIRP dBm	Limit dBm
902.25	H	83.3	8.0	2.2	2.0	8.2	36
902.25	V	77.4	2.5	2.2	2.0	2.7	36
915.00	H	81.2	5.9	2.2	2.0	6.0	36
915.00	V	76.4	1.7	2.2	2.0	1.8	36
927.75	H	82.6	7.4	2.2	2.0	7.5	36
927.75	V	76.6	2.3	2.2	2.0	2.4	36

EIRP = Sig. Gen. Reading + Antenna Gain – Cable Loss




ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

UNIT: RCU EMI RUN 16

UKA1 04/26/11

SPEC / TEST : PRELIMINARY RADIATED EMISSIONS  
 MANUFACTURER : DIGITAL MATTER EMBEDDED  
 MODEL No. : T-PATCH GPS  
 SERIAL No. :  
 MODE : Tx @ 902.25  
 SCANS/BAND : 1  
 NOTES :  
 TEST DATE : 24 Aug 2012 13:58:03 R. KING  
 ANT. POLARIZ. : HORIZONTAL

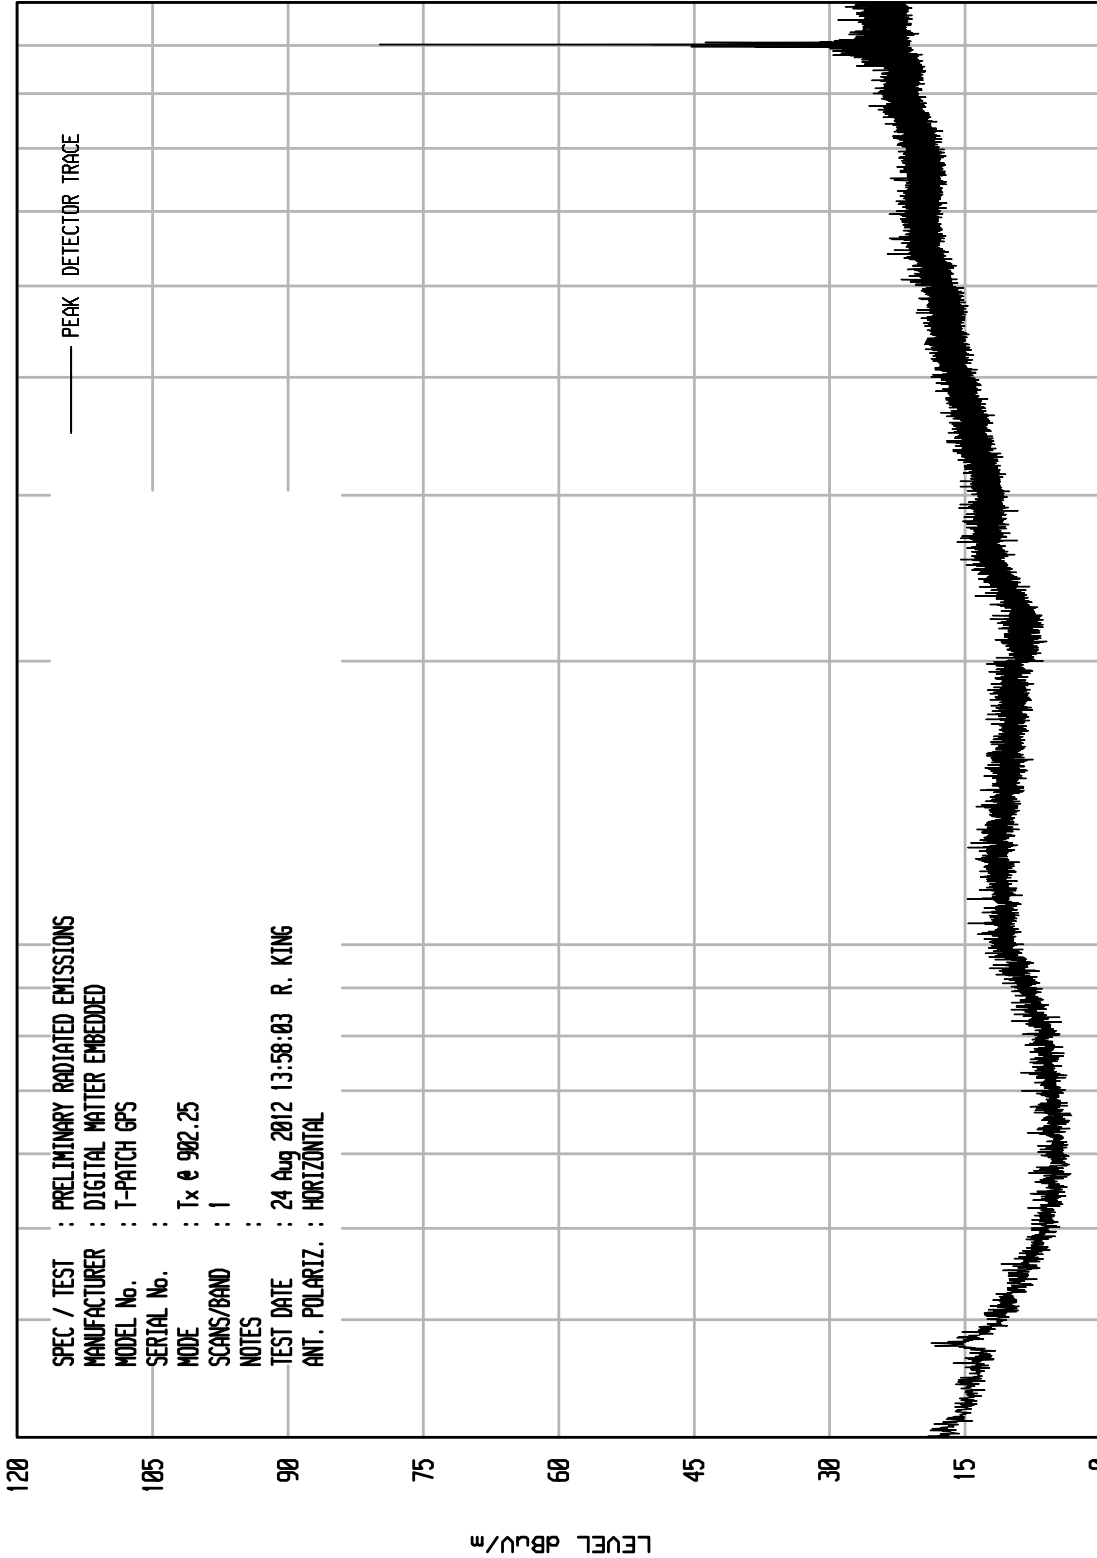

STOP = 1000

FREQUENCY MHz

100


START = 30

ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

UNITU RCU EHT RUN 15

UKA1 04/26/11

SPEC / TEST : PRELIMINARY RADIATED EMISSIONS  
 MANUFACTURER : DIGITAL MATTER EMBEDDED  
 MODEL No. : T-PATCH GPS  
 SERIAL No. :  
 MODE : Tx @ 902.25  
 SCANS/BAND : 1  
 NOTES :  
 TEST DATE : 24 Aug 2012 13:56:51 R. KING  
 ANT. POLARIZ. : VERTICAL

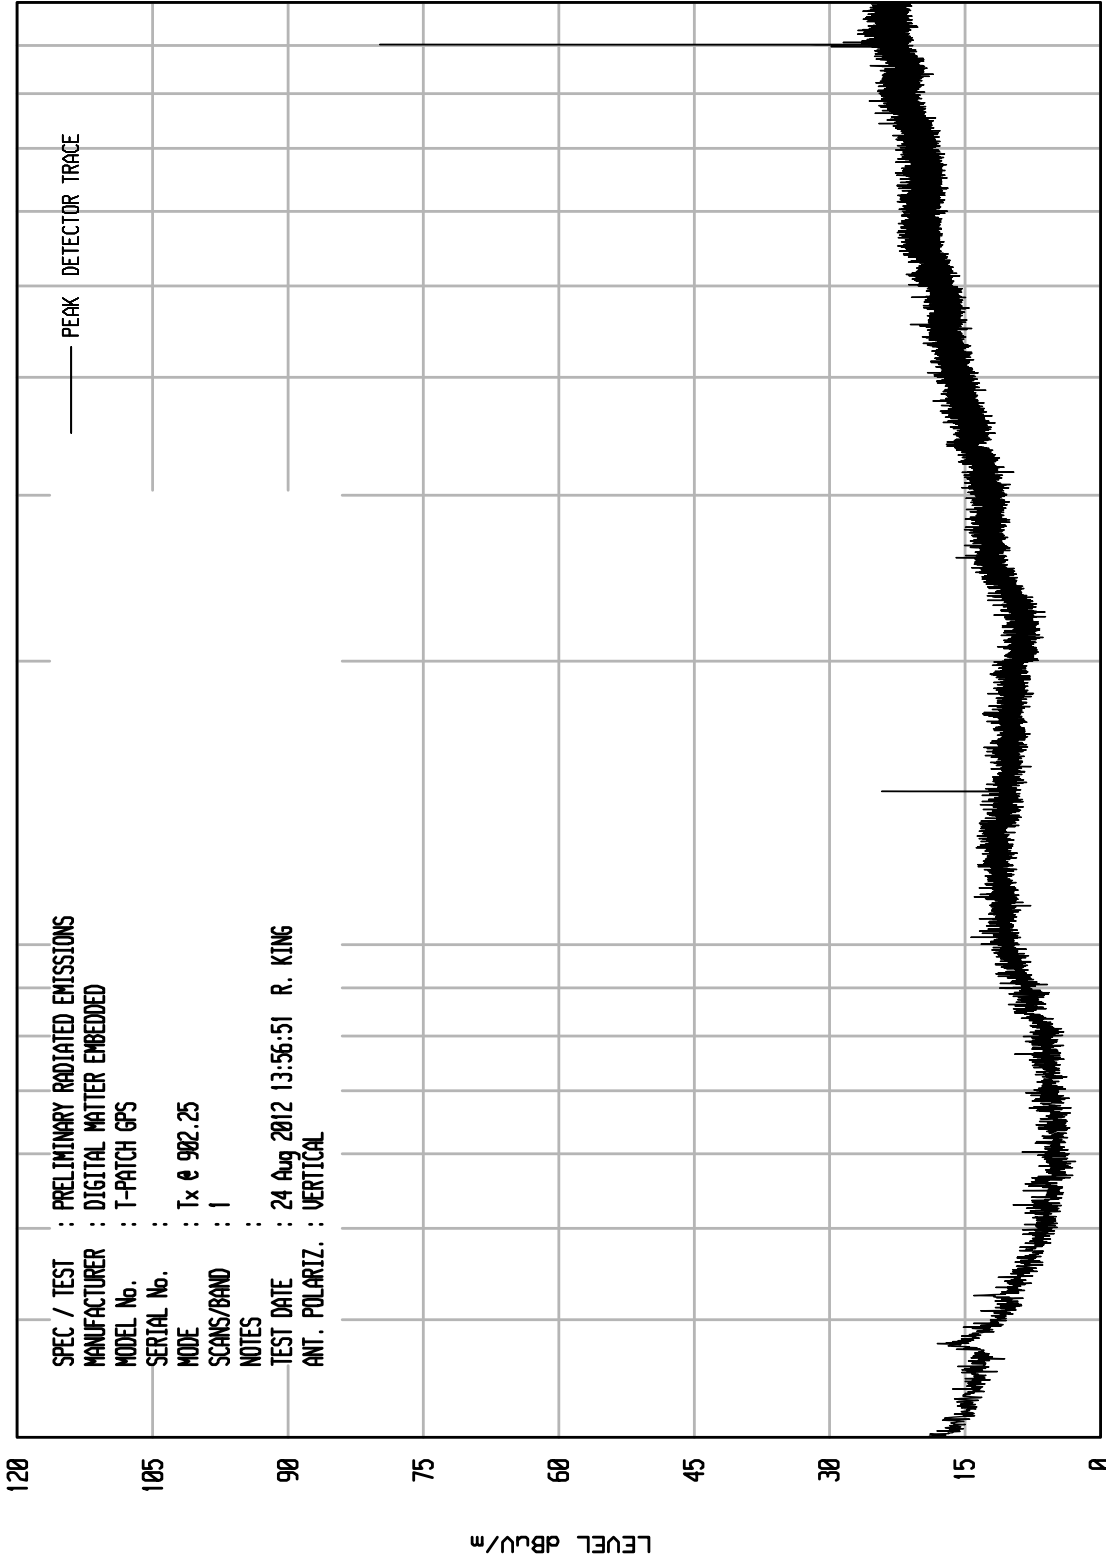

STOP = 1000

FREQUENCY MHz

100


START = 30

ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

UNITU RCU ENI RUN 1

UKA1 04/26/11

SPEC / TEST : PRELIMINARY RADIATED EMISSIONS  
 MANUFACTURER : DIGITAL MATTER EMBEDDED  
 MODEL No. : T-PATCH GPS  
 SERIAL No. :  
 MODE : Tx @ 982.25 MHZ  
 SCANS/BAND : 1  
 NOTES :  
 TEST DATE : 23 Aug 2012 07:24:54 R. KING  
 ANT. POLARIZ. : HORIZONTAL

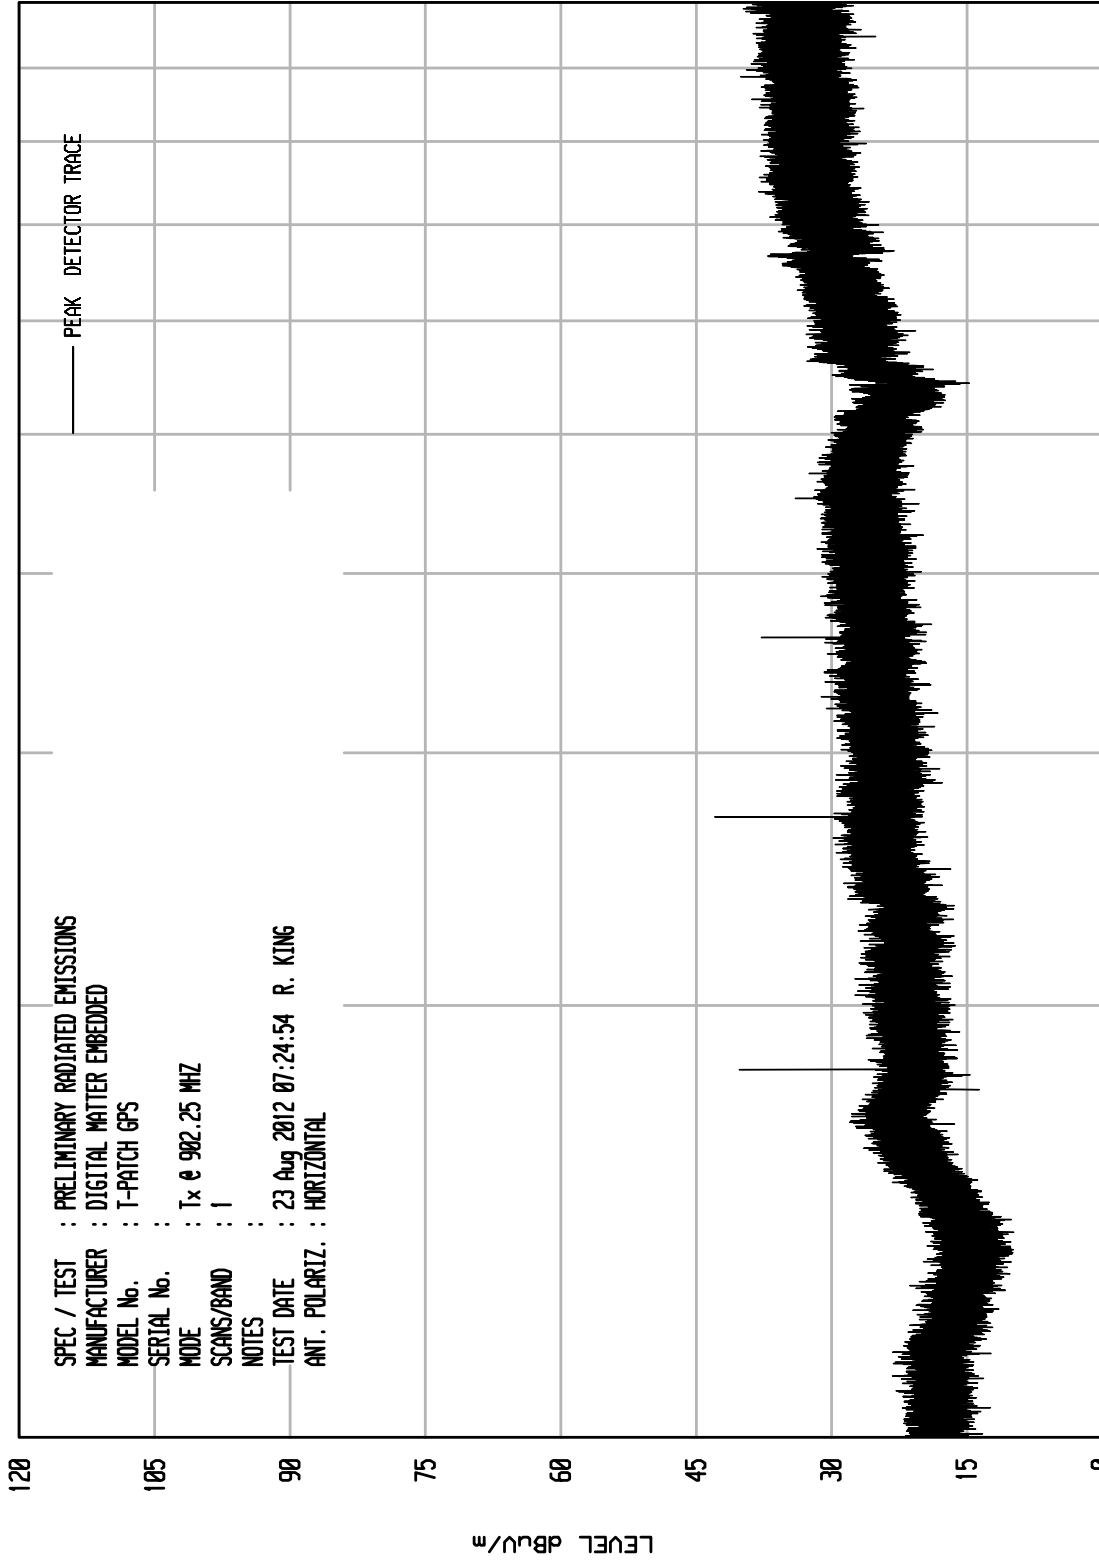

STOP = 10000

FREQUENCY MHz


START = 1000

ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

UNITU RCU ENI RUN 2

UKA1 04/26/11

SPEC / TEST : PRELIMINARY RADIATED EMISSIONS  
 MANUFACTURER : DIGITAL MATTER EMBEDDED  
 MODEL No. : T-PATCH GPS  
 SERIAL No. :  
 MODE : Tx @ 902.25 MHZ  
 SCANS/BAND : 1  
 NOTES :  
 TEST DATE : 23 Aug 2012 07:45:27 R. KING  
 ANT. POLARIZ. : VERTICAL

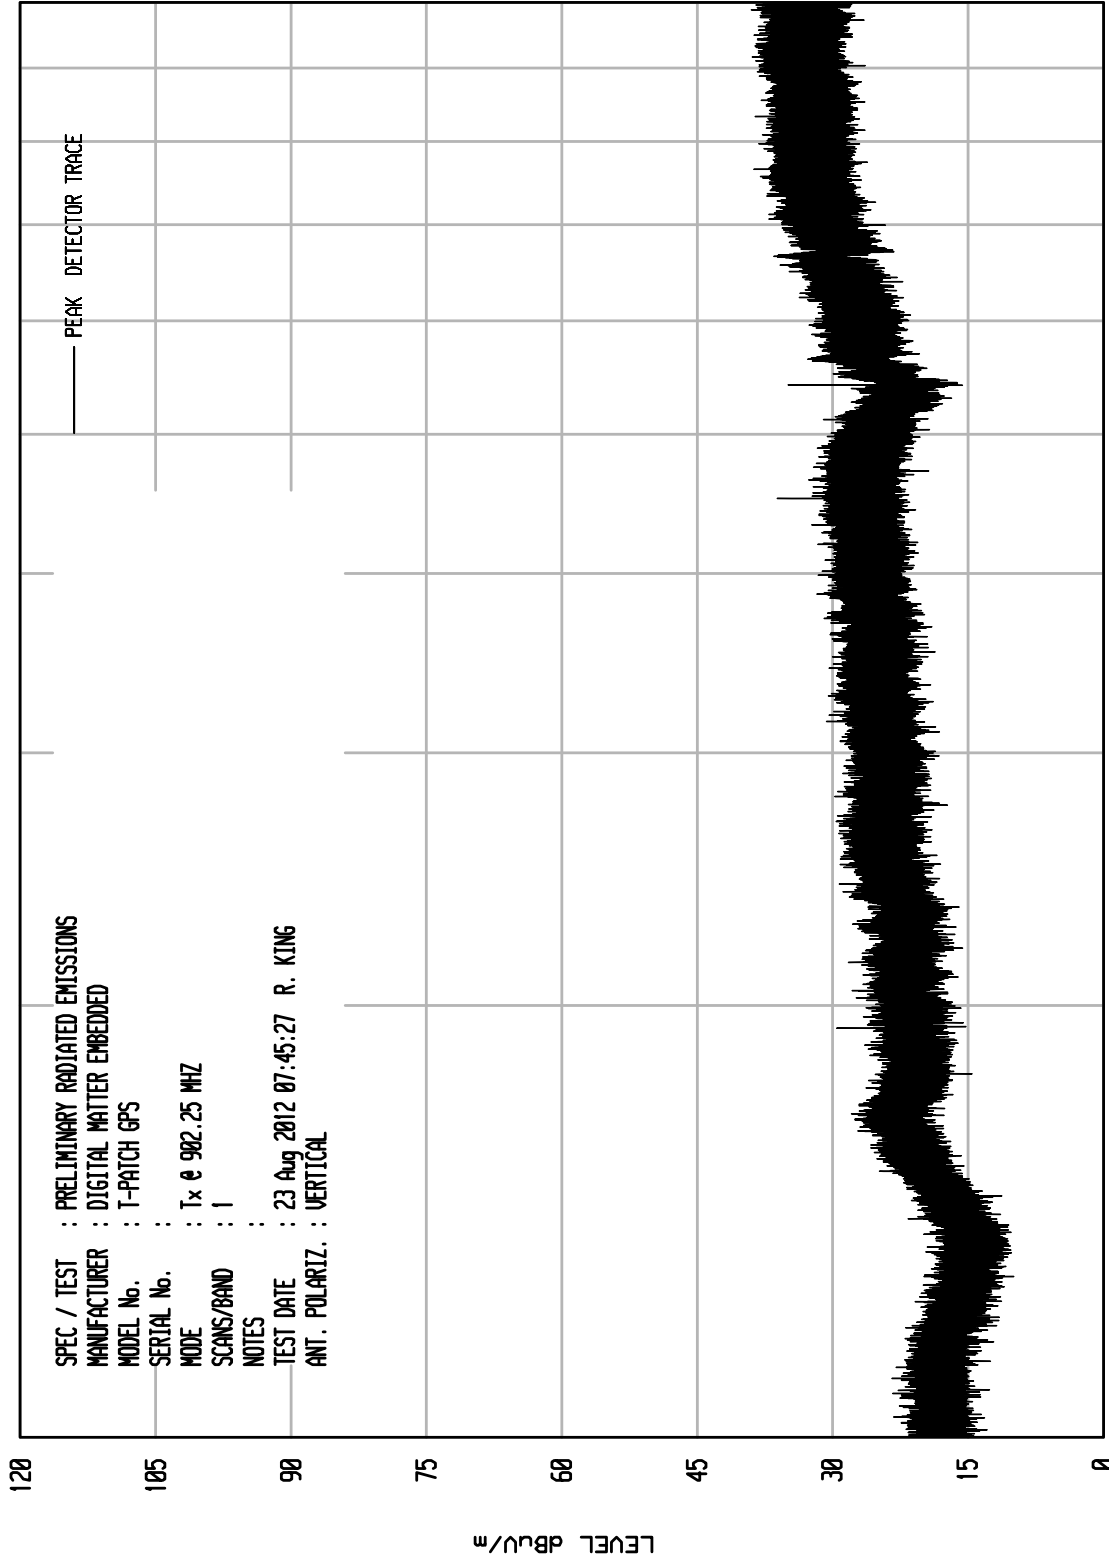

STOP = 10000

FREQUENCY MHz


START = 1000

ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

UNIU RCU EMI RUN 11

UKA1 04/26/11

SPEC / TEST : PRELIMINARY RADIATED EMISSIONS  
 MANUFACTURER : DIGITAL MATTER EMBEDDED  
 MODEL No. : T-PATCH GPS  
 SERIAL No. :  
 MODE : Tx @ 915 MHz  
 SCANS/BAND : 1  
 NOTES :  
 TEST DATE : 24 Aug 2012 13:26:40 R. KING  
 ANT. POLARIZ. : HORIZONTAL

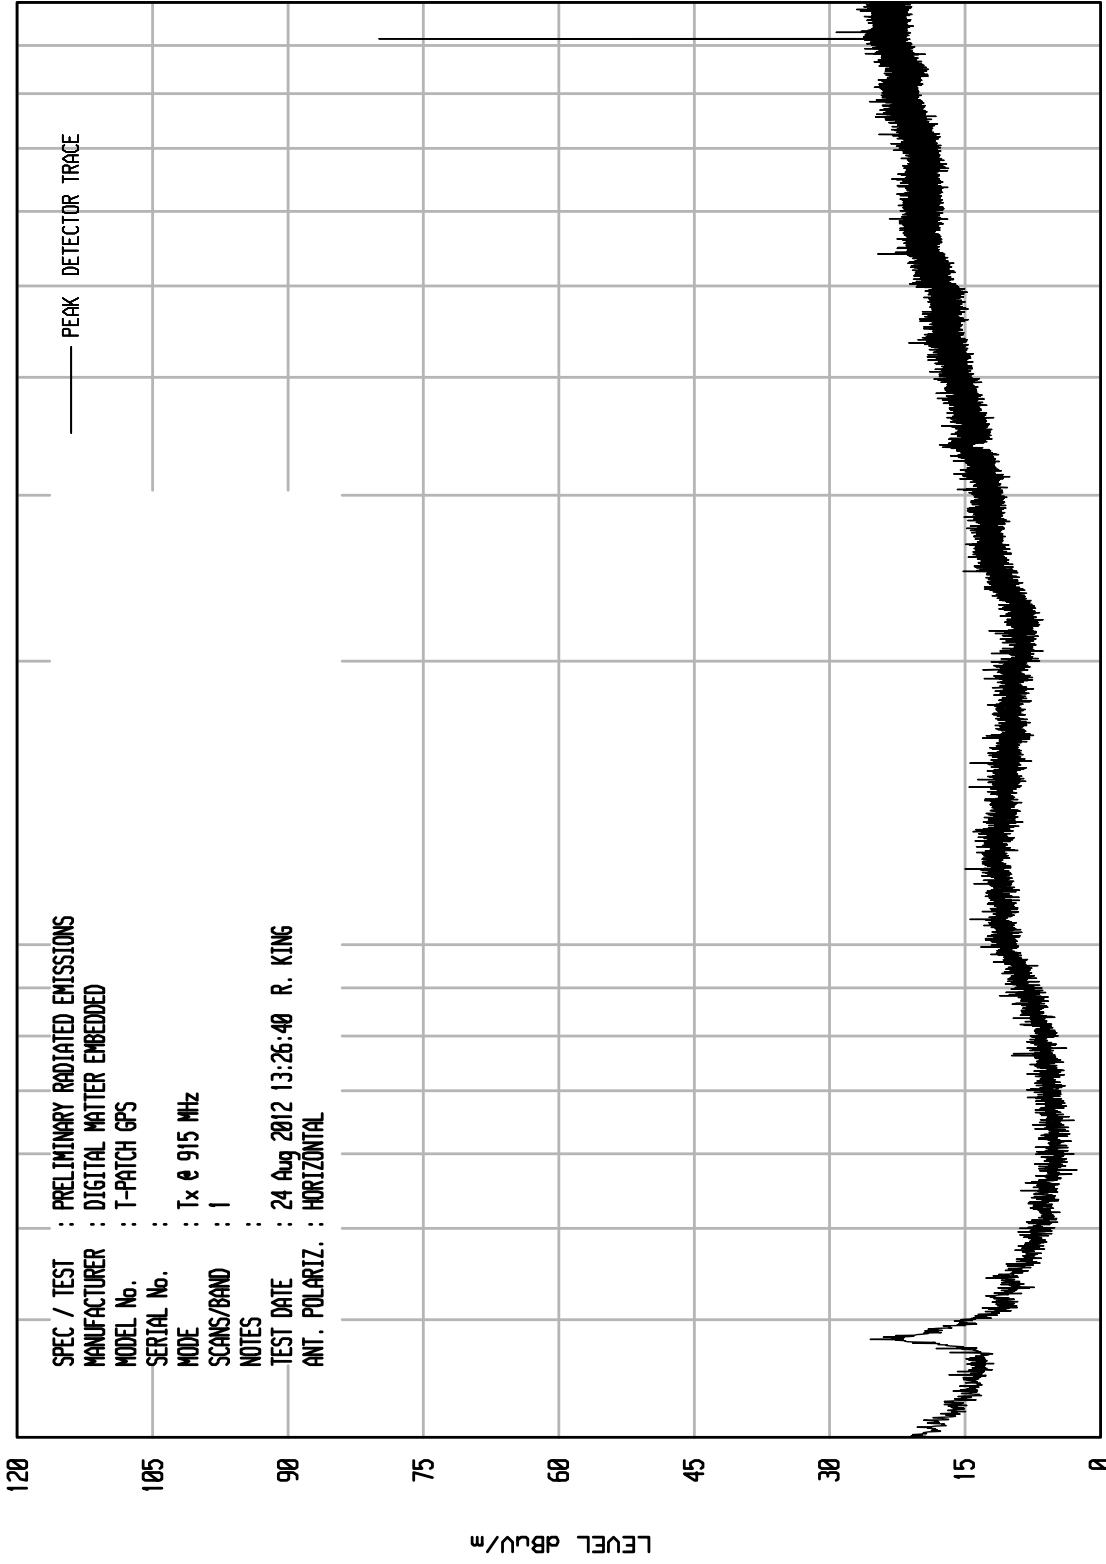

120

105

90

75

60

45

30

15

0

LEVEL dBu/m

100

FREQUENCY MHz

START = 30


STOP = 1000

ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

UNIU RCU EMI RUN 12

UKA1 04/26/11

SPEC / TEST : PRELIMINARY RADIATED EMISSIONS  
 MANUFACTURER : DIGITAL MATTER EMBEDDED  
 MODEL No. : T-PATCH GPS  
 SERIAL No. :  
 MODE : Tx @ 915 MHz  
 SCANS/BAND : 1  
 NOTES :  
 TEST DATE : 24 Aug 2012 13:28:06 R. KING  
 ANT. POLARIZ. : VERTICAL

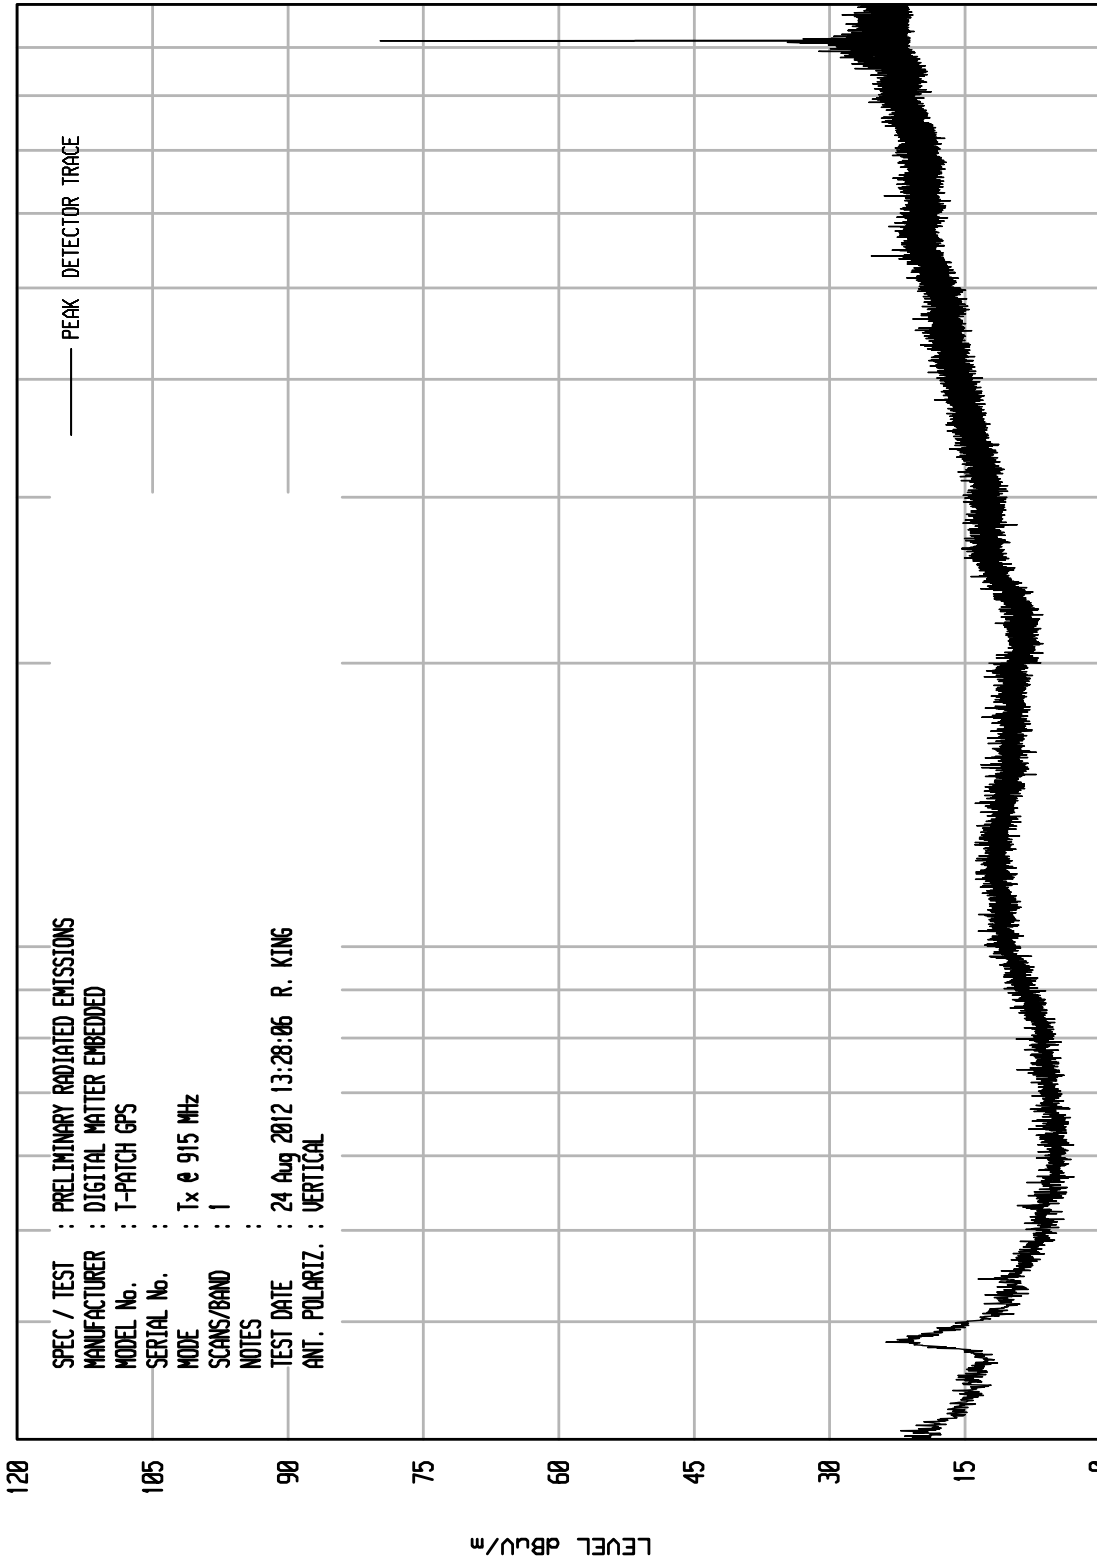

STOP = 1000

FREQUENCY MHz

100

START = 30


LEVEL dBu/m

ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

UNIU RCU EMI RUN 3

UKA1 04/26/11

SPEC / TEST : PRELIMINARY RADIATED EMISSIONS  
 MANUFACTURER : DIGITAL MATTER EMBEDDED  
 MODEL No. : T-PATCH GPS  
 SERIAL No. :  
 MODE : Tx @ 915.0 MHz  
 SCANS/BAND : 1  
 NOTES :  
 TEST DATE : 24 Aug 2012 09:52:39 R. KING  
 ANT. POLARIZ. : VERTICAL

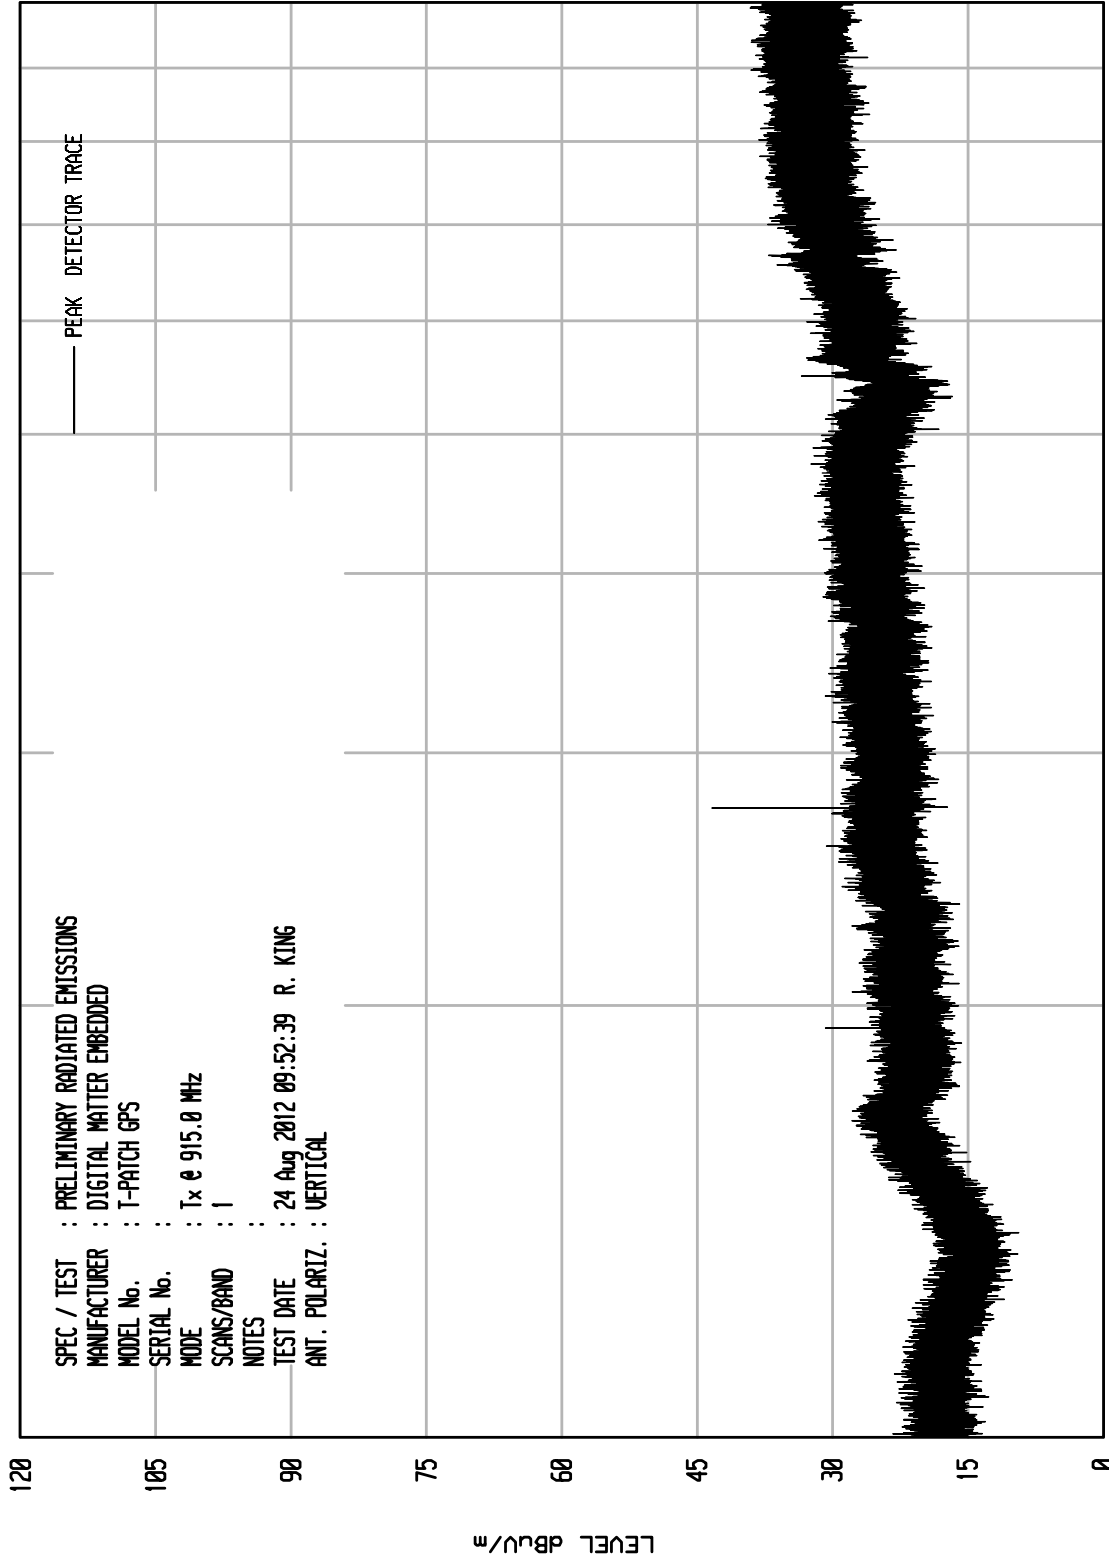

STOP = 10000

FREQUENCY MHz


START = 1000

ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

UNITU RCU EMI RUN 4

UKA1 04/26/11

SPEC / TEST : PRELIMINARY RADIATED EMISSIONS  
 MANUFACTURER : DIGITAL MATTER EMBEDDED  
 MODEL No. : T-PATCH GPS  
 SERIAL No. :  
 MODE : Tx @ 915.0 MHz  
 SCANS/BAND : 1  
 NOTES :  
 TEST DATE : 24 Aug 2012 09:55:41 R. KING  
 ANT. POLARIZ. : HORIZONTAL

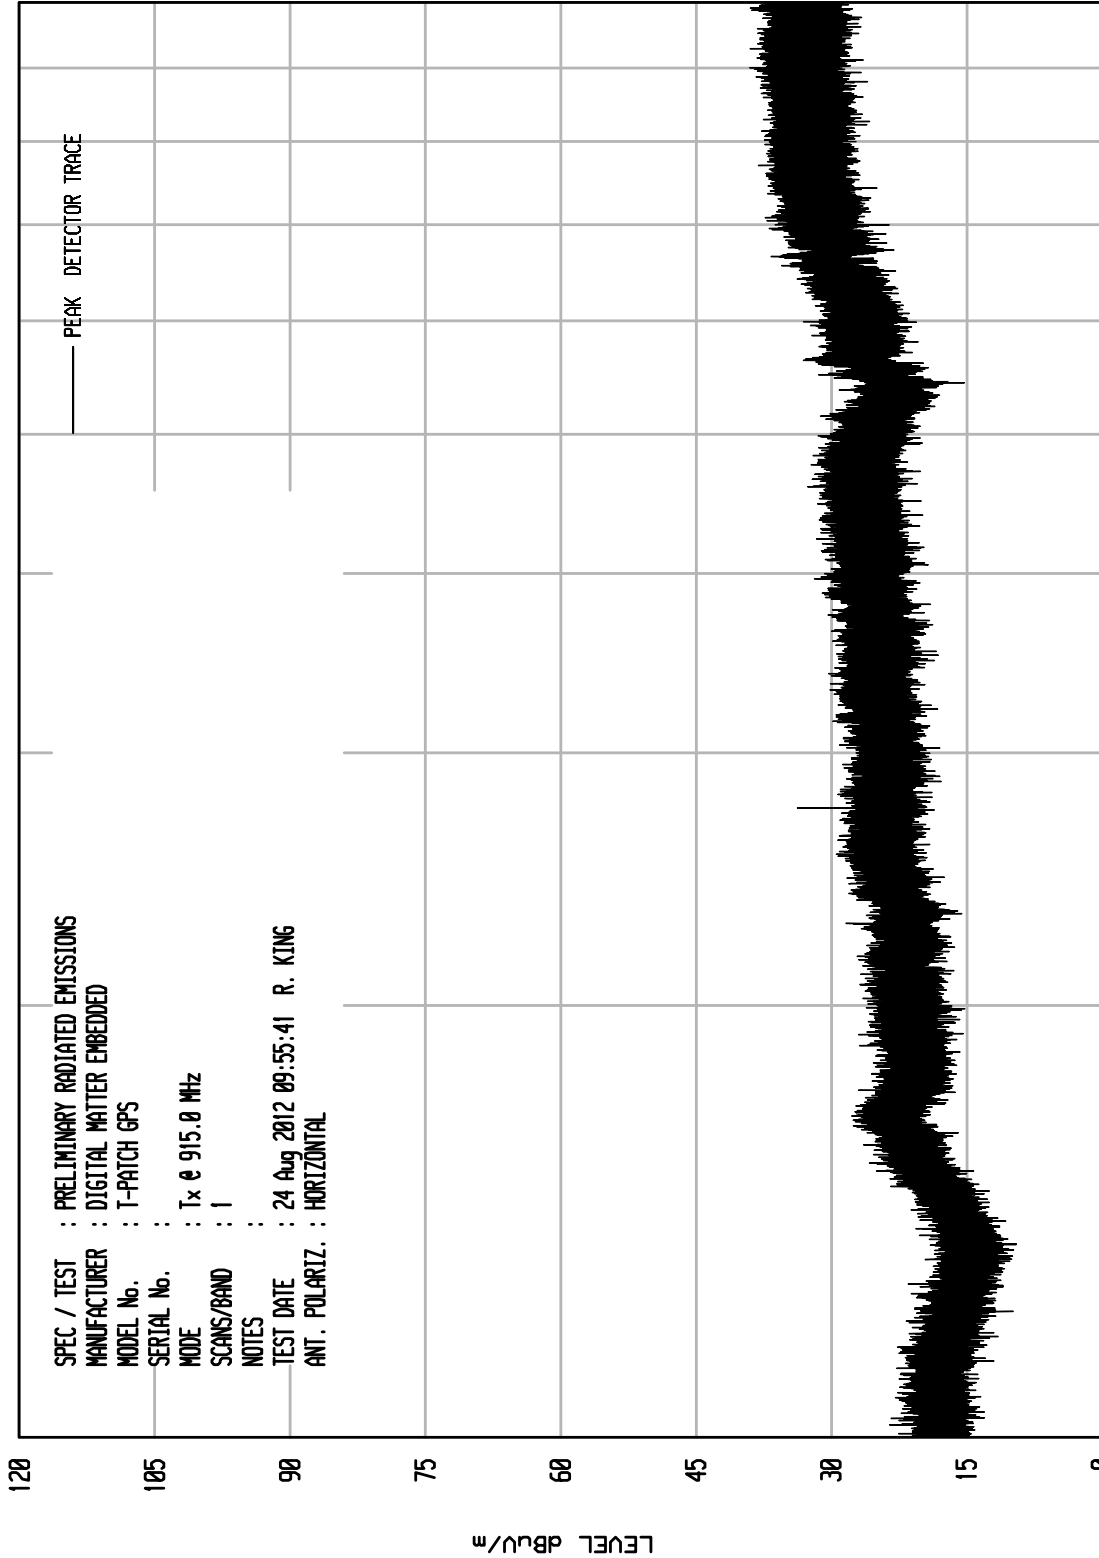

STOP = 10000

FREQUENCY MHz

START = 1000




ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

UNIU RCU EMI RUN 8

UKA1 04/26/11

SPEC / TEST : PRELIMINARY RADIATED EMISSIONS  
 MANUFACTURER : DIGITAL MATTER EMBEDDED  
 MODEL No. : T-PATCH GPS  
 SERIAL No. :  
 MODE : Tx @ 927.75MHz  
 SCANS/BAND : 1  
 NOTES :  
 TEST DATE : 24 Aug 2012 13:20:12 R. KING  
 ANT. POLARIZ. : VERTICAL

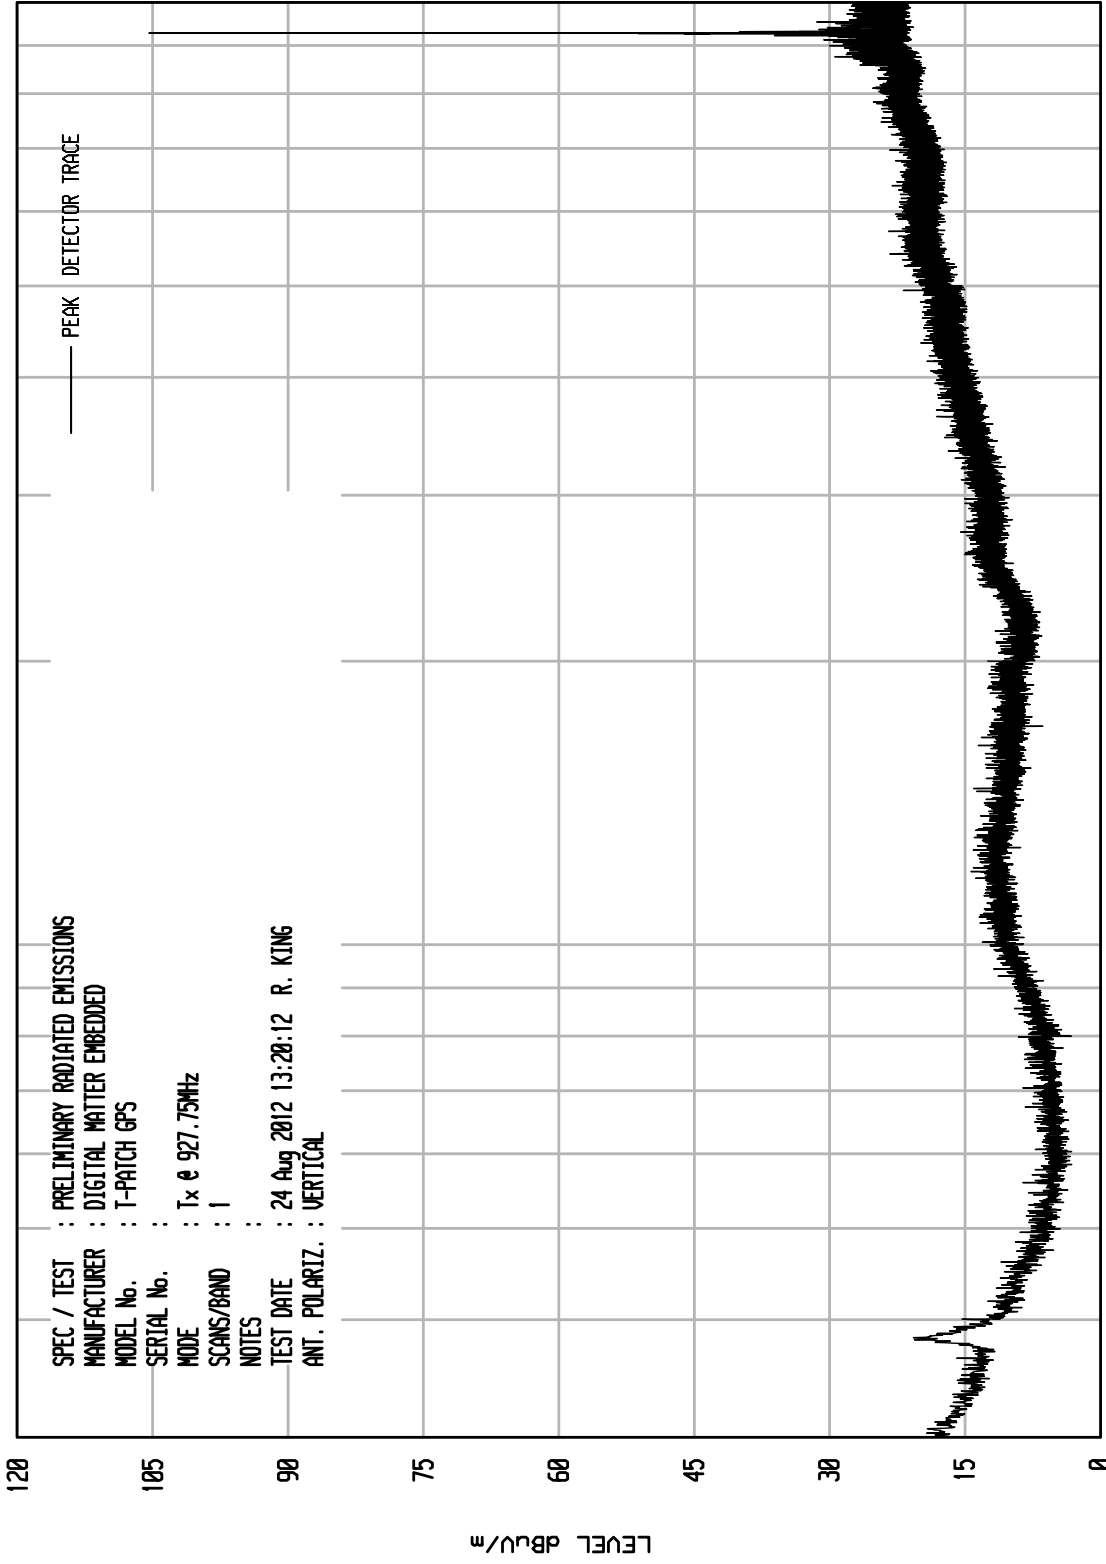

STOP = 1000

FREQUENCY MHz

100

START = 30


LEVEL dBu/m

ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

UNIU RCU EMI RUN 9

UKA1 04/26/11

SPEC / TEST : PRELIMINARY RADIATED EMISSIONS  
 MANUFACTURER : DIGITAL MATTER EMBEDDED  
 MODEL No. : T-PATCH GPS  
 SERIAL No. :  
 MODE : Tx @ 927.75MHz  
 SCANS/BAND : 1  
 NOTES :  
 TEST DATE : 24 Aug 2012 13:22:13 R. KING  
 ANT. POLARIZ. : HORIZONTAL

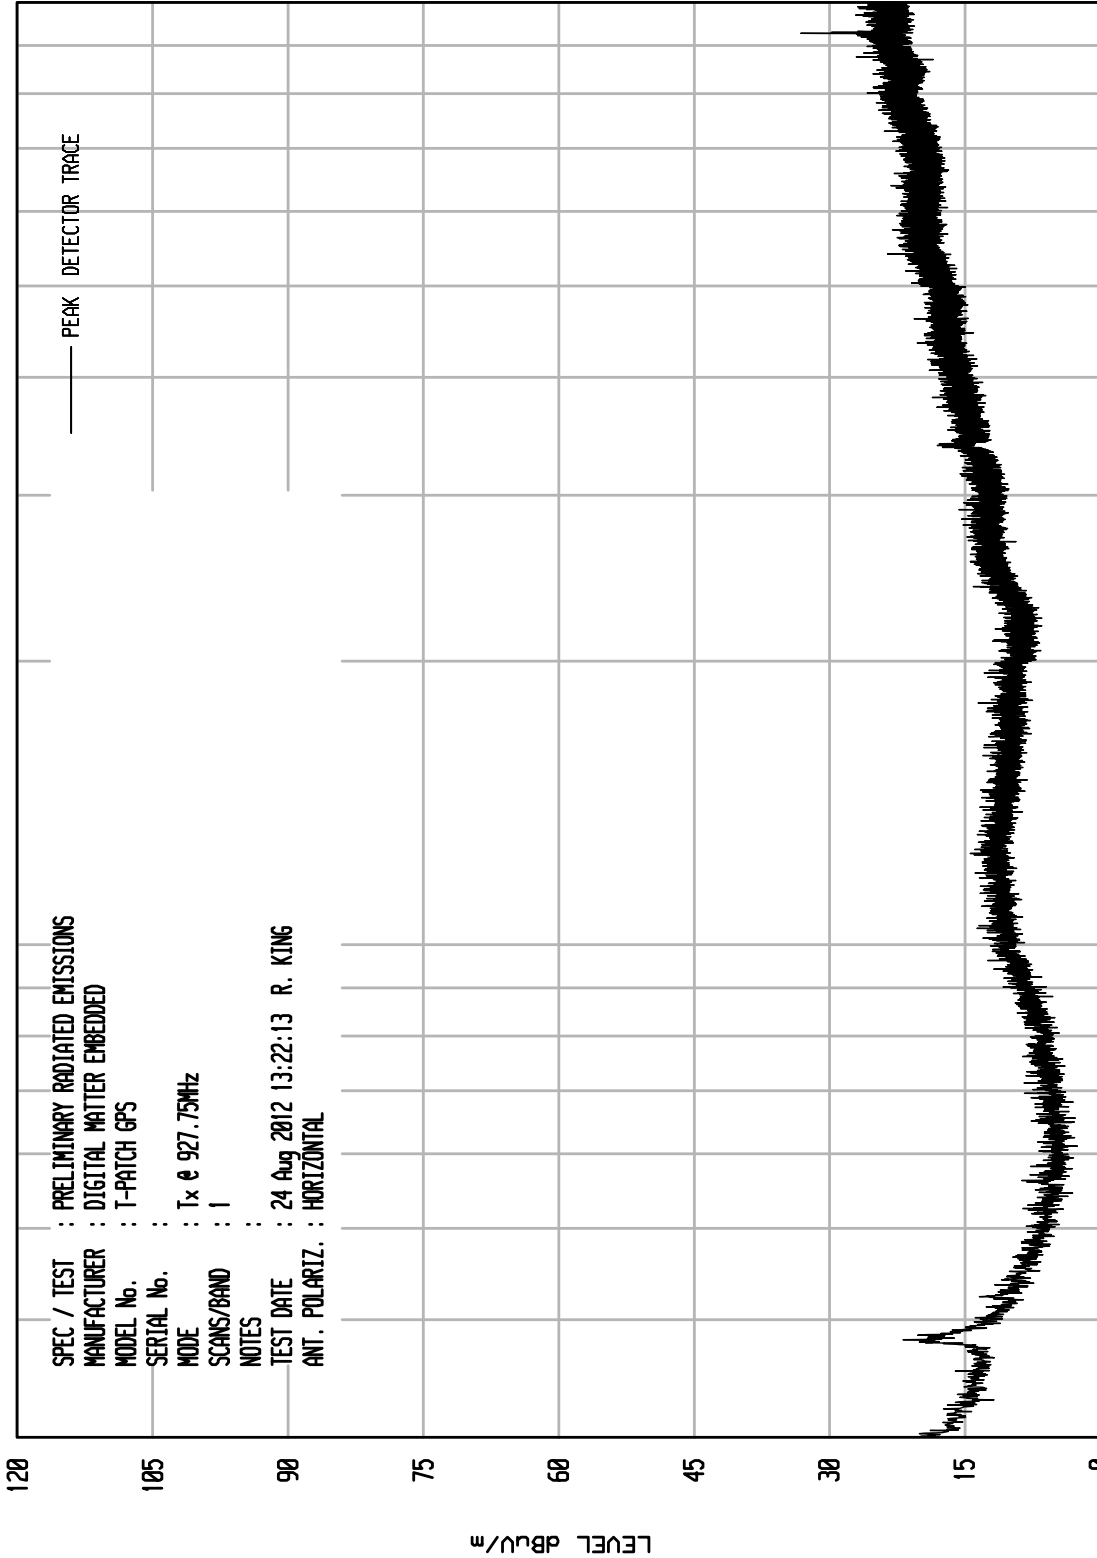

STOP = 1000


START = 30

ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

UNIU RCU EMI RUN 5

UKA1 04/26/11

SPEC / TEST : PRELIMINARY RADIATED EMISSIONS  
 MANUFACTURER : DIGITAL MATTER EMBEDDED  
 MODEL No. : T-PATCH GPS  
 SERIAL No. :  
 MODE : Tx @ 927.75MHz  
 SCANS/BAND : 1  
 NOTES :  
 TEST DATE : 24 Aug 2012 10:07:50 R. KING  
 ANT. POLARIZ. : HORIZONTAL

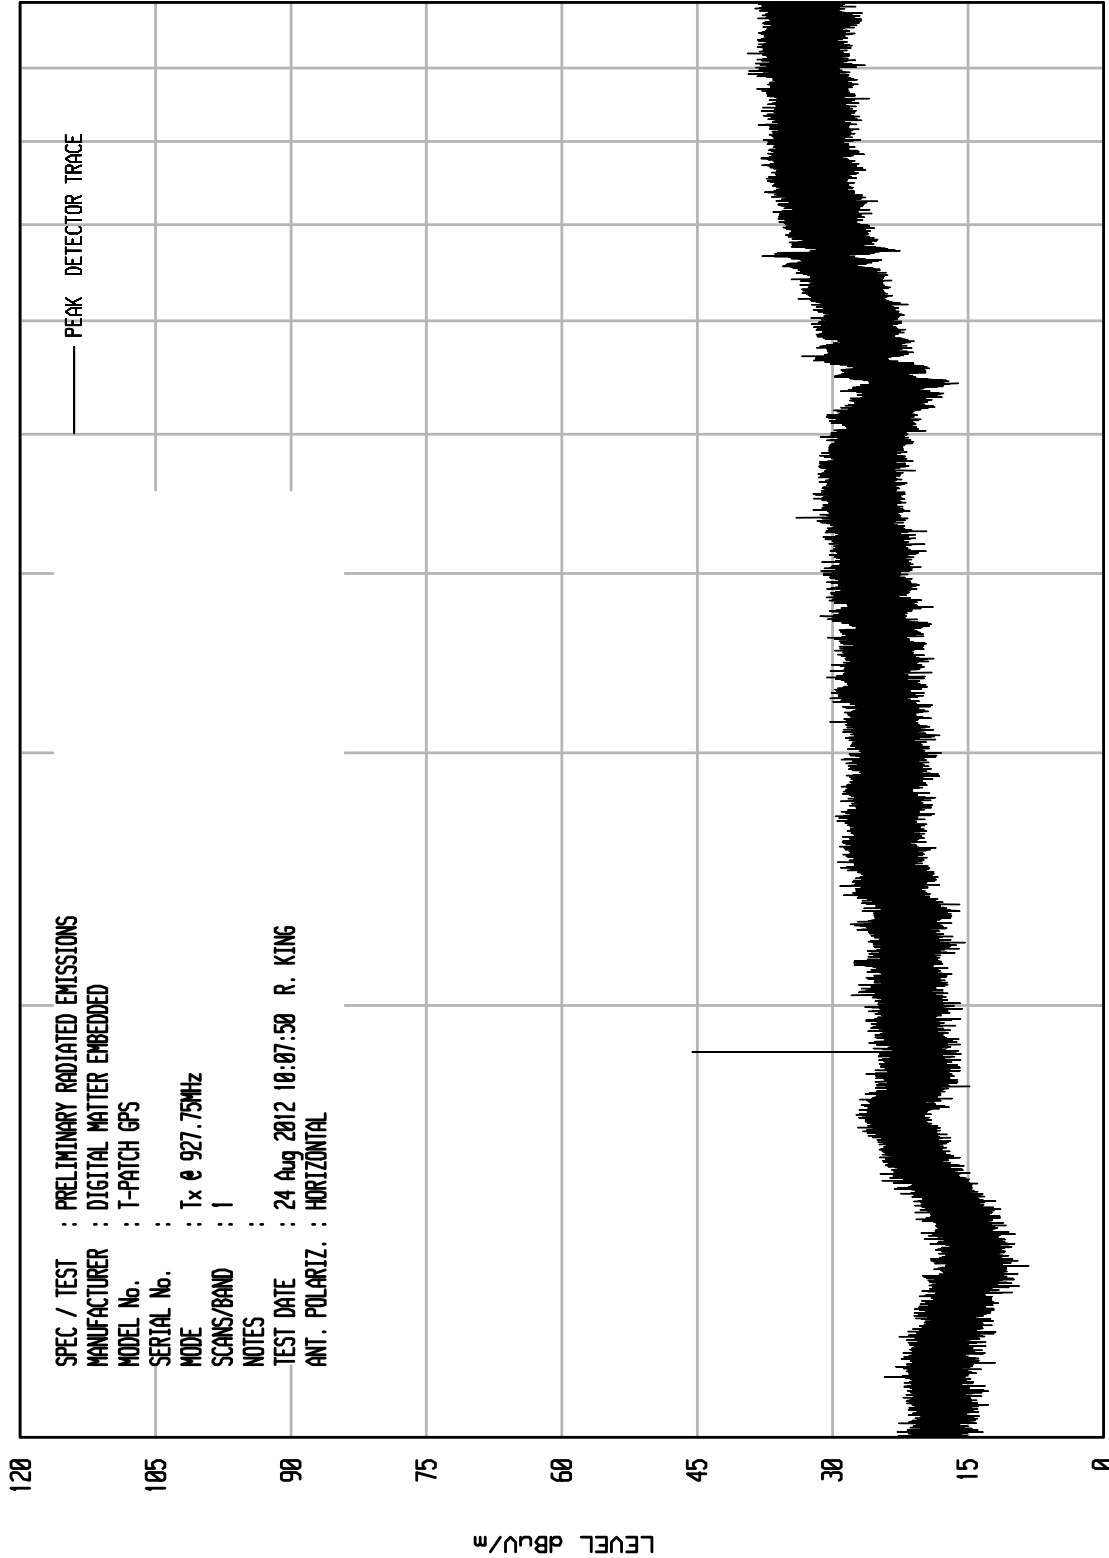

STOP = 10000

FREQUENCY MHz


START = 1000

ELITE ELECTRONIC ENGINEERING Inc.  
Downers Grove, Ill. 60515

UNITU RCU ENI RUN 6

UKA1 04/26/11

SPEC / TEST : PRELIMINARY RADIATED EMISSIONS  
 MANUFACTURER : DIGITAL MATTER EMBEDDED  
 MODEL No. : T-PATCH GPS  
 SERIAL No. :  
 MODE : Tx @ 927.75MHz  
 SCANS/BAND : 1  
 NOTES :  
 TEST DATE : 24 Aug 2012 10:10:25 R. KING  
 ANT. POLARIZ. : VERTICAL

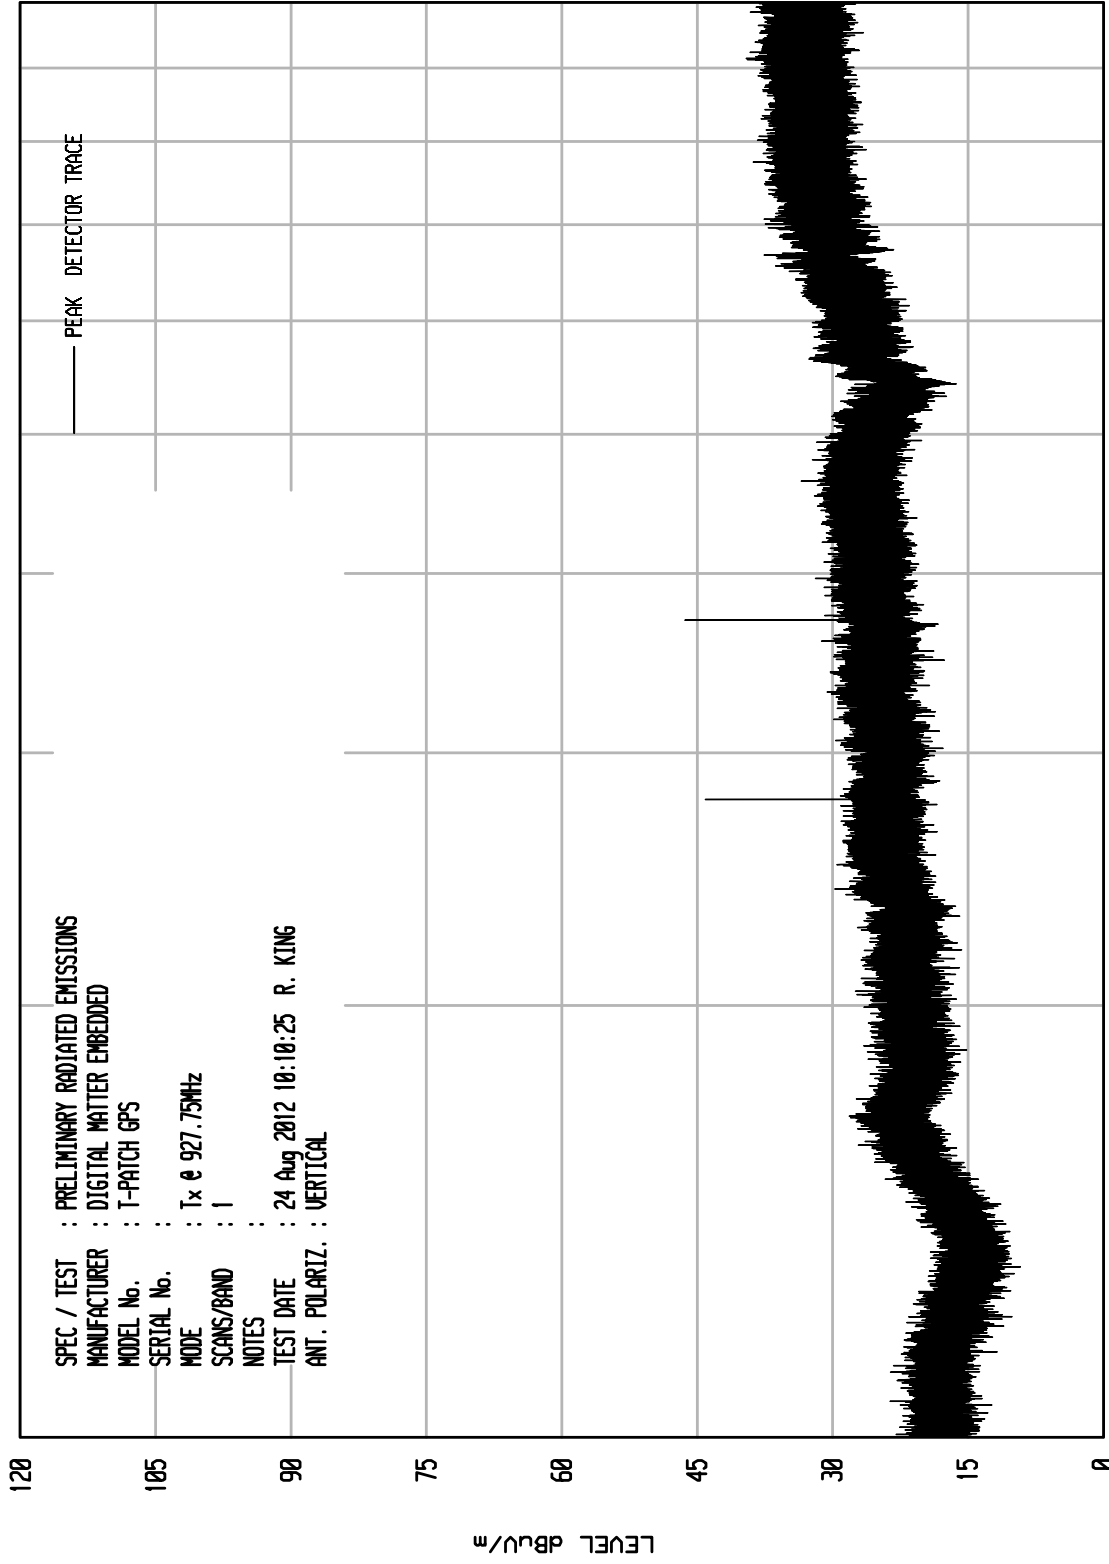

STOP = 10000

FREQUENCY MHz

START = 1000



DATA PAGE

Manufacturer : Digital Matter Embedded  
 Model No. : T-Patch GPS  
 Test Specification : FCC Part 15, Subpart C, Section 15.247, Radiated Emissions  
 Date : August 23, 2012  
 Mode : Transmit @ 902.25MHz  
 Power Setting : Maximum  
 Test Distance : 3 meters  
 Notes : Peak Detector  
       : Total = Meter Reading + Cable Loss + Antenna Factor + Preamp Gain

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
902.25	H	83.3	1.5	21.0	0.0	105.9	196668.4		
902.25	V	77.4	1.5	21.0	0.0	100.0	100284.7		
1804.50	H	56.3	2.2	28.2	-40.0	46.7	215.5	19666.8	-39.2
1804.50	V	56.5	2.2	28.2	-40.0	46.9	221.6	19666.8	-39.0
2706.75	H	58.7	2.8	31.4	-40.2	52.7	432.2	5000.0	-21.3
2706.75	V	59.0	2.8	31.4	-40.2	53.1	449.5	5000.0	-20.9
3609.00	H	54.3	3.2	33.4	-39.2	51.8	388.3	5000.0	-22.2
3609.00	V	55.4	3.2	33.4	-39.2	52.8	437.2	5000.0	-21.2
4511.25	H	46.7	3.6	34.1	-39.0	45.4	185.3	5000.0	-28.6
4511.25	V	47.7	3.6	34.1	-39.0	46.3	207.1	5000.0	-27.7
5413.50	H	43.1	3.9	36.4	-39.3	44.1	160.2	5000.0	-29.9
5413.50	V	44.3	3.9	36.4	-39.3	45.3	184.8	5000.0	-28.6
6315.75	H	44.6	4.3	37.8	-39.0	47.6	239.8	19666.8	-38.3
6315.75	V	45.0	4.3	37.8	-39.0	48.0	251.1	19666.8	-37.9
7218.00	H	46.2	4.6	38.7	-39.4	50.1	321.4	19666.8	-35.7
7218.00	V	44.6	4.6	38.7	-39.4	48.5	265.5	19666.8	-37.4
8120.25	H	46.0	4.9	39.2	-39.4	50.7	344.0	5000.0	-23.2
8120.25	V	45.3	4.9	39.2	-39.4	50.1	319.9	5000.0	-23.9
9022.50	H	45.9	4.9	40.1	-39.3	51.6	379.2	5000.0	-22.4
9022.50	V	46.1	4.9	40.1	-39.3	51.8	390.3	5000.0	-22.2



DATA PAGE

Manufacturer : Digital Matter Embedded  
 Model No. : T-Patch GPS  
 Test Specification : FCC Part 15, Subpart C, Section 15.247, Radiated Emissions  
 Date : August 23, 2012  
 Mode : Transmit @ 902.25MHz  
 Power Setting : Maximum  
 Test Distance : 3 meters  
 Notes : Average Readings in Restricted Bands  
 : Total = Meter Reading + Cable Loss + Antenna Factor + Preamp Gain + Duty Cycle Factor

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
2706.75	H	58.69	2.8	31.4	-40.2	-6.4	46.3	207.1	500.0	-7.7
2706.75	V	59.0	2.8	31.4	-40.2	-6.4	46.7	215.4	500.0	-7.3
3609.00	H	54.3	3.2	33.4	-39.2	-6.4	45.4	186.1	500.0	-8.6
3609.00	V	55.4	3.2	33.4	-39.2	-6.4	46.4	209.5	500.0	-7.6
4511.25	H	46.7	3.6	34.1	-39.0	-6.4	39.0	88.8	500.0	-15.0
4511.25	V	47.7	3.6	34.1	-39.0	-6.4	39.9	99.3	500.0	-14.0
5413.50	H	43.1	3.9	36.4	-39.3	-6.4	37.7	76.8	500.0	-16.3
5413.50	V	44.3	3.9	36.4	-39.3	-6.4	38.9	88.5	500.0	-15.0
8120.25	H	46.0	4.9	39.2	-39.4	-6.4	44.3	164.8	500.0	-9.6
8120.25	V	45.3	4.9	39.2	-39.4	-6.4	43.7	153.3	500.0	-10.3
9022.50	H	45.9	4.9	40.1	-39.3	-6.4	45.2	181.7	500.0	-8.8
9022.50	V	46.1	4.9	40.1	-39.3	-6.4	45.4	187.0	500.0	-8.5



DATA PAGE

Manufacturer : Digital Matter Embedded  
 Model No. : T-Patch GPS  
 Test Specification : FCC Part 15, Subpart C, Section 15.247, Radiated Emissions  
 Date : August 23, 2012  
 Mode : Transmit @ 915MHz  
 Power Setting : Maximum  
 Test Distance : 3 meters  
 Notes : Peak Detector  
       : Total = Meter Reading + Cable Loss + Antenna Factor + Preamp Gain

Freq (MHz)	Ant Pol	Meter Reading (dBUV)	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
915.00	H	81.2	1.6	20.4	0.0	103.2	144221.7		
915.00	V	76.4	1.6	20.4	0.0	98.4	83086.5		
1830.00	H	57.4	2.2	28.3	-40.0	47.9	248.8	14422.2	-35.3
1830.00	V	58.9	2.2	28.3	-40.0	49.5	298.5	14422.2	-33.7
2745.00	H	58.3	2.8	31.6	-40.1	52.6	425.7	5000.0	-21.4
2745.00	V	59.2	2.8	31.6	-40.1	53.4	469.4	5000.0	-20.5
3660.00	H	53.3	3.3	33.5	-39.1	50.9	350.4	5000.0	-23.1
3660.00	V	54.3	3.3	33.5	-39.1	51.9	393.1	5000.0	-22.1
4575.00	H	47.3	3.6	34.3	-39.0	46.1	202.9	5000.0	-27.8
4575.00	V	47.4	3.6	34.3	-39.0	46.3	206.0	5000.0	-27.7
5490.00	H	45.0	3.9	36.3	-39.3	45.9	197.4	14422.2	-37.3
5490.00	V	47.8	3.9	36.3	-39.3	48.7	273.7	14422.2	-34.4
6405.00	H	43.2	4.3	37.5	-39.0	46.0	200.3	14422.2	-37.1
6405.00	V	45.1	4.3	37.5	-39.0	47.9	248.1	14422.2	-35.3
7320.00	H	44.3	4.7	38.9	-39.4	48.5	266.0	5000.0	-25.5
7320.00	V	44.2	4.7	38.9	-39.4	48.4	262.0	5000.0	-25.6
8235.00	H	46.1	4.9	39.2	-39.4	50.9	349.6	5000.0	-23.1
8235.00	V	44.7	4.9	39.2	-39.4	49.5	298.6	5000.0	-24.5
9150.00	H	44.9	5.0	40.0	-39.3	50.6	337.8	5000.0	-23.4
9150.00	V	44.9	5.0	40.0	-39.3	50.6	337.8	5000.0	-23.4



DATA PAGE

Manufacturer : Digital Matter Embedded  
 Model No. : T-Patch GPS  
 Test Specification : FCC Part 15, Subpart C, Section 15.247, Radiated Emissions  
 Date : August 23, 2012  
 Mode : Transmit @ 915MHz  
 Power Setting : Maximum  
 Test Distance : 3 meters  
 Notes : Average Readings in Restricted Bands  
 : Total = Meter Reading + Cable Loss + Antenna Factor + Preamp Gain + Duty Cycle Factor

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
2745.00	H	58.31	2.8	31.6	-40.1	-6.4	46.2	204.0	500.0	-7.8
2745.00	V	59.2	2.8	31.6	-40.1	-6.4	47.0	224.9	500.0	-6.9
3660.00	H	53.3	3.3	33.5	-39.1	-6.4	44.5	167.9	500.0	-9.5
3660.00	V	54.3	3.3	33.5	-39.1	-6.4	45.5	188.4	500.0	-8.5
4575.00	H	47.3	3.6	34.3	-39.0	-6.4	39.8	97.2	500.0	-14.2
4575.00	V	47.4	3.6	34.3	-39.0	-6.4	39.9	98.7	500.0	-14.1
7320.00	H	44.3	4.7	38.9	-39.4	-6.4	42.1	127.4	500.0	-11.9
7320.00	V	44.2	4.7	38.9	-39.4	-6.4	42.0	125.5	500.0	-12.0
8235.00	H	46.1	4.9	39.2	-39.4	-6.4	44.5	167.5	500.0	-9.5
8235.00	V	44.7	4.9	39.2	-39.4	-6.4	43.1	143.1	500.0	-10.9
9150.00	H	44.9	5.0	40.0	-39.3	-6.4	44.2	161.8	500.0	-9.8
9150.00	V	44.9	5.0	40.0	-39.3	-6.4	44.2	161.8	500.0	-9.8





DATA PAGE

Manufacturer : Digital Matter Embedded  
 Model No. : T-Patch GPS  
 Test Specification : FCC Part 15, Subpart C, Section 15.247, Radiated Emissions  
 Date : August 23, 2012  
 Mode : Transmit @ 927.75MHz  
 Power Setting : Maximum  
 Test Distance : 3 meters  
 Notes : Peak Detector  
       : Total = Meter Reading + Cable Loss + Antenna Factor + Preamp Gain


Freq (MHz)	Ant Pol	Meter Reading (dBUV)	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
927.75	H	82.6	1.6	20.2	0.0	104.4	165226.4		
927.75	V	76.6	1.6	20.2	0.0	98.4	83191.6		
1855.50	H	59.4	2.3	28.4	-40.0	50.1	320.8	16522.6	-34.2
1855.50	V	61.3	2.3	28.4	-40.0	52.0	398.8	16522.6	-32.3
2783.25	H	55.5	2.8	31.7	-40.1	49.9	312.6	5000.0	-24.1
2783.25	V	56.6	2.8	31.7	-40.1	51.0	355.6	5000.0	-23.0
3711.00	H	52.0	3.3	33.5	-39.1	49.7	304.7	5000.0	-24.3
3711.00	V	56.0	3.3	33.5	-39.1	53.7	484.0	5000.0	-20.3
4638.75	H	46.2	3.6	34.6	-39.1	45.4	185.8	5000.0	-28.6
4638.75	V	46.6	3.6	34.6	-39.1	45.8	194.1	5000.0	-28.2
5566.50	H	43.9	4.0	36.6	-39.3	45.1	180.8	16522.6	-39.2
5566.50	V	42.4	4.0	36.6	-39.3	43.6	152.1	16522.6	-40.7
6494.25	H	42.1	4.4	37.2	-39.0	44.7	171.6	16522.6	-39.7
6494.25	V	45.1	4.4	37.2	-39.0	47.7	241.5	16522.6	-36.7
7422.00	H	46.0	4.7	38.9	-39.3	50.3	327.5	5000.0	-23.7
7422.00	V	45.6	4.7	38.9	-39.3	49.9	313.5	5000.0	-24.1
8349.75	H	45.5	4.9	39.2	-39.4	50.3	327.0	5000.0	-23.7
8349.75	V	45.3	4.9	39.2	-39.4	50.2	322.2	5000.0	-23.8
9277.50	H	44.8	5.0	40.0	-39.3	50.6	337.3	16522.6	-33.8
9277.50	V	45.2	5.0	40.0	-39.3	51.0	352.8	16522.6	-33.4



DATA PAGE

Manufacturer : Digital Matter Embedded  
 Model No. : T-Patch GPS  
 Test Specification : FCC Part 15, Subpart C, Section 15.247, Radiated Emissions  
 Date : August 23, 2012  
 Mode : Transmit @ 927.75MHz  
 Power Setting : Maximum  
 Test Distance : 3 meters  
 Notes : Average Readings in Restricted Bands  
 : Total = Meter Reading + Cable Loss + Antenna Factor + Preamp Gain + Duty Cycle Factor

Freq (MHz)	Ant Pol	Meter Reading (dBUV)	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Duty Cycle (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
2783.25	H	55.5	2.8	31.7	-40.1	-6.4	43.5	149.8	500.0	-10.5
2783.25	V	56.6	2.8	31.7	-40.1	-6.4	44.6	170.4	500.0	-9.3
3711.00	H	52.0	3.3	33.5	-39.1	-6.4	43.3	146.0	500.0	-10.7
3711.00	V	56.0	3.3	33.5	-39.1	-6.4	47.3	231.9	500.0	-6.7
4638.75	H	46.2	3.6	34.6	-39.1	-6.4	39.0	89.0	500.0	-15.0
4638.75	V	46.6	3.6	34.6	-39.1	-6.4	39.4	93.0	500.0	-14.6
7422.00	H	46.0	4.7	38.9	-39.3	-6.4	43.9	156.9	500.0	-10.1
7422.00	V	45.6	4.7	38.9	-39.3	-6.4	43.5	150.2	500.0	-10.4
8349.75	H	45.5	4.9	39.2	-39.4	-6.4	43.9	156.7	500.0	-10.1
8349.75	V	45.3	4.9	39.2	-39.4	-6.4	43.8	154.4	500.0	-10.2

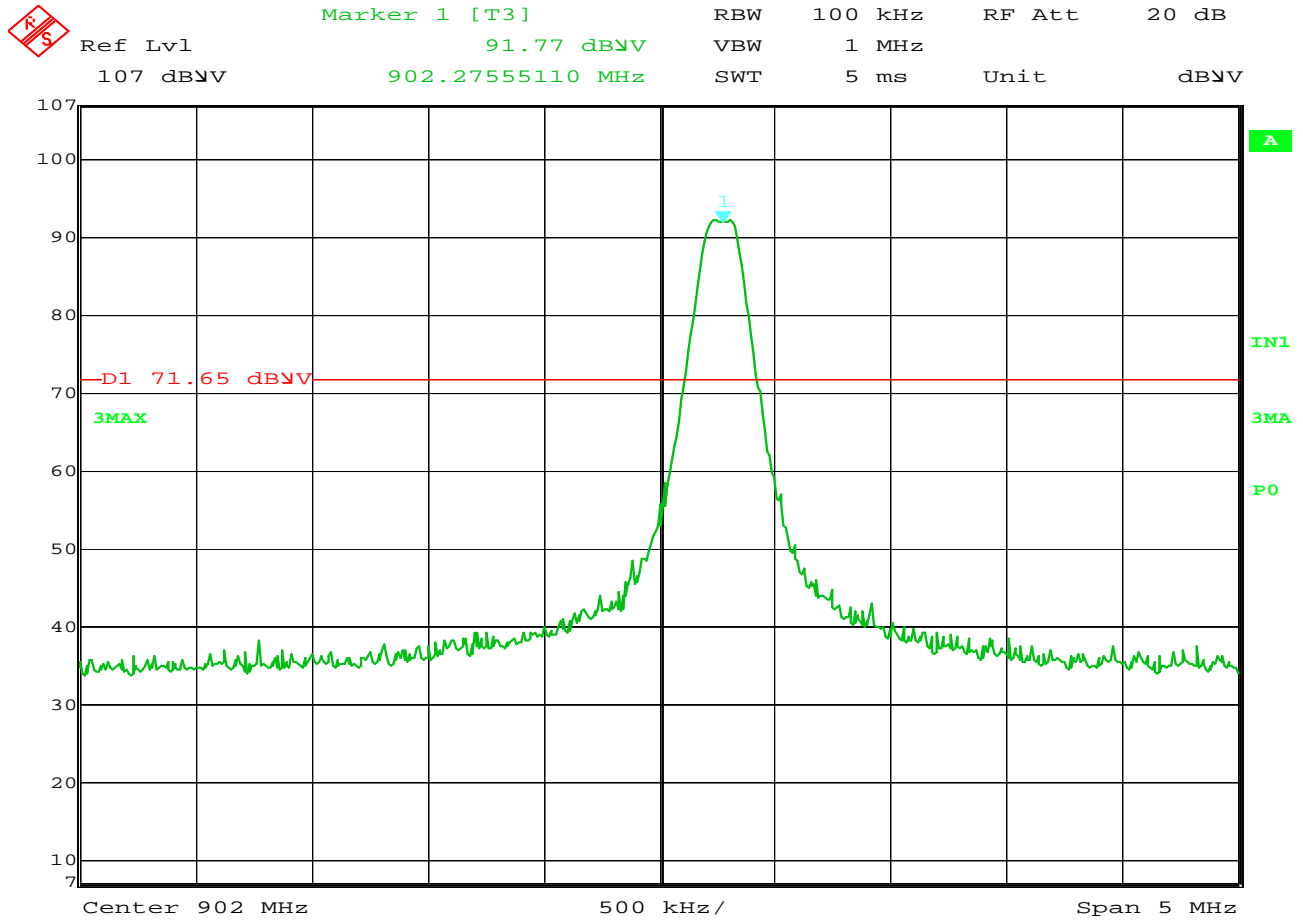


Date: 22.AUG.2012 07:38:12

**15.247(d) Band Edge Compliance**

MANUFACTURER : Digital Matter Embedded  
 MODEL NUMBER : T-Patch GPS  
 TEST MODE : Tx @ 902.25MHz  
 TEST PARAMETERS : Band Edge Test  
 NOTES : Display Line D1 represents the 20dB down point from the peak emissions in a 100kHz bandwidth. The center line represents the band edge (902MHz).  
 NOTES : Maximum Power Setting



Ref Lvl	Marker 1 [T3]	RBW	100 kHz	RF Att	20 dB
107 dBμV	91.45 dBμV	VBW	1 MHz		
	902.2755110 MHz	SWT	5 ms	Unit	dBμV

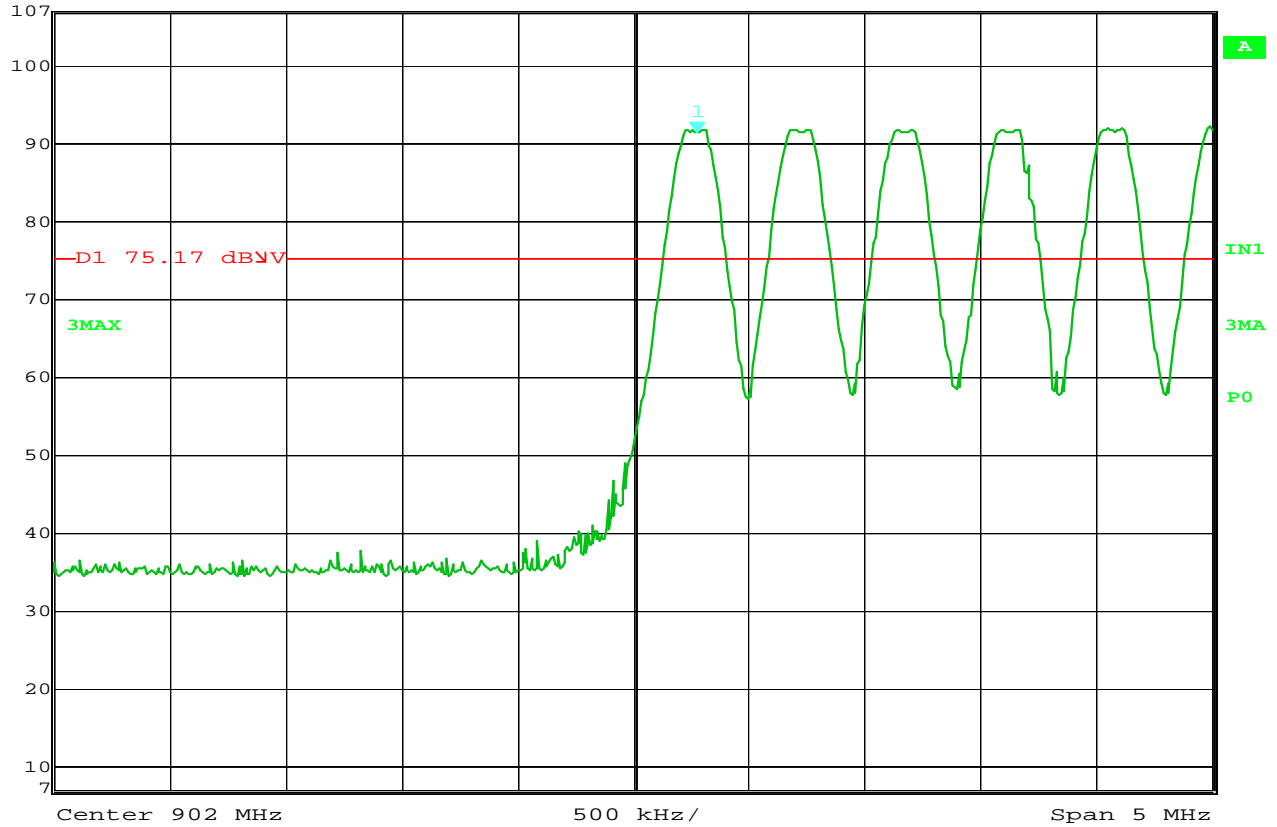


Date: 22.AUG.2012 07:36:12

### 15.247(d) Band Edge Compliance

MANUFACTURER : Digital Matter Embedded  
 MODEL NUMBER : T-Patch GPS  
 TEST MODE : Hopping Enabled  
 TEST PARAMETERS : Band Edge Test  
 NOTES : Display Line D1 represents the 20dB down point from the peak emissions in a 100kHz bandwidth. The center line represents the band edge (902MHz).  
 NOTES : Maximum Power Setting



Ref Lvl	Marker 1 [T3]	RBW	100 kHz	RF Att	20 dB
107 dBμV	95.90 dBμV	VBW	1 MHz		
	927.80460922 MHz	SWT	5 ms	Unit	dBμV

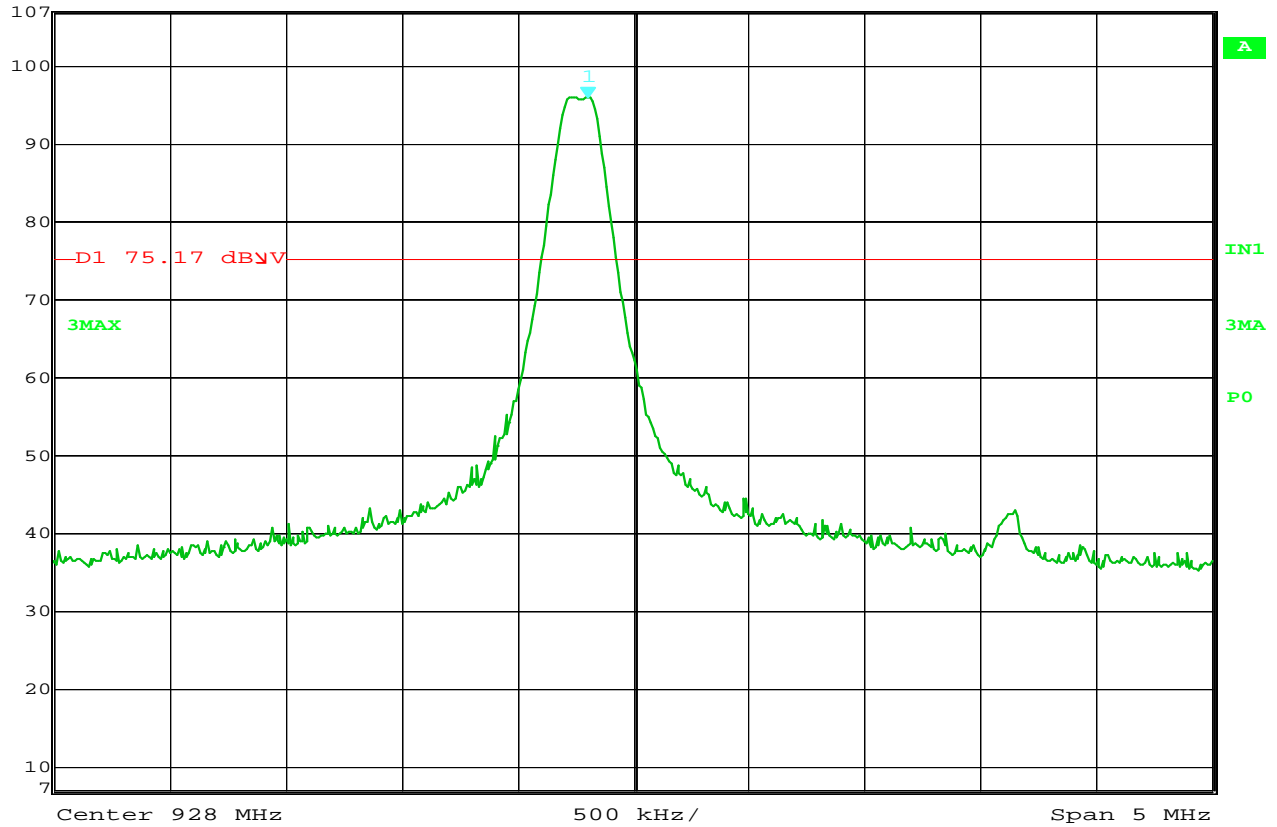


Date: 22.AUG.2012 07:18:00

### 15.247(d) Band Edge Compliance

MANUFACTURER : Digital Matter Embedded  
 MODEL NUMBER : T-Patch GPS  
 TEST MODE : Tx @ 927.75MHz  
 TEST PARAMETERS : Band Edge Test  
 NOTES : Display Line D1 represents the 20dB down point from the peak emissions in a 100kHz bandwidth. The center line represents the band edge (928MHz).  
 NOTES : Maximum Power Setting



Marker 1 [T3] RBW 100 kHz RF Att 20 dB  
 Ref Lvl 93.34 dBµV VBW 1 MHz  
 97 dBµV 927.76452906 MHz SWT 5 ms Unit dBµV

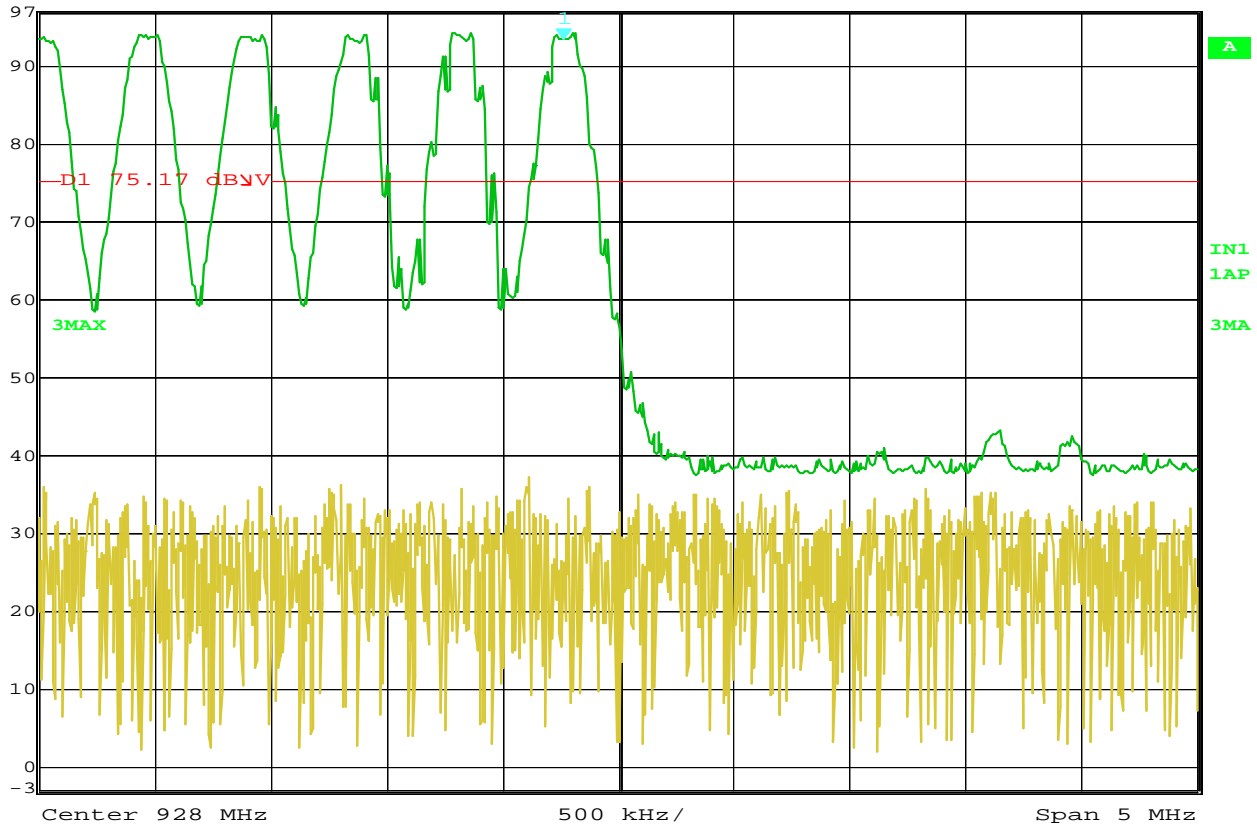

Date: 7.SEP.2012 06:19:49

### 15.247(d) Band Edge Compliance

MANUFACTURER : Digital Matter Embedded  
 MODEL NUMBER : T-Patch GPS  
 TEST MODE : Hopping Enabled  
 TEST PARAMETERS : Band Edge Test  
 NOTES : Display Line D1 represents the 20dB down point from the peak emissions in a 100kHz bandwidth. The center line represents the band edge (928MHz).  
 NOTES : Maximum Power Setting