




IntriCon Corporation
L200B Wireless Hearing Aid
FCC 15.247:2017
Bluetooth Radio

Report # INCN0002.1

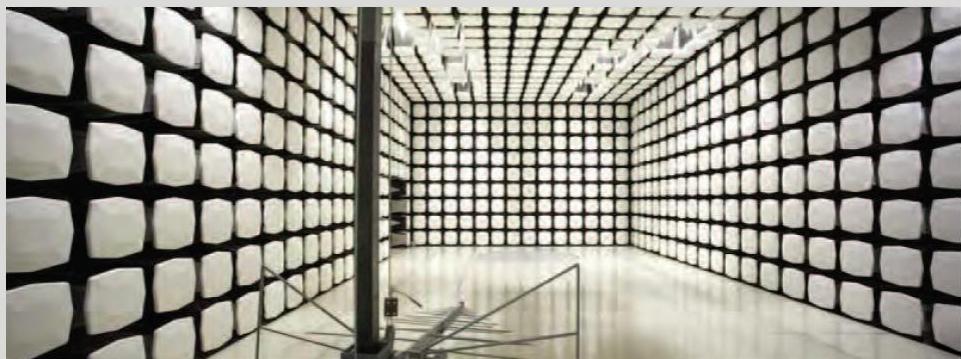

NVLAP Lab Code: 200881-0

This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America. This Report shall not be reproduced, except in full without written approval of the laboratory.



2017-1-25

CERTIFICATE OF TEST

Last Date of Test: April 10, 2017
IntriCon Corporation
Model: L200B

Radio Equipment Testing

Standards

Specification	Method
FCC 15.247:2017	ANSI C63.10:2013, KDB 558074

Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required for a battery powered EUT.
11.12.1, 11.13.2, 6.5, 6.6	Spurious Radiated Emissions	Yes	Pass	
11.6	Duty Cycle	Yes	Pass	
11.8.2	Occupied Bandwidth	Yes	Pass	
11.9.1.1	Output Power	Yes	Pass	
11.10.2	Power Spectral Density	Yes	Pass	
11.11	Band Edge Compliance	Yes	Pass	
11.11	Spurious Conducted Emissions	Yes	Pass	

Deviations From Test Standards

None

Approved By:

A handwritten signature in blue ink, appearing to read "Matt Nuernberg".

Matt Nuernberg, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information.

REVISION HISTORY



Revision Number	Description	Date	Page Number
00	None		

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

European Union

European Commission – Validated by the European Commission as a Notified Body under the R&TTE Directive.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIP / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://portlandcustomer.element.com/ts/scope/scope.htm>

<http://gsi.nist.gov/global/docs/cabs/designations.html>

MEASUREMENT UNCERTAINTY



Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

<u>Test</u>	<u>+ MU</u>	<u>- MU</u>
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

FACILITIES



California Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-08, MN10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-688-5136	New York Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Oregon Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
-------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------

NVLAP

NVLAP Lab Code: 200676-0 NVLAP Lab Code: 200881-0 NVLAP Lab Code: 200761-0 NVLAP Lab Code: 200630-0 NVLAP Lab Code: 201049-0 NVLAP Lab Code: 200629-0

Innovation, Science and Economic Development Canada

2834B-1, 2834B-3	2834E-1	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
------------------	---------	-----	------------------	---------	---------

BSMI


SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
----------------	----------------	-----	---------------	----------------	----------------

VCCI

A-0029	A-0109	N/A	A-0108	A-0201	A-0110
--------	--------	-----	--------	--------	--------


Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA

US0158	US0175	N/A	US0017	US0191	US0157
--------	--------	-----	--------	--------	--------

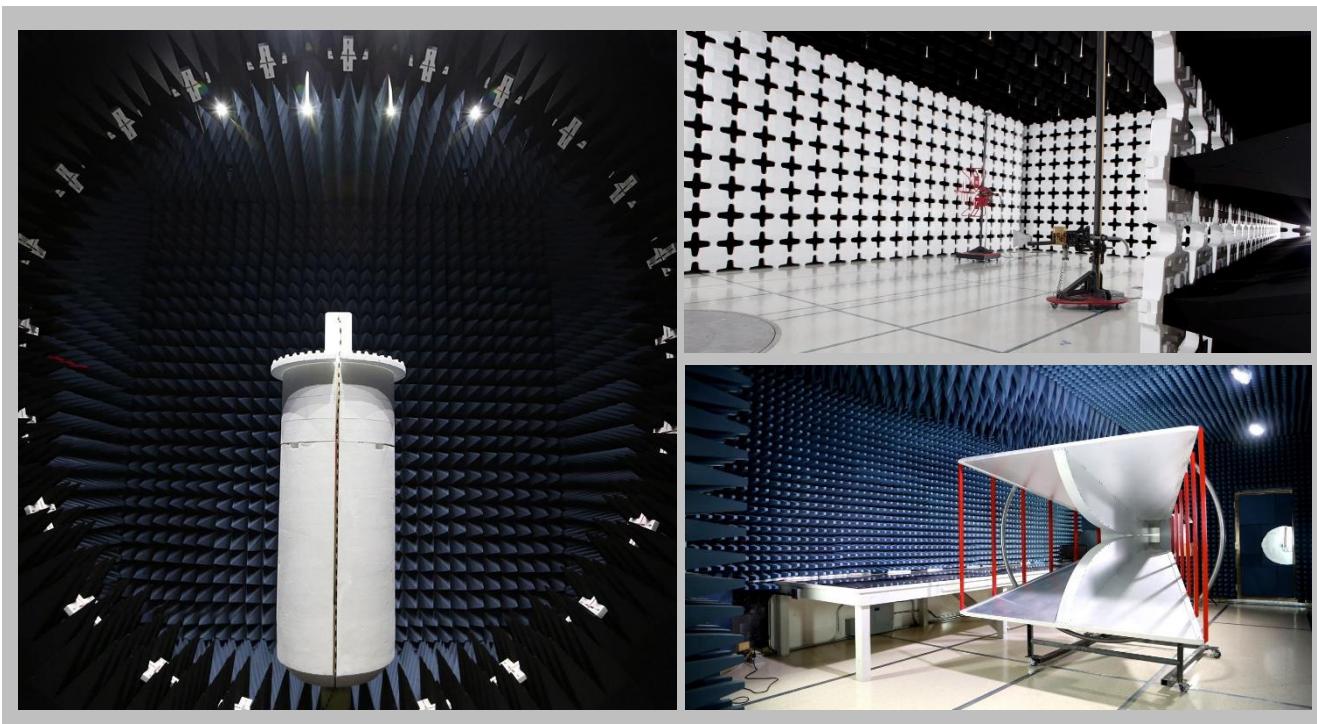


Test Setup Block Diagrams


Antenna Port Conducted Measurements

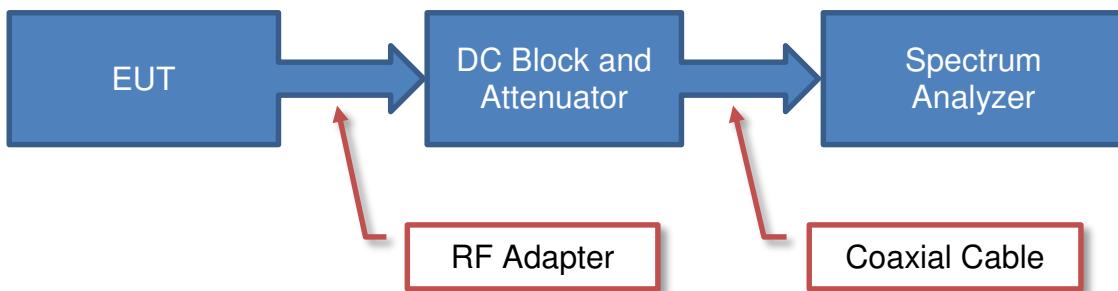

Near Field Test Fixture Measurements

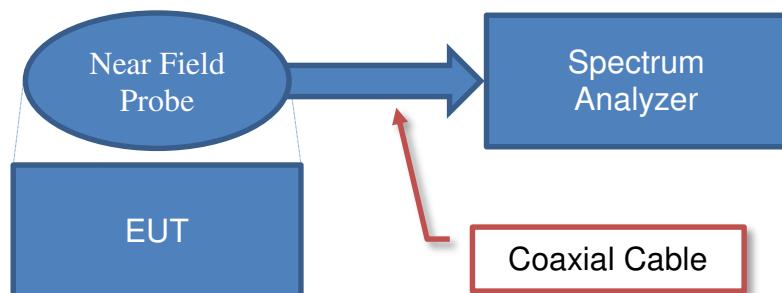

Spurious Radiated Emissions

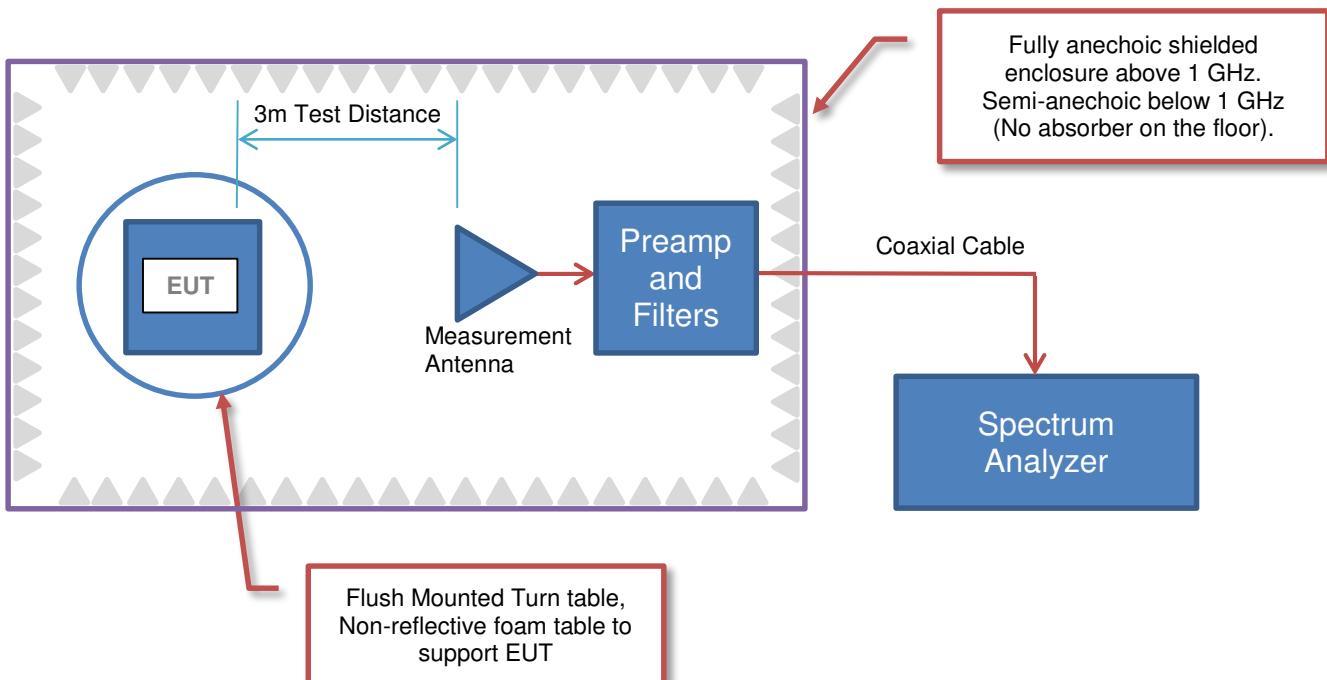

PRODUCT DESCRIPTION



Client and Equipment Under Test (EUT) Information

Company Name:	IntriCon Corporation
Address:	1260 Red Fox Road
City, State, Zip:	Saint Paul, MN 55112
Test Requested By:	Curt McNamara
Model:	L200B
First Date of Test:	April 6, 2017
Last Date of Test:	April 10, 2017
Receipt Date of Samples:	April 5, 2017
Equipment Design Stage:	Production
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:

L200B Wireless Hearing Aid utilizing a Bluetooth Low Energy Radio.

Testing Objective:

To demonstrate compliance of the Bluetooth radio to FCC 15.247 requirements.



CONFIGURATIONS

Configuration INCN0002- 1

EUT				
Description	Manufacturer	Model/Part Number	Serial Number	
L200B Wireless Hearing Aid	IntriCon Corporation	93136-000	17021340	

Peripherals in test setup boundary				
Description	Manufacturer	Model/Part Number	Serial Number	
FOB	IntriCon Corporation	93153-000	17000041	

Configuration INCN0002- 4

EUT				
Description	Manufacturer	Model/Part Number	Serial Number	
L200B Wireless Hearing Aid	IntriCon Corporation	93136-000	17021314	

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Cable (Hearing Aid)	No	0.65m	No	Hearing Aid	1.5V AAA Battery

MODIFICATIONS



Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	4/6/2017	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	4/10/2017	Duty Cycle	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	4/10/2017	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	4/10/2017	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT was taken home by the client before the next scheduled test.
5	4/10/2017	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
6	4/10/2017	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
7	4/10/2017	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2017.01.26

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Left/Right Hearing Aids Transmitting at Mid Ch. (2440)MHz.
Left/Right Hearing Aids Transmitting at High Ch. (2480)MHz.
Left/Right Hearing Aids Transmitting at Low Ch. (2402)MHz.

POWER SETTINGS INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

INCN0002 - 1

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	26000 MHz
-----------------	--------	----------------	-----------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator	Fairview Microwave	SA18E-20	TWZ	9/23/2016	12 mo
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFI	1/6/2017	12 mo
Cable	Element	18-26GHz Standard Gain Horn Cable	MNP	9/15/2016	12 mo
Cable	ESM Cable Corp.	Standard Gain Horn Cables	MNJ	7/29/2016	12 mo
Cable	ESM Cable Corp.	Double Ridge Guide Horn Cables	MNI	12/1/2016	12 mo
Cable	ESM Cable Corp.	Bilog Cables	MNH	12/1/2016	12 mo
Filter - Low Pass	Micro-Tronics	LPM50004	LFK	9/22/2016	12 mo
Filter - High Pass	Micro-Tronics	HPM50111	LFN	9/23/2016	12 mo
Amplifier - Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	9/15/2016	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-09	AHG	NCR	0 mo
Antenna - Standard Gain	ETS Lindgren	3160-07	AXP	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVT	2/14/2017	12 mo
Antenna - Double Ridge	ETS Lindgren	3115	AJA	6/23/2016	24 mo
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AVO	12/1/2016	12 mo
Antenna - Biconilog	Teseq	CBL 6141B	AYD	1/6/2016	24 mo
Antenna - Standard Gain	ETS Lindgren	3160-08	AIQ	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVW	2/14/2017	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AVV	2/14/2017	12 mo

MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequencies and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis if required, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out of band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Measurements at the edges of the allowable band may be presented in an alternative method as provided for in the ANSI C63.10 Marker-Delta method. This method involves performing an in-band fundamental measurement followed by a screen capture of the fundamental and out-of-band emission using reduced measurement instrumentation bandwidths. The amplitude delta measured on this screen capture is applied to the fundamental emission value to show the out-of-band emission level as applied to the limit.

SPURIOUS RADIATED EMISSIONS




EmiR5 2017.01.25

PSA-ESCI 2017.01.26

Work Order:	INCN0002	Date:	04/06/17	
Project:	None	Temperature:	21.6 °C	
Job Site:	MN05	Humidity:	23.5% RH	
Serial Number:	17000041	Barometric Pres.:	1025 mbar	
EUT:	L200B Wireless Hearing Aid	Tested by:	Cole Ghizzone, Chris Patterson	
Configuration:	1			
Customer:	IntriCon Corporation			
Attendees:	Andrew Albing			
EUT Power:	Battery			
Operating Mode:	Left/Right Hearing Aids Transmitting at Low Ch. (2402)MHz.			
Deviations:	None			
Comments:	None			

Test Specifications	Test Method
FCC 15.247:2017	ANSI C63.10:2013

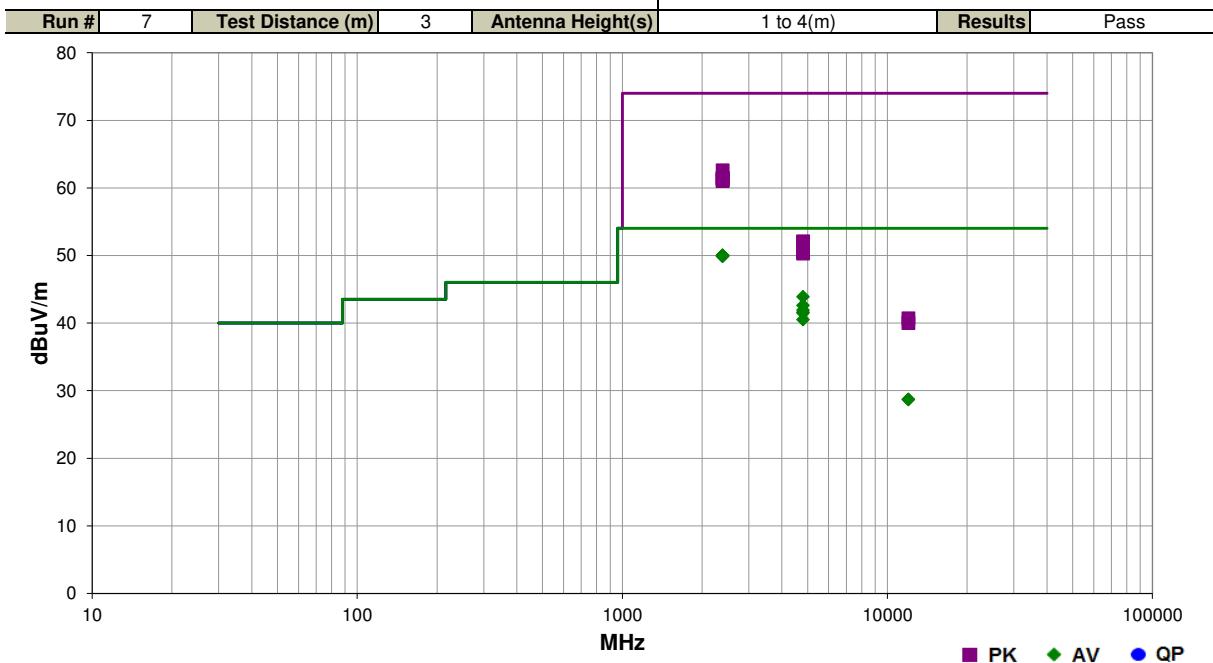

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2388.977	32.3	-2.3	1.0	32.0	3.0	20.0	Horz	AV	0.0	50.0	54.0	-4.0	EUT Horz, Low Ch, BLE
2389.482	32.3	-2.3	1.0	270.0	3.0	20.0	Vert	AV	0.0	50.0	54.0	-4.0	EUT Horz, Low Ch, BLE
2389.320	32.3	-2.3	1.0	167.1	3.0	20.0	Horz	AV	0.0	50.0	54.0	-4.0	EUT on Side, Low Ch, BLE
2389.333	32.2	-2.3	1.0	122.0	3.0	20.0	Vert	AV	0.0	49.9	54.0	-4.1	EUT on Side, Low Ch, BLE
2389.425	32.2	-2.3	1.0	213.1	3.0	20.0	Horz	AV	0.0	49.9	54.0	-4.1	EUT Vert, Low Ch, BLE
2389.228	32.2	-2.3	1.0	99.0	3.0	20.0	Vert	AV	0.0	49.9	54.0	-4.1	EUT Vert, Low Ch, BLE
4804.058	37.3	6.6	1.0	184.1	3.0	0.0	Horz	AV	0.0	43.9	54.0	-10.1	EUT Horz, Low Ch, BLE
4803.975	36.0	6.6	1.0	336.0	3.0	0.0	Vert	AV	0.0	42.6	54.0	-11.4	EUT on Side, Low Ch, BLE
2389.282	44.9	-2.3	1.0	99.0	3.0	20.0	Vert	PK	0.0	62.6	74.0	-11.4	EUT Vert, Low Ch, BLE
4803.983	35.3	6.6	1.0	292.0	3.0	0.0	Vert	AV	0.0	41.9	54.0	-12.1	EUT Vert, Low Ch, BLE
4804.000	35.0	6.6	1.0	179.0	3.0	0.0	Vert	AV	0.0	41.6	54.0	-12.4	EUT Horz, Low Ch, BLE
4804.283	34.9	6.6	1.0	50.0	3.0	0.0	Horz	AV	0.0	41.5	54.0	-12.5	EUT Vert, Low Ch, BLE
2388.815	43.8	-2.3	1.0	122.0	3.0	20.0	Vert	PK	0.0	61.5	74.0	-12.5	EUT on Side, Low Ch, BLE
2388.742	43.7	-2.3	1.0	167.1	3.0	20.0	Horz	PK	0.0	61.4	74.0	-12.6	EUT on Side, Low Ch, BLE
2388.875	43.7	-2.3	1.0	213.1	3.0	20.0	Horz	PK	0.0	61.4	74.0	-12.6	EUT Vert, Low Ch, BLE
2389.217	43.4	-2.3	1.0	32.0	3.0	20.0	Horz	PK	0.0	61.1	74.0	-12.9	EUT Horz, Low Ch, BLE
2389.337	43.3	-2.3	1.0	270.0	3.0	20.0	Vert	PK	0.0	61.0	74.0	-13.0	EUT Horz, Low Ch, BLE
4804.108	33.9	6.6	1.0	274.0	3.0	0.0	Horz	AV	0.0	40.5	54.0	-13.5	EUT on Side, Low Ch, BLE
4803.983	45.5	6.6	1.0	336.0	3.0	0.0	Vert	PK	0.0	52.1	74.0	-21.9	EUT on Side, Low Ch, BLE
4804.383	45.3	6.6	1.0	184.1	3.0	0.0	Horz	PK	0.0	51.9	74.0	-22.1	EUT Horz, Low Ch, BLE

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
4804.533	44.3	6.6	1.0	292.0	3.0	0.0	Vert	PK	0.0	50.9	74.0	-23.1	EUT Vert, Low Ch, BLE
4804.383	44.2	6.6	1.0	274.0	3.0	0.0	Horz	PK	0.0	50.8	74.0	-23.2	EUT on Side, Low Ch, BLE
4803.642	43.9	6.6	1.0	179.0	3.0	0.0	Vert	PK	0.0	50.5	74.0	-23.5	EUT Horz, Low Ch, BLE
4804.225	43.7	6.6	1.0	50.0	3.0	0.0	Horz	PK	0.0	50.3	74.0	-23.7	EUT Vert, Low Ch, BLE
12007.600	29.7	-1.0	1.0	62.1	3.0	0.0	Horz	AV	0.0	28.7	54.0	-25.3	EUT Horz, Low Ch, BLE
12007.720	29.7	-1.0	1.6	234.0	3.0	0.0	Vert	AV	0.0	28.7	54.0	-25.3	EUT on Side, Low Ch, BLE
12012.030	41.7	-1.0	1.6	234.0	3.0	0.0	Vert	PK	0.0	40.7	74.0	-33.3	EUT on Side, Low Ch, BLE
12008.180	41.0	-1.0	1.0	62.1	3.0	0.0	Horz	PK	0.0	40.0	74.0	-34.0	EUT Horz, Low Ch, BLE


SPURIOUS RADIATED EMISSIONS



EmiR5 2017.01.25

PSA-ESCI 2017.01.26

Work Order:	INCN0002	Date:	04/06/17	
Project:	None	Temperature:	21.6 °C	
Job Site:	MN05	Humidity:	23.5% RH	
Serial Number:	17000041	Barometric Pres.:	1025 mbar	
EUT:	L200B Wireless Hearing Aid	Tested by:	Cole Ghizzone, Chris Patterson	
Configuration:	1			
Customer:	IntriCon Corporation			
Attendees:	Andrew Albing			
EUT Power:	Battery			
Operating Mode:	Left/Right Hearing Aids Transmitting at High Ch. (2480)MHz.			
Deviations:	None			
Comments:	None			
Test Specifications		Test Method		
FCC 15.247:2017		ANSI C63.10:2013		

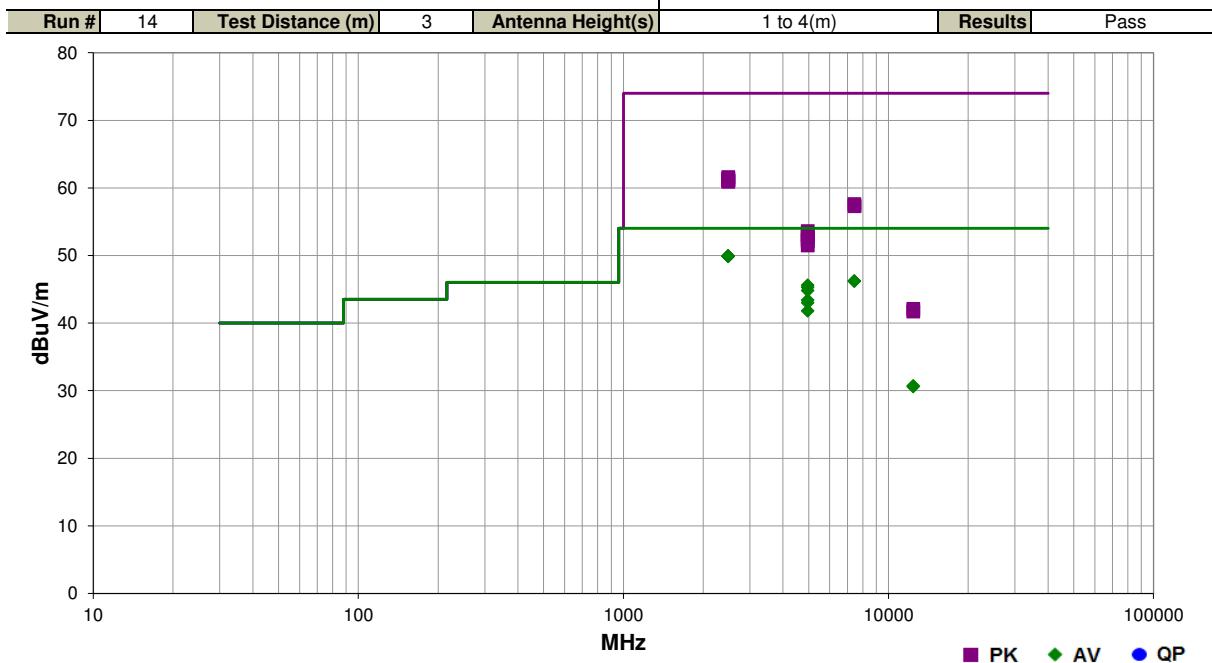

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2484.482	32.4	-2.5	1.0	178.1	3.0	20.0	Horz	AV	0.0	49.9	54.0	-4.1	EUT Horz, High Ch, BLE
2484.152	32.4	-2.5	3.5	205.0	3.0	20.0	Vert	AV	0.0	49.9	54.0	-4.1	EUT Horz, High Ch, BLE
2484.813	32.4	-2.5	1.0	111.0	3.0	20.0	Horz	AV	0.0	49.9	54.0	-4.1	EUT on Side, High Ch, BLE
2484.152	32.4	-2.5	1.0	239.0	3.0	20.0	Vert	AV	0.0	49.9	54.0	-4.1	EUT on Side, High Ch, BLE
2484.153	32.4	-2.5	1.0	173.1	3.0	20.0	Horz	AV	0.0	49.9	54.0	-4.1	EUT Vert, High Ch, BLE
2484.687	32.4	-2.5	1.0	268.9	3.0	20.0	Vert	AV	0.0	49.9	54.0	-4.1	EUT Vert, High Ch, BLE
7440.467	31.2	15.0	1.7	92.0	3.0	0.0	Vert	AV	0.0	46.2	54.0	-7.8	EUT Horz, High Ch, BLE
7439.792	31.2	15.0	1.0	52.1	3.0	0.0	Horz	AV	0.0	46.2	54.0	-7.8	EUT on Side, High Ch, BLE
4959.958	38.8	6.8	2.6	292.0	3.0	0.0	Horz	AV	0.0	45.6	54.0	-8.4	EUT on Side, High Ch, BLE
4959.992	38.5	6.8	3.4	253.9	3.0	0.0	Vert	AV	0.0	45.3	54.0	-8.7	EUT Horz, High Ch, BLE
4959.975	38.0	6.8	1.0	60.0	3.0	0.0	Horz	AV	0.0	44.8	54.0	-9.2	EUT Horz, High Ch, BLE
4960.125	36.6	6.8	1.0	229.0	3.0	0.0	Vert	AV	0.0	43.4	54.0	-10.6	EUT Vert, High Ch, BLE
4960.042	36.2	6.8	1.0	7.0	3.0	0.0	Vert	AV	0.0	43.0	54.0	-11.0	EUT on Side, High Ch, BLE
4960.117	35.0	6.8	1.8	329.9	3.0	0.0	Horz	AV	0.0	41.8	54.0	-12.2	EUT Vert, High Ch, BLE
2484.022	44.1	-2.5	1.0	178.1	3.0	20.0	Horz	PK	0.0	61.6	74.0	-12.4	EUT Horz, High Ch, BLE
2484.150	43.9	-2.5	1.0	111.0	3.0	20.0	Horz	PK	0.0	61.4	74.0	-12.6	EUT on Side, High Ch, BLE
2484.482	43.7	-2.5	3.5	205.0	3.0	20.0	Vert	PK	0.0	61.2	74.0	-12.8	EUT Horz, High Ch, BLE
2484.347	43.6	-2.5	1.0	239.0	3.0	20.0	Vert	PK	0.0	61.1	74.0	-12.9	EUT on Side, High Ch, BLE
2484.877	43.6	-2.5	1.0	173.1	3.0	20.0	Horz	PK	0.0	61.1	74.0	-12.9	EUT Vert, High Ch, BLE
2484.038	43.4	-2.5	1.0	268.9	3.0	20.0	Vert	PK	0.0	60.9	74.0	-13.1	EUT Vert, High Ch, BLE

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
7438.458	42.6	15.0	1.7	92.0	3.0	0.0	Vert	PK	0.0	57.6	74.0	-16.4	EUT Horz, High Ch, BLE
7442.417	42.3	15.0	1.0	52.1	3.0	0.0	Horz	PK	0.0	57.3	74.0	-16.7	EUT on Side, High Ch, BLE
4960.408	46.8	6.8	2.6	292.0	3.0	0.0	Horz	PK	0.0	53.6	74.0	-20.4	EUT on Side, High Ch, BLE
4960.458	46.3	6.8	1.0	60.0	3.0	0.0	Horz	PK	0.0	53.1	74.0	-20.9	EUT Horz, High Ch, BLE
4960.508	46.1	6.8	3.4	253.9	3.0	0.0	Vert	PK	0.0	52.9	74.0	-21.1	EUT Horz, High Ch, BLE
4959.450	45.6	6.8	1.0	229.0	3.0	0.0	Vert	PK	0.0	52.4	74.0	-21.6	EUT Vert, High Ch, BLE
4960.392	45.3	6.8	1.0	7.0	3.0	0.0	Vert	PK	0.0	52.1	74.0	-21.9	EUT on Side, High Ch, BLE
4959.450	44.7	6.8	1.8	329.9	3.0	0.0	Horz	PK	0.0	51.5	74.0	-22.5	EUT Vert, High Ch, BLE
12398.110	29.8	0.9	1.0	165.0	3.0	0.0	Horz	AV	0.0	30.7	54.0	-23.3	EUT on Side, High Ch, BLE
12399.670	29.7	0.9	3.5	257.0	3.0	0.0	Vert	AV	0.0	30.6	54.0	-23.4	EUT Horz, High Ch, BLE
12399.450	41.2	0.9	1.0	165.0	3.0	0.0	Horz	PK	0.0	42.1	74.0	-31.9	EUT on Side, High Ch, BLE
12398.980	40.8	0.9	3.5	257.0	3.0	0.0	Vert	PK	0.0	41.7	74.0	-32.3	EUT Horz, High Ch, BLE


SPURIOUS RADIATED EMISSIONS



EmiR5 2017.01.25

PSA-ESCI 2017.01.26

Work Order:	INCN0002	Date:	04/06/17	
Project:	None	Temperature:	21.6 °C	
Job Site:	MN05	Humidity:	23.5% RH	
Serial Number:	17000041	Barometric Pres.:	1025 mbar	
EUT:	L200B Wireless Hearing Aid	Tested by:	Cole Ghizzone, Chris Patterson	
Configuration:	1			
Customer:	IntriCon Corporation			
Attendees:	Andrew Albing			
EUT Power:	Battery			
Operating Mode:	Left/Right Hearing Aids Transmitting at Mid Ch. (2442)MHz.			
Deviations:	None			
Comments:	None			
Test Specifications		Test Method		
FCC 15.247:2017		ANSI C63.10:2013		

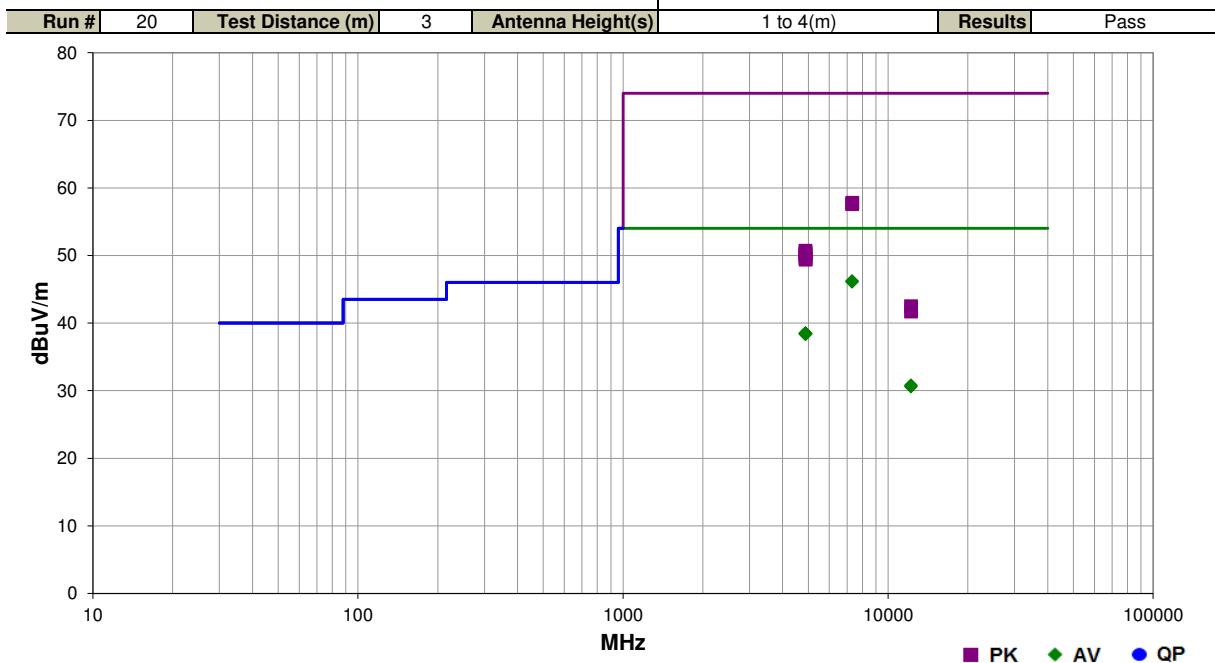

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Test Distance (meters)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
7317.658	31.1	15.1	1.0	194.0	3.0	0.0	Horz	AV	0.0	46.2	54.0	-7.8	EUT Vert, Mid Ch, BLE
7318.025	31.0	15.1	1.0	119.1	3.0	0.0	Vert	AV	0.0	46.1	54.0	-7.9	EUT Vert, Mid Ch, BLE
4879.142	31.8	6.7	1.0	147.0	3.0	0.0	Horz	AV	0.0	38.5	54.0	-15.5	EUT Vert, Mid Ch, BLE
4881.808	31.8	6.7	2.6	109.1	3.0	0.0	Horz	AV	0.0	38.5	54.0	-15.5	EUT Horz, Mid Ch, BLE
4882.408	31.7	6.7	1.0	131.1	3.0	0.0	Vert	AV	0.0	38.4	54.0	-15.6	EUT Vert, Mid Ch, BLE
4881.525	31.7	6.7	1.0	308.9	3.0	0.0	Horz	AV	0.0	38.4	54.0	-15.6	EUT on Side, Mid Ch, BLE
4882.492	31.7	6.7	1.0	227.1	3.0	0.0	Vert	AV	0.0	38.4	54.0	-15.6	EUT on Side, Mid Ch, BLE
4882.083	31.7	6.7	1.6	222.0	3.0	0.0	Vert	AV	0.0	38.4	54.0	-15.6	EUT Horz, Mid Ch, BLE
7321.008	42.7	15.1	1.0	119.1	3.0	0.0	Vert	PK	0.0	57.8	74.0	-16.2	EUT Vert, Mid Ch, BLE
7320.292	42.5	15.1	1.0	194.0	3.0	0.0	Horz	PK	0.0	57.6	74.0	-16.4	EUT Vert, Mid Ch, BLE
12198.340	30.8	0.0	1.1	304.9	3.0	0.0	Vert	AV	0.0	30.8	54.0	-23.2	EUT Vert, Mid Ch, BLE
4882.017	44.0	6.7	1.6	222.0	3.0	0.0	Vert	PK	0.0	50.7	74.0	-23.3	EUT Horz, Mid Ch, BLE
12197.740	30.6	0.0	2.9	86.0	3.0	0.0	Horz	AV	0.0	30.6	54.0	-23.4	EUT Vert, Mid Ch, BLE
4880.700	43.7	6.7	1.0	227.1	3.0	0.0	Vert	PK	0.0	50.4	74.0	-23.6	EUT on Side, Mid Ch, BLE
4878.150	43.5	6.7	1.0	147.0	3.0	0.0	Horz	PK	0.0	50.2	74.0	-23.8	EUT Vert, Mid Ch, BLE
4878.425	43.2	6.7	1.0	131.1	3.0	0.0	Vert	PK	0.0	49.9	74.0	-24.1	EUT Vert, Mid Ch, BLE
4877.650	42.9	6.7	1.0	308.9	3.0	0.0	Horz	PK	0.0	49.6	74.0	-24.4	EUT on Side, Mid Ch, BLE
4882.408	42.7	6.7	2.6	109.1	3.0	0.0	Horz	PK	0.0	49.4	74.0	-24.6	EUT Horz, Mid Ch, BLE
12199.090	42.5	0.0	2.9	86.0	3.0	0.0	Horz	PK	0.0	42.5	74.0	-31.5	EUT Vert, Mid Ch, BLE
12200.000	41.7	0.0	1.1	304.9	3.0	0.0	Vert	PK	0.0	41.7	74.0	-32.3	EUT Vert, Mid Ch, BLE

DUTY CYCLE



XMil 2017.01.26

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	E4422B	TGQ	3/17/2015	3/17/2018
Attenuator	S.M. Electronics	SA26B-20	RFW	2/14/2017	2/14/2018
Block - DC	Fairview Microwave	SD3379	AMI	9/15/2016	9/15/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	3/16/2017	3/16/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.

There is no compliance requirement to be met by this test, so therefore no Pass / Fail criteria.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

If the transmit duty cycle < 98 percent, burst gating may have been used during some of the other tests in this report to only take the measurement during the burst duration.

DUTY CYCLE



Tbitx 2017.01.27

XMI 2017.01.26


EUT:	L200B Wireless Hearing Aid		Work Order:	INCN0002	
Serial Number:	17021314		Date:	04/10/17	
Customer:	IntriCon Corporation		Temperature:	21.7 °C	
Attendees:	Andrew Albind		Humidity:	34.1% RH	
Project:	None		Barometric Pres.:	1016 mbar	
Tested by:	Dustin Sparks	Power:	Battery	Job Site:	MN08
TEST SPECIFICATIONS			Test Method		
FCC 15.247:2017			ANSI C63.10:2013		
COMMENTS					
None					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	4	Signature	<i>Dustin Sparks</i>		
			Pulse Width	Period	Number of Pulses
BLE/GFSK Low Channel, 2402 MHz			2.131 ms	2.223 ms	1
BLE/GFSK Low Channel, 2402 MHz			N/A	N/A	5
BLE/GFSK Mid Channel, 2442 MHz			2.131 ms	2.223 ms	1
BLE/GFSK Mid Channel, 2442 MHz			N/A	N/A	5
BLE/GFSK High Channel, 2480 MHz			2.131 ms	2.223 ms	1
BLE/GFSK High Channel, 2480 MHz			N/A	N/A	5
					Value (%)
					Limit (%)
					Results

DUTY CYCLE




TbITx 2017.01.27 XMII 2017.01.26

BLE/GFSK Low Channel, 2402 MHz					
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
2.131 ms	2.223 ms	1	95.8	N/A	N/A

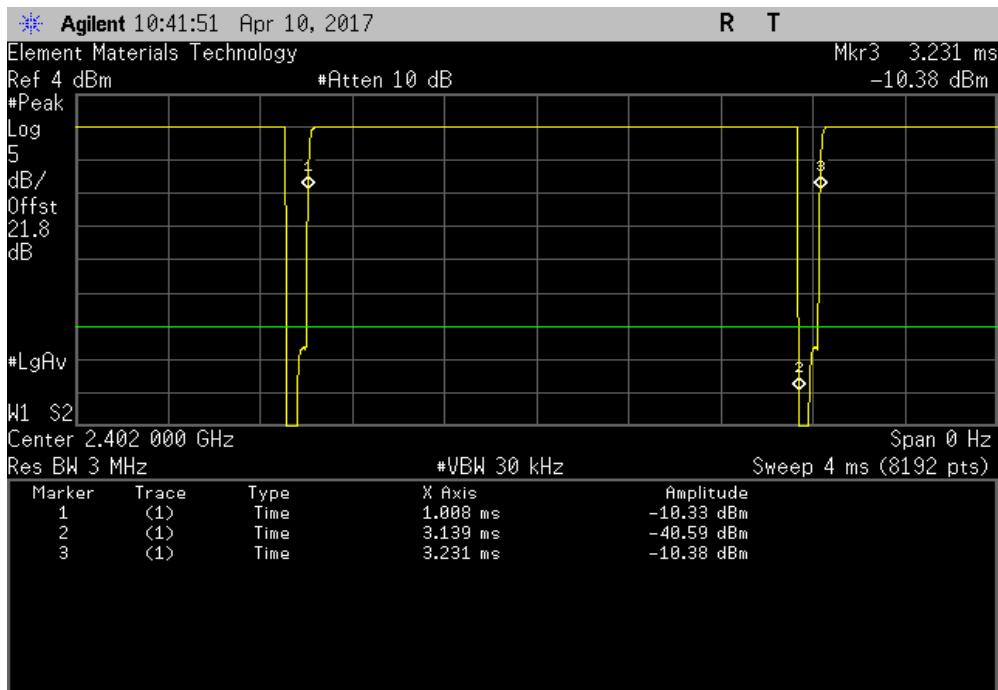

BLE/GFSK Low Channel, 2402 MHz					
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
N/A	N/A	5	N/A	N/A	N/A

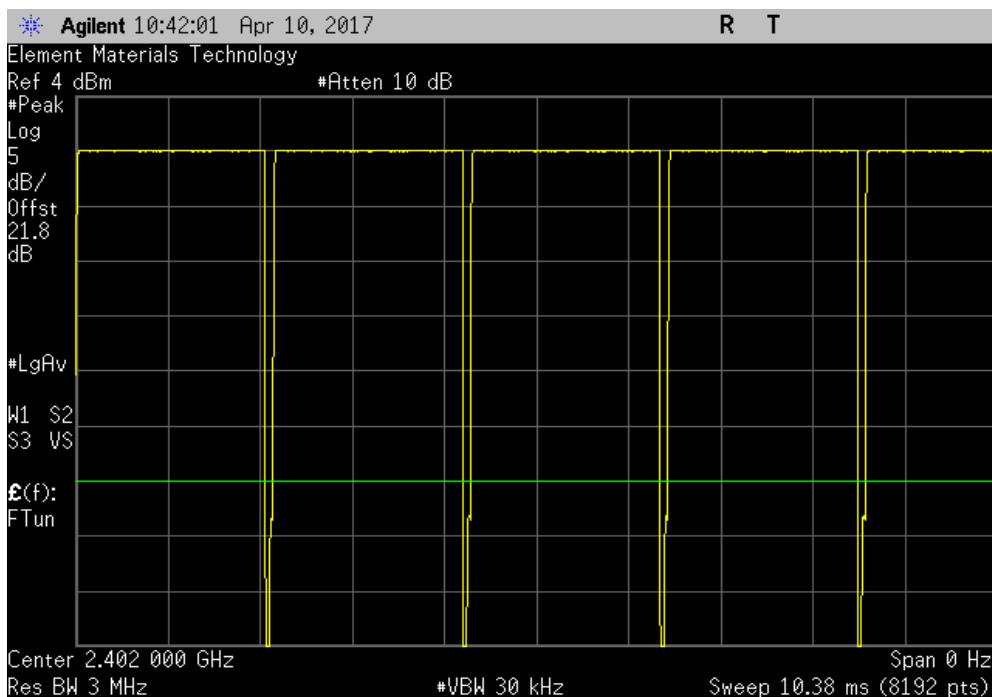


DUTY CYCLE




TbITx 2017.01.27 XMit 2017.01.26

BLE/GFSK Mid Channel, 2442 MHz					
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
2.131 ms	2.223 ms	1	95.9	N/A	N/A

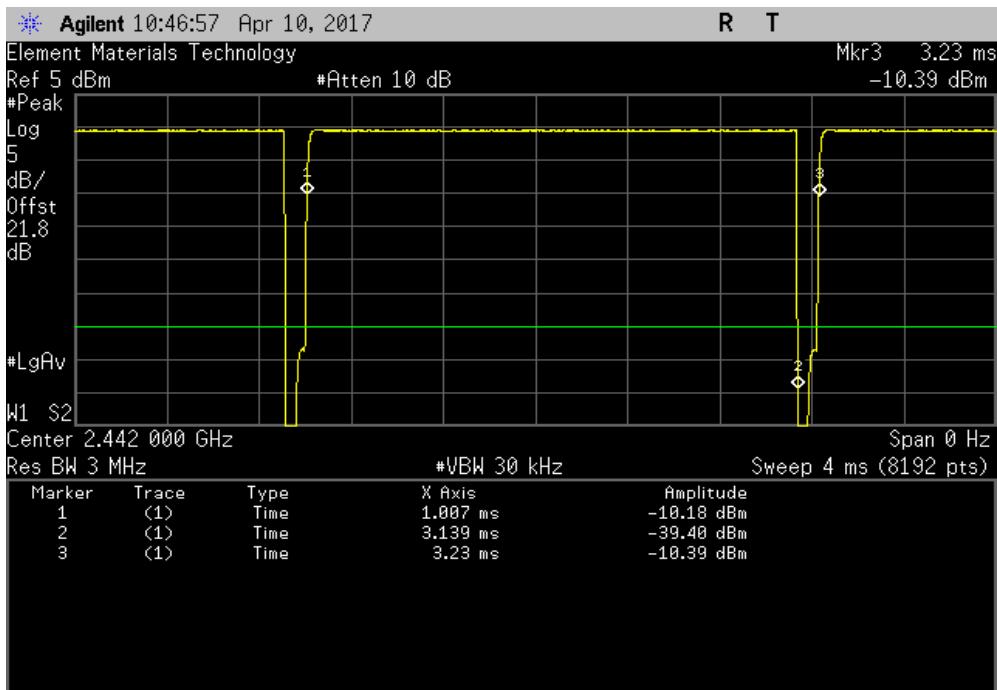

BLE/GFSK Mid Channel, 2442 MHz					
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
N/A	N/A	5	N/A	N/A	N/A

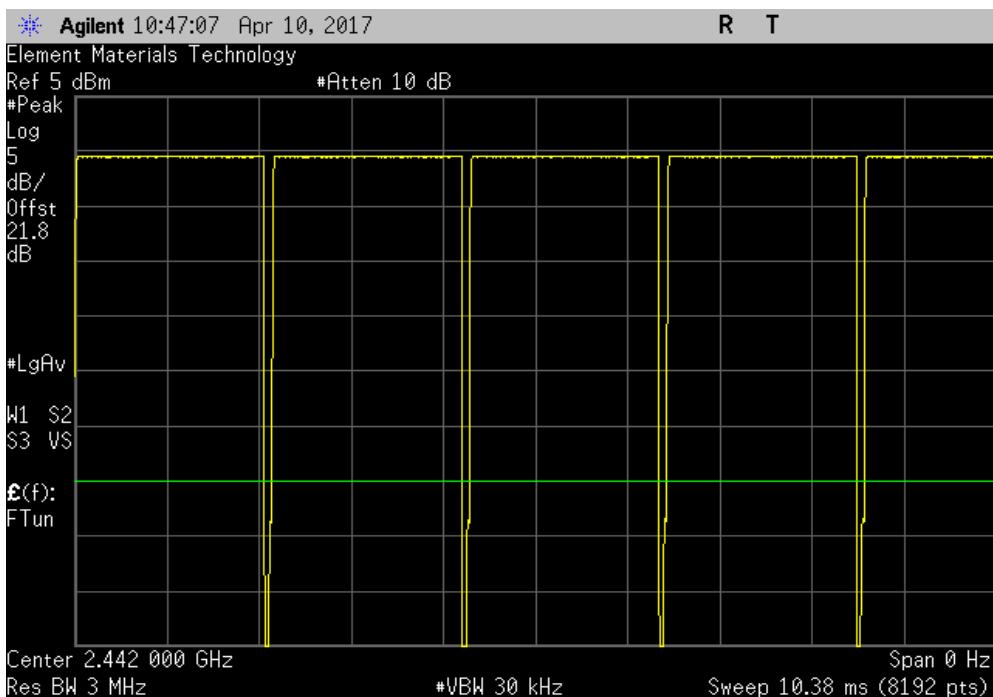


DUTY CYCLE




TbITx 2017.01.27 XMit 2017.01.26

BLE/GFSK High Channel, 2480 MHz					
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
2.131 ms	2.223 ms	1	95.9	N/A	N/A

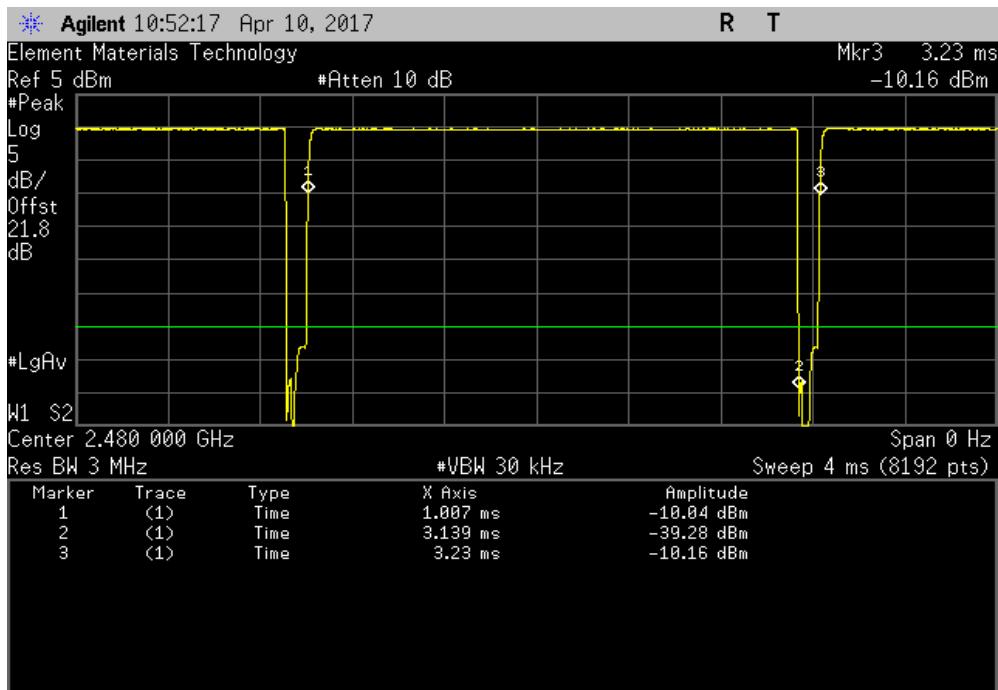

BLE/GFSK High Channel, 2480 MHz					
Pulse Width	Period	Number of Pulses	Value (%)	Limit (%)	Results
N/A	N/A	5	N/A	N/A	N/A

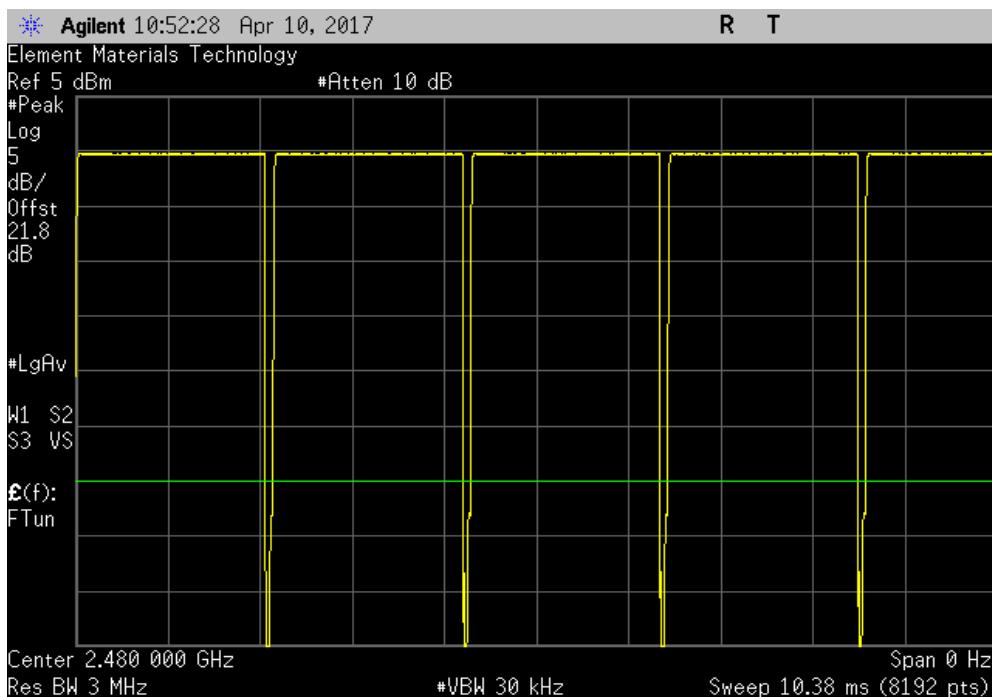

OCCUPIED BANDWIDTH



XMil 2017.01.26

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	E4422B	TGQ	3/17/2015	3/17/2018
Attenuator	S.M. Electronics	SA26B-20	RFW	2/14/2017	2/14/2018
Block - DC	Fairview Microwave	SD3379	AMI	9/15/2016	9/15/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	3/16/2017	3/16/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The EUT was set to the channels and modes listed in the datasheet.

The 6dB occupied bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The 99.0% occupied bandwidth was also measured at the same time which can be needed during Output Power depending on the applicable method.

OCCUPIED BANDWIDTH



TbtTx 2017.01.27

XMI 2017.01.26

EUT:	L200B Wireless Hearing Aid		Work Order:	INCN0002	
Serial Number:	17021314		Date:	04/10/17	
Customer:	IntriCon Corporation		Temperature:	22.3 °C	
Attendees:	Andrew Albind		Humidity:	33.5% RH	
Project:	None		Barometric Pres.:	1016 mbar	
Tested by:	Dustin Sparks	Power:	Battery	Job Site:	MN08
TEST SPECIFICATIONS			Test Method		
FCC 15.247:2017			ANSI C63.10:2013		
COMMENTS					
None					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	4	Signature			
			Value	Limit (±)	Result
			620.275 kHz	500 kHz	Pass
			640.447 kHz	500 kHz	Pass
			647.957 kHz	500 kHz	Pass


BLE/GFSK Low Channel, 2402 MHz
 BLE/GFSK Mid Channel, 2442 MHz
 BLE/GFSK High Channel, 2480 MHz

OCCUPIED BANDWIDTH




TbITx 2017.01.27 XMII 2017.01.26

BLE/GFSK Low Channel, 2402 MHz			Value	Limit (±)	Result
			620.275 kHz	500 kHz	Pass

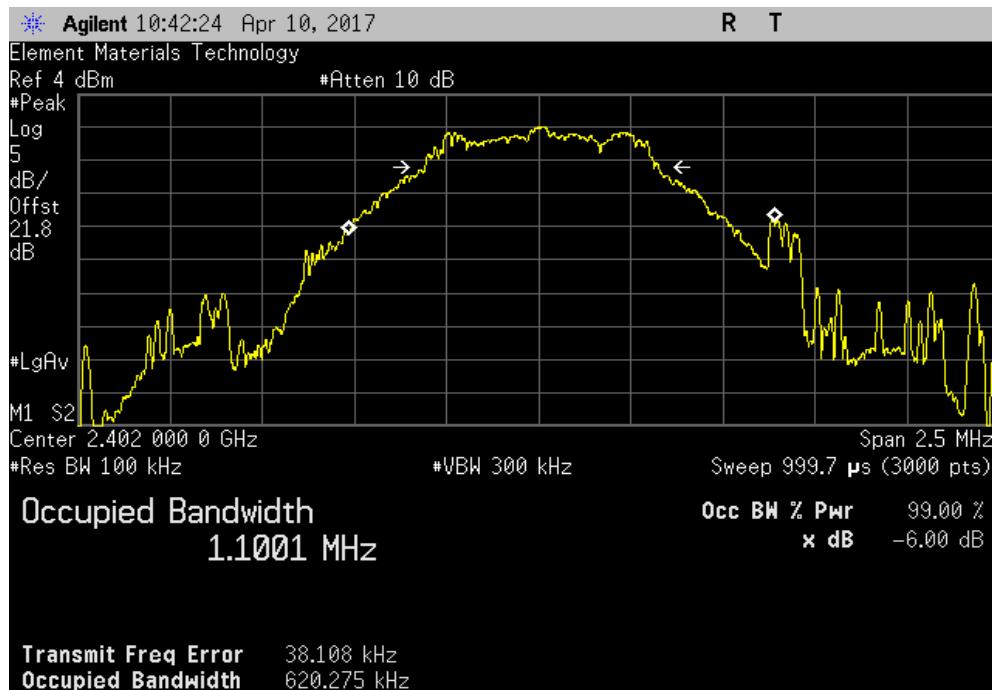

BLE/GFSK Mid Channel, 2442 MHz			Value	Limit (±)	Result
			640.447 kHz	500 kHz	Pass

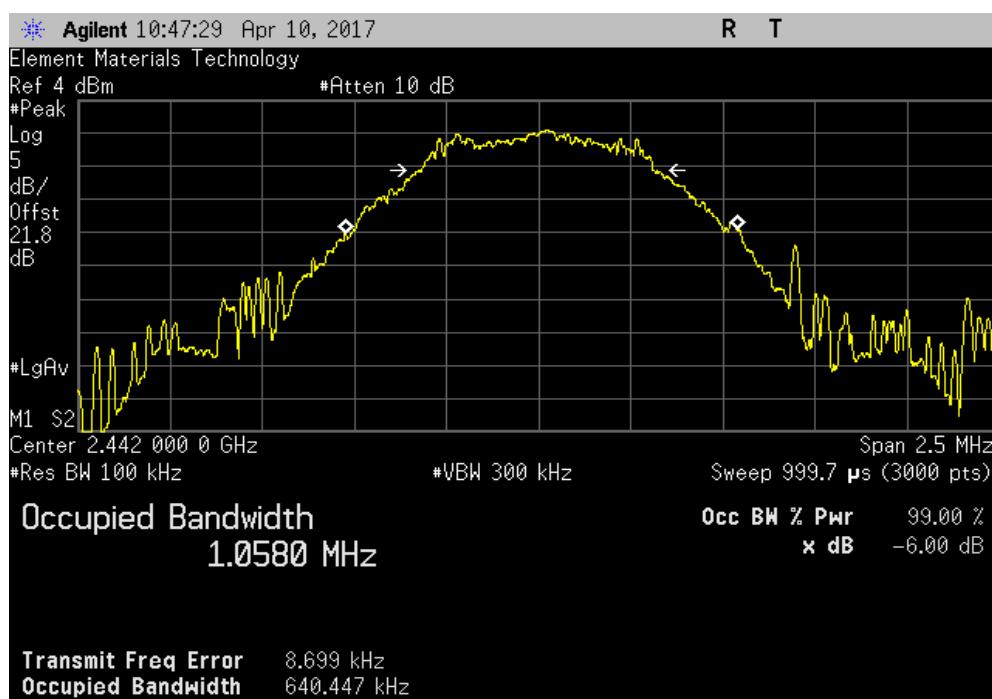


OCCUPIED BANDWIDTH



TbITx 2017.01.27 XMII 2017.01.26

BLE/GFSK High Channel, 2480 MHz			Value	Limit (±)	Result
			647.957 kHz	500 kHz	Pass

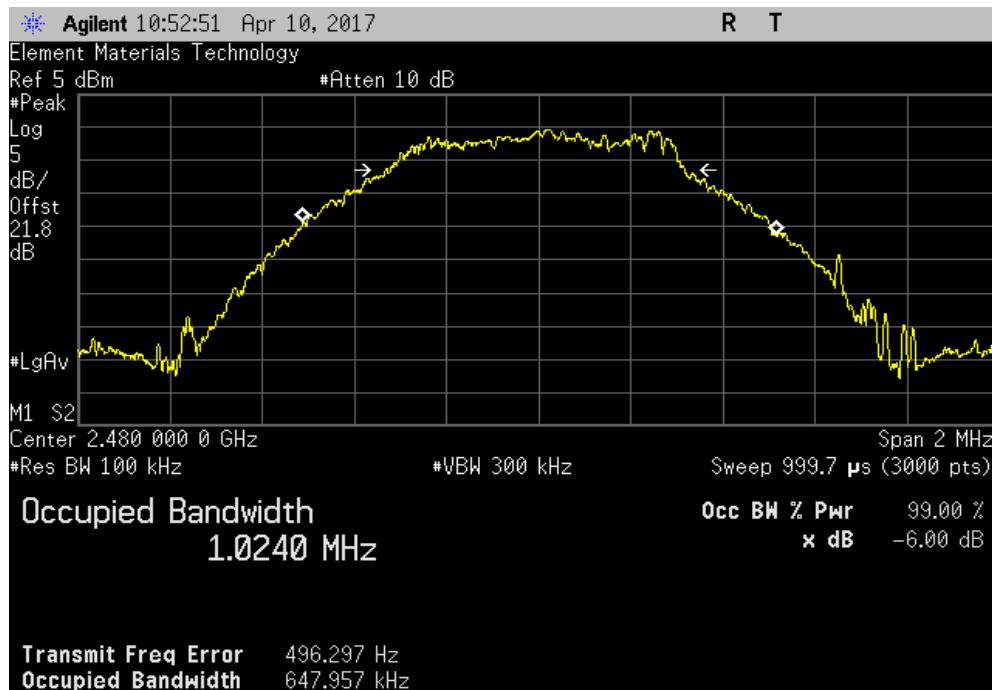

OUTPUT POWER



XMil 2017.01.26

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	E4422B	TGQ	3/17/2015	3/17/2018
Attenuator	S.M. Electronics	SA26B-20	RFW	2/14/2017	2/14/2018
Block - DC	Fairview Microwave	SD3379	AMI	9/15/2016	9/15/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	3/16/2017	3/16/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10:2013 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

De Facto EIRP Limit: The EUT meets the de facto EIRP limit of +36 dBm.

OUTPUT POWER



TbTx 2017.01.27

XMI 2017.01.26

EUT:	L200B Wireless Hearing Aid		Work Order:	INCN0002	
Serial Number:	17021314		Date:	04/10/17	
Customer:	IntriCon Corporation		Temperature:	22.2 °C	
Attendees:	Andrew Albind		Humidity:	33.4% RH	
Project:	None		Barometric Pres.:	1016 mbar	
Tested by:	Dustin Sparks	Power:	Battery	Job Site:	MN08
TEST SPECIFICATIONS			Test Method		
FCC 15.247:2017			ANSI C63.10:2013		
COMMENTS					
None					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	4	Signature			
			Value	Limit (-)	Result
			817.335 uW	1 W	Pass
			908.866 uW	1 W	Pass
			956.753 uW	1 W	Pass


BLE/GFSK Low Channel, 2402 MHz
BLE/GFSK Mid Channel, 2442 MHz
BLE/GFSK High Channel, 2480 MHz

OUTPUT POWER




TbITx 2017.01.27 XMII 2017.01.26

BLE/GFSK Low Channel, 2402 MHz		
	Value	Limit
	(<)	(<)
	817.335 uW	1 W
		Pass

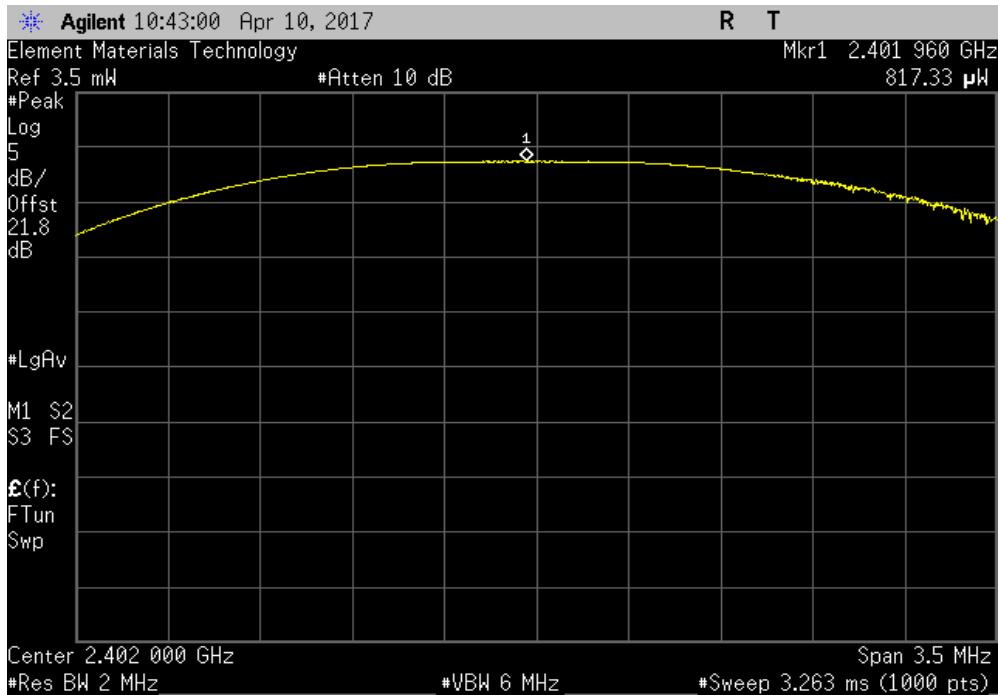

BLE/GFSK Mid Channel, 2442 MHz		
	Value	Limit
	(<)	(<)
	908.866 uW	1 W
		Pass

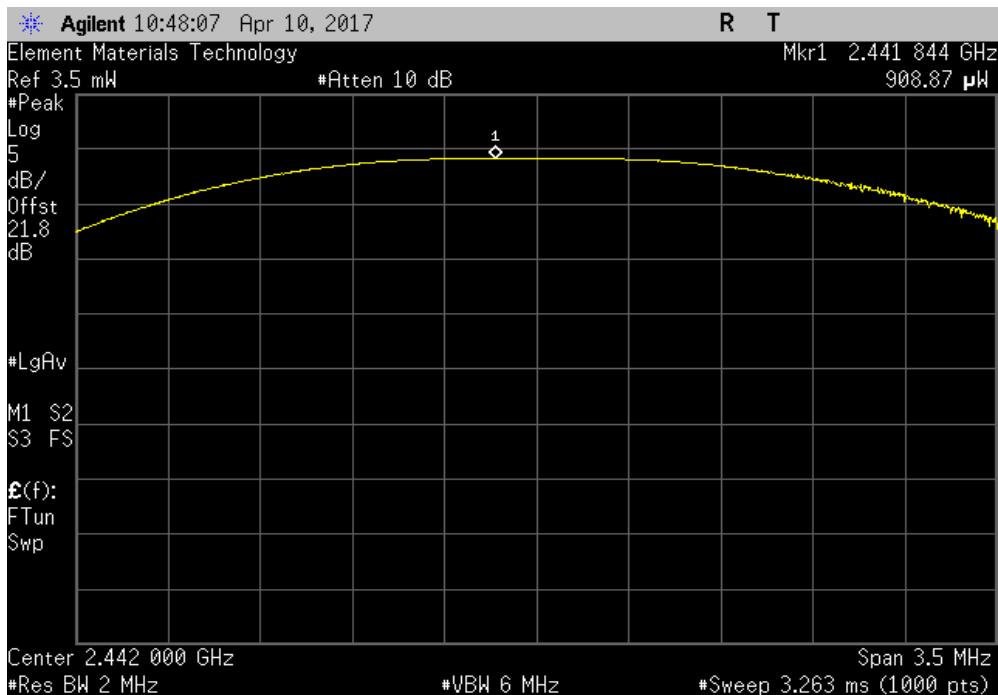


OUTPUT POWER



TbITx 2017.01.27 XMII 2017.01.26

BLE/GFSK High Channel, 2480 MHz		
	Value	Limit (\leq)
	956.753 μ W	1 W

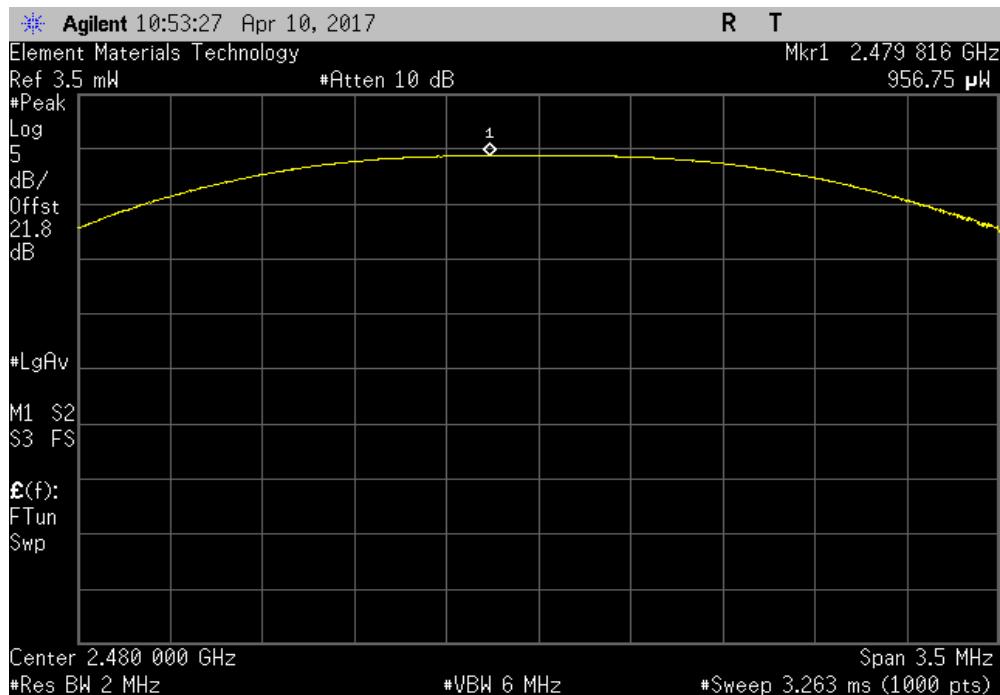

POWER SPECTRAL DENSITY



XMIL 2017.01.26

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	E4422B	TGQ	3/17/2015	3/17/2018
Attenuator	S.M. Electronics	SA26B-20	RFW	2/14/2017	2/14/2018
Block - DC	Fairview Microwave	SD3379	AMI	9/15/2016	9/15/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	3/16/2017	3/16/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The maximum power spectral density measurements was measured using the channels and modes as called out on the following data sheets.

Per the procedure outlined in ANSI C63.10 the peak power spectral density was measured in a 3 kHz RBW.

POWER SPECTRAL DENSITY



TbTx 2017.01.27

XMI 2017.01.26

EUT:	L200B Wireless Hearing Aid		Work Order:	INCN0002	
Serial Number:	17021314		Date:	04/10/17	
Customer:	IntriCon Corporation		Temperature:	22.1 °C	
Attendees:	Andrew Albind		Humidity:	33.4% RH	
Project:	None		Barometric Pres.:	1016 mbar	
Tested by:	Dustin Sparks	Power:	Battery	Job Site:	MN08
TEST SPECIFICATIONS			Test Method		
FCC 15.247:2017			ANSI C63.10:2013		
COMMENTS					
None					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	4	Signature			
			Value	Limit	Results
			dBm/3kHz	< dBm/3kHz	
			-13.376	8	Pass
			-14.121	8	Pass
			-13.956	8	Pass


BLE/GFSK Low Channel, 2402 MHz
 BLE/GFSK Mid Channel, 2442 MHz
 BLE/GFSK High Channel, 2480 MHz

POWER SPECTRAL DENSITY




TbITx 2017.01.27 XMII 2017.01.26

BLE/GFSK Low Channel, 2402 MHz		
	Value dBm/3kHz	Limit < dBm/3kHz
	-13.376	8

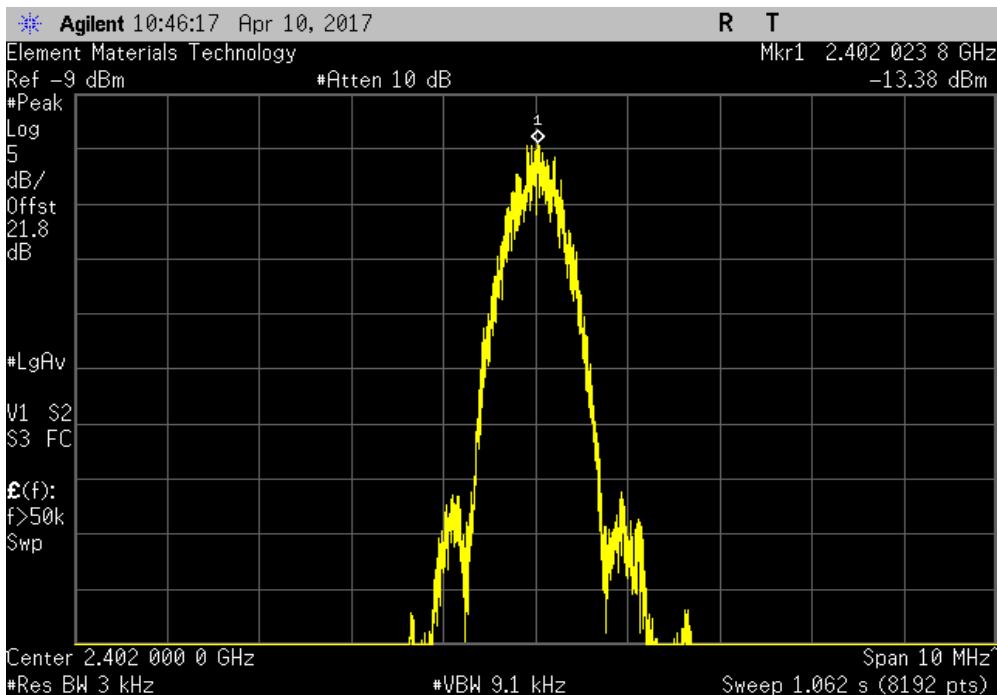

BLE/GFSK Mid Channel, 2442 MHz		
	Value dBm/3kHz	Limit < dBm/3kHz
	-14.121	8

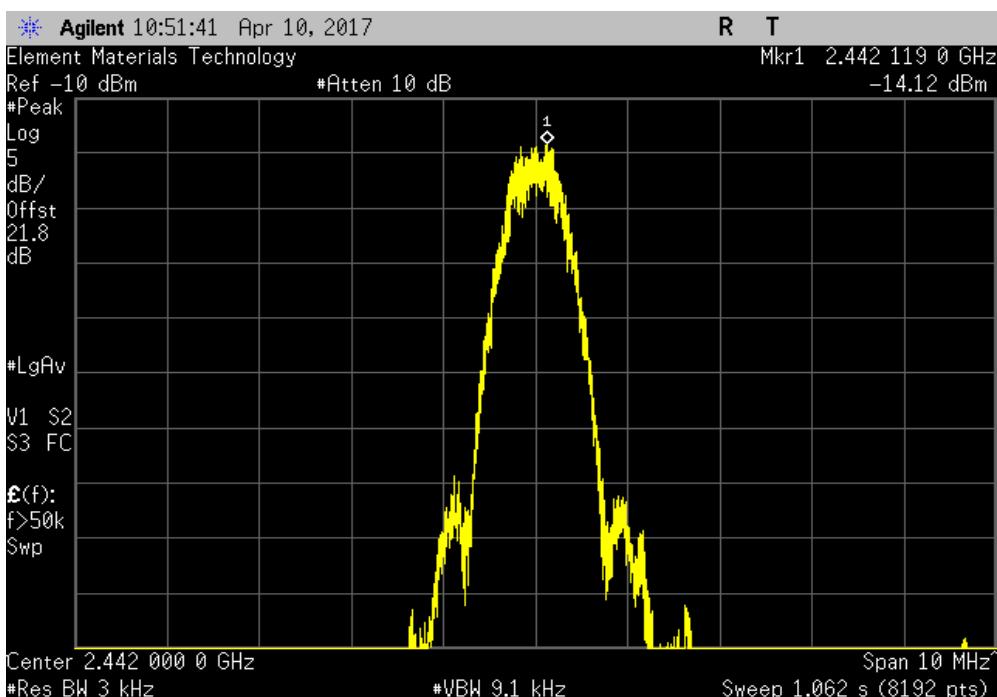


POWER SPECTRAL DENSITY



TbITx 2017.01.27 XMII 2017.01.26

BLE/GFSK High Channel, 2480 MHz		
	Value dBm/3kHz	Limit < dBm/3kHz
	-13.956	8

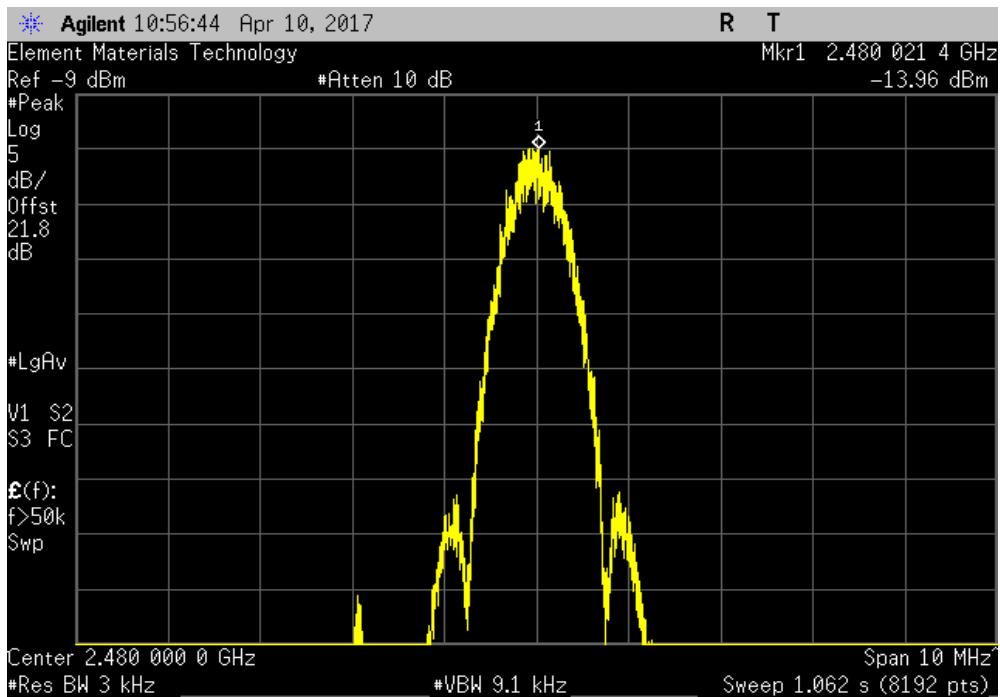

BAND EDGE COMPLIANCE



XMit 2017.01.26

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	E4422B	TGQ	3/17/2015	3/17/2018
Attenuator	S.M. Electronics	SA26B-20	RFW	2/14/2017	2/14/2018
Block - DC	Fairview Microwave	SD3379	AMI	9/15/2016	9/15/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	3/16/2017	3/16/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge.

BAND EDGE COMPLIANCE



TbTx 2017.01.27

XMI 2017.01.26


EUT:	L200B Wireless Hearing Aid		Work Order:	INCN0002	
Serial Number:	17021314		Date:	04/10/17	
Customer:	IntriCon Corporation		Temperature:	22.2 °C	
Attendees:	Andrew Albind		Humidity:	33.8% RH	
Project:	None		Barometric Pres.:	1016 mbar	
Tested by:	Dustin Sparks	Power:	Battery	Job Site:	MN08
TEST SPECIFICATIONS			Test Method		
FCC 15.247:2017			ANSI C63.10:2013		
COMMENTS					
None					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	4	Signature			
			Value (dBc)	Limit ≤ (dBc)	Result
			-41.19	-20	Pass
			-49.55	-20	Pass
BLE/GFSK Low Channel, 2402 MHz					
BLE/GFSK High Channel, 2480 MHz					

BAND EDGE COMPLIANCE




TbITx 2017.01.27 XMII 2017.01.26

BLE/GFSK Low Channel, 2402 MHz		
	Value (dBc)	Limit ≤ (dBc)
	-41.19	-20

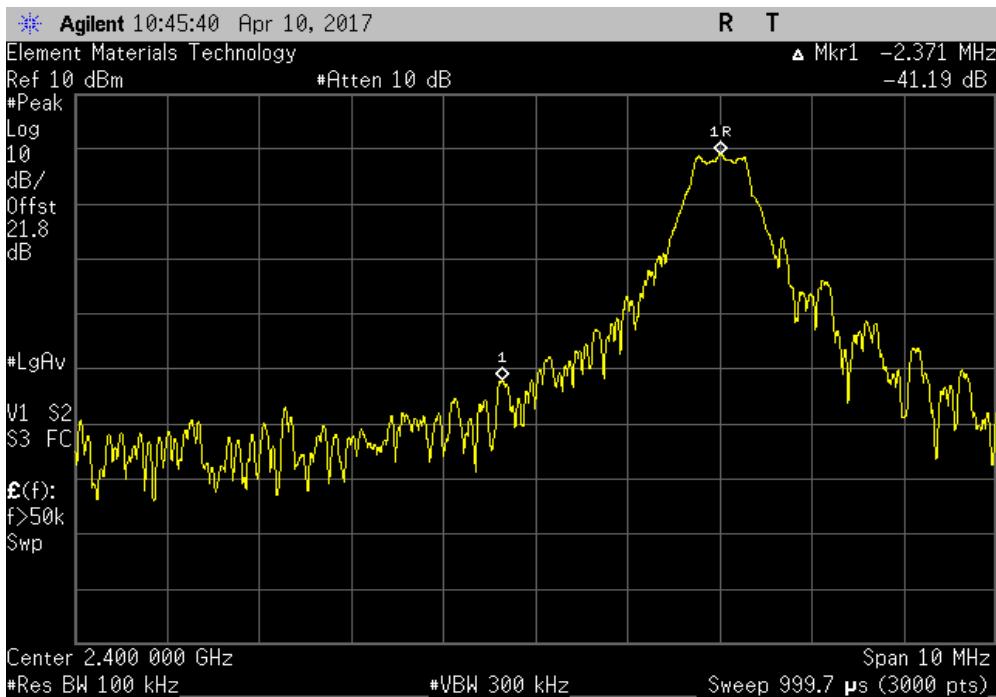

BLE/GFSK High Channel, 2480 MHz		
	Value (dBc)	Limit ≤ (dBc)
	-49.55	-20

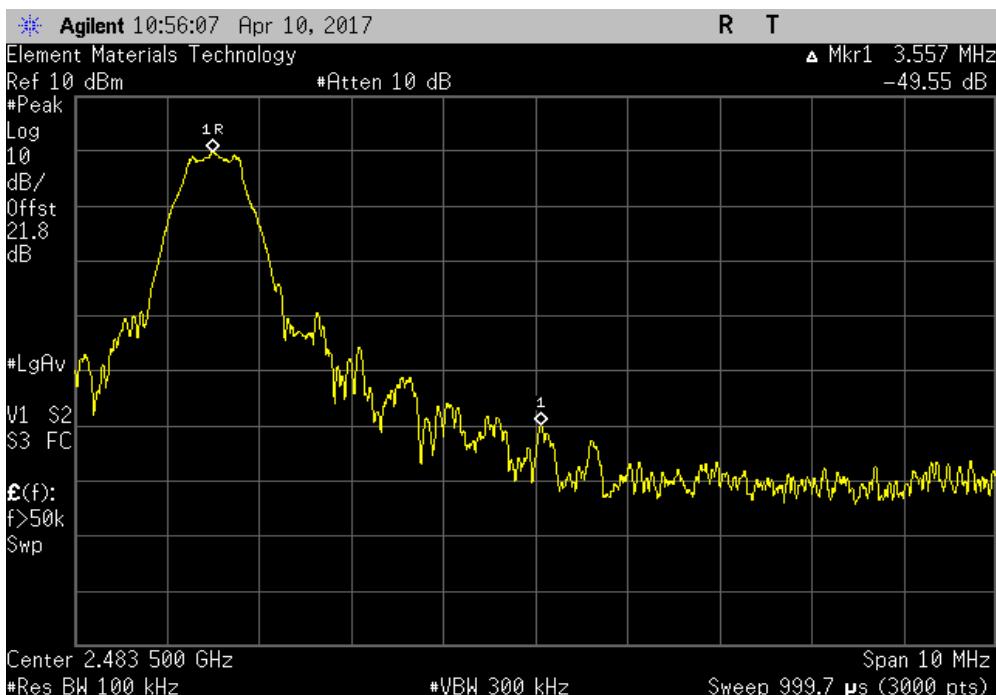

SPURIOUS CONDUCTED EMISSIONS



XMit 2017.01.26

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	E4422B	TGQ	3/17/2015	3/17/2018
Attenuator	S.M. Electronics	SA26B-20	RFW	2/14/2017	2/14/2018
Block - DC	Fairview Microwave	SD3379	AMI	9/15/2016	9/15/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	3/16/2017	3/16/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the spectrum was scanned throughout the specified frequency range.

SPURIOUS CONDUCTED EMISSIONS




EUT: L200B Wireless Hearing Aid		Work Order: INCN0002		
Serial Number: 17021314		Date: 04/10/17		
Customer: IntriCon Corporation		Temperature: 21.8 °C		
Attendees: Andrew Albind		Humidity: 33.7% RH		
Project: None		Barometric Pres.: 1016 mbar		
Tested by: Dustin Sparks	Power: Battery	Job Site: MN08		
TEST SPECIFICATIONS		Test Method		
FCC 15.247:2017		ANSI C63.10:2013		
COMMENTS				
None				
DEVIATIONS FROM TEST STANDARD				
None				
Configuration #	4	Signature		
		Frequency Range	Max Value (dBc)	
		Limit ≤ (dBc)	Result	
BLE/GFSK Low Channel, 2402 MHz		Fundamental	N/A	N/A
BLE/GFSK Low Channel, 2402 MHz		30 MHz - 12.5 GHz	-39.43	-20
BLE/GFSK Low Channel, 2402 MHz		12.5 GHz - 25 GHz	-51.46	-20
BLE/GFSK Mid Channel, 2442 MHz		Fundamental	N/A	N/A
BLE/GFSK Mid Channel, 2442 MHz		30 MHz - 12.5 GHz	-43.38	-20
BLE/GFSK Mid Channel, 2442 MHz		12.5 GHz - 25 GHz	-51.81	-20
BLE/GFSK High Channel, 2480 MHz		Fundamental	N/A	N/A
BLE/GFSK High Channel, 2480 MHz		30 MHz - 12.5 GHz	-34.75	-20
BLE/GFSK High Channel, 2480 MHz		12.5 GHz - 25 GHz	-51.53	-20

SPURIOUS CONDUCTED EMISSIONS




TbITx 2017.01.27 XMII 2017.01.26

Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result
Fundamental		N/A	N/A	N/A

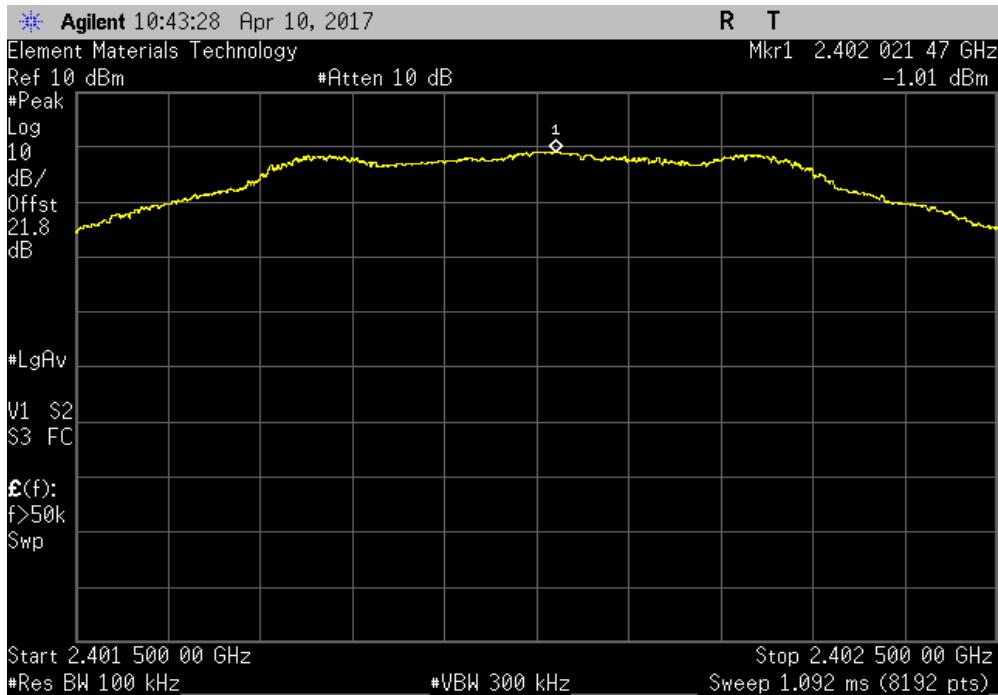

Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result
30 MHz - 12.5 GHz		-39.43	-20	Pass

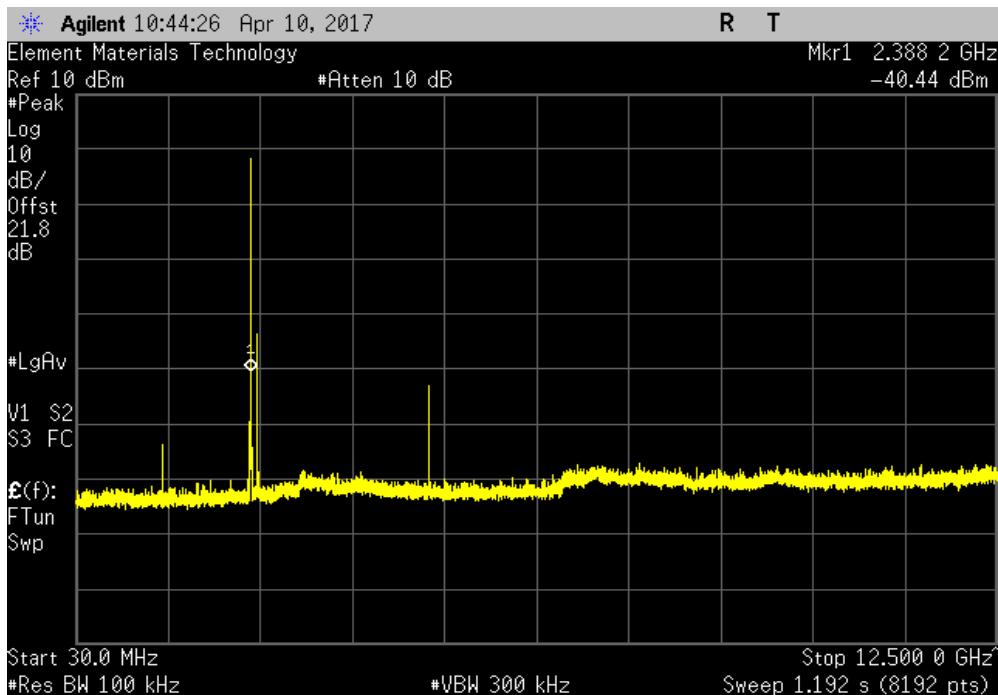


SPURIOUS CONDUCTED EMISSIONS




TbITx 2017.01.27 XMII 2017.01.26

BLE/GFSK Low Channel, 2402 MHz					
Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result	
12.5 GHz - 25 GHz		-51.46	-20	Pass	

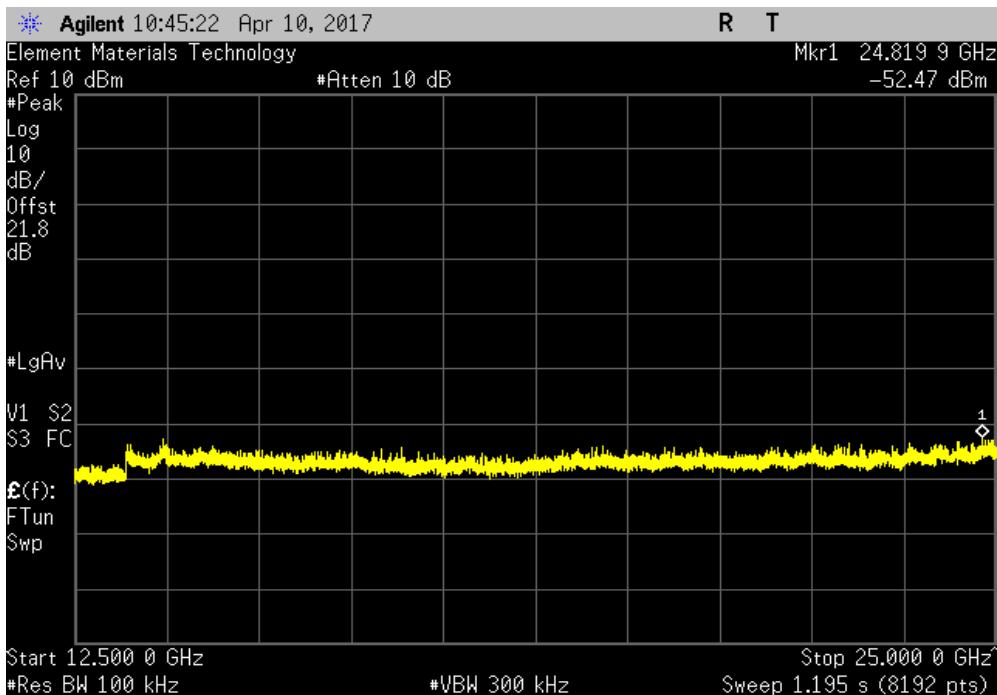

BLE/GFSK Mid Channel, 2442 MHz					
Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result	
Fundamental		N/A	N/A	N/A	N/A

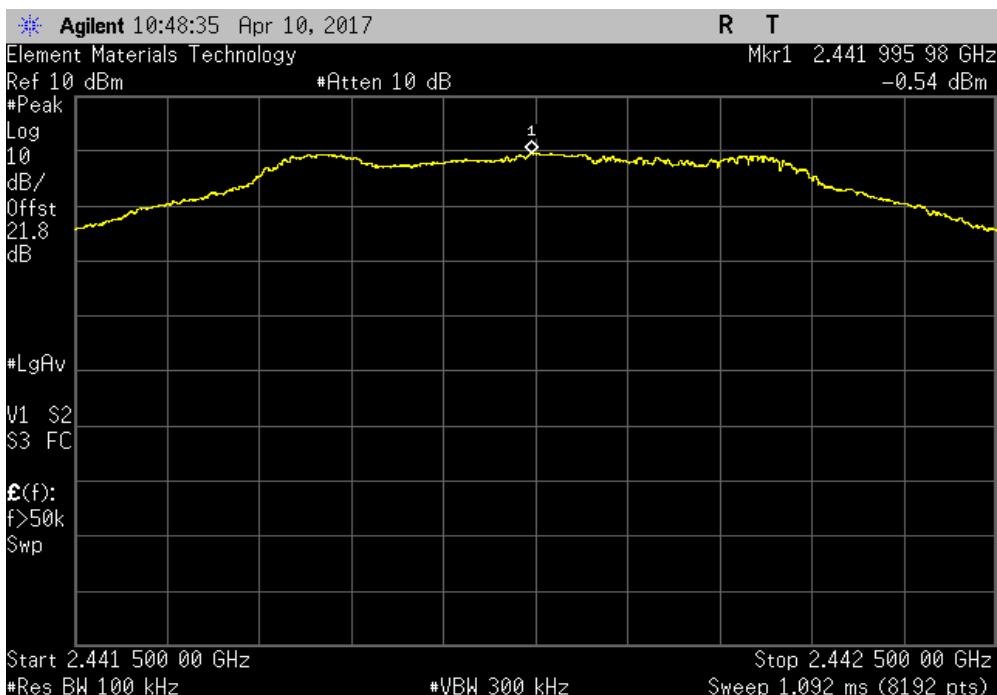


SPURIOUS CONDUCTED EMISSIONS




TbITx 2017.01.27 XMII 2017.01.26

Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result
30 MHz - 12.5 GHz		-43.38	-20	Pass

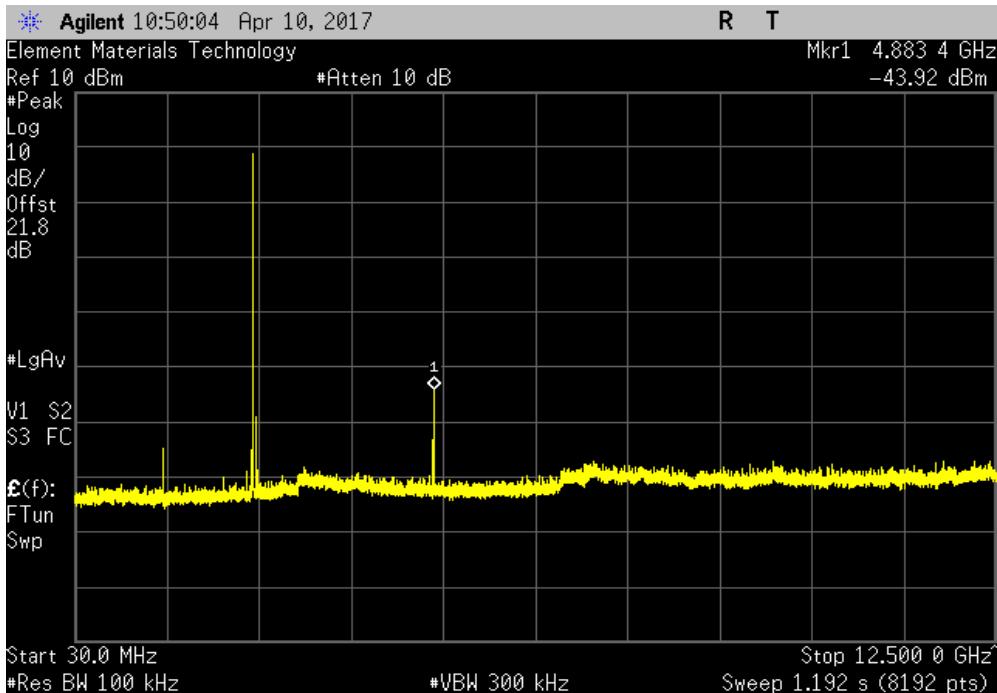

Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result
12.5 GHz - 25 GHz		-51.81	-20	Pass

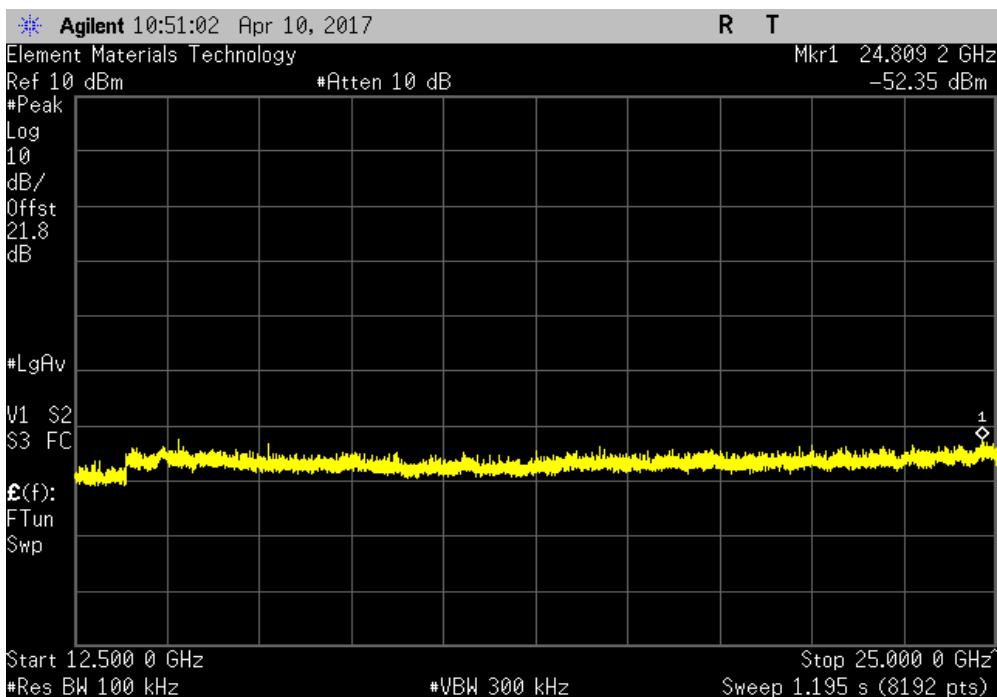


SPURIOUS CONDUCTED EMISSIONS




TbITx 2017.01.27 XMII 2017.01.26

Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result
Fundamental		N/A	N/A	N/A

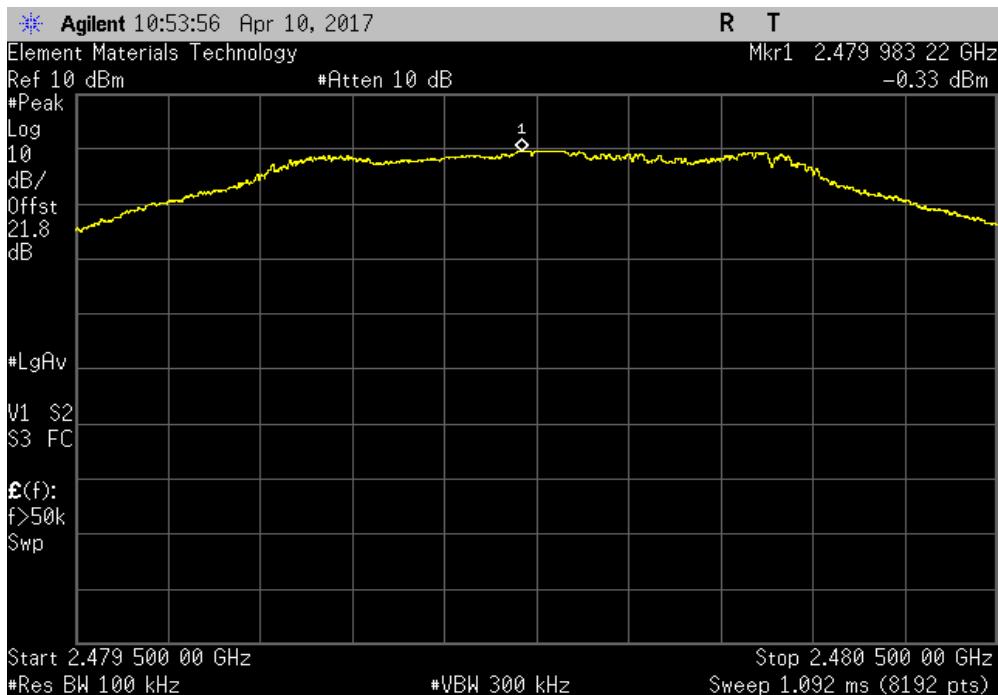

Frequency Range		Max Value (dBc)	Limit ≤ (dBc)	Result
30 MHz - 12.5 GHz		-34.75	-20	Pass

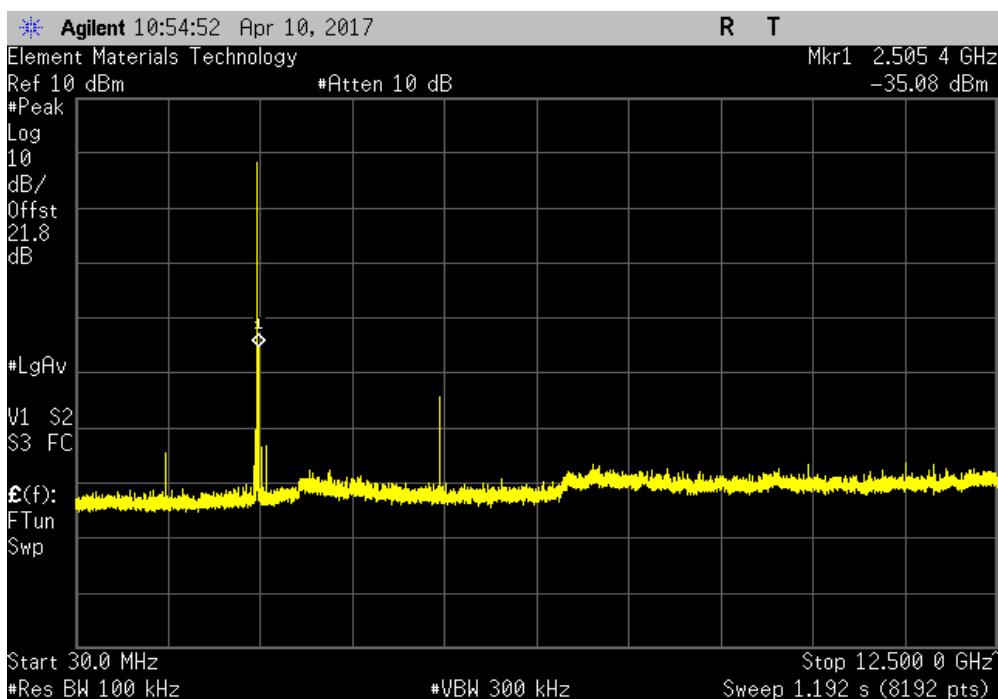

SPURIOUS CONDUCTED EMISSIONS



TbITx 2017.01.27 XMII 2017.01.26

BLE/GFSK High Channel, 2480 MHz			
Frequency Range	Max Value (dBc)	Limit ≤ (dBc)	Result
12.5 GHz - 25 GHz	-51.53	-20	Pass

