

# FCC RF Test Report

**APPLICANT** : Inventec Appliances Corp.  
**EQUIPMENT** : Pandigital Novel Mule-Rader  
**BRAND NAME** : Pandigital  
**MODEL NAME** : PRD09TW-R90L200  
**FCC ID** : POTPRD09TW  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : Digital Transmission System (DTS)

The product was received on Aug. 19, 2010 and completely tested on Sep. 22, 2010. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Anderson Chiu / Deputy Manager



## **SPORTON INTERNATIONAL INC.**

**No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.**



# TABLE OF CONTENTS

**REVISION HISTORY ..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Feature of Equipment Under Test ..... 5

    1.4 Testing Site ..... 6

    1.5 Applied Standards ..... 6

    1.6 Ancillary Equipment List ..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 7**

    2.1 RF Power ..... 7

    2.2 Test Mode ..... 8

    2.3 Connection Diagram of Test System ..... 9

    2.4 RF Utility ..... 9

**3 TEST RESULT ..... 10**

    3.1 6dB and 99% Bandwidth Measurement ..... 10

    3.2 Output Power Measurement ..... 23

    3.3 Band Edges Measurement ..... 25

    3.4 Spurious Emission Measurement ..... 33

    3.5 Power Spectral Density Measurement ..... 43

    3.6 AC Conducted Emission Measurement ..... 50

    3.7 Radiated Emission Measurement ..... 54

    3.8 Antenna Requirements ..... 75

**4 LIST OF MEASURING EQUIPMENT ..... 76**

**5 UNCERTAINTY OF EVALUATION ..... 77**

**APPENDIX A. PHOTOGRAPHS OF EUT**

**APPENDIX B. SETUP PHOTOGRAPHS**



## SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	A8.2(a)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	Gen 4.4.1	99% Bandwidth	-	Pass	-
3.2	15.247(b)	A8.4	Power Output	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(d)	A8.5	Frequency Band Edges	$\leq 20\text{dBc}$	Pass	-
3.4	15.247(d)	A8.5	Spurious Emission	$< 20\text{ dBc}$	Pass	-
3.5	15.247(e)	A8.2(b)	Power Spectral Density	$\leq 8\text{dBm}$	Pass	-
3.6	15.207	Gen 7.2.2	AC Conducted Emission	15.207(a)	Pass	Under limit 16.4 dB at 0.182 MHz
3.7	15.247(d)	A8.5	Transmitter Radiated Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.87 dB at 2483.50 MHz
3.8	15.203 & 15.247(b)	A8.4	Antenna Requirement	N/A	Pass	-

# 1 General Description

## 1.1 Applicant

**Inventec Appliances Corp.**

No. 37, Wugong 5th Road, Wugu industrial Park, Taipei County 248, Taiwan

## 1.2 Manufacturer

**Inventec Appliances Corp.**

No. 37, Wugong 5th Road, Wugu industrial Park, Taipei County 248, Taiwan

## 1.3 Feature of Equipment Under Test

Product Feature & Specification	
<b>Equipment</b>	Pandigital Novel Mule-Rader
<b>Brand Name</b>	Pandigital
<b>Model Name</b>	PRD09TW-R90L200
<b>FCC ID</b>	POTPRD09TW
<b>Tx/Rx Frequency Range</b>	2400 MHz ~ 2483.5 MHz
<b>Number of Channels</b>	11
<b>Carrier Frequency of Each Channel</b>	2412+(n-1)*5 MHz; n=1~11
<b>Channel Spacing</b>	5 MHz
<b>Maximum Output Power to Antenna</b>	802.11b : 16.17 dBm (0.041 W) 802.11g : 21.62 dBm (0.145 W) 802.11n (BW 20MHz) : 21.51 dBm (0.142 W)
<b>Antenna Type</b>	Chip Antenna with gain 2.5 dBi
<b>HW Version</b>	EVT
<b>SW Version</b>	BN02-0826-2010-9D
<b>Type of Modulation</b>	802.11b : DSSS (BPSK / QPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)
<b>EUT Stage</b>	Identical Prototype

**Remark:**

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Transmission System (DTS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Testing Site

<b>Test Site</b>	SPORTON INTERNATIONAL INC.		
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-3273456 / FAX: +886-3-3284978		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC/IC Registration No.</b>
	CO05-HY	03CH05-HY	TW1022/4086B-1

## 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 (Measurement Guidelines of DTS)
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 7

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B (DoC), recorded in a separate test report.

## 1.6 Ancillary Equipment List

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
3.	iPod Earphone	Apple	N/A	FCC DoC	Unshielded, 1.0 m	N/A
4.	Notebook	DELL	Vostro 1510	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

## 2 Test Configuration of Equipment Under Test

### 2.1 RF Power

Preliminary tests were performed in different data rate and recorded the RF power output in the following table:

Channel	Frequency	2.4GHz 802.11b RF Power (dBm)			
		At DSSS Data Rate			
		1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
CH 01	2412 MHz	15.76	15.74	15.72	15.80
CH 06	2437 MHz	15.72	16.06	16.00	15.83
CH 11	2462 MHz	15.40	15.72	15.99	<b>16.17</b>

Channel	Frequency	2.4GHz 802.11g RF Power (dBm)							
		At OFDM Data Rate							
		6 Mbps	9 Mbps	12 Mbps	18 Mbps	24 Mbps	36 Mbps	48 Mbps	54 Mbps
CH 01	2412 MHz	21.09	21.25	21.19	20.83	20.56	19.75	20.69	20.87
CH 06	2437 MHz	<b>21.62</b>	21.34	21.21	21.14	20.87	20.62	20.57	20.86
CH 11	2462 MHz	21.56	21.49	21.12	20.82	20.80	20.55	20.51	21.11

Channel	Frequency	2.4GHz 802.11n (BW 20MHz) RF Power (dBm)							
		At OFDM Data Rate							
		m0	m1	m2	m3	m4	m5	m6	m7
CH 01	2412 MHz	<b>21.51</b>	20.41	20.88	20.95	20.76	20.56	21.25	20.64
CH 06	2437 MHz	21.39	21.35	21.30	20.19	20.97	20.97	21.00	20.88
CH 11	2462 MHz	20.97	20.90	20.68	20.96	20.77	20.76	20.54	20.46

**Remark:**

1. The data rates of WLAN 802.11b/g/n were set in 11Mbps for 802.11b, 6Mbps for 802.11g, and m0 for 802.11n (BW 20MHz) for all the test cases due to the highest RF output power.
2. The EUT is programmed to transmit signals continuously for all testing.
3. The EUT supports 802.11n (BW 20 MHz) function only, not supports 802.11n (BW 40 MHz) function.

## 2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz), radiated emission (30 MHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Pre-scanned tests were conducted to determine the final configuration from all possible combinations.


The following tables are showing the test modes as the worst cases and recorded in this report.

Test Cases	
Test Item	802.11b (Modulation : DSSS) / 802.11g/n (Modulation : OFDM)
Conducted TCs	Mode 1 : 802.11b CH01_2412 MHz Mode 2 : 802.11b CH06_2437 MHz Mode 3 : 802.11b CH11_2462 MHz Mode 4 : 802.11g_CH01_2412 MHz Mode 5 : 802.11g_CH06_2437 MHz Mode 6 : 802.11g_CH11_2462 MHz Mode 7 : 802.11n (BW 20M)_CH01_2412 MHz Mode 8 : 802.11n (BW 20M)_CH06_2437 MHz Mode 9 : 802.11n (BW 20M)_CH11_2462 MHz
Radiated TCs	Mode 1 : 802.11b CH01_2412 MHz + Battery 1 Mode 2 : 802.11b CH06_2437 MHz + Battery 1 Mode 3 : 802.11b CH11_2462 MHz + Battery 1 Mode 4 : 802.11g_CH01_2412 MHz + Battery 1 Mode 5 : 802.11g_CH06_2437 MHz + Battery 1 Mode 6 : 802.11g_CH11_2462 MHz + Battery 1 Mode 7 : 802.11n (BW 20M)_CH01_2412 MHz + Battery 1 Mode 8 : 802.11n (BW 20M)_CH06_2437 MHz+ Battery 1 Mode 9 : 802.11n (BW 20M)_CH11_2462 MHz + Battery 1
AC Conducted Emission	Mode 1 : WLAN Link + Earphone + Battery 2 + Adapter
<b>Remark:</b> Mode 7~9 of Radiated TCs only verify bandedge.	




## 2.3 Connection Diagram of Test System

### < Radiated Emission >

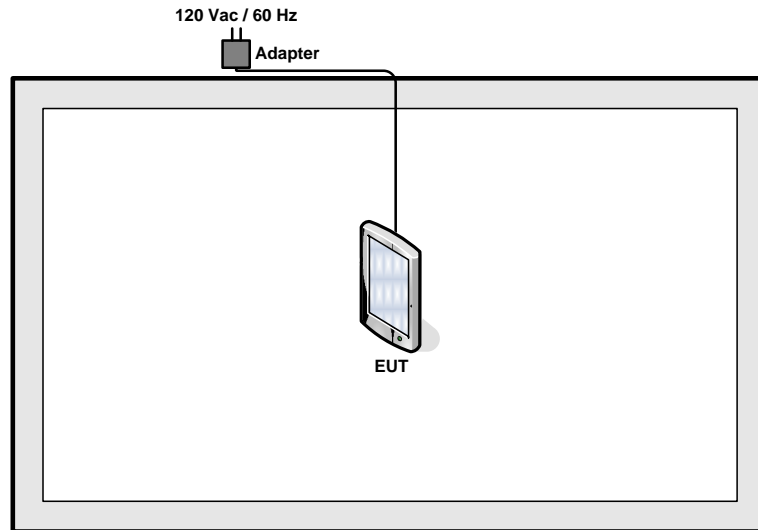

### < Conducted Emission >

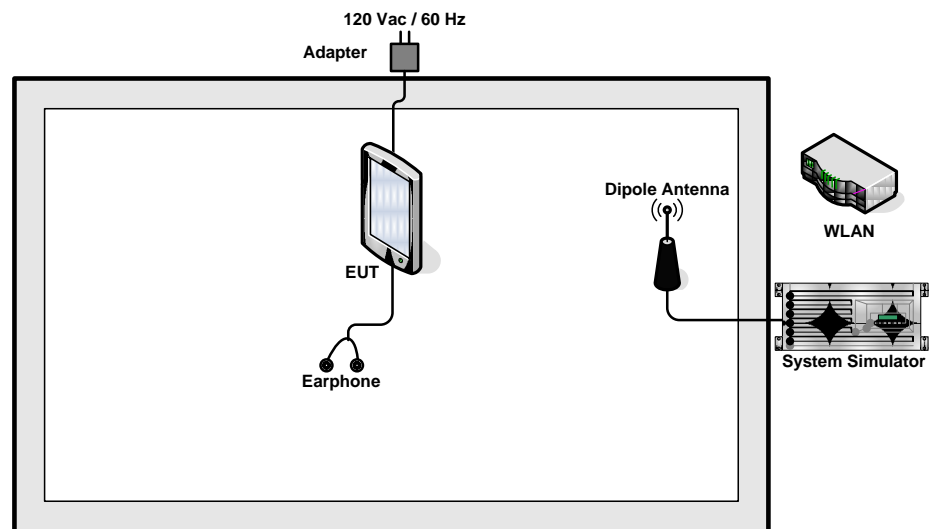

## 2.4 RF Utility

The programmed RF utility “AT Command” is installed in EUT to provide channel selection, power level, data rate and the application type. RF Utility can send transmitting signal for all testing. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz.  
In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.
4. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

##### 3.1.4 Test Setup

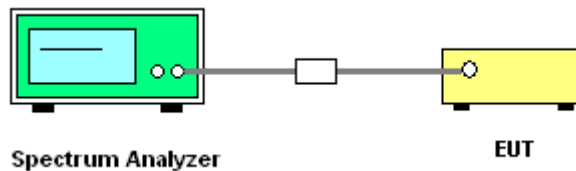




3.1.5 Test Result of 6dB Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	25~27°C
Test Engineer :	Lancelot Chen	Relative Humidity :	45~48%

Channel	Frequency (MHz)	802.11b 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	8.04	0.5	Pass
06	2437	8.12	0.5	Pass
11	2462	8.20	0.5	Pass


Mode 1 : 6 dB Bandwidth Plot on 802.11b Channel 01

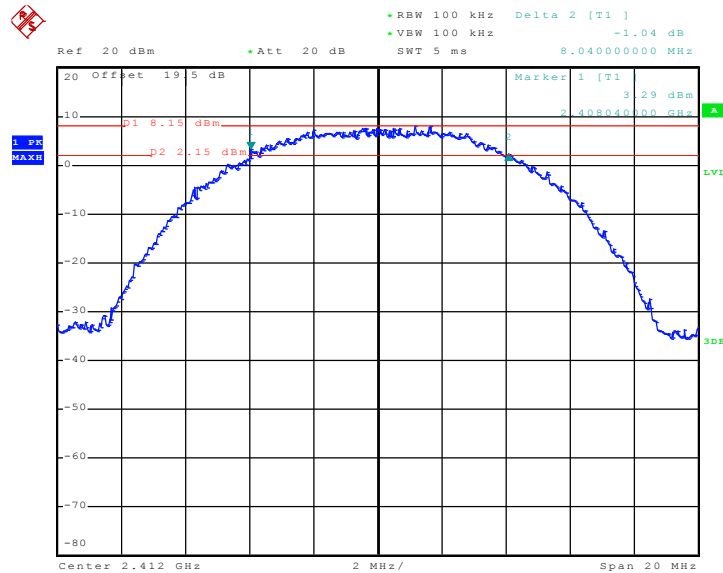

Date: 11.SEP.2010 01:52:38




Mode 2 : 6 dB Bandwidth Plot on 802.11b Channel 06

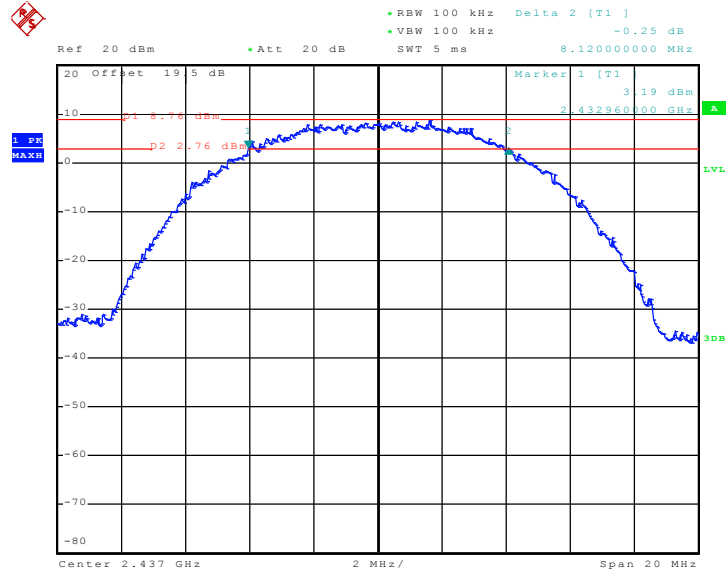

Date: 11.SEP.2010 02:26:44

Mode 3 : 6 dB Bandwidth Plot on 802.11b Channel 11

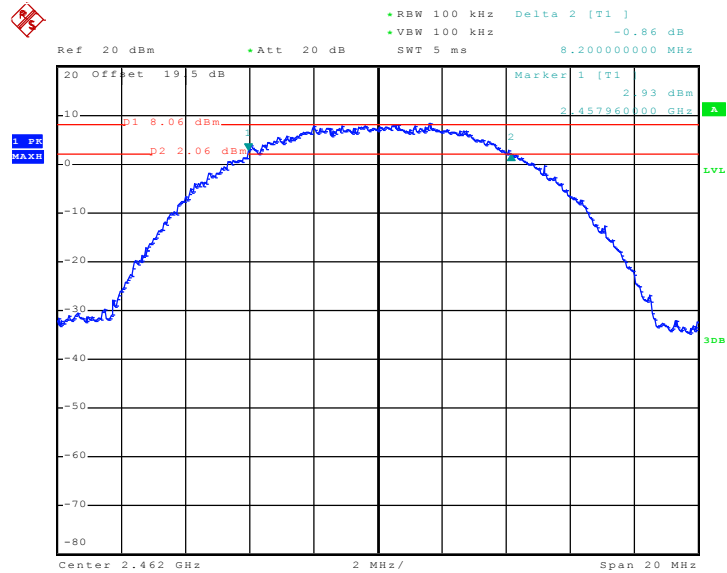


Date: 11.SEP.2010 02:29:02



Test Mode :	Mode 4, 5, 6	Temperature :	25~27°C
Test Engineer :	Lancelot Chen	Relative Humidity :	45~48%

Channel	Frequency (MHz)	802.11g 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	15.16	0.5	Pass
06	2437	15.16	0.5	Pass
11	2462	15.16	0.5	Pass


Mode 4 : 6 dB Bandwidth Plot on 802.11g Channel 01

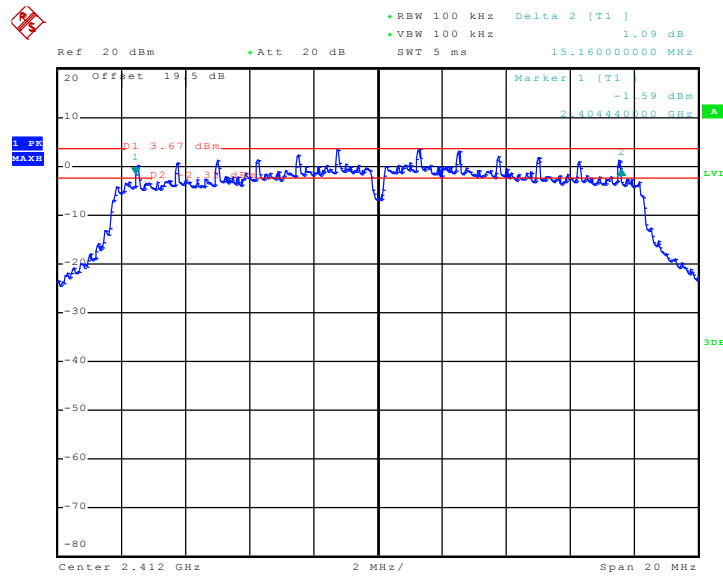

Date: 11.SEP.2010 02:48:22




Mode 5 : 6 dB Bandwidth Plot on 802.11g Channel 06

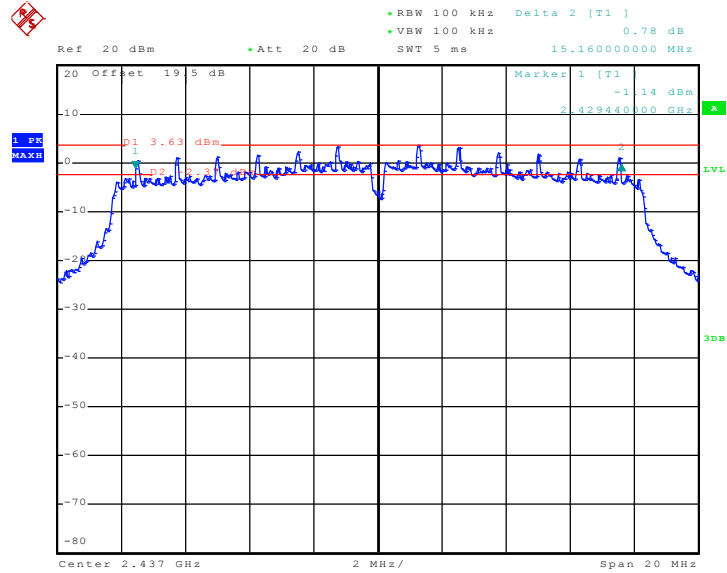

Date: 11.SEP.2010 03:04:33

Mode 6 : 6 dB Bandwidth Plot on 802.11g Channel 11

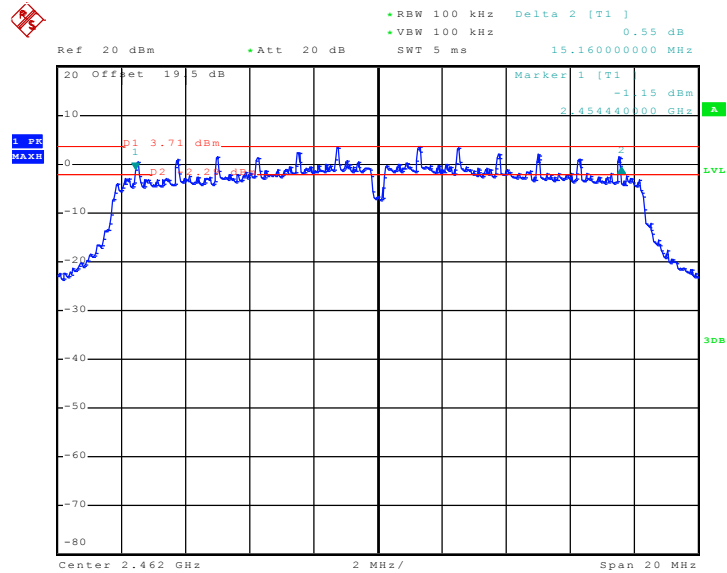


Date: 11.SEP.2010 03:08:44



Test Mode :	Mode 7, 8, 9	Temperature :	25~27°C
Test Engineer :	Lancelot Chen	Relative Humidity :	45~48%

Channel	Frequency (MHz)	802.11n (BW 20MHz) 6dB Bandwidth (MHz)	6dB Bandwidth Min. Limit (MHz)	Pass/Fail
01	2412	15.12	0.5	Pass
06	2437	15.16	0.5	Pass
11	2462	15.16	0.5	Pass

Mode 7 : 6 dB Bandwidth Plot on 802.11n(BW 20MHz) Channel 01

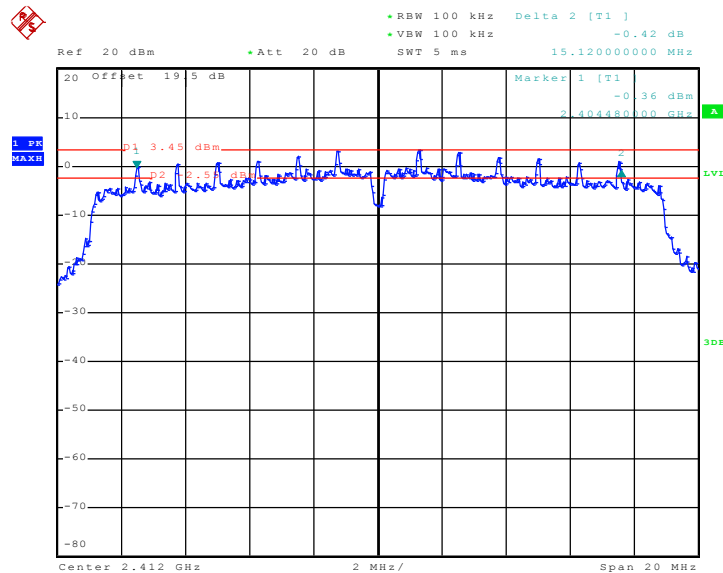

Date: 11.SEP.2010 04:00:45








3.1.6 Test Result of 99% Occupied Bandwidth

Test Mode :	Mode 1, 2, 3	Temperature :	25~27°C
Test Engineer :	Lancelot Chen	Relative Humidity :	45~48%

Channel	Frequency (MHz)	802.11b 99% Occupied Bandwidth (MHz)	Pass/Fail
01	2412	11.60	Pass
06	2437	11.52	Pass
11	2462	11.60	Pass


Mode 1 : 99% Occupied Bandwidth Plot on 802.11b Channel 01

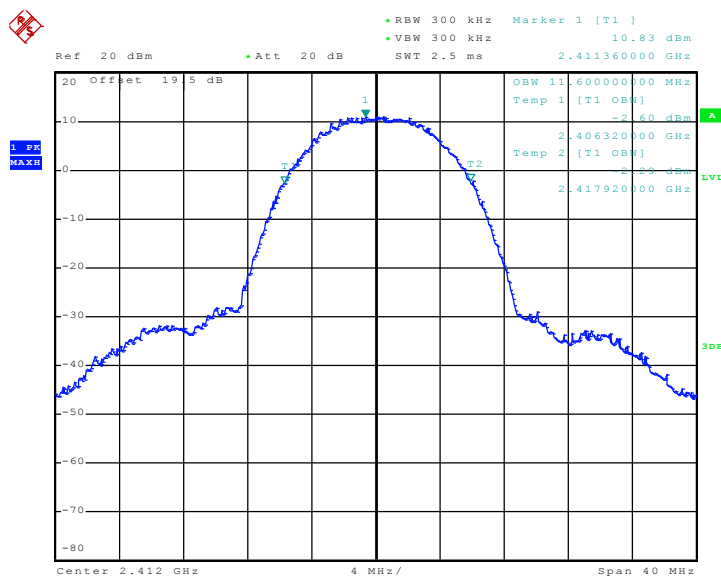

Date: 11.SEP.2010 02:07:31




Mode 2 : 99% Occupied Bandwidth Plot on 802.11b Channel 06

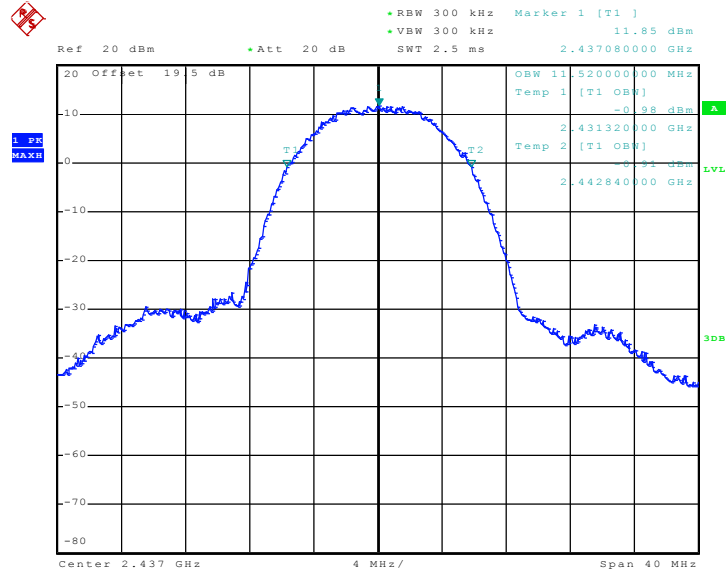

Date: 11.SEP.2010 02:08:02

Mode 3 : 99% Occupied Bandwidth Plot on 802.11b Channel 11

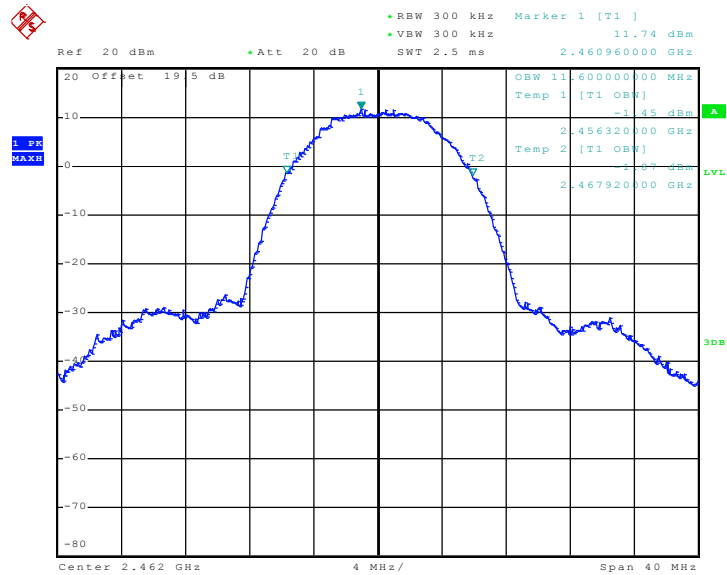


Date: 11.SEP.2010 02:31:11



Test Mode :	Mode 4, 5, 6	Temperature :	25~27°C
Test Engineer :	Lancelot Chen	Relative Humidity :	45~48%

Channel	Frequency (MHz)	802.11g 99% Occupied Bandwidth (MHz)	Pass/Fail
01	2412	16.80	Pass
06	2437	16.72	Pass
11	2462	16.80	Pass


Mode 4 : 99% Occupied Bandwidth Plot on 802.11g Channel 01

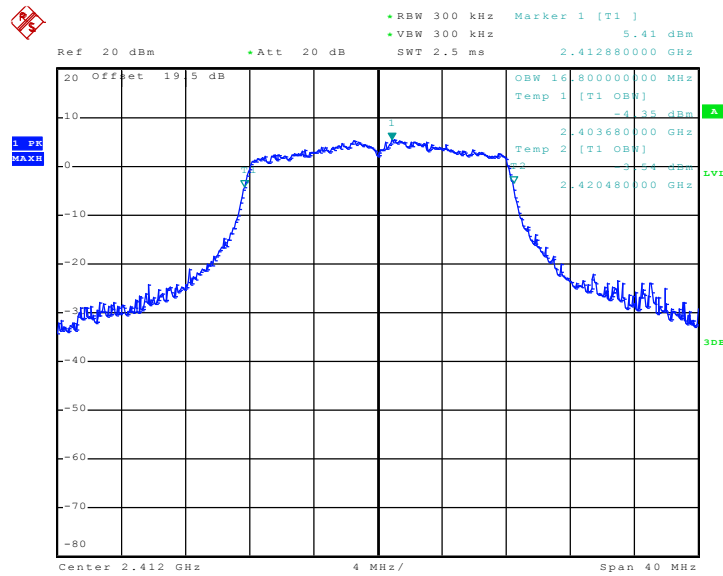

Date: 11.SEP.2010 03:01:21




Mode 5 : 99% Occupied Bandwidth Plot on 802.11g Channel 06

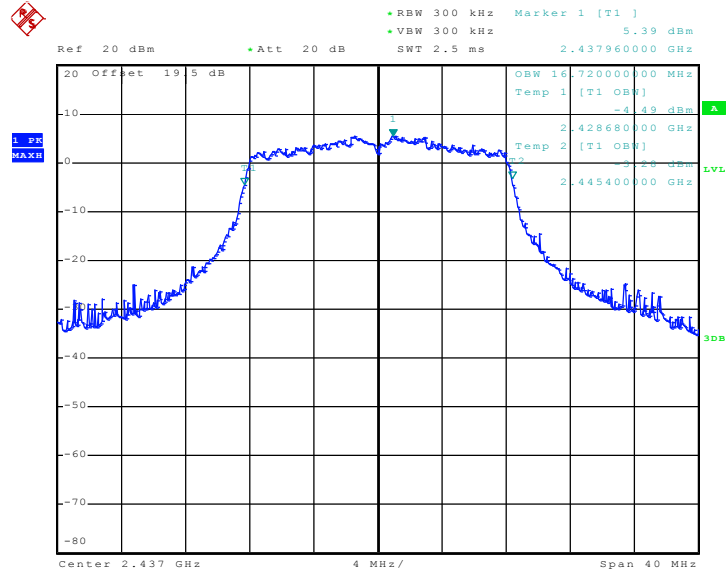

Date: 11.SEP.2010 03:06:12

Mode 6 : 99% Occupied Bandwidth Plot on 802.11g Channel 11

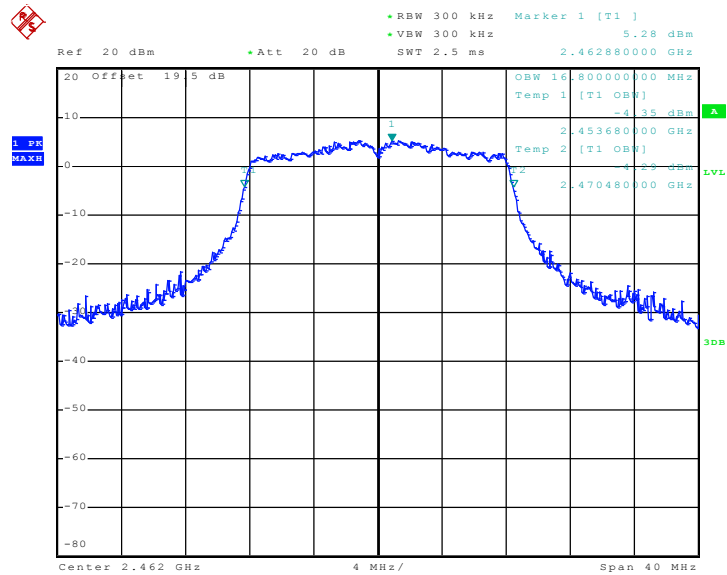


Date: 11.SEP.2010 03:23:39



Test Mode :	Mode 7, 8, 9	Temperature :	25~27°C
Test Engineer :	Lancelot Chen	Relative Humidity :	45~48%

Channel	Frequency (MHz)	802.11n (BW 20MHz) 99% Occupied Bandwidth (MHz)	Pass/Fail
01	2412	17.84	Pass
06	2437	17.84	Pass
11	2462	17.92	Pass


Mode 7 : 99% Occupied Bandwidth Plot on 802.11n(BW 20MHz) Channel 01

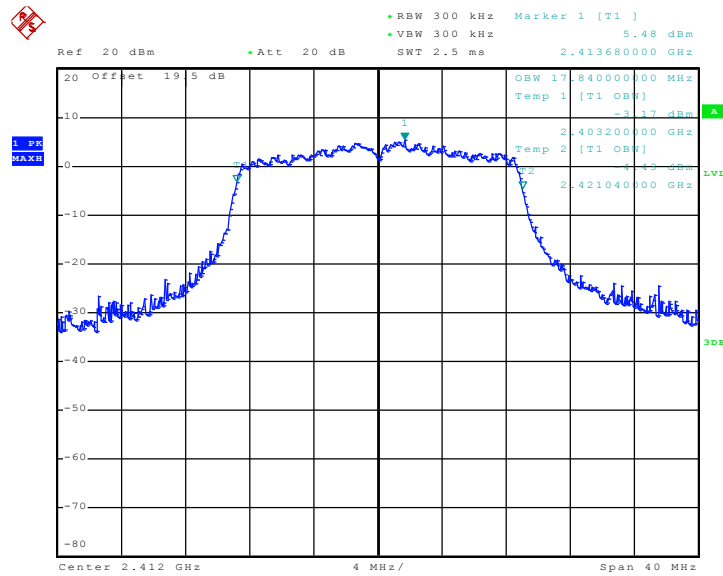

Date: 11.SEP.2010 04:02:47




Mode 8 : 99% Occupied Bandwidth Plot on 802.11n(BW 20MHz) Channel 06

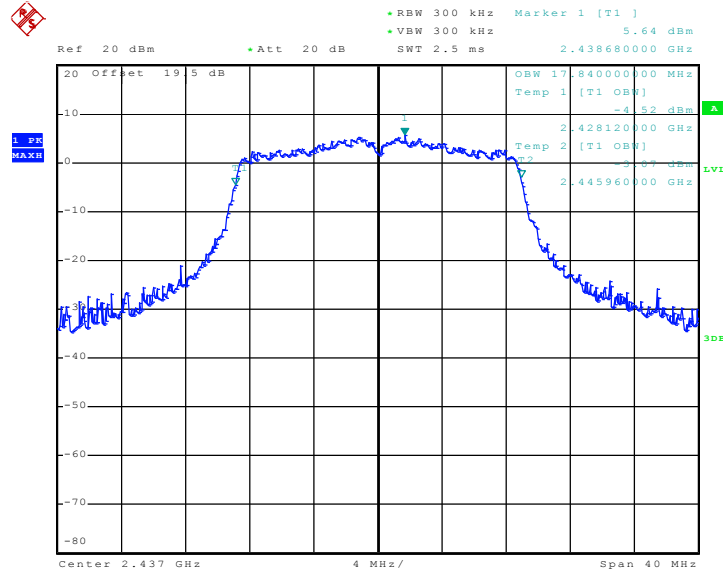

Date: 11.SEP.2010 04:03:28

Mode 9 : 99% Occupied Bandwidth Plot on 802.11n(BW 20MHz) Channel 11

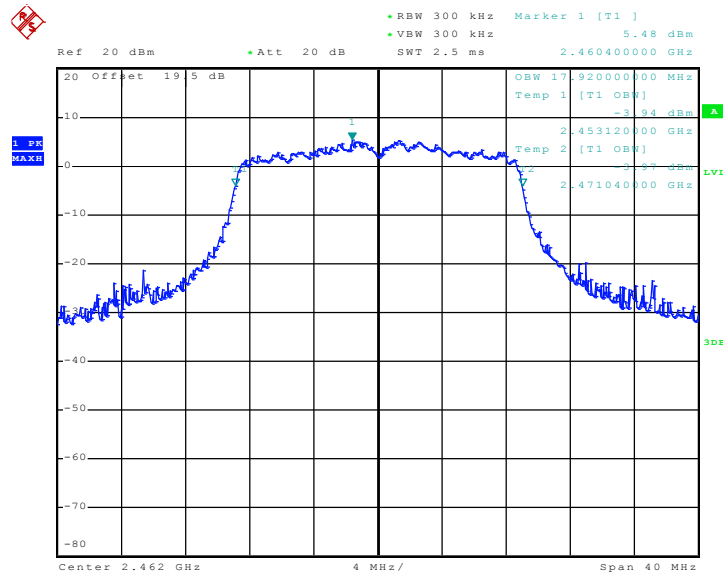

Date: 11.SEP.2010 04:07:33

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the power meter by a low loss cable.
3. Measure the power by power meter.

### 3.2.4 Test Setup

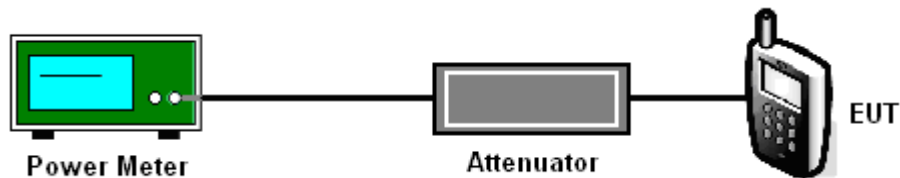



### 3.2.5 Test Result of Output Power

<b>Test Mode :</b>	Mode 1, 2, 3	<b>Temperature :</b>	25~27°C
<b>Test Engineer :</b>	Lancelot Chen	<b>Relative Humidity :</b>	45~48%

Channel	Frequency (MHz)	802.11b Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	15.80	30	Pass
06	2437	15.83	30	Pass
11	2462	16.17	30	Pass

<b>Test Mode :</b>	Mode 4, 5, 6	<b>Temperature :</b>	25~27°C
<b>Test Engineer :</b>	Lancelot Chen	<b>Relative Humidity :</b>	45~48%

Channel	Frequency (MHz)	802.11g Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	21.09	30	Pass
06	2437	21.62	30	Pass
11	2462	21.56	30	Pass

<b>Test Mode :</b>	Mode 7, 8, 9	<b>Temperature :</b>	25~27°C
<b>Test Engineer :</b>	Lancelot Chen	<b>Relative Humidity :</b>	45~48%

Channel	Frequency (MHz)	802.11n (BW 20MHz) Measured Output Power (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	21.51	30	Pass
06	2437	21.39	30	Pass
11	2462	20.97	30	Pass





### **3.3 Band Edges Measurement**

#### **3.3.1 Limit of Band Edges**

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB.

#### **3.3.2 Measuring Instruments**


See list of measuring instruments of this test report.

#### **3.3.3 Test Procedures**


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. Conducted emission test: Set RBW = 100 kHz, Video bandwidth (VBW)  $\geq$  RBW. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Apply to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep=Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation as in FCC Section 15.35(b) and (c).

### 3.3.4 Test Setup

#### <Radiated Band Edges>

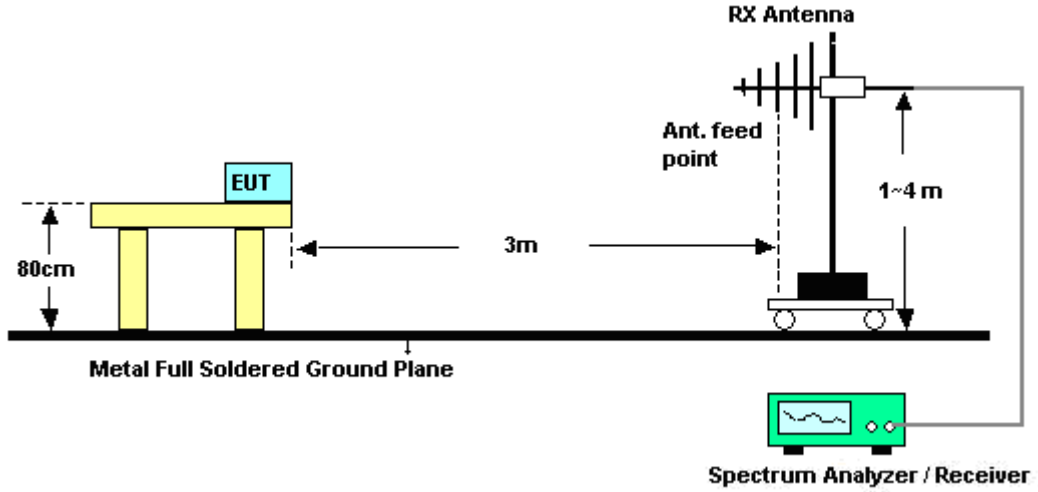

#### <Conducted Band Edges>

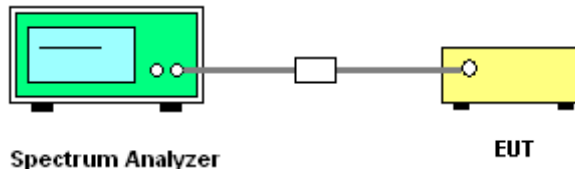



3.3.5 Test Result of Radiated Band Edges

Test Mode :	Mode 1	Temperature :	26~27°C
Test Band :	802.11b	Relative Humidity :	42~43%
Test Channel :	01	Test Engineer :	Kay Wu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2331.28	50.70	-23.30	74.00	48.75	31.63	4.41	34.09	100	15	Peak
2331.28	39.25	-14.75	54.00	37.30	31.63	4.41	34.09	100	15	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2331.66	49.58	-24.42	74.00	47.63	31.63	4.41	34.09	121	295	Peak
2331.66	39.47	-14.53	54.00	37.52	31.63	4.41	34.09	121	295	Average

Test Mode :	Mode 3	Temperature :	26~27°C
Test Band :	802.11b	Relative Humidity :	42~43%
Test Channel :	11	Test Engineer :	Kay Wu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2484.80	51.42	-22.58	74.00	49.13	31.78	4.59	34.08	100	47	Peak
2484.80	37.96	-16.04	54.00	35.67	31.78	4.59	34.08	100	47	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2499.43	47.66	-26.34	74.00	45.32	31.80	4.62	34.08	104	79	Peak
2499.43	35.25	-18.75	54.00	32.91	31.80	4.62	34.08	104	79	Average



Test Mode :	Mode 4	Temperature :	26~27°C
Test Band :	802.11g	Relative Humidity :	42~43%
Test Channel :	01	Test Engineer :	Kay Wu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.61	65.08	-8.92	74.00	62.99	31.70	4.47	34.08	105	59	Peak
2389.61	44.44	-9.56	54.00	42.35	31.70	4.47	34.08	105	59	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.42	65.05	-8.95	74.00	62.96	31.70	4.47	34.08	100	297	Peak
2389.42	45.28	-8.72	54.00	43.19	31.70	4.47	34.08	100	297	Average

Test Mode :	Mode 6	Temperature :	26~27°C
Test Band :	802.11g	Relative Humidity :	42~43%
Test Channel :	11	Test Engineer :	Kay Wu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.50	68.90	-5.10	74.00	66.61	31.78	4.59	34.08	102	46	Peak
2483.50	50.13	-3.87	54.00	47.84	31.78	4.59	34.08	102	46	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2483.50	66.28	-7.72	74.00	63.99	31.78	4.59	34.08	120	294	Peak
2483.50	46.24	-7.76	54.00	43.95	31.78	4.59	34.08	120	294	Average



Test Mode :	Mode 7	Temperature :	26~27°C
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	42~43%
Test Channel :	01	Test Engineer :	Kay Wu

ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.61	64.60	-9.40	74.00	62.51	31.70	4.47	34.08	122	15	Peak
2389.61	45.78	-8.22	54.00	43.69	31.70	4.47	34.08	122	15	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.99	62.57	-11.43	74.00	60.45	31.70	4.50	34.08	100	295	Peak
2389.99	44.72	-9.28	54.00	42.60	31.70	4.50	34.08	100	295	Average

Test Mode :	Mode 9	Temperature :	26~27°C
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	42~43%
Test Channel :	11	Test Engineer :	Kay Wu


ANTENNA POLARITY : HORIZONTAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2485.94	65.88	-8.12	74.00	63.59	31.78	4.59	34.08	101	39	Peak
2485.94	48.46	-5.54	54.00	46.17	31.78	4.59	34.08	101	39	Average

ANTENNA POLARITY : VERTICAL										
Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2484.99	62.51	-11.49	74.00	60.22	31.78	4.59	34.08	121	293	Peak
2484.99	44.86	-9.14	54.00	42.57	31.78	4.59	34.08	121	293	Average

### 3.3.6 Test Plots of Conducted Band Edges


Test Mode :	Mode 1 and 3	Temperature :	25~27°C
Test Band :	802.11b	Relative Humidity :	45~48%
Test Channel :	01 and 11	Test Engineer :	Lancelot Chen

Low Band Edge Plot on 802.11b Channel 01

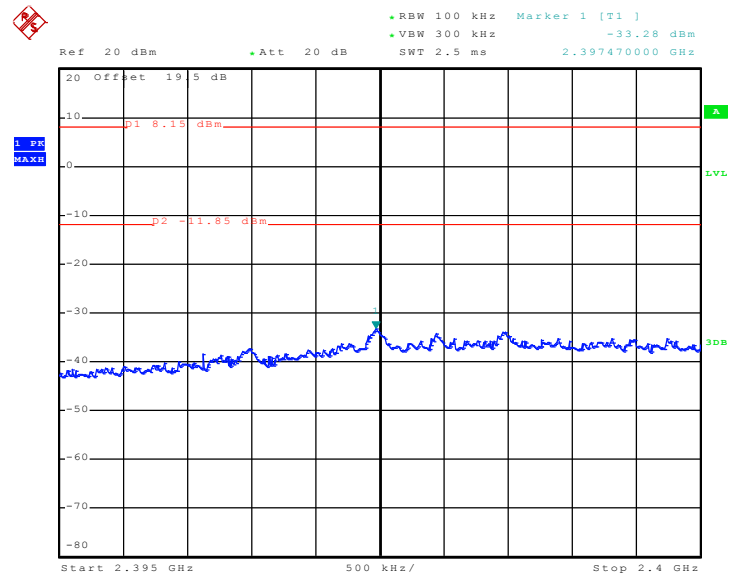

Date: 11.SEP.2010 01:53:15

High Band Edge Plot on 802.11b Channel 11

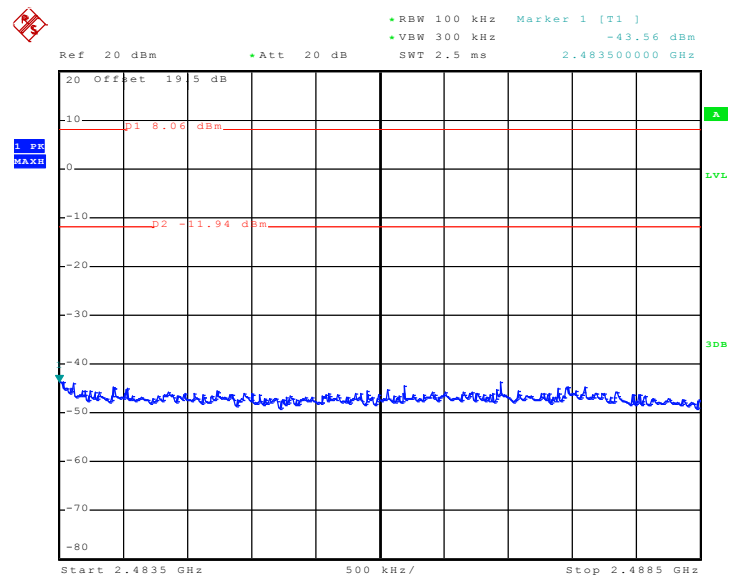


Date: 11.SEP.2010 02:29:57




Test Mode :	Mode 4 and 6	Temperature :	25~27°C
Test Band :	802.11g	Relative Humidity :	45~48%
Test Channel :	01 and 11	Test Engineer :	Lancelot Chen

Low Band Edge Plot on 802.11g Channel 01

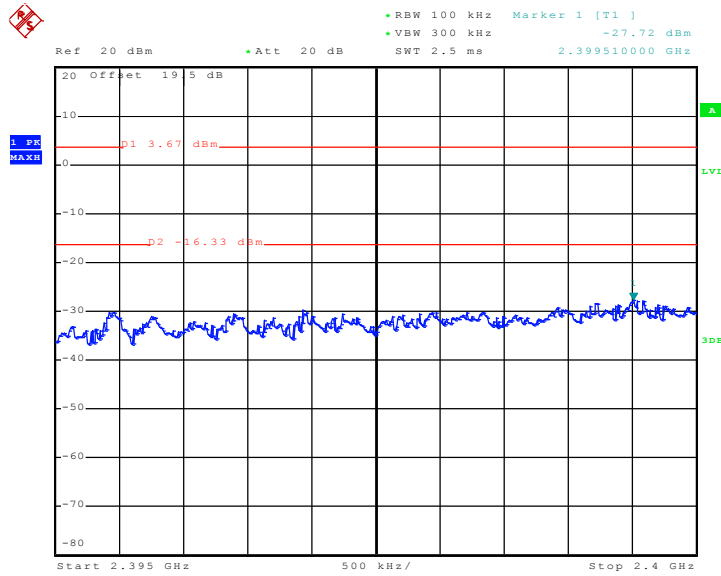

Date: 11.SEP.2010 02:55:08

High Band Edge Plot on 802.11g Channel 11

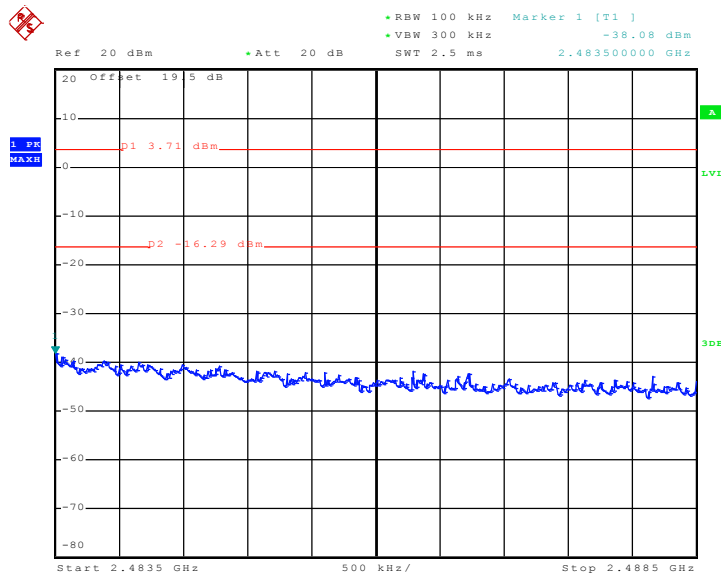


Date: 11.SEP.2010 03:12:16




Test Mode :	Mode 7 and 9	Temperature :	25~27°C
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	45~48%
Test Channel :	01 and 11	Test Engineer :	Lancelot Chen

Low Band Edge Plot on 802.11n (BW 20MHz) Channel 01

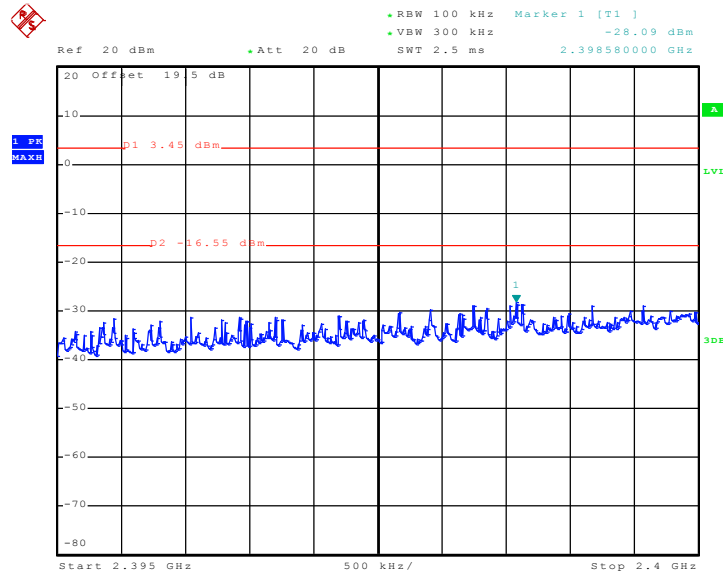

Date: 11.SEP.2010 04:01:25

High Band Edge Plot on 802.11n (BW 20MHz) Channel 11

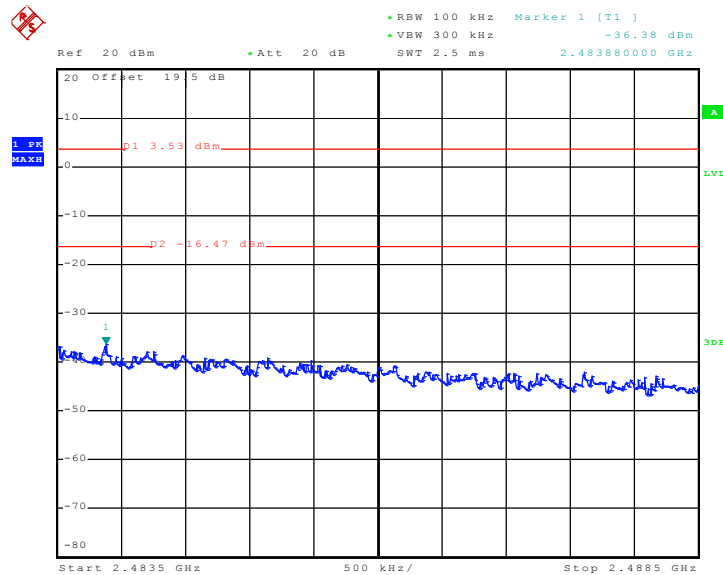

Date: 11.SEP.2010 04:06:10



## 3.4 Spurious Emission Measurement

### 3.4.1 Limit of Spurious Emission Measurement

All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.4.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW)  $\geq$  RBW, scan up through 10th harmonic. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

### 3.4.4 Test Setup

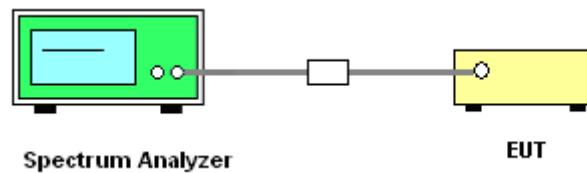




### 3.4.5 Test Plots of Spurious Emission


Test Mode :	Mode 1	Temperature :	25~27°C
Test Band :	802.11b	Relative Humidity :	45~48%
Test Channel :	01	Test Engineer :	Lancelot Chen

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

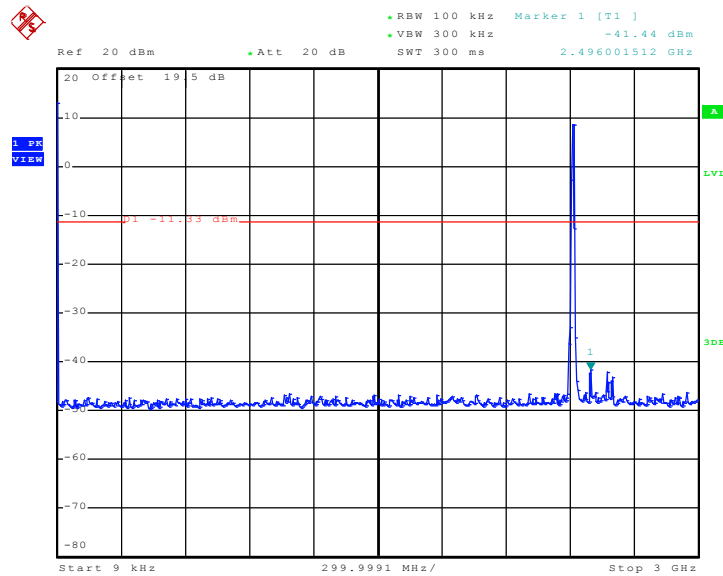

Date: 11.SEP.2010 03:52:49

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

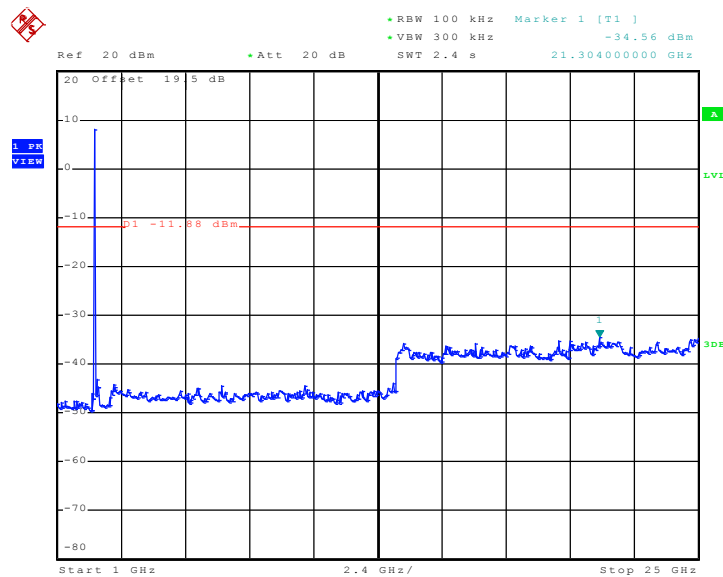


Date: 11.SEP.2010 03:51:16




Test Mode :	Mode 2	Temperature :	25~27°C
Test Band :	802.11b	Relative Humidity :	45~48%
Test Channel :	06	Test Engineer :	Lancelot Chen

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

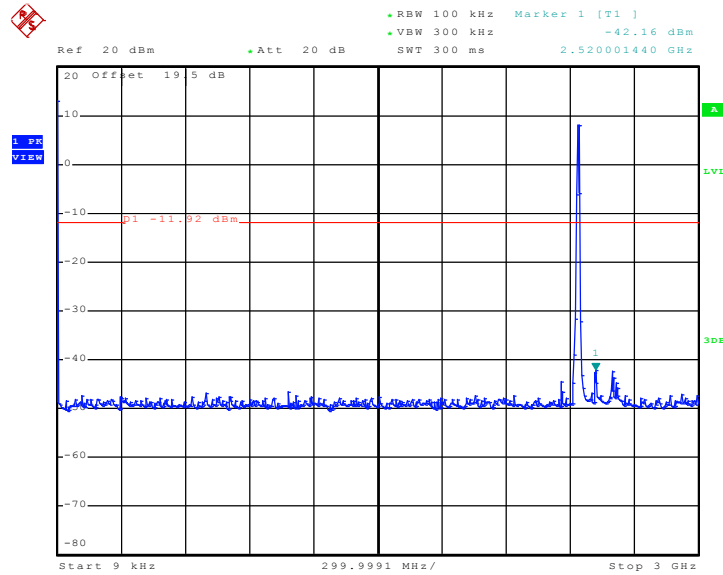

Date: 11.SEP.2010 03:53:20

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

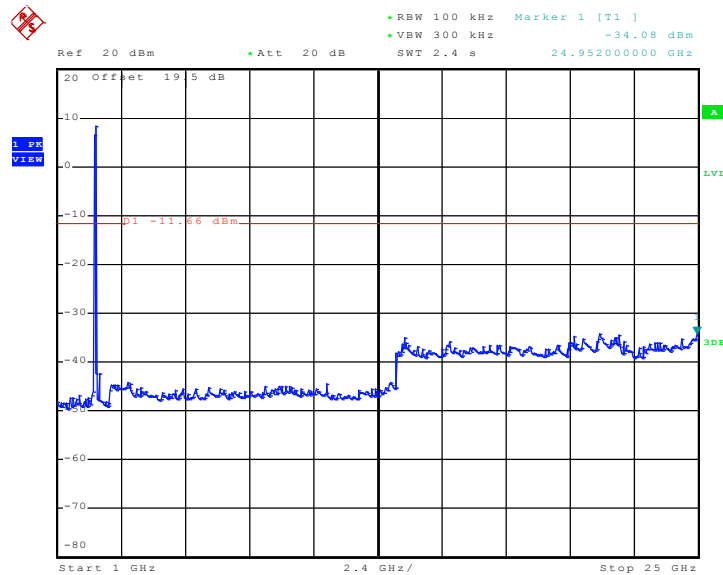


Date: 11.SEP.2010 03:55:31




Test Mode :	Mode 3	Temperature :	25~27°C
Test Band :	802.11b	Relative Humidity :	45~48%
Test Channel :	11	Test Engineer :	Lancelot Chen

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

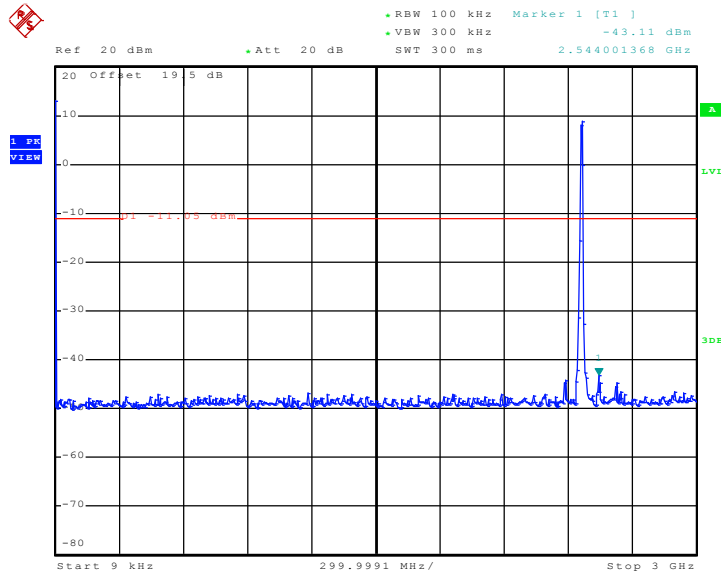

Date: 11.SEP.2010 03:54:01

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

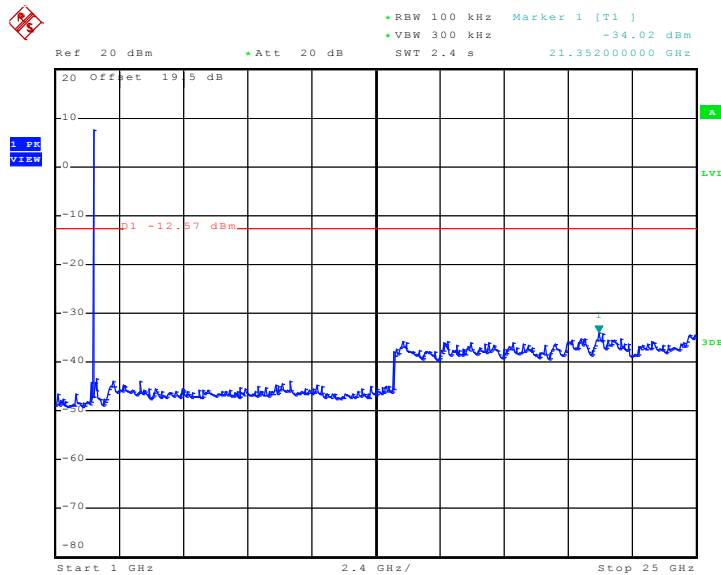


Date: 11.SEP.2010 03:54:48




Test Mode :	Mode 4	Temperature :	25~27°C
Test Band :	802.11g	Relative Humidity :	45~48%
Test Channel :	01	Test Engineer :	Lancelot Chen

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

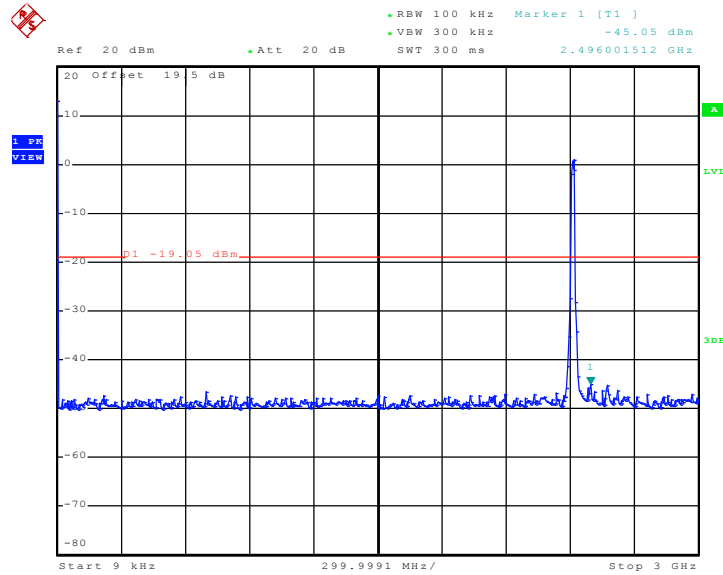

Date: 11.SEP.2010 03:48:55

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

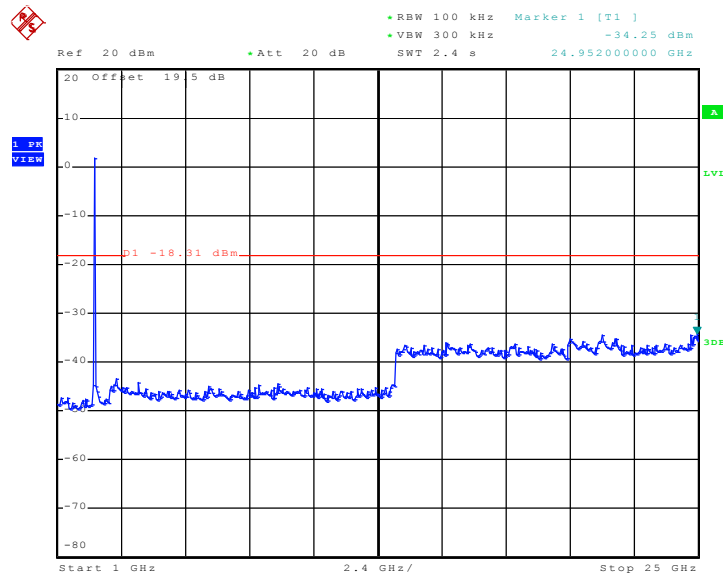


Date: 11.SEP.2010 03:49:52




Test Mode :	Mode 5	Temperature :	25~27
Test Band :	802.11g	Relative Humidity :	45~48
Test Channel :	06	Test Engineer :	Lancelot Chen

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

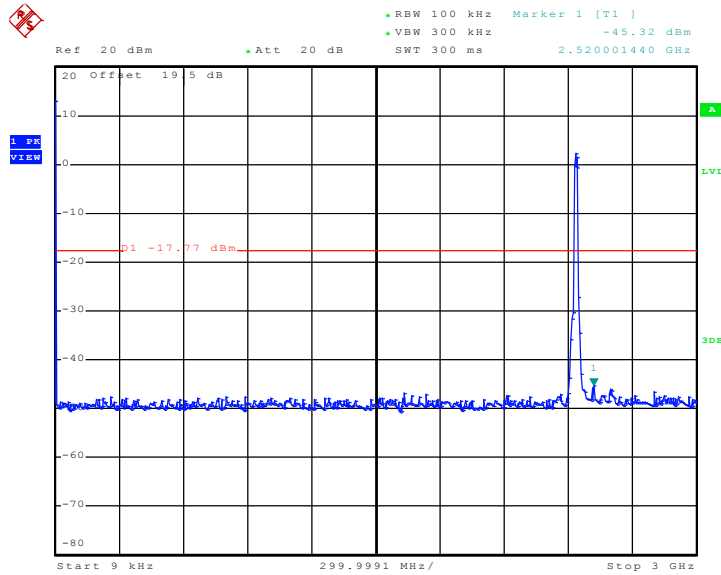

Date: 11.SEP.2010 03:29:36

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

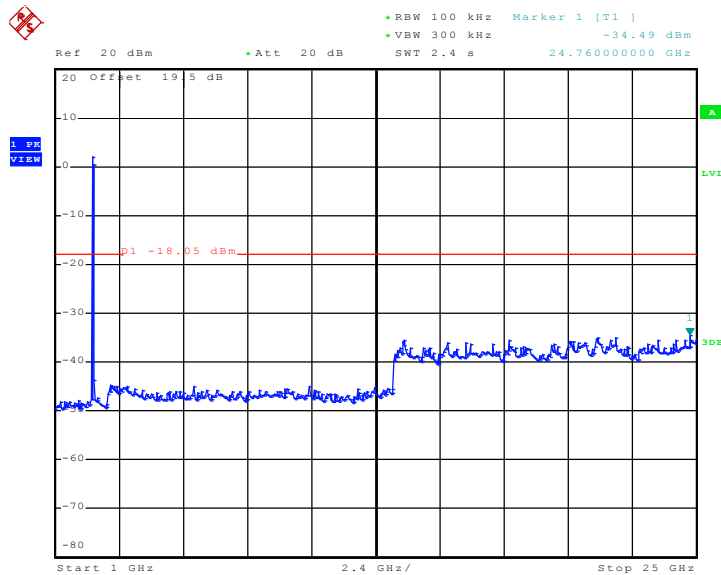


Date: 11.SEP.2010 03:28:55




Test Mode :	Mode 6	Temperature :	25~27°C
Test Band :	802.11g	Relative Humidity :	45~48%
Test Channel :	11	Test Engineer :	Lancelot Chen

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

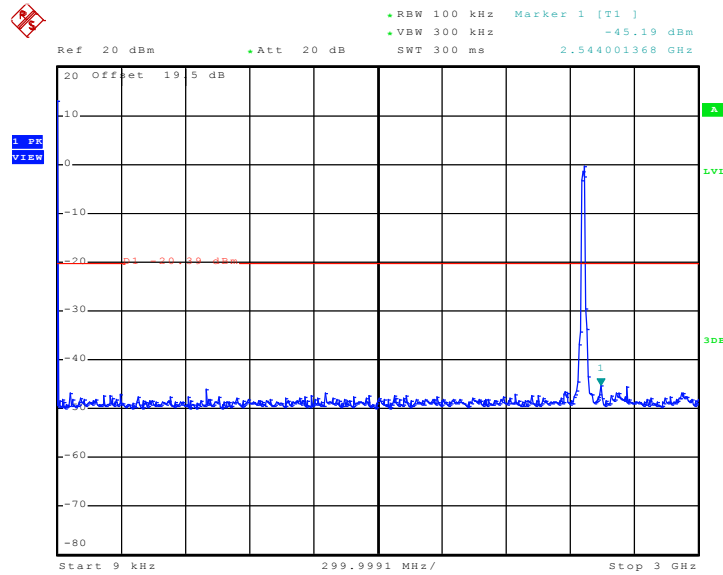

Date: 11.SEP.2010 03:24:23

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

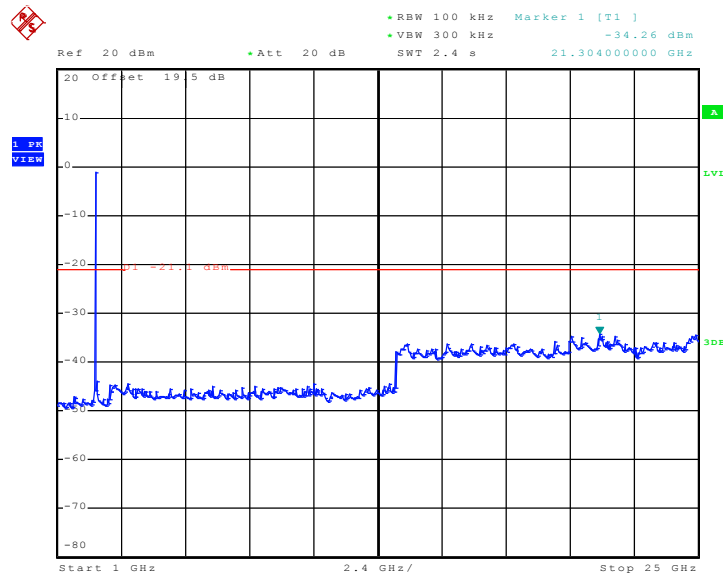


Date: 11.SEP.2010 03:25:02




Test Mode :	Mode 7	Temperature :	25~27°C
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	45~48%
Test Channel :	01	Test Engineer :	Lancelot Chen

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

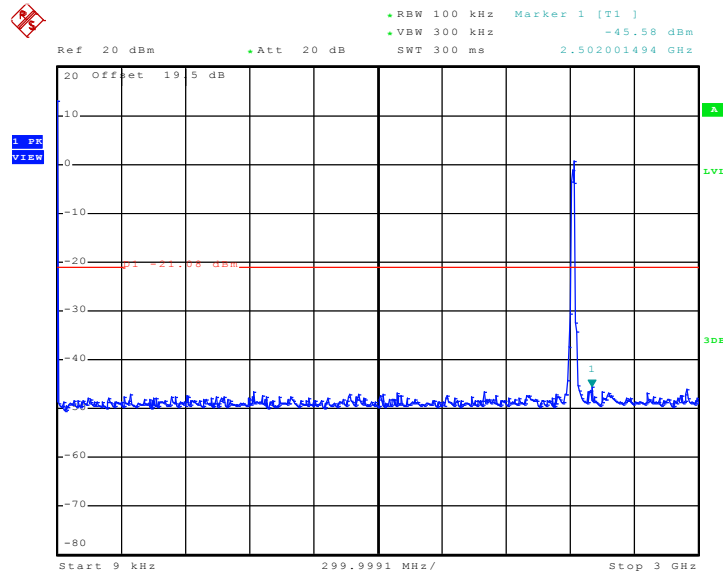

Date: 11.SEP.2010 03:59:50

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

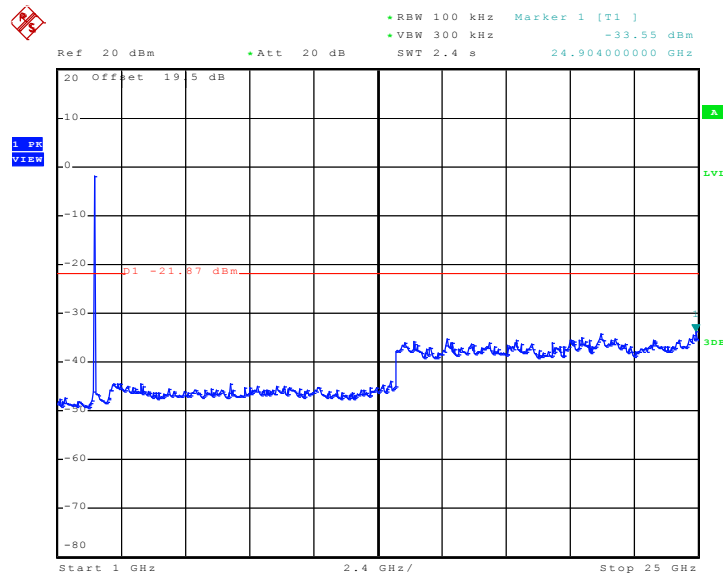


Date: 11.SEP.2010 03:56:26






Test Mode :	Mode 8	Temperature :	25~27°C
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	45~48%
Test Channel :	06	Test Engineer :	Lancelot Chen

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

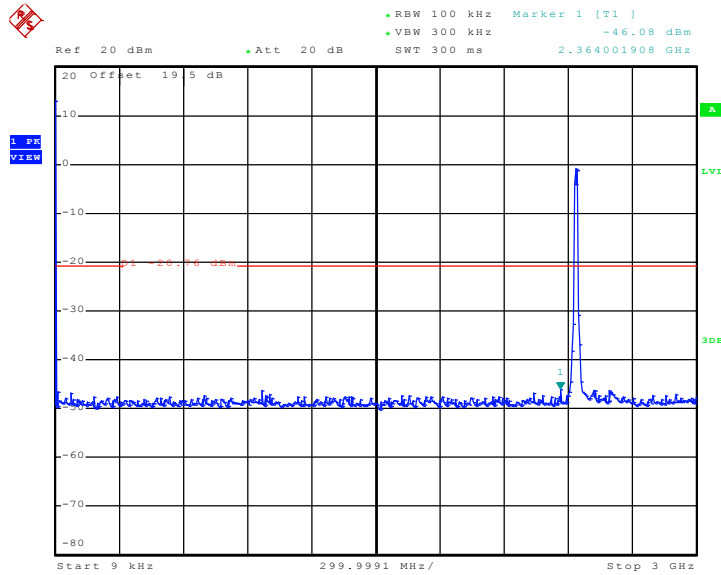

Date: 11.SEP.2010 03:59:13

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

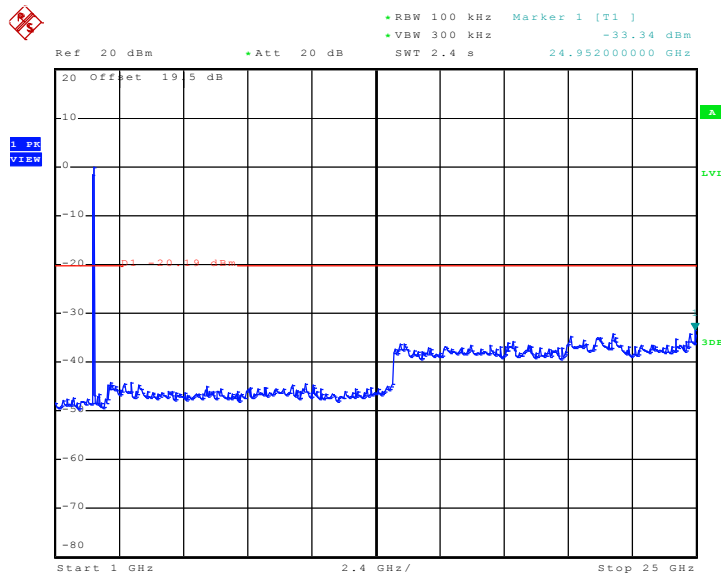


Date: 11.SEP.2010 03:57:10




Test Mode :	Mode 9	Temperature :	25~27°C
Test Band :	802.11n (BW 20MHz)	Relative Humidity :	45~48%
Test Channel :	11	Test Engineer :	Lancelot Chen

Conducted Spurious Emission Plot between 9 kHz ~ 3 GHz

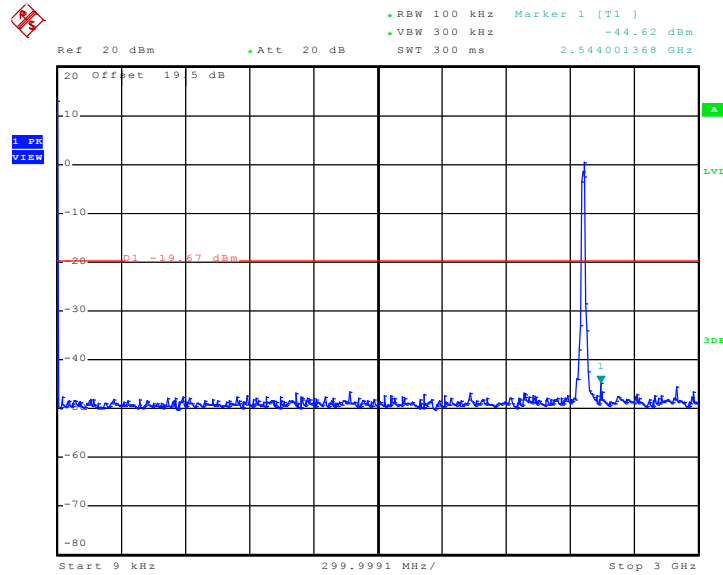

Date: 11.SEP.2010 03:58:31

Conducted Spurious Emission Plot between 1 GHz ~ 25 GHz

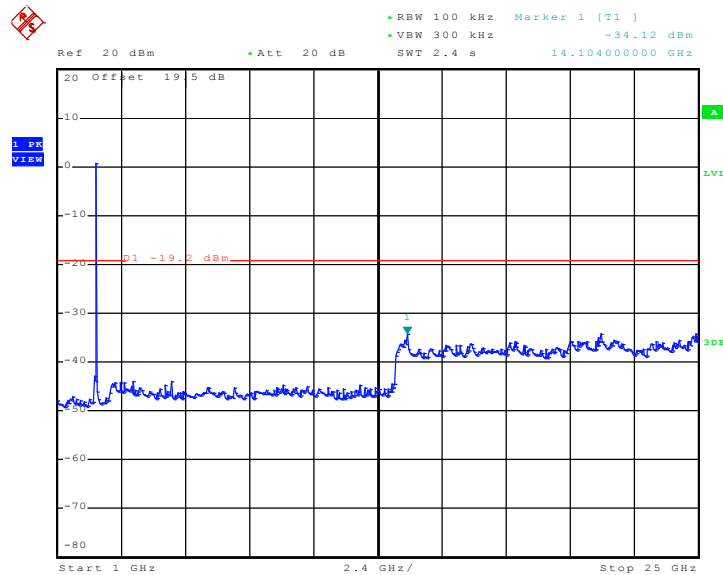

Date: 11.SEP.2010 03:57:51

## 3.5 Power Spectral Density Measurement

### 3.5.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.5.3 Test Procedures

1. The test follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Take the measured data from spectrum analyzer.

### 3.5.4 Test Setup

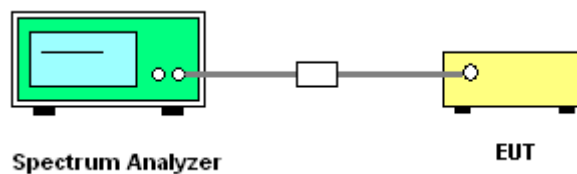




3.5.5 Test Result of Power Spectral Density

Test Mode :	Mode 1, 2, 3	Temperature :	25~27°C
Test Engineer :	Lancelot Chen	Relative Humidity :	45~48%

Channel	Frequency (MHz)	802.11b Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	-4.91	8	Pass
06	2437	-4.07	8	Pass
11	2462	-4.54	8	Pass


Mode 1 : PSD Plot on 802.11b Channel 01

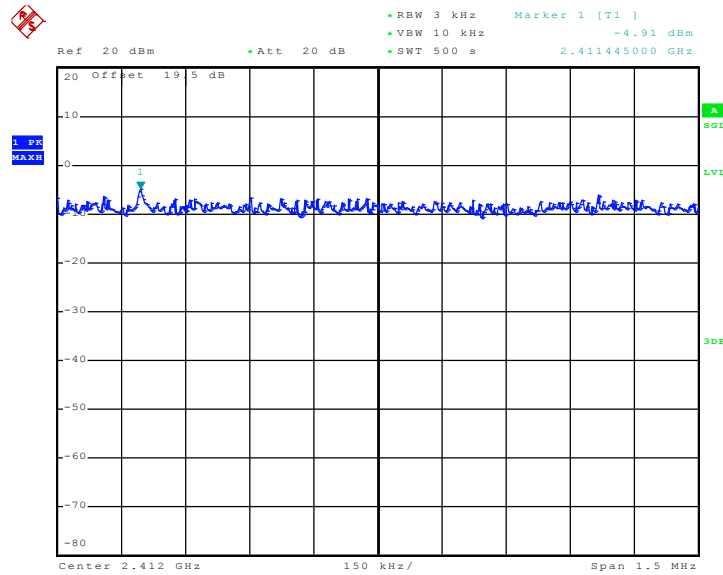

Date: 11.SEP.2010 02:06:43




Mode 2 : PSD Plot on 802.11b Channel 06

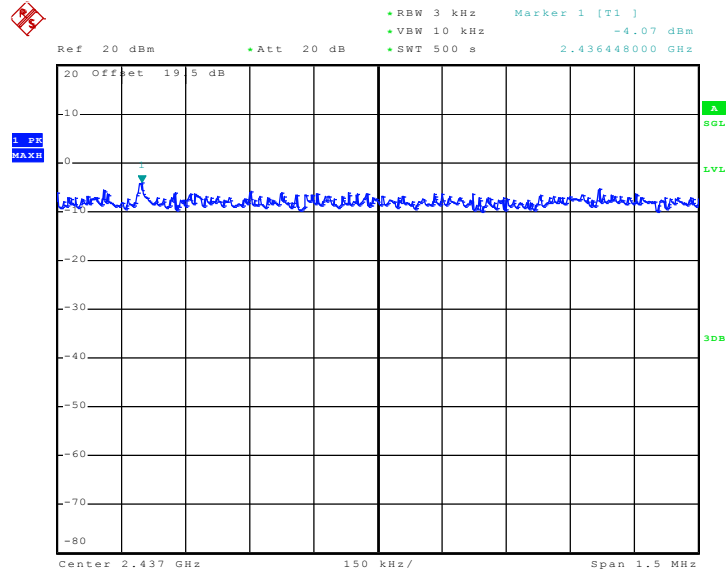

Date: 11.SEP.2010 02:19:29

Mode 3 : PSD Plot on 802.11b Channel 11

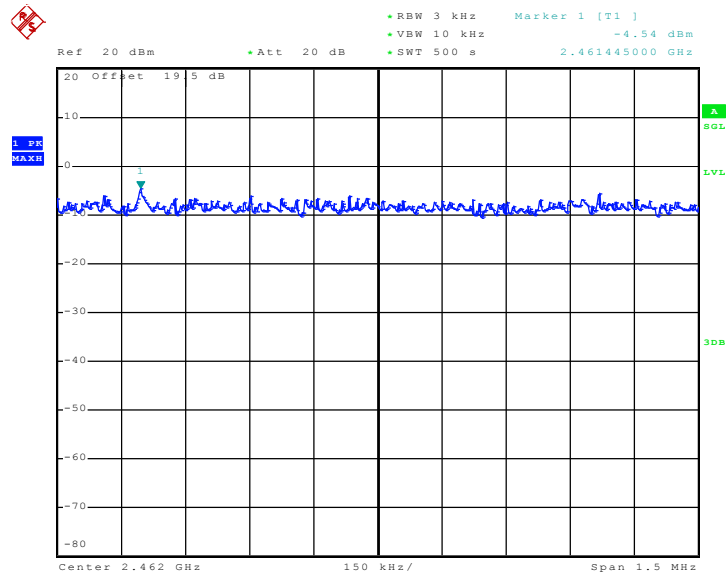


Date: 11.SEP.2010 02:40:41



Test Mode :	Mode 4, 5, 6	Temperature :	25~27°C
Test Engineer :	Lancelot Chen	Relative Humidity :	45~48%

Channel	Frequency (MHz)	802.11g Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	-9.00	8	Pass
06	2437	-7.71	8	Pass
11	2462	-10.66	8	Pass


Mode 4 : PSD Plot on 802.11g Channel 01

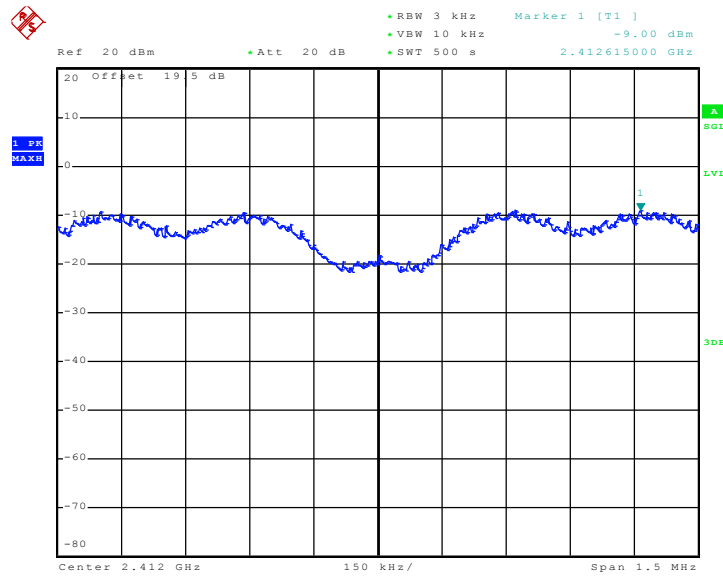

Date: 11.SEP.2010 03:48:04




Mode 5 : PSD Plot on 802.11g Channel 06

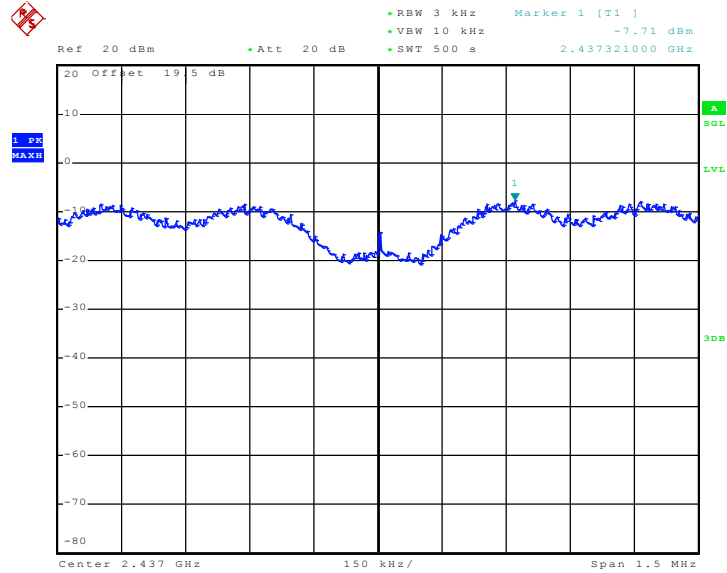

Date: 11.SEP.2010 03:38:41

Mode 6 : PSD Plot on 802.11g Channel 11

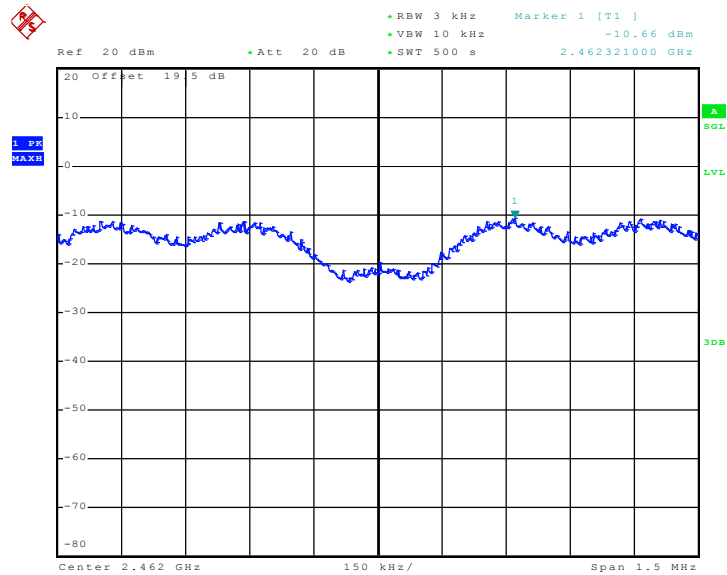


Date: 11.SEP.2010 03:22:59



Test Mode :	Mode 7, 8, 9	Temperature :	25~27°C
Test Engineer :	Lancelot Chen	Relative Humidity :	45~48%

Channel	Frequency (MHz)	802.11n (BW 20MHz) Measured PSD (dBm)	Max. Limits (dBm)	Pass/Fail
01	2412	-9.68	8	Pass
06	2437	-9.54	8	Pass
11	2462	-9.60	8	Pass

Mode 7 : PSD Plot on 802.11n (BW 20MHz) Channel 01

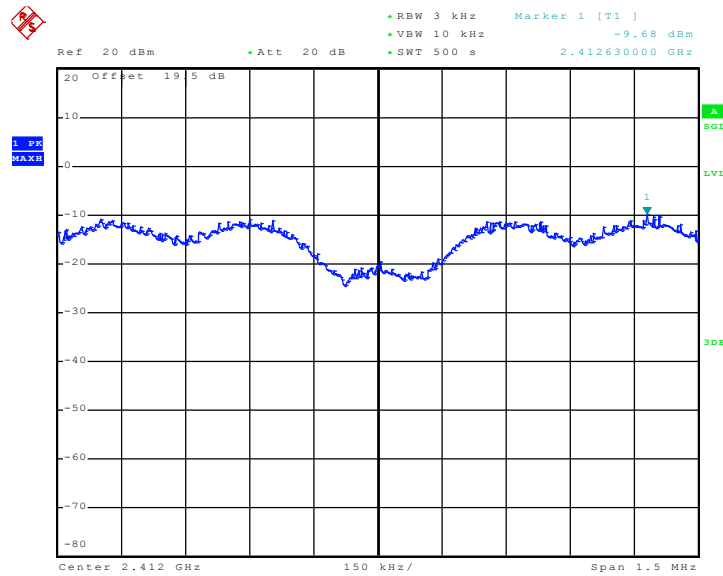


Date: 11.SEP.2010 04:38:36






Mode 8 : PSD Plot on 802.11n (BW 20MHz) Channel 06

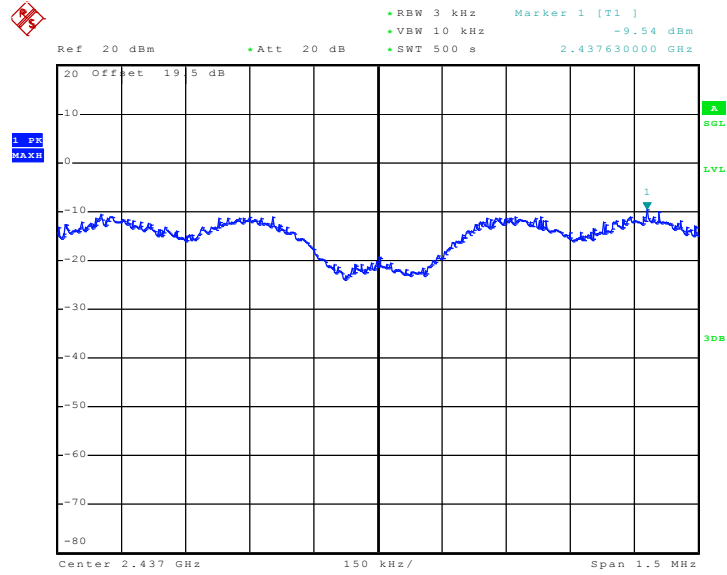

Date: 11.SEP.2010 04:28:26

Mode 9 : PSD Plot on 802.11n (BW 20MHz) Channel 11

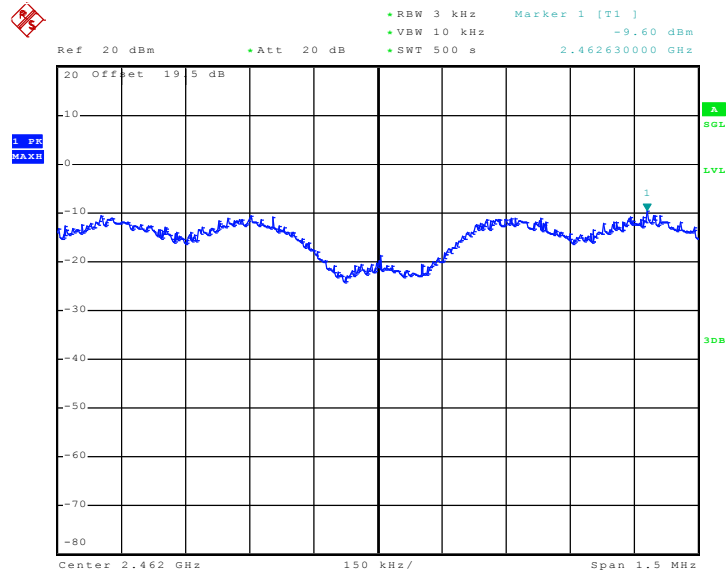

Date: 11.SEP.2010 04:16:55

## 3.6 AC Conducted Emission Measurement

### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.6.3 Test Procedures


1. The testing follows the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.6.4 Test Setup

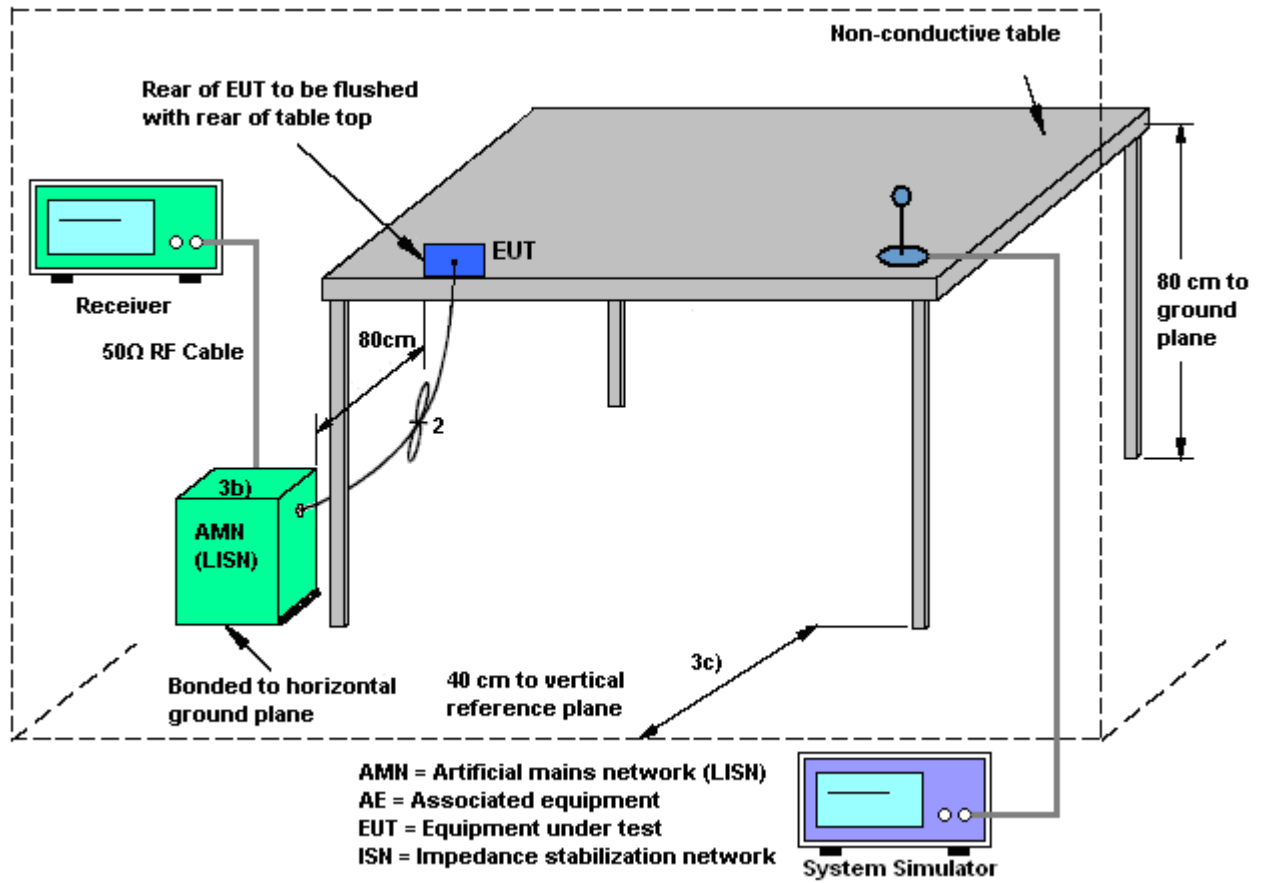

3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Novic Jiang	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WLAN Link + Earphone + Battery 2 + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

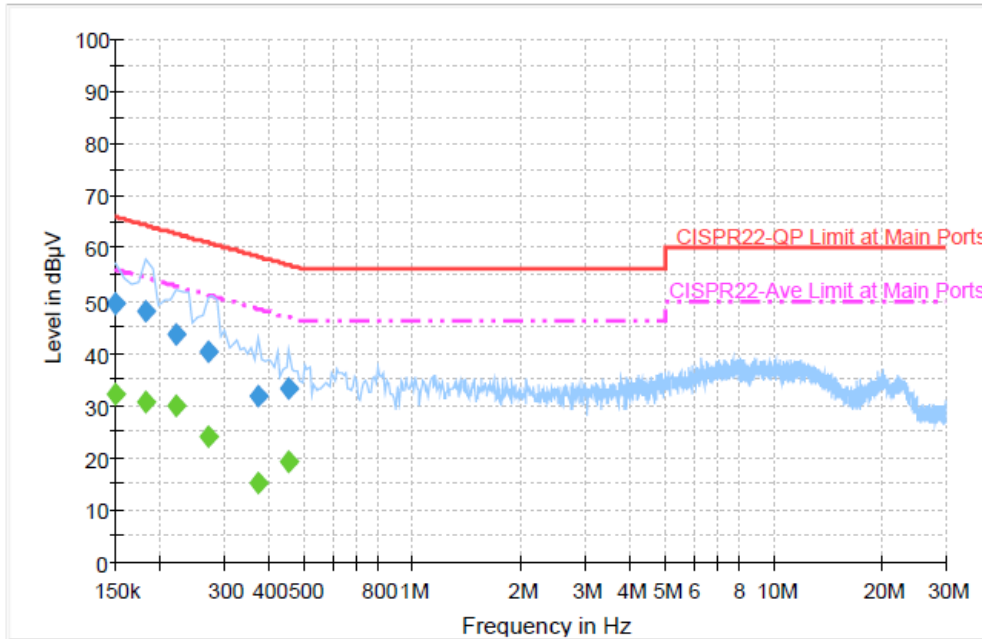

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	49.4	Off	L1	19.4	16.6	66.0
0.182000	48.0	Off	L1	19.4	16.4	64.4
0.222000	43.4	Off	L1	19.3	19.3	62.7
0.270000	40.2	Off	L1	19.3	20.9	61.1
0.374000	31.9	Off	L1	19.4	26.5	58.4
0.454000	33.2	Off	L1	19.3	23.6	56.8

Final Result 2

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	32.2	Off	L1	19.4	23.8	56.0
0.182000	30.5	Off	L1	19.4	23.9	54.4
0.222000	30.0	Off	L1	19.3	22.7	52.7
0.270000	24.0	Off	L1	19.3	27.1	51.1
0.374000	15.1	Off	L1	19.4	33.3	48.4
0.454000	19.0	Off	L1	19.3	27.8	46.8



Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Novic Jiang	Relative Humidity :	44~46%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WLAN Link + Earphone + Battery 2 + Adapter		
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

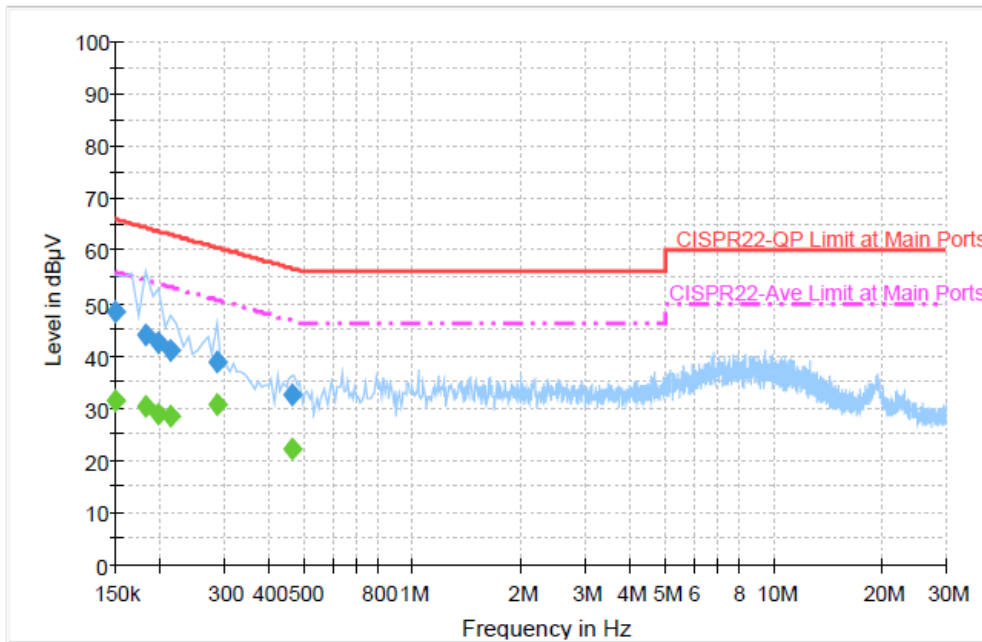

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	48.2	Off	N	19.3	17.0	65.2
0.182000	43.9	Off	N	19.4	20.5	64.4
0.198000	42.5	Off	N	19.3	21.2	63.7
0.214000	40.9	Off	N	19.4	22.1	63.0
0.286000	38.9	Off	N	19.3	21.7	60.6
0.462000	32.5	Off	N	19.3	24.2	56.7

**Final Result 2**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	31.5	Off	N	19.3	23.7	55.2
0.182000	30.2	Off	N	19.4	24.2	54.4
0.198000	28.9	Off	N	19.3	24.8	53.7
0.214000	28.5	Off	N	19.4	24.5	53.0
0.286000	30.7	Off	N	19.3	19.9	50.6
0.462000	22.2	Off	N	19.3	24.5	46.7

## 3.7 Radiated Emission Measurement

### 3.7.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.7.2 Measuring Instruments


See list of measuring instruments of this test report.

### 3.7.3 Test Procedures


1. The testing follows the guidelines in FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. Use the following spectrum analyzer settings:
  - (1) Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
  - (2) Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.  
Distance extrapolation factor =  $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$  (dB)
3. Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

### 3.7.4 Test Setup

For radiated emissions below 30MHz

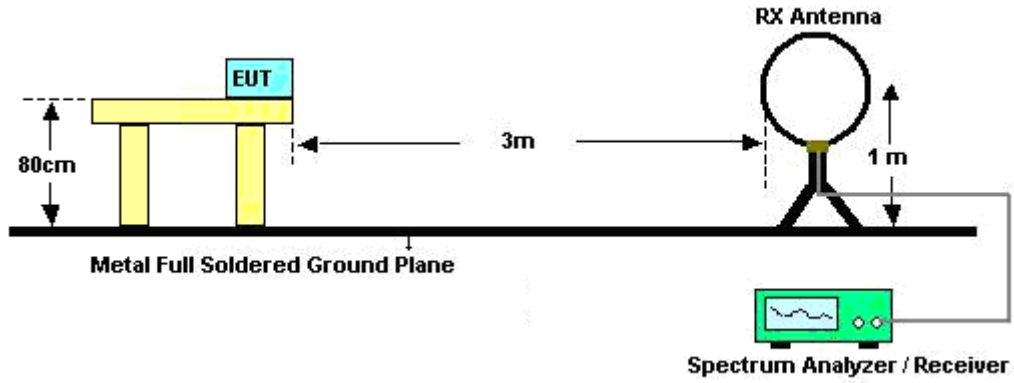

For radiated emissions above 30MHz

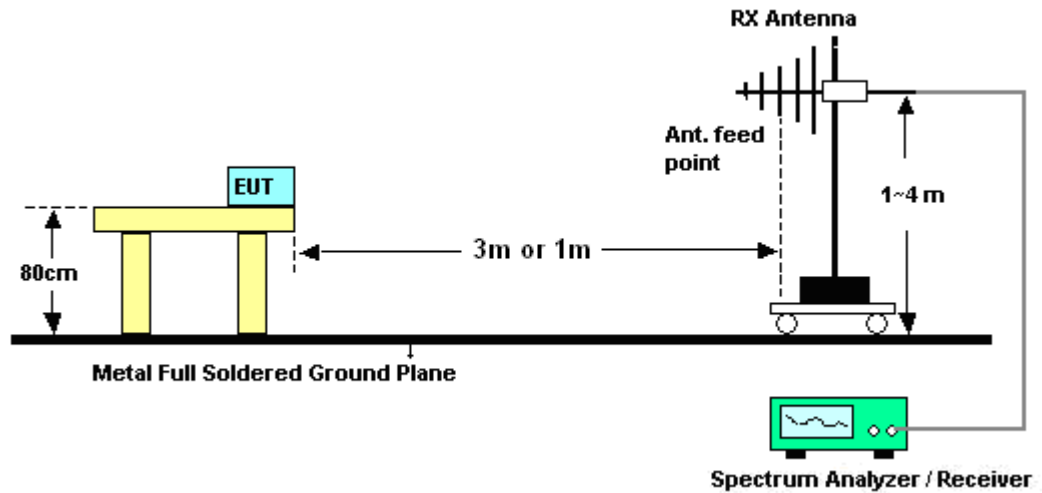



3.7.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

Test Engineer :	Kay Wu	Temperature :	26~27°C	
		Relative Humidity :	42~43%	
Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.





3.7.6 Test Result of Radiated Emission (30 MHz ~ 10<sup>th</sup> Harmonic)

Test Mode :	Mode 1	Temperature :	26~27°C
Test Channel :	01	Relative Humidity :	42~43%
Test Engineer :	Kay Wu	Polarization :	Horizontal
Remark :	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.00	22.13	-17.87	40.00	34.63	18.48	0.58	31.56	-	-	Peak
233.31	19.23	-26.77	46.00	38.55	10.84	1.34	31.50	-	-	Peak
266.79	29.17	-16.83	46.00	45.66	13.53	1.42	31.44	100	134	Peak
366.50	25.92	-20.08	46.00	40.07	15.41	1.71	31.27	-	-	Peak
433.00	23.66	-22.34	46.00	35.87	17.08	1.87	31.16	-	-	Peak
633.20	24.74	-21.26	46.00	33.77	19.52	2.25	30.80	-	-	Peak
2331.28	39.25	-14.75	54.00	37.30	31.63	4.41	34.09	100	15	Average
2331.28	50.70	-23.30	74.00	48.75	31.63	4.41	34.09	100	15	Peak
2412.00	87.08	-	-	84.95	31.71	4.50	34.08	100	15	Average
2412.00	107.57	-	-	105.44	31.71	4.50	34.08	100	15	Peak
2492.00	45.97	-8.03	54.00	43.63	31.80	4.62	34.08	100	15	Average
2492.00	57.56	-16.44	74.00	55.22	31.80	4.62	34.08	100	15	Peak



<b>Test Mode :</b>	Mode 1	<b>Temperature :</b>	26~27°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.00	26.08	-13.92	40.00	38.58	18.48	0.58	31.56	100	67	Peak
133.41	17.77	-25.73	43.50	36.12	12.10	1.07	31.52	-	-	Peak
266.79	21.72	-24.28	46.00	38.21	13.53	1.42	31.44	-	-	Peak
366.50	21.73	-24.27	46.00	35.88	15.41	1.71	31.27	-	-	Peak
500.20	21.38	-24.62	46.00	32.32	18.10	2.04	31.08	-	-	Peak
633.20	25.77	-20.23	46.00	34.80	19.52	2.25	30.80	-	-	Peak
2331.66	39.47	-14.53	54.00	37.52	31.63	4.41	34.09	121	295	Average
2331.66	49.58	-24.42	74.00	47.63	31.63	4.41	34.09	121	295	Peak
2412.00	86.96	-	-	84.83	31.71	4.50	34.08	121	295	Average
2412.00	107.43	-	-	105.30	31.71	4.50	34.08	121	295	Peak
2490.00	44.55	-9.45	54.00	42.21	31.80	4.62	34.08	121	295	Average
2490.00	55.32	-18.68	74.00	52.98	31.80	4.62	34.08	121	295	Peak



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	26~27°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.00	21.93	-18.07	40.00	34.43	18.48	0.58	31.56	-	-	Peak
233.31	18.87	-27.13	46.00	38.19	10.84	1.34	31.50	-	-	Peak
266.79	28.79	-17.21	46.00	45.28	13.53	1.42	31.44	100	61	Peak
366.50	25.51	-20.49	46.00	39.66	15.41	1.71	31.27	-	-	Peak
433.00	24.09	-21.91	46.00	36.30	17.08	1.87	31.16	-	-	Peak
633.20	24.79	-21.21	46.00	33.82	19.52	2.25	30.80	-	-	Peak
2358.00	39.51	-14.49	54.00	37.49	31.66	4.44	34.08	102	45	Average
2358.00	49.74	-24.26	74.00	47.72	31.66	4.44	34.08	102	45	Peak
2437.00	88.53	-	-	86.33	31.75	4.53	34.08	102	45	Average
2437.00	109.89	-	-	107.69	31.75	4.53	34.08	102	45	Peak
2494.00	36.84	-17.16	54.00	34.50	31.80	4.62	34.08	102	45	Average
2494.00	49.69	-24.31	74.00	47.35	31.80	4.62	34.08	102	45	Peak



<b>Test Mode :</b>	Mode 2	<b>Temperature :</b>	26~27°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.54	26.09	-13.91	40.00	39.17	17.89	0.58	31.55	100	111	Peak
110.46	18.77	-24.73	43.50	36.92	12.42	0.95	31.52	-	-	Peak
266.79	21.85	-24.15	46.00	38.34	13.53	1.42	31.44	-	-	Peak
533.10	22.78	-23.22	46.00	32.77	18.90	2.10	30.99	-	-	Peak
633.20	26.74	-19.26	46.00	35.77	19.52	2.25	30.80	-	-	Peak
700.40	24.57	-21.43	46.00	32.92	19.97	2.40	30.72	-	-	Peak
2358.00	39.67	-14.33	54.00	37.65	31.66	4.44	34.08	119	293	Average
2358.00	50.36	-23.64	74.00	48.34	31.66	4.44	34.08	119	293	Peak
2437.00	86.74	-	-	84.54	31.75	4.53	34.08	119	293	Average
2437.00	107.64	-	-	105.44	31.75	4.53	34.08	119	293	Peak
2486.00	34.73	-19.27	54.00	32.44	31.78	4.59	34.08	119	293	Average
2486.00	46.69	-27.31	74.00	44.40	31.78	4.59	34.08	119	293	Peak



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	26~27°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.27	21.62	-18.38	40.00	34.12	18.48	0.58	31.56	-	-	Peak
119.10	22.36	-21.14	43.50	40.18	12.63	1.07	31.52	-	-	Peak
266.79	28.81	-17.19	46.00	45.30	13.53	1.42	31.44	-	-	Peak
366.50	25.82	-20.18	46.00	39.97	15.41	1.71	31.27	-	-	Peak
633.20	24.71	-21.29	46.00	33.74	19.52	2.25	30.80	-	-	Peak
913.20	32.22	-13.78	46.00	38.87	21.11	2.70	30.46	100	99	Peak
2380.00	39.67	-14.33	54.00	37.60	31.68	4.47	34.08	100	47	Average
2380.00	49.77	-24.23	74.00	47.70	31.68	4.47	34.08	100	47	Peak
2462.00	88.38	-	-	86.13	31.77	4.56	34.08	100	47	Average
2462.00	109.87	-	-	107.62	31.77	4.56	34.08	100	47	Peak
2484.80	37.96	-16.04	54.00	35.67	31.78	4.59	34.08	100	47	Average
2484.80	51.42	-22.58	74.00	49.13	31.78	4.59	34.08	100	47	Peak



<b>Test Mode :</b>	Mode 3	<b>Temperature :</b>	26~27°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.00	26.00	-14.00	40.00	38.50	18.48	0.58	31.56	100	97	Peak
42.96	21.13	-18.87	40.00	40.60	11.34	0.73	31.54	-	-	Peak
57.00	19.39	-20.61	40.00	43.35	6.85	0.73	31.54	-	-	Peak
433.00	23.87	-22.13	46.00	36.08	17.08	1.87	31.16	-	-	Peak
633.20	25.92	-20.08	46.00	34.95	19.52	2.25	30.80	-	-	Peak
852.30	24.04	-21.96	46.00	31.04	20.85	2.65	30.50	-	-	Peak
2384.00	39.67	-14.33	54.00	37.60	31.68	4.47	34.08	104	79	Average
2384.00	49.56	-24.44	74.00	47.49	31.68	4.47	34.08	104	79	Peak
2462.00	86.92	-	-	84.67	31.77	4.56	34.08	104	79	Average
2462.00	107.53	-	-	105.28	31.77	4.56	34.08	104	79	Peak
2499.43	35.25	-18.75	54.00	32.91	31.80	4.62	34.08	104	79	Average
2499.43	47.66	-26.34	74.00	45.32	31.80	4.62	34.08	104	79	Peak



<b>Test Mode :</b>	Mode 4	<b>Temperature :</b>	26~27°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.00	22.35	-17.65	40.00	34.85	18.48	0.58	31.56	-	-	Peak
172.83	20.32	-23.18	43.50	41.11	9.52	1.23	31.54	-	-	Peak
266.79	28.90	-17.10	46.00	45.39	13.53	1.42	31.44	-	-	Peak
366.50	25.81	-20.19	46.00	39.96	15.41	1.71	31.27	-	-	Peak
533.10	32.05	-13.95	46.00	42.04	18.90	2.10	30.99	100	99	Peak
633.20	26.11	-19.89	46.00	35.14	19.52	2.25	30.80	-	-	Peak
2389.61	44.44	-9.56	54.00	42.35	31.70	4.47	34.08	105	59	Average
2389.61	65.08	-8.92	74.00	62.99	31.70	4.47	34.08	105	59	Peak
2412.00	88.97	-	-	86.84	31.71	4.50	34.08	105	59	Average
2412.00	104.69	-	-	102.56	31.71	4.50	34.08	105	59	Peak
2496.00	45.63	-8.37	54.00	43.29	31.80	4.62	34.08	105	59	Average
2496.00	58.16	-15.84	74.00	55.82	31.80	4.62	34.08	105	59	Peak



<b>Test Mode :</b>	Mode 4	<b>Temperature :</b>	26~27°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.00	26.14	-13.86	40.00	38.64	18.48	0.58	31.56	100	19	Peak
117.48	24.87	-18.63	43.50	42.74	12.58	1.07	31.52	-	-	Peak
266.79	23.34	-22.66	46.00	39.83	13.53	1.42	31.44	-	-	Peak
533.10	25.29	-20.71	46.00	35.28	18.90	2.10	30.99	-	-	Peak
633.20	25.66	-20.34	46.00	34.69	19.52	2.25	30.80	-	-	Peak
878.20	24.99	-21.01	46.00	31.85	20.95	2.68	30.49	-	-	Peak
2389.42	45.28	-8.72	54.00	43.19	31.70	4.47	34.08	100	297	Average
2389.42	65.05	-8.95	74.00	62.96	31.70	4.47	34.08	100	297	Peak
2412.00	86.42	-	-	84.29	31.71	4.50	34.08	100	297	Average
2412.00	103.17	-	-	101.04	31.71	4.50	34.08	100	297	Peak
2492.00	43.57	-10.43	54.00	41.23	31.80	4.62	34.08	100	297	Average
2492.00	56.19	-17.81	74.00	53.85	31.80	4.62	34.08	100	297	Peak





<b>Test Mode :</b>	Mode 5	<b>Temperature :</b>	26~27°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.00	24.01	-15.99	40.00	36.51	18.48	0.58	31.56	-	-	Peak
146.37	19.25	-24.25	43.50	38.73	10.88	1.14	31.50	-	-	Peak
266.79	28.82	-17.18	46.00	45.31	13.53	1.42	31.44	-	-	Peak
366.50	25.79	-20.21	46.00	39.94	15.41	1.71	31.27	-	-	Peak
533.10	31.49	-14.51	46.00	41.48	18.90	2.10	30.99	100	91	Peak
833.40	24.02	-21.98	46.00	31.11	20.81	2.61	30.51	-	-	Peak
2360.00	37.22	-16.78	54.00	35.20	31.66	4.44	34.08	103	46	Average
2360.00	48.36	-25.64	74.00	46.34	31.66	4.44	34.08	103	46	Peak
2437.00	88.32	-	-	86.12	31.75	4.53	34.08	103	46	Average
2437.00	105.76	-	-	103.56	31.75	4.53	34.08	103	46	Peak
2484.00	30.01	-23.99	54.00	27.72	31.78	4.59	34.08	103	46	Average
2484.00	54.95	-19.05	74.00	52.66	31.78	4.59	34.08	103	46	Peak



<b>Test Mode :</b>	Mode 5	<b>Temperature :</b>	26~27°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.54	26.59	-13.41	40.00	39.67	17.89	0.58	31.55	100	33	Peak
54.84	26.22	-13.78	40.00	49.82	7.19	0.73	31.52	-	-	Peak
96.42	19.48	-24.02	43.50	39.56	10.52	0.95	31.55	-	-	Peak
366.50	21.79	-24.21	46.00	35.94	15.41	1.71	31.27	-	-	Peak
633.20	25.25	-20.75	46.00	34.28	19.52	2.25	30.80	-	-	Peak
934.20	25.70	-20.30	46.00	32.11	21.24	2.78	30.43	-	-	Peak
2360.00	37.38	-16.62	54.00	35.36	31.66	4.44	34.08	113	70	Average
2360.00	49.03	-24.97	74.00	47.01	31.66	4.44	34.08	113	70	Peak
2437.00	85.91	-	-	83.71	31.75	4.53	34.08	113	70	Average
2437.00	102.79	-	-	100.59	31.75	4.53	34.08	113	70	Peak
2484.00	37.17	-16.83	54.00	34.88	31.78	4.59	34.08	113	70	Average
2484.00	51.75	-22.25	74.00	49.46	31.78	4.59	34.08	113	70	Peak



<b>Test Mode :</b>	Mode 6	<b>Temperature :</b>	26~27°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
116.40	30.15	-13.35	43.50	48.16	12.56	0.95	31.52	-	-	Peak
182.82	30.47	-13.03	43.50	51.66	9.08	1.23	31.50	-	-	Peak
282.72	35.78	-10.22	46.00	52.40	13.26	1.48	31.36	100	27	Peak
300.00	25.86	-20.14	46.00	42.00	13.58	1.55	31.27	-	-	Peak
533.10	31.08	-14.92	46.00	41.07	18.90	2.10	30.99	-	-	Peak
731.90	25.54	-20.46	46.00	33.25	20.44	2.45	30.60	-	-	Peak
2384.00	38.65	-15.35	54.00	36.58	31.68	4.47	34.08	102	46	Average
2384.00	50.85	-23.15	74.00	48.78	31.68	4.47	34.08	102	46	Peak
2462.00	90.64	-	-	88.39	31.77	4.56	34.08	102	46	Average
2462.00	108.97	-	-	106.72	31.77	4.56	34.08	102	46	Peak
2483.50	50.13	-3.87	54.00	47.84	31.78	4.59	34.08	102	46	Average
2483.50	68.90	-5.10	74.00	66.61	31.78	4.59	34.08	102	46	Peak



<b>Test Mode :</b>	Mode 6	<b>Temperature :</b>	26~27°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
30.00	26.57	-13.43	40.00	39.07	18.48	0.58	31.56	100	274	Peak
69.96	25.90	-14.10	40.00	50.58	5.98	0.84	31.50	-	-	Peak
266.79	22.64	-23.36	46.00	39.13	13.53	1.42	31.44	-	-	Peak
366.50	21.82	-24.18	46.00	35.97	15.41	1.71	31.27	-	-	Peak
700.40	26.83	-19.17	46.00	35.18	19.97	2.40	30.72	-	-	Peak
916.00	24.56	-21.44	46.00	31.18	21.13	2.70	30.45	-	-	Peak
2386.00	38.25	-15.75	54.00	36.16	31.70	4.47	34.08	120	294	Average
2386.00	49.53	-24.47	74.00	47.44	31.70	4.47	34.08	120	294	Peak
2462.00	87.82	-	-	85.57	31.77	4.56	34.08	120	294	Average
2462.00	105.58	-	-	103.33	31.77	4.56	34.08	120	294	Peak
2483.50	46.24	-7.76	54.00	43.95	31.78	4.59	34.08	120	294	Average
2483.50	66.28	-7.72	74.00	63.99	31.78	4.59	34.08	120	294	Peak



<b>Test Mode :</b>	Mode 7	<b>Temperature :</b>	26~27°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.61	45.78	-8.22	54.00	43.69	31.70	4.47	34.08	122	15	Average
2389.61	64.60	-9.40	74.00	62.51	31.70	4.47	34.08	122	15	Peak
2412.00	85.70	-	-	83.57	31.71	4.50	34.08	122	15	Average
2412.00	103.01	-	-	100.88	31.71	4.50	34.08	122	15	Peak
2496.00	44.30	-9.70	54.00	41.96	31.80	4.62	34.08	122	15	Average
2496.00	56.40	-17.60	74.00	54.06	31.80	4.62	34.08	122	15	Peak



<b>Test Mode :</b>	Mode 7	<b>Temperature :</b>	26~27°C
<b>Test Channel :</b>	01	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2412 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2389.99	44.72	-9.28	54.00	42.60	31.70	4.50	34.08	100	295	Average
2389.99	62.57	-11.43	74.00	60.45	31.70	4.50	34.08	100	295	Peak
2412.00	86.20	-	-	84.07	31.71	4.50	34.08	100	295	Average
2412.00	105.39	-	-	103.26	31.71	4.50	34.08	100	295	Peak
2494.00	43.75	-10.25	54.00	41.41	31.80	4.62	34.08	100	295	Average
2494.00	55.76	-18.24	74.00	53.42	31.80	4.62	34.08	100	295	Peak



<b>Test Mode :</b>	Mode 8	<b>Temperature :</b>	26~27°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2390.00	37.43	-16.57	54.00	35.31	31.70	4.50	34.08	102	42	Average
2390.00	47.66	-26.34	74.00	45.54	31.70	4.50	34.08	102	42	Peak
2437.00	87.21	-	-	85.01	31.75	4.53	34.08	102	42	Average
2437.00	104.74	-	-	102.54	31.75	4.53	34.08	102	42	Peak
2486.00	39.93	-14.07	54.00	37.64	31.78	4.59	34.08	102	42	Average
2486.00	52.85	-21.15	74.00	50.56	31.78	4.59	34.08	102	42	Peak



<b>Test Mode :</b>	Mode 8	<b>Temperature :</b>	26~27°C
<b>Test Channel :</b>	06	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2437 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2356.00	36.92	-17.08	54.00	34.91	31.66	4.44	34.09	118	291	Average
2356.00	48.64	-25.36	74.00	46.63	31.66	4.44	34.09	118	291	Peak
2437.00	85.40	-	-	83.20	31.75	4.53	34.08	118	291	Average
2437.00	102.38	-	-	100.18	31.75	4.53	34.08	118	291	Peak
2484.00	37.01	-16.99	54.00	34.72	31.78	4.59	34.08	118	291	Average
2484.00	51.25	-22.75	74.00	48.96	31.78	4.59	34.08	118	291	Peak





<b>Test Mode :</b>	Mode 9	<b>Temperature :</b>	26~27°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Horizontal
<b>Remark :</b>	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level ( dBuV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2384.00	37.79	-16.21	54.00	35.72	31.68	4.47	34.08	101	39	Average
2384.00	48.92	-25.08	74.00	46.85	31.68	4.47	34.08	101	39	Peak
2462.00	87.13	-	-	84.88	31.77	4.56	34.08	101	39	Average
2462.00	104.57	-	-	102.32	31.77	4.56	34.08	101	39	Peak
2485.94	48.46	-5.54	54.00	46.17	31.78	4.59	34.08	101	39	Average
2485.94	65.88	-8.12	74.00	63.59	31.78	4.59	34.08	101	39	Peak



<b>Test Mode :</b>	Mode 9	<b>Temperature :</b>	26~27°C
<b>Test Channel :</b>	11	<b>Relative Humidity :</b>	42~43%
<b>Test Engineer :</b>	Kay Wu	<b>Polarization :</b>	Vertical
<b>Remark :</b>	2462 MHz is Fundamental Signals which can be ignored.		

Frequency ( MHz )	Level ( dBuV/m )	Over Limit ( dB )	Limit Line ( dBuV/m )	Read Level (dBuV)	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
2384.00	37.31	-16.69	54.00	35.24	31.68	4.47	34.08	121	293	Average
2384.00	48.15	-25.85	74.00	46.08	31.68	4.47	34.08	121	293	Peak
2462.00	85.05	-	-	82.80	31.77	4.56	34.08	121	293	Average
2462.00	102.35	-	-	100.10	31.77	4.56	34.08	121	293	Peak
2484.99	44.86	-9.14	54.00	42.57	31.78	4.59	34.08	121	293	Average
2484.99	62.51	-11.49	74.00	60.22	31.78	4.59	34.08	121	293	Peak



## **3.8 Antenna Requirements**

### **3.8.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.8.2 Antenna Connected Construction**

The antennas type used in this product is Chip Antenna without connector and it is considered to meet antenna requirement.

### **3.8.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP30	101329	9kHz~30GHz	Apr. 26, 2010	Apr. 25, 2011	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB41292344	N/A	Feb. 25, 2010	Feb. 24, 2011	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US40441548	N/A	Feb. 25, 2010	Feb. 24, 2011	Conducted (TH02-HY)
EMI Test Receive	R&S	ESU	100211	9KHz – 2.75GHz	May 28, 2010	May 27, 2011	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100081	9kHz~30MHz	Nov. 30, 2009	Nov. 29, 2010	Conduction (CO05-HY)
Two-LISN	R&S	ENV216	11-100080	9kHz~30MHz	Nov. 23, 2009	Nov. 22, 2010	Conduction (CO05-HY)
AC Power Source	APC	APC-1000 W	N/A	N/A	N/A	N/A	Conduction (CO05-HY)
System Simulator	R&S	CMU200	105934	N/A	Nov. 11, 2008	Nov. 10, 2010	Conduction (CO05-HY)
Spectrum Analyzer	R&S	FSP40	100057	9KHz-40GHz	Oct. 20, 2009	Oct. 19, 2010	Radiation (03CH05-HY)
Amplifier	COM-POWER	PA-103	161069	1KHz - 1GHz	Mar. 29, 2010	Mar. 28, 2011	Radiation (03CH05-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 31, 2009	Oct. 30, 2010	Radiation (03CH05-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	15GHz- 40GHz	Oct. 14, 2009	Oct. 13, 2010	Radiation (03CH05-HY)
Pre Amplifier	Agilent	8449B	3008A01917	1GHz- 26.5GHz	Nov. 11, 2009	Nov. 10, 2010	Radiation (03CH05-HY)
Turn Table	HD	Deis HD 2000	420/611	0 - 360 degree	N/A	N/A	Radiation (03CH05-HY)
Antenna Mast	HD	MA 240	240/666	1 m - 4 m	N/A	N/A	Radiation (03CH05-HY)
Horn Antenna	ESCO	3117	00066584	1GHz ~ 18GHz	Aug. 05, 2010	Aug. 04, 2011	Radiation (03CH05-HY)
Horn Antenna	Training Research	AH-0801	95119	8GHz~18GHz	Nov. 02, 2009	Nov. 01, 2010	Radiation (03CH05-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz~30 MHz	Jul. 29, 2010	Jul. 28, 2011	Radiation (03CH05-HY)

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.10	Normal (k=2)	0.05
Cable Loss	0.10	Normal (k=2)	0.05
AMN Insertion Loss	2.50	Rectangular	0.63
Receiver Specification	1.50	Rectangular	0.43
Site Imperfection	1.39	Rectangular	0.80
Mismatch	+0.34 / -0.35	U-Shape	0.24
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.13</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.26</b>		

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of $X_i$		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>1.27</b>		
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>2.54</b>		

**Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)**

Contribution	Uncertainty of $X_i$		$u(X_i)$	$C_i$	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	±0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	±1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	±0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	±2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	±1.50	Rectangular	0.87	1	0.87
Site Imperfection	±2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
<b>Combined Standard Uncertainty <math>U_c(y)</math></b>	<b>2.36</b>				
<b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b>	<b>4.72</b>				



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP081937-03 as below.