



Test Report – FCC Part 74H- C2PC- Low Power Licensed
Wireless Microphone
Applicant: Wisycom s.r.l.

Approved for Release By:

Signature: Bruno Clavier

Name & Title: Bruno Clavier, General Manager

Date of Signature 3/20/2024

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA). This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.

Table of Contents

1.	APPLICANT INFORMATION.....	4
1.1	TEST RESULT SUMMARY.....	4
2.	LOCATION OF TESTING.....	5
2.1	TEST LABORATORY.....	5
2.2	TESTING WAS PERFORMED, REVIEWED BY.....	5
3.	TEST SAMPLE(S) (EUT/DUT).....	6
3.1	DESCRIPTION OF THE EUT.....	6
3.2	CONFIGURATION OF EUT.....	7
3.3	TEST SETUP OF EUT.....	7
4.	TEST METHODS & APPLICABLE REGULATORY LIMITS.....	8
4.1	TEST METHODS/STANDARDS/GUIDANCE.....	8
5.	MEASUREMENT UNCERTAINTY.....	8
6.	ENVIRONMENTAL CONDITIONS.....	8
7.	LIST OF TEST EQUIPMENT AND TEST FACILITY.....	9
8.	TEST RESULTS.....	10
8.1	RF POWER OUTPUT.....	11
8.1.1	<i>RF Power Output Plot, Mode 1, 470.075 MHz.....</i>	<i>12</i>
8.1.2	<i>RF Power Output Plot, Mode 1, 539 MHz.....</i>	<i>13</i>
8.1.3	<i>RF Power Output Plot, Mode 1, 607.925 MHz.....</i>	<i>14</i>
8.1.4	<i>RF Power Output Plot, Mode 1, 653.075 MHz.....</i>	<i>15</i>
8.1.5	<i>RF Power Output Plot, Mode 2, 470.075 MHz.....</i>	<i>16</i>
8.1.6	<i>RF Power Output Plot, Mode 2, 539 MHz.....</i>	<i>17</i>
8.1.7	<i>RF Power Output Plot, Mode 2, 607.925 MHz.....</i>	<i>18</i>
8.1.8	<i>RF Power Output Plot, Mode 2, 653.075 MHz.....</i>	<i>19</i>
8.2	OCCUPIED BANDWIDTH.....	20
8.2.1	<i>99% Bandwidth Plot, Mode 1, 470.075 MHz.....</i>	<i>21</i>
8.2.2	<i>99% Bandwidth Plot, Mode 1, 539 MHz.....</i>	<i>22</i>
8.2.3	<i>99% Bandwidth Plot, Mode 1, 607.925 MHz.....</i>	<i>23</i>
8.2.4	<i>99% Bandwidth Plot, Mode 1, 653.075 MHz.....</i>	<i>24</i>
8.2.5	<i>99% Bandwidth Plot, Mode 2, 470.075 MHz.....</i>	<i>25</i>
8.2.6	<i>99% Bandwidth Plot, Mode 2, 539 MHz.....</i>	<i>26</i>
8.2.7	<i>99% Bandwidth Plot, Mode 2, 607.925 MHz.....</i>	<i>27</i>
8.2.8	<i>99% Bandwidth Plot, Mode 2, 653.075 MHz.....</i>	<i>28</i>
8.3	RADIATED EMISSIONS.....	29
8.3.1	<i>Radiated Emissions Table, 470.075 MHz.....</i>	<i>30</i>
8.3.2	<i>Radiated Emissions Table, 539 MHz.....</i>	<i>31</i>
8.3.3	<i>Radiated Emissions Table, 607.925 MHz.....</i>	<i>32</i>
8.3.4	<i>Radiated Emissions Table, 653.075 MHz.....</i>	<i>33</i>
9.	ANNEX-B – TEST SETUP PHOTOGRAPHS.....	34



13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

10. HISTORY OF TEST REPORT CHANGES..... 34

1. Applicant Information

Applicant: Wisycom s.r.l.
Address: Via Tiepolo, 7/E
Tombolo, 35019, Italy

1.1 Test Result Summary

The following test procedure was used ANSI C63.26 and KDB 206256 D01 Wireless Microphone Certification. Full test results are available in this report.

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.

Clauses	Description of the Requirements	Result (Pass, Fail or N/A)
PART 2.1046(a), 74.861(e) (1) (ii), (iii)	Conducted Power	Pass
2.1049(c), 74.861(d)(4)(i)	Occupied Bandwidth	Pass
74.861(e)(7), ETSI EN 300-422-1 s. 8.3.2	Unwanted Emissions	N/A
2.1051(a), 74.861(e)(6)(iii)	Spurious Emissions at Antenna Terminal (Conducted)	N/A
2.1053, 74.861(e)(6)(iii)	Radiated Field Strength of Spurious Emissions	Pass
2.1053, 74.861(e) (4)	Frequency Stability	N/A

2. Location of Testing

2.1 Test Laboratory

Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA"). Testing was performed at IIA's permanent laboratory located at 13146 NW 86th Drive, Suite 400, Alachua, Florida 32615.

FCC test firm # 578780

FCC Designation # US1070

FCC site registration is under A2LA certificate # 0955.01

ISED Canada test site registration # 2056A


EU Notified Body # 1177

For all designations see A2LA scope # 0955.01

2.2 Testing was performed, reviewed by

Dates of Testing: 2/23/2024 – 2/27/2024

Signature:



Sr. EMC Engineer
EMC-003838-NE




Name & Title:

Tim Royer, EMC Engineer

Date of Signature

3/20/2024

Signature:

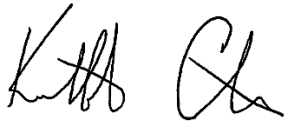

Name & Title:

Kristoffer Costa, EMC Technician

Date of Signature

3/20/2024

3. Test Sample(s) (EUT/DUT)

The test sample was received: 2/22/2024

3.1 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	POUMTK982
Brief Description	Dual UHF Transmitter with CSI16T2 Combiner
Model(s) #	MTK982
Firmware version	N/A
Software version	N/A
Serial Number	MTK982: 29900009, CSI16T2: 29900020

Technical Characteristics	
Frequency Range	470 MHz- 608 MHz 653 MHz- 657 MHz
RF O/P Power (Max.)	250 mW Max
Modulation	FM
Bandwidth & Emission Class	F3E
Number of Channels	N/A
Duty Cycle	100%
Antenna Connector	BNC
Voltage Rating (AC or Batt.)	90 - 264 VAC, 47/63 Hz; 10-28 VDC

Antenna Characteristics			
Antenna	Frequency Range	Mode / BW	Antenna Gain
1	n/a	n/a	3 dBi

- Note: Information such as antenna gain, firmware/software numbers are provided by manufacturer and cannot be validated by the test lab.

3.2 Configuration of EUT

Test Modes				
Mode (#)	Mode (Type)	Test Frequencies (MHz)	BW (nominal) (kHz)	Emission Designator
1	8:1 Transmit	470.075 MHz 539 MHz 607.925 MHz 653.075 MHz	62.764	F3E, F8E
2	16:1 Transmit	470.075 MHz 539 MHz 607.925 MHz 653.075 MHz	62.844	F3E, F8E

Operating conditions during Testing:

No modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT).

Peripherals used during Testing:

No peripherals used.

3.3 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power-line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.

4. Test methods & Applicable Regulatory Limits

4.1 Test methods/Standards/Guidance

The measurement was performed as per ANSI C63.2 and KDB 206256 D01 Wireless Microphone Certification. Full test results are available in this report.

Limits and Regulatory Limits:

- 1) FCC Part 74 H (2020)

5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	± 3.14 dB
Radiated Emissions (9kHz – 30 MHz)	± 3.08 dB
Radiated Emissions (30 – 200 MHz)	± 2.16 dB
Radiated Emissions (200 – 1000 MHz)	± 2.15 dB
Radiated Emissions (1 GHz – 18 GHz)	± 2.14 dB
Radiated Emissions (18 GHz – 40 GHz)	± 2.31 dB
Note: The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.	

6. Environmental Conditions

Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Parameter	Measurement
Temperature	23 C +/- 5%
Humidity	55% +/- 5%
Barometric Pressure	30.05 in Hg
Note: Specific environmental conditions that are applicable to a specific test are available in the test result section.	

7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer’s model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

List of Test Equipment

Test Equipment						
Type	Device	Manufacturer	Model	SN#	Current Cal	Cal Due
Antenna, NSA	Log-Periodic 1243	Eaton	96005	1243	5/4/21	5/3/2024
Antenna	Double-Ridged Horn/ETS Horn 1	ETS-Lindgren	3117	00035923	5/31/23	5/30/2026
CHAMBER	CHAMBER	Panashield	3M	N/A	12/29/23	12/29/2025
Receiver	EMI Test Receiver R&S ESU 40	Rohde & Schwarz	ESU 40	100320	5/27/21	5/26/2024
Receiver	EMI Test Receiver R&S ESW44	Rohde & Schwarz	ESW44	103049	10/13/21	10/12/2024
Signal Generator	Signal Generator HP 8648C	HP	8648C	35537A01679	8/4/22	8/03/2025

Software			
Software	Author	Version	Validation on
ESU Firmware	Rohde & Schwarz	4.43 SP3; BIOS v5.1-24-3	2018
RSCCommander	Rohde & Schwarz	1.6.4	2014
ScopeExplorer	LeCroy	v2.25.0.0	2009
Field Strength	Timco	v4.10.7.0	2016

8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.

The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

Units of measurement

Unless noted otherwise in the referenced standard, the measurements of ac power-line conducted emissions and conducted power output will be reported in units of dB μ V. Unless noted otherwise in the referenced standard, the measurements of radiated emissions will be reported in units of decibels, referenced to one microvolt per meter (dB μ V/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dB μ V if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.


Example:

Freq (MHz)	Meter Reading	+ ACF	+CL	= FS
33	20 dB μ V	+ 10.36 dB/m	+0.40 dB	=30.36 dB μ V/m @ 3m

EIRP = Pcond (dBm) + dBi


8.1 RF POWER OUTPUT

Limits from 2.1046(a), 74.861(e) (1) (ii) and test procedure from ANSI C63.26 and KDB 206256 D01 Wireless Microphone Certification.

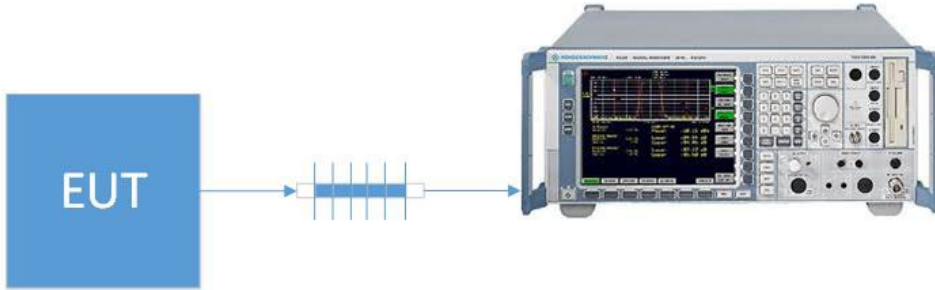


Test Results				
Mode	Type	Tuned Frequency (MHz)	Power Output (dBm)	Power Output (W)
1	8:1	470.075	23.52	0.225
1	8:1	539	23.17	0.207
1	8:1	607.925	23.16	0.207
1	8:1	653.075	12.63	0.018
2	16:1	470.075	20.68	0.117
2	16:1	539	20.35	0.108
2	16:1	607.925	20.41	0.110
2	16:1	653.075	12.33	0.017

8.1.1 RF Power Output Plot, Mode 1, 470.075 MHz

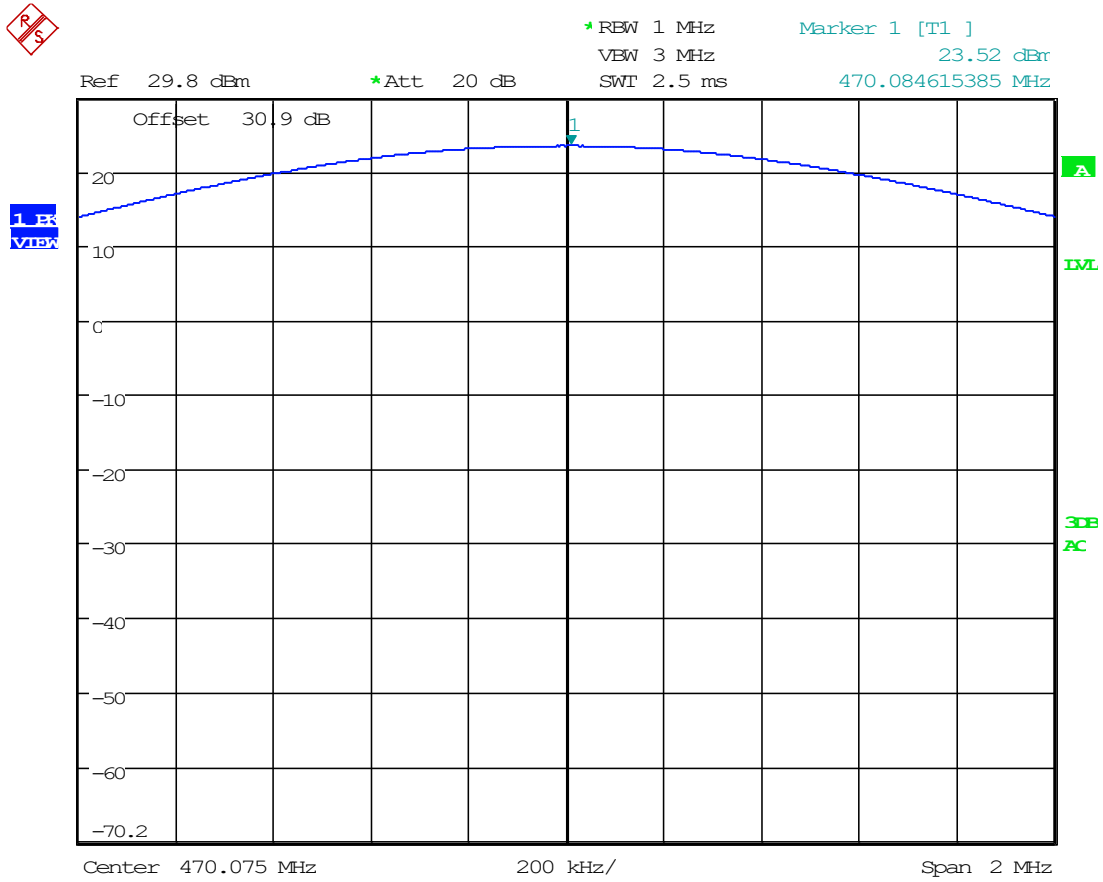


Date: 26.FEB.2024 15:55:26

8.1.2 RF Power Output Plot, Mode 1, 539 MHz

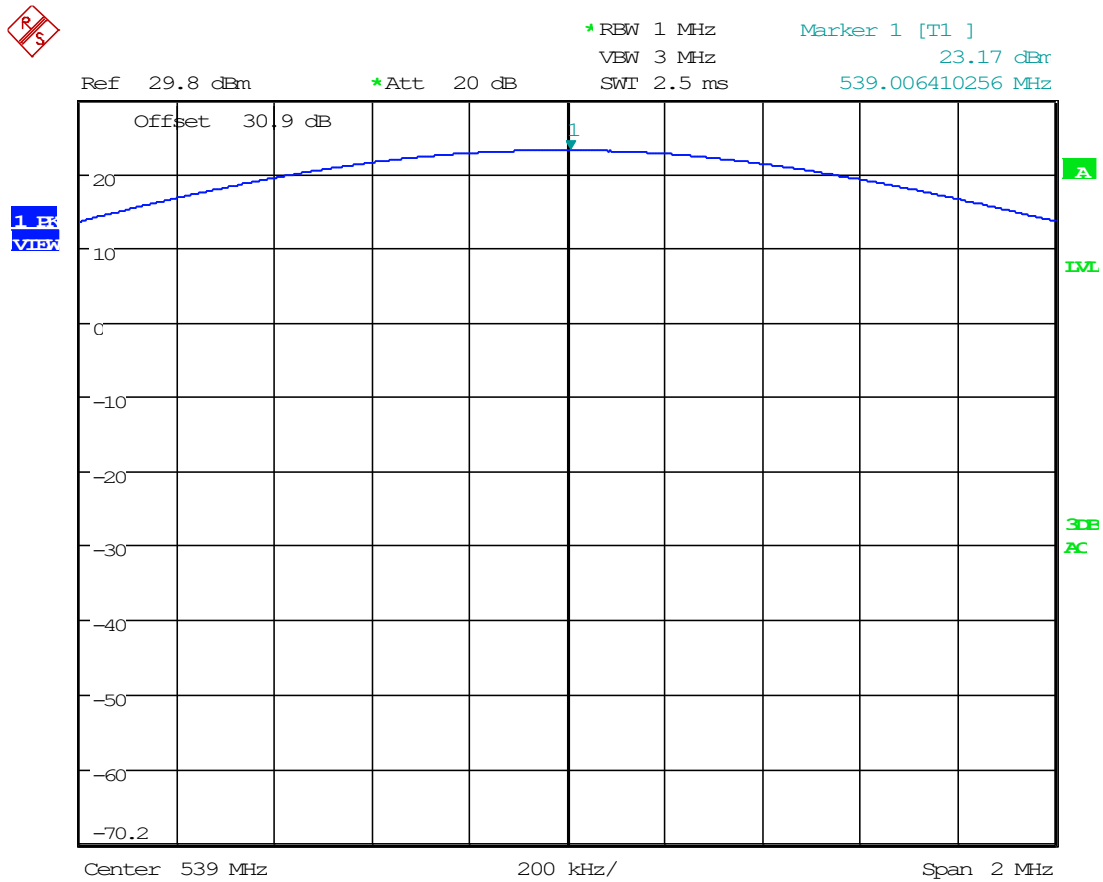


Date: 26.FEB.2024 15:56:34

8.1.3 RF Power Output Plot, Mode 1, 607.925 MHz

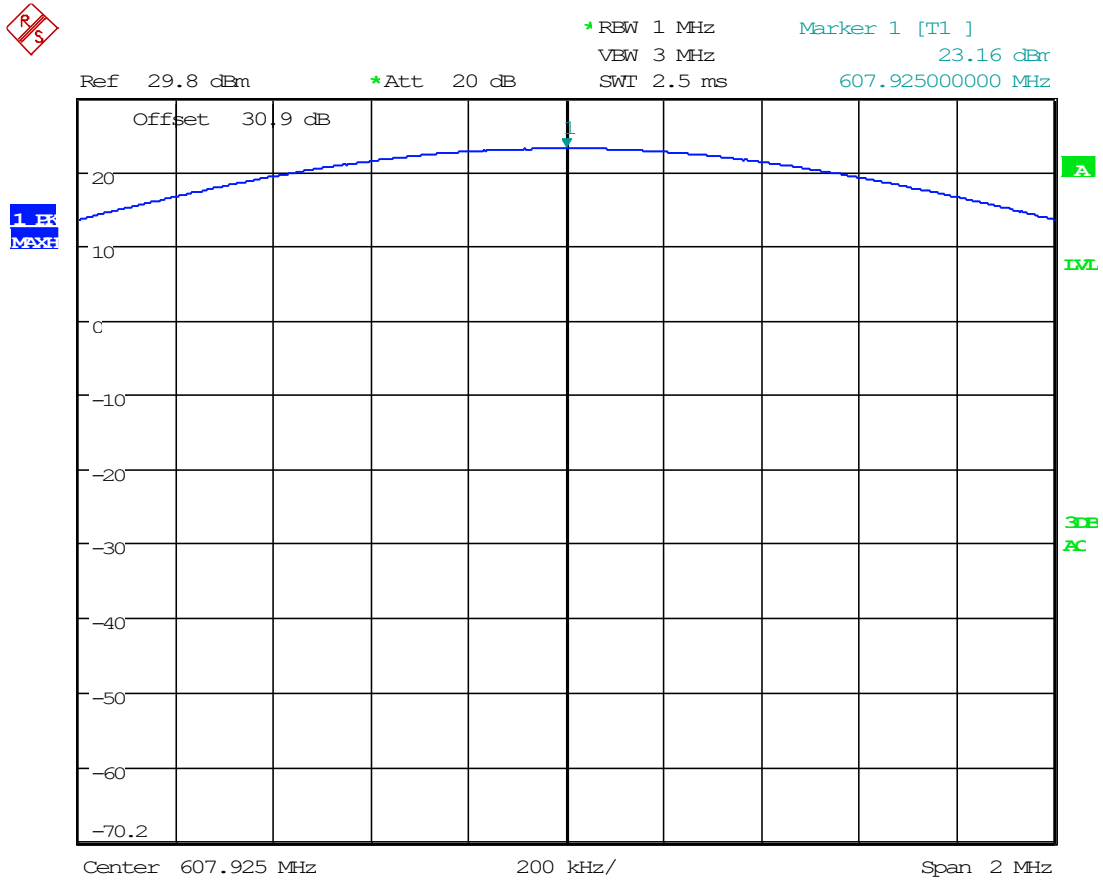


Date: 26.FEB.2024 15:58:12

8.1.5 RF Power Output Plot, Mode 2, 470.075 MHz

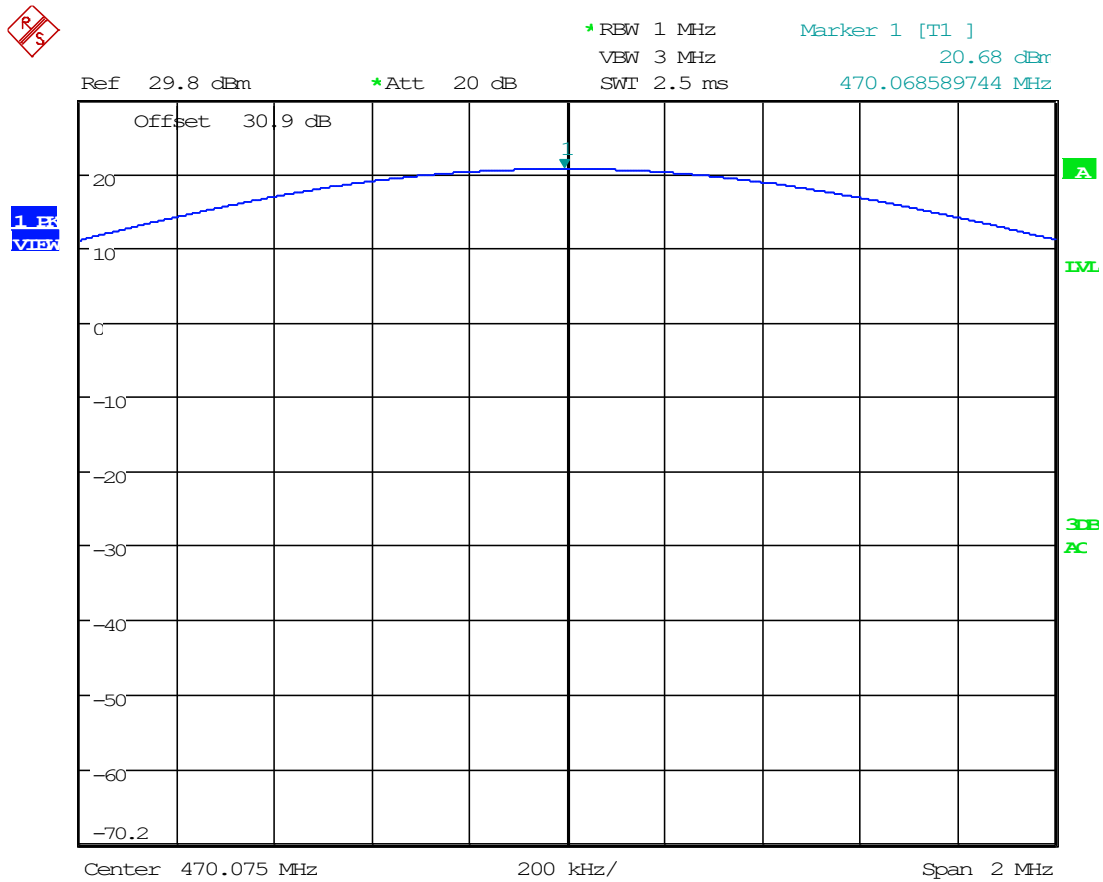

Date: 26.FEB.2024 16:32:45


8.1.7 RF Power Output Plot, Mode 2, 607.925 MHz

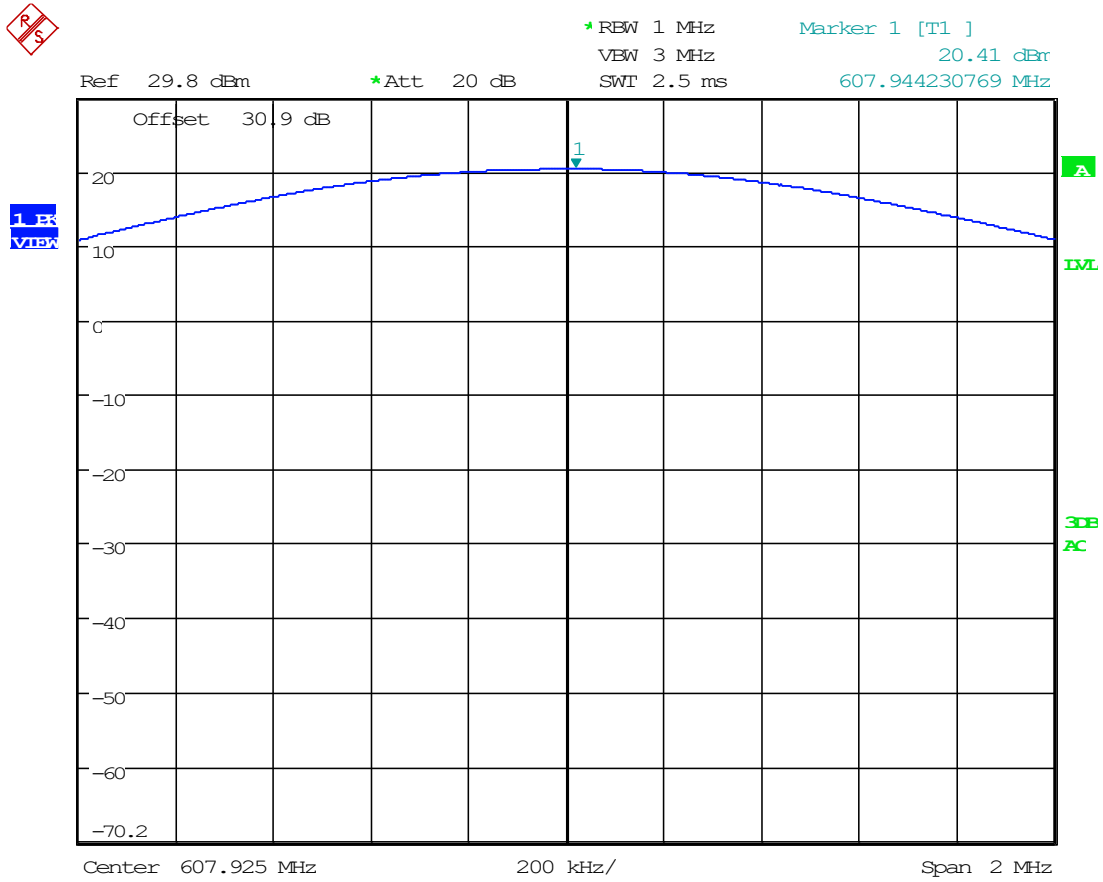

Date: 26.FEB.2024 16:43:43


8.2 OCCUPIED BANDWIDTH

Limits from 2.1049(c), 74.861(d)(4)(i) and test procedure from ANSI C63.26

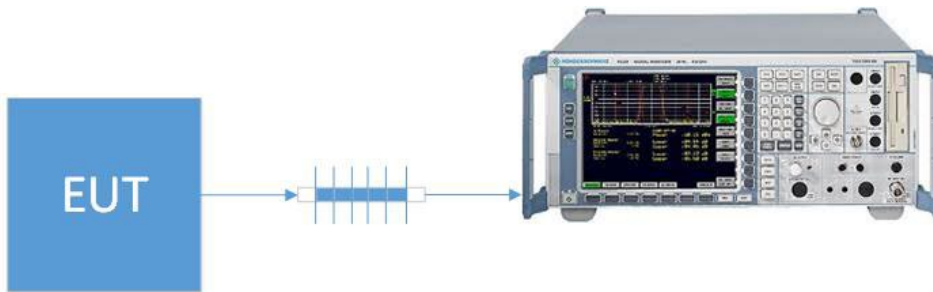


Test Results, Occupied Bandwidth			
Mode	Tuned Frequency (MHz)	Occupied Bandwidth (kHz)	Bandwidth Type
1	470.075	62.494	99%
1	539	62.269	99%
1	607.925	62.764	99%
1	653.075	62.714	99%
2	470.075	62.844	99%
2	539	62.299	99%
2	607.925	62.443	99%
2	653.075	62.574	99%

8.2.1 99% Bandwidth Plot, Mode 1, 470.075 MHz

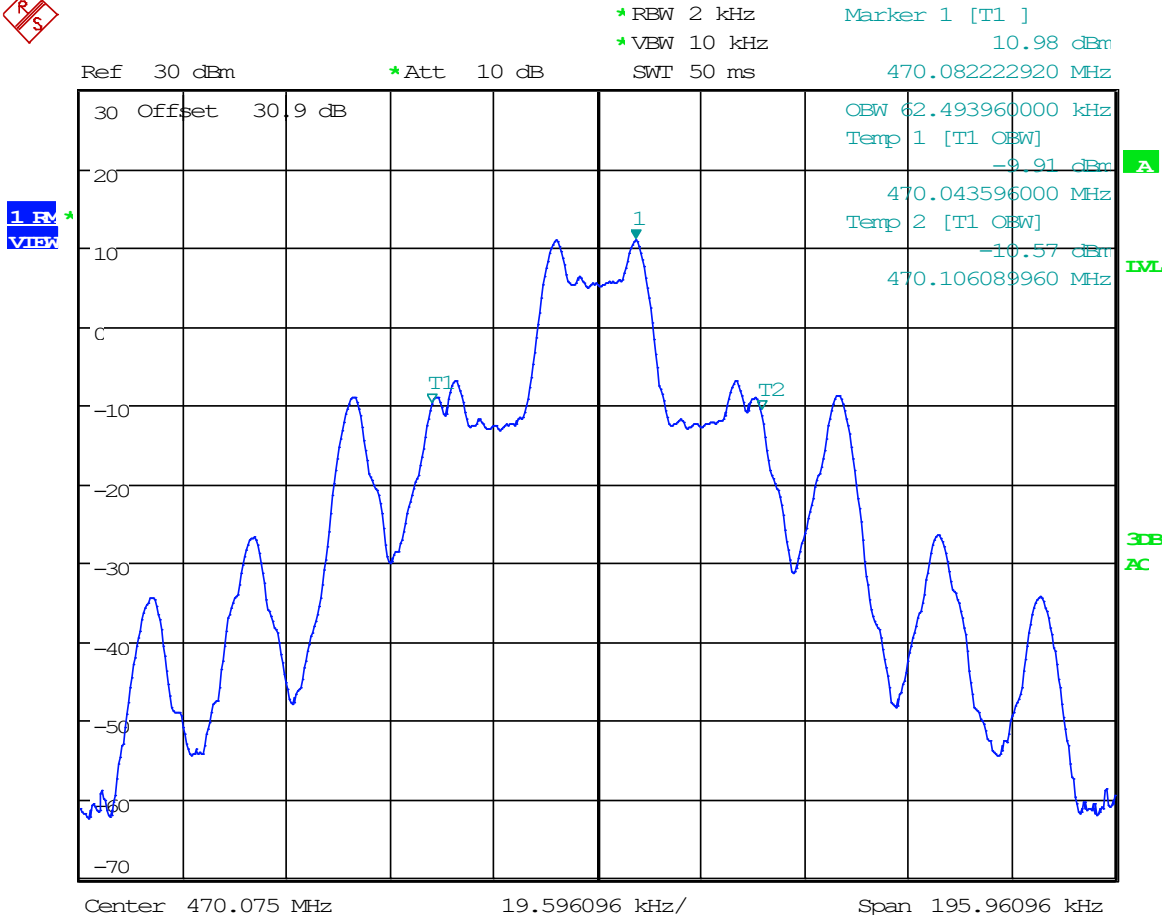


Date: 26.FEB.2024 10:11:08

8.2.2 99% Bandwidth Plot, Mode 1, 539 MHz

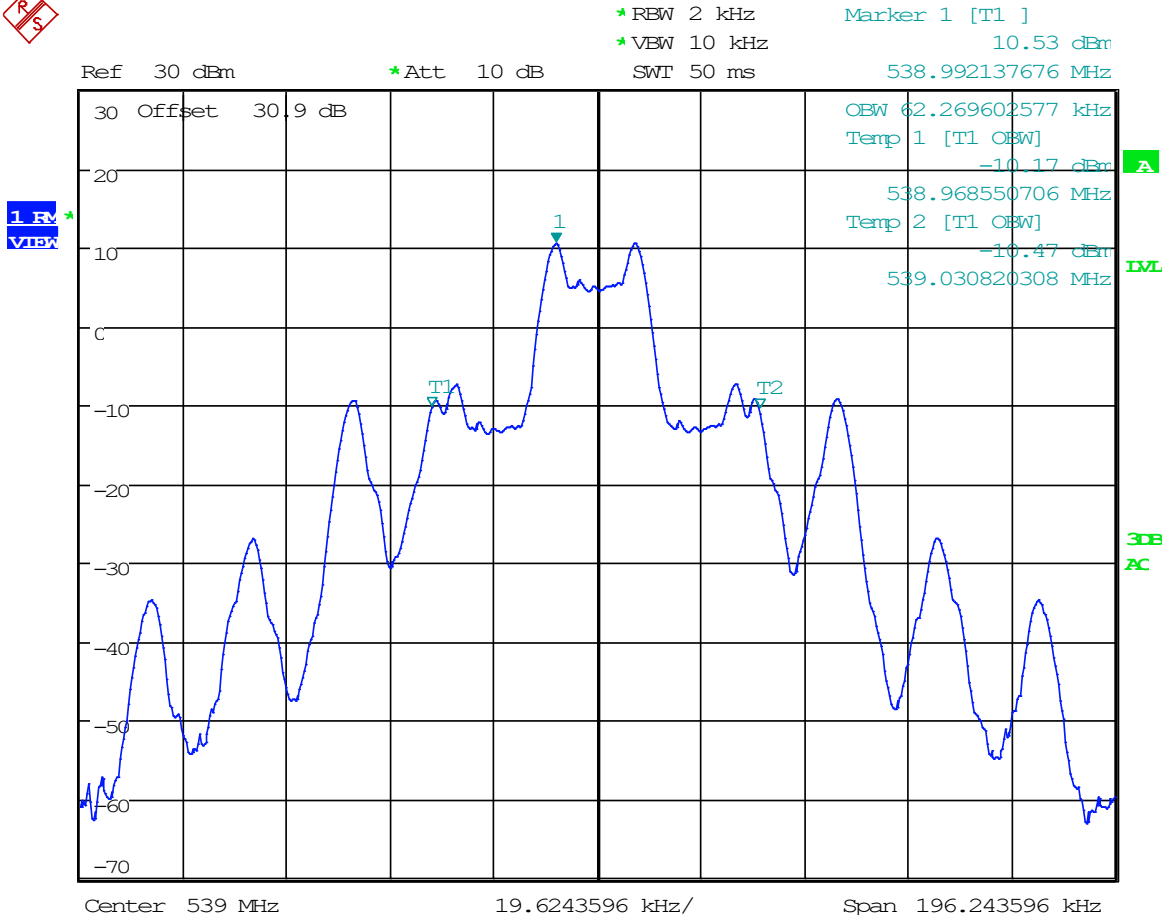


Date: 26.FEB.2024 10:16:03

8.2.3 99% Bandwidth Plot, Mode 1, 607.925 MHz

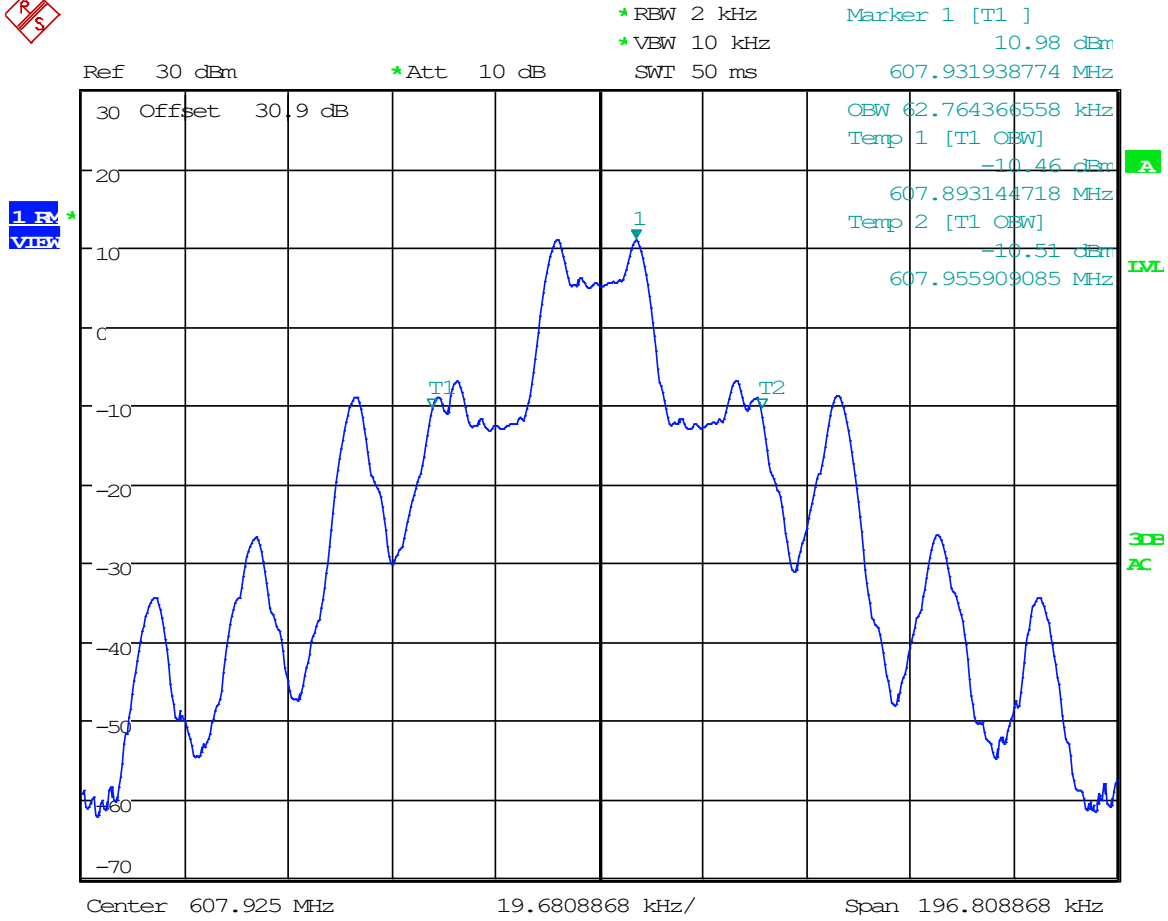

Date: 26.FEB.2024 10:21:11

8.2.4 99% Bandwidth Plot, Mode 1, 653.075 MHz

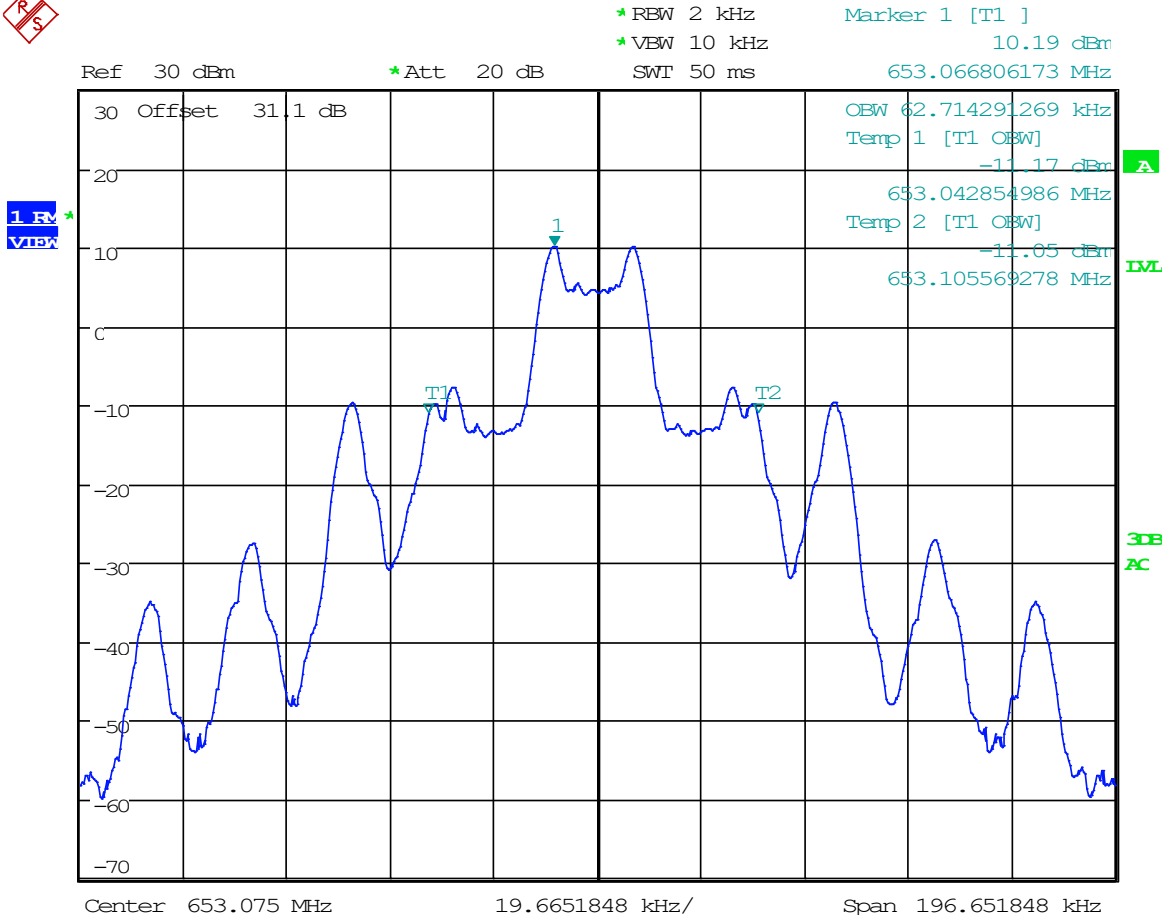


Date: 26.FEB.2024 17:37:07

8.2.5 99% Bandwidth Plot, Mode 2, 470.075 MHz



* RBW 2 kHz Marker 1 [T1]
 * VBW 10 kHz 7.83 dBm
 Ref 30 dBm * Att 10 dB SWI 50 ms 470.082263433 MHz

1 RBW
 VIEW

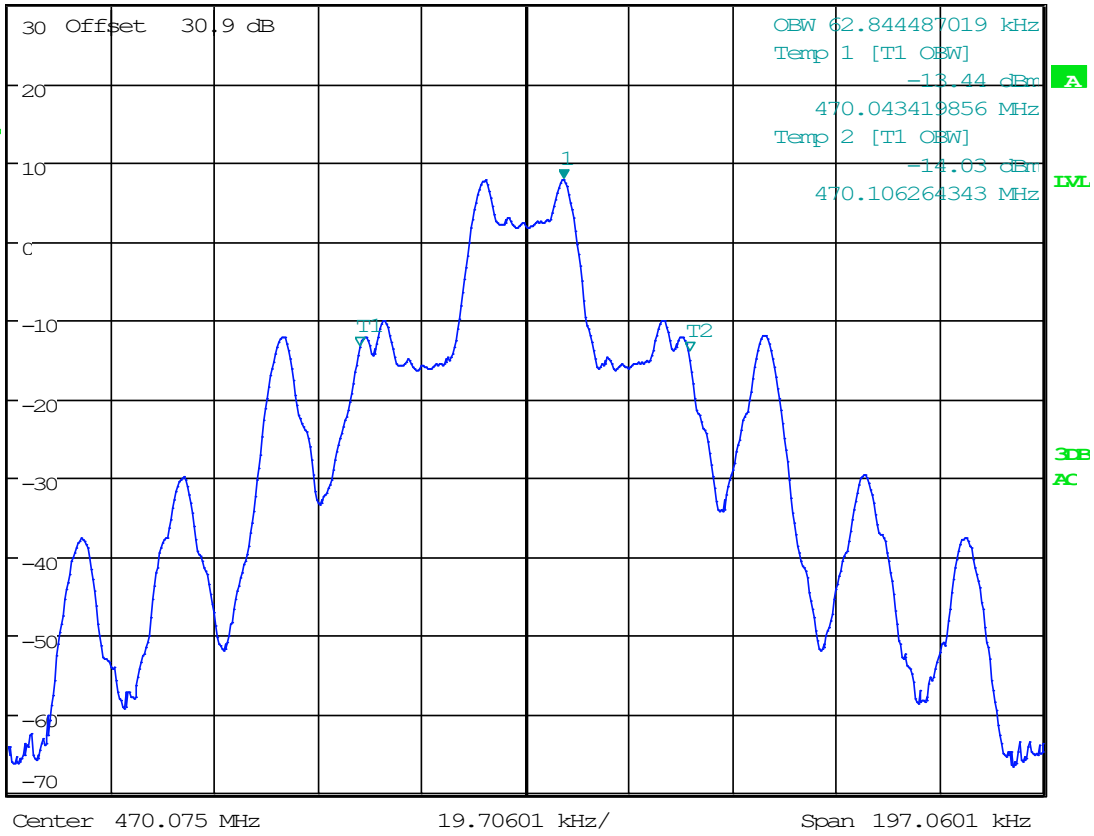


Date: 26.FEB.2024 10:33:42

8.2.6 99% Bandwidth Plot, Mode 2, 539 MHz




* RBW 2 kHz Marker 1 [T1]
 * VBW 10 kHz 7.26 dBm
 Ref 30 dBm * Att 10 dB SWI 50 ms 538.992133902 MHz

1 RV
 VIEW

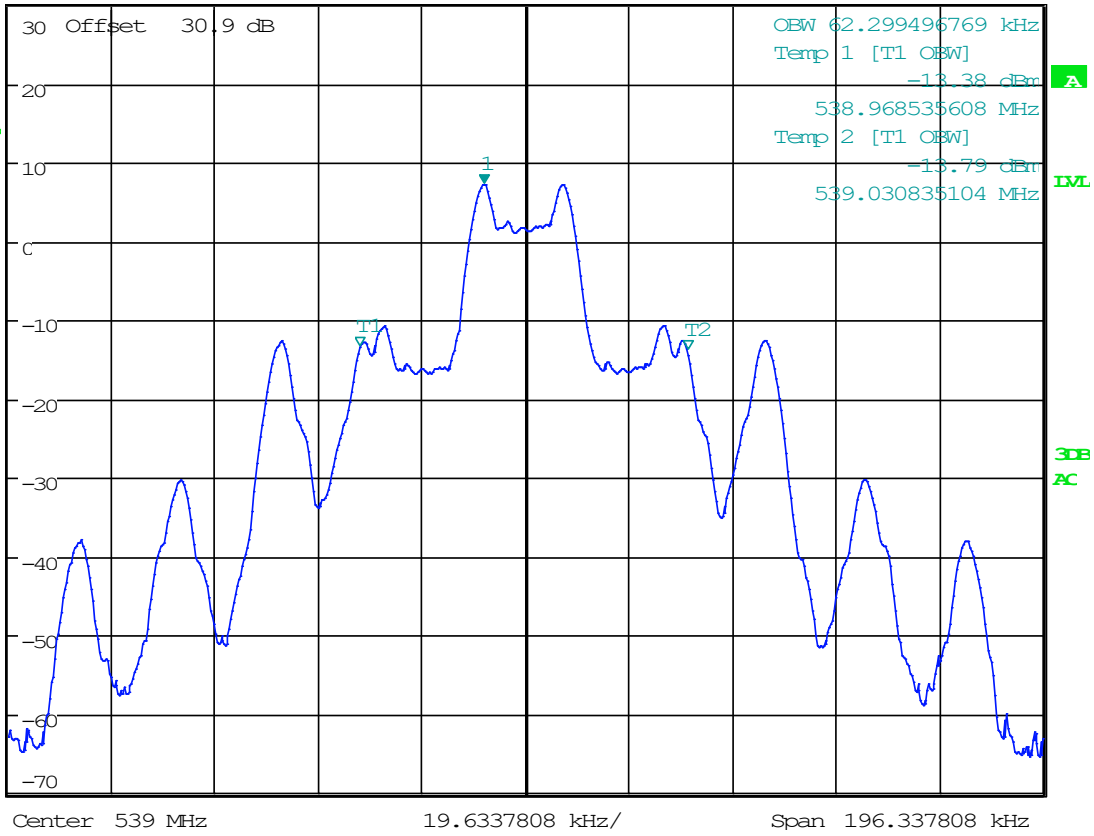


Date: 26.FEB.2024 10:34:38

8.2.7 99% Bandwidth Plot, Mode 2, 607.925 MHz

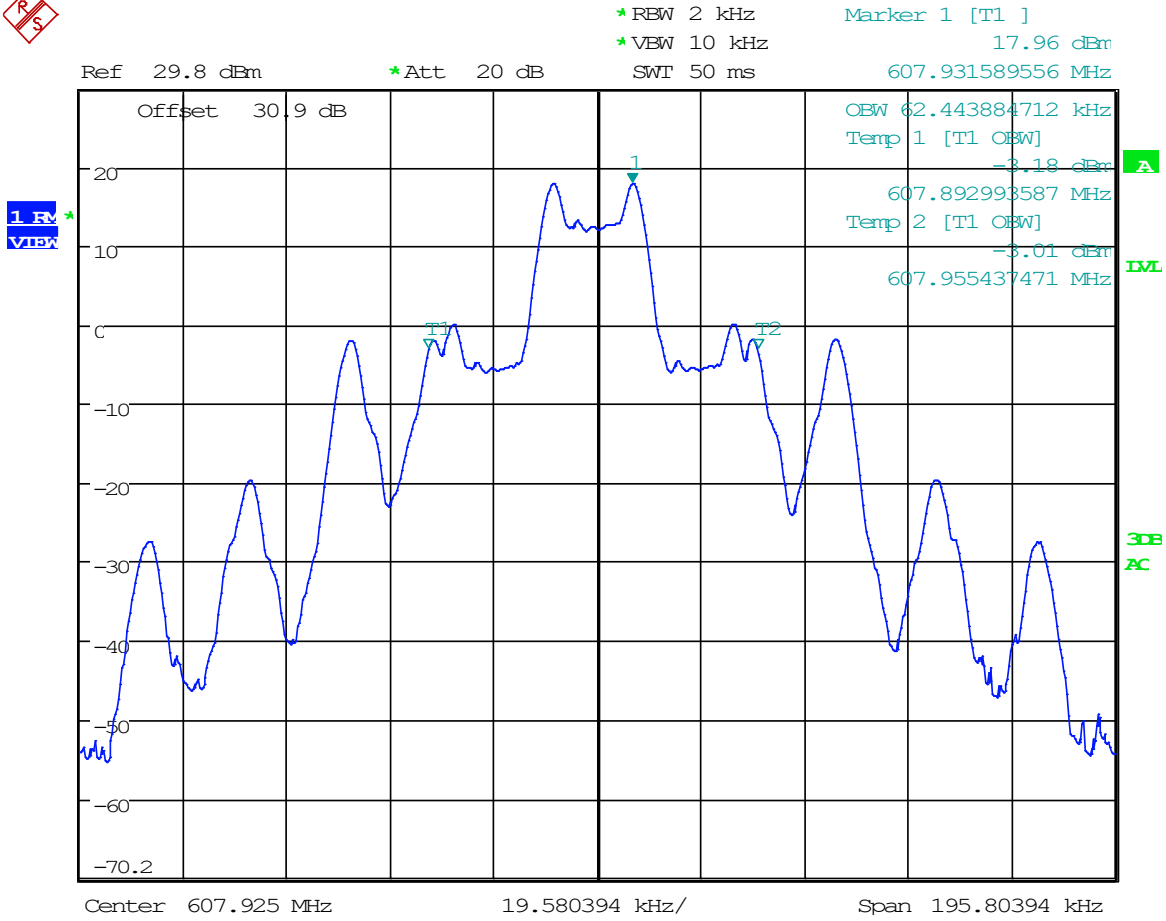

Date: 26.FEB.2024 16:53:48



8.2.8 99% Bandwidth Plot, Mode 2, 653.075 MHz

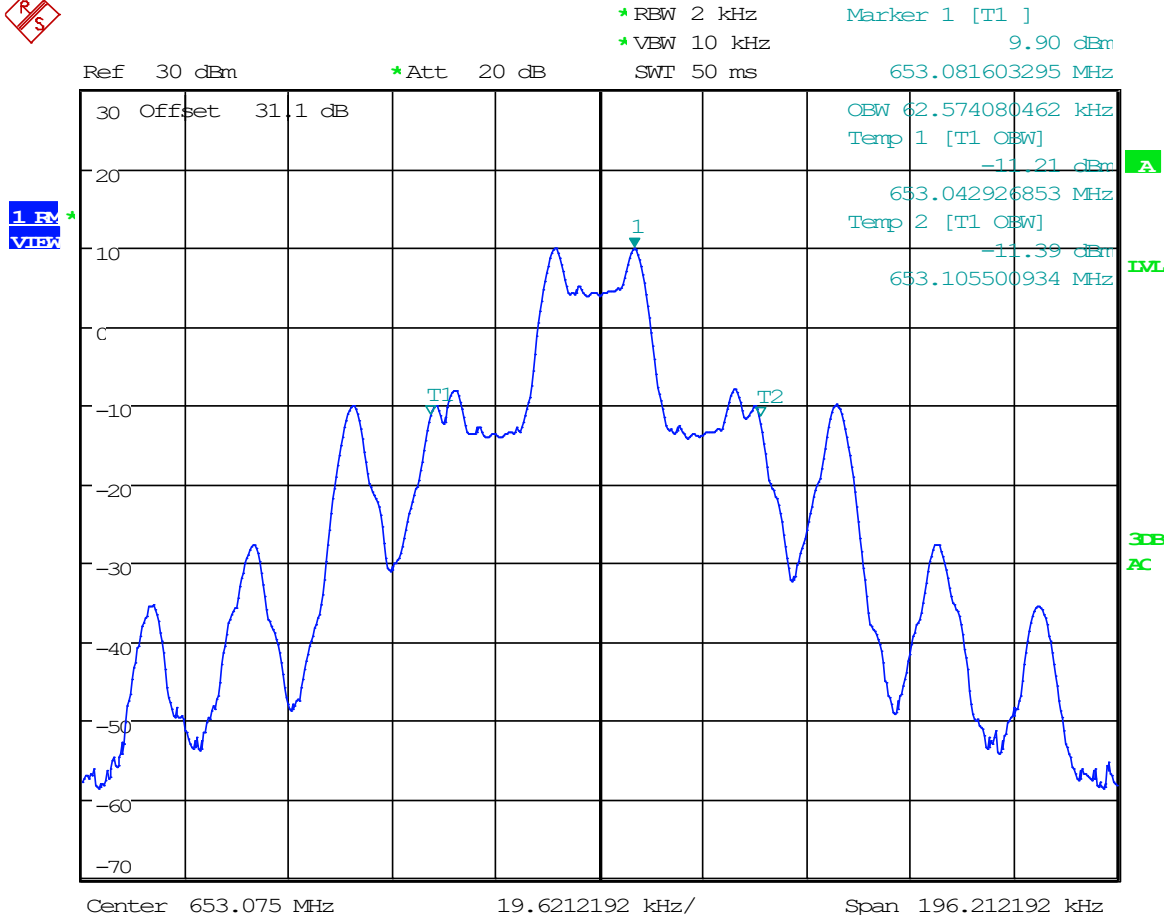

Date: 26.FEB.2024 17:38:26

8.3 Radiated Emissions

Limits from 2.1053, 74.861(e)(6)(iii) and test procedure from ANSI C63.26 and KDB 206256 D01 Wireless Microphone Certification.

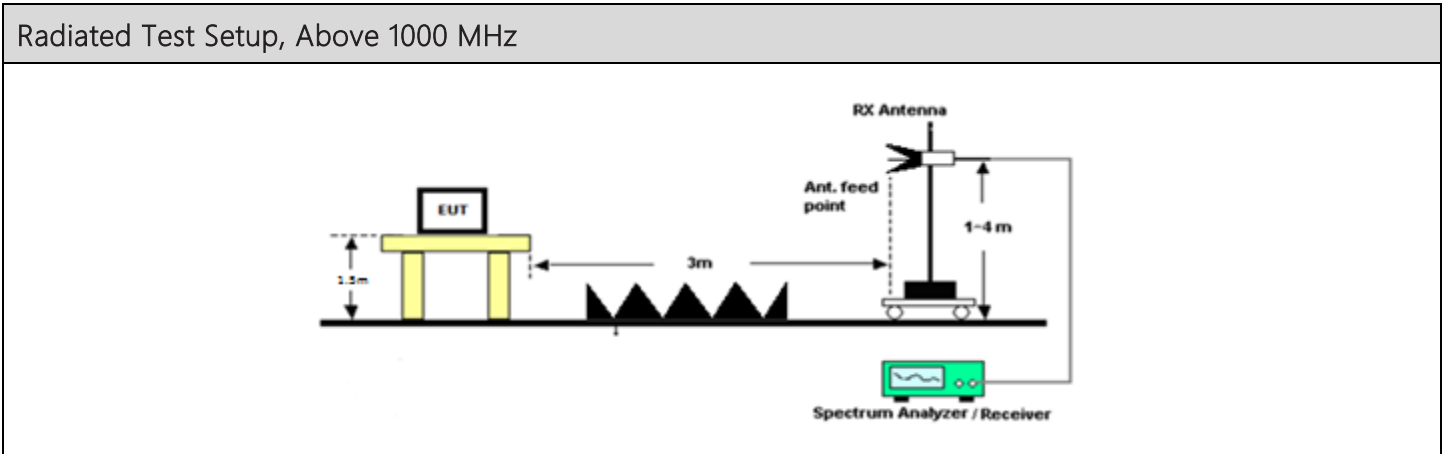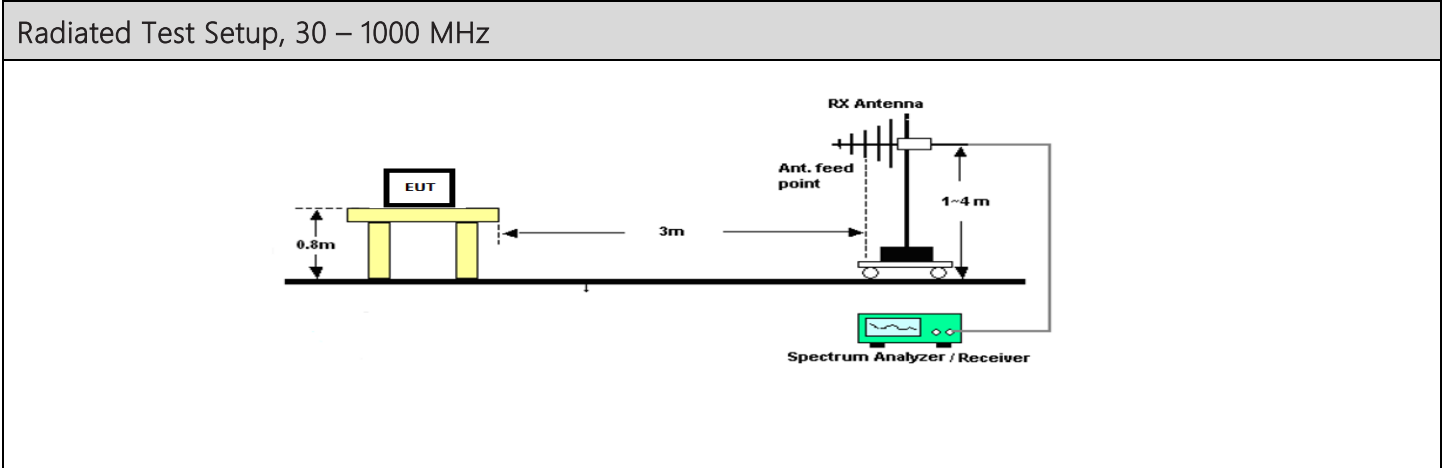

Radiated Emissions Tabular Data

8.3.1 Radiated Emissions Table, 470.075 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
470.075	940.150	PK	34.80	H	-3.59	23.04	3.00	54.25	-43.13	-13.00	30.13
470.075	940.150	PK	38.40	V	-3.59	23.04	3.00	57.85	-39.53	-13.00	26.53
470.075	1410.225	PK	19.70	H	-4.38	27.95	3.00	43.27	-54.11	-13.00	41.11
470.075	1410.225	PK	27.20	V	-4.38	27.95	3.00	50.77	-46.61	-13.00	33.61
470.075	1880.300	PK	23.50	H	-5.11	31.37	3.00	49.76	-47.61	-13.00	34.61
470.075	1880.300	PK	34.00	V	-5.11	31.37	3.00	60.26	-37.11	-13.00	24.11
470.075	2350.375	PK	12.90	H	-5.81	31.91	3.00	39.00	-58.38	-13.00	45.38
470.075	2350.375	PK	16.00	V	-5.81	31.91	3.00	42.10	-55.28	-13.00	42.28
470.075	2820.450	PK	17.30	H	-6.33	32.52	3.00	43.48	-53.89	-13.00	40.89
470.075	2820.450	PK	21.50	V	-6.33	32.52	3.00	47.68	-49.69	-13.00	36.69
470.075	3290.525	PK	14.60	H	-6.83	32.80	3.00	40.56	-56.82	-13.00	43.82
470.075	3290.525	PK	15.50	V	-6.83	32.80	3.00	41.46	-55.92	-13.00	42.92
470.075	3760.600	PK	16.30	H	-7.29	33.19	3.00	42.20	-55.18	-13.00	42.18
470.075	3760.600	PK	17.10	V	-7.29	33.19	3.00	43.00	-54.38	-13.00	41.38
470.075	4230.675	PK	13.60	H	-7.77	33.46	3.00	39.29	-58.09	-13.00	45.09
470.075	4230.675	PK	15.00	V	-7.77	33.46	3.00	40.69	-56.69	-13.00	43.69
470.075	4700.750	PK	15.40	H	-8.19	34.07	3.00	41.28	-56.09	-13.00	43.09
470.075	4700.750	PK	16.70	V	-8.19	34.07	3.00	42.58	-54.79	-13.00	41.79

8.3.2 Radiated Emissions Table, 539 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
539.00	1078.00	PK	40.40	H	-3.90	27.02	3.00	63.53	-33.85	-13.00	20.85
539.00	1078.00	PK	47.70	V	-3.90	27.02	3.00	70.83	-26.55	-13.00	13.55
539.00	1617.00	PK	33.30	H	-4.75	28.16	3.00	56.71	-40.67	-13.00	27.67
539.00	1617.00	PK	39.10	V	-4.75	28.16	3.00	62.51	-34.87	-13.00	21.87
539.00	2156.00	PK	14.60	H	-5.58	31.39	3.00	40.40	-56.97	-13.00	43.97
539.00	2156.00	PK	19.40	V	-5.58	31.39	3.00	45.20	-52.17	-13.00	39.17
539.00	2695.00	PK	28.70	H	-6.19	32.47	3.00	54.99	-42.39	-13.00	29.39
539.00	2695.00	PK	35.70	V	-6.19	32.47	3.00	61.99	-35.39	-13.00	22.39
539.00	3234.00	PK	19.70	H	-6.80	32.76	3.00	45.66	-51.72	-13.00	38.72
539.00	3234.00	PK	26.70	V	-6.80	32.76	3.00	52.66	-44.72	-13.00	31.72
539.00	3773.00	PK	30.20	H	-7.31	33.25	3.00	56.14	-41.24	-13.00	28.24
539.00	3773.00	PK	34.80	V	-7.31	33.25	3.00	60.74	-36.64	-13.00	23.64
539.00	4312.00	PK	37.20	H	-7.84	33.56	3.00	62.91	-34.46	-13.00	21.46
539.00	4312.00	PK	41.80	V	-7.84	33.56	3.00	67.51	-29.86	-13.00	16.86
539.00	4851.00	PK	33.80	H	-8.30	34.17	3.00	59.67	-37.71	-13.00	24.71
539.00	4851.00	PK	34.80	V	-8.30	34.17	3.00	60.67	-36.71	-13.00	23.71
539.00	5390.00	PK	37.70	H	-8.78	34.68	3.00	63.59	-33.79	-13.00	20.79
539.00	5390.00	PK	38.50	V	-8.78	34.68	3.00	64.39	-32.99	-13.00	19.99

8.3.3 Radiated Emissions Table, 607.925 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
607.925	1215.850	PK	18.80	H	-4.04	28.33	3.00	43.08	-54.29	-13.00	41.29
607.925	1215.850	PK	19.40	V	-4.04	28.33	3.00	43.68	-53.69	-13.00	40.69
607.925	1823.775	PK	21.80	H	-5.11	30.77	3.00	47.46	-49.92	-13.00	36.92
607.925	1823.775	PK	30.90	V	-5.11	30.77	3.00	56.56	-40.82	-13.00	27.82
607.925	2431.700	PK	19.60	H	-5.90	32.33	3.00	46.03	-51.35	-13.00	38.35
607.925	2431.700	PK	22.40	V	-5.90	32.33	3.00	48.83	-48.55	-13.00	35.55
607.925	3039.625	PK	13.60	H	-6.57	32.86	3.00	39.89	-57.48	-13.00	44.48
607.925	3039.625	PK	15.60	V	-6.57	32.86	3.00	41.89	-55.48	-13.00	42.48
607.925	3647.550	PK	17.40	H	-7.18	33.21	3.00	43.43	-53.95	-13.00	40.95
607.925	3647.550	PK	20.10	V	-7.18	33.21	3.00	46.13	-51.25	-13.00	38.25
607.925	4255.475	PK	16.80	H	-7.79	33.45	3.00	42.46	-54.91	-13.00	41.91
607.925	4255.475	PK	21.00	V	-7.79	33.45	3.00	46.66	-50.71	-13.00	37.71
607.925	4863.400	PK	27.20	H	-8.31	34.14	3.00	53.03	-44.34	-13.00	31.34
607.925	4863.400	PK	25.20	V	-8.31	34.14	3.00	51.03	-46.34	-13.00	33.34
607.925	5471.325	PK	18.70	H	-8.89	34.71	3.00	44.52	-52.85	-13.00	39.85
607.925	5471.325	PK	19.20	V	-8.89	34.71	3.00	45.02	-52.35	-13.00	39.35
607.925	6079.250	PK	21.30	H	-9.40	35.47	3.00	47.37	-50.01	-13.00	37.01
607.925	6079.250	PK	21.30	V	-9.40	35.47	3.00	47.37	-50.01	-13.00	37.01

8.3.4 Radiated Emissions Table, 653.075 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
653.075	1306.150	PK	18.20	H	-4.28	29.11	3.00	43.03	-54.35	-13.00	41.35
653.075	1306.150	PK	21.90	V	-4.28	29.11	3.00	46.73	-50.65	-13.00	37.65
653.075	1959.225	PK	16.70	H	-5.28	31.69	3.00	43.11	-54.27	-13.00	41.27
653.075	1959.225	PK	23.60	V	-5.28	31.69	3.00	50.01	-47.37	-13.00	34.37
653.075	2612.300	PK	12.80	H	-6.10	32.60	3.00	39.30	-58.08	-13.00	45.08
653.075	2612.300	PK	12.20	V	-6.10	32.60	3.00	38.70	-58.68	-13.00	45.68
653.075	3265.375	PK	13.20	H	-6.82	32.79	3.00	39.17	-58.21	-13.00	45.21
653.075	3265.375	PK	13.80	V	-6.82	32.79	3.00	39.77	-57.61	-13.00	44.61
653.075	3918.450	PK	16.10	H	-7.49	33.46	3.00	42.06	-55.31	-13.00	42.31
653.075	3918.450	PK	16.30	V	-7.49	33.46	3.00	42.26	-55.11	-13.00	42.11
653.075	4571.525	PK	14.00	H	-8.10	34.03	3.00	39.93	-57.45	-13.00	44.45
653.075	4571.525	PK	14.40	V	-8.10	34.03	3.00	40.33	-57.05	-13.00	44.05
653.075	5224.600	PK	14.40	H	-8.65	34.35	3.00	40.09	-57.28	-13.00	44.28
653.075	5224.600	PK	14.30	V	-8.65	34.35	3.00	39.99	-57.38	-13.00	44.38
653.075	5877.675	PK	14.20	H	-9.17	35.12	3.00	40.15	-57.23	-13.00	44.23
653.075	5877.675	PK	13.90	V	-9.17	35.12	3.00	39.85	-57.53	-13.00	44.53
653.075	6530.750	PK	13.70	H	-9.73	35.83	3.00	39.80	-57.57	-13.00	44.57
653.075	6530.750	PK	14.00	V	-9.73	35.83	3.00	40.10	-57.27	-13.00	44.27

9. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate document.

10. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_12361-24_FCC 74H_	1	Initial release	3/6/2024



13146 NW 86th Drive, Suite 400, Alachua, Florida 32615
(352) 472-5500 / testing@industrial-ia.com

END OF TEST REPORT
