



Test Report – FCC PART 74H  
LOW POWER LICENSED WIRELESS MICROPHONE  
Prepared For: Wisycom s.r.l.

Approved for Release By:

Signature: Bruno Clavier

Name & Title: Bruno Clavier, General Manager

Date of Signature 7/2/2021

This test report shall not be reproduced except in full without the written and signed permission of Timco Engineering Inc. (IIA). This test report relates only to the items tested as identified and is not valid for any subsequent changes or modifications made to the equipment under test.

## Table of Contents

<b>1. CUSTOMER INFORMATION.....</b>	<b>5</b>
1.1 TEST RESULT SUMMARY .....	5
<b>2. LOCATION OF TESTING .....</b>	<b>6</b>
2.1 TEST LABORATORY .....	6
2.2 TESTING WAS PERFORMED, REVIEWED BY .....	7
<b>3. TEST SAMPLE(S) (EUT/DUT).....</b>	<b>8</b>
3.1 DESCRIPTION OF THE EUT.....	8
3.2 CONFIGURATION OF EUT .....	9
3.3 TEST SETUP OF EUT .....	9
<b>4. TEST METHODS &amp; APPLICABLE REGULATORY LIMITS.....</b>	<b>10</b>
4.1 TEST METHODS/STANDARDS/GUIDANCE .....	10
<b>5. MEASUREMENT UNCERTAINTY.....</b>	<b>10</b>
<b>6. ENVIRONMENTAL CONDITIONS .....</b>	<b>10</b>
<b>7. LIST OF TEST EQUIPMENT AND TEST FACILITY.....</b>	<b>11</b>
<b>8. TEST RESULTS .....</b>	<b>12</b>
8.1 RF POWER OUTPUT.....	13
8.1.1 <i>Test Data: RF Power Output Measurement Table</i> .....	13
8.2 OCCUPIED BANDWIDTH .....	14
8.2.1 <i>Bandwidth Plot, 99%, 174 MHz</i> .....	14
8.2.2 <i>Bandwidth Plot, 99%, 200 MHz</i> .....	15
8.2.3 <i>Bandwidth Plot, 99%, 215 MHz</i> .....	16
8.2.4 <i>Bandwidth Plot, 99%, 450.5 MHz</i> .....	17
8.2.5 <i>Bandwidth Plot, 99%, 455.5 MHz</i> .....	18
8.2.6 <i>Bandwidth Plot, 99%, 470 MHz</i> .....	19
8.2.7 <i>Bandwidth Plot, 99%, 555 MHz</i> .....	20
8.2.8 <i>Bandwidth Plot, 99%, 608 MHz</i> .....	21
8.2.9 <i>Bandwidth Plot, 99%, 654 MHz</i> .....	22
8.2.10 <i>Bandwidth Plot, 99%, 657 MHz</i> .....	23
8.2.11 <i>Bandwidth Plot, 99%, 942 MHz</i> .....	24
8.2.12 <i>Bandwidth Plot, 99%, 951 MHz</i> .....	25
8.2.13 <i>Bandwidth Plot, 99%, 956 MHz</i> .....	26
8.2.14 <i>Bandwidth Plot, 99%, 959 MHz</i> .....	27
8.2.15 <i>Test Data: Emission Mask Measurement Plot, 174 MHz,</i> .....	28
8.2.16 <i>Test Data: Emission Mask Measurement Plot, 200 MHz,</i> .....	29
8.2.17 <i>Test Data: Emission Mask Measurement Plot, 215 MHz,</i> .....	30
8.2.18 <i>Test Data: Emission Mask Measurement Plot, 450.5 MHz,</i> .....	31
8.2.19 <i>Test Data: Emission Mask Measurement Plot, 455.5 MHz,</i> .....	32
8.2.20 <i>Test Data: Emission Mask Measurement Plot, 470 MHz,</i> .....	33
8.2.21 <i>Test Data: Emission Mask Measurement Plot, 555 MHz,</i> .....	34

8.2.22	Test Data: Emission Mask Measurement Plot, 608 MHz, .....	35
8.2.23	Test Data: Emission Mask Measurement Plot, 654 MHz, .....	36
8.2.24	Test Data: Emission Mask Measurement Plot, 657 MHz, .....	37
8.2.25	Test Data: Emission Mask Measurement Plot, 942 MHz, .....	38
8.2.26	Test Data: Emission Mask Measurement Plot, 951 MHz, .....	39
8.2.27	Test Data: Emission Mask Measurement Plot, 956 MHz, .....	40
8.2.28	Test Data: Emission Mask Measurement Plot, 959 MHz, .....	41
8.3	SPURIOUS EMISSIONS ANT ANTENNA TERMINALS (CONDUCTED) .....	42
8.3.1	Test Data: Spurious Emissions at antenna terminals (Conducted) 174 MHz, Below 1G, .....	43
8.3.2	Test Data: Spurious Emissions at antenna terminals (Conducted) 174 MHz, Above 1G, .....	44
8.3.3	Test Data: Spurious Emissions at antenna terminals (Conducted) 200 MHz, Below 1G, .....	45
8.3.4	Test Data: Spurious Emissions at antenna terminals (Conducted) 200 MHz, Above 1G, .....	46
8.3.5	Test Data: Spurious Emissions at antenna terminals (Conducted) 215 MHz, Below 1G, .....	47
8.3.6	Test Data: Spurious Emissions at antenna terminals (Conducted) 215 MHz, Above 1G, .....	48
8.3.7	Test Data: Spurious Emissions at antenna terminals (Conducted) 450.5 MHz, Below 1G, .....	49
8.3.8	Test Data: Spurious Emissions at antenna terminals (Conducted) 450.5 MHz, Above 1G, .....	50
8.3.9	Test Data: Spurious Emissions at antenna terminals (Conducted) 455.5 MHz, Below 1G, .....	51
8.3.10	Test Data: Spurious Emissions at antenna terminals (Conducted) 455.5 MHz, Above 1G, .....	52
8.3.11	Test Data: Spurious Emissions at antenna terminals (Conducted) 470 MHz, Below 1G, .....	53
8.3.12	Test Data: Spurious Emissions at antenna terminals (Conducted) 470 MHz, Above 1G, .....	54
8.3.13	Test Data: Spurious Emissions at antenna terminals (Conducted) 555 MHz, Below 1G, .....	55
8.3.14	Test Data: Spurious Emissions at antenna terminals (Conducted) 555 MHz, Above 1G, .....	56
8.3.15	Test Data: Spurious Emissions at antenna terminals (Conducted) 608 MHz, Below 1G, .....	57
8.3.16	Test Data: Spurious Emissions at antenna terminals (Conducted) 608 MHz, Above 1G, .....	58
8.3.17	Test Data: Spurious Emissions at antenna terminals (Conducted) 654 MHz, Below 1G, .....	59
8.3.18	Test Data: Spurious Emissions at antenna terminals (Conducted) 654 MHz, Above 1G, .....	60
8.3.19	Test Data: Spurious Emissions at antenna terminals (Conducted) 657 MHz, Below 1G, .....	61
8.3.20	Test Data: Spurious Emissions at antenna terminals (Conducted) 657 MHz, Above 1G, .....	62
8.3.21	Test Data: Spurious Emissions at antenna terminals (Conducted) 942 MHz, Below 1G, .....	63
8.3.22	Test Data: Spurious Emissions at antenna terminals (Conducted) 942 MHz, Above 1G, .....	64
8.3.23	Test Data: Spurious Emissions at antenna terminals (Conducted) 951 MHz, Below 1G, .....	65
8.3.24	Test Data: Spurious Emissions at antenna terminals (Conducted) 951 MHz, Above 1G, .....	66
8.3.25	Test Data: Spurious Emissions at antenna terminals (Conducted) 956 MHz, Below 1G, .....	67
8.3.26	Test Data: Spurious Emissions at antenna terminals (Conducted) 956 MHz, Above 1G, .....	68
8.3.27	Test Data: Spurious Emissions at antenna terminals (Conducted) 959 MHz, Below 1G, .....	69
8.3.28	Test Data: Spurious Emissions at antenna terminals (Conducted) 959 MHz, Above 1G, .....	70
8.4	RADIATED EMISSIONS .....	71
8.4.1	Radiated Emissions Table 174-215 MHz .....	72
8.4.2	Radiated Emissions Table 450-451MHz .....	74
8.4.3	Radiated Emissions Table 455-456MHz .....	74
8.4.1	Radiated Emissions Table 470-608 MHz .....	75
8.4.2	Radiated Emissions Table 653-657MHz .....	77
8.4.1	Radiated Emissions Table 941.5-956.25MHz .....	78
8.4.1	Radiated Emissions Table 952.85-956.25MHz .....	79
8.4.1	Radiated Emissions Table 956.45-959.85MHz .....	79
8.5	FREQUENCY STABILITY .....	80



8.5.1	<i>Frequency Stability Data</i> .....	81
8.5.2	<i>Frequency Stability Plot</i> .....	82
9.	ANNEX-A - PHOTOGRAPHS OF THE EUT.....	83
10.	ANNEX-B – TEST SETUP PHOTOGRAPHS.....	83
11.	HISTORY OF TEST REPORT CHANGES.....	83

## 1. Customer Information

**Applicant:** Wisycom s.r.l.  
**Address:** Via Tiepolo, 7/E  
Tombolo, 35019, Italy

### 1.1 Test Result Summary

The following test procedure was used ANSI C63.26. Full test results are available in this report.

No additions to the test methods were needed. There were no deviations, or exclusions from the test methods. No test results are from external providers or from the customer. The test results relate only to the items tested. Timco does not offer opinions and interpretations, only a pass/fail statement.

Cluses	Description of the Requirements	Result (Pass, Fail or N/A)
PART 2.1046(a), 74.861(e) (1) (ii), (iii)	Conducted Power	PASS
2.1049(c), 74.861(d)(4)(i)	Operating Bandwidth	PASS
PART 74.861(e)(7), ETSI EN 300-422-1 s. 8.3.2	Unwanted Emissions	PASS
2.1051(a), 74.861(e)(6)(iii)	Unwanted Emissions	PASS
2.1053, 74.861(e)(6)(iii)	Unwanted Emissions	PASS
2.1053, 74.861(e) (4)	Frequency Stability	PASS

## 2. Location of Testing

### 2.1 Test Laboratory

Timco Engineering Inc. is a subsidiary of Industrial Inspection & Analysis, Inc. ("IIA"). Testing was performed at Timco's permanent laboratory located at 849 NW State Road 45, Newberry, Florida 32669

FCC test firm # 578780

FCC Designation # US1070

FCC site registration is under A2LA certificate # 0955.01

ISED Canada test site registration # 2056A


EU Notified Body # 1177

For all designations see A2LA scope # 0955.01

2.2 Testing was performed, reviewed by

Dates of Testing: 7/1/2021 – 7/2/2021

Signature:



Sr. EMC Engineer  
EMC-003838-NE



Name & Title:

Tim Royer, EMC Engineer

Date of Signature

9/7/2021

### 3. Test Sample(s) (EUT/DUT)

The test sample was received: 7/1/2021

#### 3.1 Description of the EUT

A description as well as unambiguous identification of the EUT(s) tested. Where more than one sample is required for technical reasons (such as the use of connected units for the purpose of conducted output power testing where the product units will have integral antennas), each specific test shall identify which unit was tested.

Identification	
FCC ID:	POURPU500
Brief Description	Wireless Microphone
Model(s) #	RPU500
Firmware version	n/a
Software version	n/a
Serial Number	01500110

Technical Characteristics	
Technology	Wireless Microphone
Frequency Range	174-216 MHz, 450-451 MHz, 455-456 MHz, 470-608 MHz 653-657 MHz, 941.5-952.0, 952.85-956.25 MHz, 956.45-959.85 MHz
Duty Cycle	100%
Antenna Connector	BNC or TNC Type Female
Voltage Rating (AC or Batt.)	AC & Battery

Antenna Characteristics			
Antenna	Frequency Range	Mode / BW	Antenna Gain
1	n/a	n/a	0 dBi
2			



### 3.2 Configuration of EUT

Band	Mode	Number of Ant.
174-216 MHz	Transmit	1
450-451 MHz		
455-456 MHz		
470-608 MHz		
653-657 MHz		
941.5-952 MHz		
952.85-956.25 MHz		
956.45-959.85 MHz		

#### Operating conditions during Testing:

No modifications of the device under test (including firmware, specific software settings, and input/output signal levels to the EUT).

#### Peripherals used during Testing:

No peripherals used.

### 3.3 Test Setup of EUT

Equipment, antenna, and cable arrangement. The setup of the equipment and cable or wire placement on the test site that produces the highest radiated and the highest ac power-line conducted emissions shall be shown clearly and described. Information on the orientation of portable equipment during testing shall be included. Drawings or photographs may be used for this purpose.

Test Setups are included in the test report.

#### 4. Test methods & Applicable Regulatory Limits

##### 4.1 Test methods/Standards/Guidance

The measurement was performed as per ANSI C63.26. Full test results are available in this report.

##### Limits and Regulatory Limits:

- 1) FCC Part 74 H

#### 5. Measurement Uncertainty

Parameter	Uncertainty (dB)
Conducted Emissions	1.42
Radiated Emissions (30 – 200 MHz)	5.49
Radiated Emissions (200 – 1000 MHz)	5.79
Radiated Emissions (1 GHz – 18 GHz)	4.37

The uncertainties provided in this table represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of K=2.

#### 6. Environmental Conditions

##### Temperature & Humidity

Measurements performed at the test site did not exceed the following:

Parameter	Measurement
Temperature	23 C +/- 5%
Humidity	55% +/- 5%
Barometric Pressure	30.05 in Hg

**Note:** Specific environmental conditions that are applicable to a specific test are available in the test result section.

## 7. List of Test Equipment and Test Facility

The test equipment used identified by type, manufacturer, serial number, or other identification and the date on which the next calibration or service check is due.

Description of the firmware or software used to operate EUT for testing purposes.

A complete list of all test equipment used shall be included with the test report. The manufacturer's model and serial numbers, and date of last calibration, and calibration interval shall be included. Measurement cable loss, measuring instrument bandwidth and detector function, video bandwidth, if appropriate, and antenna factors shall also be included where applicable.

### List of Test Equipment

Type	Device	Manufacturer	Model	SN #	Current Cal	Cal Due
Antenna	<a href="#">Biconical 1057</a>	Eaton	94455-1	1057	10/16/20	10/16/2023
Antenna, NSA	<a href="#">Log-Periodic 1243</a>	Eaton	96005	1243	5/4/21	5/3/2024
Antenna	<a href="#">Double-Ridged Horn/ETS Horn 1</a>	ETS-Lindgren	3117	00035923	2/25/20	2/24/2023
Antenna	<a href="#">Double-Ridged Horn 18-40 GHz</a>	EMCO	3116	9011-2145	10/19/20	10/19/2023
CHAMBER	<a href="#">CHAMBER</a>	Panashield	3M	N/A	3/12/19	3/11/2022
Pre-amp	<a href="#">Pre-amp</a>	RF-LAMBDA	RLNA00M45GA	NA	2/27/19	2/26/2022
Receiver	<a href="#">EMI Test Receiver R&amp;S ESU 40</a>	Rohde & Schwarz	ESU 40	100320	8/28/18	8/27/2021

## 8. Test Results

The results of the test are usually indicated in the form of tables, spectrum analyzer plots, charts, sample calculations, as appropriate for each test procedure.

A description and/or a block diagram of the test setup is usually provided.


The measurement results, along with the appropriate limits for comparison, may be presented in tabular or graphical form. In addition, any variation in the measurement environment may be reported if applicable (e.g., a significant change of temperature that could affect the cable loss and amplifier response).

### Units of measurement

Unless noted otherwise in the referenced standard, the measurements of ac power-line conducted emissions and conducted power output will be reported in units of dB $\mu$ V. Unless noted otherwise in the referenced standard, the measurements of radiated emissions will be reported in units of decibels, referenced to one microvolt per meter (dB $\mu$ V/m) for electric fields, or to one ampere per meter (dBA/m) for magnetic fields, at the distance specified in the appropriate standards or requirements. The measurements of antenna-conducted power for receivers may be reported in units of dB $\mu$ V if the impedance of the measuring instrument is also reported. Otherwise, antenna-conducted power will be reported in units of decibels referenced to one milliwatt (dBm). All formulas for data conversions and conversion factors, if used, will be included in this measurement report.

## 8.1 RF POWER OUTPUT

Limits from 2.1046(a), 74.861(e) (1) (ii) 74.461(b) and test procedure from ANSI C63.26.

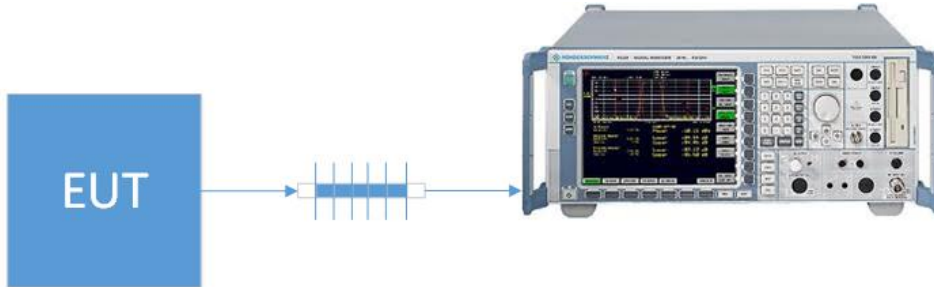


### 8.1.1 Test Data: RF Power Output Measurement Table

Tuned Frequency (MHz)	Power Output (dBm)	Level (mW)	Limit (mW) EIRP
174	14.74	29.79	50
200	15.00	31.62	50
215	14.96	31.33	50

Tuned Frequency (MHz)	Power Output (dBm)	Level (mW)	Limit (mW)
450.5	29.63	918.3	1000
455.5	29.49	889.2	1000
470	23.9	245.47	250
555	23.9	245.47	250
608	23.74	236.2	250
654	11.34	13.61	20
657	11.38	13.74	20
942	28.83	763.84	1000
951	29.10	812.83	1000
956	29.63	918.33	1000
959	29.66	924.70	1000

## 8.2 OCCUPIED BANDWIDTH


### 8.2.1 Bandwidth Plot, 99%, 174 MHz

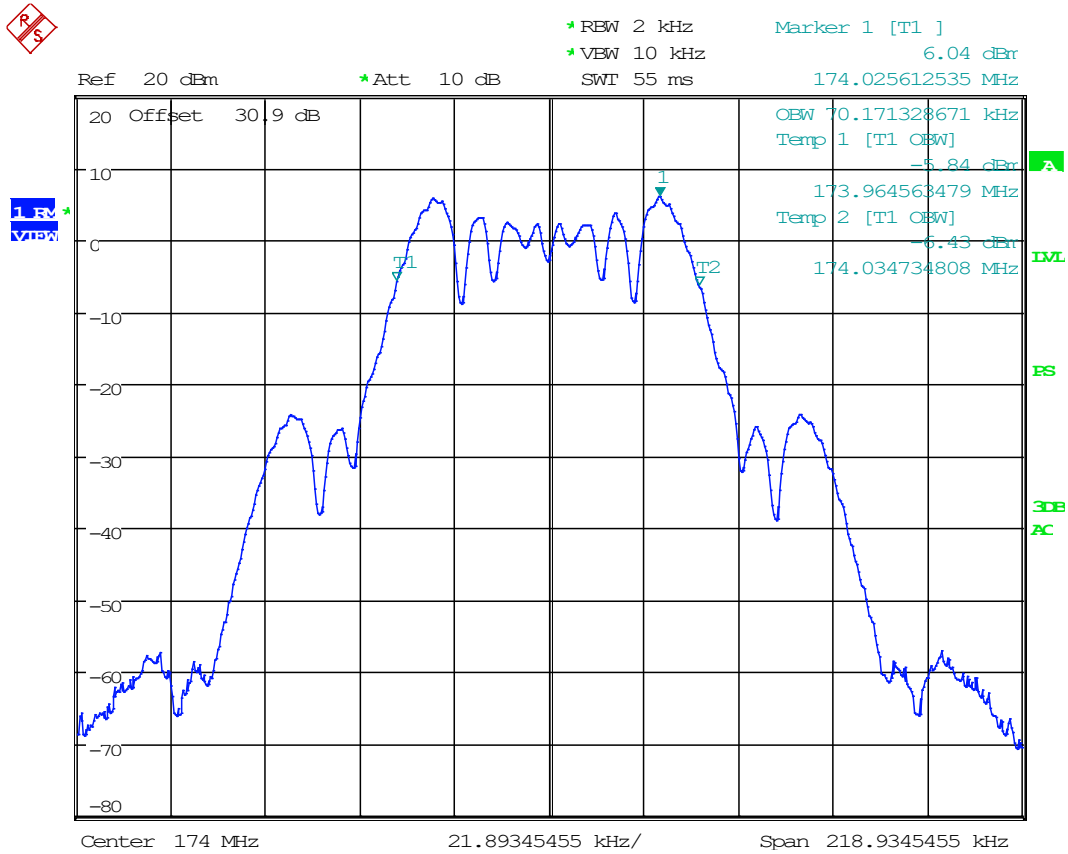

Date: 16.FEB.2003 02:47:24




### 8.2.3 Bandwidth Plot, 99%, 215 MHz

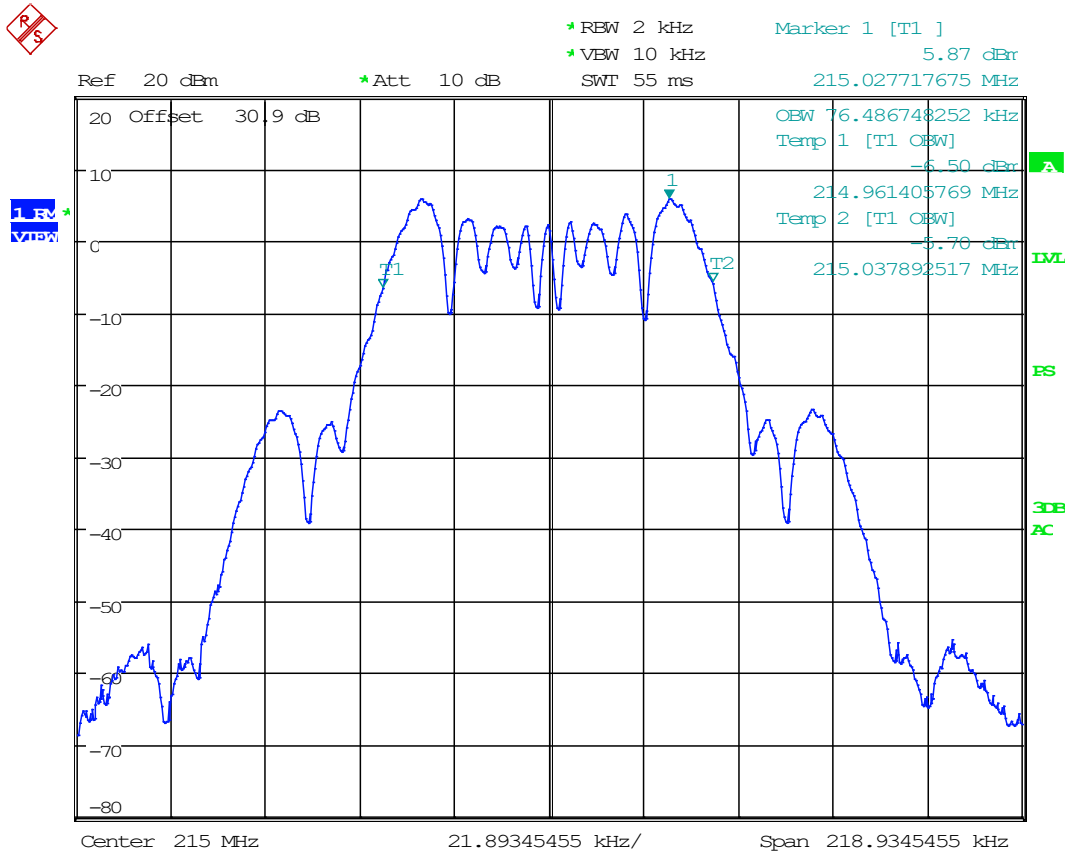

Date: 16.FEB.2003 02:51:39




### 8.2.4 Bandwidth Plot, 99%, 450.5 MHz

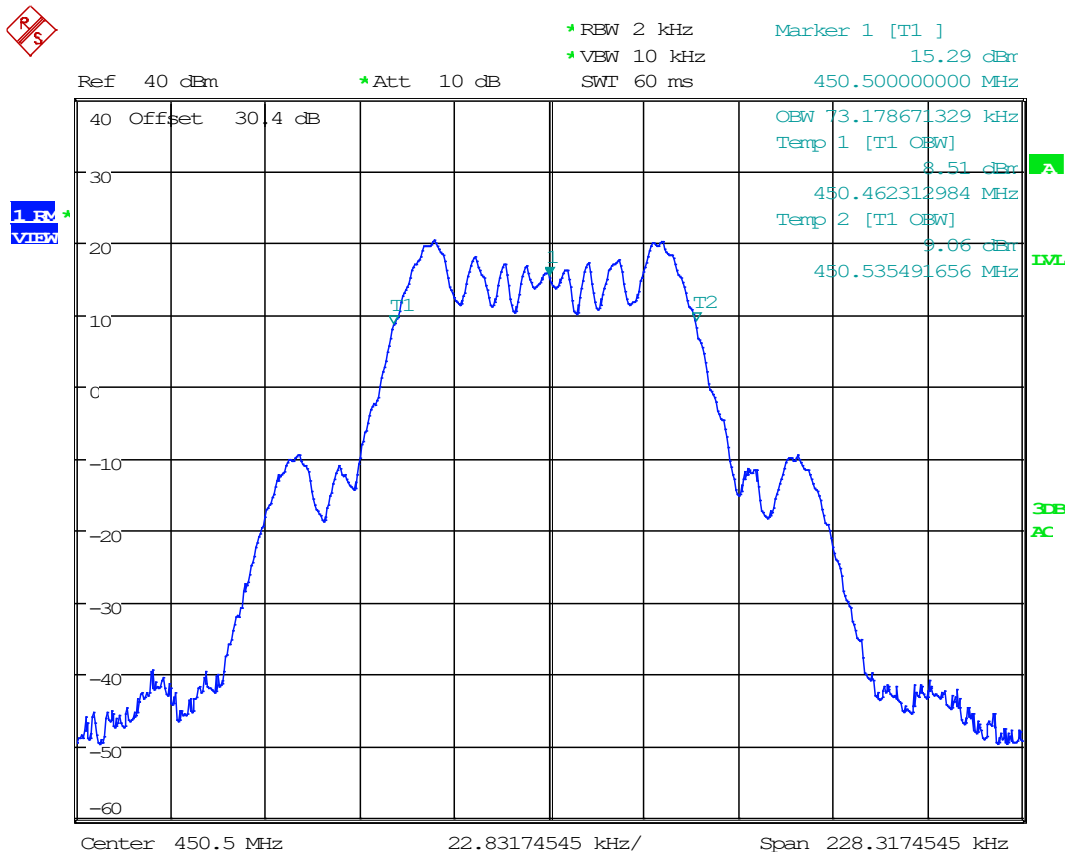

Date: 8.JUL.2021 09:13:01




### 8.2.6 Bandwidth Plot, 99%, 470 MHz

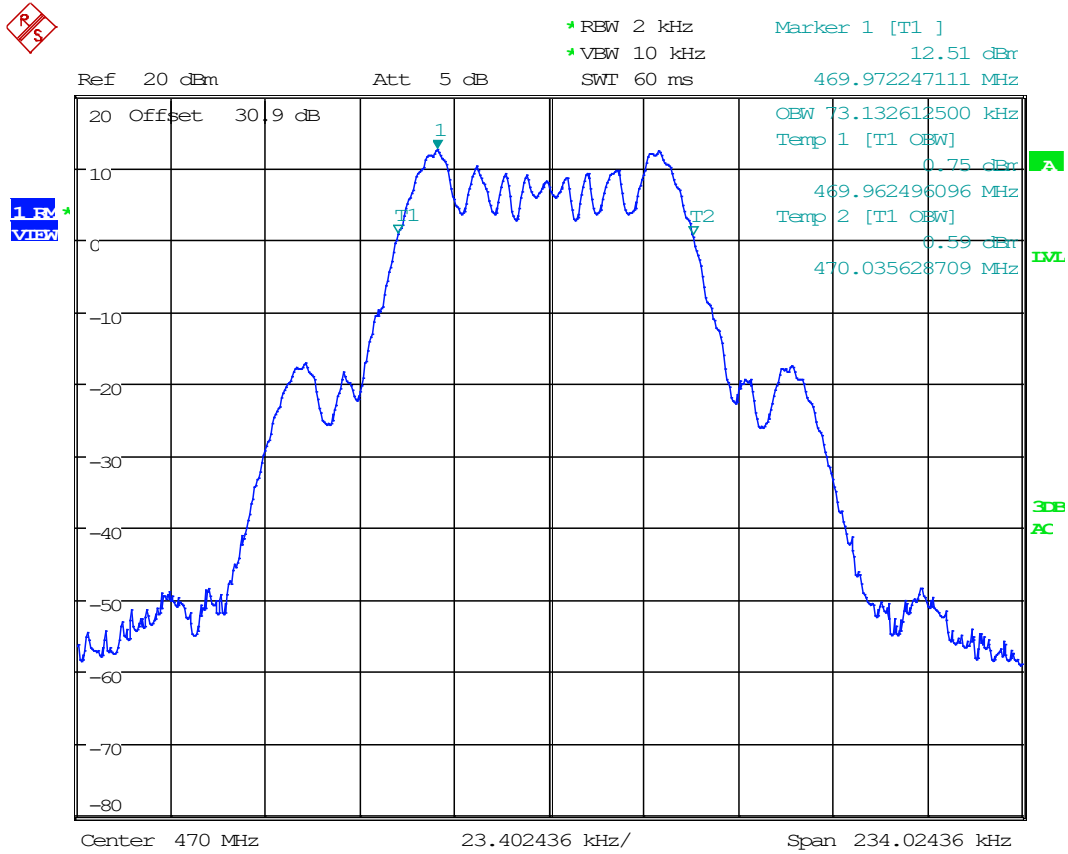

Date: 6.JUL.2021 10:53:45

### 8.2.7 Bandwidth Plot, 99%, 555 MHz

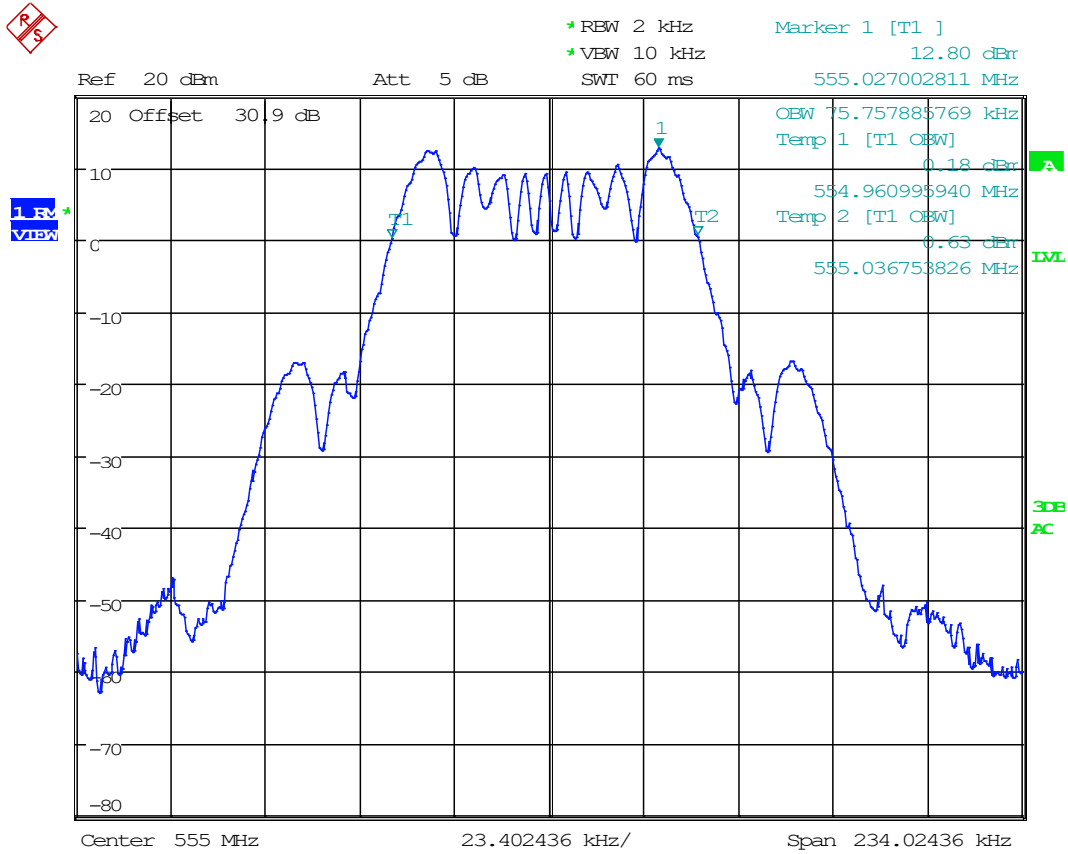


Date: 6.JUL.2021 10:59:56





### 8.2.10 Bandwidth Plot, 99%, 657 MHz

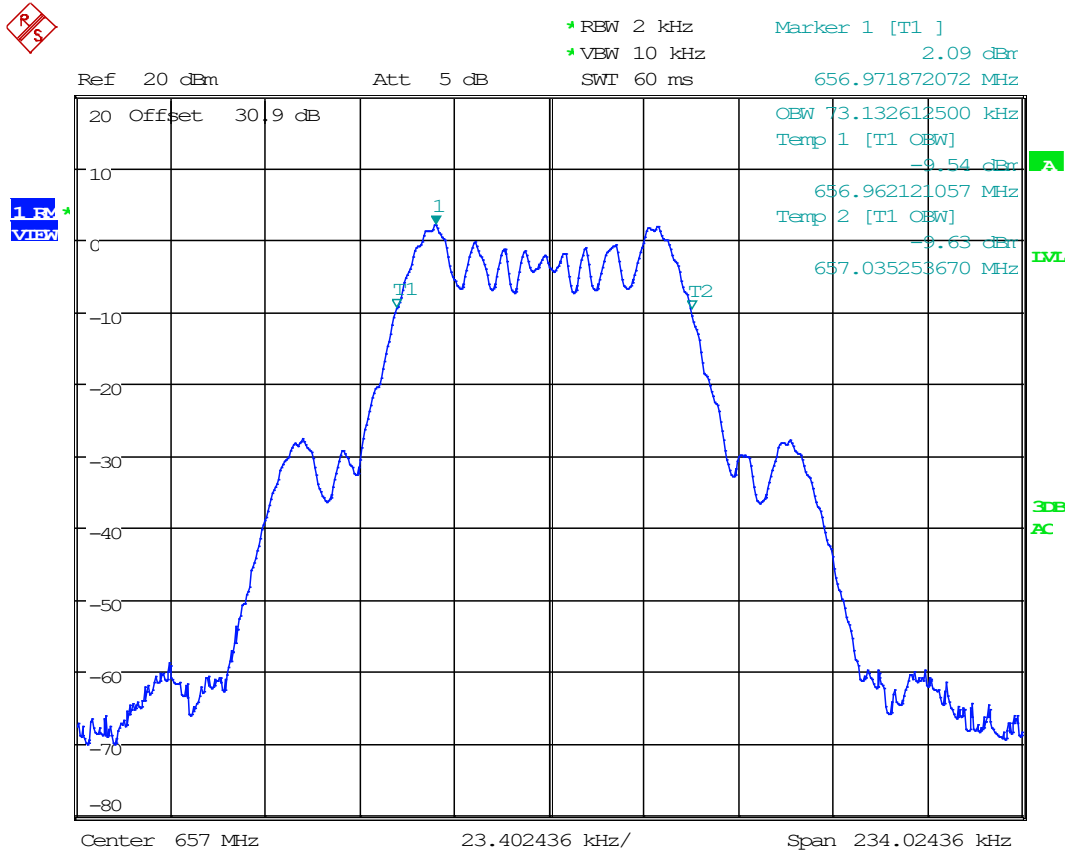


Date: 6.JUL.2021 11:09:27






### 8.2.12 Bandwidth Plot, 99%, 951 MHz

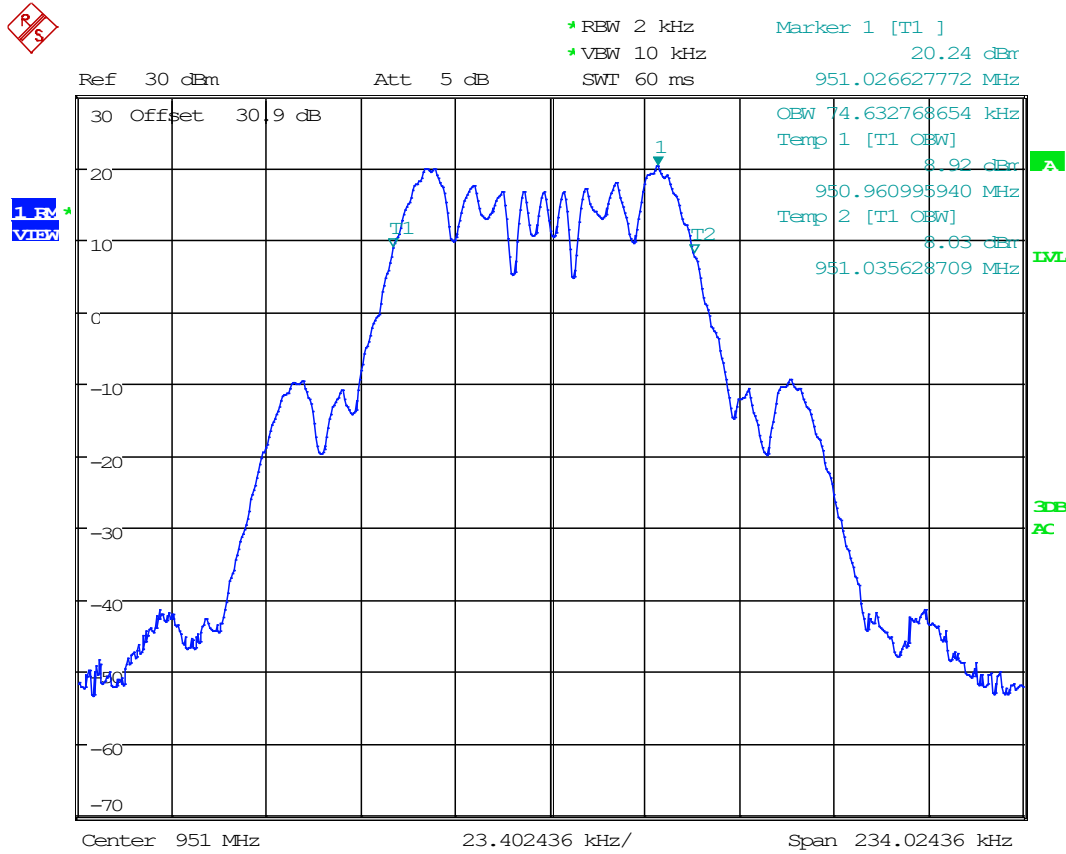


Date: 6.JUL.2021 11:18:09

### 8.2.13 Bandwidth Plot, 99%, 956 MHz

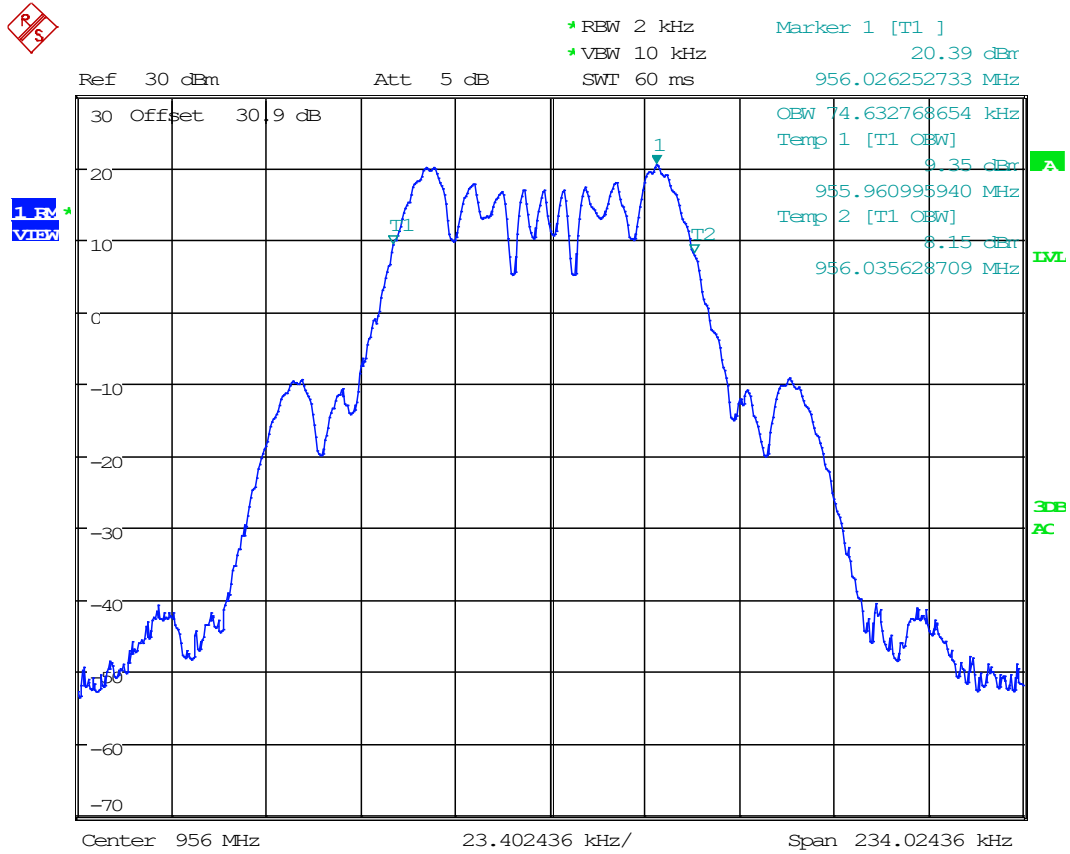


Date: 6.JUL.2021 11:19:41

### 8.2.14 Bandwidth Plot, 99%, 959 MHz

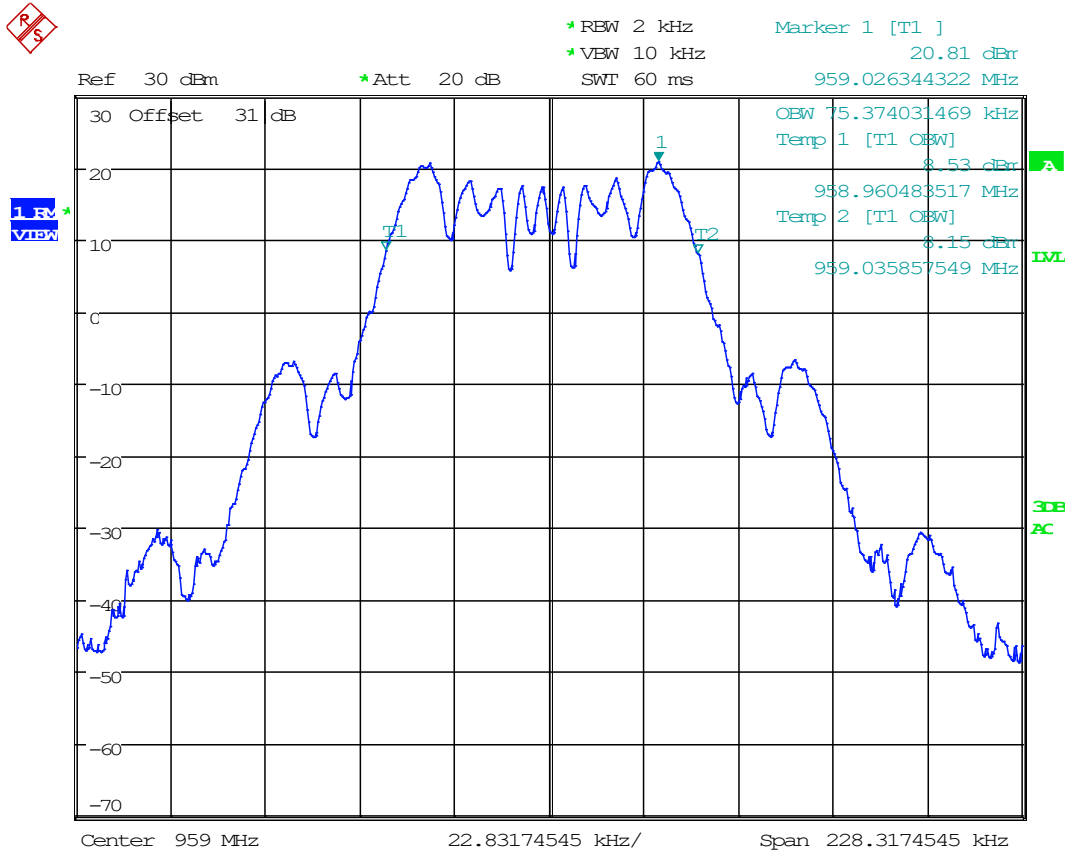


Date: 8.JUL.2021 18:18:43

### 8.2.15 Test Data: Emission Mask Measurement Plot, 174 MHz,

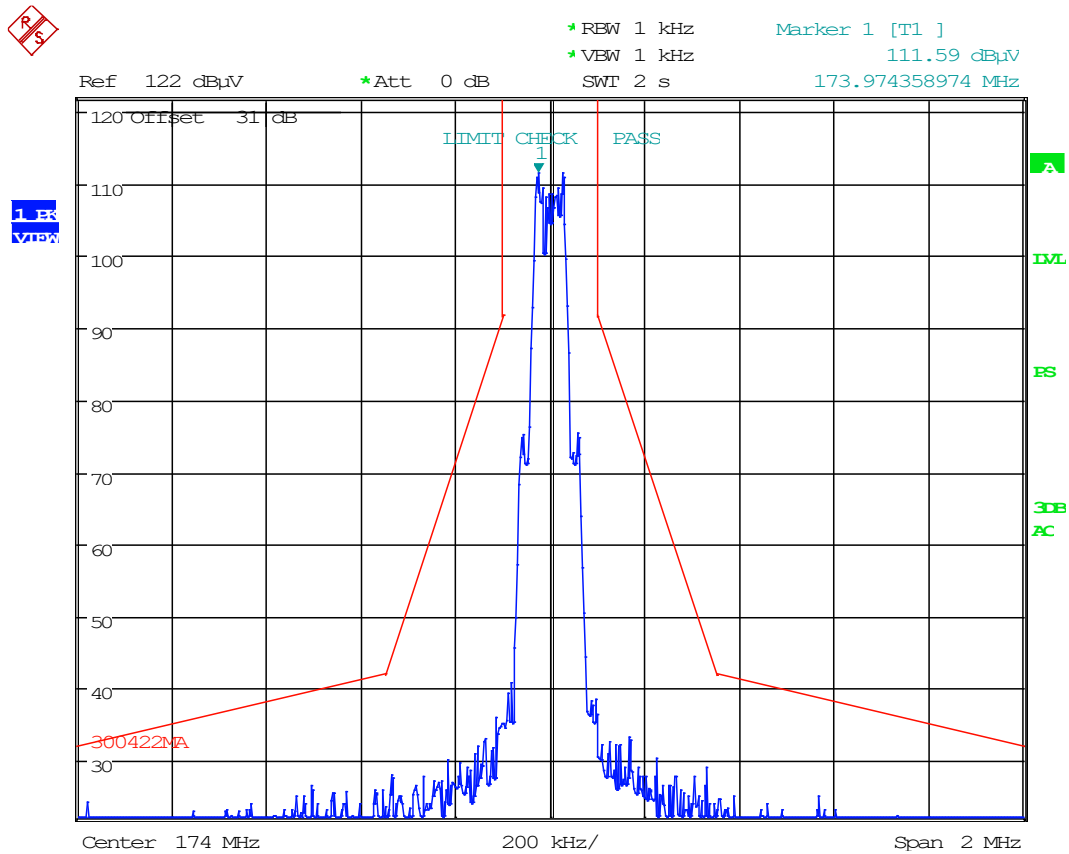


Date: 8.JUL.2021 17:15:37

8.2.16 Test Data: Emission Mask Measurement Plot, 200 MHz,

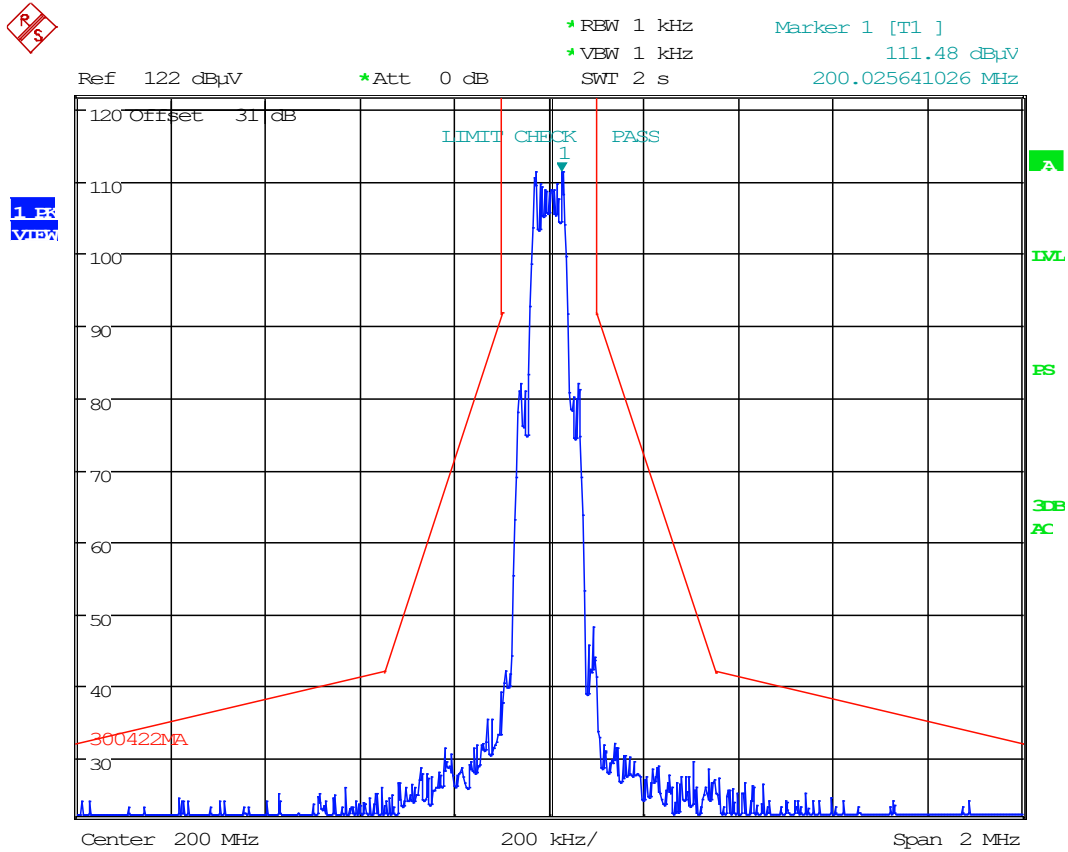


Date: 8.JUL.2021 17:17:03

### 8.2.17 Test Data: Emission Mask Measurement Plot, 215 MHz,

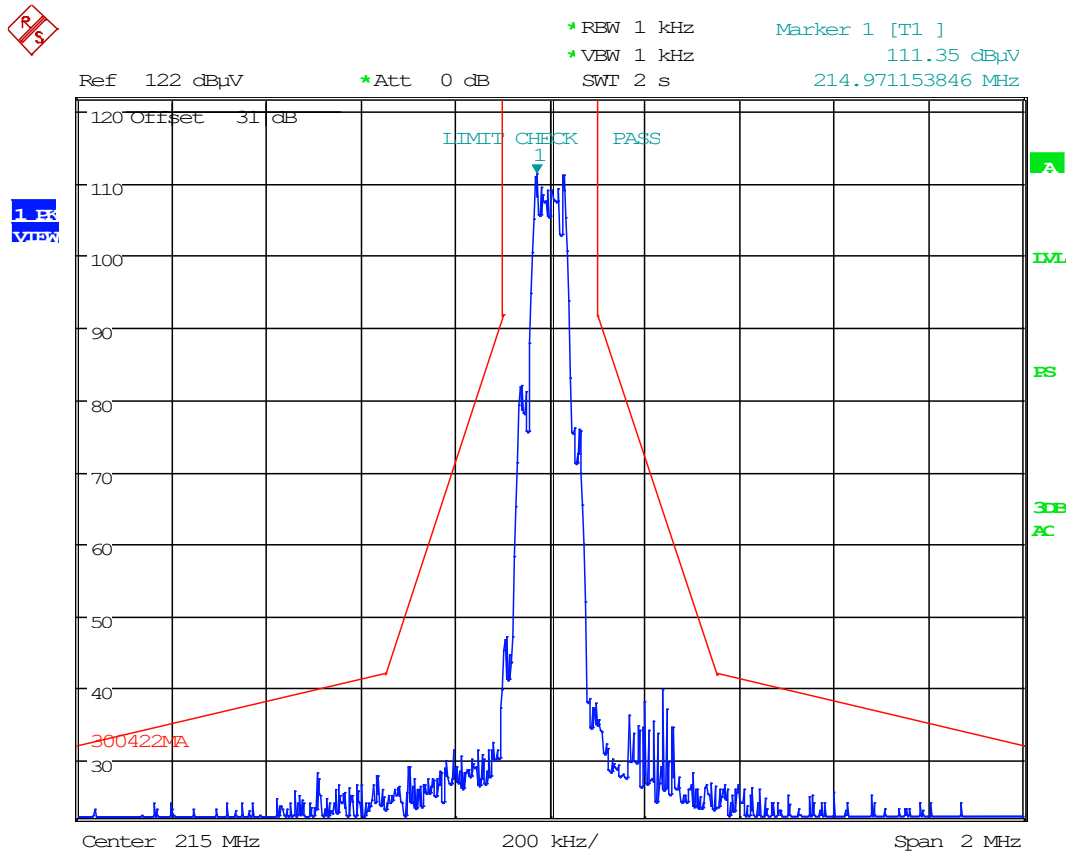


Date: 8.JUL.2021 17:17:54

### 8.2.18 Test Data: Emission Mask Measurement Plot, 450.5 MHz,

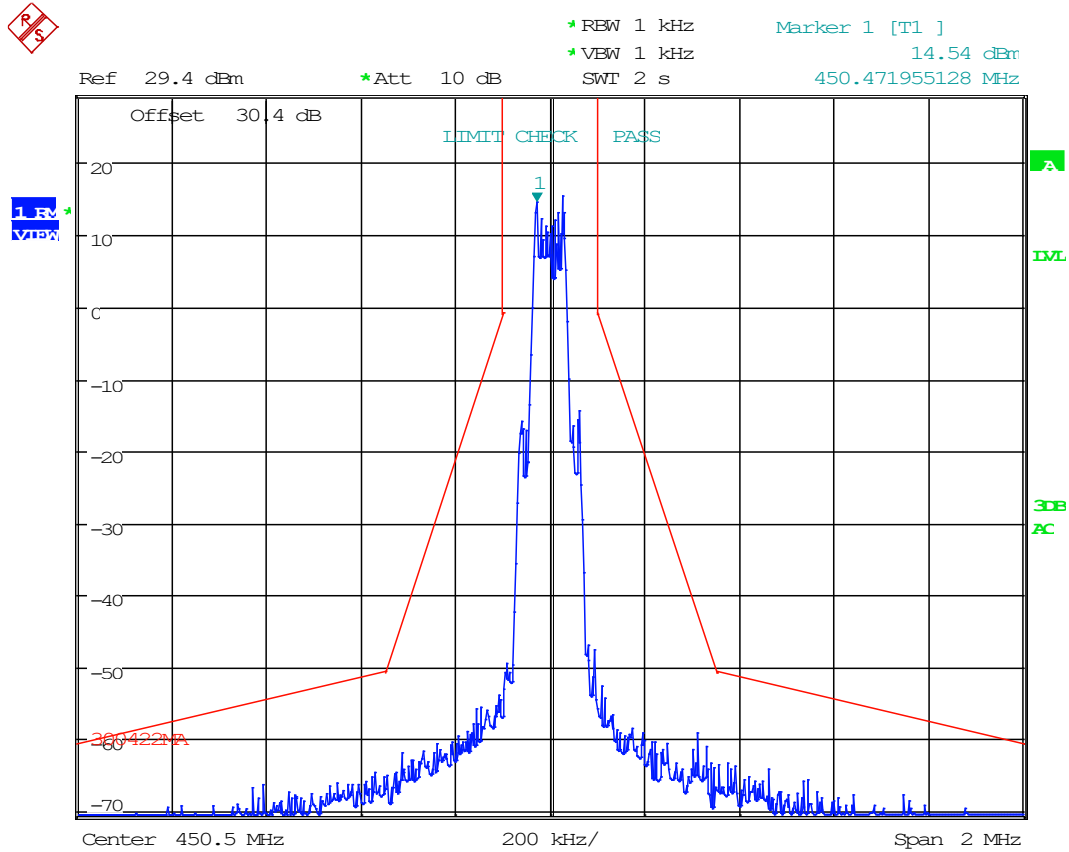

Date: 8.JUL.2021 09:20:47


8.2.19 Test Data: Emission Mask Measurement Plot, 455.5 MHz,

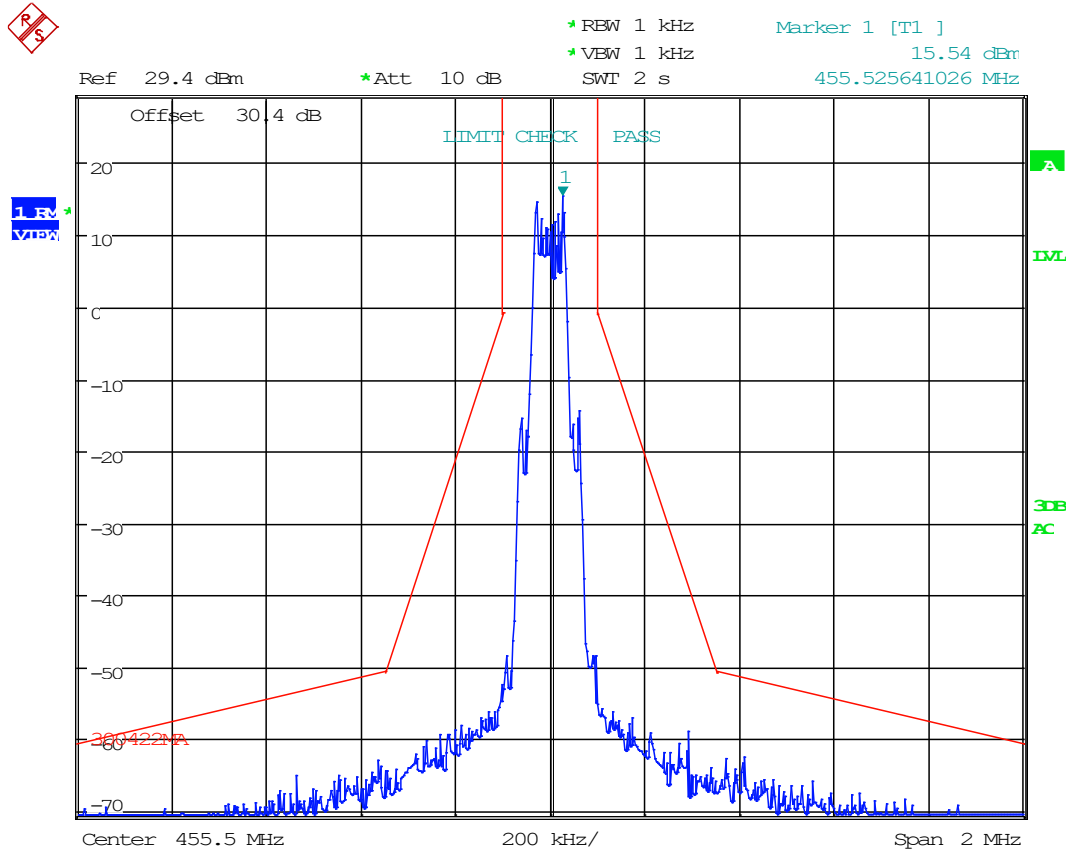

Date: 8.JUL.2021 09:21:33




### 8.2.20 Test Data: Emission Mask Measurement Plot, 470 MHz,

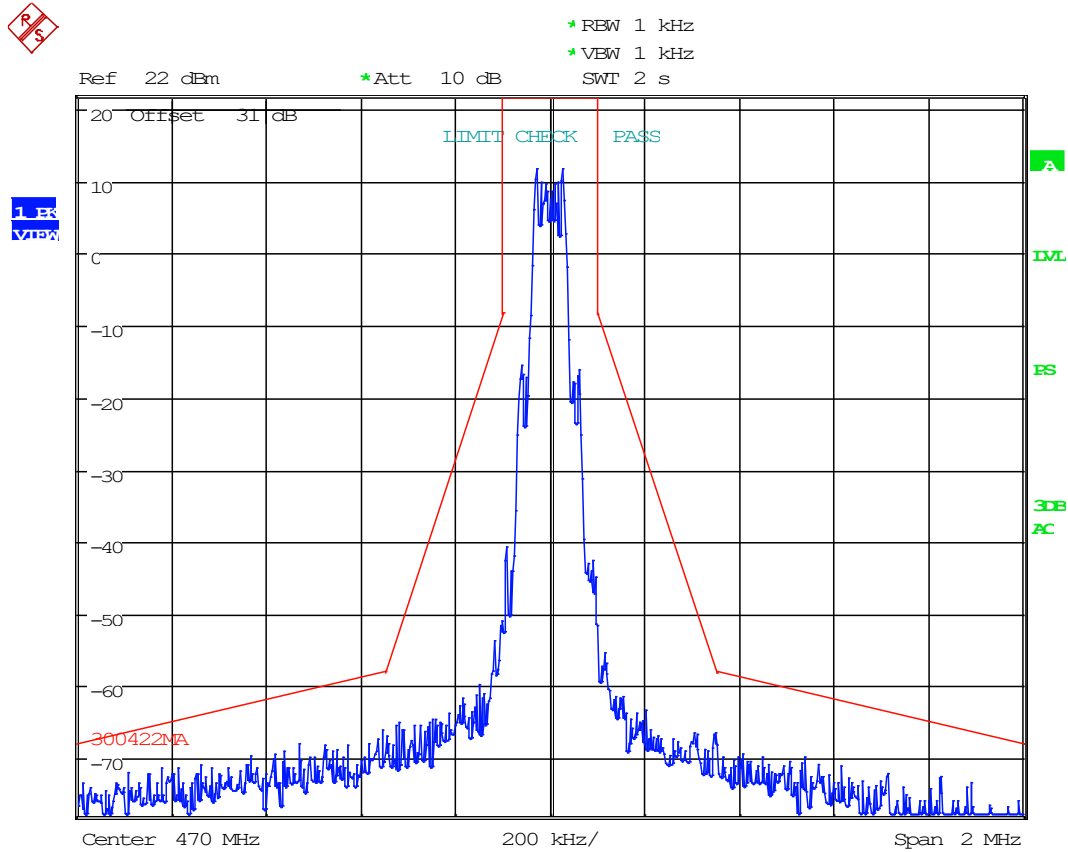


Date: 17.FEB.2003 02:13:55

### 8.2.21 Test Data: Emission Mask Measurement Plot, 555 MHz,

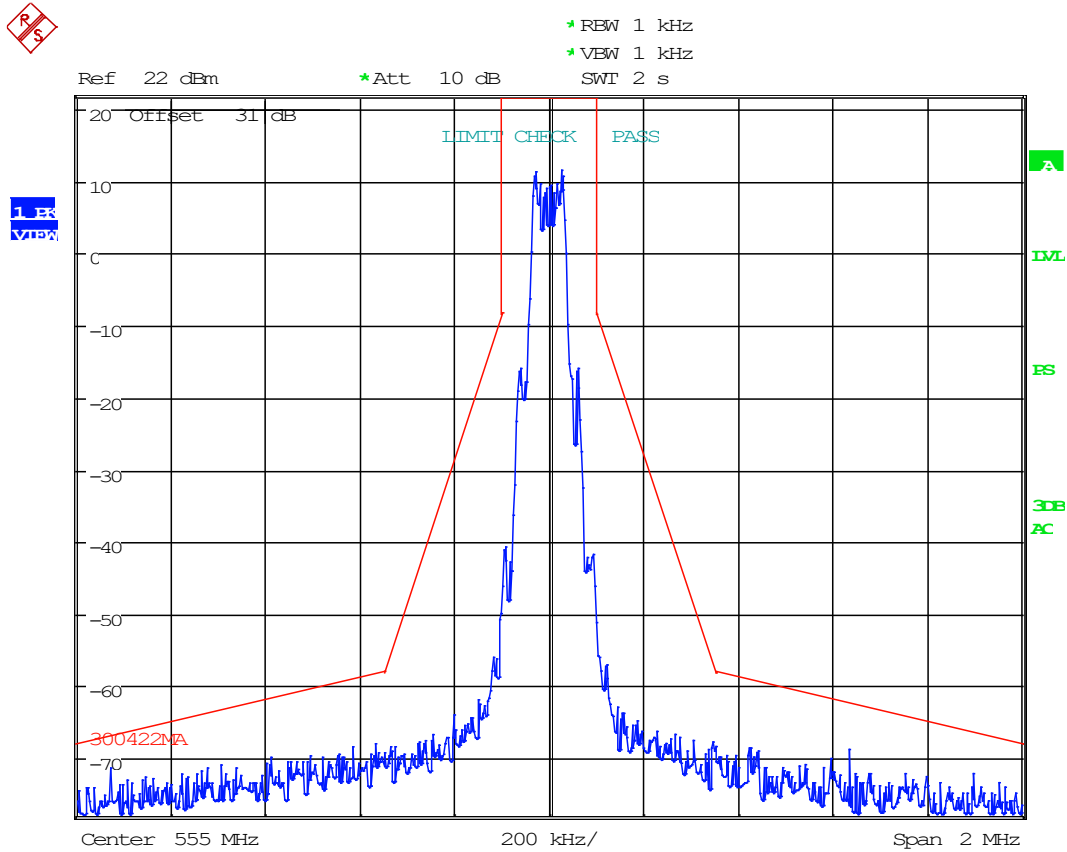


Date: 17.FEB.2003 02:16:08

### 8.2.22 Test Data: Emission Mask Measurement Plot, 608 MHz,

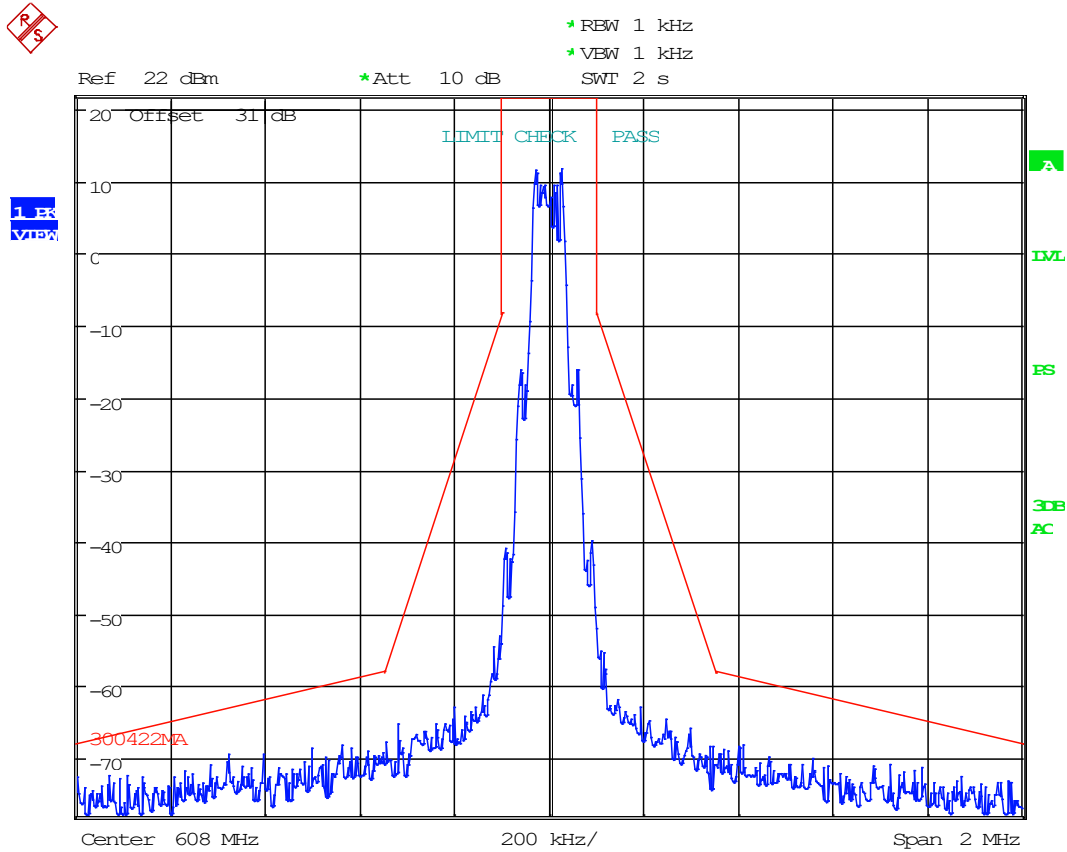


Date: 17.FEB.2003 02:17:18

8.2.23 Test Data: Emission Mask Measurement Plot, 654 MHz,

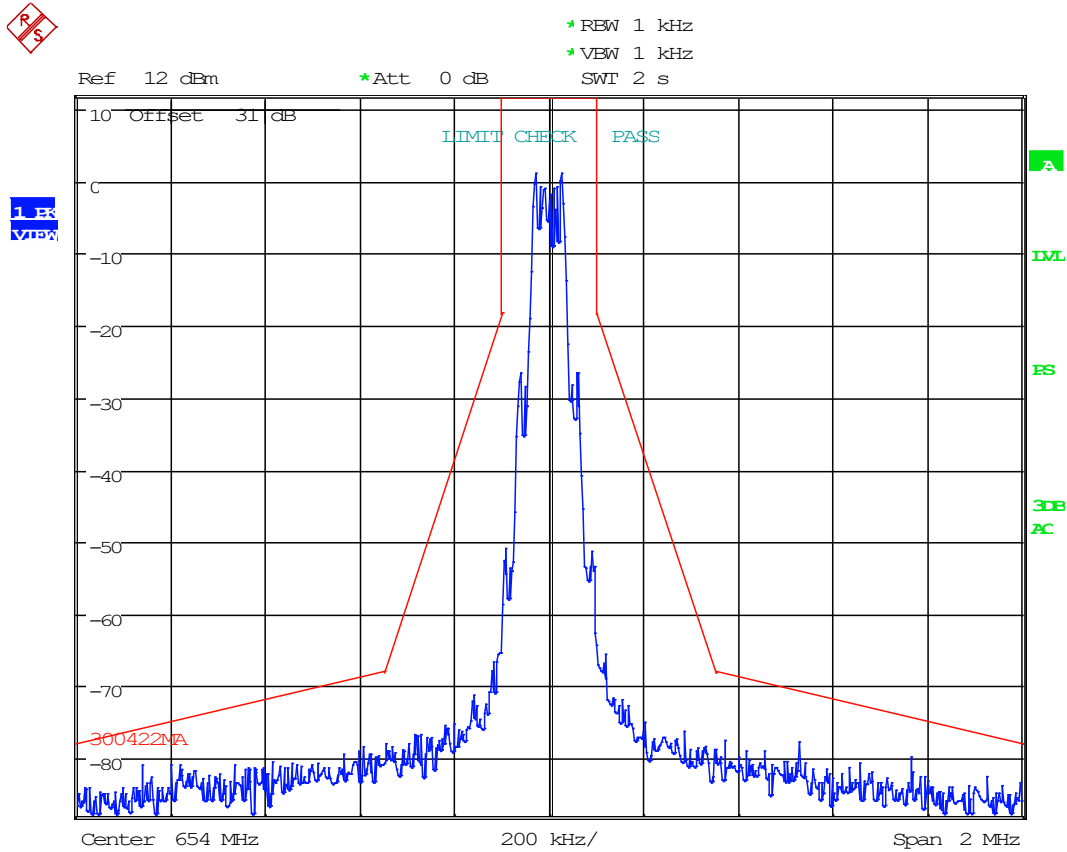


Date: 17.FEB.2003 02:23:15

### 8.2.24 Test Data: Emission Mask Measurement Plot, 657 MHz,

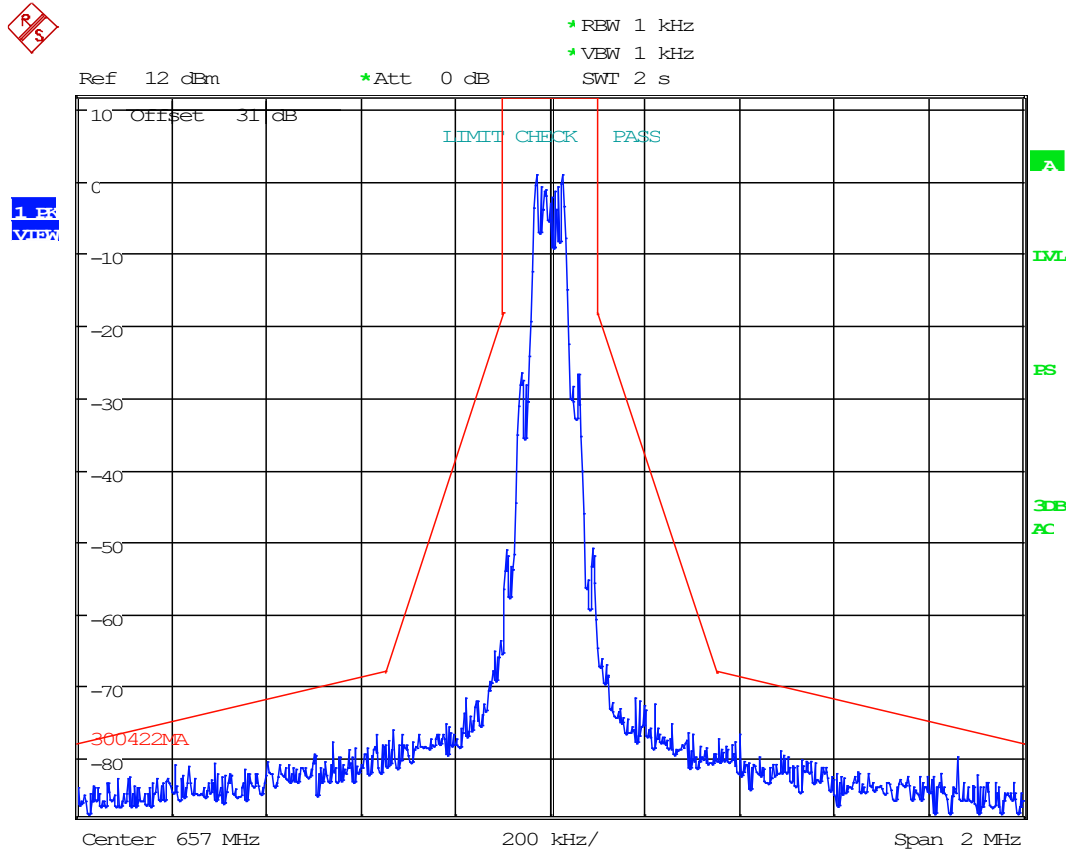

Date: 17.FEB.2003 02:24:37


### 8.2.25 Test Data: Emission Mask Measurement Plot, 942 MHz,

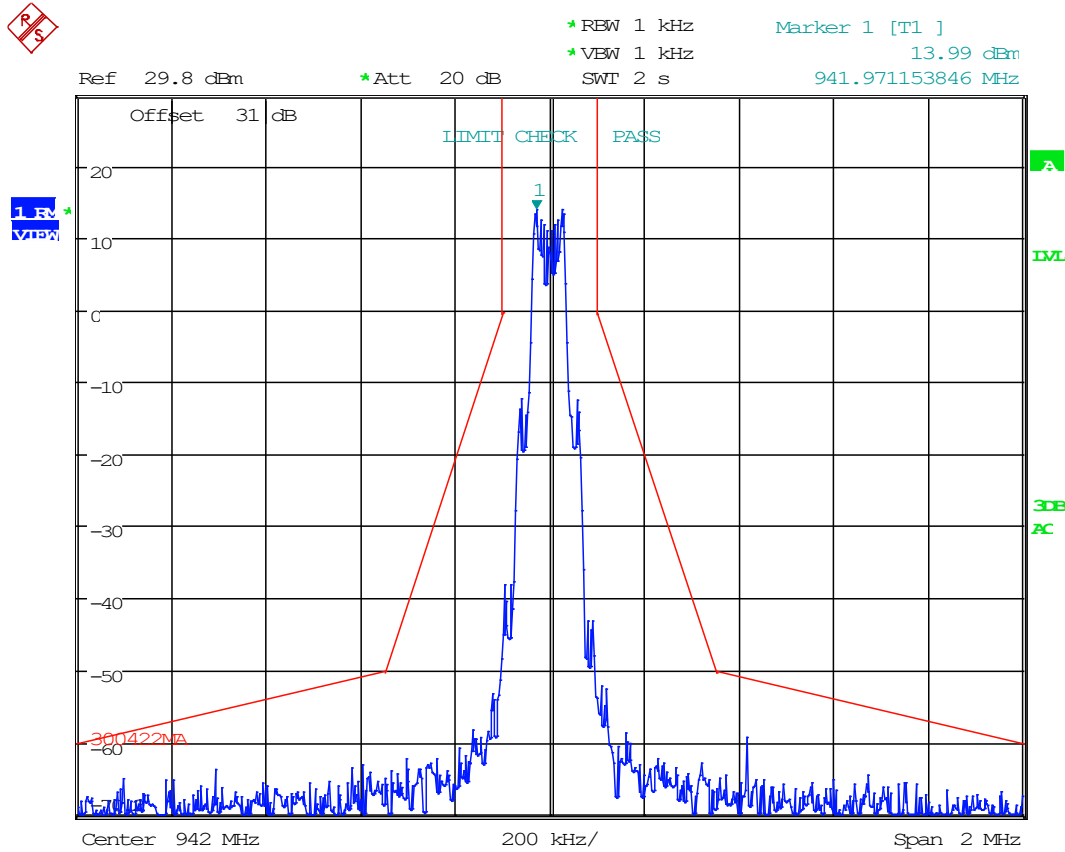

Date: 8.JUL.2021 18:24:44




### 8.2.27 Test Data: Emission Mask Measurement Plot, 956 MHz,

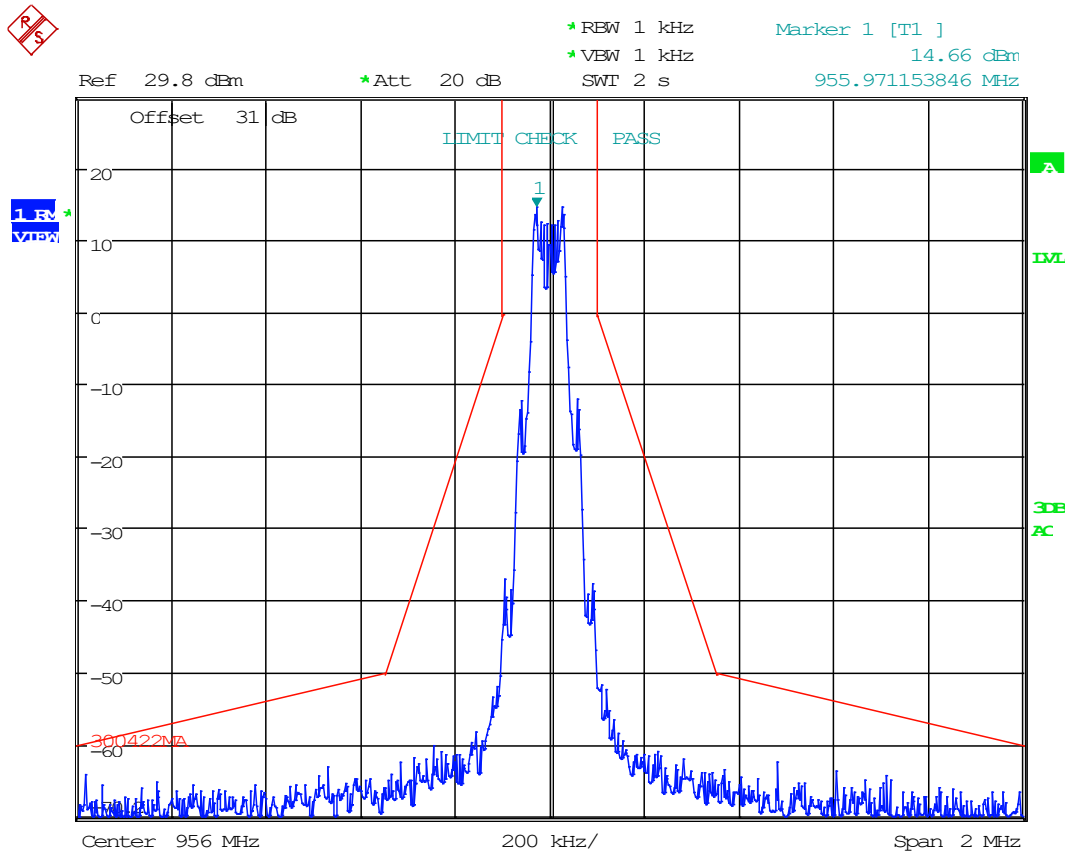

Date: 8.JUL.2021 18:26:09




8.2.28 Test Data: Emission Mask Measurement Plot, 959 MHz,

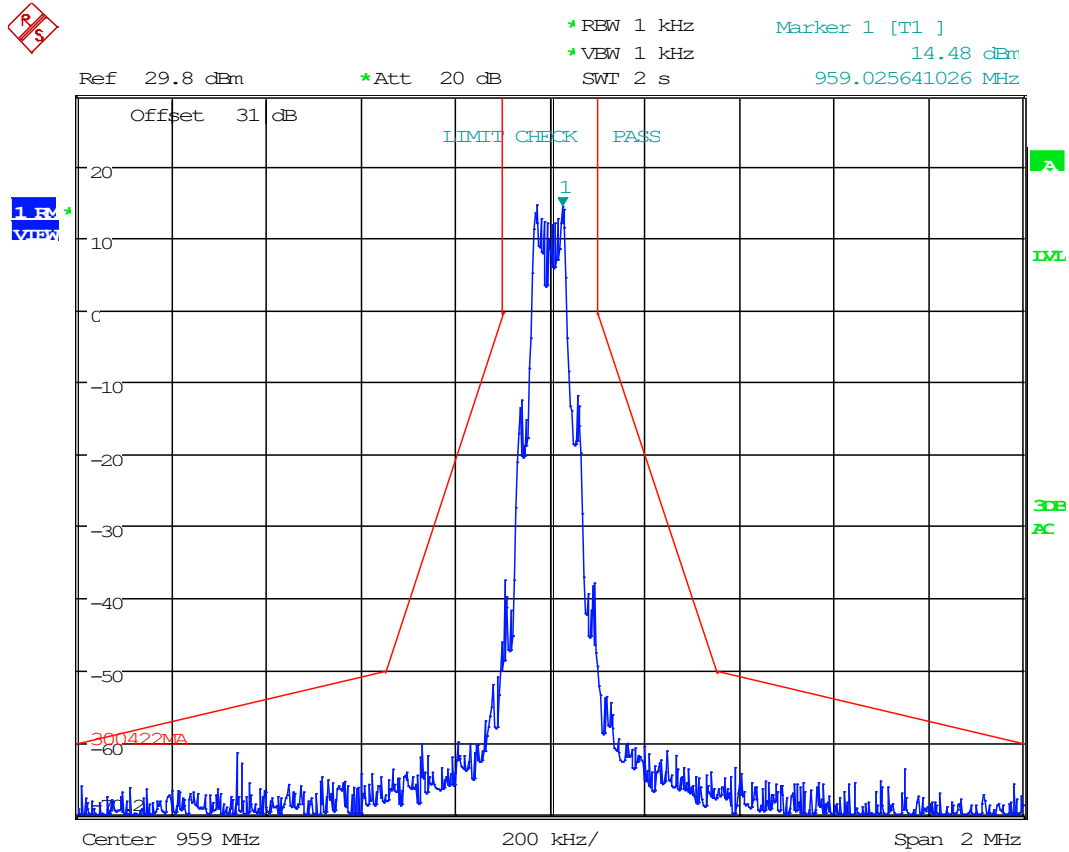


Date: 8.JUL.2021 18:22:47

### 8.3 Spurious Emissions ant antenna terminals (Conducted)

Limits from 2.1046(a), 74.861(e)(6)(iii) and test procedure from ANSI C63.26.

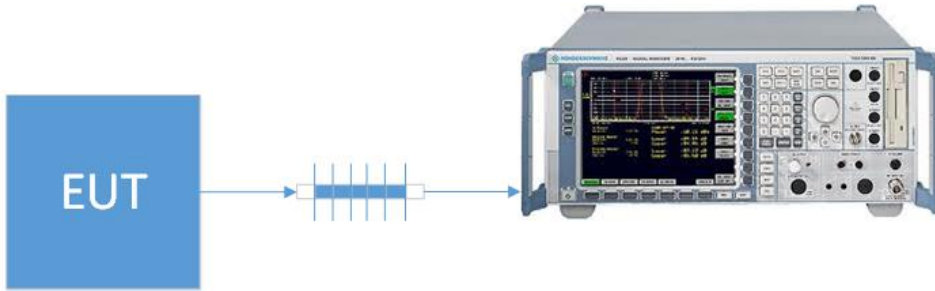


### 8.3.1 Test Data: Spurious Emissions at antenna terminals (Conducted) 174 MHz, Below 1G,

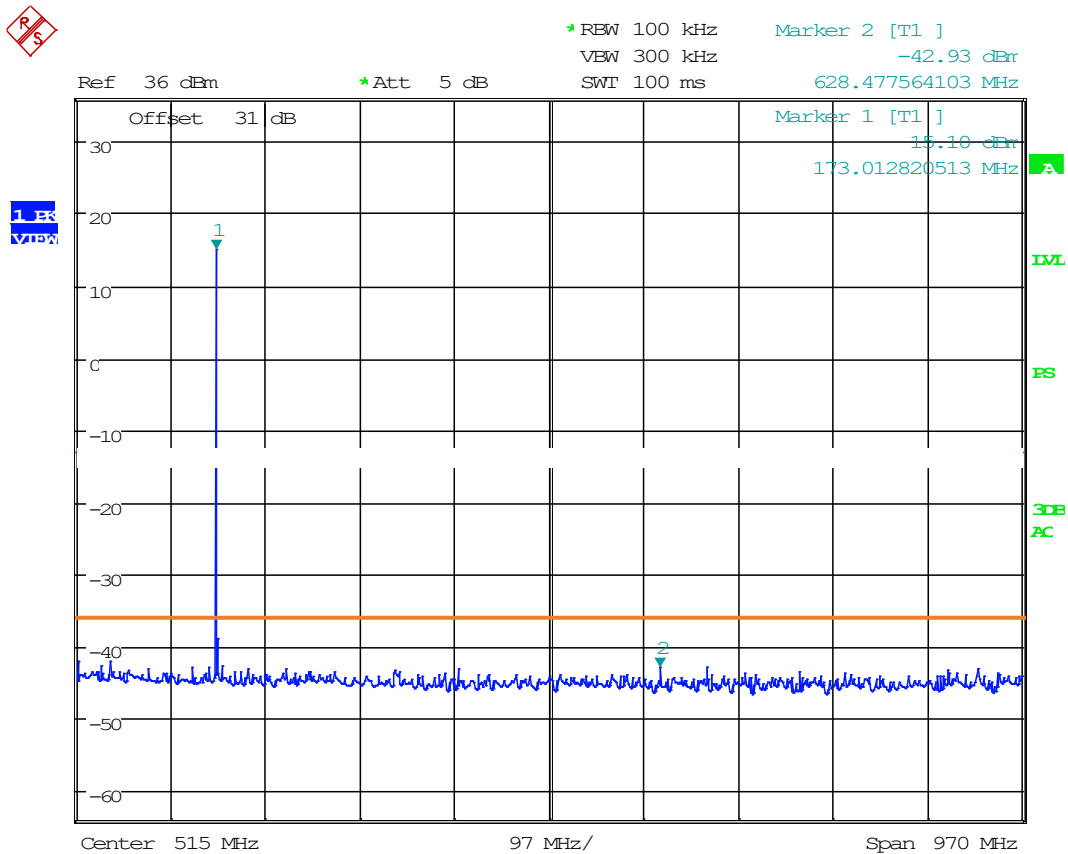


Date: 17.FEB.2003 01:13:47

### 8.3.2 Test Data: Spurious Emissions at antenna terminals (Conducted) 174 MHz, Above 1G,

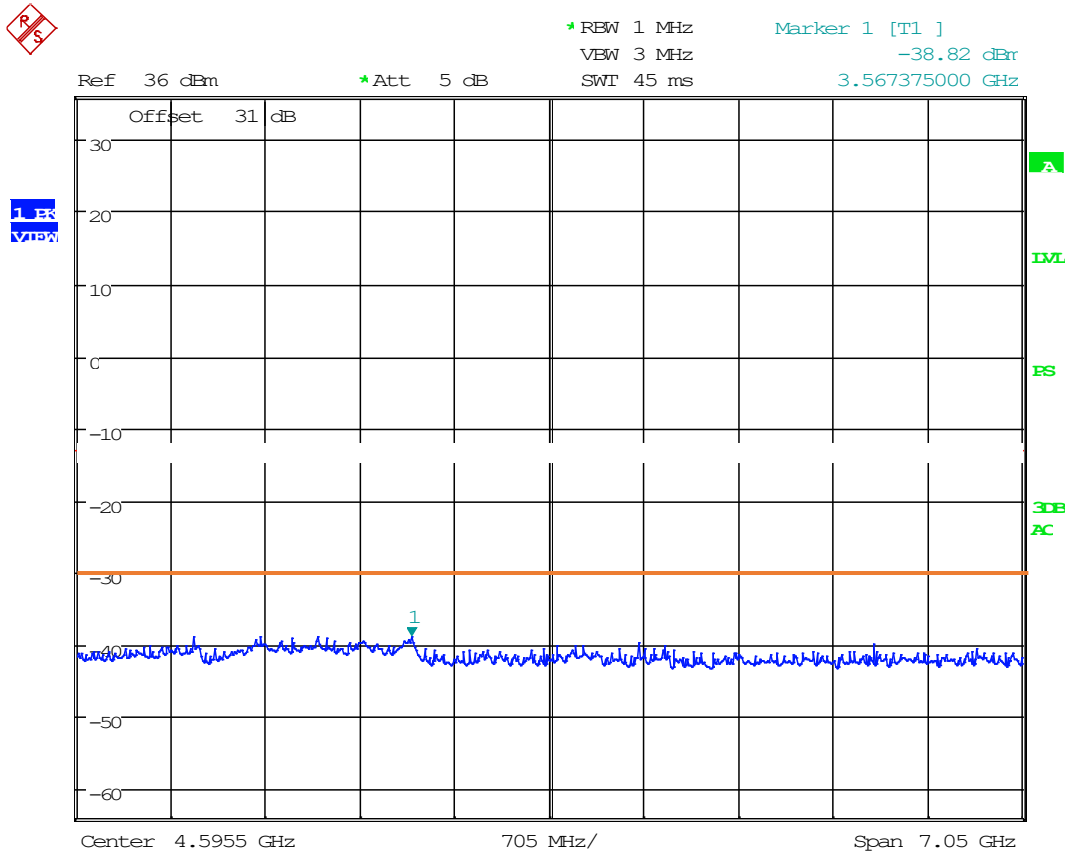


Date: 17.FEB.2003 01:59:29

### 8.3.3 Test Data: Spurious Emissions at antenna terminals (Conducted) 200 MHz, Below 1G,

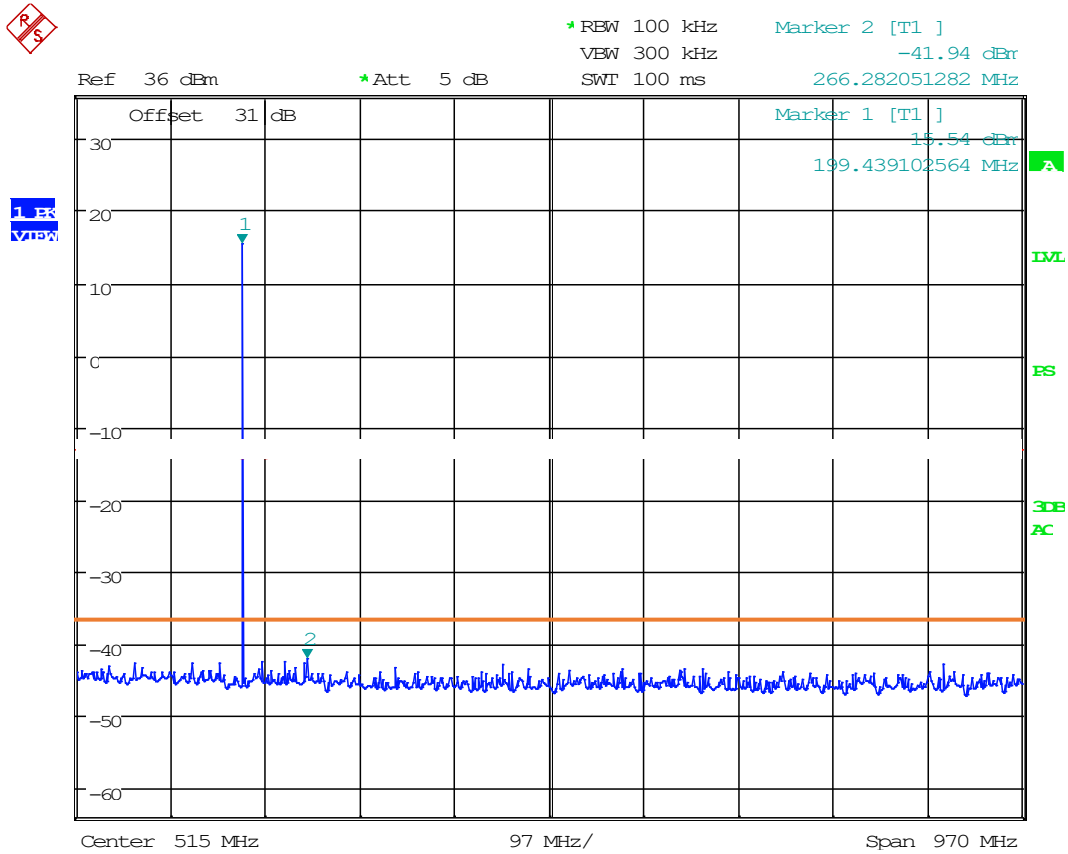


Date: 17.FEB.2003 01:15:20

### 8.3.4 Test Data: Spurious Emissions at antenna terminals (Conducted) 200 MHz, Above 1G,

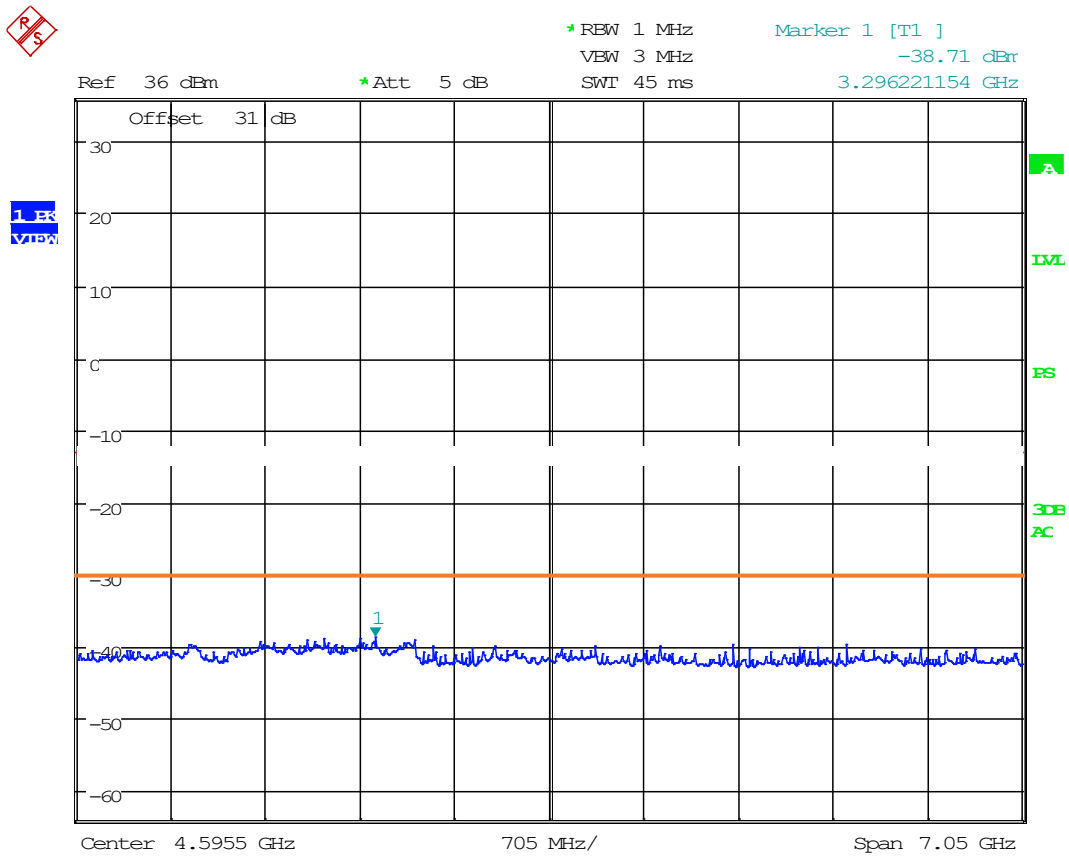


Date: 17.FEB.2003 01:58:45

### 8.3.5 Test Data: Spurious Emissions at antenna terminals (Conducted) 215 MHz, Below 1G,

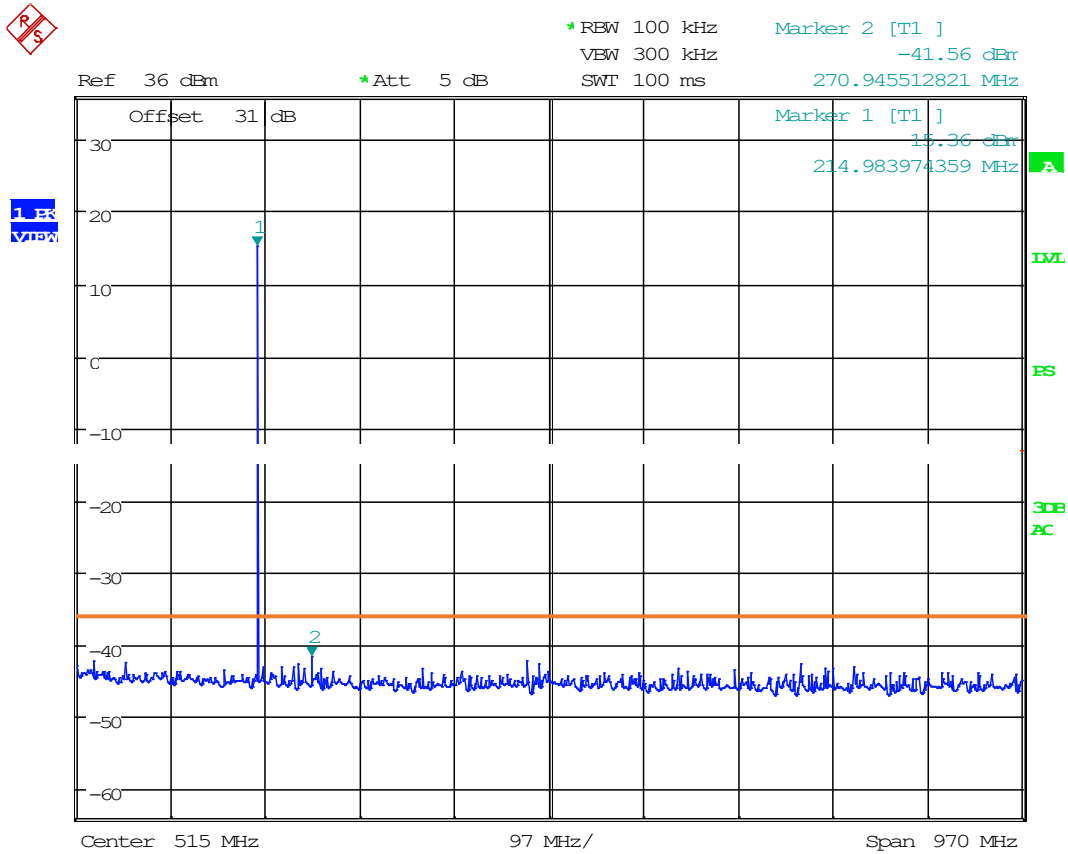

Date: 17.FEB.2003 01:16:25


### 8.3.6 Test Data: Spurious Emissions at antenna terminals (Conducted) 215 MHz, Above 1G,

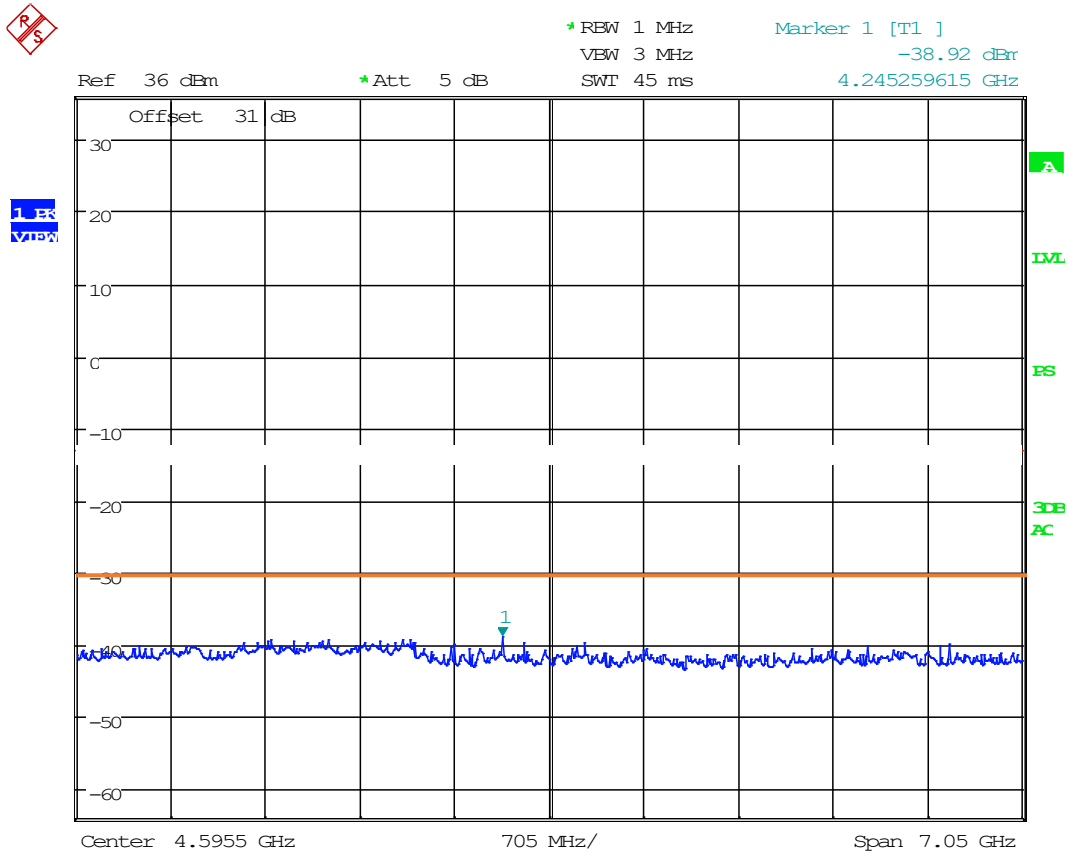

Date: 17.FEB.2003 01:57:52




### 8.3.7 Test Data: Spurious Emissions at antenna terminals (Conducted) 450.5 MHz, Below 1G,

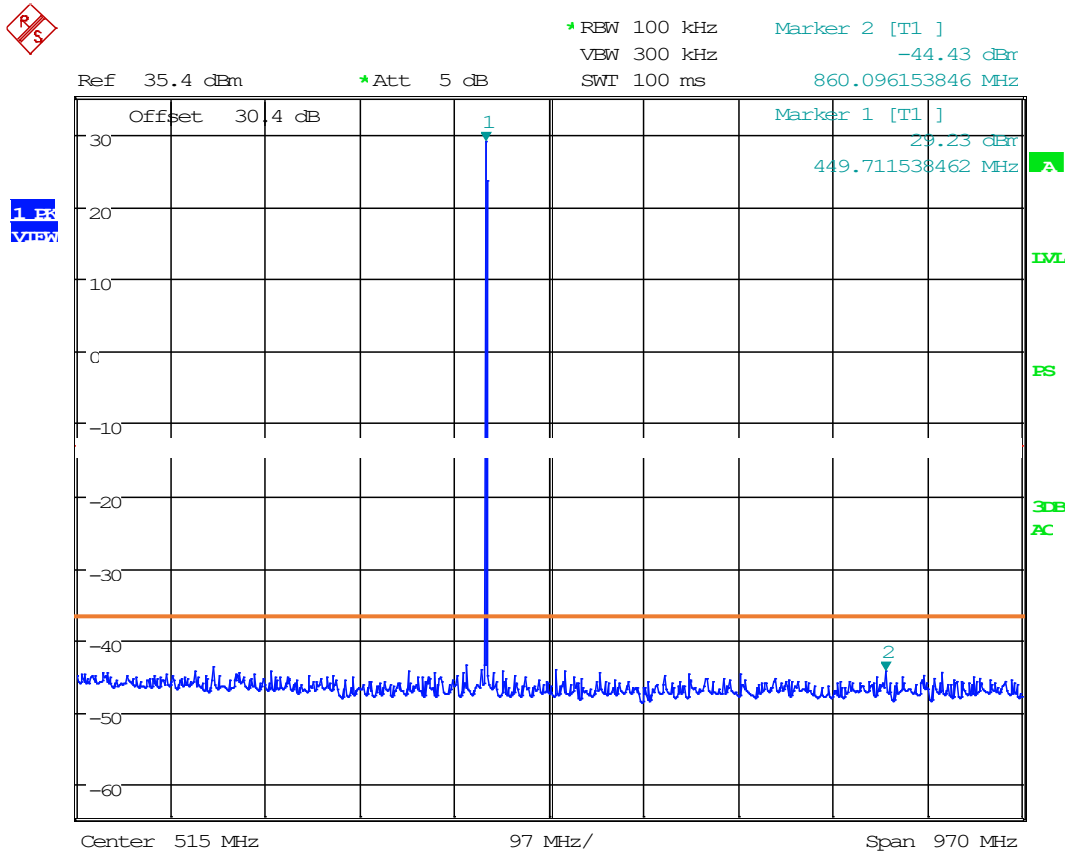


Date: 8.JUL.2021 09:25:39

### 8.3.8 Test Data: Spurious Emissions at antenna terminals (Conducted) 450.5 MHz, Above 1G,

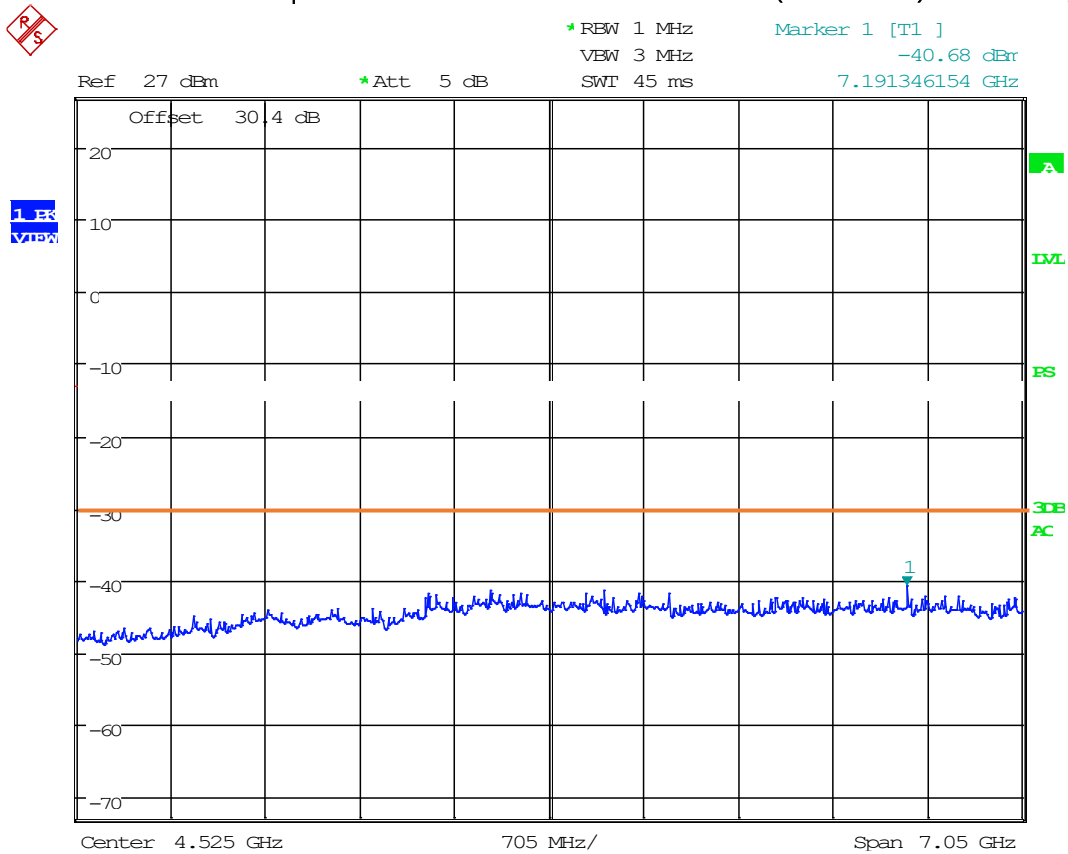


Date: 8.JUL.2021 09:26:32

### 8.3.9 Test Data: Spurious Emissions at antenna terminals (Conducted) 455.5 MHz, Below 1G,

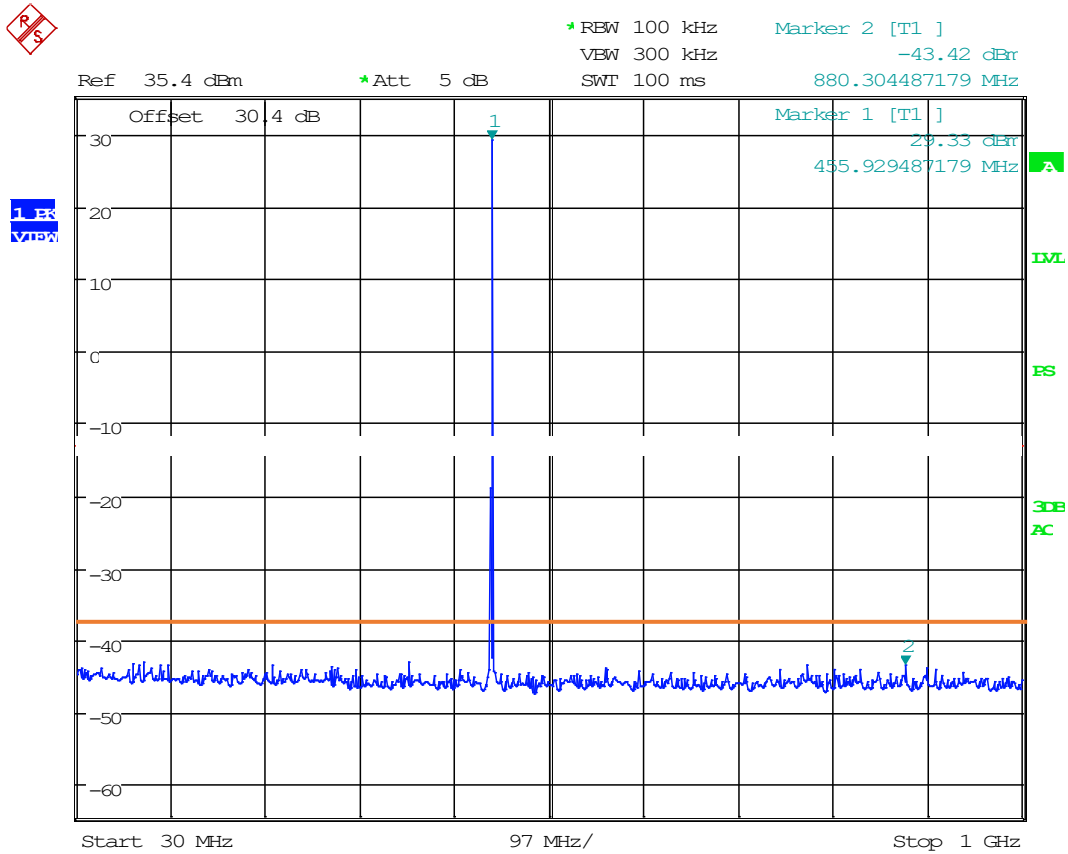

Date: 8.JUL.2021 09:24:39


### 8.3.10 Test Data: Spurious Emissions at antenna terminals (Conducted) 455.5 MHz, Above 1G,

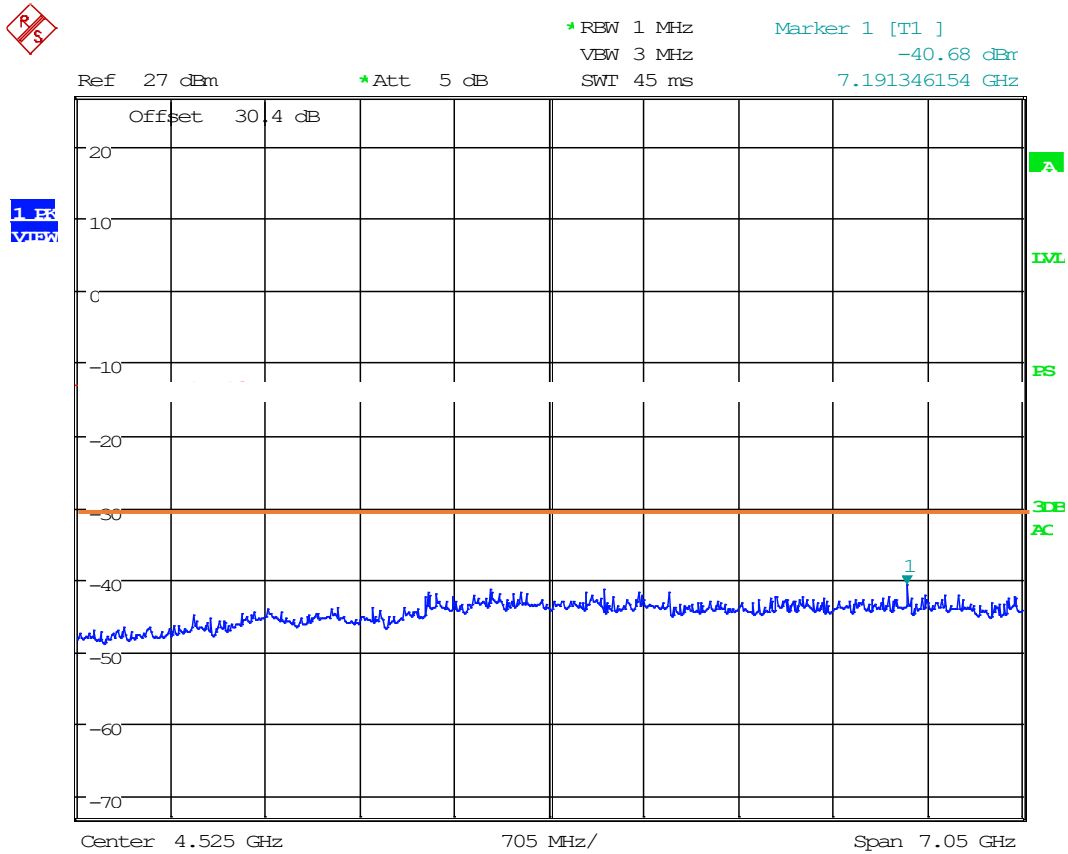

Date: 8.JUL.2021 09:26:32




### 8.3.12 Test Data: Spurious Emissions at antenna terminals (Conducted) 470 MHz, Above 1G,

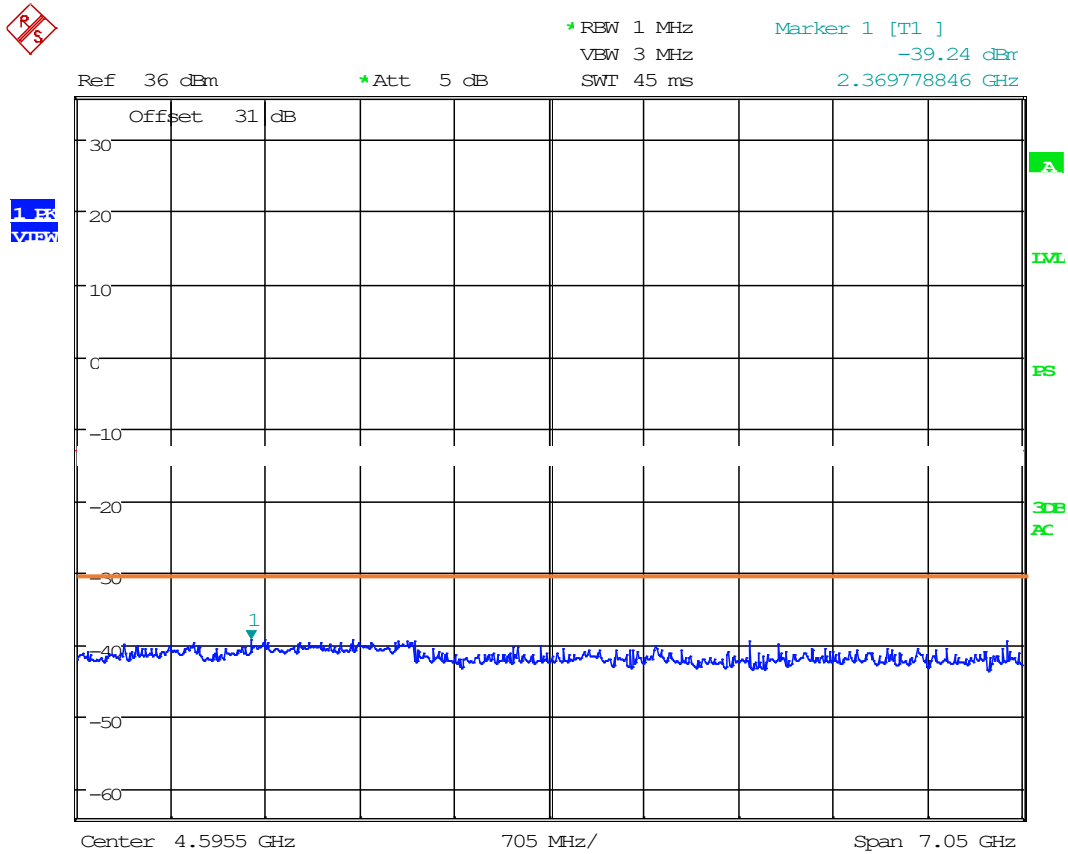


Date: 17.FEB.2003 01:53:55

### 8.3.13 Test Data: Spurious Emissions at antenna terminals (Conducted) 555 MHz, Below 1G,

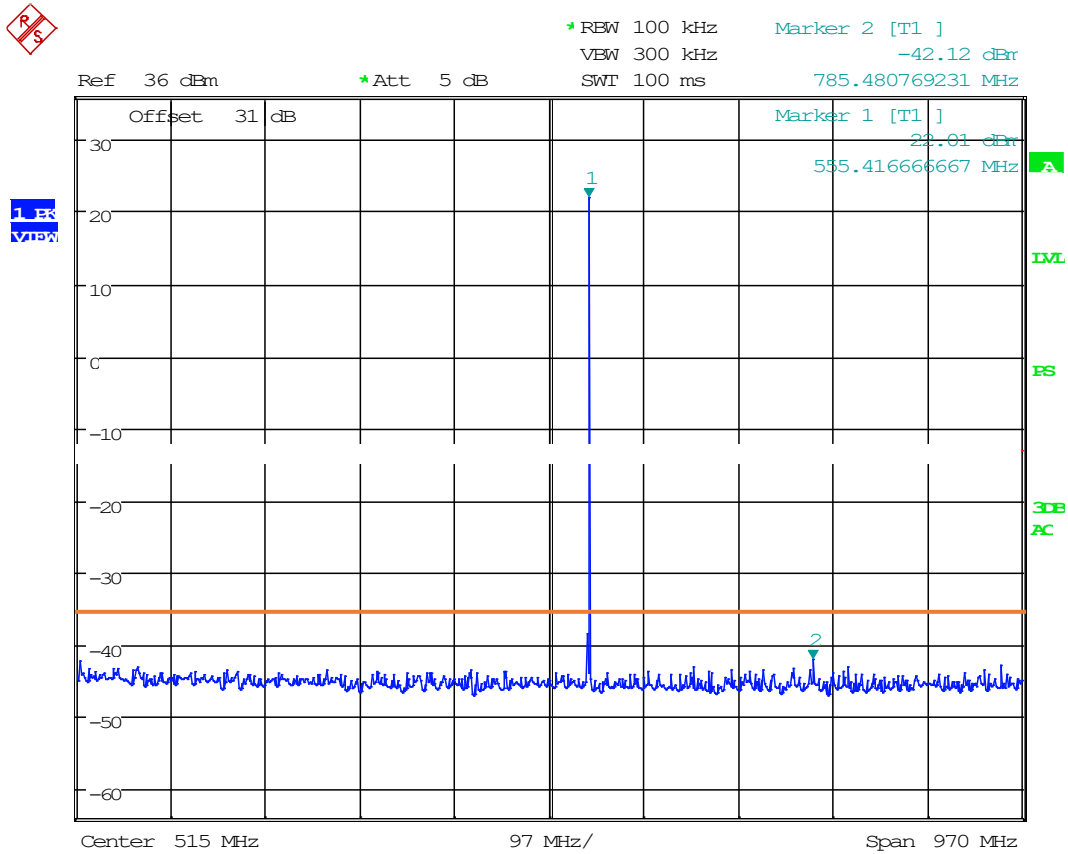

Date: 17.FEB.2003 01:19:20


### 8.3.14 Test Data: Spurious Emissions at antenna terminals (Conducted) 555 MHz, Above 1G,

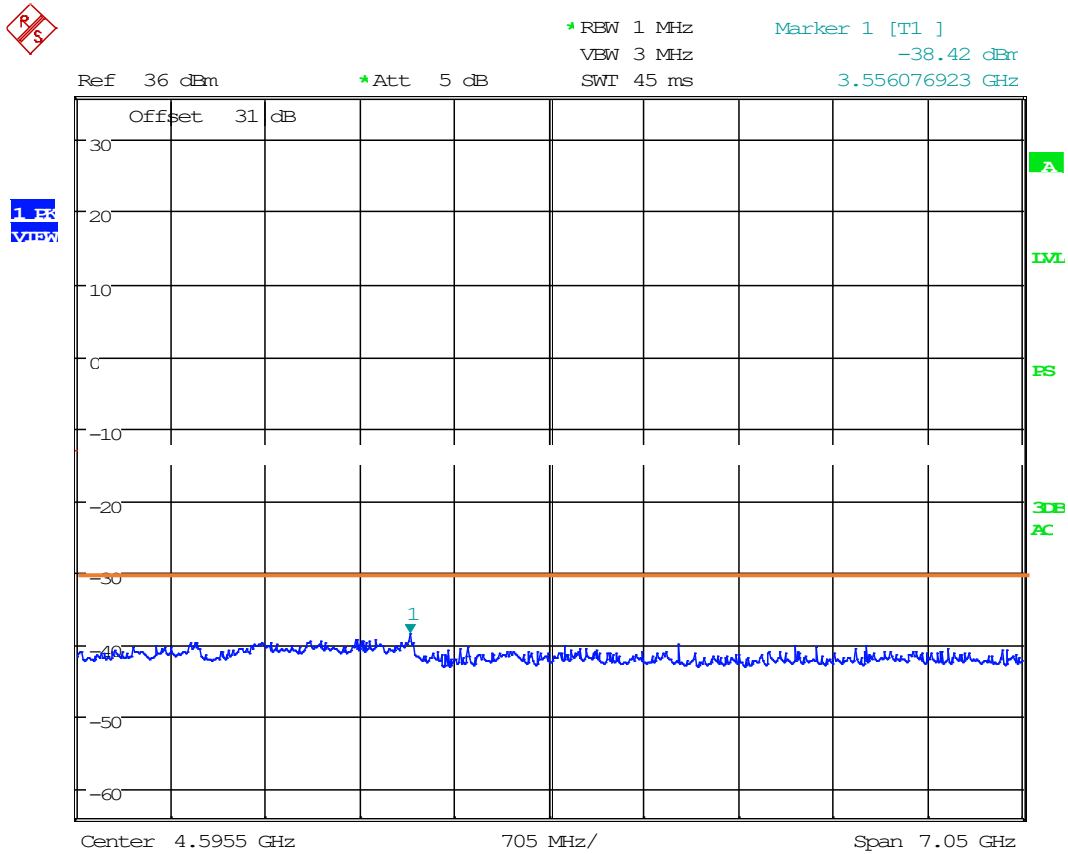

Date: 17.FEB.2003 01:52:56




8.3.15 Test Data: Spurious Emissions at antenna terminals (Conducted) 608 MHz, Below 1G,

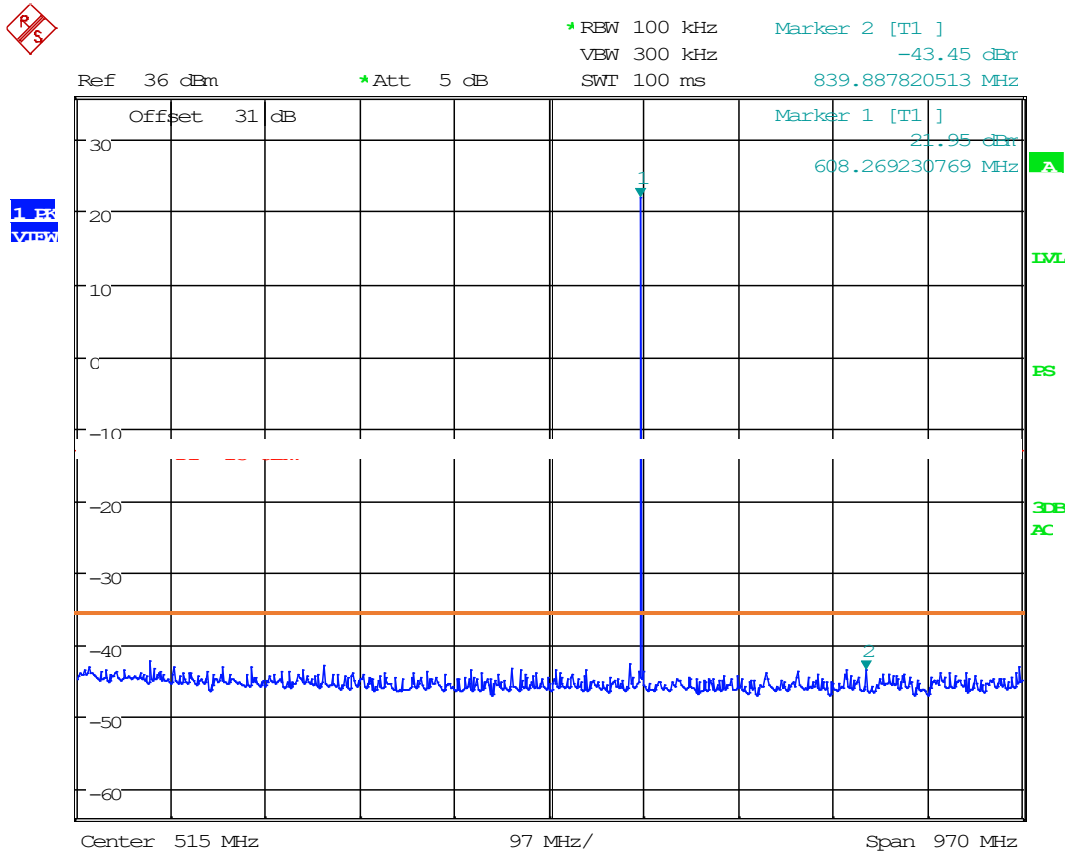


Date: 17.FEB.2003 01:20:16

### 8.3.16 Test Data: Spurious Emissions at antenna terminals (Conducted) 608 MHz, Above 1G,

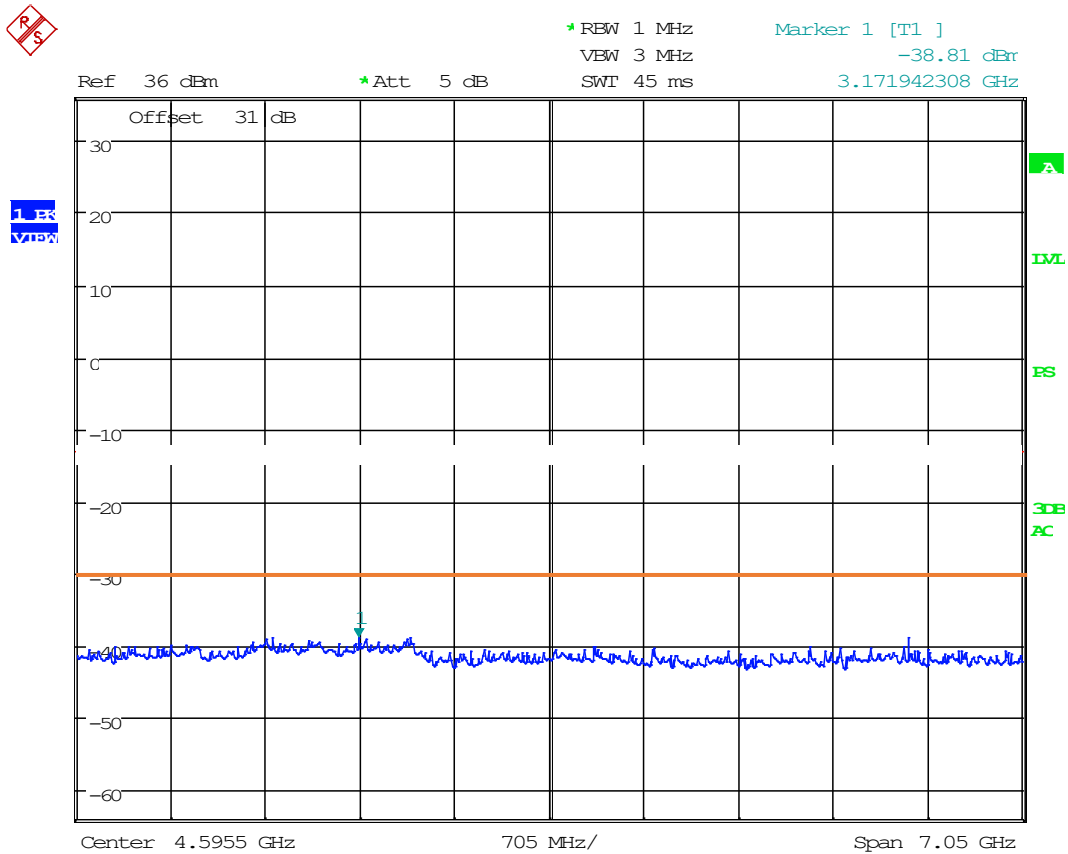


Date: 17.FEB.2003 01:52:07

### 8.3.17 Test Data: Spurious Emissions at antenna terminals (Conducted) 654 MHz, Below 1G,

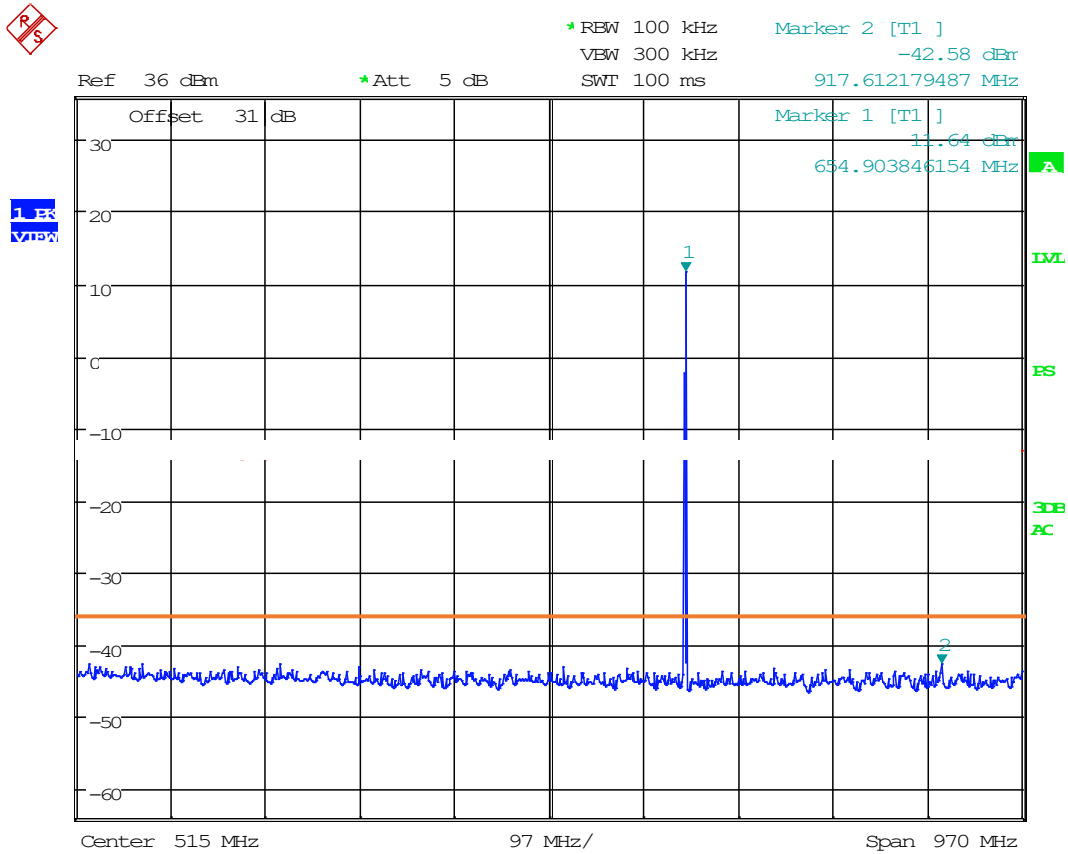


Date: 17.FEB.2003 01:26:35

### 8.3.18 Test Data: Spurious Emissions at antenna terminals (Conducted) 654 MHz, Above 1G,

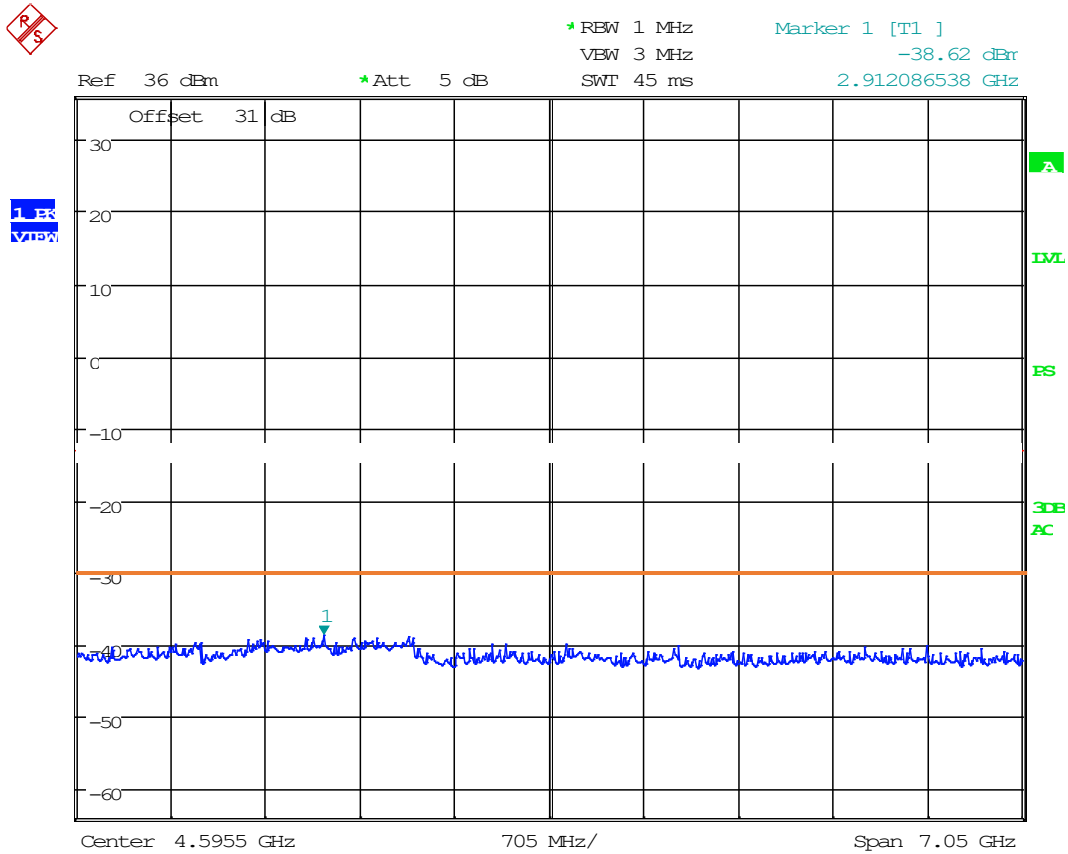


Date: 17.FEB.2003 01:51:10

8.3.19 Test Data: Spurious Emissions at antenna terminals (Conducted) 657 MHz, Below 1G,

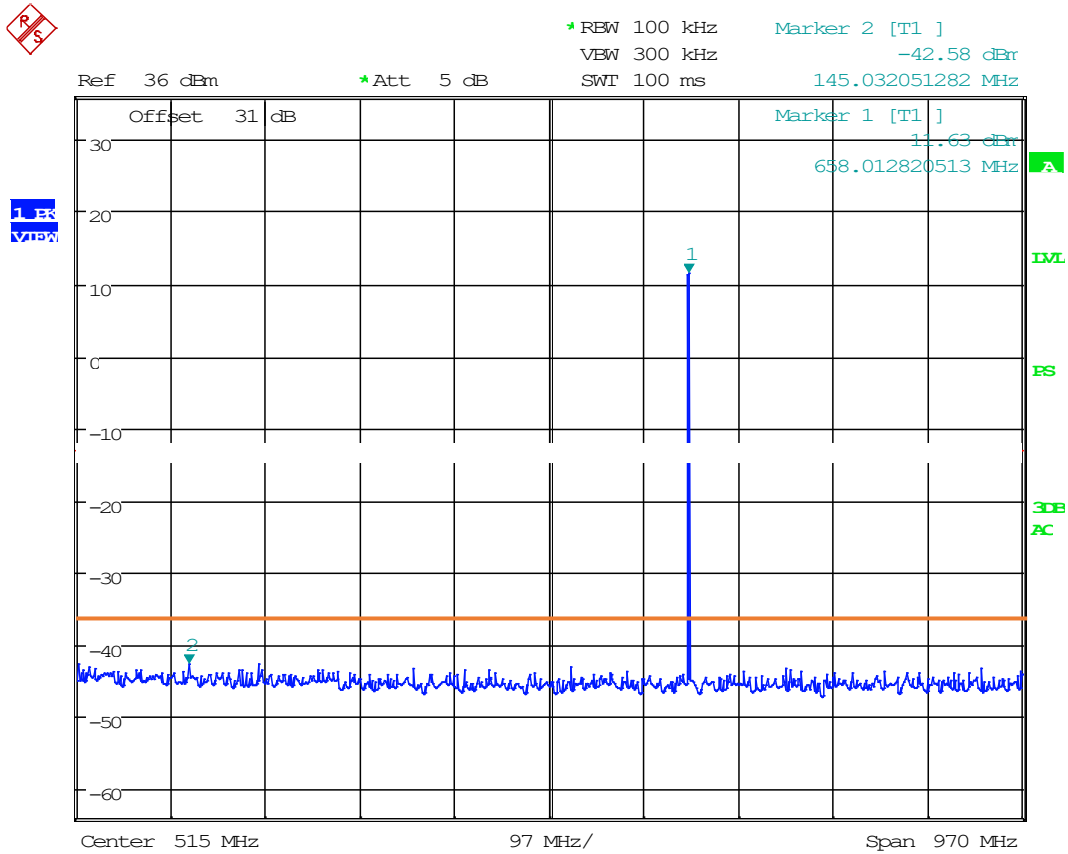


Date: 17.FEB.2003 01:27:36

### 8.3.20 Test Data: Spurious Emissions at antenna terminals (Conducted) 657 MHz, Above 1G,

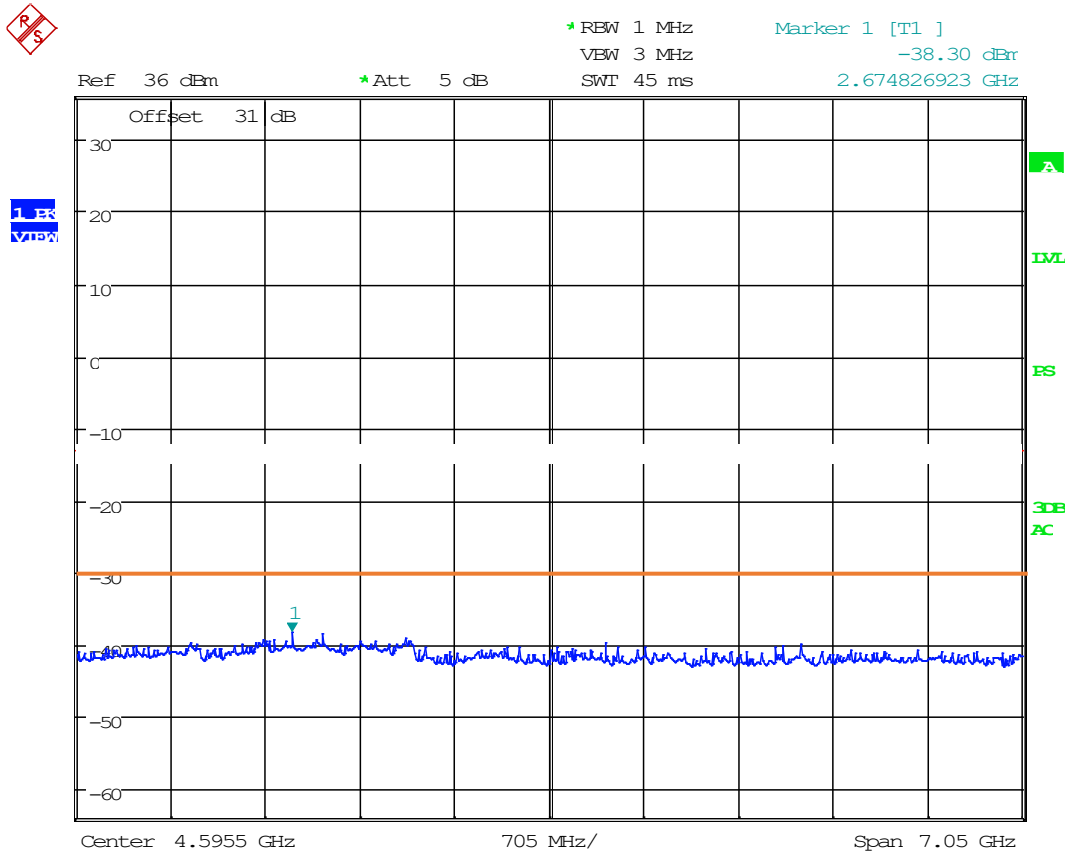


Date: 17.FEB.2003 01:50:17

### 8.3.21 Test Data: Spurious Emissions at antenna terminals (Conducted) 942 MHz, Below 1G,

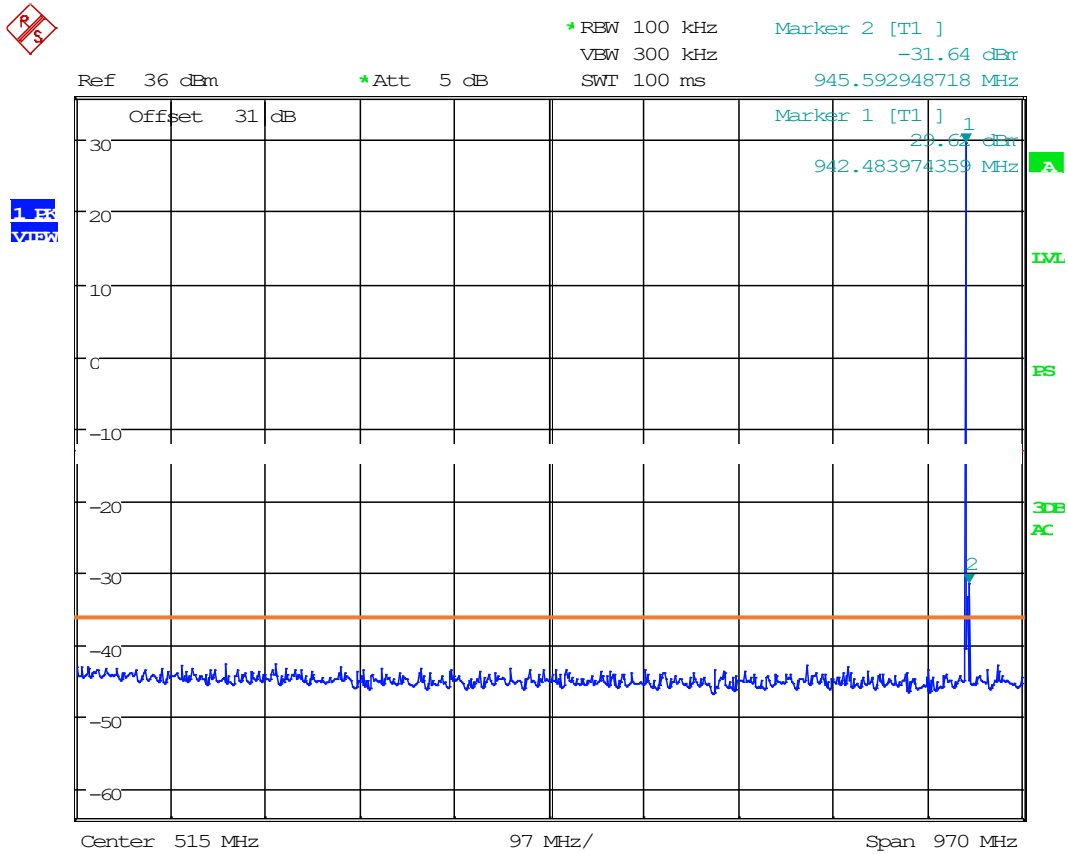

Date: 17.FEB.2003 01:29:56


8.3.22 Test Data: Spurious Emissions at antenna terminals (Conducted) 942 MHz, Above 1G,

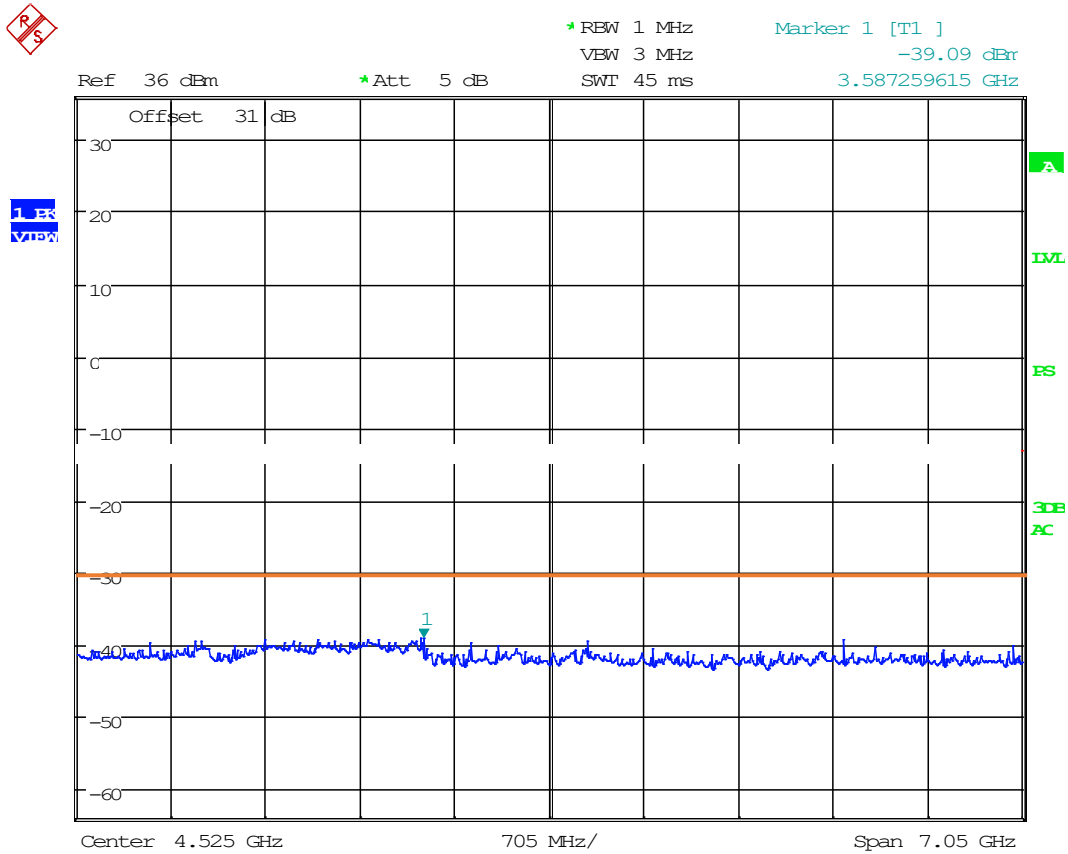

Date: 17.FEB.2003 01:45:18




8.3.23 Test Data: Spurious Emissions at antenna terminals (Conducted) 951 MHz, Below 1G,

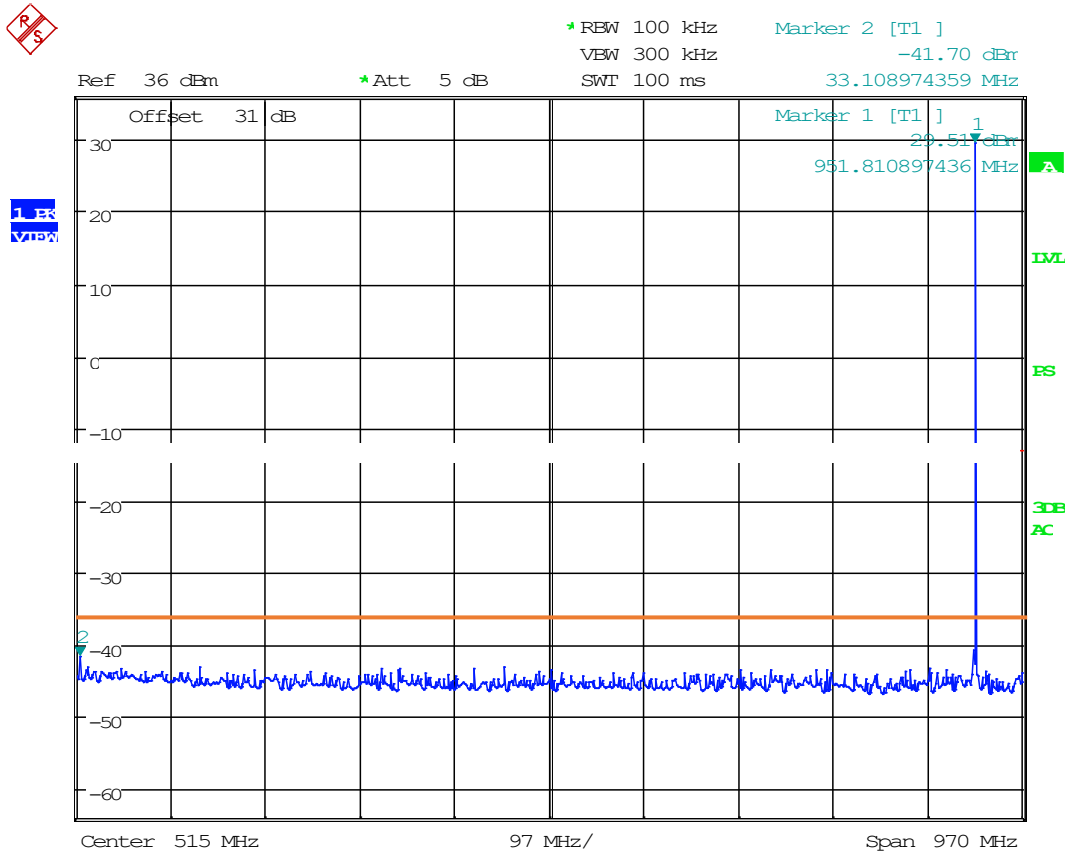


Date: 17.FEB.2003 01:31:10

### 8.3.24 Test Data: Spurious Emissions at antenna terminals (Conducted) 951 MHz, Above 1G,

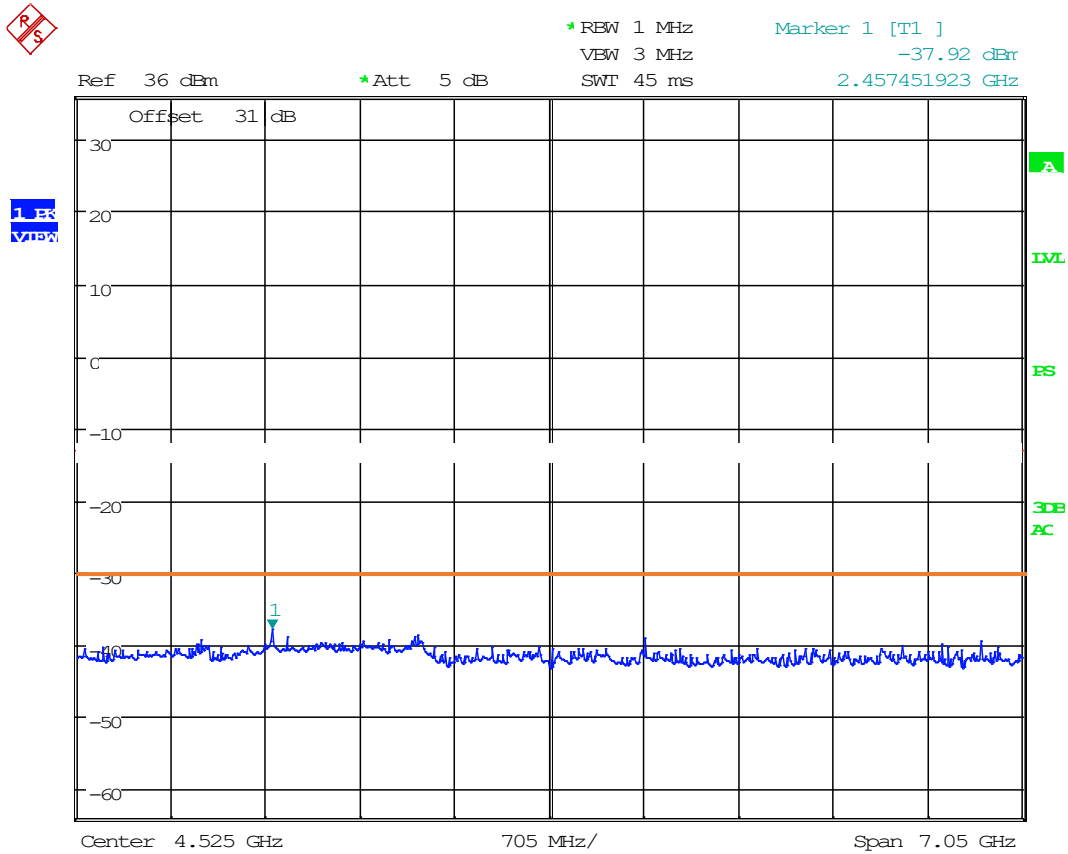


Date: 17.FEB.2003 01:44:36

### 8.3.25 Test Data: Spurious Emissions at antenna terminals (Conducted) 956 MHz, Below 1G,

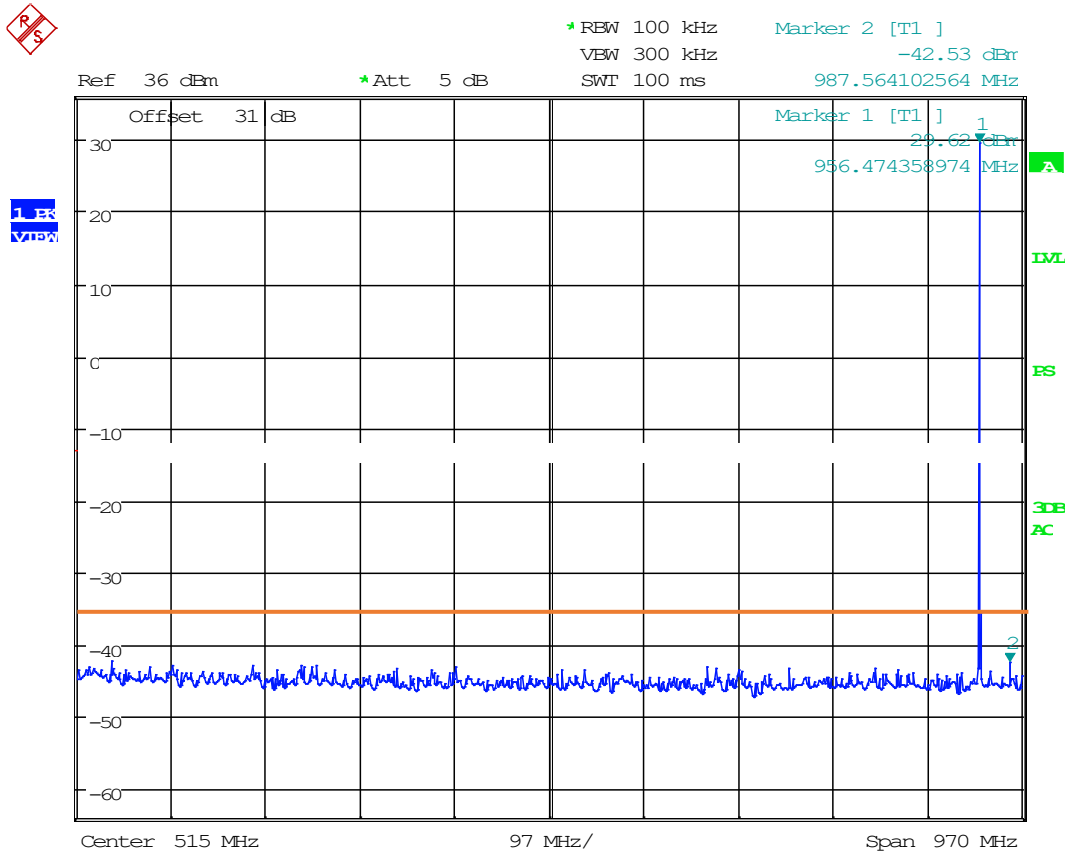


Date: 17.FEB.2003 01:32:01

### 8.3.26 Test Data: Spurious Emissions at antenna terminals (Conducted) 956 MHz, Above 1G,

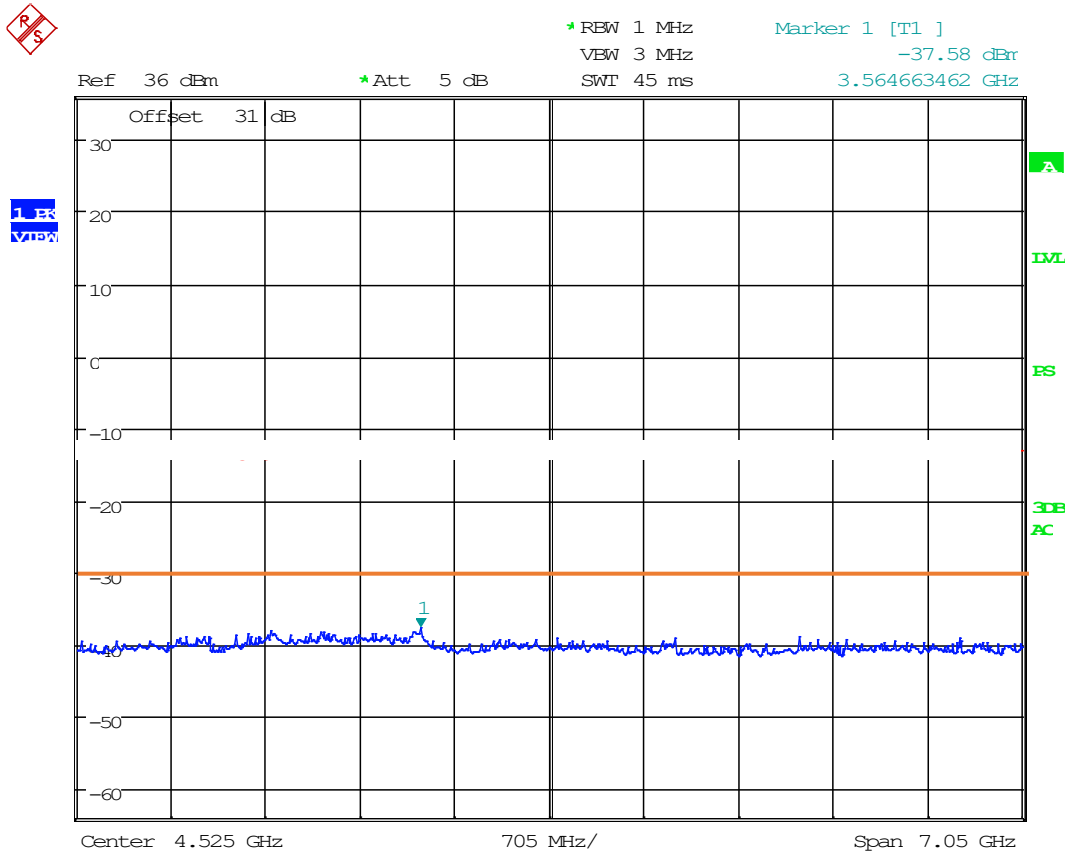


Date: 17.FEB.2003 01:43:37

8.3.27 Test Data: Spurious Emissions at antenna terminals (Conducted) 959 MHz, Below 1G,

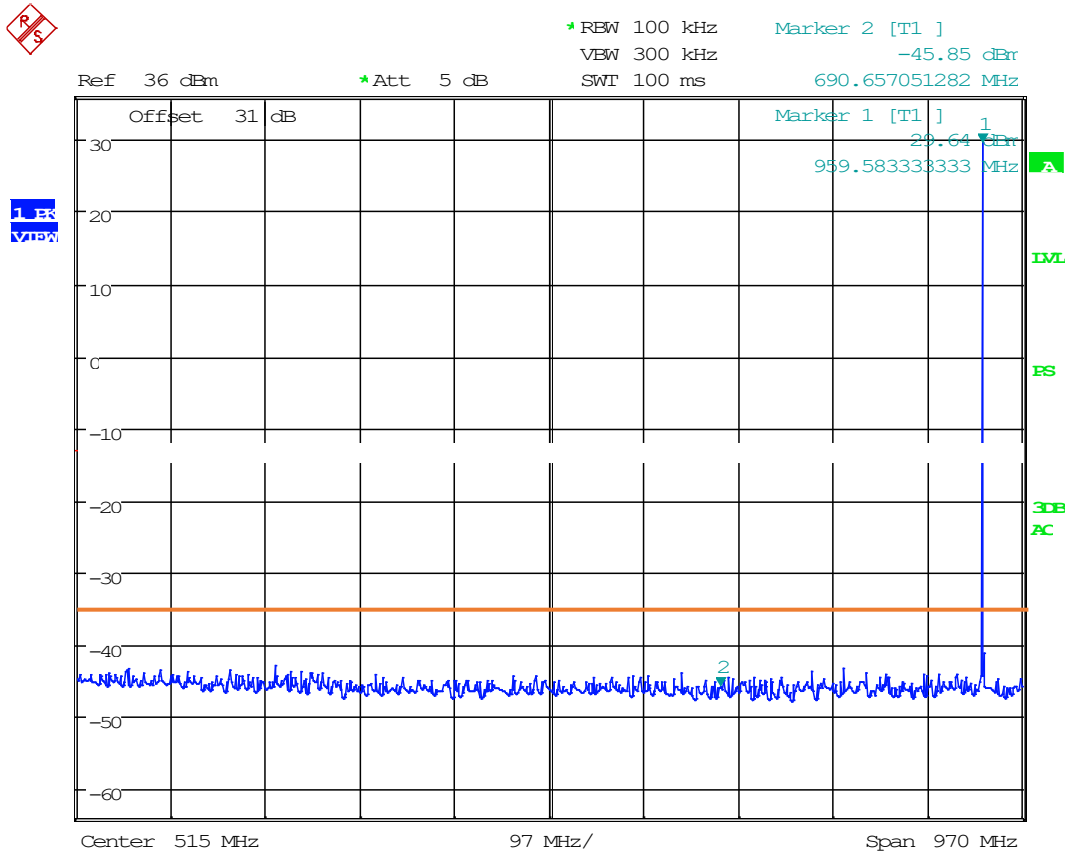

Date: 9.JUL.2021 09:59:48

### 8.3.28 Test Data: Spurious Emissions at antenna terminals (Conducted) 959 MHz, Above 1G

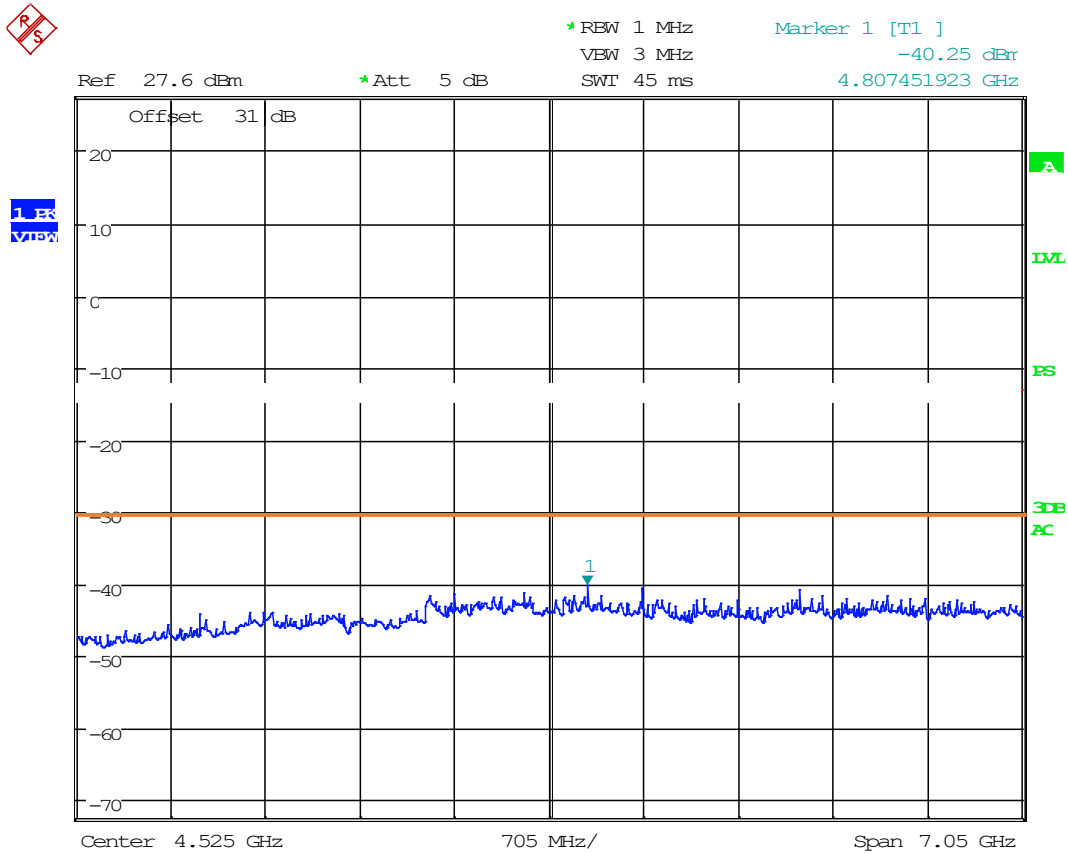


Date: 9.JUL.2021 10:00:34


## 8.4 Radiated Emissions

Limits from 2.1046(a), 74.861(e)(6)(iii) and test procedure from ANSI C63.26.

### Radiated Test Setup, 30 – 1000 MHz

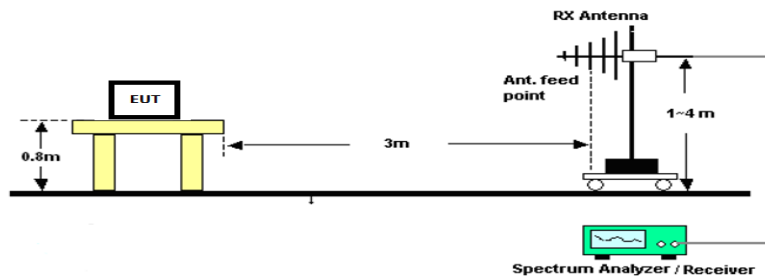

### Radiated Test Setup, Above 1000 MHz

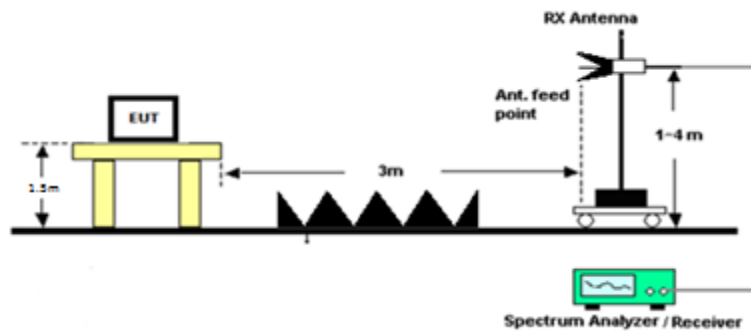

### 8.4.1 Radiated Emissions Table 174-215 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
174.00	348.00	PK	0.79	H	2.11	13.88	3.00	16.78	-80.60	-36.00	44.60
174.00	348.00	PK	1.12	V	2.11	13.88	3.00	17.11	-80.27	-36.00	44.27
174.00	522.00	PK	0.20	H	2.74	17.12	3.00	20.06	-77.32	-54.00	23.32
174.00	522.00	PK	0.11	V	2.74	17.12	3.00	19.97	-77.41	-54.00	23.41
174.00	696.00	PK	1.48	H	3.09	20.44	3.00	25.01	-72.37	-54.00	18.37
174.00	696.00	PK	0.64	V	3.09	20.44	3.00	24.17	-73.21	-54.00	19.21
174.00	870.00	PK	0.29	H	3.52	22.70	3.00	26.51	-70.87	-54.00	16.87
174.00	870.00	PK	1.21	V	3.52	22.70	3.00	27.43	-69.95	-54.00	15.95
174.00	1044.00	PK	13.17	H	3.77	26.79	3.00	43.73	-53.64	-30.00	23.64
174.00	1044.00	PK	11.59	V	3.77	26.79	3.00	42.15	-55.22	-30.00	25.22
174.00	1218.00	PK	11.67	H	4.03	28.18	3.00	43.88	-53.50	-30.00	23.50
174.00	1218.00	PK	11.44	V	4.03	28.18	3.00	43.65	-53.73	-30.00	23.73
174.00	1392.00	PK	10.87	H	4.31	28.51	3.00	43.69	-53.69	-30.00	23.69
174.00	1392.00	PK	12.49	V	4.31	28.51	3.00	45.31	-52.07	-30.00	22.07
174.00	1566.00	PK	12.25	H	4.59	27.86	3.00	44.70	-52.68	-30.00	22.68
174.00	1566.00	PK	11.89	V	4.59	27.86	3.00	44.34	-53.04	-30.00	23.04
174.00	1740.00	PK	13.07	H	4.83	29.59	3.00	47.50	-49.88	-30.00	19.88
174.00	1740.00	PK	12.44	V	4.83	29.59	3.00	46.87	-50.51	-30.00	20.51

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBµV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
200.00	400.00	PK	0.90	H	2.29	14.70	3.00	17.89	-79.49	-36.00	43.49
200.00	400.00	PK	0.25	V	2.29	14.70	3.00	17.24	-80.14	-36.00	44.14
200.00	600.00	PK	0.99	H	2.86	18.40	3.00	22.25	-75.13	-54.00	21.13
200.00	600.00	PK	0.48	V	2.86	18.40	3.00	21.74	-75.64	-54.00	21.64
200.00	800.00	PK	0.43	H	3.34	20.30	3.00	24.07	-73.31	-54.00	19.31
200.00	800.00	PK	0.70	V	3.34	20.30	3.00	24.34	-73.04	-54.00	19.04
200.00	1000.00	PK	10.69	H	3.70	27.11	3.00	41.50	-55.87	-30.00	25.87
200.00	1000.00	PK	10.35	V	3.70	27.11	3.00	41.16	-56.21	-30.00	26.21
200.00	1200.00	PK	10.24	H	4.00	28.05	3.00	42.29	-55.08	-30.00	25.08
200.00	1200.00	PK	11.08	V	4.00	28.05	3.00	43.13	-54.24	-30.00	24.24
200.00	1400.00	PK	11.98	H	4.31	28.47	3.00	44.75	-52.62	-30.00	22.62
200.00	1400.00	PK	10.86	V	4.31	28.47	3.00	43.63	-53.74	-30.00	23.74
200.00	1600.00	PK	11.61	H	4.65	28.07	3.00	44.34	-53.04	-30.00	23.04
200.00	1600.00	PK	12.41	V	4.65	28.07	3.00	45.14	-52.24	-30.00	22.24
200.00	1800.00	PK	11.22	H	4.90	30.29	3.00	46.41	-50.97	-30.00	20.97
200.00	1800.00	PK	11.91	V	4.90	30.29	3.00	47.10	-50.28	-30.00	20.28
200.00	2000.00	PK	10.25	H	5.18	31.31	3.00	46.74	-50.64	-30.00	20.64
200.00	2000.00	PK	11.71	V	5.18	31.31	3.00	48.20	-49.18	-30.00	19.18





Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
215.00	430.00	PK	0.19	H	2.38	16.00	3.00	18.57	-78.81	-36.00	42.81
215.00	430.00	PK	0.51	V	2.38	16.00	3.00	18.89	-78.49	-36.00	42.49
215.00	645.00	PK	0.70	H	2.96	19.90	3.00	23.56	-73.82	-54.00	19.82
215.00	645.00	PK	1.07	V	2.96	19.90	3.00	23.93	-73.45	-54.00	19.45
215.00	860.00	PK	1.81	H	3.49	22.20	3.00	27.50	-69.88	-54.00	15.88
215.00	860.00	PK	0.58	V	3.49	22.20	3.00	26.27	-71.11	-54.00	17.11
215.00	1075.00	PK	10.83	H	3.82	26.96	3.00	41.61	-55.77	-30.00	25.77
215.00	1075.00	PK	10.97	V	3.82	26.96	3.00	41.75	-55.63	-30.00	25.63
215.00	1290.00	PK	11.89	H	4.15	28.63	3.00	44.67	-52.71	-30.00	22.71
215.00	1290.00	PK	10.69	V	4.15	28.63	3.00	43.47	-53.91	-30.00	23.91
215.00	1505.00	PK	10.70	H	4.50	27.77	3.00	42.97	-54.41	-30.00	24.41
215.00	1505.00	PK	12.30	V	4.50	27.77	3.00	44.57	-52.81	-30.00	22.81
215.00	1720.00	PK	10.85	H	4.81	29.33	3.00	44.99	-52.39	-30.00	22.39
215.00	1720.00	PK	11.54	V	4.81	29.33	3.00	45.68	-51.70	-30.00	21.70
215.00	1935.00	PK	11.63	H	5.11	31.21	3.00	47.96	-49.42	-30.00	19.42
215.00	1935.00	PK	12.86	V	5.11	31.21	3.00	49.19	-48.19	-30.00	18.19
215.00	2150.00	PK	12.48	H	5.35	31.24	3.00	49.07	-48.30	-30.00	18.30
215.00	2150.00	PK	12.60	V	5.35	31.24	3.00	49.19	-48.18	-30.00	18.18

### 8.4.2 Radiated Emissions Table 450-451MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
450.50	901.00	PK	2.42	H	3.54	21.80	3.00	27.76	-69.62	-36.00	33.62
450.50	901.00	PK	3.28	V	3.54	21.80	3.00	28.62	-68.76	-36.00	32.76
450.50	1351.50	PK	16.24	H	4.26	28.75	3.00	49.25	-48.13	-30.00	18.13
450.50	1351.50	PK	15.11	V	4.26	28.75	3.00	48.12	-49.26	-30.00	19.26
450.50	1802.00	PK	15.48	H	4.90	30.31	3.00	50.70	-46.68	-30.00	16.68
450.50	1802.00	PK	15.04	V	4.90	30.31	3.00	50.26	-47.12	-30.00	17.12
450.50	2252.50	PK	19.59	H	5.43	31.25	3.00	56.26	-41.11	-30.00	11.11
450.50	2252.50	PK	18.24	V	5.43	31.25	3.00	54.91	-42.46	-30.00	12.46
450.50	2703.00	PK	19.11	H	5.98	32.50	3.00	57.60	-39.78	-30.00	9.78
450.50	2703.00	PK	19.57	V	5.98	32.50	3.00	58.06	-39.32	-30.00	9.32
450.50	3153.50	PK	19.71	H	6.54	32.77	3.00	59.01	-38.37	-30.00	8.37
450.50	3153.50	PK	18.11	V	6.54	32.77	3.00	57.42	-39.96	-30.00	9.96
450.50	3604.00	PK	19.92	H	6.66	33.11	3.00	59.69	-37.68	-30.00	7.68
450.50	3604.00	PK	19.51	V	6.66	33.11	3.00	59.28	-38.09	-30.00	8.09
450.50	4054.50	PK	18.00	H	7.18	33.38	3.00	58.56	-38.81	-30.00	8.81
450.50	4054.50	PK	18.72	V	7.18	33.38	3.00	59.28	-38.09	-30.00	8.09
450.50	4505.00	PK	17.23	H	7.34	33.90	3.00	58.47	-38.90	-30.00	8.90
450.50	4505.00	PK	19.57	V	7.34	33.90	3.00	60.81	-36.57	-30.00	6.57

### 8.4.3 Radiated Emissions Table 455-456MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
455.50	911.00	PK	4.35	H	3.55	22.60	3.00	30.51	-66.87	-36.00	30.87
455.50	911.00	PK	4.33	V	3.55	22.60	3.00	30.49	-66.89	-36.00	30.89
455.50	1366.50	PK	14.82	H	4.29	28.66	3.00	47.76	-49.61	-30.00	19.61
455.50	1366.50	PK	15.93	V	4.29	28.66	3.00	48.88	-48.50	-30.00	18.50
455.50	1822.00	PK	16.05	H	4.92	30.55	3.00	51.52	-45.85	-30.00	15.85
455.50	1822.00	PK	16.27	V	4.92	30.55	3.00	51.74	-45.63	-30.00	15.63
455.50	2277.50	PK	16.45	H	5.46	31.39	3.00	53.31	-44.07	-30.00	14.07
455.50	2277.50	PK	18.09	V	5.46	31.39	3.00	54.94	-42.44	-30.00	12.44
455.50	2733.00	PK	17.99	H	6.06	32.43	3.00	56.47	-40.91	-30.00	10.91
455.50	2733.00	PK	19.81	V	6.06	32.43	3.00	58.29	-39.09	-30.00	9.09
455.50	3188.50	PK	19.82	H	6.62	32.70	3.00	59.13	-38.24	-30.00	8.24
455.50	3188.50	PK	19.17	V	6.62	32.70	3.00	58.49	-38.89	-30.00	8.89
455.50	3644.00	PK	18.02	H	6.62	33.19	3.00	57.83	-39.55	-30.00	9.55
455.50	3644.00	PK	18.59	V	6.62	33.19	3.00	58.40	-38.98	-30.00	8.98
455.50	4099.50	PK	19.00	H	7.12	33.40	3.00	59.52	-37.86	-30.00	7.86
455.50	4099.50	PK	19.36	V	7.12	33.40	3.00	59.87	-37.50	-30.00	7.50
455.50	4555.00	PK	17.81	H	7.49	34.00	3.00	59.31	-38.07	-30.00	8.07
455.50	4555.00	PK	19.08	V	7.49	34.00	3.00	60.58	-36.80	-30.00	6.80

### 8.4.1 Radiated Emissions Table 470–608 MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
470.00	940.00	PK	0.20	H	3.59	22.60	3.00	26.39	-70.99	-36.00	34.99
470.00	940.00	PK	0.82	V	3.59	22.60	3.00	27.01	-70.37	-36.00	34.37
470.00	1410.00	PK	11.72	H	4.31	28.39	3.00	44.42	-52.96	-30.00	22.96
470.00	1410.00	PK	11.95	V	4.31	28.39	3.00	44.65	-52.73	-30.00	22.73
470.00	1880.00	PK	11.37	H	5.03	30.94	3.00	47.34	-50.03	-30.00	20.03
470.00	1880.00	PK	11.97	V	5.03	30.94	3.00	47.94	-49.43	-30.00	19.43
470.00	2350.00	PK	12.53	H	5.58	31.93	3.00	50.03	-47.35	-30.00	17.35
470.00	2350.00	PK	13.06	V	5.58	31.93	3.00	50.56	-46.82	-30.00	16.82
470.00	2820.00	PK	11.97	H	6.21	32.43	3.00	50.61	-46.77	-30.00	16.77
470.00	2820.00	PK	14.76	V	6.21	32.43	3.00	53.40	-43.98	-30.00	13.98
470.00	3290.00	PK	12.51	H	6.70	32.63	3.00	51.84	-45.54	-30.00	15.54
470.00	3290.00	PK	12.94	V	6.70	32.63	3.00	52.27	-45.11	-30.00	15.11
470.00	3760.00	PK	10.73	H	6.45	33.13	3.00	50.30	-47.07	-30.00	17.07
470.00	3760.00	PK	10.23	V	6.45	33.13	3.00	49.80	-47.57	-30.00	17.57
470.00	4230.00	PK	10.60	H	7.10	33.33	3.00	51.03	-46.35	-30.00	16.35
470.00	4230.00	PK	9.53	V	7.10	33.33	3.00	49.96	-47.42	-30.00	17.42
470.00	4700.00	PK	11.54	H	7.20	33.88	3.00	52.62	-44.76	-30.00	14.76
470.00	4700.00	PK	11.24	V	7.20	33.88	3.00	52.32	-45.06	-30.00	15.06

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
555.00	1110.00	PK	11.23	H	3.86	27.20	3.00	42.29	-55.08	-30.00	25.08
555.00	1110.00	PK	10.04	V	3.86	27.20	3.00	41.10	-56.27	-30.00	26.27
555.00	1665.00	PK	12.00	H	4.74	28.75	3.00	45.49	-51.89	-30.00	21.89
555.00	1665.00	PK	11.90	V	4.74	28.75	3.00	45.39	-51.99	-30.00	21.99
555.00	2220.00	PK	12.08	H	5.39	31.28	3.00	48.75	-48.62	-30.00	18.62
555.00	2220.00	PK	12.27	V	5.39	31.28	3.00	48.94	-48.43	-30.00	18.43
555.00	2775.00	PK	12.68	H	6.14	32.45	3.00	51.27	-46.11	-30.00	16.11
555.00	2775.00	PK	12.84	V	6.14	32.45	3.00	51.43	-45.95	-30.00	15.95
555.00	3330.00	PK	11.60	H	6.72	32.63	3.00	50.96	-46.42	-30.00	16.42
555.00	3330.00	PK	12.89	V	6.72	32.63	3.00	52.25	-45.13	-30.00	15.13
555.00	3885.00	PK	11.41	H	6.82	33.22	3.00	51.45	-45.93	-30.00	15.93
555.00	3885.00	PK	10.51	V	6.82	33.22	3.00	50.55	-46.83	-30.00	16.83
555.00	4440.00	PK	11.29	H	7.28	33.76	3.00	52.33	-45.05	-30.00	15.05
555.00	4440.00	PK	11.11	V	7.28	33.76	3.00	52.15	-45.23	-30.00	15.23
555.00	4995.00	PK	10.19	H	7.61	34.01	3.00	51.81	-45.57	-30.00	15.57
555.00	4995.00	PK	10.21	V	7.61	34.01	3.00	51.83	-45.55	-30.00	15.55
555.00	5550.00	PK	11.46	H	8.06	34.40	3.00	53.92	-43.46	-30.00	13.46
555.00	5550.00	PK	10.89	V	8.06	34.40	3.00	53.35	-44.03	-30.00	14.03



Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
608.00	1216.00	PK	10.74	H	4.03	28.17	3.00	42.93	-54.45	-30.00	24.45
608.00	1216.00	PK	11.70	V	4.03	28.17	3.00	43.89	-53.49	-30.00	23.49
608.00	1824.00	PK	11.80	H	4.93	30.58	3.00	47.30	-50.07	-30.00	20.07
608.00	1824.00	PK	11.30	V	4.93	30.58	3.00	46.80	-50.57	-30.00	20.57
608.00	2432.00	PK	12.69	H	5.61	31.85	3.00	50.15	-47.22	-30.00	17.22
608.00	2432.00	PK	11.25	V	5.61	31.85	3.00	48.71	-48.66	-30.00	18.66
608.00	3040.00	PK	12.73	H	6.39	32.61	3.00	51.73	-45.65	-30.00	15.65
608.00	3040.00	PK	12.64	V	6.39	32.61	3.00	51.64	-45.74	-30.00	15.74
608.00	3648.00	PK	10.40	H	6.62	33.19	3.00	50.21	-47.17	-30.00	17.17
608.00	3648.00	PK	10.16	V	6.62	33.19	3.00	49.97	-47.41	-30.00	17.41
608.00	4256.00	PK	9.81	H	7.22	33.35	3.00	50.39	-46.99	-30.00	16.99
608.00	4256.00	PK	11.33	V	7.22	33.35	3.00	51.91	-45.47	-30.00	15.47
608.00	4864.00	PK	10.38	H	7.26	33.94	3.00	51.58	-45.80	-30.00	15.80
608.00	4864.00	PK	10.48	V	7.26	33.94	3.00	51.68	-45.70	-30.00	15.70
608.00	5472.00	PK	11.69	H	8.10	34.47	3.00	54.26	-43.12	-30.00	13.12
608.00	5472.00	PK	10.28	V	8.10	34.47	3.00	52.85	-44.53	-30.00	14.53
608.00	6080.00	PK	9.07	H	8.63	35.21	3.00	52.91	-44.46	-30.00	14.46
608.00	6080.00	PK	9.37	V	8.63	35.21	3.00	53.21	-44.16	-30.00	14.16

### 8.4.2 Radiated Emissions Table 653-657MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
654.00	1308.00	PK	11.07	H	4.19	28.69	3.00	43.95	-53.42	-30.00	23.42
654.00	1308.00	PK	10.21	V	4.19	28.69	3.00	43.09	-54.28	-30.00	24.28
654.00	1962.00	PK	11.76	H	5.14	31.31	3.00	48.21	-49.17	-30.00	19.17
654.00	1962.00	PK	12.07	V	5.14	31.31	3.00	48.52	-48.86	-30.00	18.86
654.00	2616.00	PK	13.92	H	5.82	32.41	3.00	52.16	-45.22	-30.00	15.22
654.00	2616.00	PK	11.93	V	5.82	32.41	3.00	50.17	-47.21	-30.00	17.21
654.00	3270.00	PK	11.99	H	6.67	32.66	3.00	51.32	-46.06	-30.00	16.06
654.00	3270.00	PK	13.45	V	6.67	32.66	3.00	52.78	-44.60	-30.00	14.60
654.00	3924.00	PK	11.11	H	7.15	33.30	3.00	51.56	-45.82	-30.00	15.82
654.00	3924.00	PK	10.35	V	7.15	33.30	3.00	50.80	-46.58	-30.00	16.58
654.00	4578.00	PK	9.74	H	7.53	34.03	3.00	51.30	-46.08	-30.00	16.08
654.00	4578.00	PK	9.78	V	7.53	34.03	3.00	51.34	-46.04	-30.00	16.04
654.00	5232.00	PK	10.64	H	7.80	34.25	3.00	52.69	-44.69	-30.00	14.69
654.00	5232.00	PK	9.61	V	7.80	34.25	3.00	51.66	-45.72	-30.00	15.72
654.00	5886.00	PK	10.00	H	8.43	35.00	3.00	53.44	-43.94	-30.00	13.94
654.00	5886.00	PK	9.66	V	8.43	35.00	3.00	53.10	-44.28	-30.00	14.28
654.00	6540.00	PK	10.32	H	9.17	35.55	3.00	55.05	-42.33	-30.00	12.33
654.00	6540.00	PK	10.24	V	9.17	35.55	3.00	54.97	-42.41	-30.00	12.41

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
657.00	1314.00	PK	10.75	H	4.21	28.70	3.00	43.65	-53.72	-30.00	23.72
657.00	1314.00	PK	9.94	V	4.21	28.70	3.00	42.84	-54.53	-30.00	24.53
657.00	1971.00	PK	11.84	H	5.15	31.31	3.00	48.30	-49.08	-30.00	19.08
657.00	1971.00	PK	11.49	V	5.15	31.31	3.00	47.95	-49.43	-30.00	19.43
657.00	2628.00	PK	12.81	H	5.85	32.42	3.00	51.07	-46.30	-30.00	16.30
657.00	2628.00	PK	11.72	V	5.85	32.42	3.00	49.98	-47.39	-30.00	17.39
657.00	3285.00	PK	11.94	H	6.69	32.64	3.00	51.27	-46.11	-30.00	16.11
657.00	3285.00	PK	13.43	V	6.69	32.64	3.00	52.76	-44.62	-30.00	14.62
657.00	3942.00	PK	10.05	H	7.27	33.35	3.00	50.66	-46.71	-30.00	16.71
657.00	3942.00	PK	11.31	V	7.27	33.35	3.00	51.92	-45.45	-30.00	15.45
657.00	4599.00	PK	9.71	H	7.55	34.06	3.00	51.31	-46.06	-30.00	16.06
657.00	4599.00	PK	10.36	V	7.55	34.06	3.00	51.96	-45.41	-30.00	15.41
657.00	5256.00	PK	9.72	H	7.78	34.29	3.00	51.78	-45.59	-30.00	15.59
657.00	5256.00	PK	10.10	V	7.78	34.29	3.00	52.16	-45.21	-30.00	15.21
657.00	5913.00	PK	9.82	H	8.46	35.03	3.00	53.31	-44.07	-30.00	14.07
657.00	5913.00	PK	10.27	V	8.46	35.03	3.00	53.76	-43.62	-30.00	13.62
657.00	6570.00	PK	10.60	H	9.21	35.60	3.00	55.42	-41.96	-30.00	11.96
657.00	6570.00	PK	10.21	V	9.21	35.60	3.00	55.03	-42.35	-30.00	12.35

### 8.4.1 Radiated Emissions Table 941.5-956.25MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
942.00	1884.00	PK	13.15	H	5.04	30.95	3.00	49.14	-48.24	-30.00	18.24
942.00	1884.00	PK	11.67	V	5.04	30.95	3.00	47.66	-49.72	-30.00	19.72
942.00	2826.00	PK	12.15	H	6.21	32.41	3.00	50.76	-46.61	-30.00	16.61
942.00	2826.00	PK	12.83	V	6.21	32.41	3.00	51.44	-45.93	-30.00	15.93
942.00	3768.00	PK	9.67	H	6.44	33.13	3.00	49.24	-48.14	-30.00	18.14
942.00	3768.00	PK	11.48	V	6.44	33.13	3.00	51.05	-46.33	-30.00	16.33
942.00	4710.00	PK	10.51	H	7.15	33.88	3.00	51.54	-45.84	-30.00	15.84
942.00	4710.00	PK	11.09	V	7.15	33.88	3.00	52.12	-45.26	-30.00	15.26
942.00	5652.00	PK	9.42	H	8.15	34.54	3.00	52.11	-45.27	-30.00	15.27
942.00	5652.00	PK	10.39	V	8.15	34.54	3.00	53.08	-44.30	-30.00	14.30
942.00	6594.00	PK	10.59	H	9.20	35.66	3.00	55.44	-41.93	-30.00	11.93
942.00	6594.00	PK	10.69	V	9.20	35.66	3.00	55.54	-41.83	-30.00	11.83
942.00	7536.00	PK	9.46	H	9.71	35.88	3.00	55.05	-42.32	-30.00	12.32
942.00	7536.00	PK	10.35	V	9.71	35.88	3.00	55.94	-41.43	-30.00	11.43
942.00	8478.00	PK	10.20	H	10.25	35.94	3.00	56.38	-40.99	-30.00	10.99
942.00	8478.00	PK	9.47	V	10.25	35.94	3.00	55.65	-41.72	-30.00	11.72
942.00	9420.00	PK	9.43	H	11.03	36.40	3.00	56.86	-40.52	-30.00	10.52
942.00	9420.00	PK	9.26	V	11.03	36.40	3.00	56.69	-40.69	-30.00	10.69

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
951.00	1902.00	PK	11.44	H	5.06	31.00	3.00	47.50	-49.88	-30.00	19.88
951.00	1902.00	PK	11.51	V	5.06	31.00	3.00	47.57	-49.81	-30.00	19.81
951.00	2853.00	PK	12.27	H	6.20	32.31	3.00	50.78	-46.60	-30.00	16.60
951.00	2853.00	PK	12.22	V	6.20	32.31	3.00	50.73	-46.65	-30.00	16.65
951.00	3804.00	PK	10.59	H	6.38	33.15	3.00	50.12	-47.26	-30.00	17.26
951.00	3804.00	PK	9.57	V	6.38	33.15	3.00	49.10	-48.28	-30.00	18.28
951.00	4755.00	PK	10.98	H	6.95	33.91	3.00	51.84	-45.54	-30.00	15.54
951.00	4755.00	PK	10.91	V	6.95	33.91	3.00	51.77	-45.61	-30.00	15.61
951.00	5706.00	PK	10.11	H	8.07	34.61	3.00	52.79	-44.59	-30.00	14.59
951.00	5706.00	PK	10.22	V	8.07	34.61	3.00	52.90	-44.48	-30.00	14.48
951.00	6657.00	PK	10.65	H	9.15	35.65	3.00	55.45	-41.93	-30.00	11.93
951.00	6657.00	PK	10.28	V	9.15	35.65	3.00	55.08	-42.30	-30.00	12.30
951.00	7608.00	PK	9.35	H	9.93	35.86	3.00	55.14	-42.24	-30.00	12.24
951.00	7608.00	PK	10.00	V	9.93	35.86	3.00	55.79	-41.59	-30.00	11.59
951.00	8559.00	PK	9.70	H	10.06	35.99	3.00	55.75	-41.63	-30.00	11.63
951.00	8559.00	PK	9.94	V	10.06	35.99	3.00	55.99	-41.39	-30.00	11.39
951.00	9510.00	PK	9.46	H	10.72	36.54	3.00	56.72	-40.66	-30.00	10.66
951.00	9510.00	PK	8.93	V	10.72	36.54	3.00	56.19	-41.19	-30.00	11.19

### 8.4.1 Radiated Emissions Table 952.85-956.25MHz


Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
956.00	1912.00	PK	12.35	H	5.08	31.06	3.00	48.49	-48.89	-30.00	18.89
956.00	1912.00	PK	11.56	V	5.08	31.06	3.00	47.70	-49.68	-30.00	19.68
956.00	2868.00	PK	12.60	H	6.20	32.28	3.00	51.08	-46.30	-30.00	16.30
956.00	2868.00	PK	12.34	V	6.20	32.28	3.00	50.82	-46.56	-30.00	16.56
956.00	3824.00	PK	10.70	H	6.43	33.17	3.00	50.31	-47.07	-30.00	17.07
956.00	3824.00	PK	10.69	V	6.43	33.17	3.00	50.30	-47.08	-30.00	17.08
956.00	4780.00	PK	10.14	H	7.03	33.92	3.00	51.09	-46.29	-30.00	16.29
956.00	4780.00	PK	10.67	V	7.03	33.92	3.00	51.62	-45.76	-30.00	15.76
956.00	5736.00	PK	9.85	H	8.12	34.63	3.00	52.61	-44.77	-30.00	14.77
956.00	5736.00	PK	10.69	V	8.12	34.63	3.00	53.45	-43.93	-30.00	13.93
956.00	6692.00	PK	9.63	H	9.13	35.72	3.00	54.48	-42.89	-30.00	12.89
956.00	6692.00	PK	10.64	V	9.13	35.72	3.00	55.49	-41.88	-30.00	11.88
956.00	7648.00	PK	9.69	H	10.04	35.94	3.00	55.67	-41.71	-30.00	11.71
956.00	7648.00	PK	9.54	V	10.04	35.94	3.00	55.52	-41.86	-30.00	11.86
956.00	8604.00	PK	10.35	H	10.13	36.04	3.00	56.52	-40.86	-30.00	10.86
956.00	8604.00	PK	9.64	V	10.13	36.04	3.00	55.81	-41.57	-30.00	11.57
956.00	9560.00	PK	9.57	H	10.62	36.52	3.00	56.71	-40.67	-30.00	10.67
956.00	9560.00	PK	10.05	V	10.62	36.52	3.00	57.19	-40.19	-30.00	10.19

### 8.4.1 Radiated Emissions Table 956.45-959.85MHz

Tuned Frequency (MHz)	Emission Frequency (MHz)	Detector	Meter Reading (dBuV)	Antenna Polarity	Coax Loss (dB)	Antenna Correction Factor (dB/m)	Distance (m)	Field Strength (dBuV/m)	ERP (dBm)	Spurious Limit (dBm)	Margin (dB)
959.00	1918.00	PK	11.00	H	5.09	31.10	3.00	47.19	-50.19	-30.00	20.19
959.00	1918.00	PK	10.21	V	5.09	31.10	3.00	46.40	-50.98	-30.00	20.98
959.00	2877.00	PK	11.25	H	6.20	32.26	3.00	49.71	-47.67	-30.00	17.67
959.00	2877.00	PK	10.99	V	6.20	32.26	3.00	49.45	-47.93	-30.00	17.93
959.00	3836.00	PK	9.35	H	6.51	33.19	3.00	49.04	-48.34	-30.00	18.34
959.00	3836.00	PK	9.34	V	6.51	33.19	3.00	49.03	-48.35	-30.00	18.35
959.00	4795.00	PK	8.79	H	7.07	33.93	3.00	49.79	-47.59	-30.00	17.59
959.00	4795.00	PK	9.32	V	7.07	33.93	3.00	50.32	-47.06	-30.00	17.06
959.00	5754.00	PK	8.50	H	8.17	34.65	3.00	51.32	-46.05	-30.00	16.05
959.00	5754.00	PK	9.34	V	8.17	34.65	3.00	52.16	-45.21	-30.00	15.21
959.00	6713.00	PK	8.28	H	9.14	35.76	3.00	53.18	-44.20	-30.00	14.20
959.00	6713.00	PK	9.29	V	9.14	35.76	3.00	54.19	-43.19	-30.00	13.19
959.00	7672.00	PK	8.34	H	10.08	35.91	3.00	54.33	-43.05	-30.00	13.05
959.00	7672.00	PK	8.19	V	10.08	35.91	3.00	54.18	-43.20	-30.00	13.20
959.00	8631.00	PK	9.00	H	10.21	36.03	3.00	55.24	-42.14	-30.00	12.14
959.00	8631.00	PK	8.29	V	10.21	36.03	3.00	54.53	-42.85	-30.00	12.85
959.00	9590.00	PK	8.22	H	10.66	36.58	3.00	55.46	-41.92	-30.00	11.92
959.00	9590.00	PK	8.70	V	10.66	36.58	3.00	55.94	-41.44	-30.00	11.44

## 8.5 Frequency Stability

Limits from 2.1046(a), 74.861(e) (6) (iii) and test procedure from ANSI C63.26.

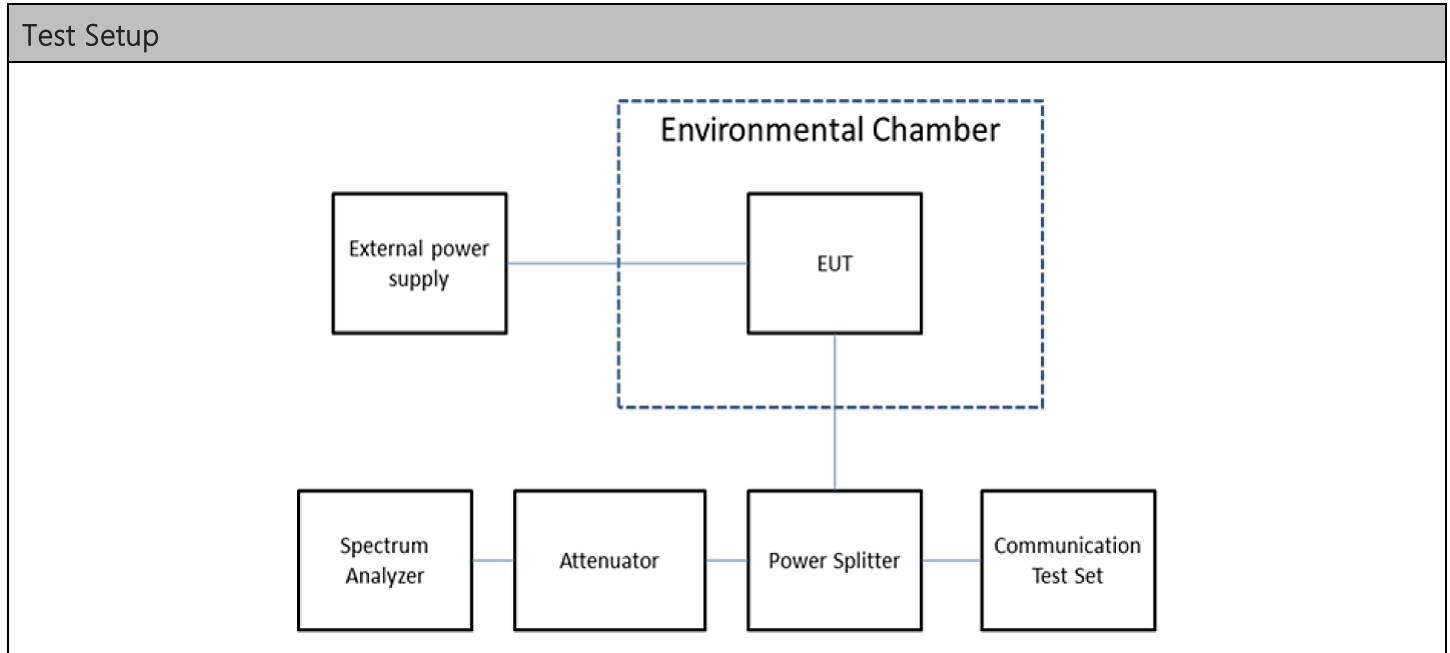

Test Results, Mode 1		
Tuned Frequency (MHz)	Max Deviation (kHz)	Limit (ppm)
654 MHz	0.280 kHz	50 ppm




## Frequency Stability, Tabular Data

### 8.5.1 Frequency Stability Data

FCC Part 90 Limit	50.0	ppm	
FCC Part 90 Limit, as ppb	50000	ppb (Parts per Billion)	
FCC Part 90 Limit, as %	0.00500	%	
Strictest Combined Limit, as Hz	32699.948	Hz	
Combined Lower Limit	653.966260	MHz	
Combined Upper Limit	654.031660	MHz	
Rated Supply Voltage	13.8	<input type="radio"/> AC <input checked="" type="radio"/> DC	
Temperature / Voltage Variation			
Temperature (°C)	Supplied Voltage (V)	Frequency (MHz)	Deviation (kHz)
-30	13.8	653.998680	0.280
-20	13.8	653.998720	0.240
-10	13.8	653.998840	0.120
0	13.8	653.998900	0.060
+10	13.8	653.998920	0.040
+20 (reference)	13.8	653.998960	0.000
+20	11.7	653.999040	-0.080
+20	15.9	653.999040	-0.080
+30	13.8	653.998880	0.080
+40	13.8	653.998920	0.040
+50	13.8	653.998940	0.020

### 8.5.2 Frequency Stability Plot

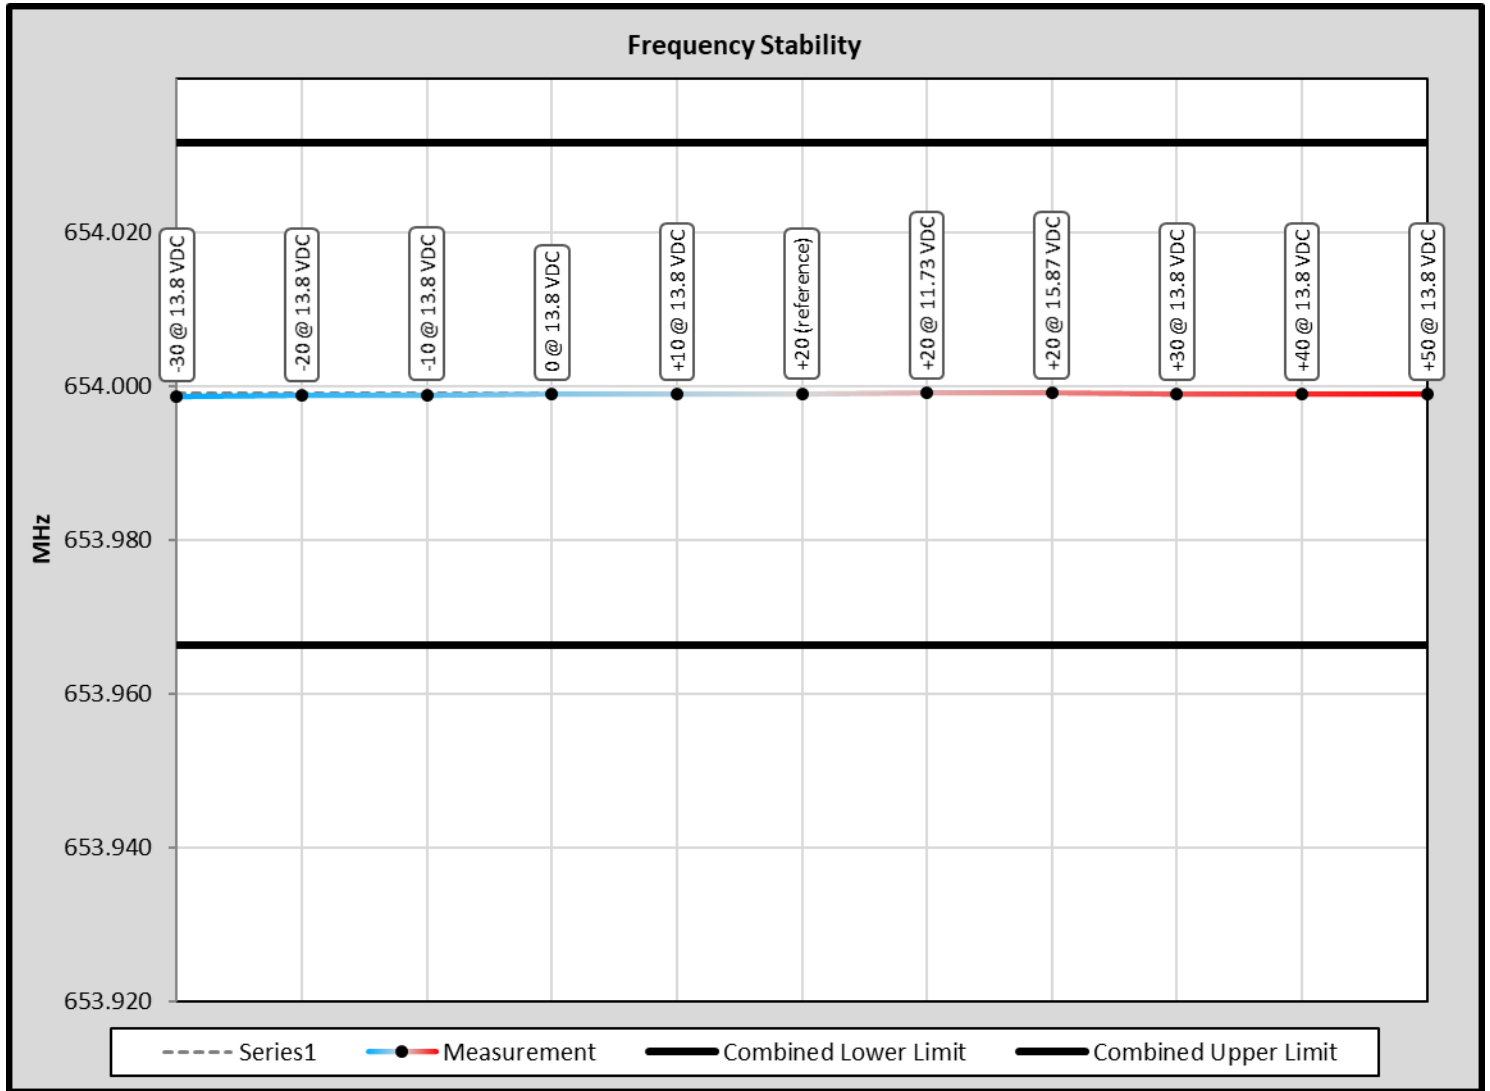

## 9. ANNEX-A - Photographs of the EUT

Photographs of the EUT and any manufacturer supplied accessories to be used with the EUT are in a separate document.

## 10. ANNEX-B – Test Setup Photographs

Test setup photographs are located in a separate document.

## 11. History of Test Report Changes

Test Report #	Revision #	Description	Date of Issue
TR_2949-21_PT 74H_1	1	Initial release	7/1/2021
TR_2949-21_PT 74H_2	2	Updated Pages 13, 42-70 & 79	8/3/2021
TR_2949-21_PT 74H_3	3	Updated page 80	8/31/2021
TR_2949-21_PT 74H_4	4	Updated page 9	9/7/2021

---

END OF TEST REPORT