

REV	INITIAL RELEASE FOR QUOTATION / PROTOTYPE PRODUCTION	DESCRIPTION	DATE	APPROVED
			4/25/01	
		ADDendum NUMBER AND CORRECTION LOCATION		4/25/01

**NOT RELEASED**

D

D

C

C


B

B

A

A

**NOT RELEASED**

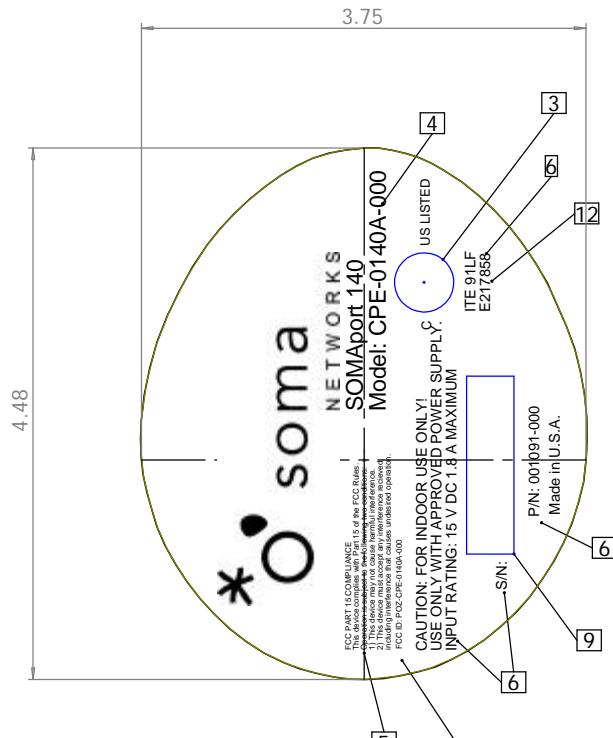

FCC ID added in this location.

1. MARK VENDOR NAME, LABEL DESIGNATION, AND SOMA NETWORKS PART NUMBER ON EACH SHEET OF LABELS.
2. BACKGROUND TO BE BLACK. LETTERING AND GRAPHICS TO BE SILVER.
3. REFER TO APPROPRIATE AGENCY LISTING MARK INFORMATION TO REPLACE REFERENCE SYMBOLS WITH APPROPRIATE REGISTERED MARKS.
4. FONT: ARIAL 14 POINT
5. FONT: ARIAL 5 POINT
6. FONT: ARIAL 9 POINT
7. LABEL CONSTRUCTION TO CONSIST OF A 0.010" THICK POLYCARBONATE LABEL STOCK WITH A 0.005" THICK 3M 468 PRESSURE SENSITIVE ADHESIVE. LABEL MUST BE A COMPONENT MARKING AND LABELING SYSTEM APPROVED BY UL AND CSA FOR THE FOLLOWING CONDITIONS:
  - INDOOR
  - TEMPERATURE RANGE: -40C TO +55C WHEN AFFIXED TO PLASTIC (HAPCO ULTRALOY 912 CAST POLYURETHANE)
8. APPROVED SOURCES OF SUPPLY: BAY AREA LABELS
9. SERIAL NUMBER LABEL TO BE AFFIXED AT INDICATED LOCATION.
10. REFERENCE DOCUMENT "SOMAPORT140 REGULATORY LABEL REV 2.AI" FOR LABEL LAYOUT.
11. REFERENCE DOCUMENT "SOMAPORT140 REGULATORY LABEL REV 2.DXF" FOR LABEL OUTLINE.
12. "ITE 91LF / E217858" AT NOTED LOCATION.

ITEM NO.	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	QTY REQ'D
PARTS LIST				
	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES	CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE		
	± XX+ XX + .1 XXX+ XXX	APPROVALS DATE		
		DRAWN A. HUDSON 6/4/01	CHECKED	
MATERIAL	XX			
		RESP. EDG. A. HUDSON 6/4/01		
NEXT ASSY	USED ON	FINISH XX	REV. 2	
			DWG. NO. 000093-000	
APPLICATION	DO NOT SCALE DRAWING	QUAL. ENG. 2	SCALE 1:1	1 OF 1

**NOT RELEASED**