


REV. COMMENT	
01	RELEASE PER EC-04714

NOTES (UNLESS OTHERWISE STATED):

1. MARK VENDOR NAME, LABEL DESIGNATION, AND SOMA NETWORKS PART NUMBER ON EACH SHEET OF LABELS.
2. BACKGROUND TO BE DARK GRAY (PANTONE COLOR 432C) LETTERING AND GRAPHICS TO BE SILVER.
3. REFER TO APPROPRIATE AGENCY LISTING MARK INFORMATION FOR PROPER REFERENCE SYMBOLS WITH APPROPRIATE REGISTERED MARKS.
4. OMITTED.
5. FONT: ARIAL 18 POINT
6. FONT: ARIAL 10 POINT
7. FONT: ARIAL 6 POINT
8. FONT: ARIAL 5 POINT
9. LABEL CONSTRUCTION TO CONSIST OF A 0.010" THICK POLYCARBONATE LABEL STOCK WITH A 0.002" THICK 3M #467 PRESSURE SENSITIVE ADHESIVE. ALTERNATE MATERIAL MAY BE USED WITH WRITTEN APPROVAL FROM SOMA ENGINEERING. MATERIAL AND ADHESIVE MUST BE ROHS COMPLIANT (EU DIRECTIVE 2002/95/EC). LABEL MUST BE A COMPONENT MARKING AND LABELING SYSTEM APPROVED BY UL AND CSA FOR THE FOLLOWING CONDITIONS:
 - A) INDOOR
 - B) TEMPERATURE RANGE: -40C TO +55C WHEN AFFIXED TO GE CYCOLOY C6200 (PC/ABS BLEND)
10. OMITTED.
11. PRINT "FCC ID: POZCPE700006553D" AT NOTED LOCATION.
12. PRINT "LISTING # E112355" AT NOTED LOCATION.
13. PLACE MET LOGO (MET1US.GIF) IN NOTED LOCATION.
14. PRINT TEXT AS SHOWN IN LOCATION SHOWN. FONT ARIAL NARROW 6 POINT.
15. OMITTED.
16. PRINT STANDARD DC SYMBOL.

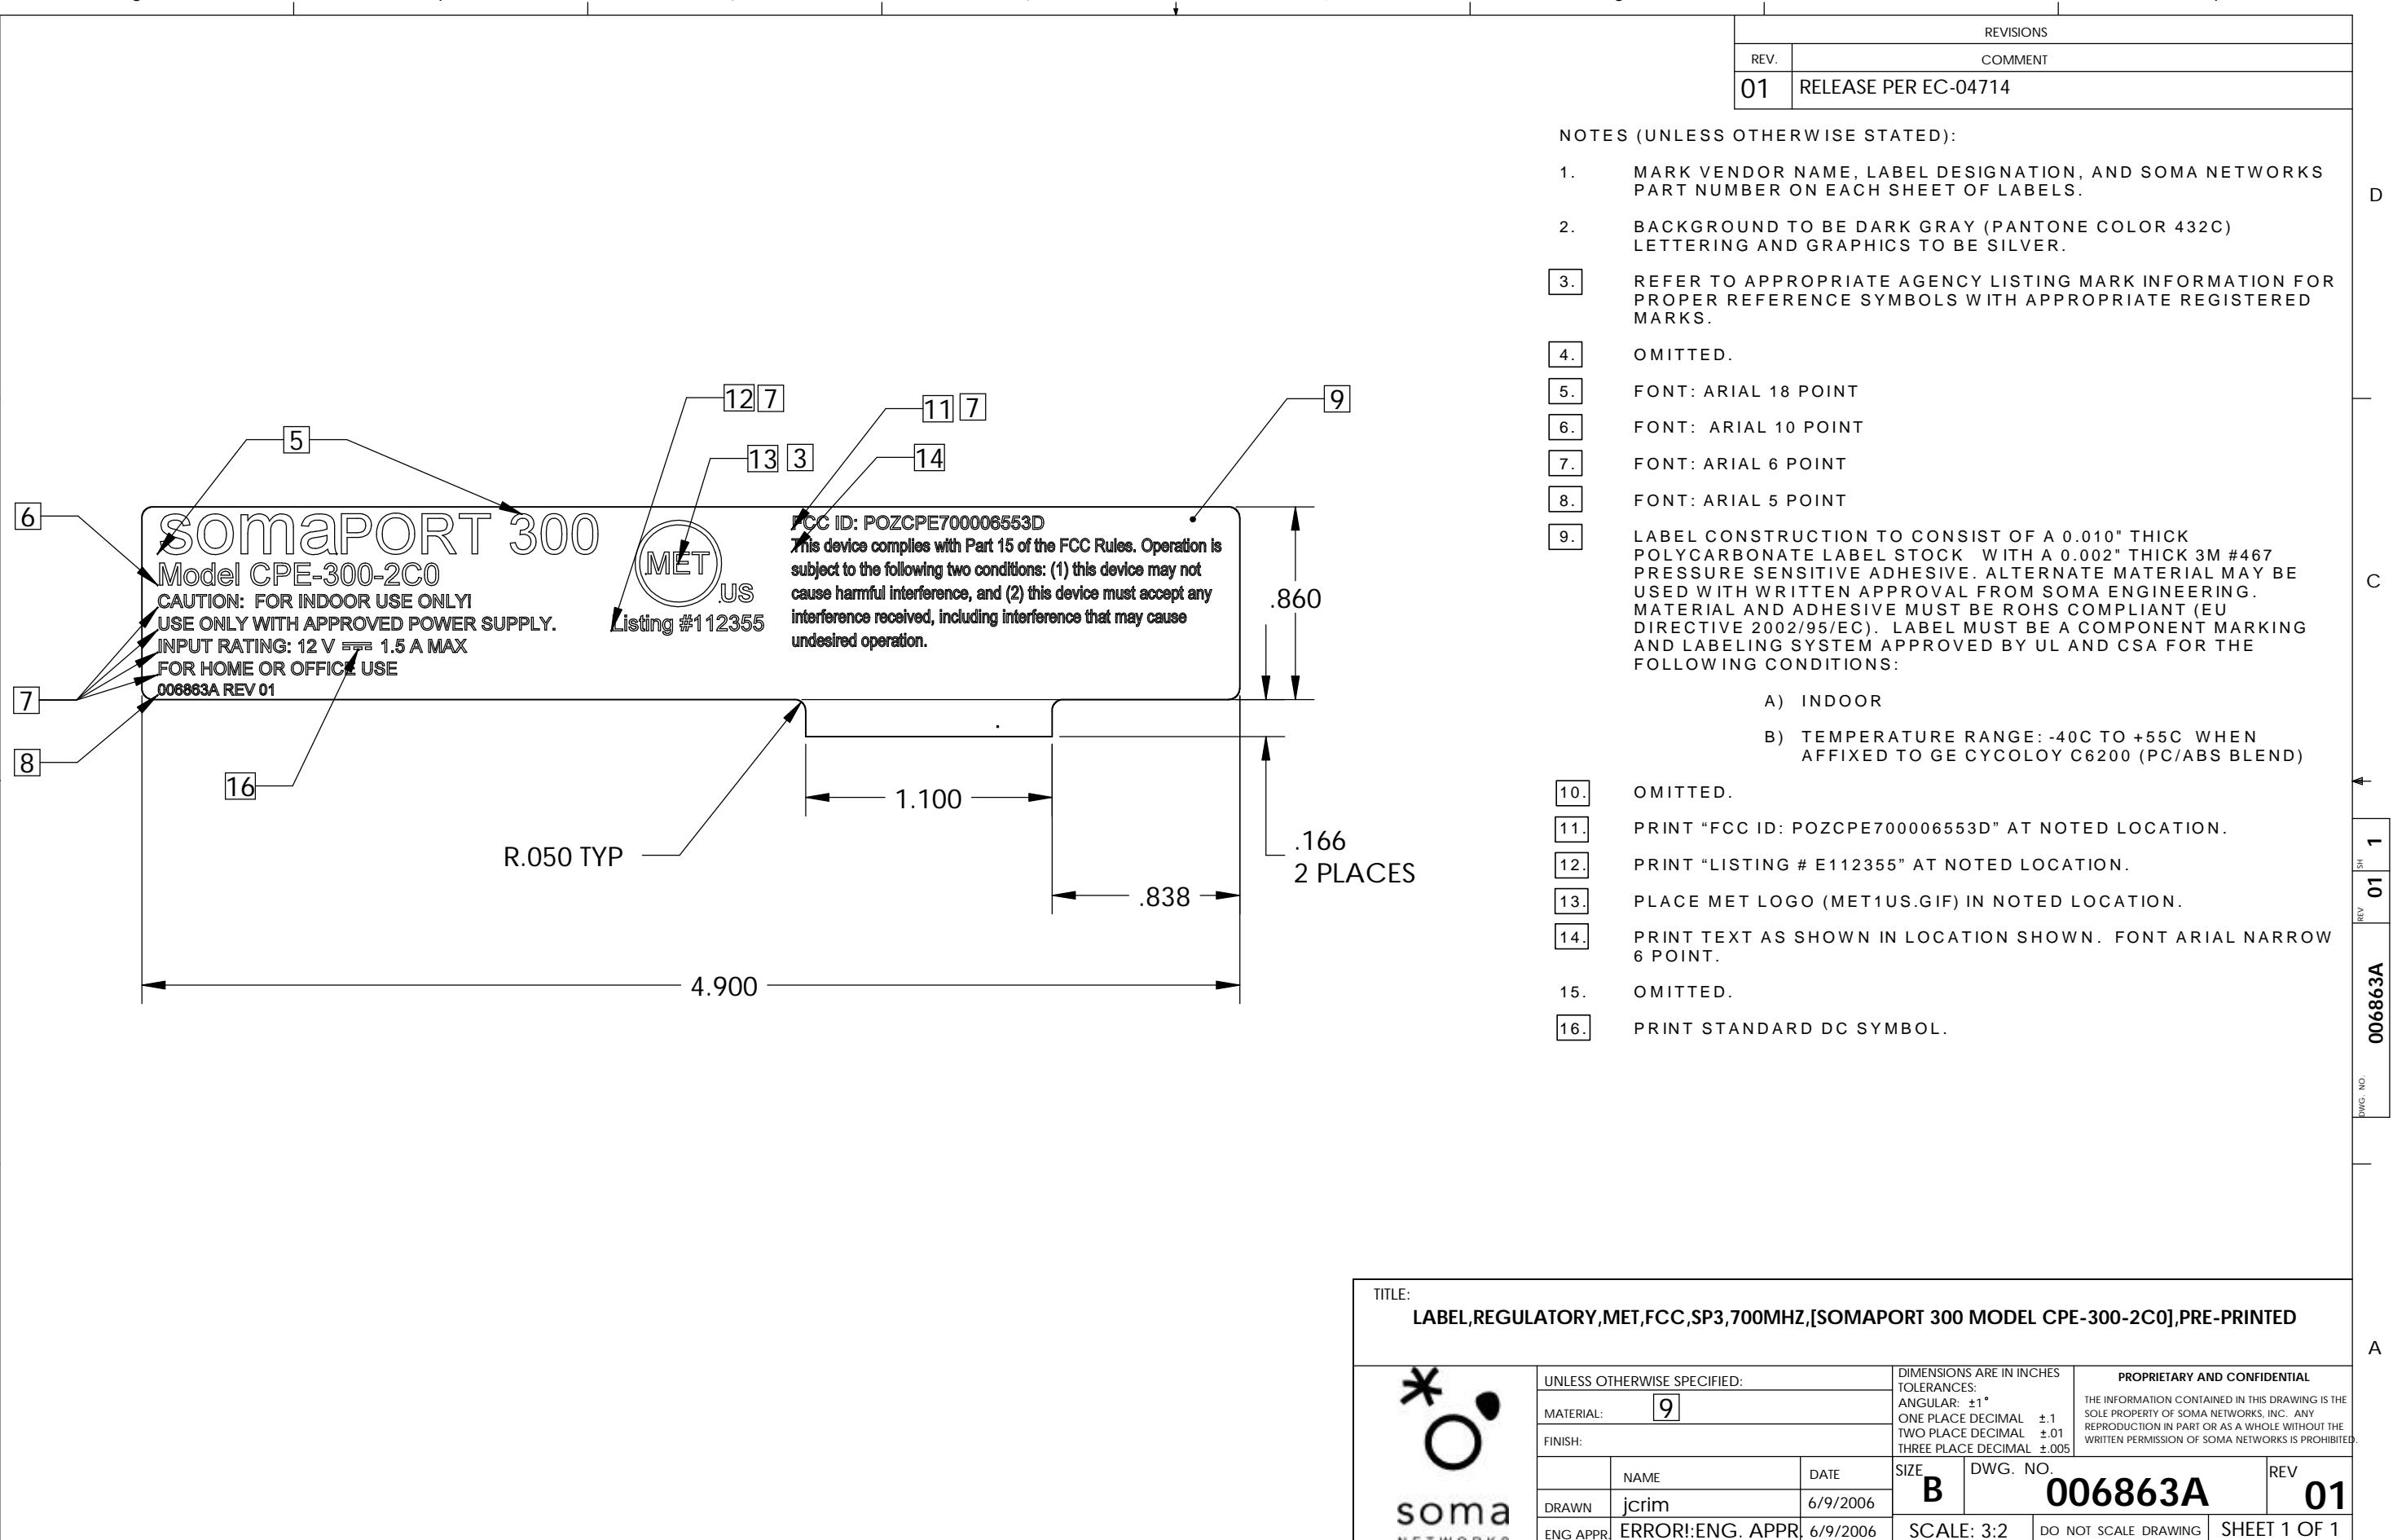


TITLE: LABEL,REGULATORY,MET,FCC,SP3,700MHZ,[SOMAPORT 300 MODEL CPE-300-2C0],PRE-PRINTED			
 soma NETWORKS	UNLESS OTHERWISE SPECIFIED:	DIMENSIONS ARE IN INCHES	PROPRIETARY AND CONFIDENTIAL
	MATERIAL: 9	TOLERANCES: ANGULAR: $\pm 1^\circ$ ONE PLACE DECIMAL $\pm .1$ TWO PLACE DECIMAL $\pm .01$ THREE PLACE DECIMAL $\pm .005$	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOMA NETWORKS, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOMA NETWORKS IS PROHIBITED.
	NAME: jcrim	DATE: 6/9/2006	SIZE: B DWG. NO: 006863A REV: 01
ENG APPR: ERROR!ENG. APPR:	6/9/2006	SCALE: 3:2	DO NOT SCALE DRAWING
			SHEET 1 OF 1


REV.	COMMENT
02	RELEASE PER EC-03618
03	RELEASE PER EC-04599; CHANGES FROM LAST REVISION ARE NOTED WITH A 

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. ASSEMBLE UNIT PER INSTRUCTIONS BELOW (NOTES 2-8):
2. PRIOR TO ASSEMBLY, PLACE EMI FOAM STRIP, ITEM 15, IN ITEM 2, BOTTOM CASE, AS SHOWN. REMOVE BACKING FROM ADHESIVE AND PRESS FIRMLY INTO PLACE.
3. TORQUE SCREW, ITEM 8, TO 8 ± 1 IN-LBS.
4. ASSEMBLE ITEMS 4 AND 5, EMI CONTACTS TO RIGHT AND LEFT, INTO PINS OF THE ITEM 2, BOTTOM CASE. PRESS DOWN UNTIL SURFACES MEET.
5. SLIDE ITEM 1, CHASSIS/PCA ASSEMBLY, INTO ITEM 2, BOTTOM CASE. FOUR HOLES IN ITEM 1 ALIGN WITH HOLES IN ITEM 2. TAKE CARE NOT TO SHEAR OFF ITEM 15. ONCE SEATED IN BOTTOM CASE, ITEM 15 MUST CONTACT EMI FOAM STRIP ON ITEM 1.
6. PLACE ITEM 3, TOP CASE, OVER ITEM 2, BOTTOM CASE. ASSEMBLE ITEM 3 TO THE ITEM 1, CHASSIS/PCA ASSEMBLY, AND ITEM 2, BOTTOM CASE, USING SCREWS, ITEMS 8 (4X).
7. PLUG RUBBER FEET, ITEMS 12 (4X), INTO HOLES IN BOTTOM OF ITEM 2. PRESS IN UNTIL SURFACES MEET.
8. PLACE ITEM 9, REGULATORY LABEL, AND ITEM 10, SERIAL NUMBER LABEL, IN DETENT ON BOTTOM OF ITEM 2. LABELS TO BE APPROXIMATELY .020 IN FROM EDGE OF LABEL DETENT AND APPROXIMATELY .060 IN FROM EACH OTHER.
9.  AFFIX LABEL, ITEM 14, ON ITEM 9, AS SHOWN.

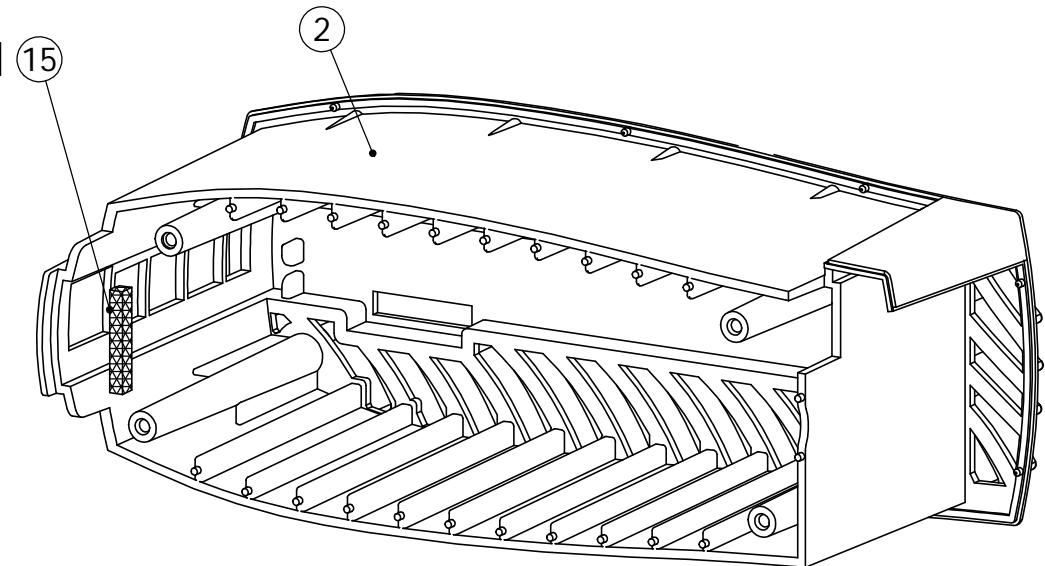


EMI FOAM STRIP, ITEM 15 TO BE PLACED
INSIDE ITEM 2, BOTTOM CASE, AS SHOWN BELOW

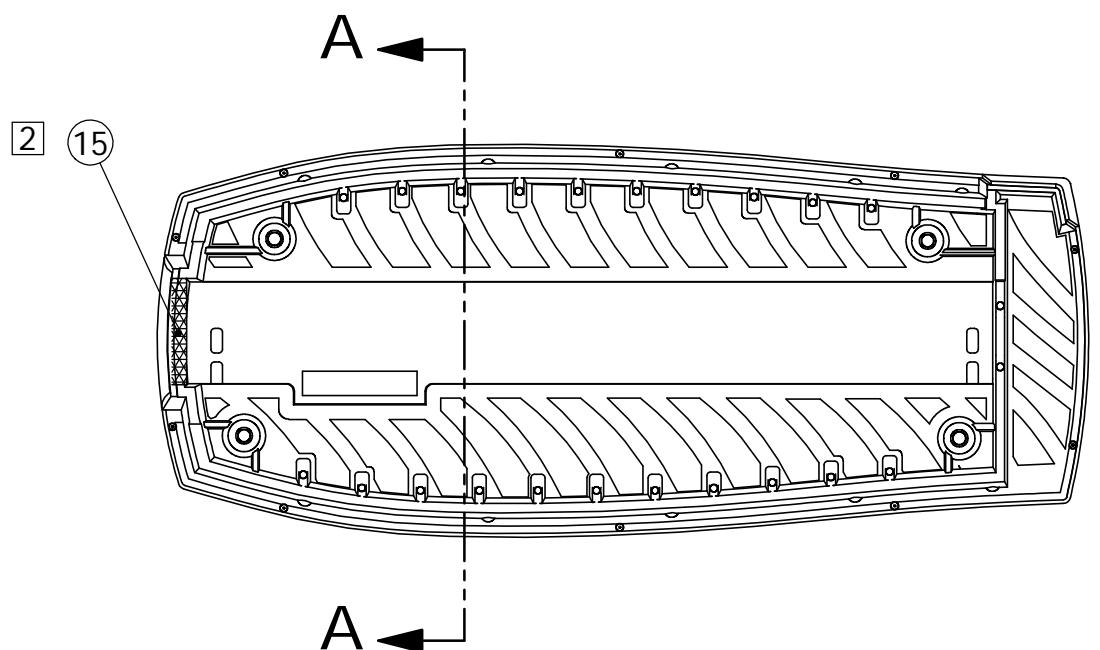

TOP VIEW OF ITEM 2, BOTTOM CASE, SHOWING
ITEM 15 INSTALLED.

ITEM 15 WITHIN .05 IN OF TOP
CUTOUT AND FLUSH WITH NOTED EDGE

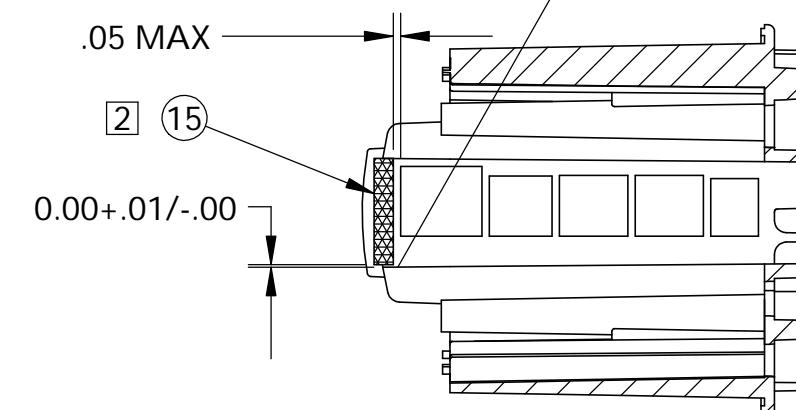

SECTION A-A
PLACEMENT OF ITEM 15

TITLE: ASSY DWG MX,SYSTEM,SP3, EMI FOAM		DIMENSIONS ARE IN INCHES		PROPRIETARY AND CONFIDENTIAL	
		UNLESS OTHERWISE SPECIFIED: MATERIAL: FINISH:		TOLERANCES: ANGULAR: $\pm 1^\circ$ ONE PLACE DECIMAL $\pm .1$ TWO PLACE DECIMAL $\pm .01$ THREE PLACE DECIMAL $\pm .005$	
SIZE	DWG. NO.	NAME	DATE	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOMA NETWORKS, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOMA NETWORKS IS PROHIBITED.	
B	ADM-000088	jcrim	5/2/2006	REV 03	
ENG APPR			5/2/2006	SCALE: 2:3	DO NOT SCALE DRAWING
SHEET 1 OF 3					

