



**MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*  
33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587-3201 • PHONE (510) 489-6300 • FAX (510) 489-6372

---

## **Electromagnetic Compatibility Criteria Test Report**

For the

**SOMA Networks  
Soma Port 300 Model CPE-300-270**

Tested under

**FCC Certification Rules  
Title 47 of the CFR, Part 27 C & D and Part 15 Subpart B for a Class B**

**MET Report: EMCS17858B-FCC27**

November 10, 2005

**Prepared For:**

**SOMA Networks  
185 Berry Street, Suite 4600  
San Francisco, California 94107**

**Prepared By:**  
**MET Laboratories, Inc.**  
33439 Western Ave.  
Union City, California 94587



SOMA Networks  
Soma Port 300 Model CPE-300-270

CFR Title 47 Part 27 Subpart C and D and Part 15 Subpart B

## Electromagnetic Compatibility Criteria Test Report

For the

**SOMA Networks  
Soma Port 300 Model CPE-300-270**

Tested Under

**FCC Certification Rules  
Title 47 of the CFR, Part 27 C & D and Part 15 Subpart B for a Class B**

A handwritten signature in black ink, appearing to read "Shawn McMillen".

Shawn McMillen, Project Engineer  
Electromagnetic Compatibility Lab

A handwritten signature in blue ink, appearing to read "Cheryl Anicete".

Cheryl Anicete  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 27 C & D and Part 15 Subpart B of the FCC Rules under normal use and maintenance.

A handwritten signature in blue ink, appearing to read "Tony Permsombut".

Tony Permsombut, Manager  
Electromagnetic Compatibility Lab



SOMA Networks  
Soma Port 300 Model CPE-300-270

CFR Title 47 Part 27 Subpart C and D and Part 15 Subpart B

## Report Status Sheet

Revision	Report Date	Reason for Revision
∅	November 10, 2005	Initial Issue.



## Table of Contents

<b>1. Testing Summary .....</b>	<b>1</b>
<b>2. Equipment Configuration.....</b>	<b>3</b>
<b>2.1. Overview .....</b>	<b>3</b>
<b>2.2. Test Site .....</b>	<b>4</b>
<b>2.3. Description of Test Sample .....</b>	<b>4</b>
<b>2.4. Equipment Configuration.....</b>	<b>5</b>
<b>2.5. Support Equipment .....</b>	<b>5</b>
<b>2.6. Ports and Cabling Information .....</b>	<b>6</b>
<b>2.7. Mode of Operation .....</b>	<b>8</b>
<b>2.8. Method of Monitoring EUT Operation .....</b>	<b>8</b>
<b>2.9. Modifications .....</b>	<b>8</b>
<b>2.9.1. Modifications to EUT .....</b>	<b>8</b>
<b>2.9.2. Modifications to Test Standard .....</b>	<b>8</b>
<b>2.10. Disposition of EUT .....</b>	<b>8</b>
<b>3. Electromagnetic Compatibility RF Power Output Requirements.....</b>	<b>9</b>
<b>3.1. RF Power Output .....</b>	<b>9</b>
<b>4. Electromagnetic Compatibility Modulation Characteristics Requirements.....</b>	<b>10</b>
<b>4.1. Modulation Characteristics .....</b>	<b>10</b>
<b>5. Electromagnetic Compatibility Occupied Bandwidth Requirements.....</b>	<b>11</b>
<b>5.1. Occupied Bandwidth.....</b>	<b>11</b>
<b>6. Electromagnetic Compatibility Emissions Requirements .....</b>	<b>14</b>
<b>6.1. Spurious Emissions at Antenna Terminals .....</b>	<b>14</b>
<b>6.2. Radiated Emissions (Substitution Method).....</b>	<b>22</b>
<b>6.3. Conducted Emission Limits .....</b>	<b>27</b>
<b>6.4. Radiated Emissions Limits.....</b>	<b>32</b>
<b>7. Electromagnetic Compatibility Frequency Stability Requirements .....</b>	<b>36</b>
<b>7.1. Frequency Stability .....</b>	<b>36</b>
<b>8. Test Equipment .....</b>	<b>37</b>
<b>9. Certification Label &amp; User's Manual Information .....</b>	<b>39</b>
<b>9.1. Certification Information .....</b>	<b>39</b>
<b>9.2. Label and User's Manual Information .....</b>	<b>43</b>
<b>10. Appendix A (Customer Supplied Documentation).....</b>	<b>44</b>



## List of Tables

Table 1. Summary of Test Results .....	1
Table 2. Equipment Configuration .....	5
Table 3. Support Equipment.....	5
Table 4. Ports and Cabling Information .....	6
Table 5: Upper Block A Vertical Polarization .....	23
Table 6: Upper Block A Horizontal Polarization .....	23
Table 7: Upper Block B Vertical Polarization.....	24
Table 8: Upper Block B Horizontal Polarization .....	24
Table 9. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b) .....	27
Table 10. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz).....	29
Table 11. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz).....	29
Table 12. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b) .....	32
Table 13. Radiated Emissions Limits Test Results .....	33
Table 14. Radiated Emissions Limits Test Results, 1 GHz to 2 GHz .....	34

## List of Figures

Figure 1. Block Diagram of Emission Test Configuration .....	7
Figure 2. Block Diagram of Maximum Average Power Output Test setup .....	9
Figure 3. Block Diagram of Occupied Bandwidth Test Setup .....	13
Figure 4. Block Diagram of Spurious Emissions at Antenna Terminals Test Setup .....	21

## List of Photographs

Photograph 1. Radiated Emissions Test Setup Photo .....	25
Photograph 2. Radiated Emissions Test Setup Photo (Substitution Method).....	26
Photograph 3. Conducted Emissions Test Setup .....	31
Photograph 4. Radiated Emission Limits Test Setup .....	35



## List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
d	Measurement Distance
dB	Decibels
dB $\mu$ V	dB micro Volts
dB $\mu$ V/m	dB micro Volt per meter
DC	Direct Current
DCF	Distance Correction Factor
E	Electric Field
EUT	Equipment Under Test
EIRP	Effective Isotropic Radiated Power
f	Frequency
FCC	Federal Communications Commission
GHz	Giga Hertz
Hz	Hertz
IEC	International Electro-technical Commission
kHz	kilohertz
kV	kilo Volt
LISN	Line Impedance Stabilization Network
MHz	Mega Hertz
RF	Radio Frequency
RMS	Root-Mean-Square
SNF	Spectrum Analyzer Noise Floor
V/m	Volts per meter



## 1.0 Testing Summary

Name of Test	FCC Rule Part/Section	Results
RF Power Output	2.1046; 27.50(a)(1)	Compliant
Modulation Characteristics	2.1047(a)	N/A - EUT is non-analog voice.
Occupied Bandwidth	2.1049	Compliant
Spurious Emissions at Antenna Terminals	2.1051; 27.53(a)(1) and (3)	Compliant
Radiated Spurious Emissions	2.1051; 27.53(a)(1) and (3)	Compliant
Frequency Stability over Temperature Variations	2.1055 (a)(1); 27.54	Compliant
Conducted Emission, Class B	15.107 (a)	Compliant
Radiated Emission Class B	15.109 (a)	Compliant

Table 1. Summary of Test Results



SOMA Networks  
Soma Port 300 Model CPE-300-270

Electromagnetic Compatibility  
Equipment Configuration  
CFR Title 47 Part 27 Subpart C and D and Part 15 Subpart B

<b>Model(s) Tested:</b>	Soma Port 300 Model CPE-300-270
<b>Model(s) Covered:</b>	Soma Port 300 Model CPE-300-270
<b>EUT Specifications:</b>	Primary Power: 110-240 VAC, 50-60 Hz to 12 VDC
	Secondary Power: Not Applicable
	Channel Spacing: 5 MHz
	Equipment Emissions Class: Class B Equipment for use as Other Than Telecom Centre Device
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.
<b>Evaluated by:</b>	Shawn McMillen



## 2.0 Equipment Configuration

### 2.1 Overview

MET Laboratories, Inc. was contracted by SOMA Networks to perform testing on the Soma Port 300 Model CPE-300-270, under SOMA Networks purchase order number 405048.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the SOMA Networks, Soma Port 300 Model CPE-300-270 .

In accordance with §2.955(a) (3), the following data is presented in support of the verification of the SOMA Networks, Soma Port 300 Model CPE-300-270. SOMA Networks should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the Soma Port 300 Model CPE-300-270 has been **permanently** discontinued, as per §2.955(b).

The results obtained relate only to the item(s) tested.

<b>Rule Part:</b>	Certification / Part 27 Subpart C
<b>EUT:</b>	Soma Port 300 Model CPE-300-270
<b>FCC ID:</b>	POZCPEWCS005239B
<b>Equipment Code:</b>	TNB
<b>Emissions Designator:</b>	4M15D7D
<b>RF Power Output:</b>	Output Power at antenna port: Lower Block A: 26.4 dBm (0.437W) Lower Block B: 26.7 dBm (0.468mW)
<b>Frequency Range (MHz):</b>	Lower Block A: 2305 – 2310 MHz Lower Block B: 2310 – 2315 MHz
<b>Frequency Stability:</b>	stays within the authorized bands of operation



## 2.2 Test Site

All testing was performed at MET Laboratories, Inc., 4855 Patrick Henry Drive, Building 6, Santa Clara, California 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a semi-anechoic chamber. In accordance with §2.948(a) (3), a complete site description is contained at MET Laboratories. In accordance with §2.948(d), MET Laboratories has been accredited by the National Voluntary Laboratory Accreditation Program (Lab Code: 100273-0).

## 2.3 Description of Test Sample

The CPE 300-270 (Soma Port Subscriber Terminal), Equipment Under Test (EUT), is a wireless terminal that is designed to provide wireless network access in a residence as well as two phone lines.



## 2.4 Equipment Configuration

The EUT was set up as outlined in Figure 1. All equipment incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Part Number	Serial Number	Rev. #
A	Wireless Router (Digital board/ RF Module)	CPE 300-270	005239B	11051702AD	N/A

**Table 2. Equipment Configuration**

## 2.5 Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number	*Customer Supplied Calibration Data
B	Desktop	HP	Pavilion 7840	N/A
C	Phone	Sprint	SP-904	N/A
D	Phone	AT&T	210	N/A
E	AC-DC Power Supply	SOMA Network	UP04821120B	N/A
F	Printer	Epson	Stylus c60	N/A
G	Monitor	Mitsubishi	Diamond Plus 91	N/A
H	Keyboard	HP	5185-1596	N/A
I	Mouse	HP	5185-2413	N/A
J	Spectrum Analyzer	HP	8566B	N/A
K	Laptop	IBM	Think Pad 570	N/A
L	Multi-Phone Controller	Radio Shack	43-2208	N/A
M	TIMS	Convex	807A	N/A


**Table 3. Support Equipment**



## 2.6 Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded (Yes/No)	Termination Box ID & Port ID
Emission Testing						
1	A, DC Power Input	16 AWG cable	1	2	No	E
2	A, Phone 2	RJ11	1	2	No	D, Line in
3	A, Phone 1	RJ11	1	2	No	C, Line in
4	A, USB	USB cable	1	1	Yes	Unterminated
5	A, 10/100 Ethernet	RJ45,10/100 Ethernet Cable	1	2	No	B, 10/100
Immunity Testing						
1	A, DC Power Input	16 AWG cable	1	2	No	E
2	A, Phone 1	RJ11	1	2	No	L
3	A, 10/100 Ethernet	RJ45,10/100 Ethernet Cable	1	2	No	K
4	A, Antenna Port	Coax (SMA)	1	0.3	Yes	J

**Table 4. Ports and Cabling Information**

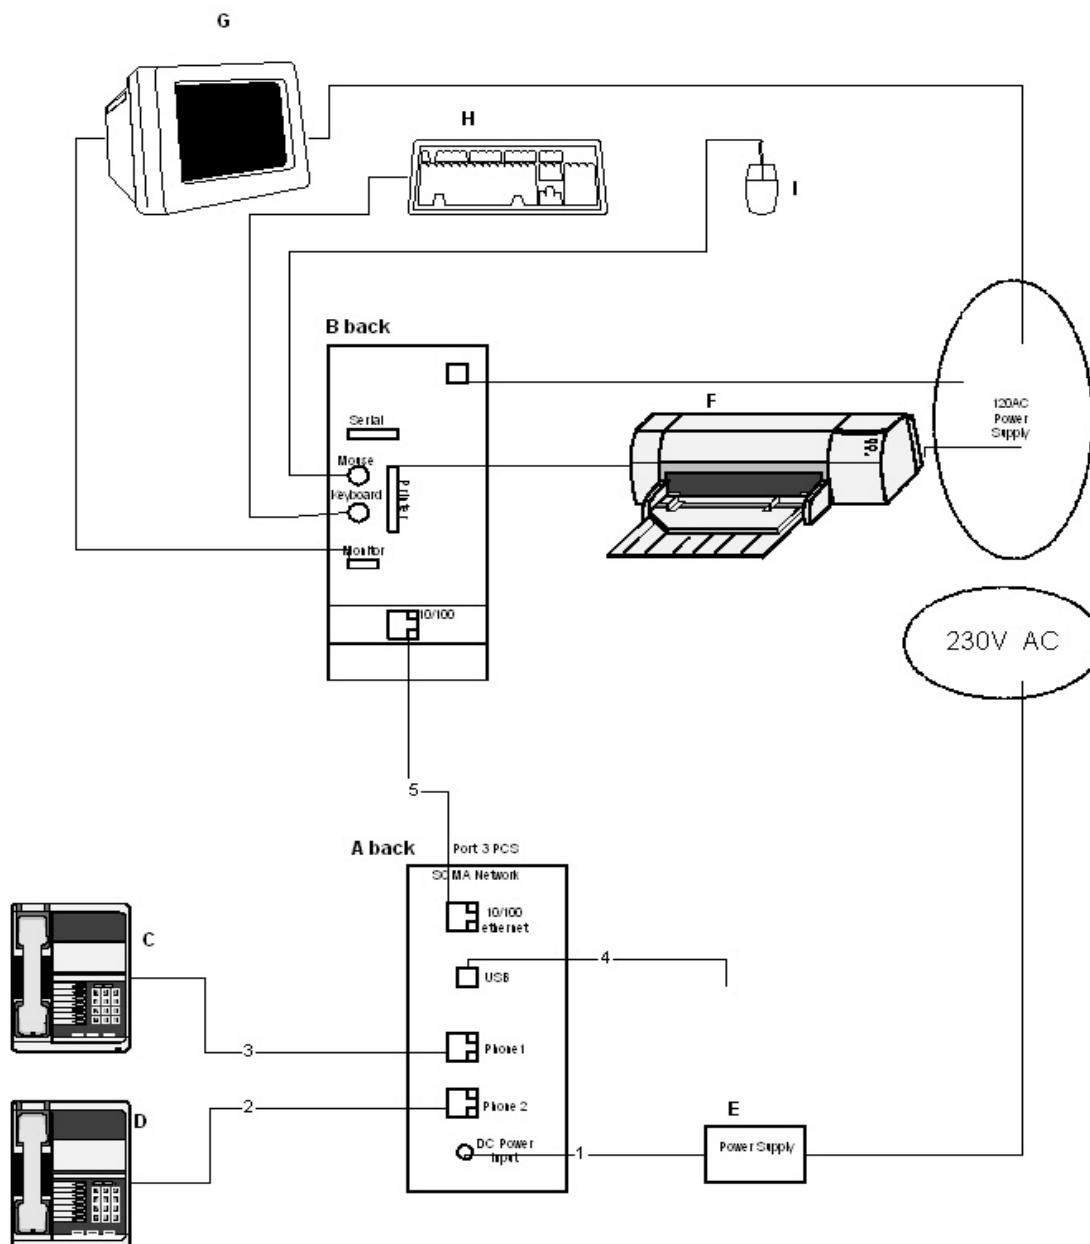**Emission Testing**

**Figure 1. Block Diagram of Emission Test Configuration**



## 2.7 Mode or Operation

The EUT was normally placed close to a computer connected via Ethernet or USB.

## 2.8 Method of Monitoring EUT Operation

SNMP & Proprietary software

## 2.9 Modifications

### 2.9.1 Modifications to the EUT

No modifications were made to the EUT.

### 2.9.2 Modifications to the Test Standard

No modifications were made to the test standard.

## 2.10 Disposition of EUT

The test sample including all support equipment (if any), submitted to the Electro-Magnetic Compatibility Lab for testing was returned to SOMA Networks upon completion of testing.



### 3.0 Electromagnetic Compatibility RF Power Output Requirements

#### 3.1 RF Power Output

**Test Requirement(s):** §2.1046 and §27.50(a)(1)

**Test Procedures:** As required by 47 CFR 2.1046, *RF power output measurements* were made at the RF output terminals using a Power Meter with a Power Sensor capable of measuring a modulated carrier.

**Test Results:** The EUT was found compliant with 47CFR 2.1046 and 27.50(a) (2). The Soma Port 300 Model CPE-300-270 does not exceed 20 Watts peak (EIRP) at the carrier frequency.


All RF Power output measurements were direct connection to RF output Terminal of EUT.

The following page show measurements of RF Power output which is recorded below:

Frequency Range (MHz)	Output Power (dBm)	Output Power (mW)
2305-2310	26.4	436.5
2310-2315	26.7	467.7

**Test Engineer(s):** Shawn McMillen

**Test Date(s):** October 31, 2005



**Figure 2. Block Diagram of Maximum Average Power Output Test setup**



SOMA Networks  
Soma Port 300 Model CPE-300-270

Electromagnetic Compatibility  
Modulation Characteristics Requirements  
CFR Title 47 Part 27 Subpart C and D and Part 15 Subpart B

## 4.0 Electromagnetic Compatibility Modulation Characteristics Requirements

### 4.1 Modulation Characteristics

**Test Requirement(s):** §2.1047

**Test Procedures:** As required by 47 CFR 2.1047, Modulation Characteristics measurements were made at the RF output terminals.

**Test Results:** EUT is not required for this test since it has no analog voice.



## 5.0 Electromagnetic Compatibility Occupied Bandwidth Requirements

### 5.1 Occupied Bandwidth

**Test Requirement(s):** §2.1049


**Test Procedures:** As required by 47 CFR 2.1049, the occupied bandwidth measurements were made at the RF output terminals using a Spectrum Analyzer.

**Test Results:** The EUT was found compliant with Section 2.1049. The following pages show measurements of 99% Occupied Bandwidth plots:


WCS Block A and B	
Plot #	Comment
1	Upper Block A: 99% Occupied Bandwidth at center frequency of 2307.5 MHz
2	Upper Block B: 99% Occupied Bandwidth at center frequency of 2312.5 MHz

**Test Engineer(s):** Shawn McMillen

**Test Date(s):** October 31, 2005

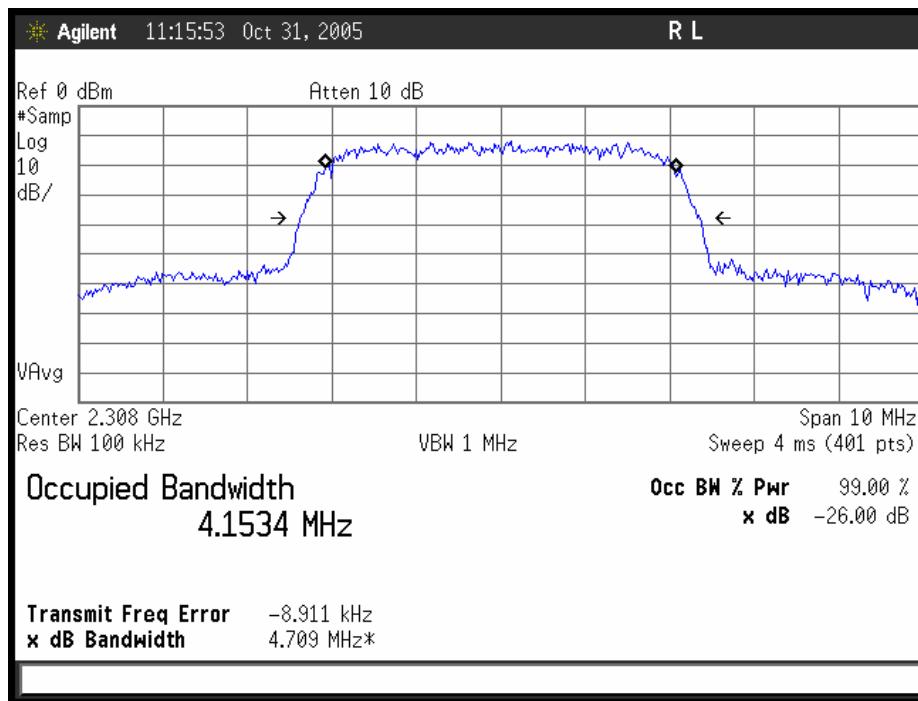

Plot 1. Lower Block A 99% Occupied BW

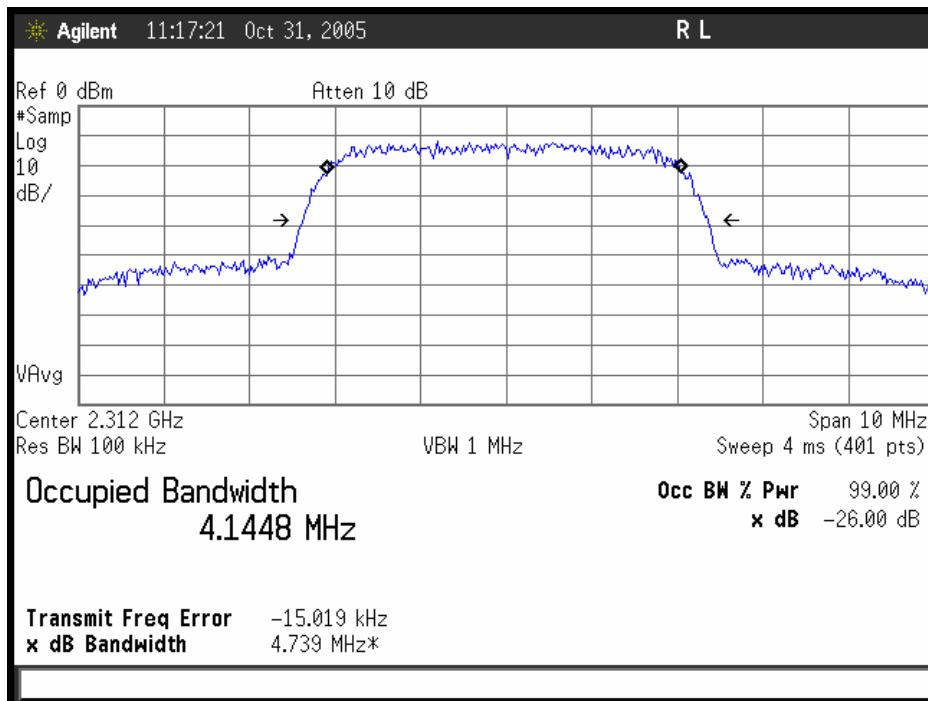


Plot 2. Lower Block B 99% Occupied BW



SOMA Networks  
Soma Port 300 Model CPE-300-270

Electromagnetic Compatibility  
Occupied Bandwidth Requirements  
CFR Title 47 Part 27 Subpart C and D and Part 15 Subpart B

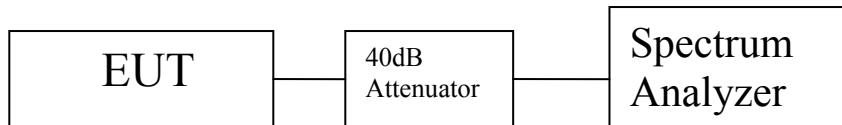

**Figure 3. Block Diagram of Occupied Bandwidth Test Setup**



## 6.0 Electromagnetic Compatibility Emissions Requirements

### 6.1 Spurious Emissions at Antenna Terminals

**Test Requirement(s):** §2.1051 and §27.53(a) (1) and (3)

**Test Procedures:** As required by 47 CFR 2.1051, *spurious emissions at antenna terminal measurements* were made at the RF output terminals using a Spectrum Analyzer.

The Spectrum Analyzer was set to  $RBW = VBW = 1\text{MHz}$ . The EUT was set to transmit in the operating frequency range. Frequencies were swept from 30 MHz to the 10<sup>th</sup> harmonic of the fundamental. Measurements were carried out for both Lower A and B blocks. Only emissions  $<20\text{dBc}$  needed to be reported.

Measured maximum average output power of the EUT at antenna port: 26.7dBm or 0.4677W.

Emission Limit between 2320 - 2345 MHz:  $80 + 10 \log (P) \text{ dB}$   
 $P_o - (80 + 10 \log (0.4677)) = 26.7\text{dBm} - (76.7\text{dB}) = -50\text{dBm}$

Emission Limit below 2300 MHz and above 2370 MHz:  $70 + 10 \log (P) \text{ dB}$   
 $P_o - (70 + 10 \log (0.4677)) = 26.7\text{dBm} - (66.7\text{dB}) = -40 \text{ dBm}$


Emission Limit between 2300 - 2320 MHz and 2345 - 2370 MHz:  $43 + 10 \log (P) \text{ dB}$   
 $P_o - (43 + 10 \log (0.4677)) = 26.7\text{dBm} - (39.7\text{dB}) = -13\text{dBm}$

**Test Results:** The EUT was found compliant with Section 2.1051 and 27.53(a) (1) and (3). The following pages show measurements of Spurious Emission plots

The following analysis and plots are included below to illustrate compliance with the required rule parts.


**Test Engineer(s):** Shawn McMillen


**Test Date(s):** October 31, 2005

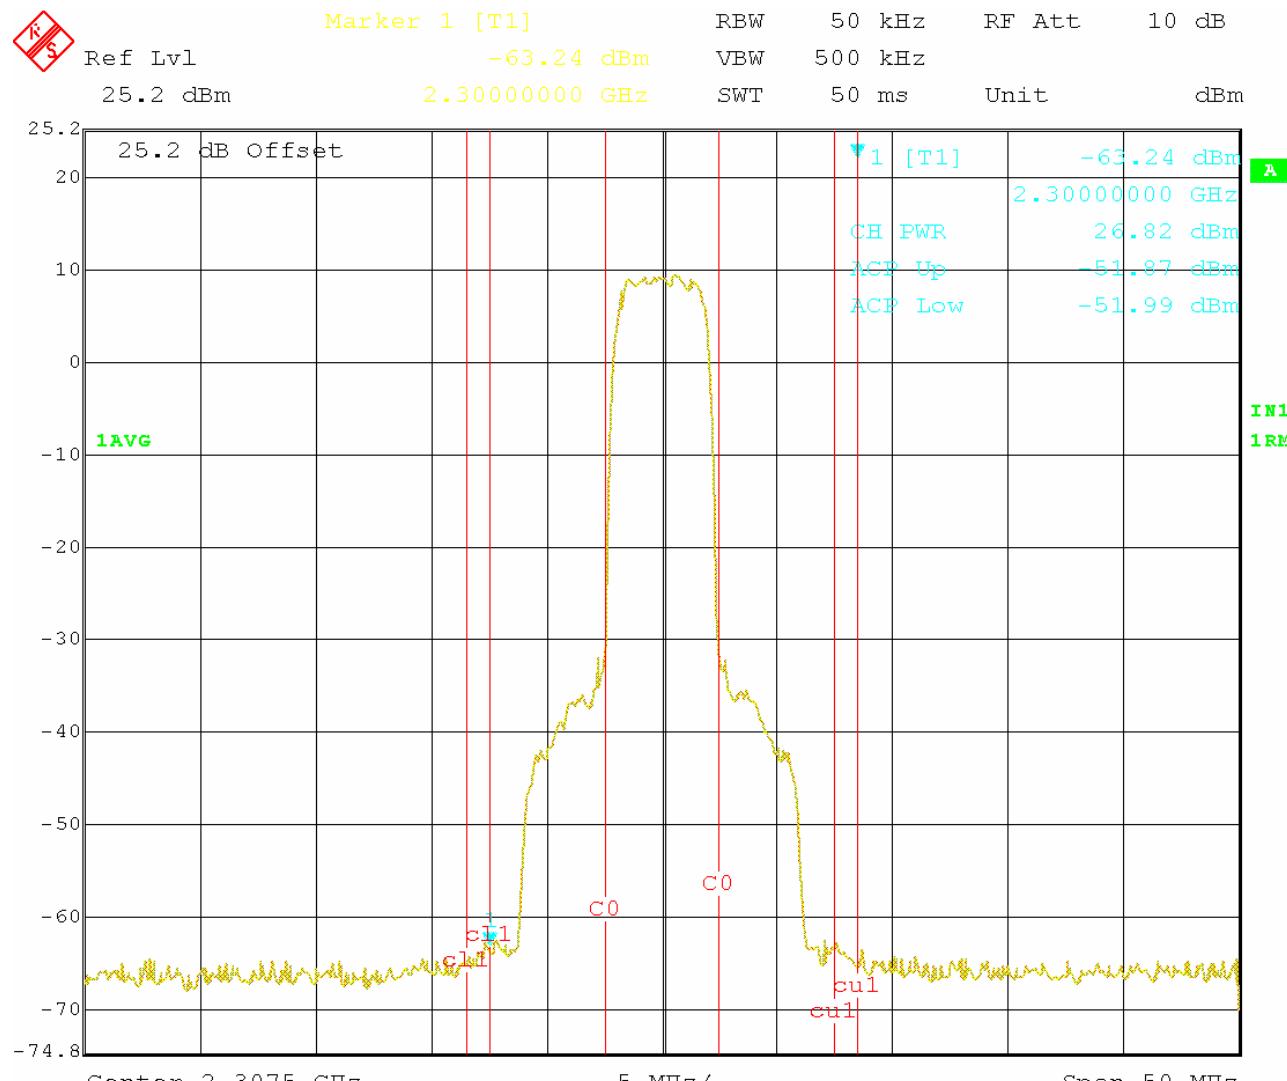


Date: 31.OCT.2005 11:56:46

**Plot 3: Lower Block A Band Edge and in-band emissions**

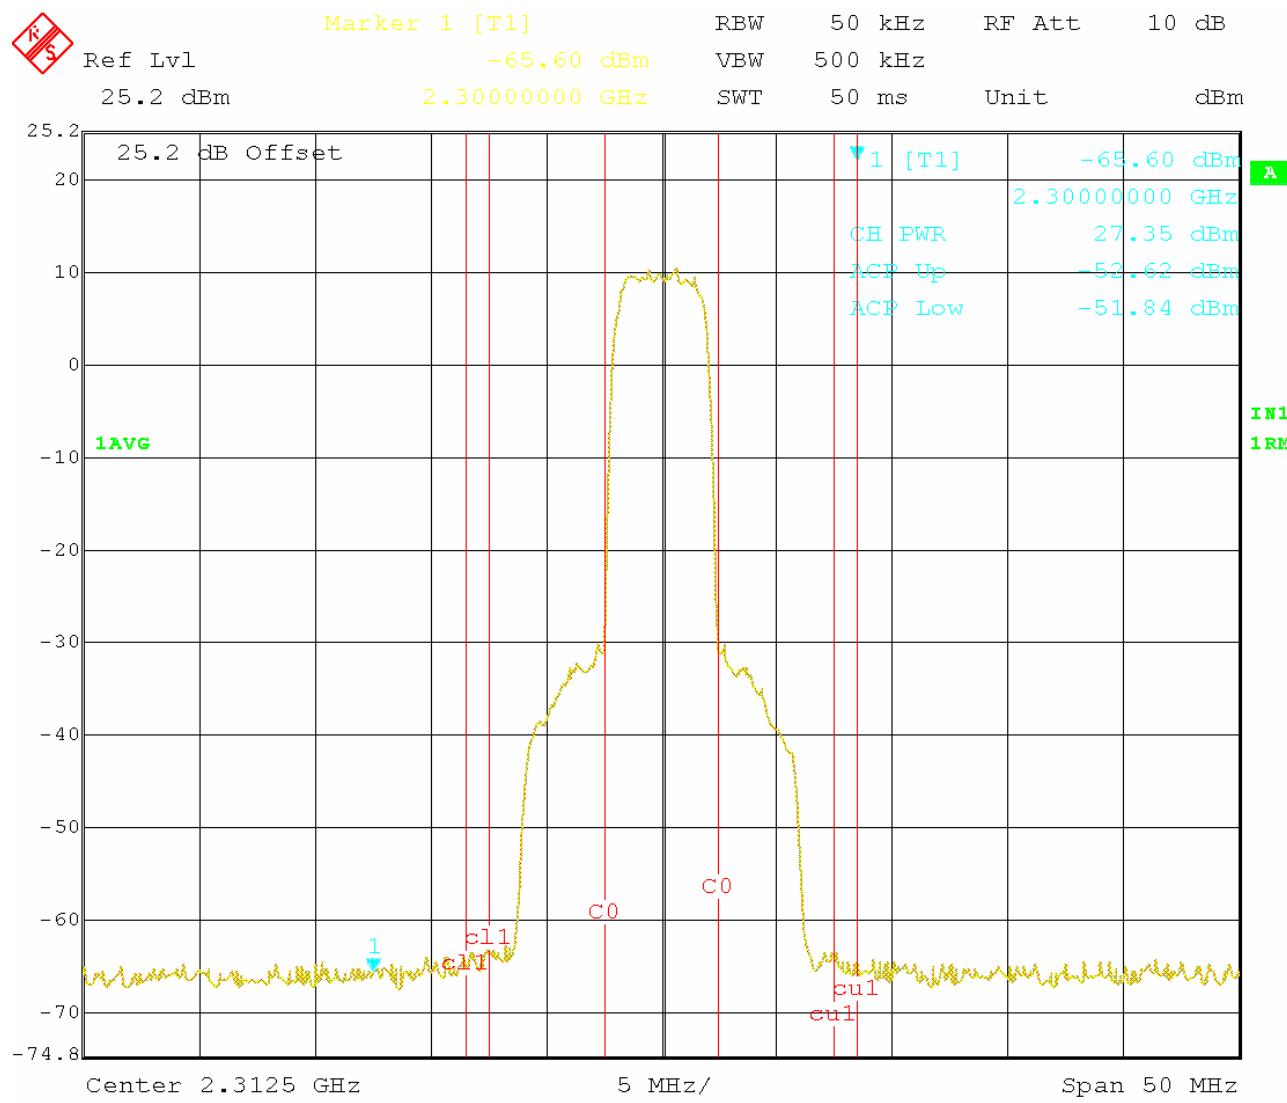

**Plot 4: Lower Block B Band Edge in-band Emissions**

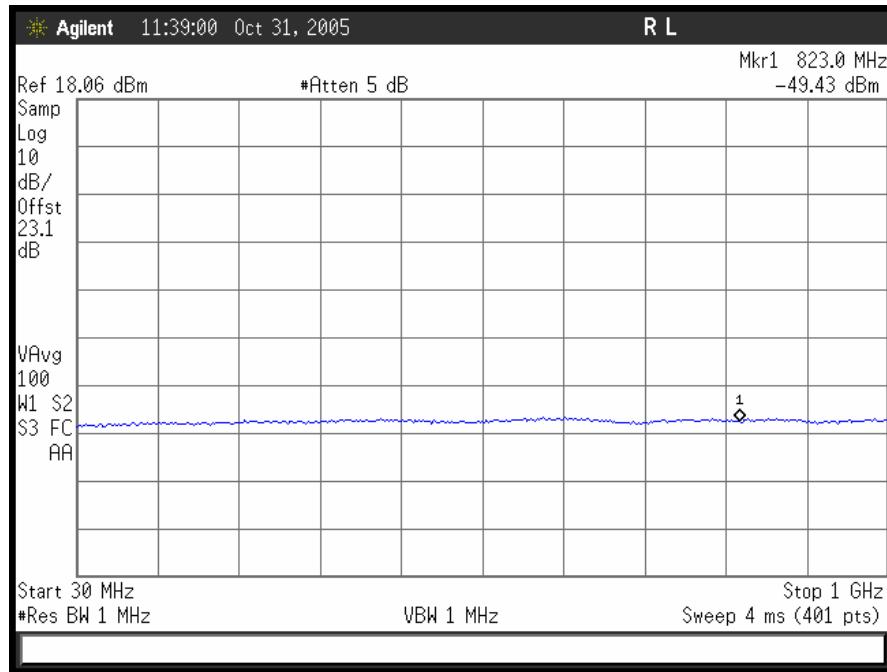


Plot 5: Lower Block A Spurious Emission 30MHz – 1 GHz

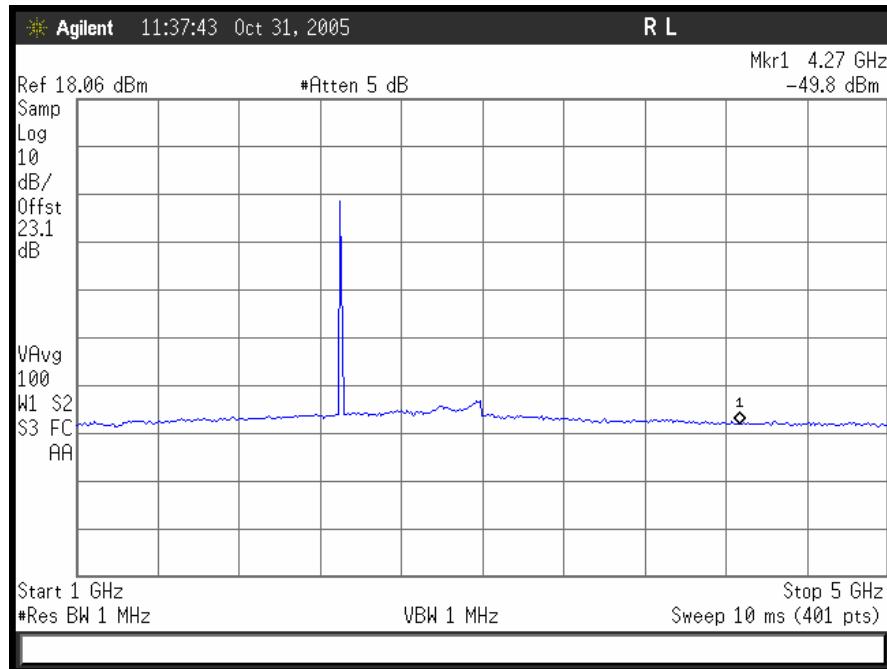


Plot 6: Lower Block A Spurious Emission 1 – 5GHz

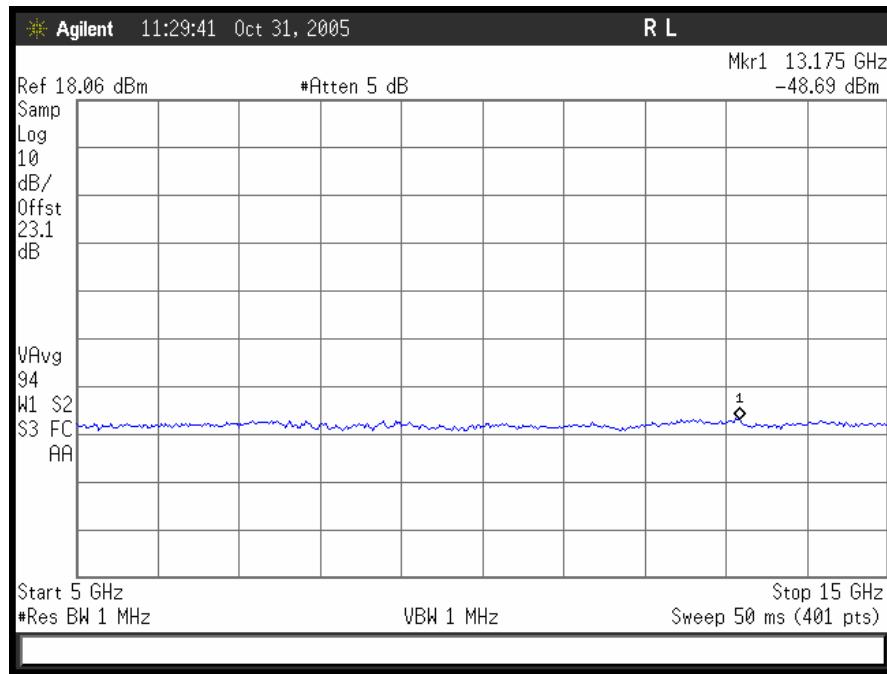


**Plot 7: Lower Block A Spurious Emission 5 - 15GHz**

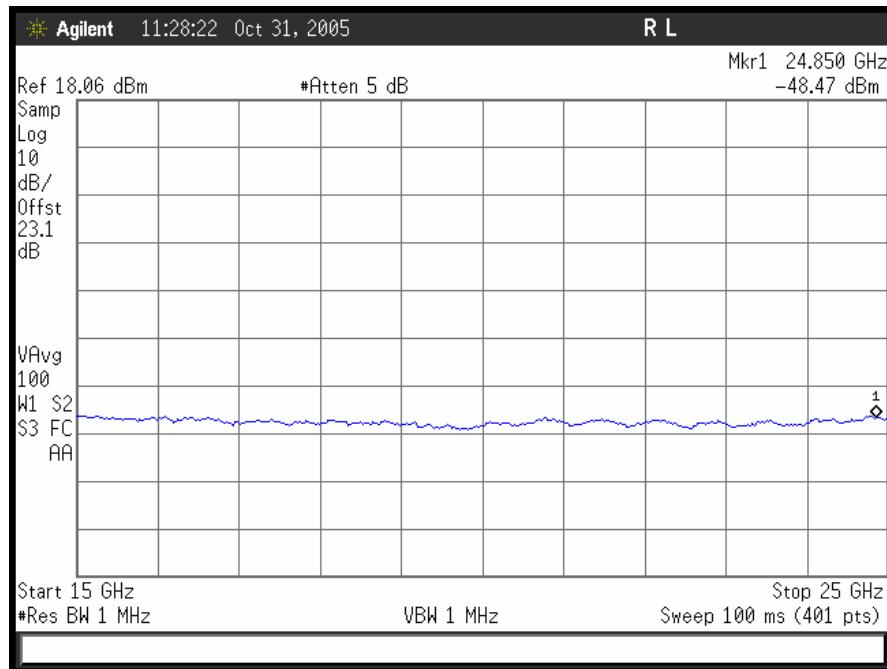

**Plot 8: Lower Block A Spurious Emission 15 - 25GHz**

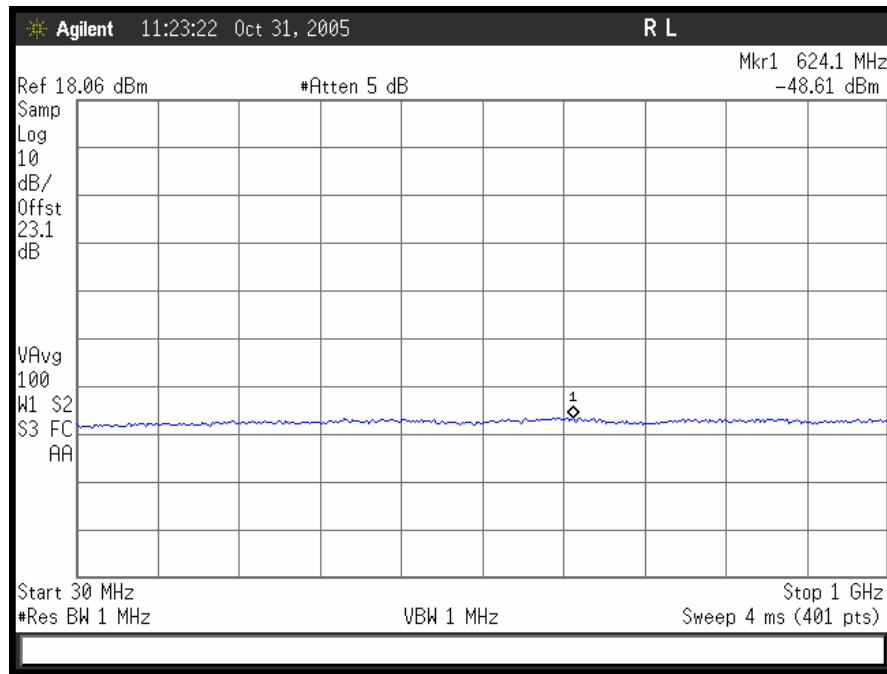

Plot 9: Lower Block B Spurious Emission 30 MHz – 1 GHz

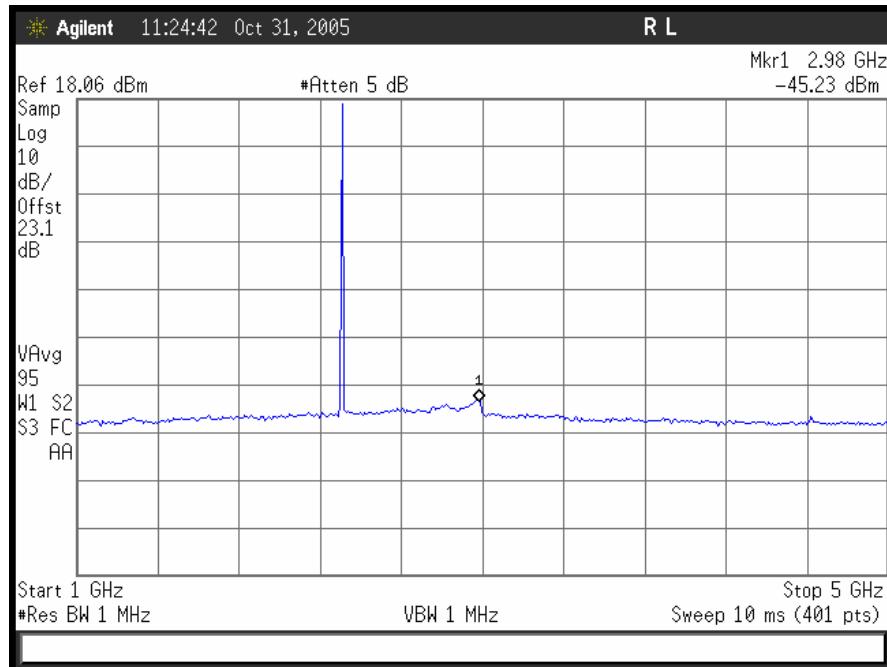


Plot 10: Lower Block B Spurious Emission 1 -5GHz




SOMA Networks  
Soma Port 300 Model CPE-300-270

Electromagnetic Compatibility  
Emissions Requirements  
CFR Title 47 Part 27 Subpart C and D and Part 15 Subpart B

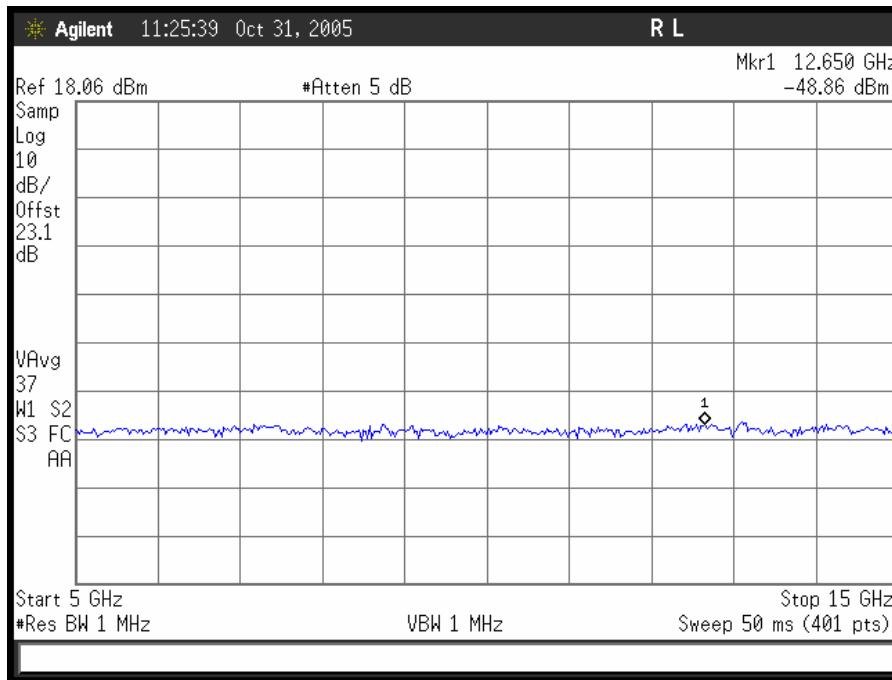

Plot 11: Lower Block B Spurious Emission 5 -15GHz

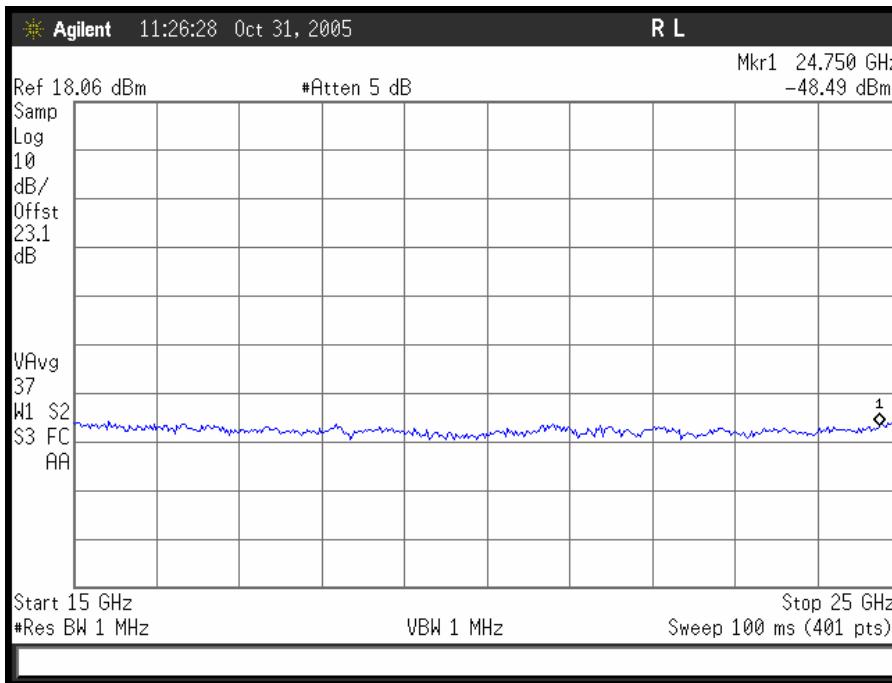


Plot 12: Lower Block B Spurious Emission 15-25GHz



SOMA Networks  
Soma Port 300 Model CPE-300-270

Electromagnetic Compatibility  
Emissions Requirements  
CFR Title 47 Part 27 Subpart C and D and Part 15 Subpart B



**Figure 4. Block Diagram of Spurious Emissions at Antenna Terminals Test Setup**



## 6.2 Radiated Emissions (Substitution Method)

**Test Requirement(s):** §2.1053 and §27.53(a)(3)

**Test Procedures:** As required by 47 CFR 2.1053, the *field strengths of radiated spurious emissions* were made in accordance with the procedures of TIA/EIA-603-A-2001 "Land Mobile FM or PM Communications Equipment Measurement and Performance Standards".

Radiated emission measurements were performed inside a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). The distance between the EUT and the test antenna was 3 meter. The EUTs RF port was connected to a dummy load. The EUT was set to transmit at its designated operating frequency range and at its maximum output power level. The intensities of the radiated emissions were maximized by rotating the turntable 360 degrees and varying the receive antenna from 1 to 4m. Measurements were made with the receive antenna in both horizontal and vertical polarizations.

In order to determine the magnitude of the radiated emissions, a calibrated antenna source was positioned in place of the EUT and fed with a modulated carrier equal to that of the EUT. The effective isotropic radiated power of each emission was determined by adding the forward power to the substitution antenna at the previously recorded amplitude, and adding the gain of the antenna at the given frequency.

The Radiated Spurious Emissions *Limit* is obtained by the following:

Emission Limit below 2300 MHz and above 2370 MHz:  $70 + 10 \log (P) \text{ dB}$   
 $P_o - (70 + 10 \log 5) = 37 \text{ dBm} - (77 \text{ dB}) = -40 \text{ dBm}$

**Test Results:** The EUT was found compliant with Section 2.1053 and 27.53(a)(3). The following pages show measurements of emissions data sheet which are recorded below:



Frequency (MHz)	Polarization V/H	Spectrum Analyzer (dB/m) AVG	Signal Generator Pwr (dBm)	Tx Ant. Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
4705.0	V	SNF	-	9.7	-	-40	-
7057.5	V	SNF	-	10.4	-	-40	-
9410	V	SNF	-	11.2	-	-40	-
11762.5	V	SNF	-	10.8	-	-40	-
14115	V	SNF	-	10.9	-	-40	-
16467.5	V	SNF	-	14.3	-	-40	-
18820	V	SNF	-	-	-	-40	-
21172.5	V	SNF	-	-	-	-40	-
23525	V	SNF	-	-	-	-40	-

Table 5: Upper Block A Vertical Polarization

Frequency (MHz)	Polarization V/H	Spectrum Analyzer (dB/m) AVG	Signal Generator (dBm)	Tx Ant. Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
4705.0	H	SNF	-	9.7	-	-40	-
7057.5	H	SNF	-	10.4	-	-40	-
9410.0	H	SNF	-	11.2	-	-40	-
11762.5	H	SNF	-	10.8	-	-40	-
14115.0	H	SNF	-	10.9	-	-40	-
16467.5	H	SNF	-	14.3	-	-40	-
18820.0	H	SNF	-	-	-	-40	-
21172.5	H	SNF	-	-	-	-40	-
23525.0	H	SNF	-	-	-	-40	-

Table 6: Upper Block A Horizontal Polarization

**Note:** V = vertical, H = horizontal, and SNF = Spectrum Analyzer noise floor

All harmonic emissions measured were at the noise floor of the spectrum analyzer which was >-65dBm with a VBW and RBW = 1MHz



Frequency (MHz)	Polarization V/H	Spectrum Analyzer (dB/m) AVG	Signal Generator (dBm)	Cable Loss (dB)	Tx Ant. Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
4715.0	V	SNF	-	1.6	9.7	-	-40	-
7072.5	V	SNF	-	2.1	10.4	-	-40	-
9430.0	V	SNF	-	2.6	11.2	-	-40	-
11787.5	V	SNF	-	2.9	10.8	-	-40	-
14145.0	V	SNF	-	3.3	10.9	-	-40	-
16502.5	V	SNF	-	3.7	14.3	-	-40	-
18860.0	V	SNF	-	-	-	-	-40	-
21217.5	V	SNF	-	-	-	-	-40	-
23575.0	V	SNF	-	-	-	-	-40	-

Table 7: Upper Block B Vertical Polarization

Frequency (MHz)	Polarization V/H	Spectrum Analyzer (dB/m) AVG	Signal Generator (dBm)	Cable Loss (dB)	Tx Ant. Gain (dBi)	EIRP (dBm)	Limit (dBm)	Margin (dB)
4715.0	H	SNF	-	1.6	9.7	-	-40	-
7072.5	H	SNF	-	2.1	10.4	-	-40	-
9430.0	H	SNF	-	2.6	11.2	-	-40	-
11787.5	H	SNF	-	2.9	10.8	-	-40	-
14145.0	H	SNF	-	3.3	10.9	-	-40	-
16502.5	H	SNF	-	3.7	14.3	-	-40	-
18860.0	H	SNF	-	-	-	-	-40	-
21217.5	H	SNF	-	-	-	-	-40	-
23575.0	H	SNF	-	-	-	-	-40	-


Table 8: Upper Block B Horizontal Polarization

**Note:** V = vertical, H = horizontal, and SNF = Spectrum Analyzer noise floor


All harmonic emissions measured were at the noise floor of the spectrum analyzer which was >-65dBm with a VBW and RBW = 1MHz

**Test Engineer(s):** Shawn McMillen

**Test Date(s):** October 20, 2005

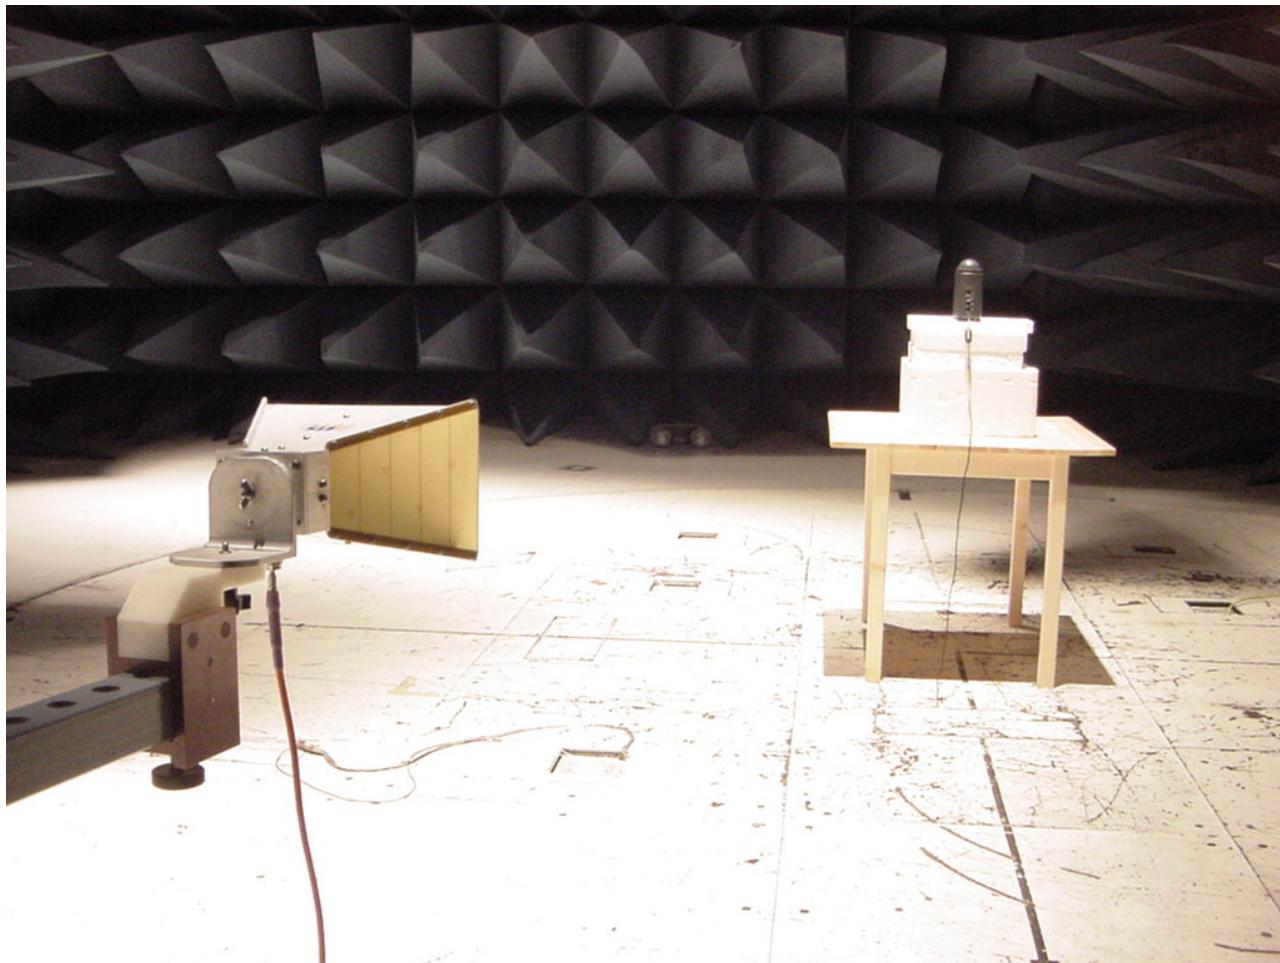

**Photograph 1. Radiated Emissions Test Setup Photo**

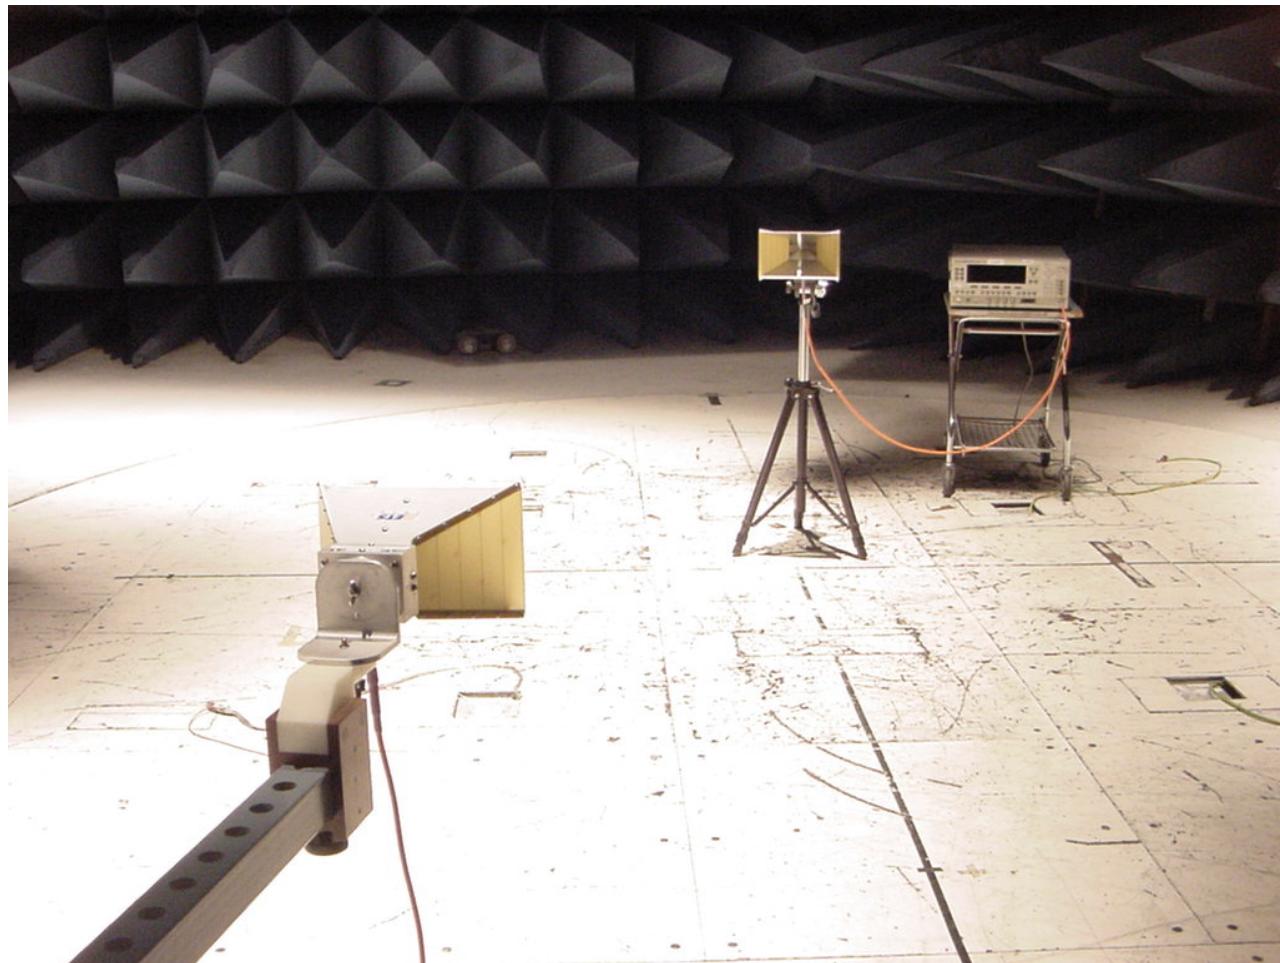

**Photograph 2. Radiated Emissions Test Setup Photo (Substitution Method)**



### 6.3 Conducted Emission Limits

**Test Requirement(s):** **15.107 (a)** “Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in . Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.”

**15.107 (b)** “For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in . Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.”

Frequency range (MHz)	15.107(b), Class A Limits (dB $\mu$ V)		15.107(a), Class B Limits (dB $\mu$ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
* 0.15- 0.5	79	66	66 - 56	56 - 46
0.5 – 5.0	73	60	56	46
5.0 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.  
Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.  
\* — The FCC issued a Recommended Opinion and Order (RO&O) 989-80 in May 2002, providing transition into the emission limits and frequency ranges shown above.

**Table 9. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b)**



SOMA Networks  
Soma Port 300 Model CPE-300-270

Electromagnetic Compatibility  
Emissions Requirements  
CFR Title 47 Part 27 Subpart C and D and Part 15 Subpart B

**Test Procedures:** The EUT was installed in a standard Telco rack inside a semi-anechoic chamber. The method of testing, test conditions, and test procedures of ANSI C63.4 were used. The EUT was powered through a  $50\Omega/50\mu\text{H}$  LISN. An EMI receiver, connected to the measurement port of the LISN, scanned the frequency range from 150 kHz to 30 MHz in order to find the peak conducted emissions. All peak emissions within 6 dB of the limit were remeasured using a quasi-peak and/or average detector as appropriate.

**Test Results:** The EUT was found compliant with the Class B requirement(s) of this section. Measured emissions below applicable limits.

**Test Engineer(s):** Tony Permsombut

**Test Date(s):** November 1, 2005



### Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz)

Line Under Test	FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Pass/Fail QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Pass/Fail AVG	Margin (dB) AVG
Phase A	0.382	32.24	58.24	PASS	-26	31.12	48.24	PASS	-17.12
Phase A	0.509	34.56	56	PASS	-21.44	33.87	46	PASS	-12.13
Phase A	0.6368	34.7	56	PASS	-21.3	34.14	46	PASS	-11.86
Phase A	1.5275	31.49	56	PASS	-24.51	30.08	46	PASS	-15.92
Phase A	3.427	34.54	56	PASS	-21.46	25.39	46	PASS	-20.61
Phase A	0.19	41.66	64.04	PASS	-22.38	37	54.04	PASS	-17.04

Table 10. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz)

### Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)

Line Under Test	FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Pass/Fail QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Pass/Fail AVG	Margin (dB) AVG
Neutral	0.191	43.62	63.99	PASS	-20.37	37.08	53.99	PASS	-16.91
Neutral	0.381	34.07	58.26	PASS	-24.19	31.83	48.26	PASS	-16.43
Neutral	0.509	34.75	56	PASS	-21.25	32.99	46	PASS	-13.01
Neutral	0.6368	34.76	56	PASS	-21.24	34.18	46	PASS	-11.82
Neutral	1.5275	31.6	56	PASS	-24.4	29.71	46	PASS	-16.29
Neutral	3.1194	34.36	56	PASS	-21.64	28.64	46	PASS	-17.36


Table 11. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)




SOMA Networks  
Soma Port 300 Model CPE-300-270

Electromagnetic Compatibility  
Emissions Requirements  
CFR Title 47 Part 27 Subpart C and D and Part 15 Subpart B

### Conducted Emissions - Voltage, Worst Case Emissions, AC Power, (110 VAC, 60 Hz)

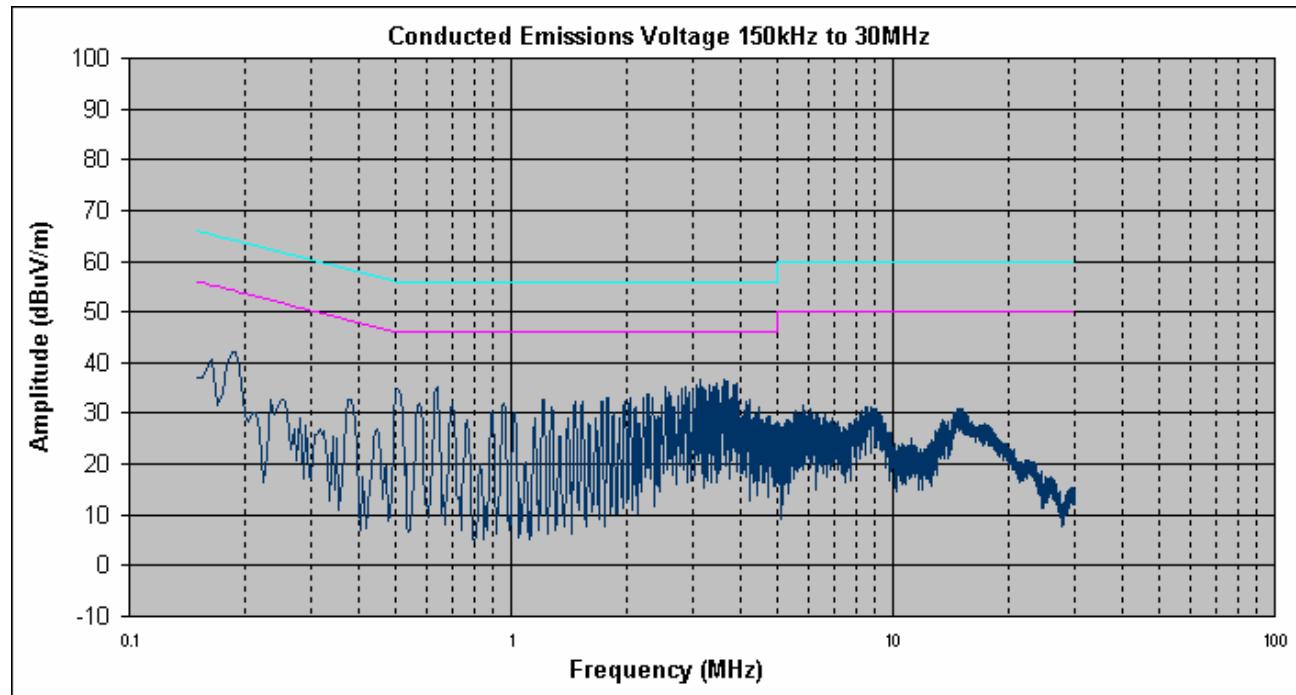

Conducted Emission, Phase Line Plots

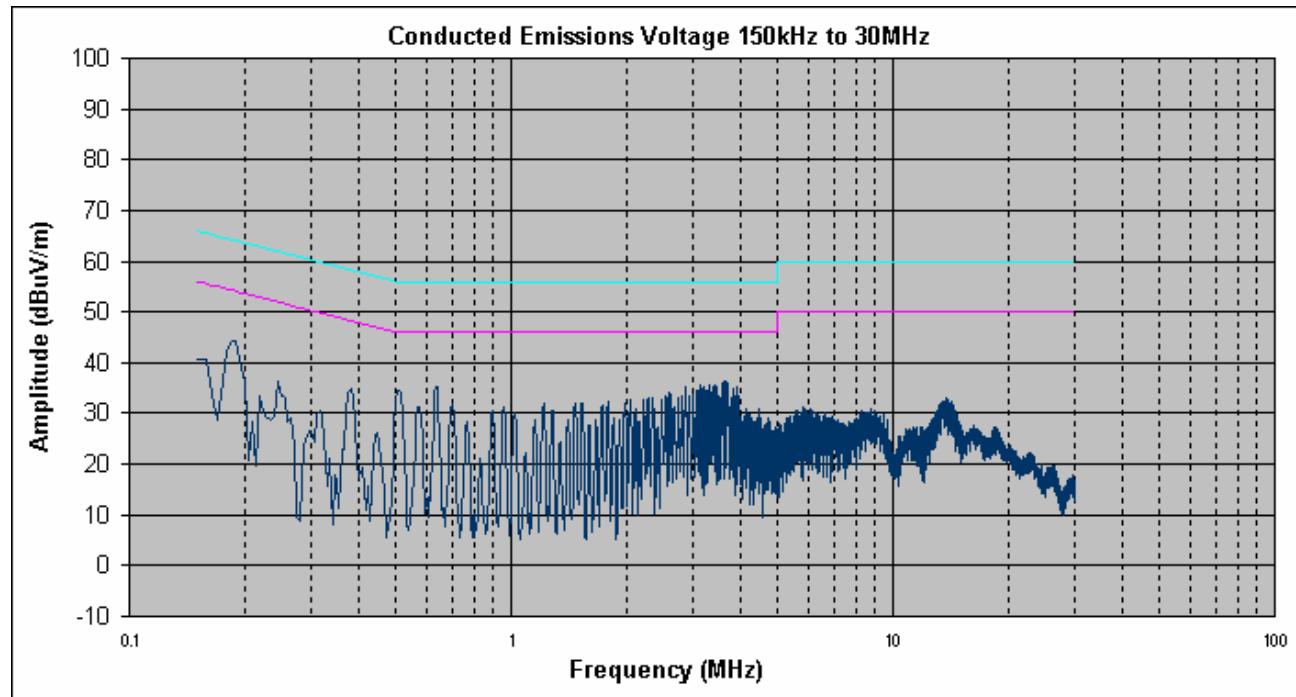

Conducted Emission, Neutral Line Plots

## Conducted Emission Limits Test Setup



Photograph 3. Conducted Emissions Test Setup



## 6.4 Radiated Emissions Limits

**Test Requirement(s):** **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 12.

**15.109 (b)** The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 12.

Frequency (MHz)	Field Strength (dB $\mu$ V/m)	
	§15.109 (b), Class A Limit (dB $\mu$ V) @ 10m	§15.109 (a), Class B Limit (dB $\mu$ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

**Table 12. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)**

**Test Procedures:**

The EUT was installed in a standard Telco rack inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 10 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

**Test Results:**

The EUT was found compliant with the Class B requirement(s) of this section. Measured emissions below applicable limits.

**Test Engineer(s):** Elijah Garcia

**Test Date(s):** November 1, 2005




## Radiated Emissions Limits Test Results, Class B

Frequency (MHz)	Antenna Polarity (H/V)	EUT Azimuth (Degrees)	Antenna Height (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB/m) (+)	Pre Amp Gain (dB) (-)	Cable Loss (dB) (+)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
141.04	V	220	1	14.20	10.60	0.00	2.15	26.95	30.00	-3.05
298.6	H	310	2.68	17.42	13.20	0.00	2.92	33.54	37.00	-3.46
<b>*298.6</b>	<b>V</b>	<b>233</b>	<b>1</b>	<b>18.11</b>	<b>13.60</b>	<b>0.00</b>	<b>2.92</b>	<b>34.63</b>	<b>37.00</b>	<b>-2.37</b>
398.16	H	220	163	11.96	15.52	0.00	3.49	30.97	37.00	-6.03
398.16	V	306	1	10.58	16.13	0.00	3.49	30.20	37.00	-6.80
<b>*497.68</b>	<b>H</b>	<b>297</b>	<b>1.5</b>	<b>13.80</b>	<b>17.40</b>	<b>0.00</b>	<b>4.02</b>	<b>35.22</b>	<b>37.00</b>	<b>-1.78</b>
497.68	V	348	1	10.05	17.03	0.00	4.02	31.10	37.00	-5.90
899.04	V	345	1.43	5.39	21.21	0.00	5.91	32.51	37.00	-4.49

**Table 13. Radiated Emissions Limits Test Results**

Note: \* - At this frequency, the measured electric-field strength exhibits a margin of compliance that is less than 3 dB below the specification limit. We recommend that every emission measured, have at least a 3 dB margin to allow for deviations in the emission characteristics that may occur during the production process.

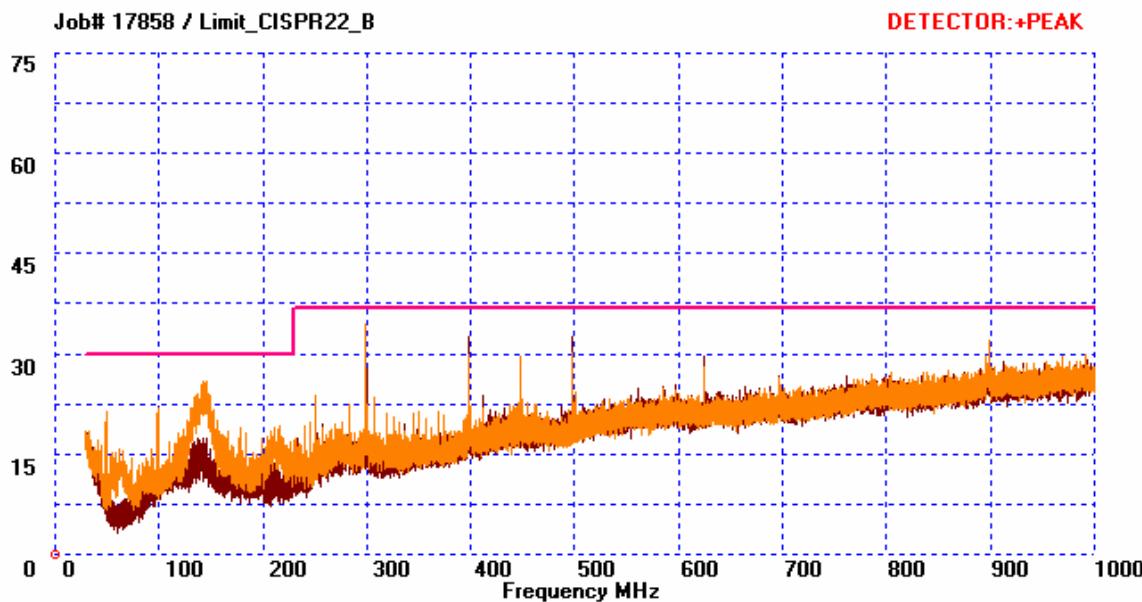



SOMA Networks  
Soma Port 300 Model CPE-300-270


Electromagnetic Compatibility  
Emissions Requirements  
CFR Title 47 Part 27 Subpart C and D and Part 15 Subpart B

## Radiated Emissions Limits Test Results, 1 GHz to 2 GHz, Class B

Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 3m (Avg)	P.Amp (dB)	Ant.Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit per FCC pt 15 @ 3m (dBuV/m)	Delta (dB)
1.094	0	<b>H</b>	2.39	39.07	35.77	24.33	2.19	29.82	54	-24.18
1.094	135	<b>V</b>	1.18	43.1	35.77	24.22	2.19	33.74	54	-20.26
1.294	180	<b>V</b>	1.21	41.8	35.30	24.63	2.35	33.47	54	-20.53
2	0	<b>H</b>	1	33.9	34.72	27.45	3.25	29.88	54	-24.12
2	0	<b>V</b>	1	34.3	34.72	27.34	3.25	30.17	54	-23.83

Table 14. Radiated Emissions Limits Test Results, 1 GHz to 2 GHz

## Radiated Emission Limits Test Setup

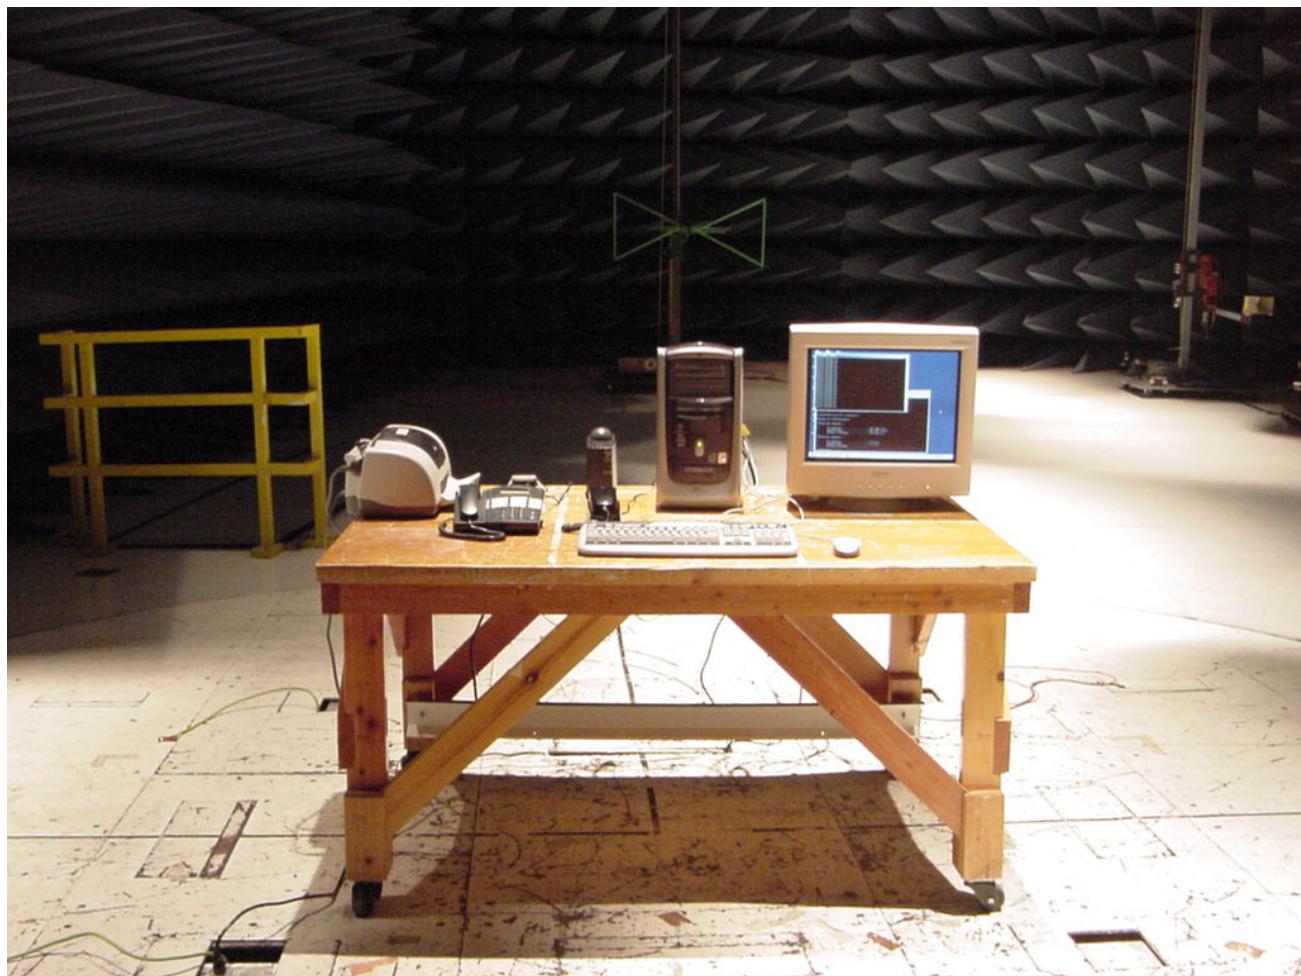

Photograph 4. Radiated Emission Limits Test Setup



## 7.0 Electromagnetic Compatibility Frequency Stability Requirements

### 7.1 Frequency Stability

**Test Requirement(s):** §2.1055 and §27.54

**Test Procedures:** The frequency stability was measured at the EUTs antenna terminal using a spectrum analyzer. The EUT was placed into a CW mode and the frequency was counted using the frequency counter option of the spectrum analyzer. The frequency was first measured at room temperature in order to establish a base from which the deviations would be measured against. The EUTs supply voltage, 121 VAC, was also set to 85 and 115% of its nominal valued and the resulting frequencies were measured. The EUT was then placed into a temperature chamber and the temperature was varied from 0 – 50 °C in 10 °C increments. The resulting frequency was measured at each interval once the EUT was given enough time to stabilize at each temperature setting.

**Test Results:** The EUT was found compliant with Section 2.1055 and 27.54. The following table shows the measured frequencies in accordance with the applicable rule parts.

Temperature °C	Voltage %	Frequency (GHz)	Deviation (ppm)
+20	100	2.307740200	0.004
+20	85	2.307740191	0.001
+20	115	2.307740197	0.174
0	100	2.307740601	0.203
+10	100	2.307740669	0.001
+30	100	2.307740203	0.105
+40	100	2.307739958	0.166
+50	100	2.307739817	0.004

**Test Engineer(s):** Shawn McMillen

**Test Date(s):** November 1, 2005



## 8.0 Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

Test Name: RF Power Output, PPSD & Emission Masks			Test Date(s): 10/31/2005		
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2430	Power Meter	Anritsu Company	ML2488A	01/12/2005	01/12/2006
1S2432	Power Sensor	Anritsu Company	MA2491A	01/12/2005	01/12/2006
1S2460	Analyzer, Spectrum 9 kHz-40GHz	Agilent	E4407B	07/06/2005	07/06/2006
1S2001	DC Power Supply	Hewlett Packard	6236B	See Note	
N/A	10 dB Attenuator	Weinschel Corporation	33-10-34	See Note	
1S2034	Coupler, Directional 1-20 GHz	KRYTAR	101020020	See Note	
Test Name: Spurious Emissions at Antenna Terminals			Test Date(s): 10/31/05		
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2430	Power Meter	Anritsu Company	ML2488A	01/12/2005	01/12/2006
1S2432	Power Sensor	Anritsu Company	MA2491A	01/12/2005	01/12/2006
1S2460	Analyzer, Spectrum 9 kHz-40GHz	Agilent	E4407B	07/06/2005	07/06/2006
N/A	10 dB Attenuator	Weinschel Corporation	33-10-34	See Note	
1S2041	Coupler, Bi Directional Coaxial	NARDA	N/A	See Note	
1S2034	Coupler, Directional 1-20 GHz	KRYTAR	101020020	See Note	
1S2001	DC Power Supply	Hewlett Packard	6236B	See Note	
Test Name: Frequency Stability			Test Date(s): 11/01/05		
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2430	Power Meter	Anritsu Company	ML2488A	01/12/2005	01/12/2006
1S2432	Power Sensor	Anritsu Company	MA2491A	01/12/2005	01/12/2006
1S2460	Analyzer, Spectrum 9 kHz-40GHz	Agilent	E4407B	07/06/2005	07/06/2006
N/A	10 dB Attenuator	Weinschel Corporation	33-10-34	See Note	
1S2034	Coupler, Directional 1-20 GHz	KRYTAR	101020020	See Note	
1S2001	DC Power Supply	Hewlett Packard	6236B	See Note	
1S2100	Digital Multi Meter	Fluke	77 Series II	09/29/2005	09/29/2006
1S2229	Chamber, Temperature	Tenny Engineering	T63C	10/21/2004	10/21/2005



SOMA Networks  
Soma Port 300 Model CPE-300-270

Electromagnetic Compatibility  
Test Equipment  
CFR Title 47 Part 27 Subpart C and D and Part 15 Subpart B

Test Name: Radiated Emissions (Substitution Method)			Test Date(s): 10/20/05		
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2263	Chamber, 10 Meter	Rantec	N2-14	07/25/2005	07/25/2006
1S2460	Analyzer, Spectrum 9 kHz-40GHz	Agilent	E4407B	07/06/2005	07/06/2006
1S2278	Generator, Swept Signal	Hewlett Packard	83650B	06/11/2004	06/11/2005
1U7	Antenna, Horn	EMCO	3115	02/23/2005	02/23/2006
1S2198	Antenna, Horn	EMCO	3115	07/14/2005	07/14/2006
1S2129	Mixer, Harmonic	Hewlett Packard	11970K	03/10/2003	03/10/2006
1S2128	Mixer, Harmonic	Hewlett Packard	11970A	03/10/2003	03/10/2006
1S2121	Pre-Amplifier	Hewlett Packard	8449B	10/27/2005	10/27/2006
N/A	7 GHz High Pass Filter	Micro-Tronics	HPM13147	See Note	
Test Name: Conducted Emissions			Test Date(s): 11/01/2005		
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2109	Receiver, EMI, Receiver Section	Hewlett Packard	85462A	07/18/2005	07/18/2006
1S2108	Receiver, EMI, RF Filter Section	Hewlett Packard	85460A	07/18/2005	07/18/2006
1S2263	Chamber, 10 Meter	Rantec	N2-14	07/25/2005	07/25/2006
1S2372	LISN, Custom	FCC	50A AC	02/09/2005	02/09/2006
Test Name: Radiated Emissions			Test Date(s): 11/01/2005		
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2184	Antenna, Bilog	Chase	CBL6112A	01/12/2005	1/12/2006
1S2263	Chamber, 10 Meter	Rantec	N2-14	08/18/2005	08/18/2006
1S2413	Hygrometer/Termometer, Digital	Fischer Scientific	11-661-13	05/25/2005	05/25/2007
1S2421	EMI Test Receiver	Rhode & Schwarz	ESIB 7	02/09/2005	02/09/2006
1S2121	Pre-Amplifier	Hewlett Packard	8449B	10/27/2005	10/27/2006
1S2198	Antenna, Horn	EMCO	3115	07/14/2005	07/14/2006
1S2460	Analyzer, Spectrum 9 kHz-40GHz	Agilent	E4407B	07/06/2005	07/06/2006

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



## 9.0 Certification Label & User's Manual Information

### 9.1 Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### § 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
  - (i) Compliance testing;
  - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
  - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production stages; or
  - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



**The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J —  
Equipment Authorization Procedures:**

**§ 2.901 Basis and Purpose**

(a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is

to be operated.<sup>1</sup> In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.

(b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, or the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant, whichever is applicable.

**§ 2.907 Certification.**

(a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.

(b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

**§ 2.948 Description of measurement facilities.**

(a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.

(1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.

(i) If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.

<sup>1</sup>In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart C (of Part 15), which deals with intentional radiators.



(ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.

(2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but



## 9.2 Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

### § 15.19 Labeling requirements.

(a) In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:

(ii) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(ii) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(ii) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.



SOMA Networks  
Soma Port 300 Model CPE-300-270

Electromagnetic Compatibility  
Appendix  
CFR Title 47 Part 27 Subpart C and D and Part 15 Subpart B

---

## 8.0 Appendix A (Customer Supplied Documentation)