



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

33439 WESTERN AVENUE ! UNION CITY, CALIFORNIA 94587-3201 ! PHONE (510) 489-6300 ! FAX (510) 489-6372

SOMA Networks
185 Berry Street, Suite 4600
San Francisco, CA 94107

July 27, 2006

Dear Robin Grindley,

Enclosed is the EMC test report for compliance testing of the SOMA Networks, SOMA BASE STATION 700MHZ FBS W 2 RMS & PDP , tested to the requirements of the FCC Certification rules under Title 47 of the CFR Part 27 Subpart C & H and Part 15 Subpart B for a Class A.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,

MET LABORATORIES, INC.

Jennifer Sanchez
Documentation Department

Reference: (\SOMA Networks\EMCS20306-FCC27)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc. While use of the National Voluntary Laboratory Accreditation Program (NVLAP) letters or the NVLAP Logo, the Standards Council of Canada Logo, or the Nationally Recognized Testing Laboratory (NRTL) Letters in this report reflects MET Accreditation under these programs, these letters, logo, or statements do not claim product endorsement by NVLAP or any Agency of the U.S. Government.



Union City Certificate
0591-02

The Nation's First Licensed Nationally Recognized Testing Laboratory

NVLAP
UNION CITY
LAB CODE
200445-0



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*
33439 WESTERN AVENUE ! UNION CITY, CALIFORNIA 94587-3201 ! PHONE (510) 489-6300 ! FAX (510) 489-6372

Electromagnetic Compatibility Criteria Test Report

For the

**SOMA Networks
SOMA BASE STATION 700MHZ FBS W 2 RMS & PDP**

Tested under

**FCC Certification Rules
Title 47 of the CFR, Part 27 C & H and Part 15 Subpart B for a Class A**

MET Report: EMCS20306-FCC27

July 27, 2006

Prepared For:

**SOMA Networks
185 Berry Street, Suite 4600
San Francisco, CA 94107**

**Prepared By:
MET Laboratories, Inc.
4855 Patrick Henry Dr., Building 6
Santa Clara, CA 95054**



Electromagnetic Compatibility Criteria Test Report

For the

**SOMA Networks
SOMA BASE STATION 700MHZ FBS W 2 RMS & PDP**

Tested Under

**FCC Certification Rules
Title 47 of the CFR, Part 27 C & H and Part 15 Subpart B for a Class A**

MET Report: EMCS20306-FCC

A handwritten signature in black ink.

Shawn McMillen
Project Engineer, Electromagnetic Compatibility Lab

A handwritten signature in blue ink.

Jennifer Sanchez
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 27 C & H and Part 15 Subpart B of the FCC Rules under normal use and maintenance.

A handwritten signature in blue ink.

Tony Permsombut,
Manager, Electromagnetic Compatibility Lab



SOMA Networks
SOMA BASE STATION 700MHZ FBS W 2 RMS & PDP

Electromagnetic Compatibility
CFR Title 47 Part 27 Subpart C & H and Part 15 Subpart B

Report Status Sheet

Revision	Report Date	Reason for Revision
∅	July 27, 2006	Initial Issue.



Table of Contents

1. Testing Summary	1
2. Equipment Configuration.....	2
2.1. Overview	2
2.2. Test Site	3
2.3. Description of Test Sample	3
2.4. Equipment Configuration.....	4
2.5. Support Equipment	4
2.6. Ports and Cabling Information	5
2.7. Mode of Operation	7
2.8. Method of Monitoring EUT Operation	7
2.9. Modifications	7
2.9.1. Modifications to EUT	7
2.9.2. Modifications to Test Standard	7
2.10. Disposition of EUT	7
3. Electromagnetic Compatibility Unintentional Radiators	8
3.1. Radiated Emissions Limits.....	8
4. Electromagnetic Compatibility Intentional Radiators.....	13
4.1. RF Power Output	13
4.2. Modulation Characteristics	14
4.3. Occupied Bandwidth.....	15
4.4. Spurious Emissions at Antenna Terminals.....	18
4.5. Radiated Emissions (Substitution Method).....	23
4.6. Frequency Stability	26
5. Test Equipment	27
6. Certification Label & User's Manual Information	28
6.1. Certification Information	28
6.2. Label and User's Manual Information	32



List of Tables

Table 1. Summary of Test Results	1
Table 2. Equipment Configuration	4
Table 3. Support Equipment.....	4
Table 4. Ports and Cabling Information	5
Table 5. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)	8
Table 6. Radiated Emissions Limits Test Results, 30 MHz to 1 GHz, Class A	9
Table 7. Radiated Emissions Limits Test Results, 1 GHz to 8 GHz	10

List of Figures

Figure 1: Block Diagram of Test Configuration.....	6
Figure 2. Block Diagram of Maximum Power Output Test Setup	13
Figure 3. Block Diagram of Occupied Bandwidth Test Setup	17
Figure 4. Block Diagram of Spurious Emissions at Antenna Terminals Test Setup	22

List of Photographs

Photograph 1. Radiated Emission Limits Test Setup	11
Photograph 2. Radiated Emission Limits Test Setup	12
Photograph 3. Radiated Emissions Test Setup	25



List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dBμA	Decibels above one microamp
dBμV	Decibels above one microvolt
dBμA/m	Decibels above one microamp per meter
dBμV/m	Decibels above one microvolt per meter
DC	Direct Current μ
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GR-1089-CORE	(GR) General Requirement(s) imposed by the NEBS standard, (CORE) Central Office Recovery Express (AT&T), (1089) specifies various parts of the General Requirements under Bellcore Technical Standard, Requirements for Electromagnetic Compatibility and Electrical Safety - Generic Criteria for Network Telecommunications Equipment
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μH	microhenry
μ	microfarad
μs	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane



SOMA Networks
SOMA BASE STATION 700MHZ FBS W 2 RMS & PDP

Electromagnetic Compatibility
Testing Summary
CFR Title 47 Part 27 Subpart C & H and Part 15 Subpart B

1. Testing Summary

Name of Test	FCC Rule Part/Section	Results
RF Power Output	2.1046; 27.50(c)	Compliant
Modulation Characteristics	2.1047	Not Applicable
Occupied Bandwidth	2.1049	Compliant
Spurious Emissions at Antenna Terminals	2.1051; 27.53(f)	Compliant
Radiated Spurious Emissions	2.1053	Compliant
Frequency Stability over Temperature Variations	2.1055; 27.54	Compliant
Conducted Emission, Class A	15.107 (a)	Compliant
Radiated Emission Class A	15.109 (a)	Compliant

Table 1. Summary of Test Results



2. Equipment Configuration

2.1. Overview

MET Laboratories, Inc. was contracted by SOMA Networks to perform testing on SOMA BASE STATION 700MHZ FBS W 2 RMS & PDP, under SOMA Networks purchase order number 405048.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the SOMA Networks, SOMA BASE STATION 700MHZ FBS W 2 RMS & PDP

In accordance with §2.955(a) (3), the following data is presented in support of the verification of the SOMA Networks, SOMA BASE STATION 700MHZ FBS W 2 RMS & PDP .

SOMA Networks should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the SOMA BASE STATION 700MHZ FBS W 2 RMS & PDP has been **permanently** discontinued, as per §2.955(b).

The results obtained relate only to the item(s) tested.

Model(s) Tested:	SOMA BASE STATION 700MHZ FBS W 2 RMS & PDP		
Model(s) Covered:	SOMA BASE STATION 700MHZ FBS W 2 RMS & PDP NPM-2500-C410		
EUT Specifications:	Primary Power: -39 VDC to -70VDC		
	FCC ID: POZNPM700007168A		
	Emission Designators:	4M75D7D	
	Peak and Average Output Power:	Freq	Peak Pwr
		731MHz	54.56dBm
		737MHz	54.43dBm
	Equipment Class:	743MHz	43.02dBm
		54.42dBm	43.04dBm
	TNB		
	EUT Frequency Range: 731-743MHz		
Analysis:	The results obtained relate only to the item(s) tested.		
Environmental Test Conditions:	Temperature: 15-35° C		
	Relative Humidity: 30-60%		
	Barometric Pressure: 860-1060 mbar		
Evaluated by:	Shawn McMillen		
Date(s):	July 27, 2006		



2.2. Test Site

All testing was performed at MET Laboratories, Inc., 4855 Patrick Henry Dr., Building 6, Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a standard Telco rack. In accordance with §2.948(a) (3), a complete site description is contained at MET Laboratories. In accordance with §2.948(d), MET Laboratories has been accredited by the National Voluntary Laboratory Accreditation Program (Lab Code: 100273-0).

2.3. Description of Test Sample

The SOMA BASE STATION 700MHZ FBS W 2 RMS & PDP, Equipment Under Test (EUT), is a wireless terminal that is designed to provide wireless network access in a residence as well as two phone line.



2.4. Equipment Configuration

The EUT was set up as outlined in Figure 1. All equipment incorporated as part of the EUT is included in the following list.

Ref. ID	Slot #	Name / Description	Model Number	Part Number	Serial Number	Rev. #
A	N/A	DC Power Unit (CARLING Technology)	L0207	175A	EM0006	01
B	N/A	1U CPCI Chassis	N/A	006606A	006	N/A
B Front	1	Modem Card	N/A	999372B-200	1506270004	03
	2	CPU card	N/A	7606015-31	M9113/063	C1
B Back	1	Modem RTM (Rear Transition Module)	N/A	999399B-200	1506230030	N/A
	2	CPU RTM	N/A	7206138-00	M9289/052	C
C	N/A	Power Amplifier	RM-DIG-01A 029	150621007	393B-01 1506200003	N/A
	N/A	Power Amplifier	RM-DIG-01A	555B 1506180002	393B-03 1506240002	N/A

Table 2. Equipment Configuration

2.5. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number
D	Wireless Router	SOMA	CPE 300-280
E	AC-DC Power Supply	Li Shin International Enterprise Corp	LSE9901B1250
F	Spectrum Analyzer	HP	8591E

Table 3. Support Equipment



2.6. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded (Y/N)	Termination Box ID & Port ID
Radiated Emission						
1	B Back, 1, DIV	COAX	1	1	Yes	C Back, PA1D, Serdes
2	B Back, 1, Main	COAX	1	1	Yes	C Back, PA1M, Serdes
3	C Back:PA1D, PA1M; B Back: DC	10AWG DC PWR Cord	3	1	No	A Back, B1-B9
4	A Back, Power Input	10AWG DC PWR Cord	2	3	No	48VAC DC Supply
5	B Front, 2, LK SPD	Ethernet	1	5	yes	D, 10/100
6	C Back PA1M, Antenna	Coaxial	1	0.5	Yes	D
Conducted Measurement						
1	B Back, 1, DIV	COAX	1	1	Yes	C Back, PA1D, Serdes
2	B Back, 1, Main	COAX	1	1	Yes	C Back, PA1M, Serdes
3	C Back:PA1D, PA1M; B Back: DC	10AWG DC PWR Cord	3	1	No	A Back, B1-B9
4	A Back, Power Input	10AWG DC PWR Cord	2	3	No	48VAC DC Supply
5	B Front, 2, LK SPD	Ethernet	1	5	yes	D, 10/100
6	C Back PA1M, Antenna	Coaxial	1	1	Yes	F, Input

Table 4. Ports and Cabling Information

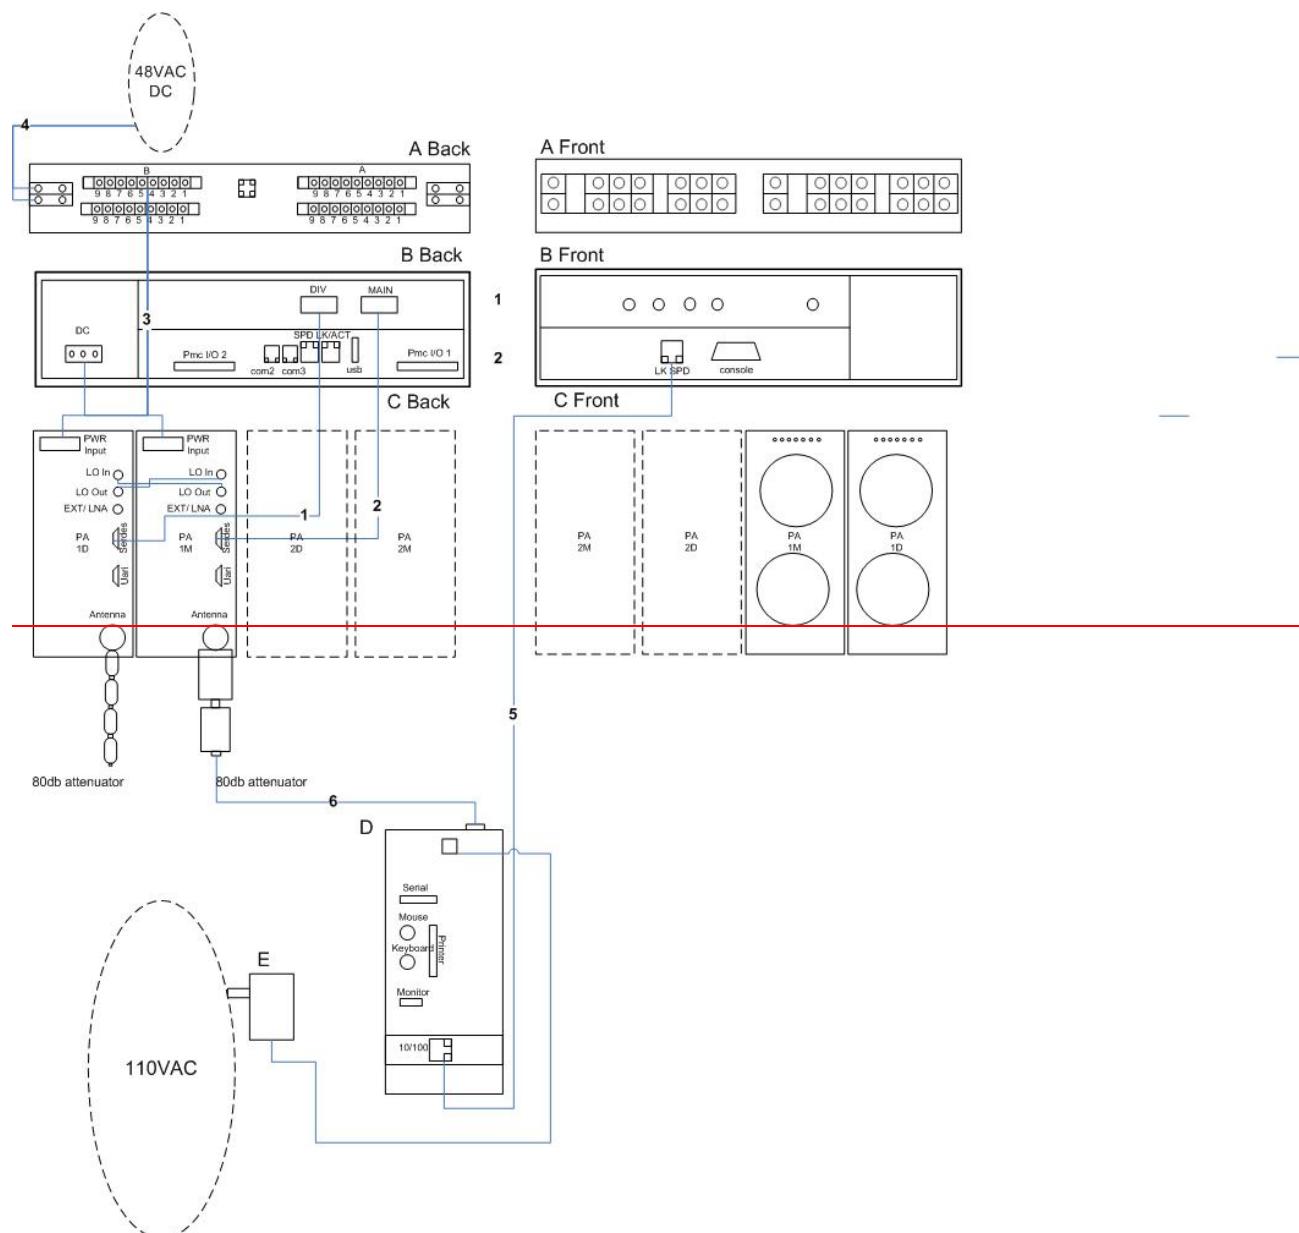


Figure 1: Block Diagram of Test Configuration



2.7. Mode of Operation

DATA Traffic enabled.

2.8. Method of Monitoring EUT Operation

SNMP & PROPRIETARY SOFTWARE

2.9. Modifications

2.9.1) Modifications to the EUT

No modifications were made to the EUT.

2.9.2) Modifications to the Test Standard

No modifications were made to the test standard.

2.10 Disposition of EUT

The test sample including all support equipment (if any), submitted to the Electro-Magnetic Compatibility Lab for testing was returned SOMA Networks upon completion of testing.



3. Electromagnetic Compatibility Unintentional Radiators

3.1. Radiated Emissions Limits

Test Requirement(s): **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class A limits expressed in Table 5.

15.109 (b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 5.

Frequency (MHz)	Field Strength (dB μ V/m)	
	§15.109 (b), Class A Limit (dB μ V) @ 10m	§15.109 (a), Class B Limit (dB μ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

Table 5. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)

Test Procedures:

The EUT was placed in a standard Telco rack inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 10 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

Test Results:

The EUT was found to be compliant with the Class A requirement(s) of this section. .

Test Engineer(s):


Billy Kwan

Test Date(s):

July 26, 2006

Radiated Emissions Limits Test Results, 30 MHz to 1 GHz, Class A

Frequency (MHz)	Antenna Polarity (H/V)	EUT Azimuth (Degrees)	Antenna Height (m)	Uncorrected Amplitude QP Detector (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
99.44	H	180	3.17	26.03	10.22	1.73	37.98	43.50	-5.52
248.76	V	140	1	24.01	12.21	2.59	38.81	46.40	-7.59
307.2	V	212	1.19	25.89	13.40	2.97	42.26	46.40	-4.14
460.8	H	197	2.25	16.32	16.62	3.81	36.75	46.40	-9.65
552.96	H	334	3.07	17.75	18.21	4.33	40.28	46.40	-6.12
799.6	V	129	2.77	12.21	20.40	5.45	38.05	46.40	-8.35
860.16	H	237	1.21	12.97	20.10	5.74	38.80	46.40	-7.60

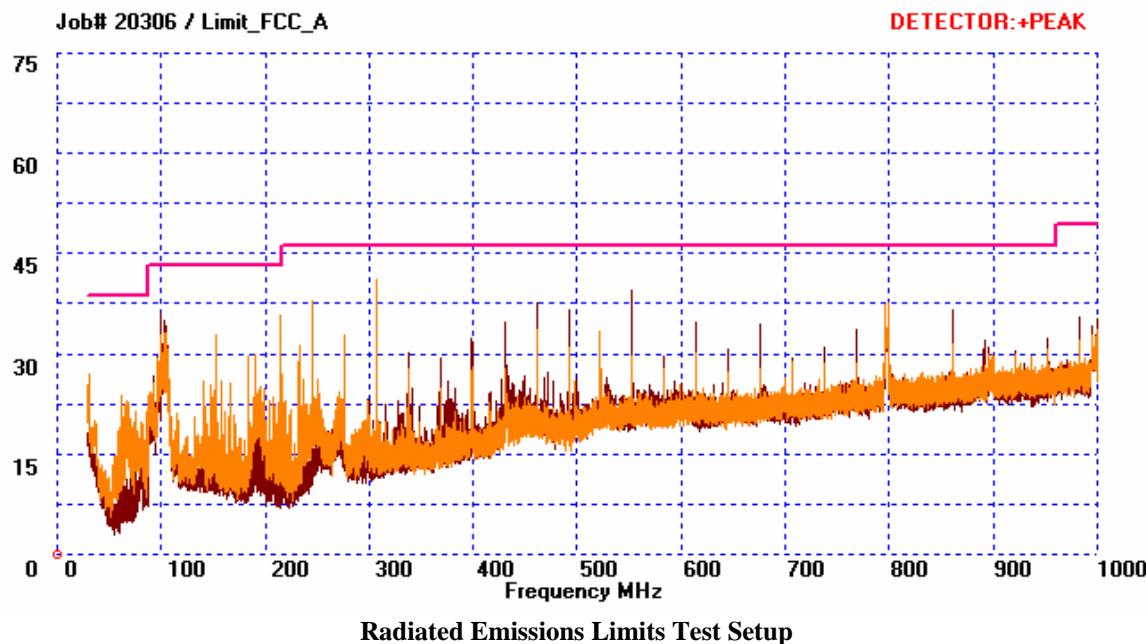Table 6. Radiated Emissions Limits Test Results, 30 MHz to 1 GHz, Class A




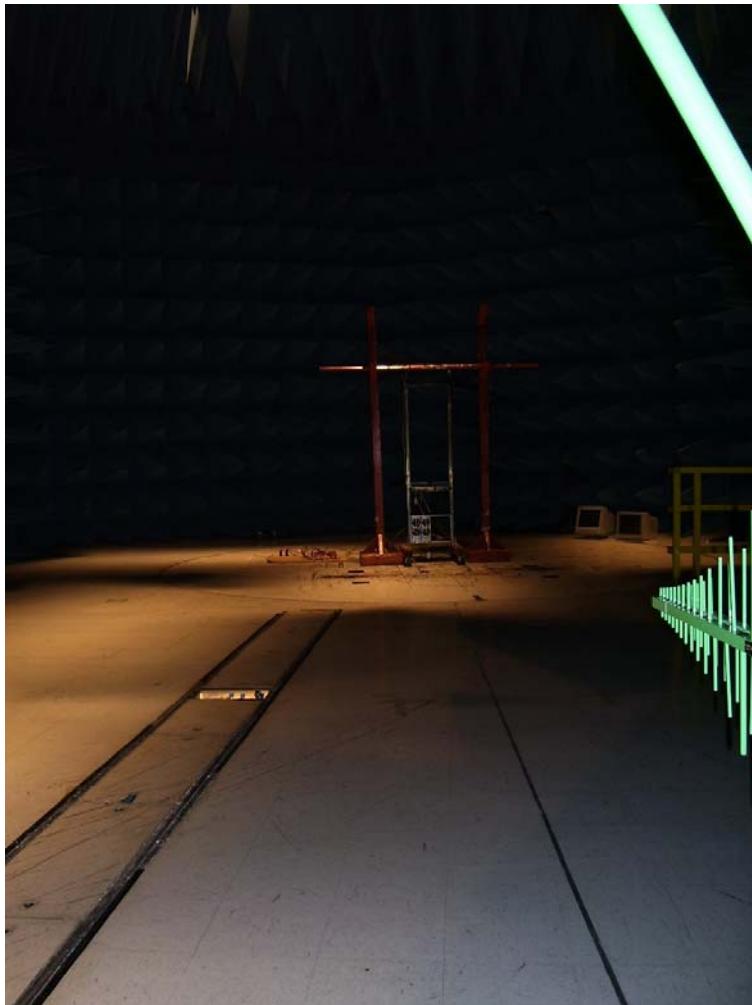
Radiated Emissions Limits Test Results, 1 GHz to 8 GHz, Class A

Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 3m (Avg)	P.Amp (dB)	Ant.Cor. Factor (dB/m)	Cable Loss (dB)	Dist.Cor Factor (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit per FCC pt 15 @ 3m (dBuV/m)	Delta (dB)
1.199	262	H	1.4	47.37	35.23	24.51	2.27	10.46	28.46	49.5	-21.04
1.199	355	V	1	45.67	35.23	24.42	2.27	10.46	26.66	49.5	-22.84
1.392	250	H	1.6	41.45	35.18	24.97	2.44	10.46	23.22	49.5	-26.28
1.597	210	V	1.2	40.25	35.17	25.58	2.67	10.46	22.88	49.5	-26.62
1.966	142	V	1	47.38	35.14	27.23	3.21	10.46	32.21	49.5	-17.29
1.996	19	H	1.2	40.51	35.14	27.43	3.25	10.46	25.59	49.5	-23.91
8	0	H	1	31.8	35.33	36.84	7.00	10.46	29.85	49.5	-19.65
8	0	V	1	31.7	35.33	36.67	7.00	10.46	29.58	49.5	-19.92


Table 7. Radiated Emissions Limits Test Results, 1 GHz to 8 GHz

Note: The EUT was tested at 3 m. The data has been corrected for comparison with the 10 m limit using the formula: $20\log(3 \text{ m}/10 \text{ m})$ as expressed in the 'Distance Correction' column.

Radiated Emission Limits Test Setup



Photograph 1. Radiated Emission Limits Test Setup

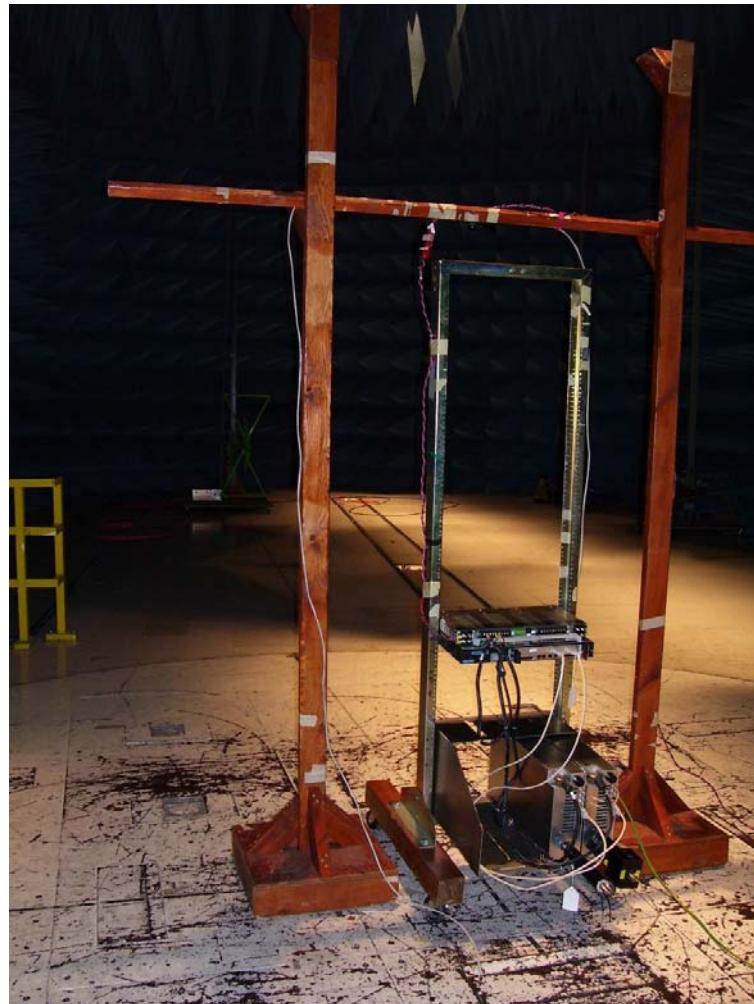

Photograph 2. Radiated Emission Limits Test Setup



4. Electromagnetic Compatibility Intentional Radiators

4.1. RF Power Output

Test Requirement(s): §2.1046 and §27.50(c)

Test Procedures: As required by 47 CFR 2.1046, *RF power output measurement* was made at the RF output terminal using a Power Meter with a Power Sensor capable of measuring a modulated carrier.

Test Results: Equipment complies with 47CFR 2.1046 and 27.50(c). The SOMA BASE STATION 700MHZ FBS W 2 RMS & PDP does not exceed 50,000 Watts peak (ERP) at the carrier frequency.

The following page show measurements of RF Power output which is recorded below:

RF Output Power			
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm	Measured Average Output Power dBm
Low	731	54.56	43.02
Mid	737	54.43	43.04
High	743	54.42	43.06

Test Engineer(s): Shawn McMillen

Test Date(s): July 26, 2006

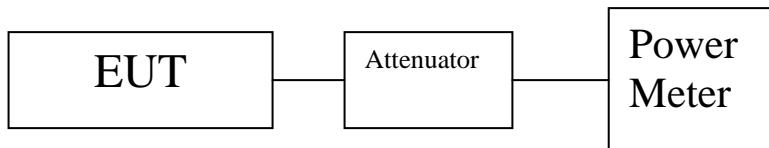


Figure 2. Block Diagram of Maximum Power Output Test Setup



SOMA Networks
SOMA BASE STATION 700MHZ FBS W 2 RMS & PDP

Electromagnetic Compatibility
Intentional Radiators, Modulation Characteristics
CFR Title 47 Part 27 Subpart C & H and Part 15 Subpart B

4.2. Modulation Characteristics

Test Requirement(s): §2.1047

Test Procedures: As required by 47 CFR 2.1047, Modulation Characteristics measurements were made at the RF output terminals.

Test Results: Not Applicable

Test Engineer(s): Shawn McMillen

Test Date(s): Not Applicable



4.3. Occupied Bandwidth

Test Requirement(s): §2.1049


Test Procedures: As required by 47 CFR 2.1049, the occupied bandwidth measurements were made at the RF output terminals using a Spectrum Analyzer.

Test Results: Equipment complies with Section 2.1049. The following pages show measurements of 99% Occupied Bandwidth plots:


26dB & 99% Occupied Bandwidth			
Carrier Channel	Frequency (MHz)	Measured 26dB Bandwidth (MHz)	Measured 99% Bandwidth (MHz)
Low	731	4.745	4.175
Mid	737	4.758	4.142
High	743	4.712	4.172

Test Engineer(s): Shawn McMillen


Test Date(s): July 26, 2006

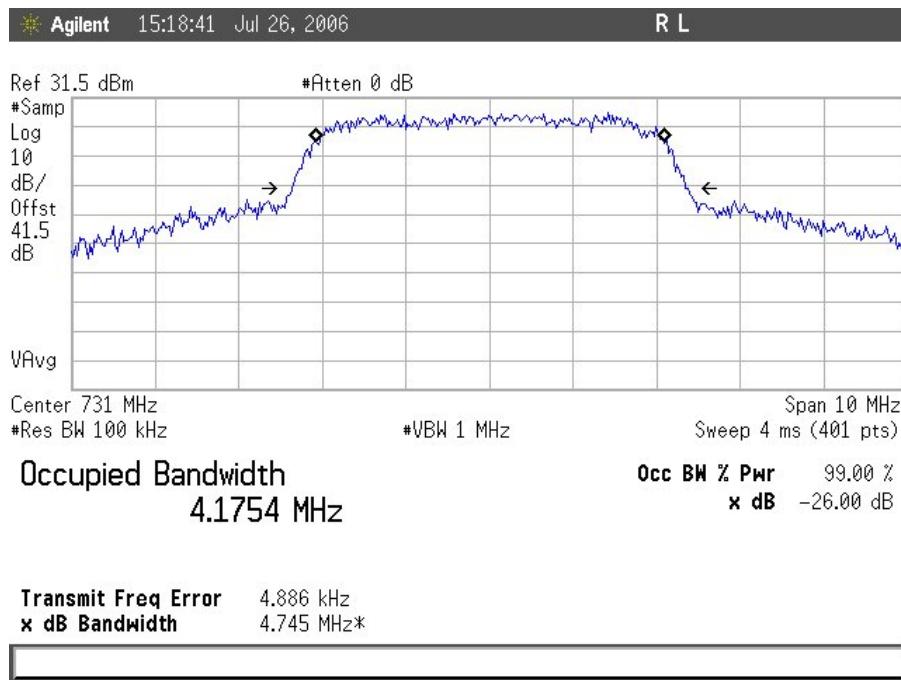

Plot 1. Occupied Bandwidth Low Channel

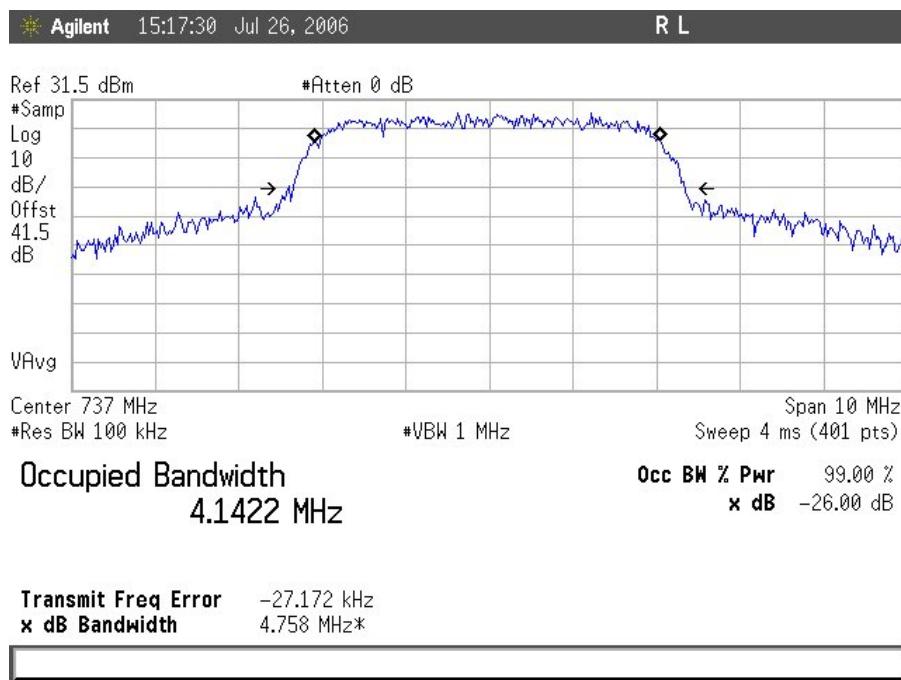

Plot 2. Occupied Bandwidth Mid Channel

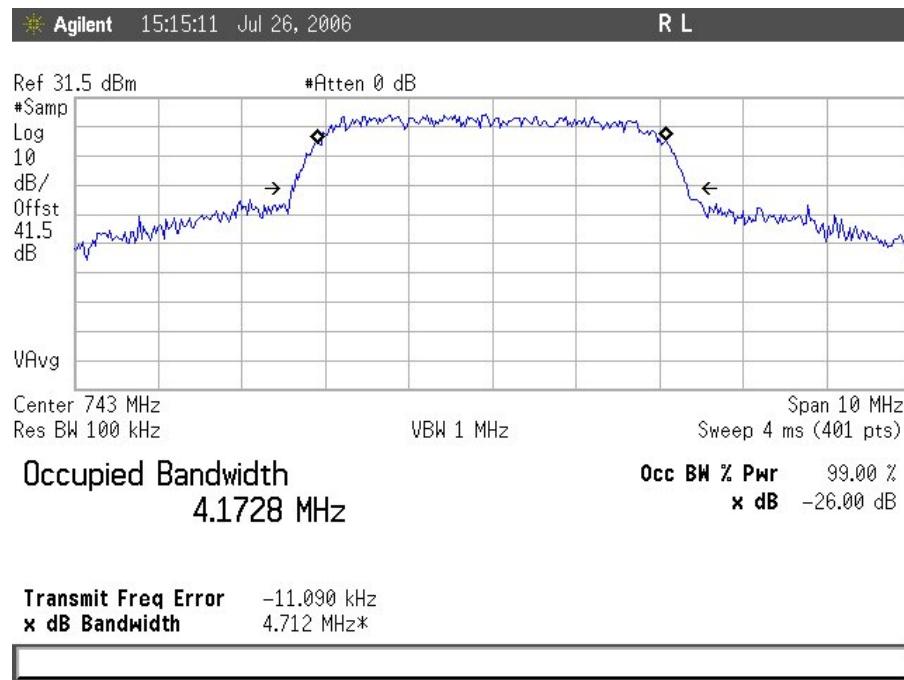

Plot 3. Occupied Bandwidth High Channel



Figure 3. Block Diagram of Occupied Bandwidth Test Setup



4.4. Spurious Emissions at Antenna Terminals

Test Requirement(s): §2.1051 and §27.53(f)

Test Procedures: As required by 47 CFR 2.1051, *spurious emissions at antenna terminal measurements* were made at the RF output terminals using a Spectrum Analyzer.


The Spectrum Analyzer was set with a RBW of 100KHz and a VBW of 1MHz. The EUT was set to transmit in the operating frequency range at its maximum rated output power. Frequencies were swept from 30 MHz to the 10th harmonic of the fundamental. Any emission outside the authorized frequency band must be attenuated by $43 + 10\log(P)$ dB where P is the power of the carrier. In the spectrum 100KHz immediately outside the authorized band a 30KHz resolution was employed.

Test Results: Equipment complies with Section 2.1051 and 27.53(f). The following pages show measurements of Spurious Emission plots


The following analysis and plots are included below to illustrate compliance with the required rule parts.

Test Engineer(s): Shawn McMillen

Test Date(s): July 26, 2006

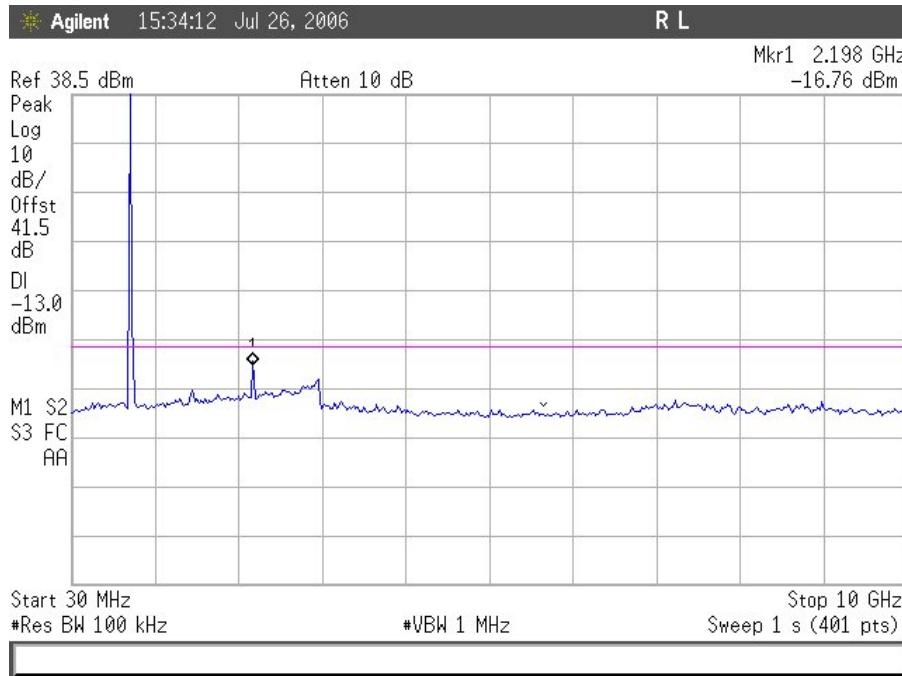

Plot 4: Conducted Spurious Emissions – Low Channel

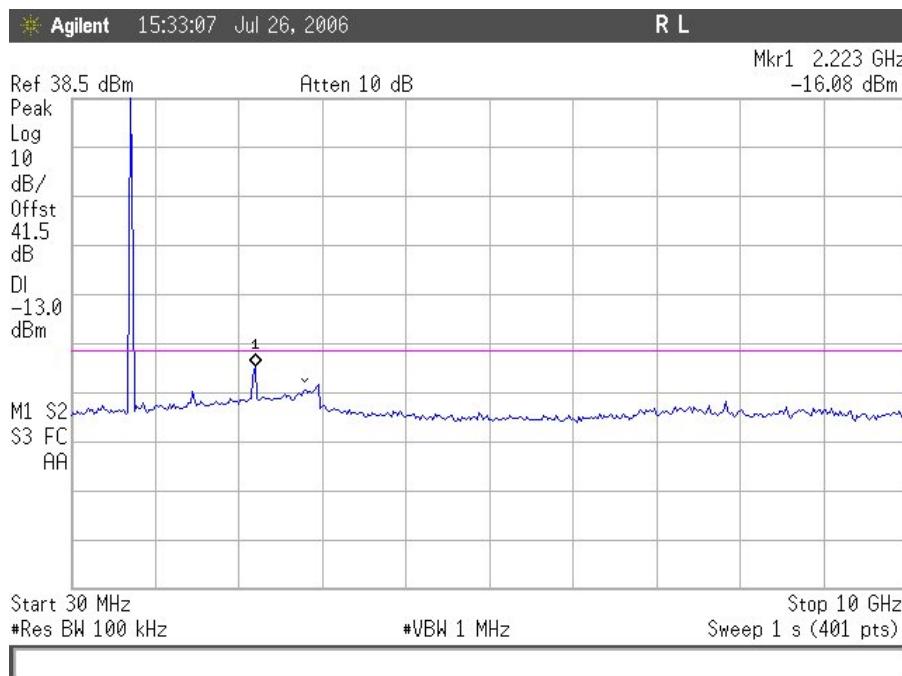


Plot 5: Conducted Spurious Emissions – Mid Channel





SOMA Networks
SOMA BASE STATION 700MHZ FBS W 2 RMS & PDP

Electromagnetic Compatibility
Intentional Radiators, Antenna Terminals
CFR Title 47 Part 27 Subpart C & H and Part 15 Subpart B

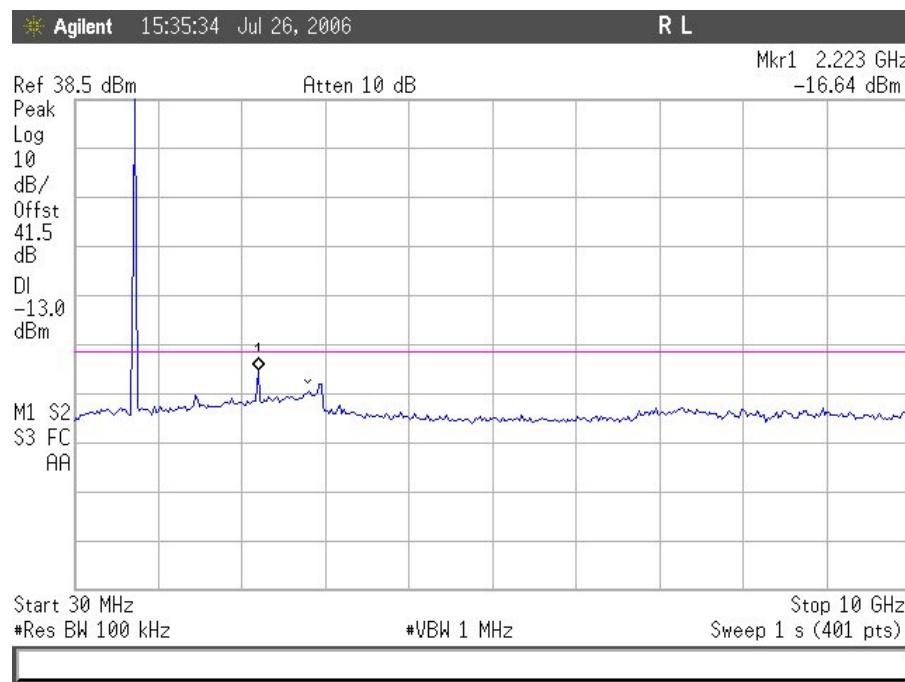

Plot 6: Conducted Spurious Emissions – High Channel

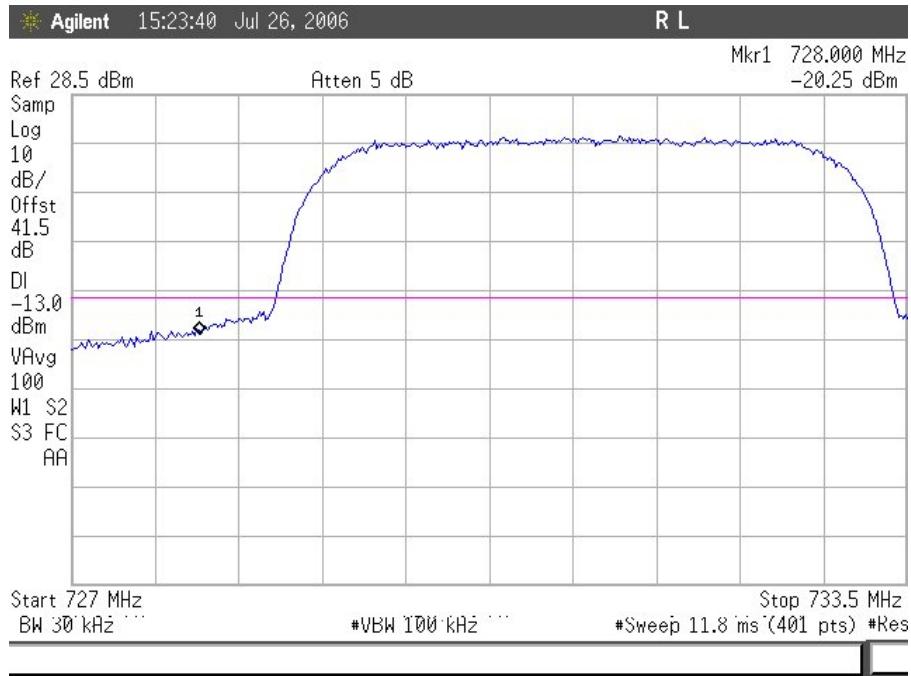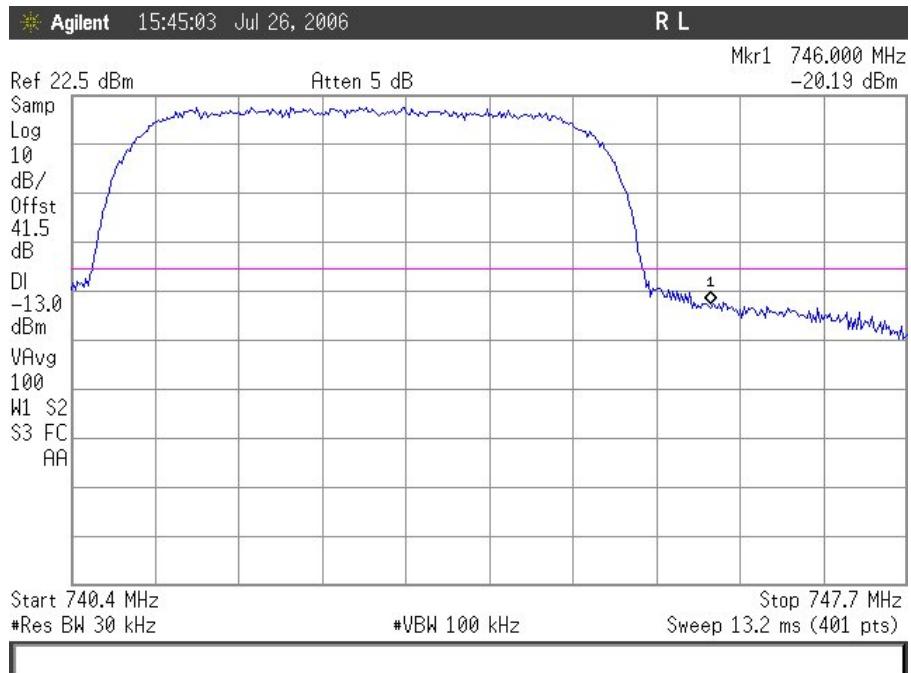
Plot 7: Band Edge – Low Channel

Plot 8: Band Edge – High Channel



SOMA Networks
SOMA BASE STATION 700MHZ FBS W 2 RMS & PDP

Electromagnetic Compatibility
Intentional Radiators, Antenna Terminals
CFR Title 47 Part 27 Subpart C & H and Part 15 Subpart B

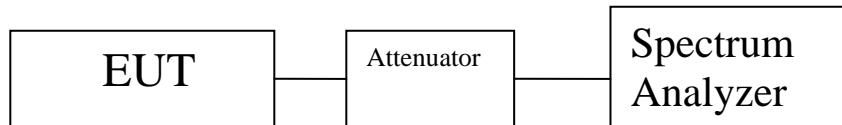


Figure 4. Block Diagram of Spurious Emissions at Antenna Terminals Test Setup



4.5. Radiated Emissions (Substitution Method)

Test Requirement(s): §2.1053

Test Procedures: As required by 47 CFR 2.1053, the *field strengths of radiated spurious emissions* were made in accordance with the procedures of TIA/EIA-603-A-2001 "Land Mobile FM or PM Communications Equipment Measurement and Performance Standards".

Radiated emission measurements were performed inside a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). The distance between the EUT and the test antenna was 3 meter. The EUT's RF port was connected to a dummy load. The EUT was set to transmit at its designated operating frequency range and at its maximum output power level. The intensities of the radiated emissions were maximized by rotating the turntable 360 degrees and varying the receive antenna from 1 to 4m. Measurements were made with the receive antenna in both horizontal and vertical polarizations.

In order to determine the magnitude of the radiated emissions, a calibrated antenna source was positioned in place of the EUT and fed with a modulated carrier equal to that of the EUT. The effective isotropic radiated power of each emission was determined by adding the forward power to the substitution antenna at the previously recorded amplitude, and adding the gain of the antenna at the given frequency.

The Radiated Spurious Emissions *Limit* is obtained by the following:

Test Results: Equipment complies with Section 2.1055.

Test Engineer(s): Shawn McMillen

Test Date(s): July 26, 2006



Radiated Emissions (Substitution Method) Test Results

Frequency (MHz)	Polarization V/H	Spectrum Analyzer Reading (dBm)	Substitution antenna power input (dBm)	Tx Ant. Gain (dBi)	EIRP (dBm)
1462	H	-42.65	-46.98	6.3	-40.68
2193	H	-48.22	-53.99	7.5	-46.49

fo = 731 MHz

Frequency (MHz)	Polarization V/H	Spectrum Analyzer Reading (dBm)	Substitution antenna power input (dBm)	Tx Ant. Gain (dBi)	EIRP (dBm)
1474	H	-33.9	-38.43	6.3	-32.13
2211	H	-39.99	-46.46	7.5	-38.96

fo = 737 MHz

Frequency (MHz)	Polarization V/H	Spectrum Analyzer Reading (dBm)	Substitution antenna power input (dBm)	Tx Ant. Gain (dBi)	EIRP (dBm)
1486	H	-33.3	-37.63	6.3	-31.33
2229	H	-40.3	-46.07	7.5	-38.57

fo = 743 MHz

Note: All other emissions were measured at the noise floor of the spectrum analyzer. The polarization of the receive antenna which produced the highest emission was reported.



Photograph 3. Radiated Emissions Test Setup



4.6. Frequency Stability

Test Requirement(s): §2.1055 and §27.54. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Results: The radio module frequency stability is determined by a 30.72 MHz oven controlled crystal oscillator (OCXO). The accuracy of this oscillator, considering all factors (initial accuracy, aging, temperature, voltage, stability, etc.) is better than 1 ppm.

The transmit signal has a nominal -20 dB bandwidth (99% power) of 4.6 MHz and the minimum bandwidth of the authorized frequency block is a 5 MHz. This results in a minimum of 0.2 MHz of guard band either side of the modulated signal. The maximum transmit frequency is 743.5 MHz. The maximum frequency tolerance of 1 ppm will result in a 743.5 Hz frequency error, which is well within the 0.2 MHz of guard band.

Test Engineer(s): Shawn McMillen

Test Date(s): July 26, 2006



5. Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2034	COUPLER, DIRECTIONAL 1-20 GHz	KRYTAR	101020020	SEE NOTE	
1S2034	COUPLER, DIRECTIONAL 1-20 GHz	KRYTAR	101020020	SEE NOTE	
1S2041	COUPLER, BI DIRECTIONALCOAXIAL	NARDA	N/A	SEE NOTE	
1S2041	COUPLER, BI DIRECTIONALCOAXIAL	NARDA	N/A	SEE NOTE	
1S2121	PRE-AMPLIFIER	HEWLETT PACKARD	8449B	10/14/2005	10/14/2006
1S2128	Harmonic Mixer	Hewlett Packard	11970A	10/07/2003	10/07/2006
1S2129	Harmonic Mixer	Hewlett Packard	11970K	10/07/2003	10/07/2006
1S2184	BILOG ANTENNA	CHASE	CBL6112A	1/12/2006	1/12/2007
1S2198	ANTENNA, HORN	EMCO	3115	7/14/2005	7/14/2006
1S2202	ANTENNA, HORN, 1 METER	EMCO	3116	3/23/2004	3/23/2007
1S2263	CHAMBER, 10 METER	RANTEC	N2-14	8/15/05	8/15/06
1S2421	EMI RECEIVER	ROHDE&SCHWARZ	ESIB 7	2/9/2006	2/9/2007
1S2430	WIDEBAND POWER METER	ANRITSU COMPANY	ML2488A	1/12/2006	1/12/2007
1S2430	WIDEBAND POWER METER	ANRITSU COMPANY	ML2488A	1/12/2006	1/12/2007
1S2432	WIDEBAND POWER SENSOR	ANRITSU COMPANY	MA2491A	1/12/2006	1/12/2007
1S2432	WIDEBAND POWER SENSOR	ANRITSU COMPANY	MA2491A	1/12/2006	1/12/2007
1S2460	Analyzer, Spectrum 9 kHz-40GHz	Agilent	E4407B	6/26/2006	6/26/2007
N/A	HIGH PASS FILTER	MICRO-TRONICS	HPM13146	SEE NOTE	

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



6. Certification Label & User's Manual Information

6.2. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
 - (i) Compliance testing;
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production stages; or
 - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.

¹ In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.

- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, or the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant, whichever is applicable.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
- (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
- (i) If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.

¹In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart C (of Part 15), which deals with intentional radiators.



SOMA Networks
SOMA BASE STATION 700MHZ FBS W 2 RMS & PDP

Electromagnetic Compatibility
Certification Label & User's Manual Information
CFR Title 47 Part 27 Subpart C & H and Part 15 Subpart B

- (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
- (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but



6.2. Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:

(ii) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(ii) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(ii) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.