

# FCC PART 15.247

## TEST REPORT

For

### Shenzhen Rapoo Technology Co., Ltd.

22, Jinxu Road East, Pingshan District, Shenzhen, China

**FCC ID: PP2E6350**

|   |   |
|---|---|
| <b>Report Type:</b><br>Original Report        | <b>Product Type:</b><br>Bluetooth Ultra-Slim Keyboard   |
| <b>Test Engineer:</b> Sevin Li                | <i>Sevin Li</i>   |
| <b>Report Number:</b> RDG141029002-00         |   |
| <b>Report Date:</b> 2014-11-10                |   |
| <b>Reviewed By:</b> Sula Huang<br>RF Engineer | <i>Sula Huang</i>   |
| <b>Test Laboratory:</b>                       | Bay Area Compliance Laboratories Corp. (Dongguan)<br>No.69 Pulongcun, Puxinhu Industrial Zone,<br>Tangxia, Dongguan, Guangdong, China<br>Tel: +86-769-86858888<br>Fax: +86-769-86858891<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## TABLE OF CONTENTS

|   |           |
|---|-----------|
| <b>GENERAL INFORMATION</b> .....  | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....                 | 4         |
| OBJECTIVE.....  | 4         |
| RELATED SUBMITTAL(S)/GRANT(S).....                                      | 4         |
| TEST METHODOLOGY.....   | 4         |
| TEST FACILITY.....  | 4         |
| <b>SYSTEM TEST CONFIGURATION</b> .....                                  | <b>5</b>  |
| DESCRIPTION OF TEST CONFIGURATION.....                                  | 5         |
| EUT EXERCISE SOFTWARE.....  | 5         |
| EQUIPMENT MODIFICATIONS.....  | 5         |
| SUPPORT EQUIPMENT LIST AND DETAILS.....                                 | 5         |
| EXTERNAL CABLE.....   | 5         |
| BLOCK DIAGRAM OF TEST SETUP.....  | 6         |
| <b>SUMMARY OF TEST RESULTS</b> .....                                    | <b>7</b>  |
| <b>FCC §15.247 (i) &amp; §1.1310 &amp; §2.1093- RF EXPOSURE</b> .....   | <b>8</b>  |
| APPLICABLE STANDARD.....  | 8         |
| <b>FCC §15.203 - ANTENNA REQUIREMENT</b> .....                          | <b>9</b>  |
| APPLICABLE STANDARD.....  | 9         |
| ANTENNA CONNECTOR CONSTRUCTION.....                                     | 9         |
| <b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS</b> .....              | <b>10</b> |
| APPLICABLE STANDARD.....  | 10        |
| MEASUREMENT UNCERTAINTY.....  | 10        |
| EUT SETUP.....  | 10        |
| EMI TEST RECEIVER SETUP.....  | 11        |
| TEST PROCEDURE.....   | 11        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION.....                           | 11        |
| TEST EQUIPMENT LIST AND DETAILS.....                                    | 12        |
| TEST RESULTS SUMMARY.....   | 12        |
| TEST DATA.....  | 12        |
| <b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS</b> ..... | <b>15</b> |
| APPLICABLE STANDARD.....  | 15        |
| MEASUREMENT UNCERTAINTY.....  | 15        |
| EUT SETUP.....  | 15        |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....                        | 16        |
| TEST PROCEDURE.....   | 16        |
| TEST EQUIPMENT LIST AND DETAILS.....                                    | 17        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION.....                           | 17        |
| TEST RESULTS SUMMARY.....   | 17        |
| TEST DATA.....  | 17        |
| <b>FCC §15.247(a) (1) - CHANNEL SEPARATION TEST</b> .....               | <b>21</b> |
| APPLICABLE STANDARD.....  | 21        |
| TEST EQUIPMENT LIST AND DETAILS.....                                    | 21        |
| TEST PROCEDURE.....   | 21        |
| TEST DATA.....  | 21        |
| <b>FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING</b> .....               | <b>24</b> |

APPLICABLE STANDARD .....24  
 TEST PROCEDURE .....24  
 TEST EQUIPMENT LIST AND DETAILS.....24  
 TEST DATA .....24

**FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST .....27**  
 APPLICABLE STANDARD .....27  
 TEST PROCEDURE .....27  
 TEST EQUIPMENT LIST AND DETAILS.....27  
 TEST DATA .....27

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....29**  
 APPLICABLE STANDARD .....29  
 TEST PROCEDURE .....29  
 TEST EQUIPMENT LIST AND DETAILS.....29  
 TEST DATA .....29

**FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT .....36**  
 APPLICABLE STANDARD .....36  
 TEST PROCEDURE .....36  
 TEST EQUIPMENT LIST AND DETAILS.....36  
 TEST DATA .....36

**FCC §15.247(d) - BAND EDGES TESTING .....39**  
 APPLICABLE STANDARD .....39  
 TEST PROCEDURE .....39  
 TEST EQUIPMENT LIST AND DETAILS.....39  
 TEST DATA .....39

**DECLARATION LETTER.....41**

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *Shenzhen Rapoo Technology Co., Ltd.*'s product, model number: *E6350(FCC ID: PP2E6350)* (the "EUT") in this report was a *Bluetooth Ultra-Slim Keyboard*, which was measured approximately: 23.8 cm (L) x 10 cm (W) x 1.5 cm (H), rated input voltage: DC3.7 V rechargeable Li-ion or DC5V charging from USB port.

*Note: The series product, model E6350, E6350 PRO is electrically identical, the difference between them appearance, we selected E6350 for testing, the details was explained in the attached declaration letter.*

\* All measurement and test data in this report was gathered from production sample serial number: 141029002. (Assigned by BACL, Dongguan). The EUT was received on 2014-10-29.

### Objective

This report is prepared on behalf of *Shenzhen Rapoo Technology Co., Ltd.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the Bluetooth BDR mode of EUT compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

N/A

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode.

### EUT Exercise Software

The software "Broadcom Blue Tool 1.7.3.3" was used for testing, which was provided by manufacturer. The worst condition (maximum power) was setting by the software as following table:

| Test Mode | Test Software Version | Broadcom Blue Tool 1.7.3.3 |         |         |
|-----------|-----------------------|----------------------------|---------|---------|
|           |                       | Test Frequency             | 2402MHz | 2441MHz |
| GFSK      | Power Level Setting   | 127                        | 127     | 127     |

### Equipment Modifications

No modification was made to the EUT.


### Support Equipment List and Details

| Manufacturer | Description | Model    | Serial Number |
|--------------|-------------|----------|---------------|
| DELL         | Laptop      | PP11L    | QDS-BRCM1017  |
| HP           | Printer     | C3941A   | JPTVOB2337    |
| SAST         | Modem       | AEM-2100 | 0293          |

### External Cable

| Cable Description | Shielding Type | Ferrite Core | Length (m) | From Port               | To      |
|-------------------|----------------|--------------|------------|-------------------------|---------|
| Parallel Cable    | yes            | No           | 1.2        | Parallel Port of Laptop | Printer |
| Serial Cable      | yes            | No           | 1.2        | Serial Port of Laptop   | Modem   |
| USB Cable         | No             | No           | 1.2        | EUT                     | Laptop  |

### Block Diagram of Test Setup

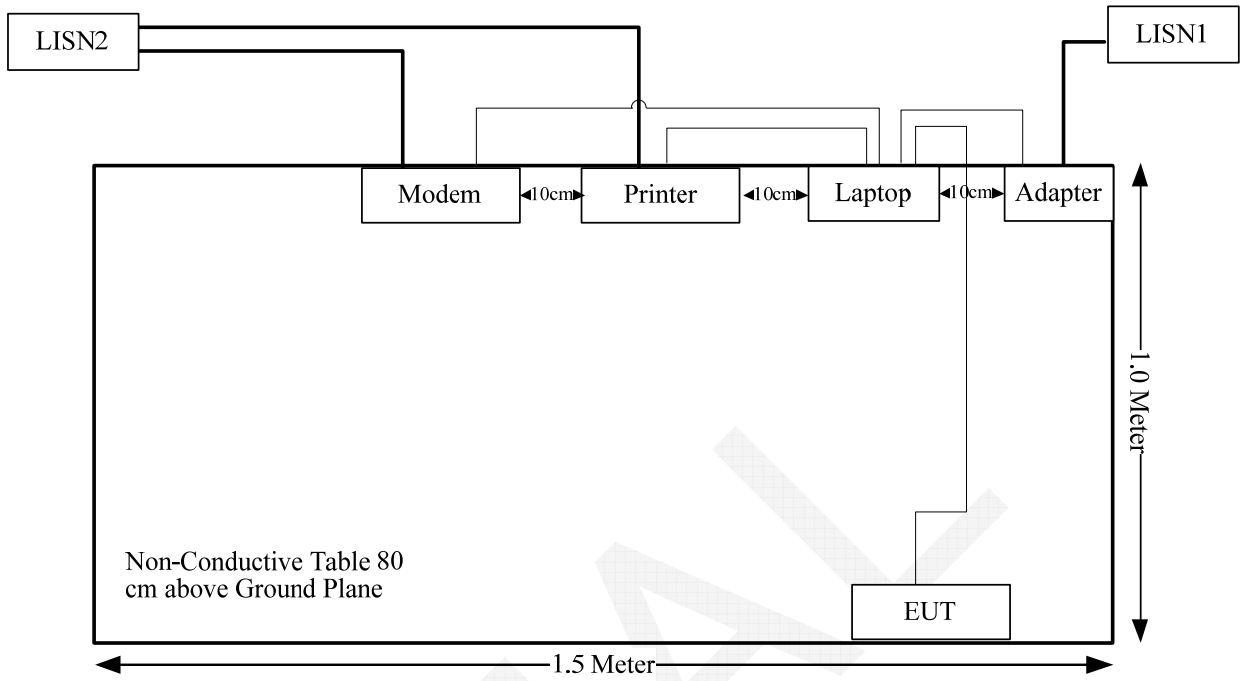

**SUMMARY OF TEST RESULTS**

| <b>FCC Rules</b>                    | <b>Description of Test</b>       | <b>Result</b> |
|-------------------------------------|----------------------------------|---------------|
| FCC §15.247 (i) & §1.1310 & §2.1093 | RF Exposure                      | Compliance    |
| §15.203                             | Antenna Requirement              | Compliance    |
| §15.207 (a)                         | Conducted Emissions              | Compliance    |
| §15.205, §15.209, §15.247(d)        | Spurious Emissions               | Compliance    |
| §15.247 (a)(1)                      | 20 dB Bandwidth                  | Compliance    |
| §15.247(a)(1)                       | Channel Separation Test          | Compliance    |
| §15.247(a)(1)(iii)                  | Time of Occupancy (Dwell Time)   | Compliance    |
| §15.247(a)(1)(iii)                  | Quantity of hopping channel Test | Compliance    |
| §15.247(b)(1)                       | Peak Output Power Measurement    | Compliance    |
| §15.247(d)                          | Band Edges                       | Compliance    |

## **FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE**

### **Applicable Standard**

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v05r02:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

### **Measurement Result**

The maximum conducted output power = 0.80 dBm (1.20 mW) at 2480 MHz  
 $[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})] [\sqrt{f(\text{GHz})}]$   
 $= 1.20/5 \cdot (\sqrt{2.48}) = 0.378 < 3.0$

**So the stand-alone SAR evaluation is not necessary.**



---

## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Antenna Connector Construction**

The EUT has one integral antenna arrangement and antenna gain is -0.72 dBi, which was permanently attached ,fulfill the requirement of this section, please refer to the EUT photos.

**Result:** Compliance.

**FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS**

**Applicable Standard**

FCC§15.207

**Measurement Uncertainty**

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of  $U_{cispr}$

| Measurement   | $U_{cispr}$ |
|---|-------------|
| Conducted disturbance at mains port using AMN (150 kHz to 30 MHz) | 3.4 dB      |

**EUT Setup**

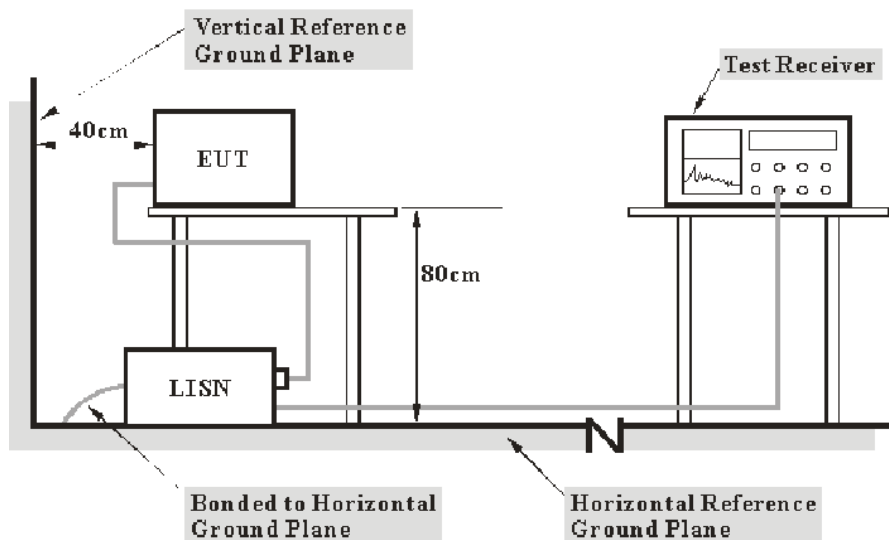

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter of laptop was connected to a 120 VAC/60 Hz power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

### Test Procedure

During the conducted emission test, the adapter of laptop was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

$V_C$ : corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Equipment List and Details

| Manufacturer | Description        | Model   | Serial Number | Calibration Date | Calibration Due Date |
|--------------|--------------------|---------|---------------|------------------|----------------------|
| R&S          | EMI Test Receiver  | ESCS 30 | 830245/006    | 2014-10-16       | 2015-10-16           |
| R&S          | L.I.S.N            | ESH3-Z5 | 843331/015    | N/A              | N/A                  |
| R&S          | Two-line V-network | ENV 216 | 3560.6550.12  | 2014-01-22       | 2015-01-22           |
| R&S          | Test Software      | EMC32   | Version8.53.0 | N/A              | N/A                  |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

**3.2 dB at 0.281497 MHz** in the **Neutral** conducted mode

### Test Data


#### Environmental Conditions

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 25.8 °C   |
| <b>Relative Humidity:</b> | 50 %      |
| <b>ATM Pressure:</b>      | 100.8 kPa |

*The testing was performed Sevin Li 2014-10-30.*

Test Mode: Charging&Transmitting


AC120 V, 60 Hz, Line:

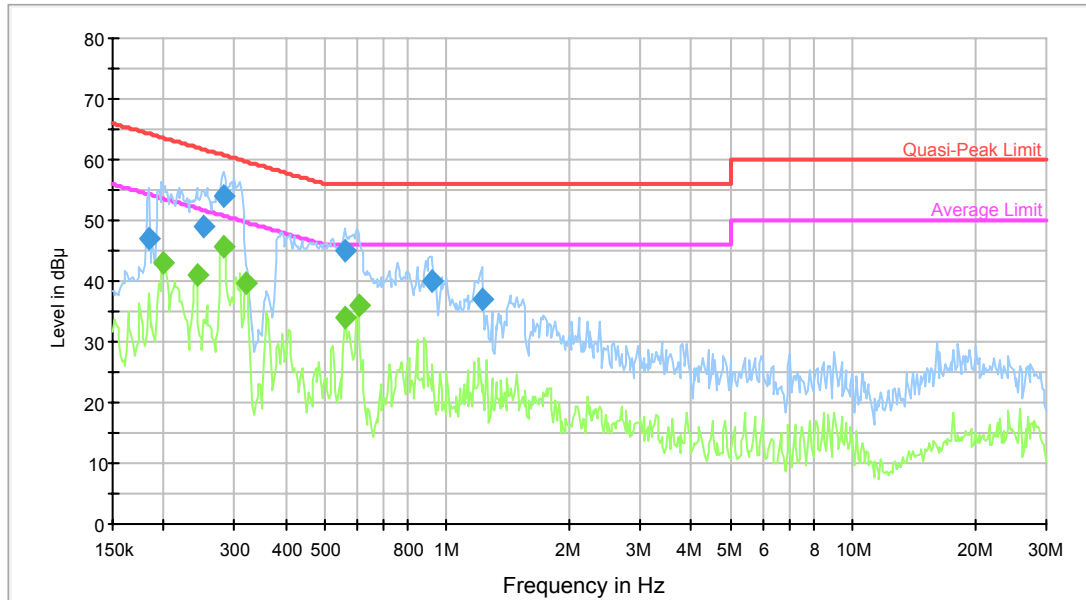

| Frequency (MHz) | QuasiPeak (dBµV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) | Comment |
|-----------------|------------------|-----------------|------|------------|-------------|--------------|---------|
| 0.184529        | 46.9             | 9.000           | L1   | 10.5       | 17.4        | 64.3         |         |
| 0.251783        | 49.1             | 9.000           | L1   | 10.7       | 12.6        | 61.7         |         |
| 0.281497        | 53.9             | 9.000           | L1   | 10.7       | 6.9         | 60.8         |         |
| 0.558572        | 44.9             | 9.000           | L1   | 10.3       | 11.1        | 56.0         |         |
| 0.915445        | 40.0             | 9.000           | L1   | 10.5       | 16.0        | 56.0         |         |
| 1.219583        | 37.1             | 9.000           | L1   | 10.4       | 18.9        | 56.0         |         |

| Frequency (MHz) | Average (dBµV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) | Comment |
|-----------------|----------------|-----------------|------|------------|-------------|--------------|---------|
| 0.199835        | 42.9           | 9.000           | L1   | 10.8       | 10.7        | 53.6         |         |
| 0.241949        | 40.8           | 9.000           | L1   | 10.7       | 11.2        | 52.0         |         |
| 0.281497        | 45.5           | 9.000           | L1   | 10.7       | 5.3         | 50.8         |         |
| 0.319773        | 39.7           | 9.000           | L1   | 10.7       | 10.0        | 49.7         |         |
| 0.563041        | 33.9           | 9.000           | L1   | 10.4       | 12.1        | 46.0         |         |
| 0.604902        | 35.9           | 9.000           | L1   | 10.5       | 10.1        | 46.0         |         |

**AC120 V, 60 Hz, Neutral:**

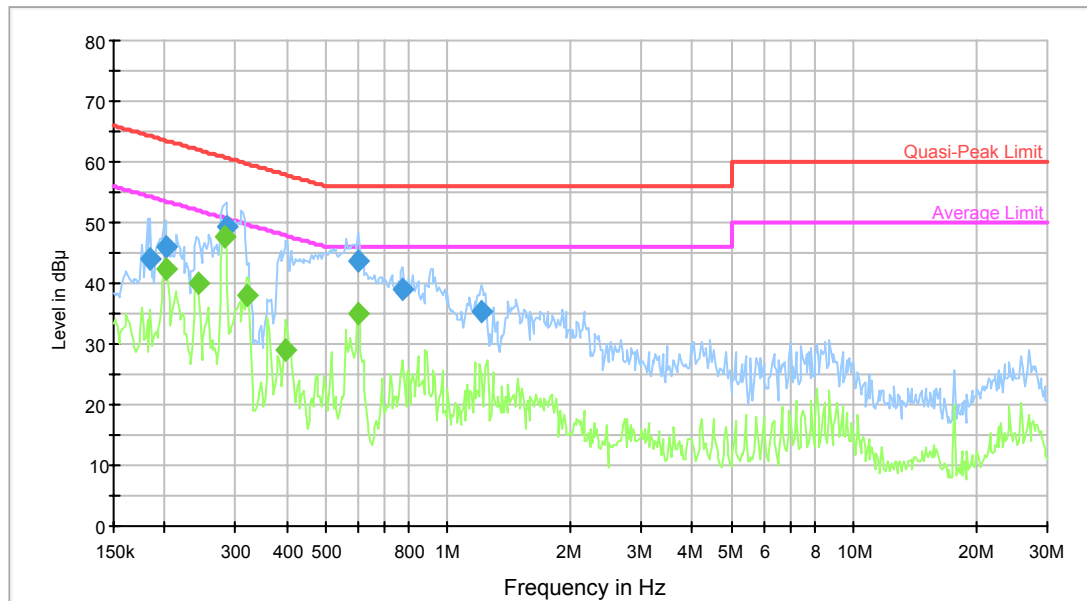

| Frequency (MHz) | QuasiPeak (dBµV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) | Comment |
|-----------------|------------------|-----------------|------|------------|-------------|--------------|---------|
| 0.184529        | 44.0             | 9.000           | N    | 11.0       | 20.2        | 64.3         |         |
| 0.201433        | 46.1             | 9.000           | N    | 11.4       | 17.5        | 63.6         |         |
| 0.283749        | 49.4             | 9.000           | N    | 11.2       | 11.3        | 60.7         |         |
| 0.600101        | 43.7             | 9.000           | N    | 10.5       | 12.4        | 56.0         |         |
| 0.774393        | 39.0             | 9.000           | N    | 10.5       | 17.0        | 56.0         |         |
| 1.209904        | 35.3             | 9.000           | N    | 10.5       | 20.7        | 56.0         |         |

| Frequency (MHz) | Average (dBµV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) | Comment |
|-----------------|----------------|-----------------|------|------------|-------------|--------------|---------|
| 0.201433        | 42.3           | 9.000           | N    | 11.4       | 11.2        | 53.6         |         |
| 0.241949        | 40.0           | 9.000           | N    | 11.2       | 12.1        | 52.0         |         |
| 0.281497        | 47.6           | 9.000           | N    | 11.2       | 3.2*        | 50.8         |         |
| 0.319773        | 38.1           | 9.000           | N    | 11.1       | 11.6        | 49.7         |         |
| 0.399703        | 28.9           | 9.000           | N    | 10.8       | 19.0        | 47.9         |         |
| 0.600101        | 35.1           | 9.000           | N    | 10.5       | 10.9        | 46.0         |         |

\*Within measurement uncertainty!

**FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**

**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

**Measurement Uncertainty**

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB

Table 1 – Values of  $U_{cispr}$


| Measurement  | $U_{cispr}$ |
|--|-------------|
| Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz) | 6.3 dB      |
| Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)                   | 5.2 dB      |
| Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)                  | 5.5 dB      |

**EUT Setup**

**Below 1GHz:**

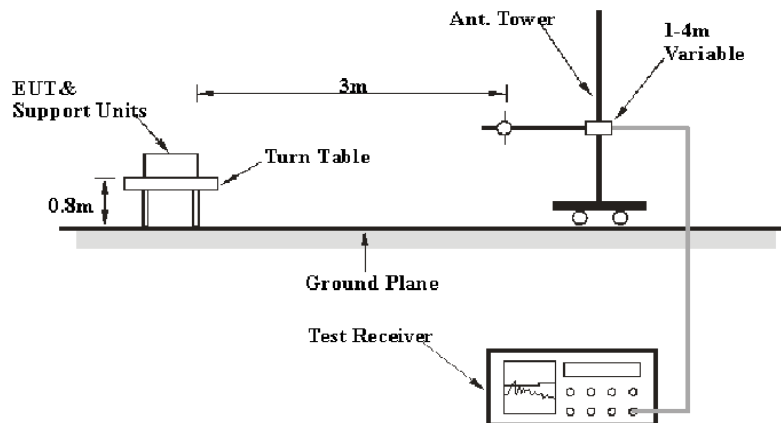

**Above 1GHz:**

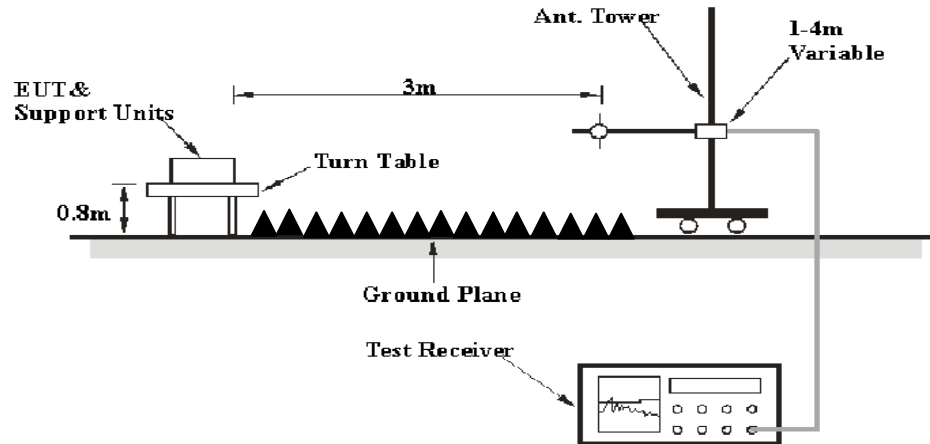

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

**EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range   | RBW     | Video B/W | IF B/W  | Detector |
|-------------------|---------|-----------|---------|----------|
| 30 MHz – 1000 MHz | 120 kHz | 300 kHz   | 120 kHz | QP       |
| Above 1 GHz       | 1MHz    | 3 MHz     | /       | PK       |
|                   | 1MHz    | 10 Hz     | /       | Ave.     |

**Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and Average detection modes for frequencies above 1 GHz.



## Test Equipment List and Details

| Manufacturer          | Description       | Model               | Serial Number      | Calibration Date | Calibration Due Date |
|-----------------------|-------------------|---------------------|--------------------|------------------|----------------------|
| R&S                   | EMI Test Receiver | ESCI                | 100224             | 2014-05-09       | 2015-05-09           |
| Sunol Sciences        | Antenna           | JB3                 | A060611-3          | 2014-07-28       | 2017-07-27           |
| HP                    | Amplifier         | 8447E               | 2434A02181         | 2014-09-01       | 2015-09-01           |
| R&S                   | Spectrum Analyzer | FSEM                | DE31388            | 2014-05-09       | 2015-05-09           |
| ETS LINDGREN          | Horn Antenna      | 3115                | 000 527 35         | 2012-09-06       | 2015-09-06           |
| Mini-Circuit          | Amplifier         | ZVA-213-S+          | 054201245          | 2014-02-19       | 2015-02-19           |
| R&S                   | Spectrum Analyzer | FSP 38              | 100478             | 2014-05-09       | 2015-05-09           |
| Ducommun Technologies | Horn Antenna      | ARH-4223-02         | 1007726-01<br>1304 | 2014-06-16       | 2017-06-15           |
| Quinstar              | Amplifier         | QLW-<br>18405536-JO | 15964001001        | 2014-09-06       | 2015-09-06           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

**7.16 dB at 4882 MHz in the Horizontal polarization**

## Test Data

### Environmental Conditions

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 26.5 °C   |
| <b>Relative Humidity:</b> | 52 %      |
| <b>ATM Pressure:</b>      | 100.6 kPa |

\* The testing was performed by Sevin Li on 2014-11-03.

Test Mode: Transmitting


*BDR Mode (GFSK):*

| Frequency<br>(MHz)       | Receiver          |                        | Rx Antenna     |                | Cable<br>loss<br>(dB) | Amplifier<br>Gain<br>(dB) | Corrected<br>Amplitude<br>(dBµV/m) | FCC 15.247        |                |
|--------------------------|-------------------|------------------------|----------------|----------------|-----------------------|---------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBµV) | Detector<br>(PK/QP/AV) | Polar<br>(H/V) | Factor<br>(dB) |                       |                           |                                    | Limit<br>(dBµV/m) | Margin<br>(dB) |
| Low Channel: 2402 MHz    |                   |                        |                |                |                       |                           |                                    |                   |                |
| 2402                     | 66.64             | PK                     | H              | 25.65          | 4.42                  | 0.00                      | 96.71                              | N/A               | N/A            |
| 2402                     | 57.45             | AV                     | H              | 25.65          | 4.42                  | 0.00                      | 87.52                              | N/A               | N/A            |
| 2402                     | 64.43             | PK                     | V              | 25.65          | 4.42                  | 0.00                      | 94.50                              | N/A               | N/A            |
| 2402                     | 55.03             | AV                     | V              | 25.65          | 4.42                  | 0.00                      | 85.10                              | N/A               | N/A            |
| 2390                     | 25.44             | PK                     | H              | 25.61          | 4.39                  | 0.00                      | 55.44                              | 74.00             | 18.56          |
| 2390                     | 13.71             | AV                     | H              | 25.61          | 4.39                  | 0.00                      | 43.71                              | 54.00             | 10.29          |
| 4804                     | 41.21             | PK                     | H              | 30.59          | 5.98                  | 27.41                     | 50.37                              | 74.00             | 23.63          |
| 4804                     | 30.45             | AV                     | H              | 30.59          | 5.98                  | 27.41                     | 39.61                              | 54.00             | 14.39          |
| 7206                     | 38.22             | PK                     | H              | 34.09          | 7.45                  | 25.91                     | 53.85                              | 74.00             | 20.15          |
| 7206                     | 26.83             | AV                     | H              | 34.09          | 7.45                  | 25.91                     | 42.46                              | 54.00             | 11.54          |
| 9608                     | 30.94             | PK                     | H              | 35.96          | 8.80                  | 27.55                     | 48.15                              | 74.00             | 25.85          |
| 9608                     | 19.52             | AV                     | H              | 35.96          | 8.80                  | 27.55                     | 36.73                              | 54.00             | 17.27          |
| 12010                    | 30.44             | PK                     | H              | 37.89          | 9.04                  | 24.38                     | 52.99                              | 74.00             | 21.01          |
| 12010                    | 19.27             | AV                     | H              | 37.89          | 9.04                  | 24.38                     | 41.82                              | 54.00             | 12.18          |
| 402                      | 26.9              | QP                     | H              | 16.25          | 2.43                  | 21.78                     | 23.80                              | 46.00             | 22.20          |
| Middle Channel: 2441 MHz |                   |                        |                |                |                       |                           |                                    |                   |                |
| 2441                     | 66.81             | PK                     | H              | 25.75          | 4.40                  | 0.00                      | 96.96                              | N/A               | N/A            |
| 2441                     | 57.62             | AV                     | H              | 25.75          | 4.40                  | 0.00                      | 87.77                              | N/A               | N/A            |
| 2441                     | 64.75             | PK                     | H              | 25.75          | 4.40                  | 0.00                      | 94.90                              | N/A               | N/A            |
| 2441                     | 55.03             | AV                     | H              | 25.75          | 4.40                  | 0.00                      | 85.18                              | N/A               | N/A            |
| 4882                     | 46.48             | PK                     | H              | 30.79          | 6.08                  | 27.42                     | 55.93                              | 74.00             | 18.07          |
| 4882                     | 37.39             | AV                     | H              | 30.79          | 6.08                  | 27.42                     | 46.84                              | 54.00             | 7.16           |
| 7323                     | 37.61             | PK                     | H              | 34.38          | 7.51                  | 25.88                     | 53.62                              | 74.00             | 20.38          |
| 7323                     | 25.85             | AV                     | H              | 34.38          | 7.51                  | 25.88                     | 41.86                              | 54.00             | 12.14          |
| 9764                     | 31.29             | PK                     | H              | 36.33          | 8.83                  | 27.20                     | 49.25                              | 74.00             | 24.75          |
| 9764                     | 18.86             | AV                     | H              | 36.33          | 8.83                  | 27.20                     | 36.82                              | 54.00             | 17.18          |
| 12205                    | 30.04             | PK                     | H              | 37.70          | 9.17                  | 24.37                     | 52.54                              | 74.00             | 21.46          |
| 12205                    | 19.42             | AV                     | H              | 37.70          | 9.17                  | 24.37                     | 41.92                              | 54.00             | 12.08          |
| 3624                     | 32.81             | PK                     | H              | 29.07          | 5.01                  | 27.28                     | 39.61                              | 74.00             | 34.39          |
| 3624                     | 20.61             | AV                     | H              | 29.07          | 5.01                  | 27.28                     | 27.41                              | 54.00             | 26.59          |
| 402                      | 26.8              | QP                     | H              | 16.25          | 2.43                  | 21.78                     | 23.70                              | 46.00             | 22.30          |
| High Channel: 2480 MHz   |                   |                        |                |                |                       |                           |                                    |                   |                |
| 2480                     | 66.56             | PK                     | H              | 25.85          | 4.48                  | 0.00                      | 96.89                              | N/A               | N/A            |
| 2480                     | 57.36             | AV                     | H              | 25.85          | 4.48                  | 0.00                      | 87.69                              | N/A               | N/A            |
| 2480                     | 64.39             | PK                     | V              | 25.85          | 4.48                  | 0.00                      | 94.72                              | N/A               | N/A            |
| 2480                     | 55.02             | AV                     | V              | 25.85          | 4.48                  | 0.00                      | 85.35                              | N/A               | N/A            |
| 2483.5                   | 28.72             | PK                     | H              | 25.86          | 4.49                  | 0.00                      | 59.07                              | 74.00             | 14.93          |
| 2483.5                   | 14.23             | AV                     | H              | 25.86          | 4.49                  | 0.00                      | 44.58                              | 54.00             | 9.42           |
| 4960                     | 42.39             | PK                     | H              | 31.00          | 5.90                  | 27.43                     | 51.86                              | 74.00             | 22.14          |
| 4960                     | 32.04             | AV                     | H              | 31.00          | 5.90                  | 27.43                     | 41.51                              | 54.00             | 12.49          |
| 7440                     | 36.86             | PK                     | H              | 34.66          | 7.58                  | 25.97                     | 53.13                              | 74.00             | 20.87          |
| 7440                     | 25.5              | AV                     | H              | 34.66          | 7.58                  | 25.97                     | 41.77                              | 54.00             | 12.23          |
| 9920                     | 30.81             | PK                     | H              | 36.71          | 8.87                  | 26.66                     | 49.73                              | 74.00             | 24.27          |
| 9920                     | 19.12             | AV                     | H              | 36.71          | 8.87                  | 26.66                     | 38.04                              | 54.00             | 15.96          |
| 12400                    | 29.98             | PK                     | H              | 37.50          | 9.30                  | 25.21                     | 51.57                              | 74.00             | 22.43          |
| 12400                    | 19.6              | AV                     | H              | 37.50          | 9.30                  | 25.21                     | 41.19                              | 54.00             | 12.81          |
| 402                      | 27.1              | QP                     | H              | 16.25          | 2.43                  | 21.78                     | 24.00                              | 46.00             | 22.00          |


**Conducted Spurious Emissions at Antenna Port**

BDR Mode (GFSK):


**Low Channel**

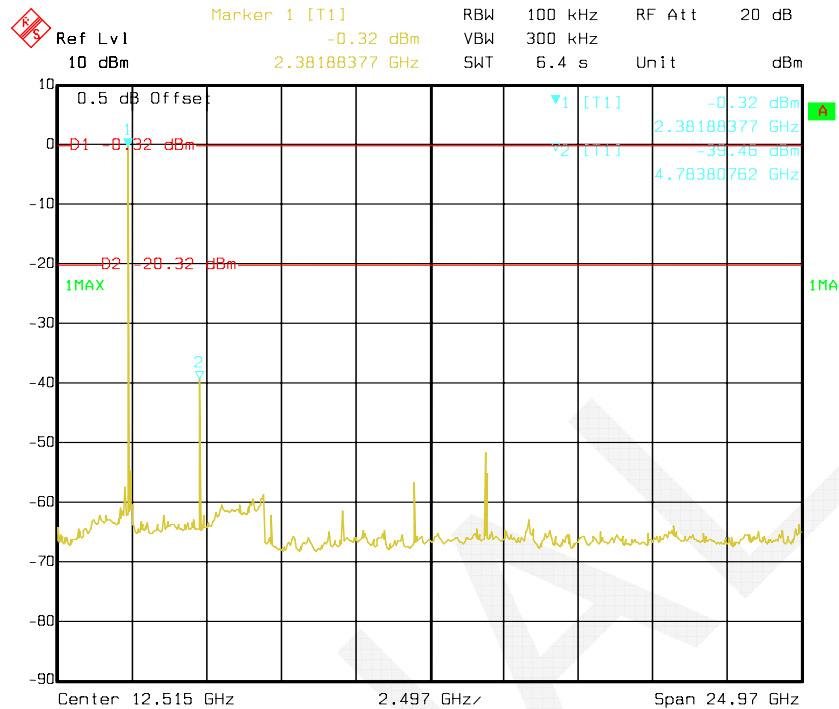

**Middle Channel**

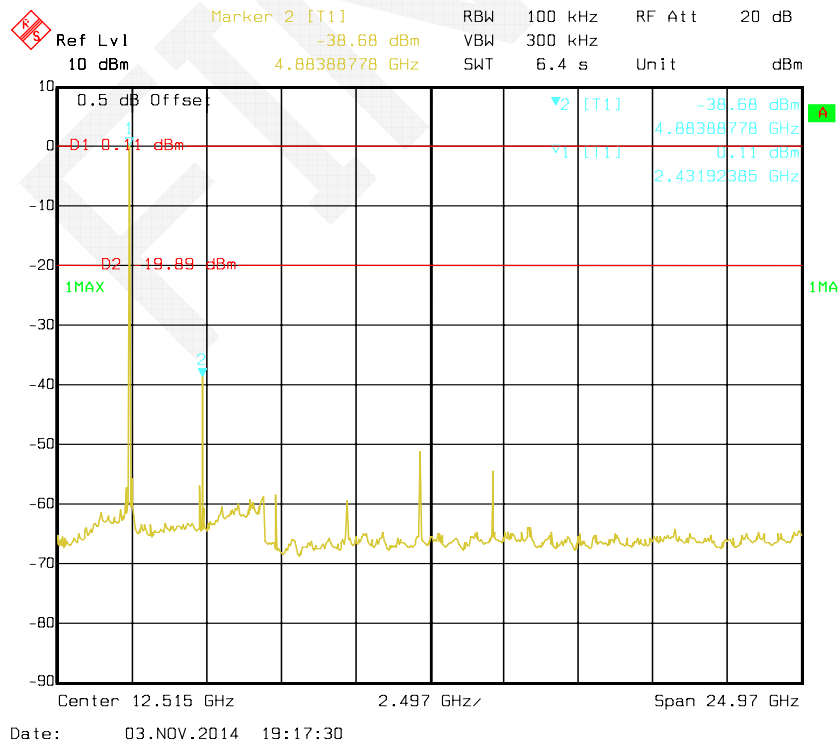

### High Channel

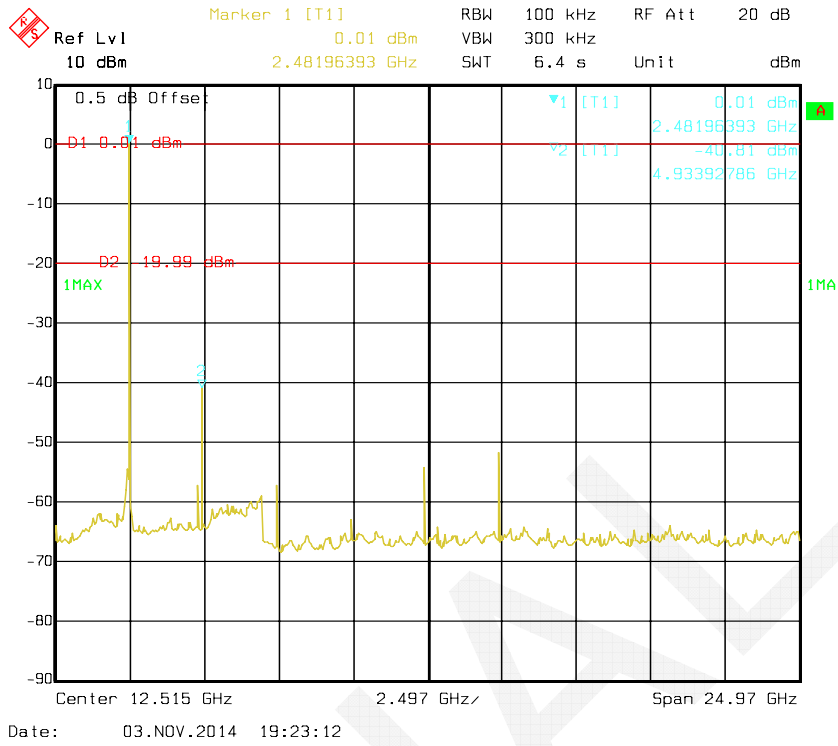

## FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

### Test Equipment List and Details

| Manufacturer | Description       | Model  | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|--------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSP 38 | 100478        | 2014-05-09       | 2015-05-09           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 27.2 °C   |
| Relative Humidity: | 45 %      |
| ATM Pressure:      | 100.9 kPa |

\* The testing was performed by Sevin Li on 2014-11-03.

**Test Result:** Compliant.

Please refer to following tables and plots


Test Mode: Transmitting

| Mode            | Channel  | Frequency (MHz) | Channel Separation (MHz) | Limit (MHz) | Result |
|-----------------|----------|-----------------|--------------------------|-------------|--------|
| BDR Mode (GFSK) | Low      | 2402            | 1.000                    | 0.699       | Pass   |
|                 | Adjacent | 2403            |                          |             |        |
|                 | Middle   | 2441            | 1.004                    | 0.699       | Pass   |
|                 | Adjacent | 2442            |                          |             |        |
|                 | High     | 2480            | 1.000                    | 0.699       | Pass   |
|                 | Adjacent | 2479            |                          |             |        |

Note: Limit= (2/3) × 20dB bandwidth


BDR Mode (GFSK):

Low Channel

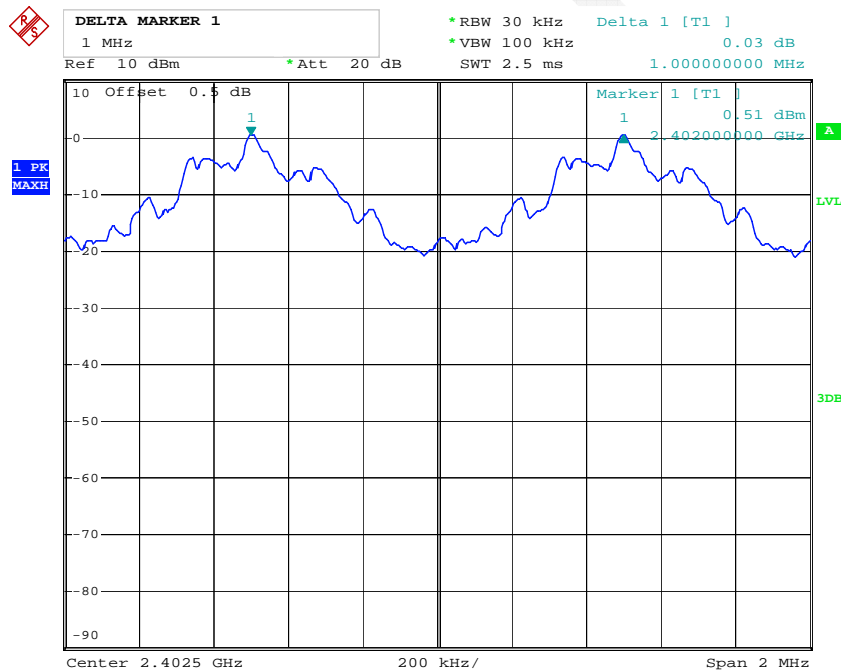


Date: 3.NOV.2014 20:51:25

**Middle Channel**

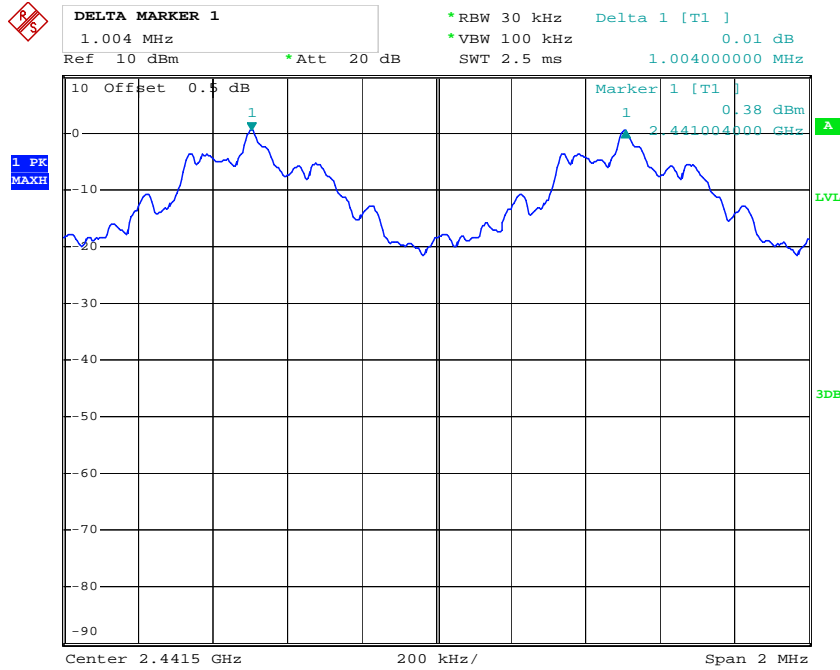

Date: 3.NOV.2014 20:52:57

**High Channel**

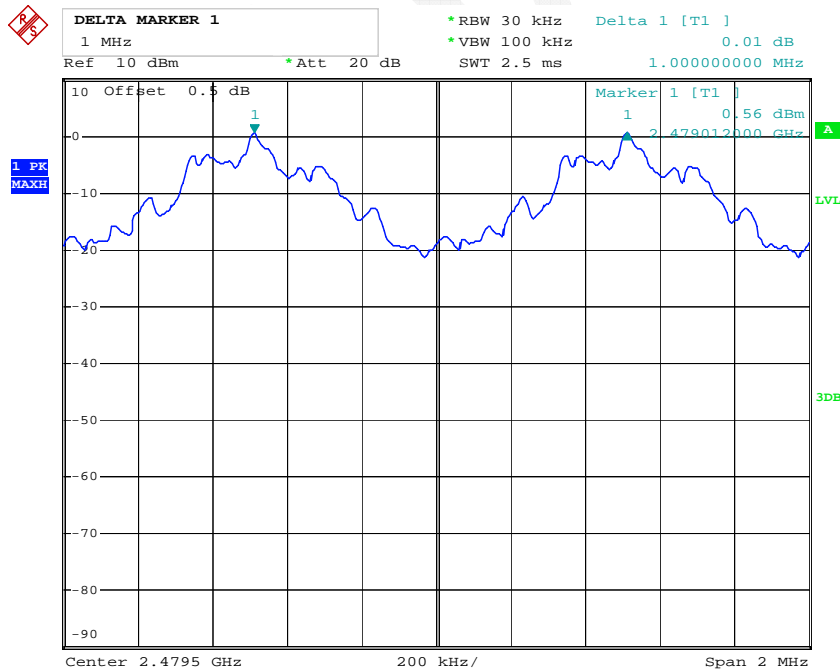

Date: 3.NOV.2014 20:54:33

## FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Equipment List and Details

| Manufacturer | Description       | Model  | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|--------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSP 38 | 100478        | 2014-05-09       | 2015-05-09           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 26.8 °C   |
| <b>Relative Humidity:</b> | 47 %      |
| <b>ATM Pressure:</b>      | 100.9 kPa |

\* *The testing was performed by Sevin Li on 2014-11-03.*

**Test Result:** Compliant.

Please refer to following tables and plots




Test Mode: Transmitting

| Mode            | Channel | Frequency (MHz) | 20 dB Bandwidth (MHz) |
|-----------------|---------|-----------------|-----------------------|
| BDR Mode (GFSK) | Low     | 2402            | 1.048                 |
|                 | Middle  | 2441            | 1.040                 |
|                 | High    | 2480            | 1.036                 |

Please refer to the following plots.


BDR Mode (GFSK):

Low Channel

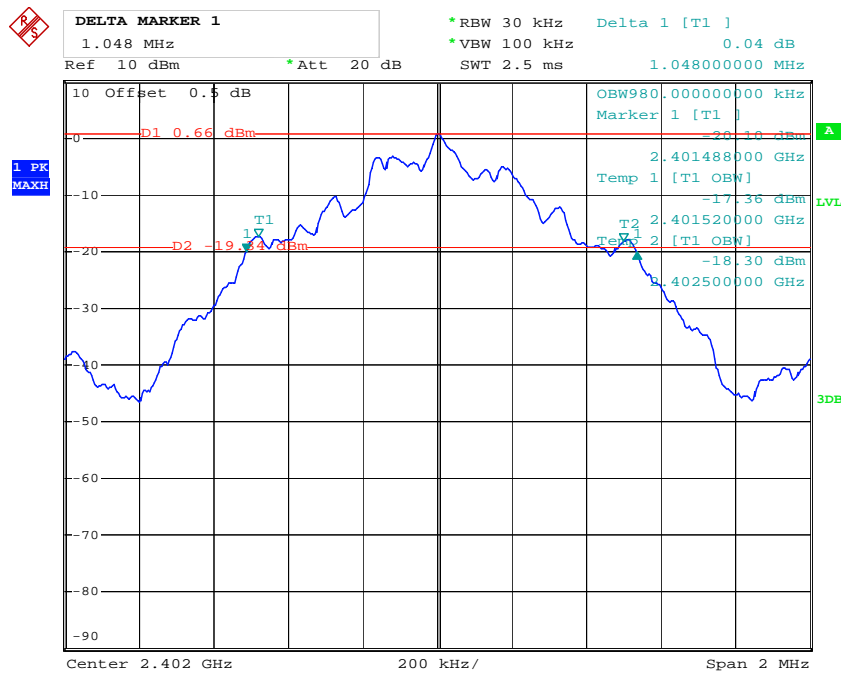


Date: 3.NOV.2014 20:45:43

### Middle Channel

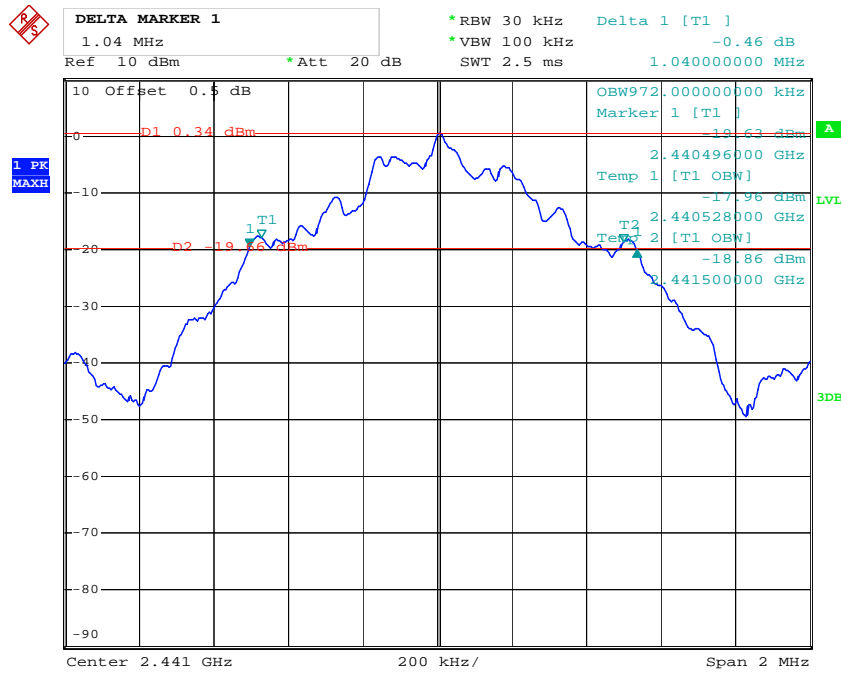

Date: 5.NOV.2014 09:31:28

### High Channel

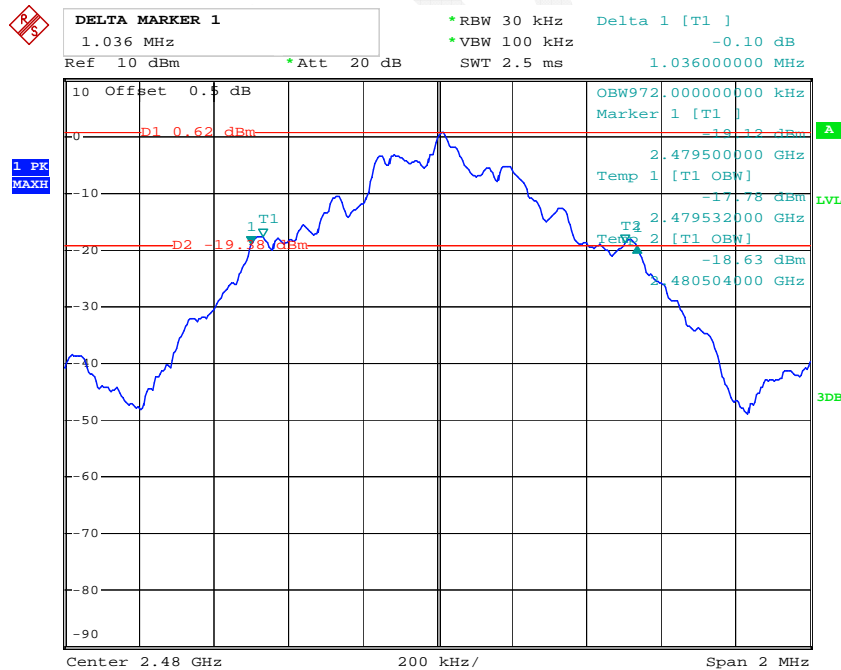

Date: 3.NOV.2014 20:49:06

## **FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST**

### **Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### **Test Procedure**

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

### **Test Equipment List and Details**

| Manufacturer | Description       | Model  | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|--------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSP 38 | 100478        | 2014-05-09       | 2015-05-09           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### **Test Data**

#### **Environmental Conditions**

|                           |         |
|---------------------------|---------|
| <b>Temperature:</b>       | 27 °C   |
| <b>Relative Humidity:</b> | 52 %    |
| <b>ATM Pressure:</b>      | 101 kPa |

\* *The testing was performed by Sevin Li on 2014-11-03.*

**Test Result:** Compliant.


Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):

| Frequency Range (GHz) | Number of Hopping Channel | Limit |
|-----------------------|---------------------------|-------|
| 2.4-2.4835            | 79                        | ≥15   |

Number of Hopping Channels

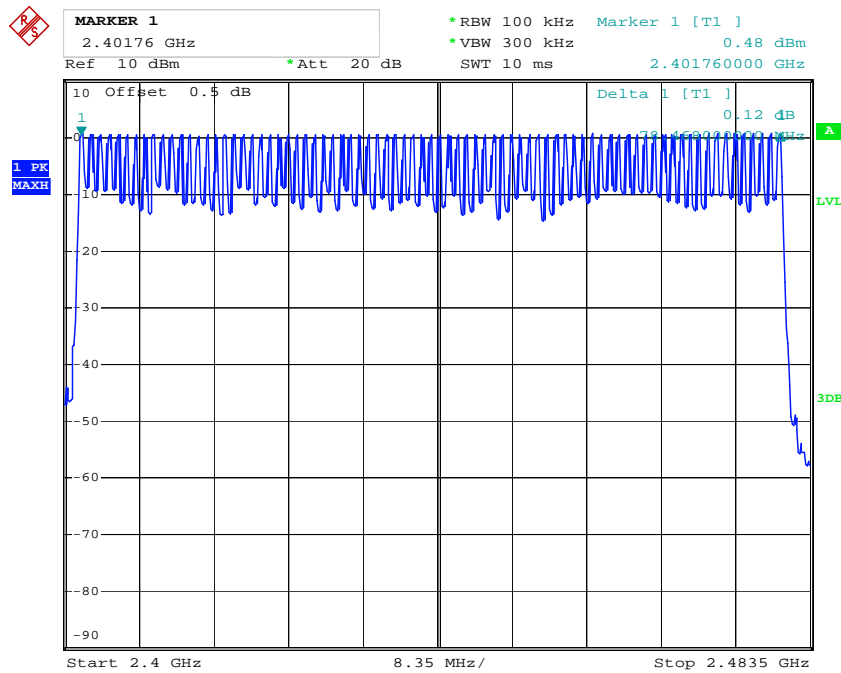

Date: 3.NOV.2014 21:10:25

**FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**

**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Procedure**

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 \* channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length \* hope rate/ number of hopping channels \* 31.6s  
 Hop rate=1600/s

**Test Equipment List and Details**

| Manufacturer | Description       | Model  | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|--------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSP 38 | 100478        | 2014-05-09       | 2015-05-09           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data**

**Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 26.8 °C   |
| <b>Relative Humidity:</b> | 47 %      |
| <b>ATM Pressure:</b>      | 100.9 kPa |

\* *The testing was performed by Sevin Li on 2014-11-05.*

**Test Result:** Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

BDR (GFSK):

| Mode   | Channel | Pulse Width | Dwell Time | Limit | Result |
|--|---------|-------------|------------|-------|--------|
|  |         | (ms)        | (s)        | (s)   |        |
| DH 1   | Low     | 0.454       | 0.145      | 0.4   | Pass   |
|  | Middle  | 0.454       | 0.145      | 0.4   | Pass   |
|  | High    | 0.454       | 0.145      | 0.4   | Pass   |
| <i>Note: Dwell time = Pulse time (ms) × (1600/2/79) × 31.6 s</i> |         |             |            |       |        |
| DH 3   | Low     | 1.714       | 0.274      | 0.4   | Pass   |
|  | Middle  | 1.714       | 0.274      | 0.4   | Pass   |
|  | High    | 1.714       | 0.274      | 0.4   | Pass   |
| <i>Note: Dwell time = Pulse time (ms) × (1600/4/79) × 31.6 s</i> |         |             |            |       |        |
| DH 5   | Low     | 2.978       | 0.318      | 0.4   | Pass   |
|  | Middle  | 2.978       | 0.318      | 0.4   | Pass   |
|  | High    | 2.978       | 0.318      | 0.4   | Pass   |
| <i>Note: Dwell time = Pulse time (ms) × (1600/6/79) × 31.6 s</i> |         |             |            |       |        |


BDR Mode (GFSK):

### DH1: Low Channel

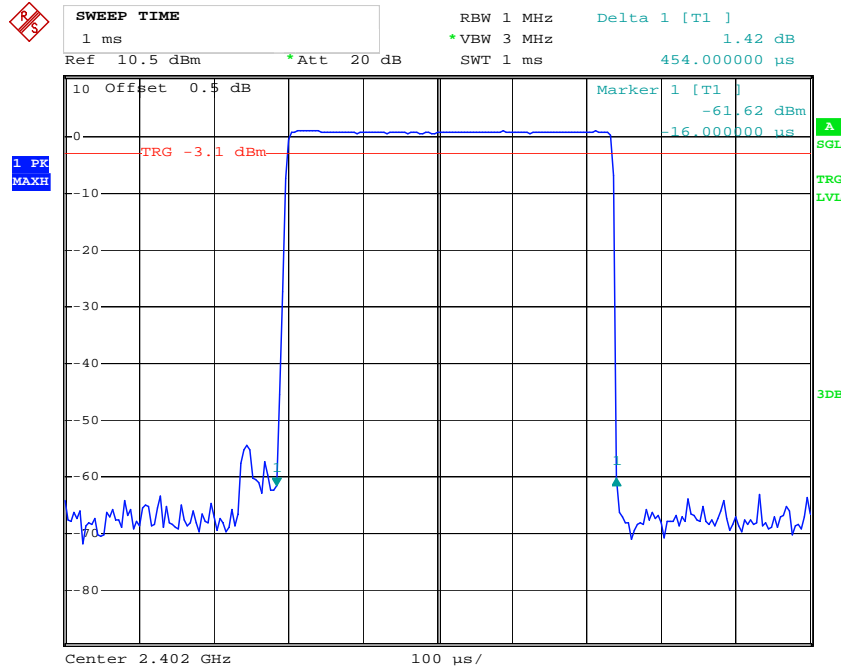


Date: 5.NOV.2014 20:20:42

### DH1: Middle Channel

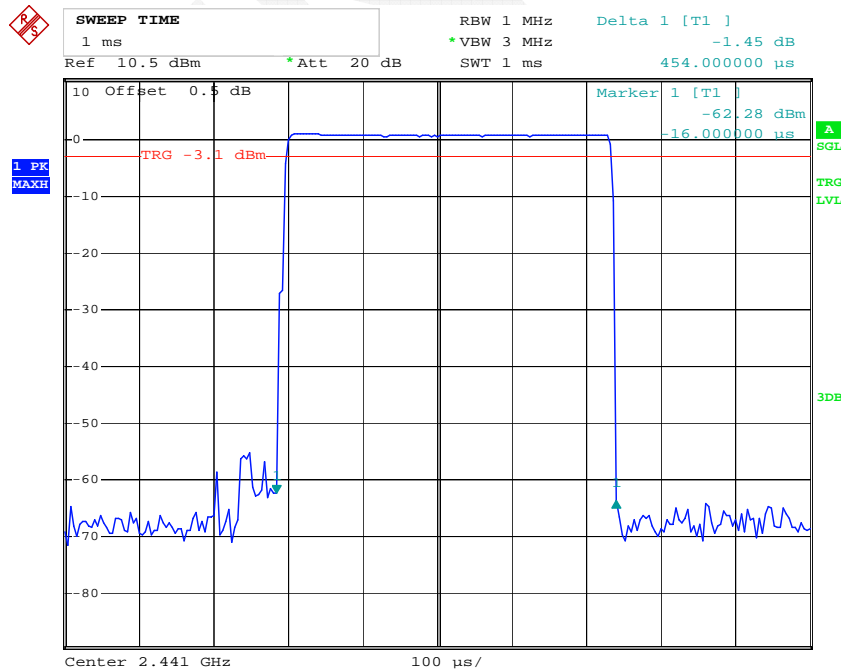


Date: 5.NOV.2014 20:21:01

### DH1: High Channel

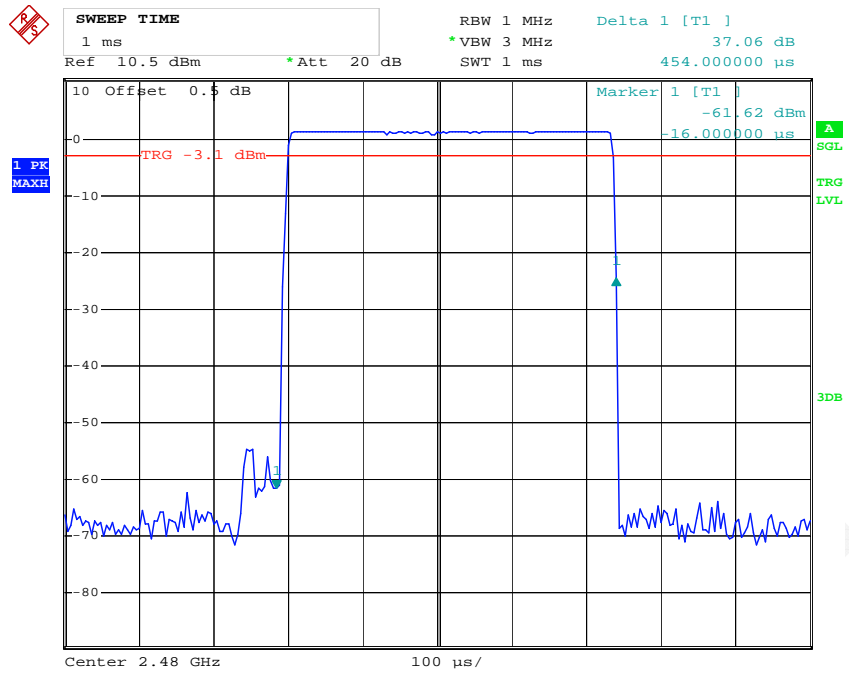

Date: 5.NOV.2014 20:21:40


### DH3: Low Channel

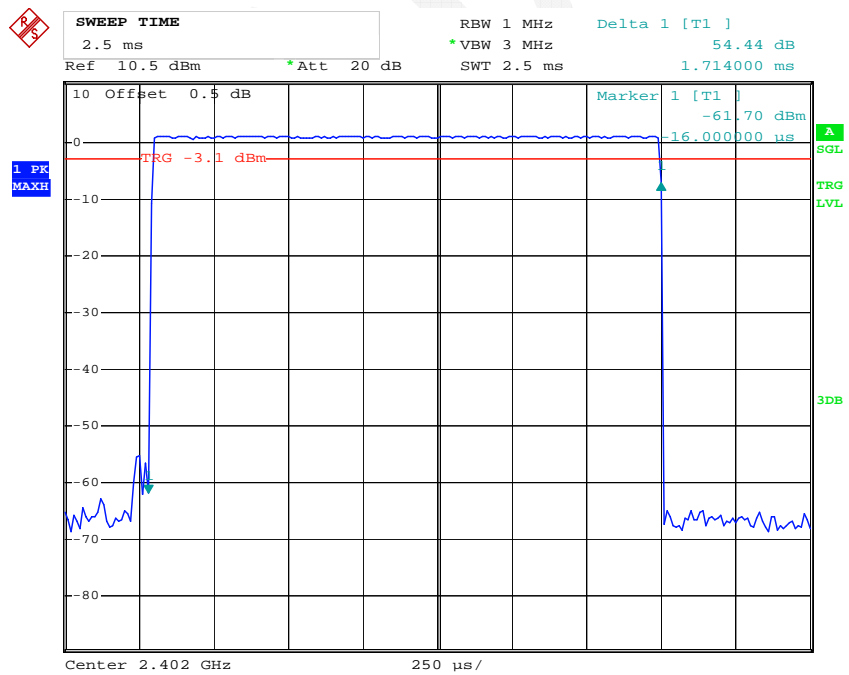

Date: 5.NOV.2014 20:23:53




### DH3: Middle Channel

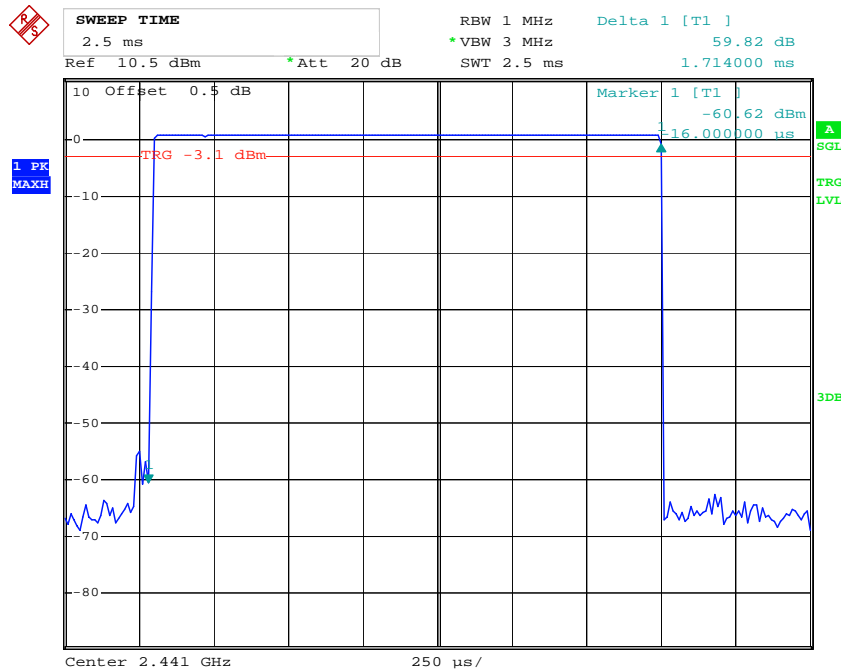


Date: 5.NOV.2014 20:23:43

### DH3: High Channel

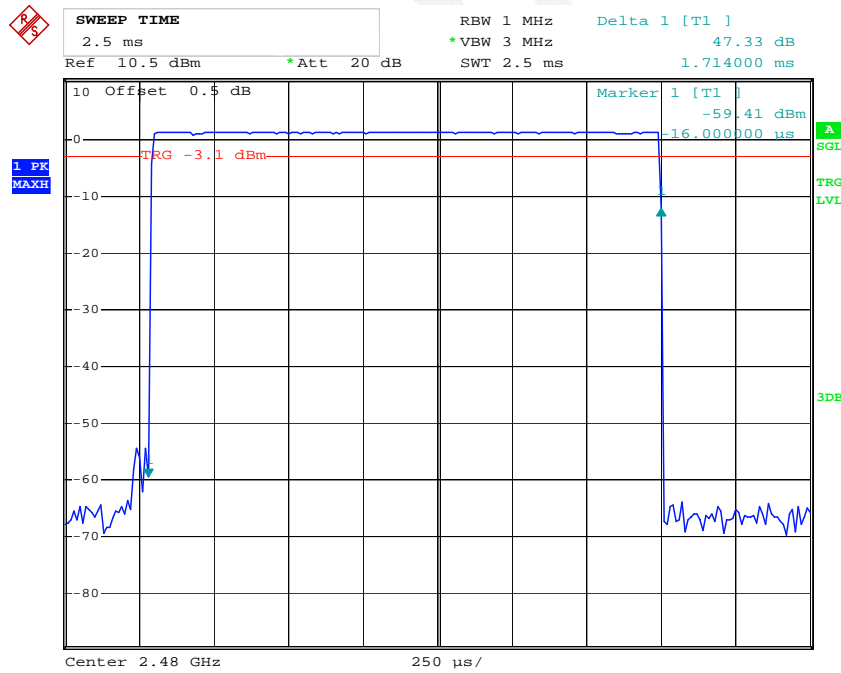


Date: 5.NOV.2014 20:23:36

### DH5: Low Channel

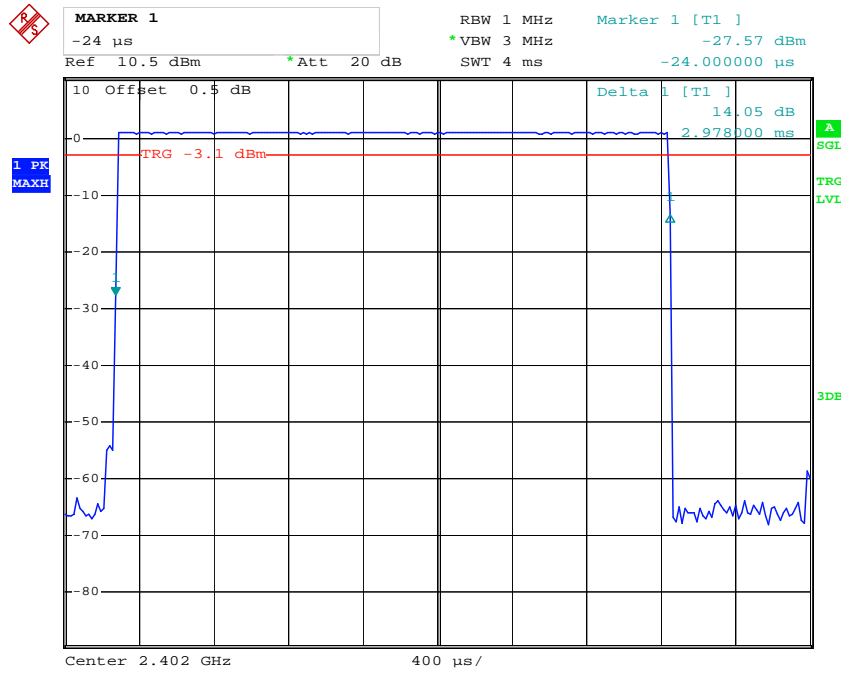


Date: 5.NOV.2014 20:24:37

### DH5: Middle Channel

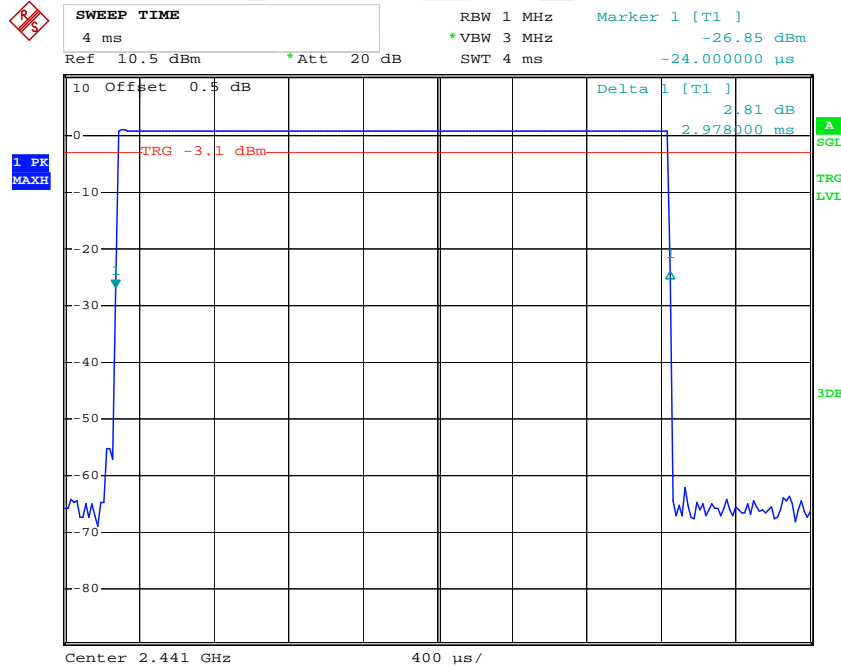

Date: 5.NOV.2014 20:24:46

### DH5: High Channel

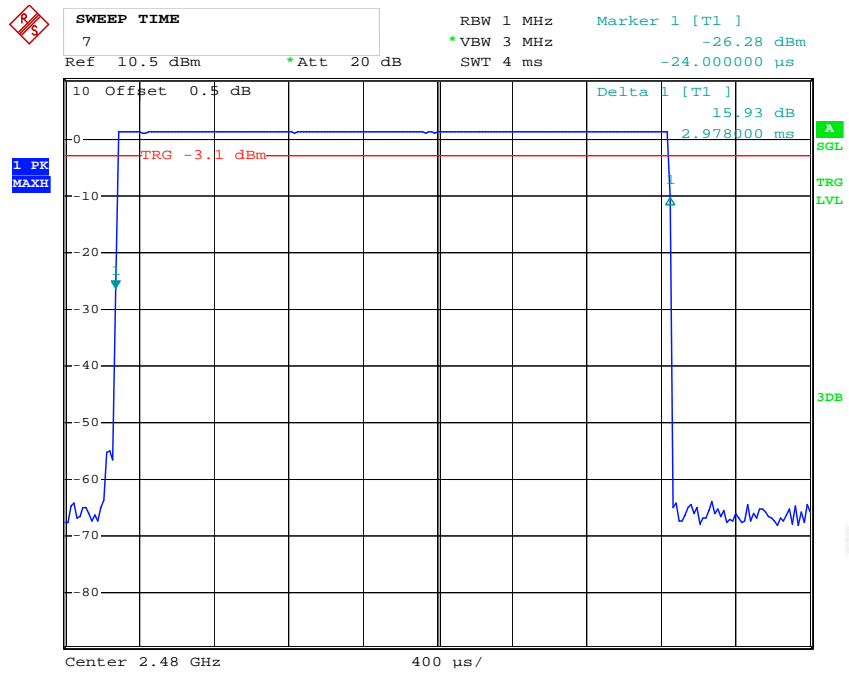

Date: 5.NOV.2014 20:24:58

## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

### Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

### Test Equipment List and Details

| Manufacturer | Description       | Model  | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|--------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSP 38 | 100478        | 2014-05-09       | 2015-05-09           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 27.2 °C   |
| <b>Relative Humidity:</b> | 45 %      |
| <b>ATM Pressure:</b>      | 100.9 kPa |

\* *The testing was performed by Sevin Li on 2014-11-03.*

**Test Result:** Compliant.


Test Mode: Transmitting

| Mode            | Channel | Frequency (MHz) | Peak Output Power (dBm) | Limit (dBm) |
|-----------------|---------|-----------------|-------------------------|-------------|
| BDR Mode (GFSK) | Low     | 2402            | 0.69                    | 30          |
|                 | Middle  | 2441            | 0.67                    | 30          |
|                 | High    | 2480            | 0.80                    | 30          |

Note: The data above was tested in conducted mode.


BDR Mode (GFSK):

Peak Output Power, Low Channel

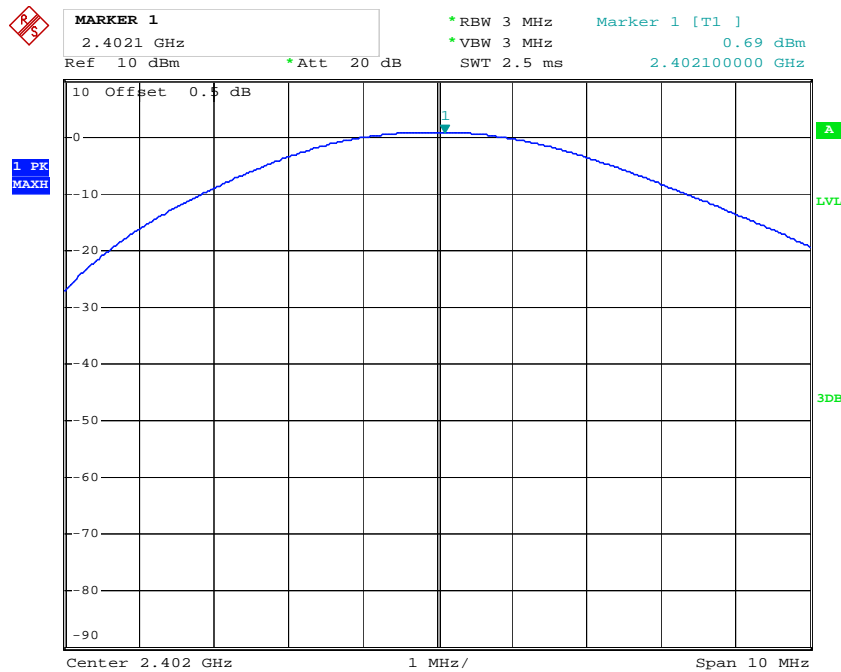


Date: 3.NOV.2014 20:35:36

### Peak Output Power, Middle Channel

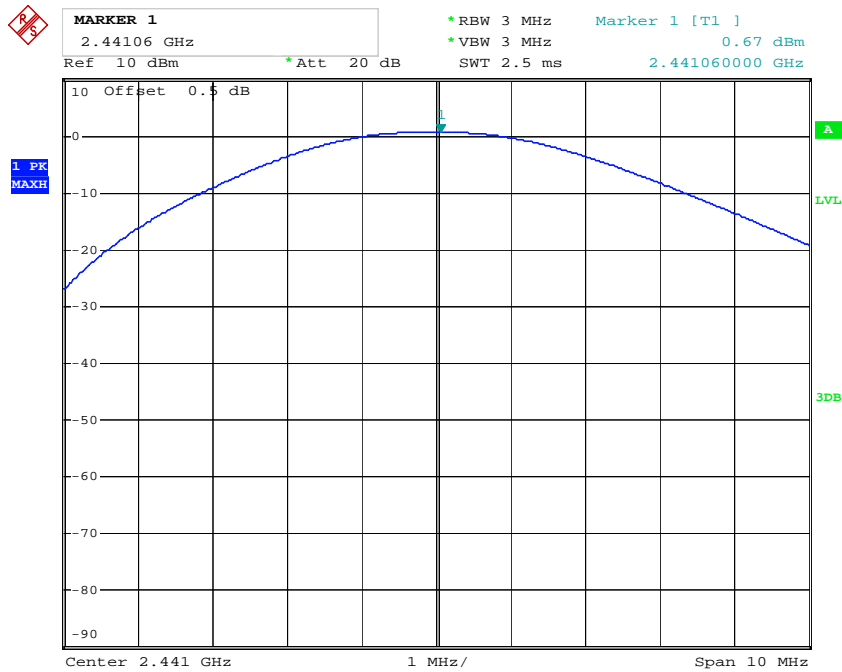

Date: 3.NOV.2014 20:34:54

### Peak Output Power, High Channel

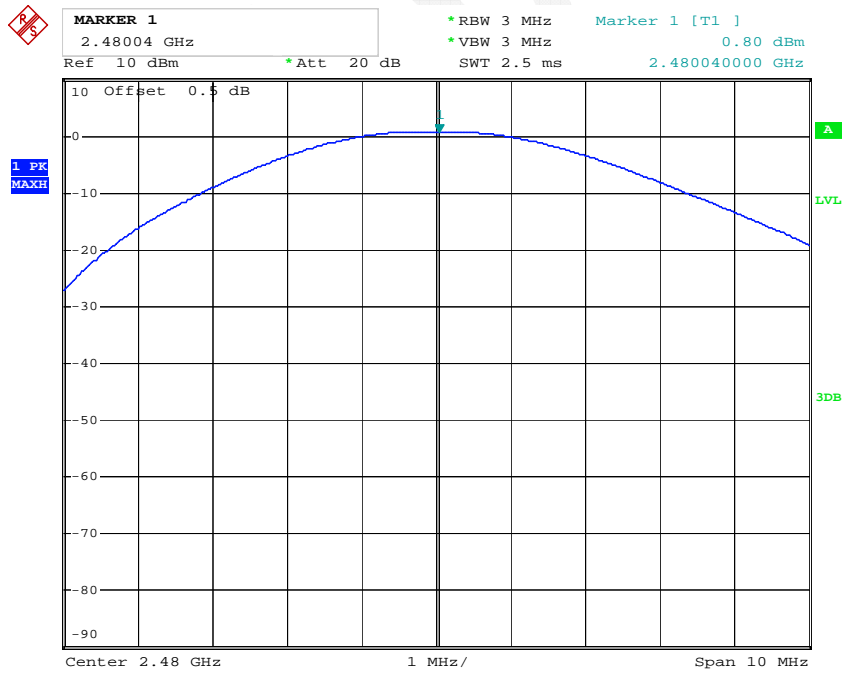

Date: 3.NOV.2014 20:34:01

## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Equipment List and Details

| Manufacturer | Description       | Model  | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|--------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSP 38 | 100478        | 2014-05-09       | 2015-05-09           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions


|                    |           |
|--------------------|-----------|
| Temperature:       | 27.2 °C   |
| Relative Humidity: | 45 %      |
| ATM Pressure:      | 100.9 kPa |

\* The testing was performed by Sevin Li on 2014-11-03.

**Test Result: Compliant.**


*BDR Mode (GFSK):*

**Band Edge, Left Side**

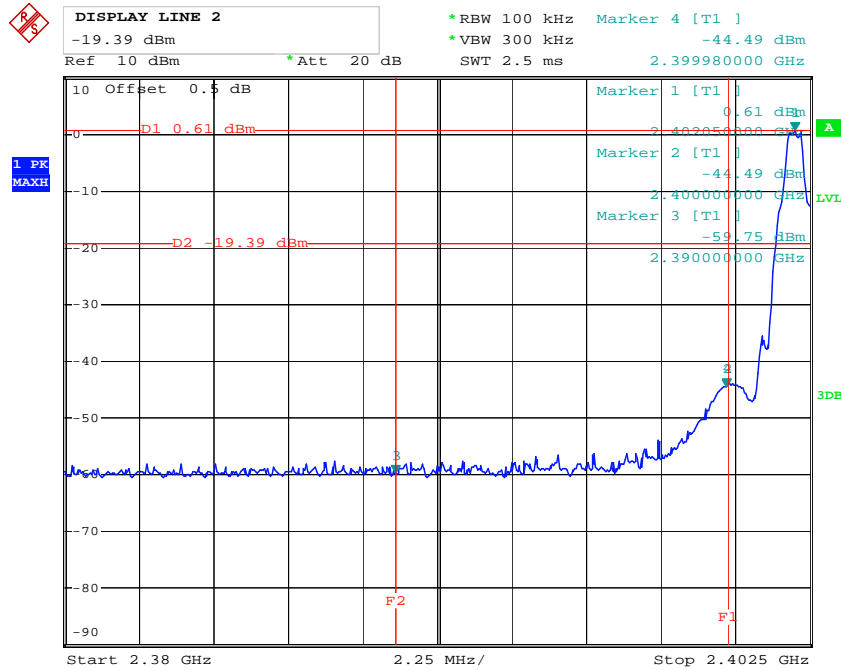

Date: 3.NOV.2014 21:20:34

**Band Edge, Right Side**

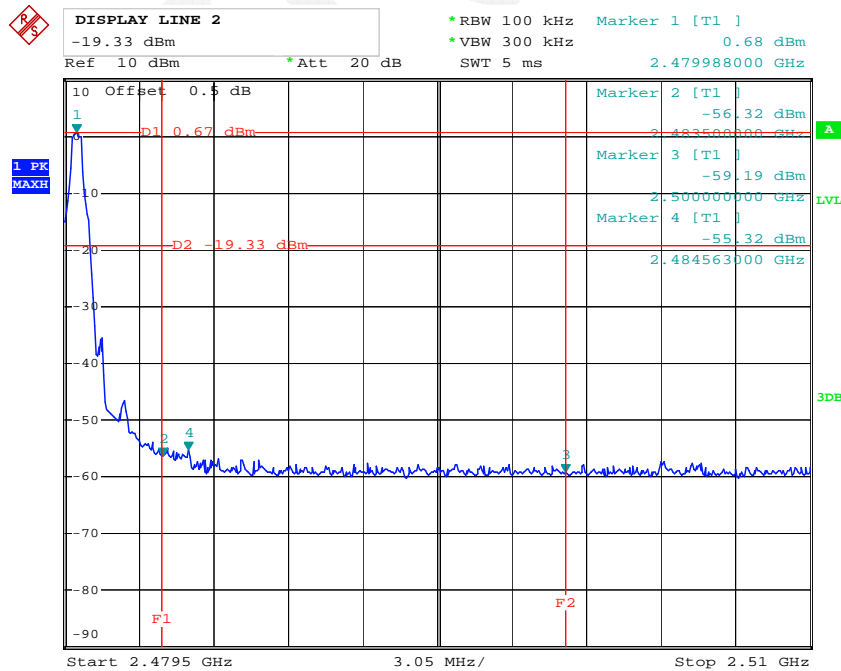

Date: 3.NOV.2014 21:18:00



**DECLARATION LETTER**



**Declaration of Alteration**

To Whom It May Concern,

We, Shenzhen Rapoo Technology Co., Ltd., hereby declare that there are some differences between our Multiple Models and testing products. Details as below:

(This is for your reference only.)

|                         |                 |  |   |
|-------------------------|-----------------|--|---|
| Products                | Name            | Bluetooth Ultra-Slim Keyboard                |   |
|                         | Brand           | Rapoo  |   |
| Description             | Manufacturer    | Shenzhen Rapoo Technology Co., Ltd.          |   |
|                         | Project No.     | RDG141029001, RDG141029002, R2DG141029001-03 |   |
| Differences Description |                 |  |   |
| Testing Products        | Multiple Models | Differences Items                            | Details   |
| E6350                   | E6350 PRO       | Model name                                   | They are the same product, and just have the different model name and appearance. |

Notes: Testing products-the products tested by BACL

Multiple Model- have the same or similar appearance, structure, PCB, Material and function to the testing products, and only are different for little parameters.

Besides the differences in the table above, we declare the products are identical We guarantee all the information provided above is true, and notice that we'll bear all the consequences caused by any false information or concealing

Best Regards,

Signature:

Print Name: Charles Tsou

Title: Director of Research and Development Centre

ADD: 22, Jinxiu Road East, Pingshan District, Shenzhen, China

Tel: +86-0755-28588666 Fax: +86-0755-28588555 Email: charles@rapoo.com

QPDG004R32 Version1.0 (20140717)

**\*\*\*\*\* END OF REPORT \*\*\*\*\***