



FCC PART 15.249


TEST REPORT

For

Shenzhen Rapoo Technology Co., Ltd.

22,Jinxiu Road East,Pingshan District,Shenzhen,China

FCC ID: PP2T120P

Report Type: Original Report		Product Type: Wireless Touch Mouse	
Test Engineer:	Ares Liu		
Report Number:	R2DG130329001-00		
Report Date:	2013-04-22		
Reviewed By:	Ivan Cao RF Leader		
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn		

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★" (Rev.2)
This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
FCC§15.203 - ANTENNA REQUIREMENT.....	7
APPLICABLE STANDARD	7
ANTENNA CONNECTOR CONSTRUCTION	7
FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS	8
APPLICABLE STANDARD	8
MEASUREMENT UNCERTAINTY	8
TEST EQUIPMENT SETUP	9
EUT SETUP	9
TEST PROCEDURE	10
CORRECTED AMPLITUDE & MARGIN CALCULATION	10
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST RESULTS SUMMARY	11
TEST DATA	11
FCC §15.215(C)– 20 DB BANDWIDTH TESTING	14
APPLICABLE STANDARD	14
TEST PROCEDURE	14
TEST EQUIPMENT LIST AND DETAILS.....	14
TEST DATA	14
FCC§15.249(D) - OUT OF BAND EMISSION (50DB ATTENUATION)	17
APPLICABLE STANDARD	17
TEST PROCEDURE	17
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST DATA	17

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Shenzhen Rapoo Technology Co., Ltd.*'s product, model number: T120P (FCC ID: PP2T120P) (the "EUT") in this report was a *Wireless Touch Mouse*, which was measured approximately: 9.6cm(L) x 5.5 cm(W) x 3.6 cm(H), rated input voltage: DC 1.5V from battery.

All measurement and test data in this report was gathered from production sample serial number: 12001T120P0001 (Assigned by applicant). The EUT was received on 2013-04-15.

Objective

This type approval report is prepared on behalf of *Shenzhen Rapoo Technology Co., Ltd.* in accordance with Part 2-Subpart J, and Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.249 rules.

Related Submittal(s)/Grant(s)

No related submittal(s)

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Dongguan) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 500069-0).



The current scope of accreditations can be found at <http://ts.nist.gov/standards/scopes/5000690.htm>

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

16 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5727	5	5750	9	5771	13	5796
2	5730	6	5753	10	5776	14	5799
3	5734	7	5756	11	5779	15	5802
4	5738	8	5759	12	5782	16	5804

EUT was tested with Channel 1, 9 and 16.


EUT Exercise Software

No exercise software was used.

Equipment Modifications

No modifications were made to the unit tested.

Block Diagram of Test Setup

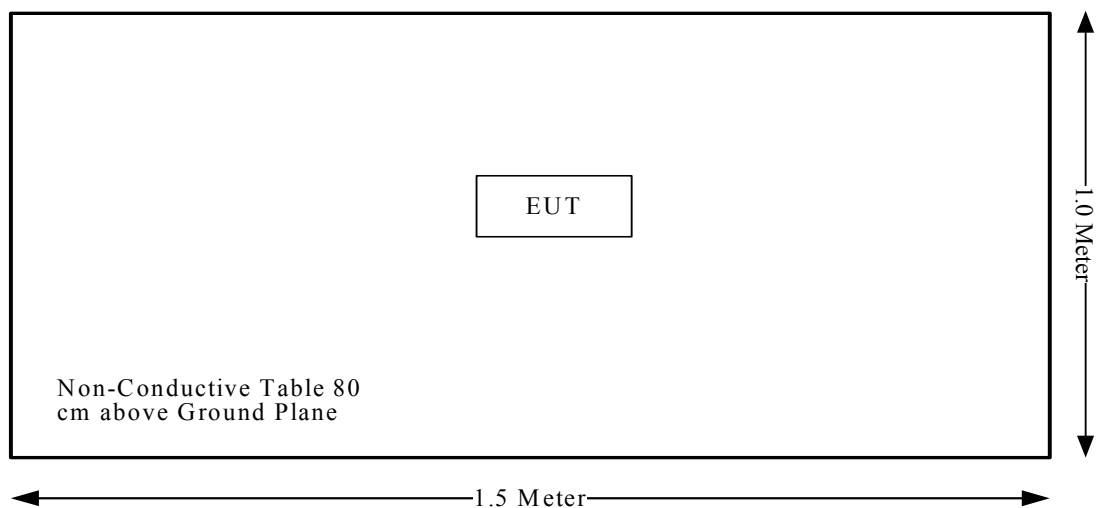

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	Conduction Emissions	N/A*
15.205, §15.209, §15.249	Radiated Emissions	Compliance
§15.215 (c)	20 dB Bandwidth	Compliance
§15.249(d)	Outside of Band Emission (50dB attenuation)	Compliance

N/A*:The EUT only powered by DC 1.5V from battery.

FCC§15.203 - ANTENNA REQUIREMENT

Applicable Standard

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

Antenna Connector Construction

The EUT has an internal chip antenna permanently soldering on the printed circuit board, which complied with 15.203, the maximum gain was 1.4 dBi. Please refer to the internal photos.

Result: Compliant.

FCC§15.205, §15.209&§15.249- RADIATED EMISSIONS

Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB

6G~18GHz: 5.23 dB

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

Test Equipment Setup


The system was investigated from 30 MHz to 40GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:


<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>Detector</i>
30MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 40GHz	1 MHz	3 MHz	PK
1000 MHz – 40GHz	1 MHz	10 Hz	Ave

EUT Setup

Below 1 GHz:

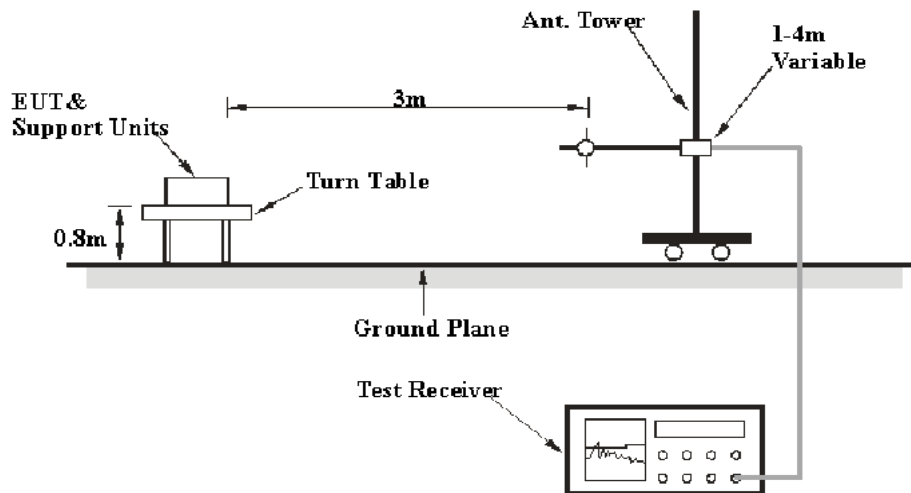

Above 1 GHz:

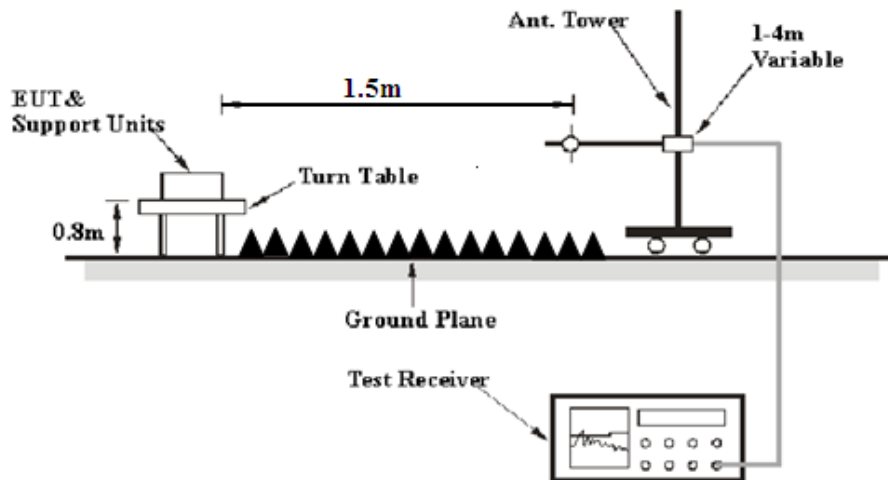

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209/15.205 and FCC 15.249 limits.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT is set 1.5 meter away from the testing antenna, which is varied from 1-4 meter, and the EUT is placed on a turntable, which is 0.8 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical.

According to C63.4, the above 1G test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m

Distance extrapolation factor = $20 \log(3\text{m}/1.5\text{m})$ dB

Extrapolation result = Corrected Amplitude (dB μ V/m) -6dB

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Extrapolation result}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI TEST RECEIVER	ESCI	100224	2012-5-14	2013-5-13
Sunol Sciences	Antenna	JB3	A060611-1	2012-9-6	2015-9-5
HP	HP AMPLIFIER	8447E	2434A02181	N/A	N/A
R&S	Spectrum analyzer	FSEM 30	849016/001	2012-9-4	2013-9-3
ETS LINDGREN	horn antenna	3115	000 527 35	2012-9-6	2015-9-5
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.209 &15.205 & 15.249, with the worst margin reading of:

5.02 dB at 5850 MHz in the Horizontal polarization

Test Data

Environmental Conditions

Temperature:	27.9°C
Relative Humidity:	52 %
ATM Pressure:	100.6kPa

The testing was performed by Ares Liu on 2013-04-18.

Test Mode: Transmitting

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	FCC 15.209/15.249	
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					Limit (dBµV/m)	Margin (dB)
Low Channel:5727 MHz										
5727	47.97	PK	H	32.15	4.85	0.00	84.97	78.97	114.00	35.03
5727	34.72	AV	H	32.15	4.85	0.00	71.72	65.72	94.00	28.28
5727	47.08	PK	V	32.15	4.85	0.00	84.08	78.08	114.00	35.92
5727	34.47	AV	V	32.15	4.85	0.00	71.47	65.47	94.00	28.53
5725	32.39	PK	H	32.15	4.83	0.00	69.37	63.37	74.00	10.63
5725	14.58	AV	H	32.15	4.83	0.00	51.56	45.56	54.00	8.44
11454	40.76	PK	H	37.85	7.95	25.92	60.64	54.64	74.00	19.36
11454	21.92	AV	H	37.85	7.95	25.92	41.80	35.80	54.00	18.20
17181	35.6	PK	H	40.59	12.80	25.05	63.94	57.94	74.00	16.06
17181	19.39	AV	H	40.59	12.80	25.05	47.73	41.73	54.00	12.27
2134	36.96	PK	H	24.95	3.60	27.21	38.30	32.30	74.00	41.70
2134	21.92	AV	H	24.95	3.60	27.21	23.26	17.26	54.00	36.74
6958	36.04	PK	H	33.49	6.05	27.26	48.32	42.32	74.00	31.68
6958	19.78	AV	H	33.49	6.05	27.26	32.06	26.06	54.00	27.94
425.14	23.36	QP	H	16.72	2.49	21.83	20.74	20.74	46.00	25.26
Middle Channel:5771 MHz										
5771	48.02	PK	H	32.15	5.16	0.00	85.33	79.33	114.00	34.67
5771	34.74	AV	H	32.15	5.16	0.00	72.05	66.05	94.00	27.95
5771	47.21	PK	V	32.15	5.16	0.00	84.52	78.52	114.00	35.48
5771	34.53	AV	V	32.15	5.16	0.00	71.84	65.84	94.00	28.16
11542	40.83	PK	H	37.90	7.91	25.92	60.72	54.72	74.00	19.28
11542	22.1	AV	H	37.90	7.91	25.92	41.99	35.99	54.00	18.01
17313	35.62	PK	H	41.38	12.39	24.77	64.62	58.62	74.00	15.38
17313	19.4	AV	H	41.38	12.39	24.77	48.40	42.40	54.00	11.60
2134	37.15	PK	H	24.95	3.60	27.21	38.49	32.49	74.00	41.51
2134	21.95	AV	H	24.95	3.60	27.21	23.29	17.29	54.00	36.71
4526	35.09	PK	H	29.87	5.42	27.12	43.26	37.26	74.00	36.74
4526	19.65	AV	H	29.87	5.42	27.12	27.82	21.82	54.00	32.18
6958	36.05	PK	H	33.49	6.05	27.26	48.33	42.33	74.00	31.67
6958	19.87	AV	H	33.49	6.05	27.26	32.15	26.15	54.00	27.85
425.15	23.54	QP	H	16.72	2.49	21.83	20.92	20.92	46.00	25.08

High Channel:5804 MHz										
5804	48.76	PK	H	32.16	5.17	0.00	86.09	80.09	114.00	33.91
5804	34.75	AV	H	32.16	5.17	0.00	72.08	66.08	94.00	27.92
5804	47.98	PK	V	32.16	5.17	0.00	85.31	79.31	114.00	34.69
5804	34.55	AV	V	32.16	5.17	0.00	71.88	65.88	94.00	28.12
5850	31.04	PK	H	32.17	5.56	0.00	68.77	62.77	74.00	11.23
5850	17.25	AV	H	32.17	5.56	0.00	54.98	48.98	54.00	5.02
11608	40.84	PK	H	37.90	8.05	25.89	60.90	54.90	74.00	19.10
11608	22.04	AV	H	37.90	8.05	25.89	42.10	36.10	54.00	17.90
17412	35.62	PK	H	41.97	12.08	24.53	65.14	59.14	74.00	14.86
17412	19.53	AV	H	41.97	12.08	24.53	49.05	43.05	54.00	10.95
2134	36.97	PK	H	24.95	3.60	27.21	38.31	32.31	74.00	41.69
2134	21.92	AV	H	24.95	3.60	27.21	23.26	17.26	54.00	36.74
6958	36.05	PK	H	33.49	6.05	27.26	48.33	42.33	74.00	31.67
6958	19.92	AV	H	33.49	6.05	27.26	32.20	26.20	54.00	27.80
425.14	23.33	QP	H	16.72	2.49	21.83	20.71	20.71	46.00	25.29

FCC §15.215(c)– 20 dB BANDWIDTH TESTING

Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.8 °C
Relative Humidity:	67 %
ATM Pressure:	100 kPa

* The testing was performed by Ares Liu on 2013-04-18.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	5727	1.632
Middle	5771	1.626
High	5804	1.644

Please refer to the following plots.

Low Channel

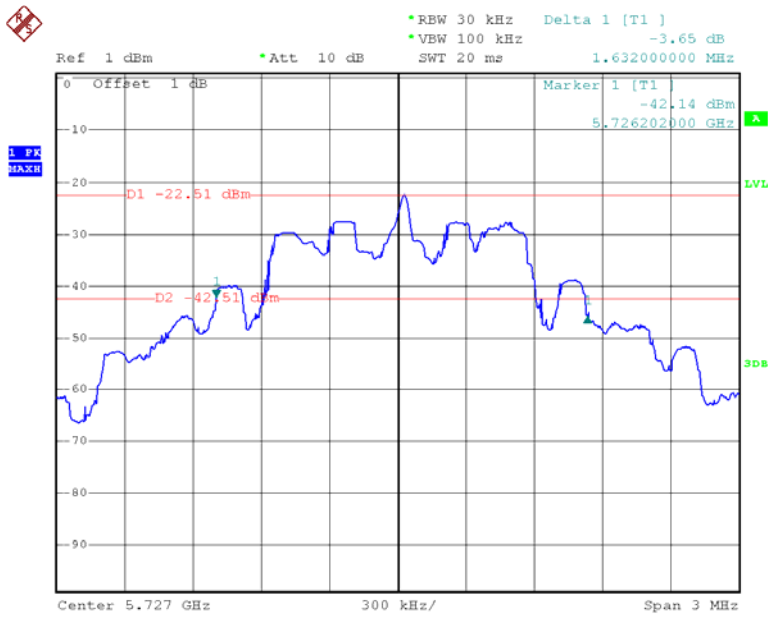

Date: 18.APR.2013 11:37:50

FCC§15.249(d) - OUT OF BAND EMISSION (50dB ATTENUATION)

Applicable Standard

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum analyzer	FSP 38	100478	2012-5-14	2013-5-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.8°C
Relative Humidity:	67 %
ATM Pressure:	100 kPa

* The testing was performed by Ares Liu on 2013-04-18.


Test Result: Compliance.

Please refer to the following table and plots:

Frequency (MHz)	Delta Peak to Band Emission (dBc)
5725	39.31(note)
5867.8	53.31


note: the delta peak to band emission compliance with 15.209 in the radiation test.

Band Edge, Left Side

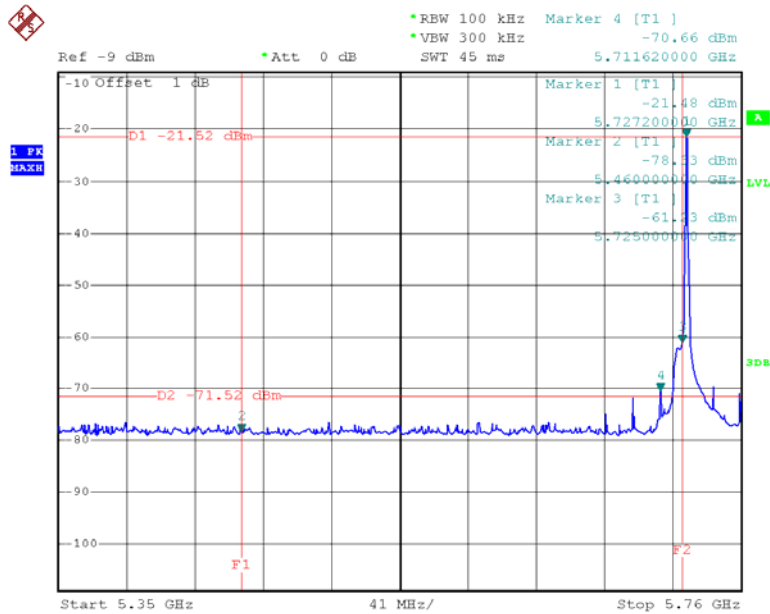

Date: 18.APR.2013 12:19:27

Band Edge, Right Side

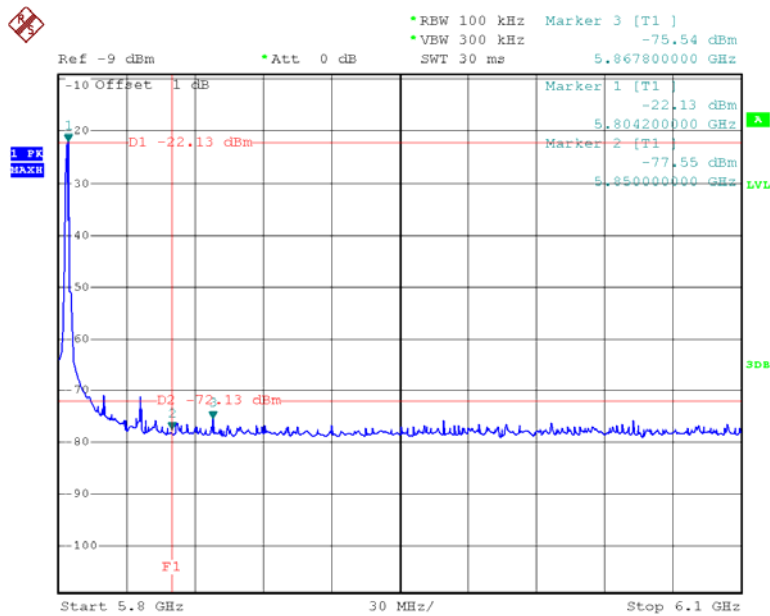

Date: 18.APR.2013 11:56:27

***** END OF REPORT *****