

HYUNDAI CALIBRATION & CERTIFICATION TECH. CO., LTD.



PRODUCT COMPLIANCE DIVISION
SAN 136-1, AMI-RI , BUBAL-EUP, ICHEON-SI, KYOUNGKI-DO, 467-701, KOREA
TEL : +82 31 639 8518 FAX : +82 31 639 8525 www.hct.co.kr

VERIFICATION

HYUNDAI CURITEL INC.

SAN 136-1, AMI-RI , BUBAL-EUP, ICHEON-SI,
KYOUNGKI-DO, 467-701, KOREA

FRN: 0006278469

Date of Issue: November 15, 2005

Test Report No.: HCT-SAR05-1107

Test Site: HYUNDAI CALIBRATION & CERTIFICATION
TECHNOLOGIES CO., LTD.

FRN: 0005866421

MODEL :

PC-7130

Classification/ Standard(s): FCC PART 15 CLASS B / CISPR 22 CLASS B
Equipment (EUT) Type: Single- Mode CDMA Phone - Prototype
Trade Name/Model(s): HYUNDAI / PC-7130
Port/ Connector(s): DC Input Port / Ear Phone Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-1993.(See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HYUNDAI C-Tech. certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse of 1988,21 U.S.C.853(a).

Report prepared by : Ki-Soo Kim
Manager of Product Compliance Team



TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION.....	3
1.1 Product Description.....	3
1.2 Related submittal(s)/Grant(s).....	3
1.3 Tested System Details.....	4
1.4 Test Methodology.....	4
1.5 Test Facility.....	4
2. SYSTEM TEST CONFIGURATION.....	5
2.1 Cable Description.....	5
2.2 Noise Suppression Parts on Cable.....	5
2.3 EUT Exercise Software.....	6
2.4 Equipment Modifications.....	6
2.5 Configuration of Tested System.....	7
3. CONDUCTED AND RADIATED EMISSION TESTS SUMMARY.....	8
3.1 Conducted Emission Tests.....	8-10
3.2 Radiated Emission Tests.....	11
3.3 Test Setup Photos.....	12-13
4. FIELD STRENGTH CALCULATION.....	14
5. Test Equipment.....	15
6. Conclusion.....	16

1. GENERAL INFORMATION

1.1 Product Description

The Hyundai Curitel Inc.PC-7130 Single-Mode CDMA phone. Its basic purpose is used for communications. It transmits from CDMA (824.70~848.31) MHz and receives from CDMA (869.70~893.31) MHz. The RF power is rated at CDMA (0.285W).

FCC ID	PP4PC-7130
EUT Type	Single-mode CDMA Phone - Prototype
Model	PC-7130
TX Frequency	824.70 — 848.31 MHz (CDMA)
RX Frequency	869.70 — 893.31 MHz (CDMA)
FCC Classification	Licensed Portable Transmitter Held to Ear (PCE)
Max RF. Output Power	0.347W ERP CDMA (25.4dBm)
Modulation	CDMA
Power Voltage	Input AC: AC 100-240V/ 0.2A 50/60Hz/ Output DC: DC 5.0V/ 1.0mA

1.2 Related Submittal(s) / Grant(s)

ORIGINAL SUBMITTAL ONLY

1.3 Tested System Details

The Model names for all equipment, plus descriptions used in the tested system (including inserted cards) are:

DEVICE TYPE	MANUFACTURER	MODEL NUMBER	FCC ID / DoC	CONNECTED TO
Single- Mode CDMA Phone	HYUNDAI CURITEL INC.	PC-7130	PP4PC-7100	Adaptor/ P.C
Adaptor	HYUNDAI CURITEL INC.	CNR4	N/A	CDMA Phone

1.4 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4/1992. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data are located at the 254-1, Maekok-Ri, Hobup-Myun, Ichon-Si, Kyoungki-Do, 467-701, KOREA. The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 23, 2003(Registration Number: 90661)

2.SYSTEM TEST CONFIGURATION

2.1 Cable Description

The marked "(D)" means the Data Cable and "(P)" means the Power Cable.

	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (M)
CDMA PHONE	N/A	N/A	-
EAR PHONE	N/A	N	1.0(D)
Adapter	N	N/A	1.8(P)

2.2 Noise Suppression Parts on Cable.

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
CDMA PHONE	N	N/A	N/A	Adapter END
EAR PHONE	N	N/A	Y	CDMA PHONE
Adapter	N	N/A	Y	CDMA PHONE

2.3 EUT exercise Software

The EUT was tested on the charging battery during the radiated and conducted emission testing


2.4 Equipment Modifications

N/A

2.5 Configuration of Test system

Line Conducted Test : EUT was connected to LISN, all other supporting equipment were connected to another LISN. Preliminary Power line Conducted Emission tests were performed by using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions.

Radiated Emission Test : Preliminary Radiated Emissions tests were conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse pirating condition. Final Radiated Emission tests were conducted at 3 meter open area test site.

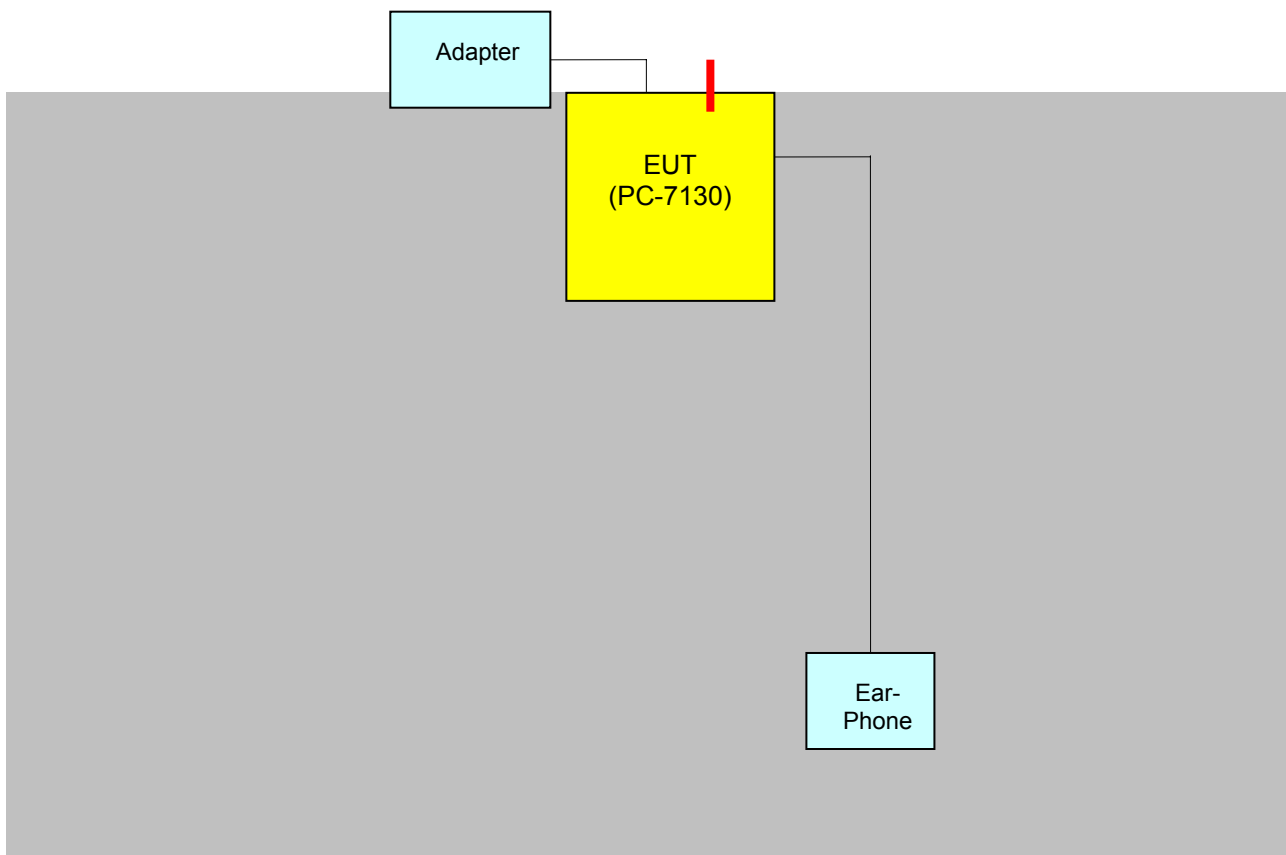

[Configuration of Tested System]


HCT

EMC TEST LAB

EUT: PC-7130
 Manufacturer: CURITEL
 Operating Condition: CHARGING MODE
 Test Site: SHIELD ROOM
 Operator: KEUN-HO PARK
 Test Specification: CISPR 22 CLASS B
 Comment: H

SCAN TABLE: "CISPR 22 Voltage"

Short Description:			CISPR 22 Voltage			
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.1 kHz	500.0 kHz	2.5 kHz	MaxPeak	10.0 ms	9 kHz	None
500.0 kHz	5.0 MHz	5.0 kHz	Average	10.0 ms	9 kHz	None
5.0 MHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average	10.0 ms	9 kHz	None

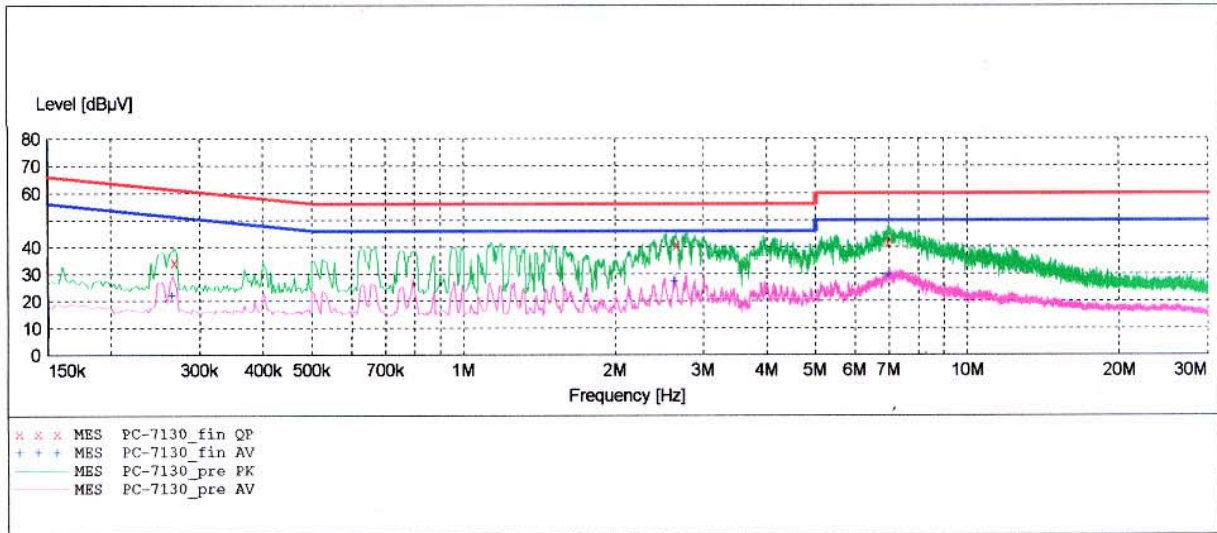

MEASUREMENT RESULT: "PC-7130_fin QP"

11/18/2005 3:58AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.267600	34.50	10.1	61	26.7	---	---
2.640000	40.90	10.3	56	15.1	---	---
7.000000	41.80	10.3	60	18.2	---	---

MEASUREMENT RESULT: "PC-7130_fin AV"

11/18/2005 3:58AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.265100	22.20	10.1	51	29.1	---	---
2.630000	27.30	10.3	46	18.7	---	---
7.005000	29.90	10.3	50	20.1	---	---


HCT

EMC TEST LAB

EUT: PC-7130
 Manufacturer: CURITEL
 Operating Condition: CHARGING MODE
 Test Site: SHIELD ROOM
 Operator: KEUN-HO PARK
 Test Specification: CISPR 22 CLASS B
 Comment: N

SCAN TABLE: "CISPR 22 Voltage"

Short Description:		CISPR 22 Voltage				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency	Width				
150.1 kHz	500.0 kHz	2.5 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	5.0 kHz	MaxPeak	10.0 ms	9 kHz	None

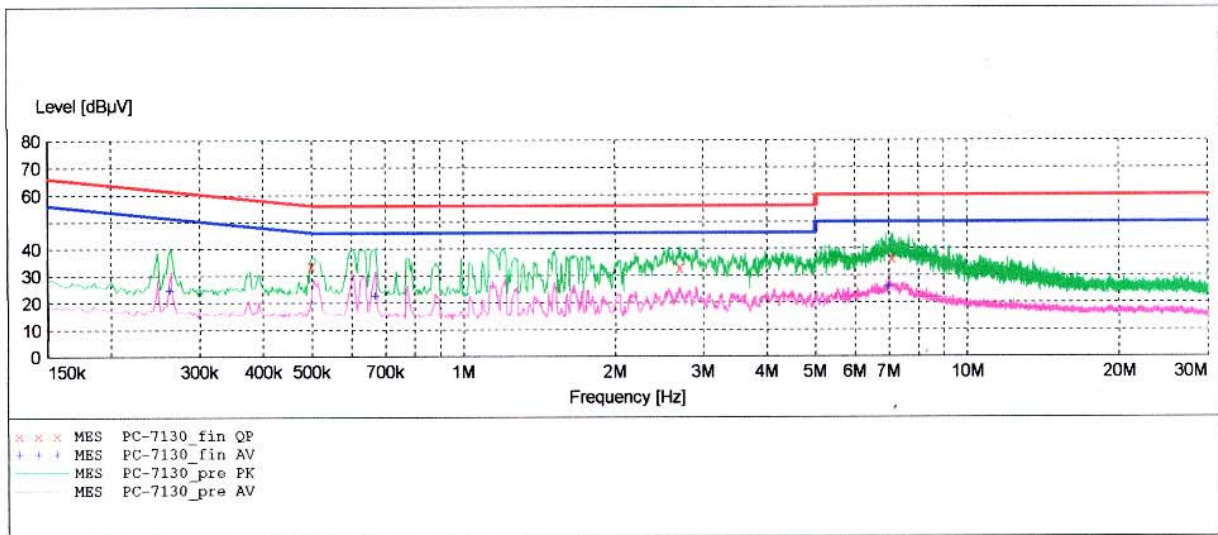

MEASUREMENT RESULT: "PC-7130_fin QP"

11/18/2005 3:54AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.500000	33.80	10.1	56	22.2	---	---
2.685000	33.20	10.3	56	22.8	---	---
7.090000	36.60	10.3	60	23.4	---	---

MEASUREMENT RESULT: "PC-7130_fin AV"

11/18/2005 3:54AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.262600	24.80	10.1	51	26.6	---	---
0.670000	22.60	10.2	46	23.4	---	---
6.995000	25.80	10.3	50	24.2	---	---

3.2 Radiated Emissions Tests

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

```

=====
Humidity Level       : 26 %                      Temperature : 20.7 °C
Limit apply to      : FCC PART 15 CLASS B
Result              : PASSED BY -4.8 dB
Operating Condition : Charging Battery
Detector            : CISPR Quasi-Peak (6 dB Bandwidth: 120 KHz)
    
```

Frequency MHz	Reading dBuV	Ant. Factor dB	Cable Loss dB	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
95.10	23.2	9.4	2.2	V	34.8	43.5	-8.7
97.00	23.5	9.7	2.2	V	35.4	43.5	-8.1
214.90	17.5	16.7	3.3	V	37.5	43.5	-6.0
258.40	19.9	17.6	3.7	V	41.2	46	-4.8
325.40	16.4	16.3	4.1	V	36.9	46	-9.1
389.60	16.7	16.8	4.5	V	38.1	46	-7.9
253.60	16.3	17.5	3.6	H	37.4	46	-8.6
287.40	15.4	18.9	3.9	H	38.2	46	-7.8
362.50	17.7	16.6	4.4	H	38.6	46	-7.4
389.10	17.1	16.8	4.5	H	38.5	46	-7.5
415.20	16.4	17.4	4.7	H	38.5	46	-7.5
482.80	14.3	18.9	5.0	H	38.2	46	-7.8




Measured by : Keun-Ho Park / Engineer

Date : November 7, 2005

3.3.1 Conducted Radiated Emission



3.3.2 Radiated Emission

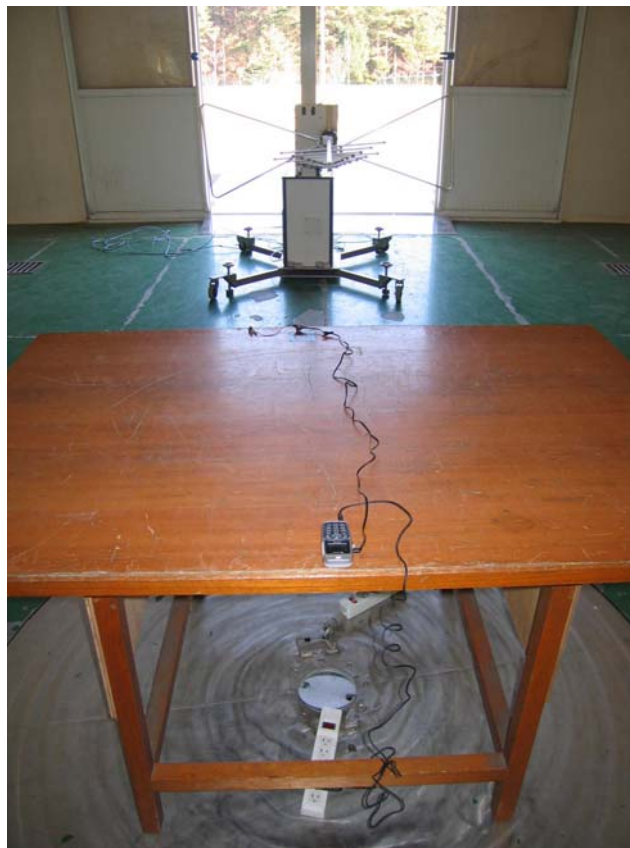

4.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dBuV is obtained. The Antenna Factor of 7.4 and a Cable Factor of 1.1 is added. The 30 dBuV/m value was mathematically converted to its corresponding level in uV/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dBuV/m}$$

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(30 \text{ dBuV/m})/20] = 31.6 \text{ uV/m}$$

5.1 Test Equipment

Type	Manufacture	Model Number	CAL Date
EMI Test Receiver	Rohde & Schwarz	ESI40	2005.11.16
EMI Test Receiver	Rohde & Schwarz	ESVS30	2005.07.16
LISN	Rohde & Schwarz	ESH2-Z5	2005.07.28
LISN	EMCO	ESH3-Z5	2005.07.28
Attenuator	Rohde & Schwarz	ESH3-Z2	2005.11.16
Amplifier	Hewlett-Packard	8447E	2005.08.23
TRILOG Antenna	Schwarzbeck	9160	2005.04.06
Antenna Position Tower	EMCO	1051-12	N/A
Turn Table	EMCO	1060-06	N/A
Power Analyzer	Voltech	PM 3300	2005.02.15
Reference Network Impedance	Voltech	IEC 555	N/A
AC Power Source	PACIFIC	Magnetic Module	N/A
AC Power Source	PACIFIC	360-AMX	2004.11.25
Controller	HD GmbH	HD 100	N/A
SlideBar	HD GmbH	KMS 560	N/A

6.1 Conclusion

The data collected shows that the **HYUNDAI CURITEL INC.** Single- Mode CDMA Phone. FCC ID: PP4PC-7130. Complies with §15.107 and §15.109 of the FCC Rules.