

ATTACHMENT O – SAR TEST PLOTS (2 of 3)

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : PCS190C / Antenna : Fixed / Channel : 25
Liquid Temperature : 22.4 °C
Date Tested : June 15, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 38.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 25/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.24 mW/g

Left touch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 28.2 V/m; Power Drift = -0.090 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.662 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.20 mW/g

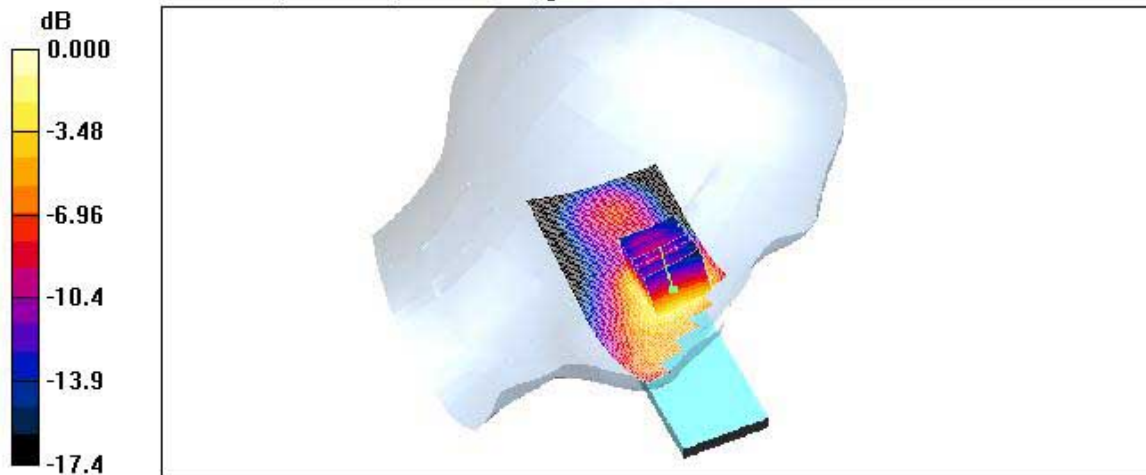

0 dB = 1.20mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : PCS1900 / Antenna : Fixed / Channel : 600

Liquid Temperature : 22.4 °C

Date Tested : June 15, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 600/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.21 mW/g


Left touch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 27.6 V/m; Power Drift = -0.148 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.652 mW/g

Maximum value of SAR (measured) = 1.17 mW/g

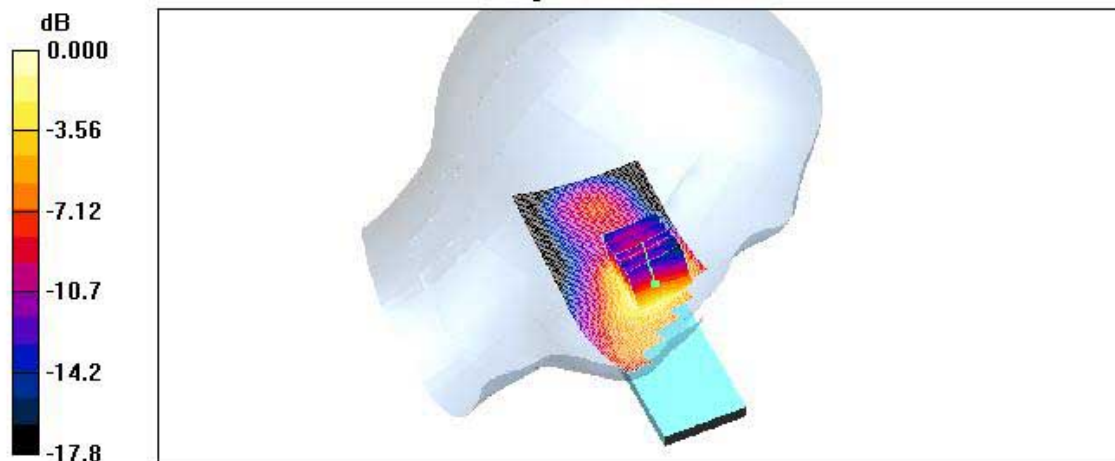

0 dB = 1.17mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : PCS1900 / Antenna : Fixed / Channel : 1175
Liquid Temperature : 22.4 °C
Date Tested : June 15, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 38.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left touch 1175/Area Scan (51x101x1): Measurement grid: $\Delta x = 15 \text{ mm}$, $\Delta y = 15 \text{ mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.22 mW/g

Left touch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8 \text{ mm}$, $\Delta y = 8 \text{ mm}$, $\Delta z = 5 \text{ mm}$


Reference Value = 26.6 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.656 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.22 mW/g

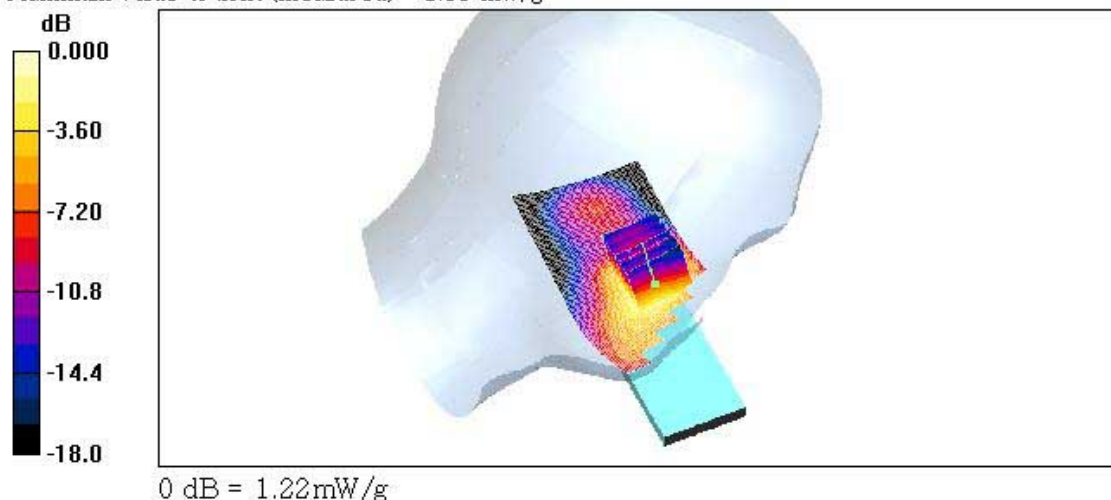

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : PCS1900 / Antenna: Fixed / Channel : 25
Liquid Temperature : 22.4 °C
Date Tested : June 15, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1851.25 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 38.5$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:


- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 25/Area Scan (51x101x1): Measurement grid: $\Delta x = 15 \text{ mm}$, $\Delta y = 15 \text{ mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 1.25 mW/g

Right touch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8 \text{ mm}$, $\Delta y = 8 \text{ mm}$, $\Delta z = 5 \text{ mm}$
Reference Value = 18.8 V/m; Power Drift = 0.102 dB
Peak SAR (extrapolated) = 1.82 W/kg
SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.606 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.17 mW/g

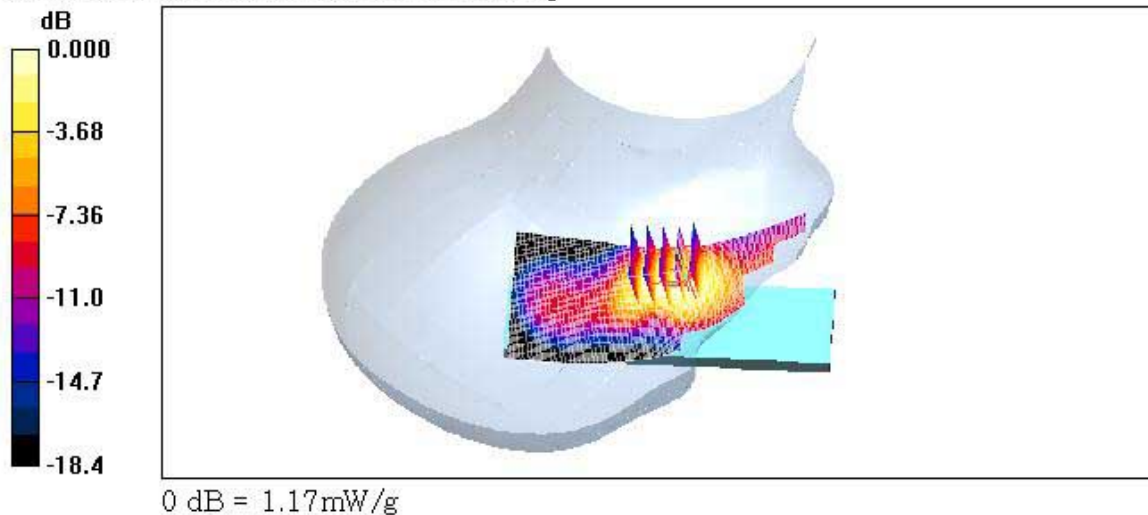

Test Laboratory: HCT

Company : PANTECH&CURITE! COMMUNICATIONS, INC.

Mode : PCS1900 / Antenna : Fixed / Channel : 600

Liquid Temperature : 22.4 °C

Date Tested : June 15, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 600/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.26 mW/g


Right touch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 18.6 V/m; Power Drift = -0.161 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.596 mW/g

Maximum value of SAR (measured) = 1.16 mW/g

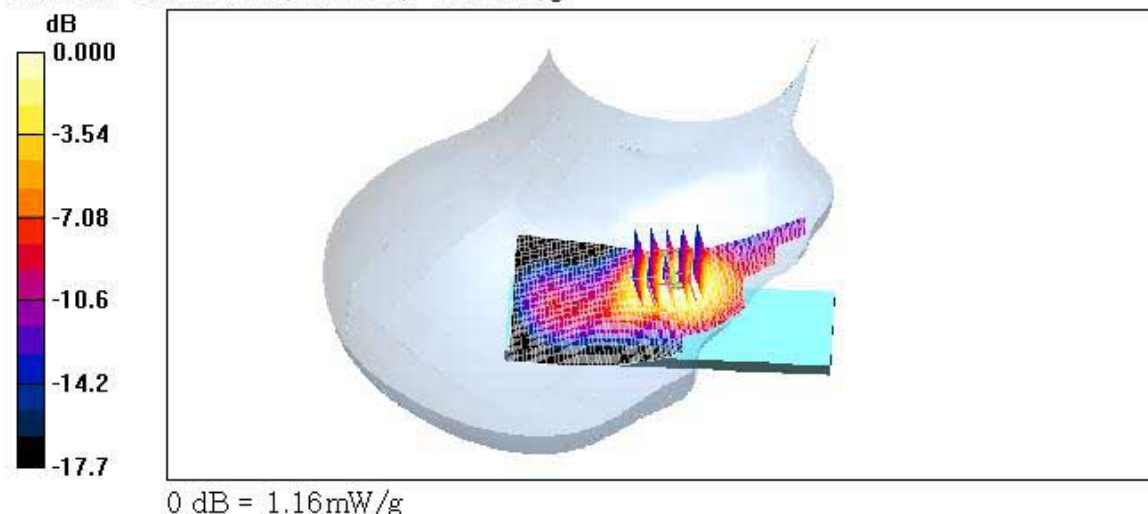

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : PCS1900 / Antenna : Fixed / Channel : 1175
Liquid Temperature : 22.4 °C
Date Tested : June 15, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1908.75 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 38.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 1175/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 1.35 mW/g

Right touch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 18.3 V/m; Power Drift = -0.064 dB

Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.653 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.29 mW/g

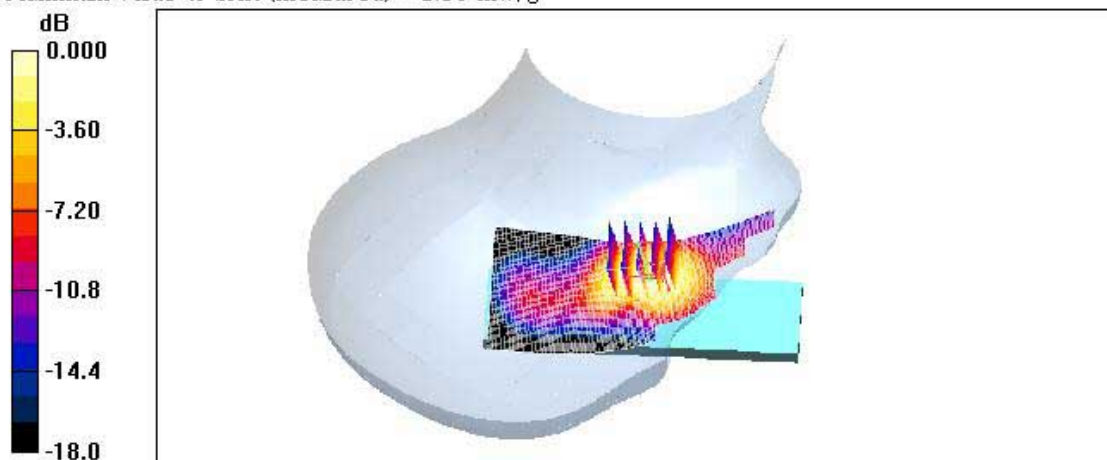

0 dB = 1.29mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : PCS1900 / Antenna : Fixed / Channel : 1175(E-battery)
Liquid Temperature : 22.4 °C
Date Tested : June 15, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 1175/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.34 mW/g

Right touch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 18.9 V/m; Power Drift = 0.073 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.639 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.24 mW/g

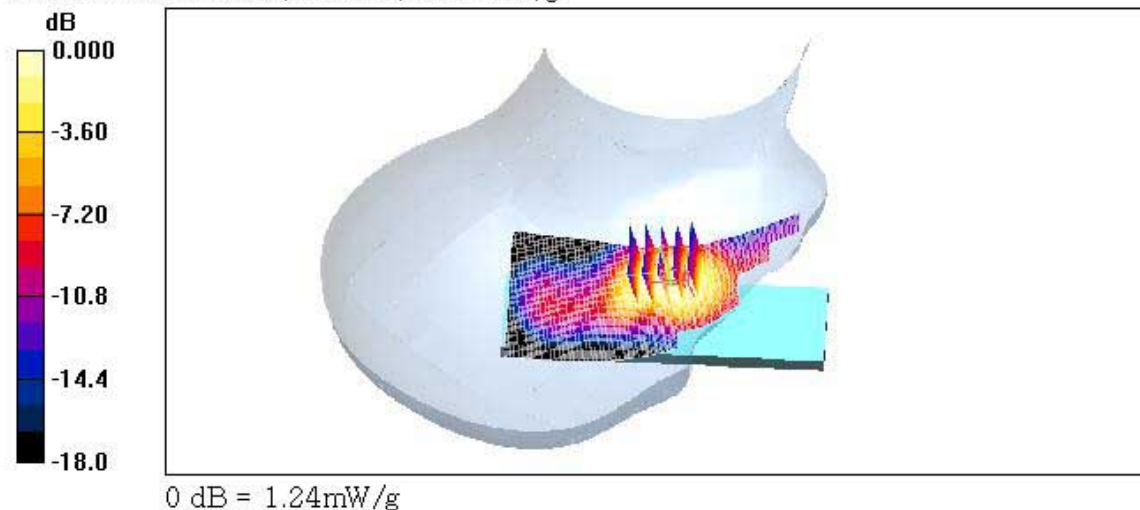

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : PCS1900 / Antenna : Fixed / Channel : 1175 (Bluetooth)
Liquid Temperature : 22.4 °C
Date Tested : June 15, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75 \text{ MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 38.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609, ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 1175/Area Scan (51x101x1): Measurement grid: $\Delta x = 15 \text{ mm}$, $\Delta y = 15 \text{ mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.36 mW/g

Right touch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8 \text{ mm}$, $\Delta y = 8 \text{ mm}$, $\Delta z = 5 \text{ mm}$


Reference Value = 19.1 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.643 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.25 mW/g

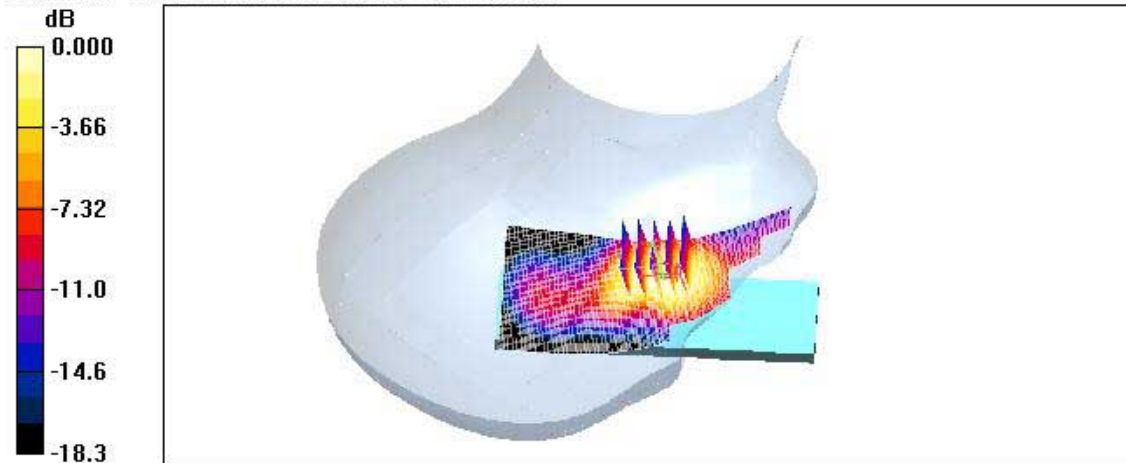

0 dB = 1.25 mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : PCS1900 / Antenna : Fixed / Channel : 600
Liquid Temperature : 22.4℃
Date Tested : June 15, 2006

DUT: PN-320; Type: Folder; Serial: #1


Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³
Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

Left tilt 600/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 0.301 mW/g

Left tilt 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 8.74 V/m; Power Drift = 0.178 dB
Peak SAR (extrapolated) = 0.390 W/kg
SAR(1 g) = 0.260 mW/g; SAR(10 g) = 0.153 mW/g
Maximum value of SAR (measured) = 0.271 mW/g

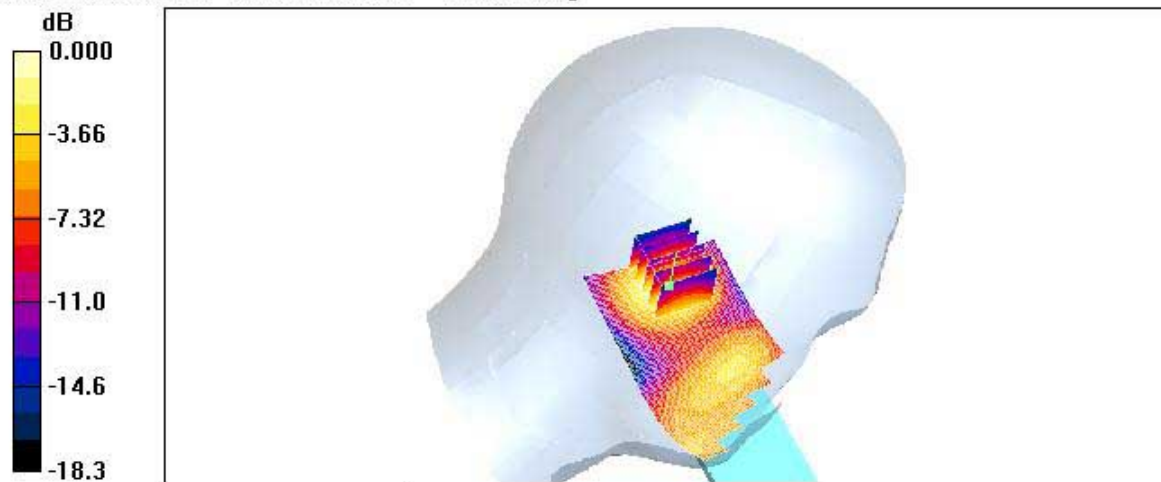

Test Laboratory: HCT

Company : PANTHECH&CURITEI COMMUNICATIONS, INC.
Mode : PCS1900 / Antenna : Fixed / Channel : 600
Liquid Temperature : 22.4 °C
Date Tested : June 15, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.44 \text{ mho/m}$; $\epsilon_r = 38.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

Right tilt 600/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.314 mW/g

Right tilt 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 6.93 V/m; Power Drift = -0.139 dB
Peak SAR (extrapolated) = 0.373 W/kg
SAR(1 g) = 0.251 mW/g; SAR(10 g) = 0.152 mW/g
Maximum value of SAR (measured) = 0.273 mW/g

