

ATTACHMENT O – SAR TEST PLOTS

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA 835 (Body)/ Antenna : Fixed / Channel : 363
Liquid Temperature : 22.3°C
Date Tested : June 14, 2006

DUT: PN-320-Body; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89 \text{ MHz}$; $\sigma = 0.985 \text{ mho/m}$; $\epsilon_r = 53.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.42, 6.42, 6.42); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 363/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.452 mW/g

CDMA Body 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 19.9 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.563 W/kg

SAR(1 g) = 0.415 mW/g; SAR(10 g) = 0.294 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.441 mW/g

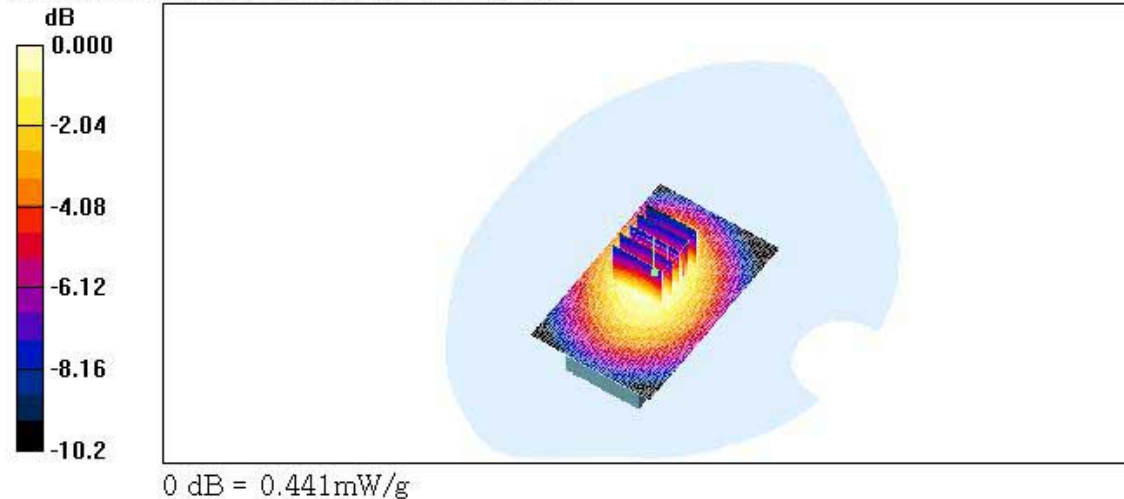

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA 835 (Body)/ Antenna : Fixed / Channel : 363(E-battery)
Liquid Temperature : 22.3℃
Date Tested : June 14, 2006

DUT: PN-320-Body; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.985$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:


- Probe: ET3DV6 - SN1609; ConvF(6.42, 6.42, 6.42); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 363/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.446 mW/g

CDMA Body 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 20.1 V/m; Power Drift = -0.065 dB
Peak SAR (extrapolated) = 0.546 W/kg
SAR(1 g) = 0.414 mW/g; SAR(10 g) = 0.294 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.437 mW/g

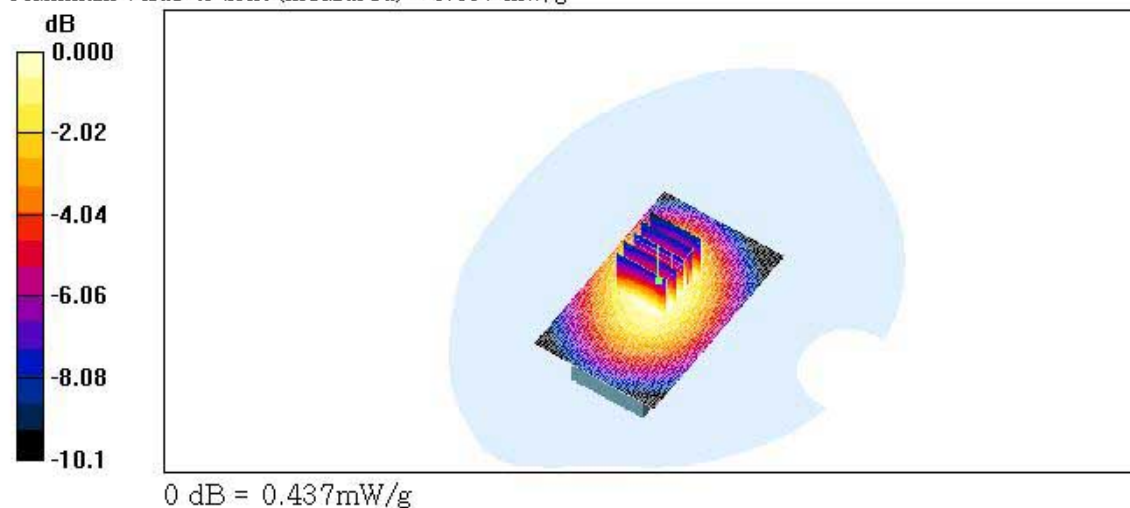

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA 835 (Body)/ Antenna : Fixed / Channel : 363(Bluetooth)
Liquid Temperature : 22.3°C
Date Tested : June 14, 2006

DUT: PN-320-Body; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.962$ mho/m; $\epsilon_r = 54.7$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.42, 6.42, 6.42); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 835/900 MHz; Type: SAM

CDMABody 363/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.452 mW/g


CDMABody 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.1 V/m; Power Drift = -0.104 dB

Peak SAR (extrapolated) = 0.514 W/kg

SAR(1 g) = 0.401 mW/g; SAR(10 g) = 0.286 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.419 mW/g

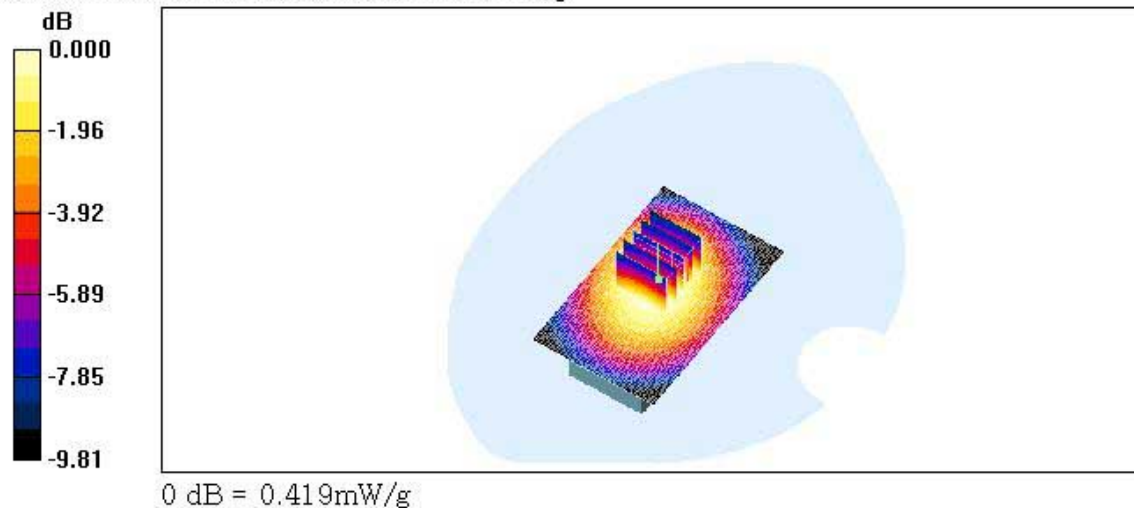

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS INC
Mode : PCS1900 / Antenna : Fixed / Channel : 600 (Body)
Liquid Temperature : 22.4 °C
Date Tested : June 15, 2006

DUT: PN-320-Body; Type: Folder; Serial: #1


Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.53 \text{ mho/m}$; $\epsilon_r = 52.9$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(4.63, 4.63, 4.63); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 600/Area Scan (51x81x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$
Maximum value of SAR (interpolated) = 0.633 mW/g

PCS Body 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$
Reference Value = 18.5 V/m; Power Drift = -0.054 dB
Peak SAR (extrapolated) = 0.855 W/kg
SAR(1 g) = 0.577 mW/g; SAR(10 g) = 0.362 mW/g
Maximum value of SAR (measured) = 0.625 mW/g

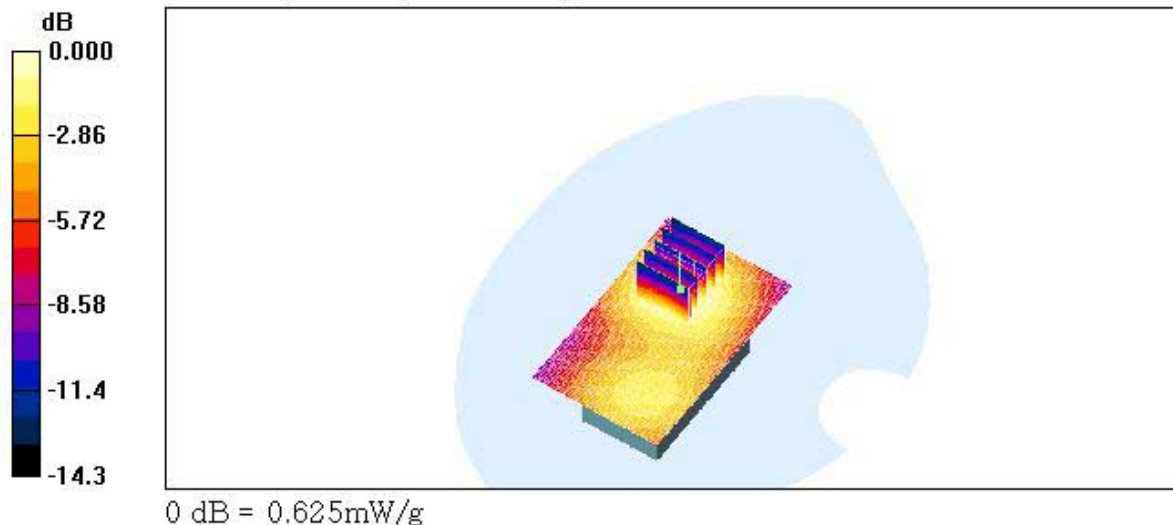

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : PCS1900 (Body)/ Antenna : Fixed / Channel : 600 (E-battery)
Liquid Temperature : 22.4℃
Date Tested : June 15, 2006

DUT: PN-320-Body; Type: Folder; Serial: #1


Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(4.63, 4.63, 4.63); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 600/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 0.618 mW/g

PCS Body 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 18.7 V/m; Power Drift = -0.029 dB
Peak SAR (extrapolated) = 0.816 W/kg
SAR(1 g) = 0.557 mW/g; SAR(10 g) = 0.354 mW/g
Maximum value of SAR (measured) = 0.599 mW/g

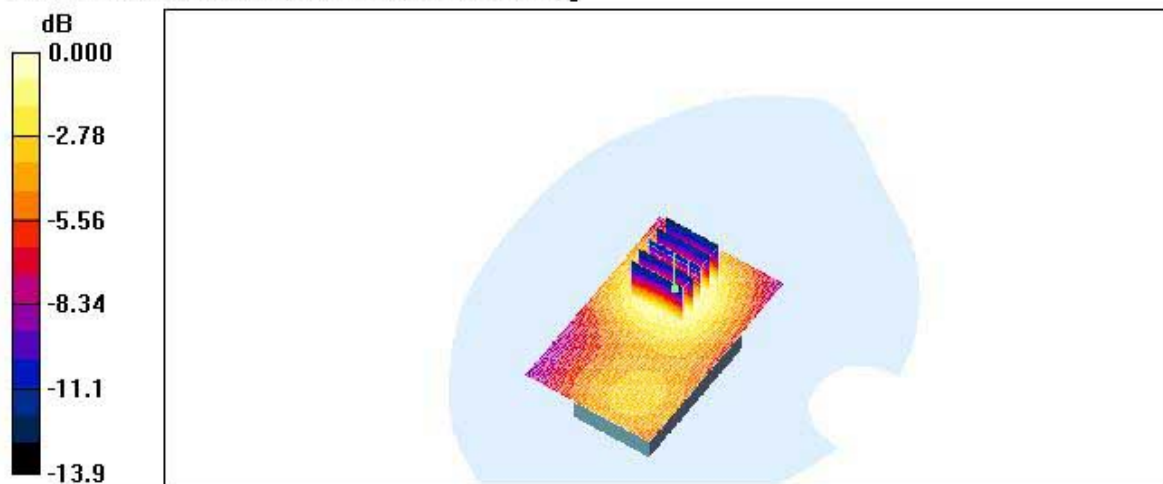

0 dB = 0.599mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS INC
Mode : PCS1900 (Body)/ Antenna : Fixed / Channel : 600 (Bluetooth)
Liquid Temperature : 22.4 °C
Date Tested : June 15, 2006

DUT: PN-320-Body; Type: Folder; Serial: #1

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³


Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(4.63, 4.63, 4.63); Calibrated: 2006-03-23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 600/Area Scan (51x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 0.624 mW/g

PCS Body 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 18.5 V/m; Power Drift = -0.003 dB
Peak SAR (extrapolated) = 0.820 W/kg
SAR(1 g) = 0.558 mW/g; SAR(10 g) = 0.354 mW/g
Maximum value of SAR (measured) = 0.604 mW/g

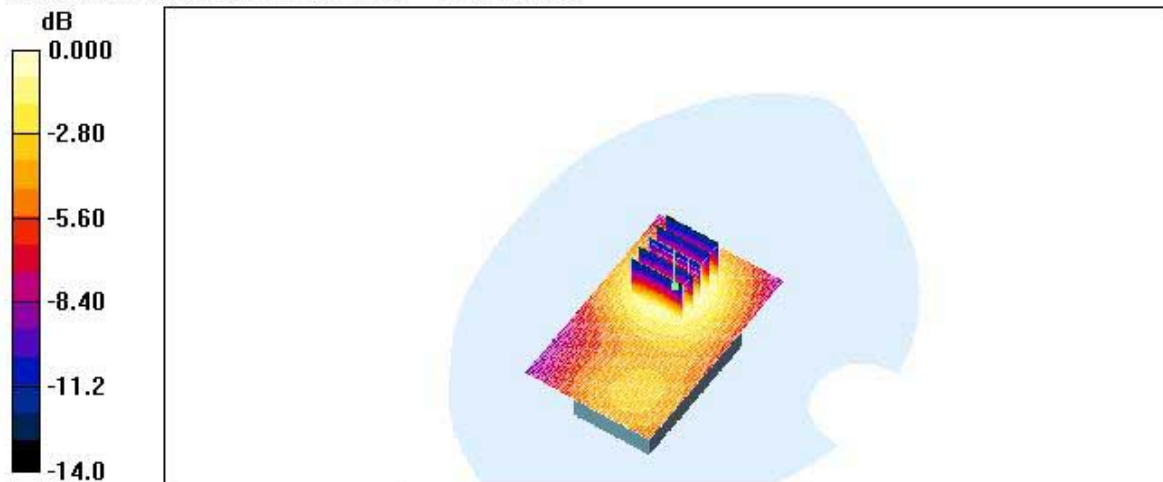

0 dB = 0.604mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Antenna : Fixed / Channel : 777

Liquid Temperature : 22.3℃

Date Tested : June 14, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.888$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.85, 6.85, 6.85); Calibrated: 2006-03-23

- Sensor-Surface: 0mm (Fix Surface)


- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 777/Z Scan (1x1x31): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.05 mW/g

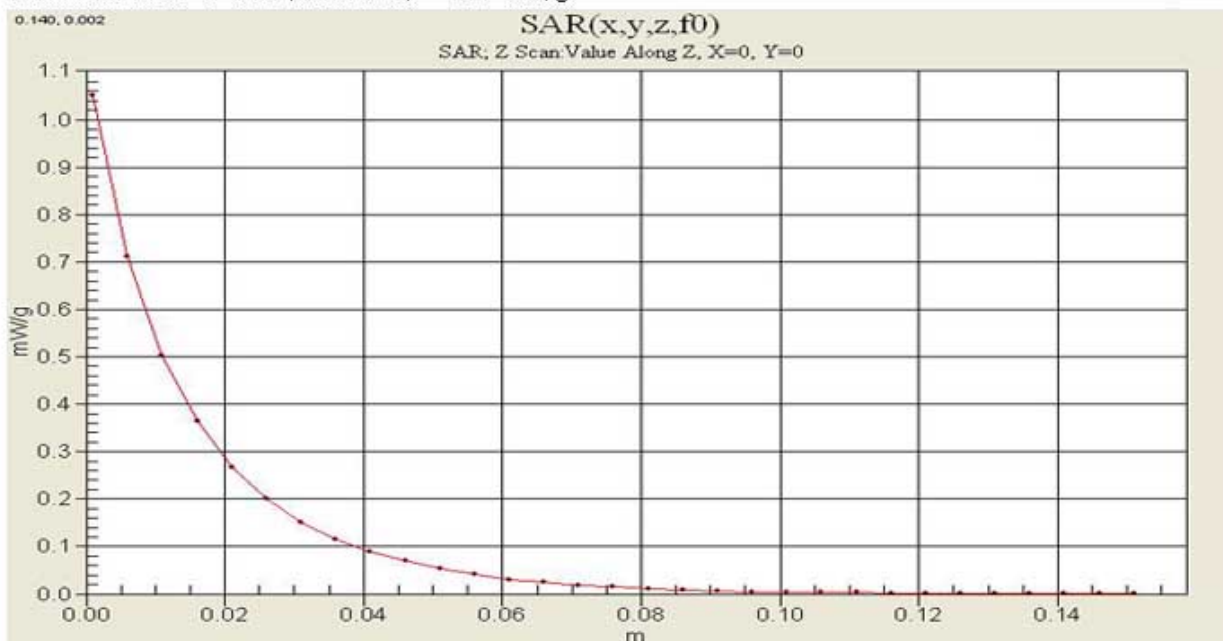

Test Laboratory: HCT

Company: PANTECH&CURITEL COMMUNICATIONS, INC.

Mode: CDMA835 / Antenna: Fixed / Channel: 363(Body)

Liquid Temperature: 22.3 °C

Date Tested: June 14, 2006

DUT: PN-320-Body; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.985$ mho/m; $\epsilon_r = 53.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(6.42, 6.42, 6.42); Calibrated: 2006-03-23

- Sensor-Surface: 0mm (Fix Surface)


- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 363/Z Scan (1x1x31): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.422 mW/g

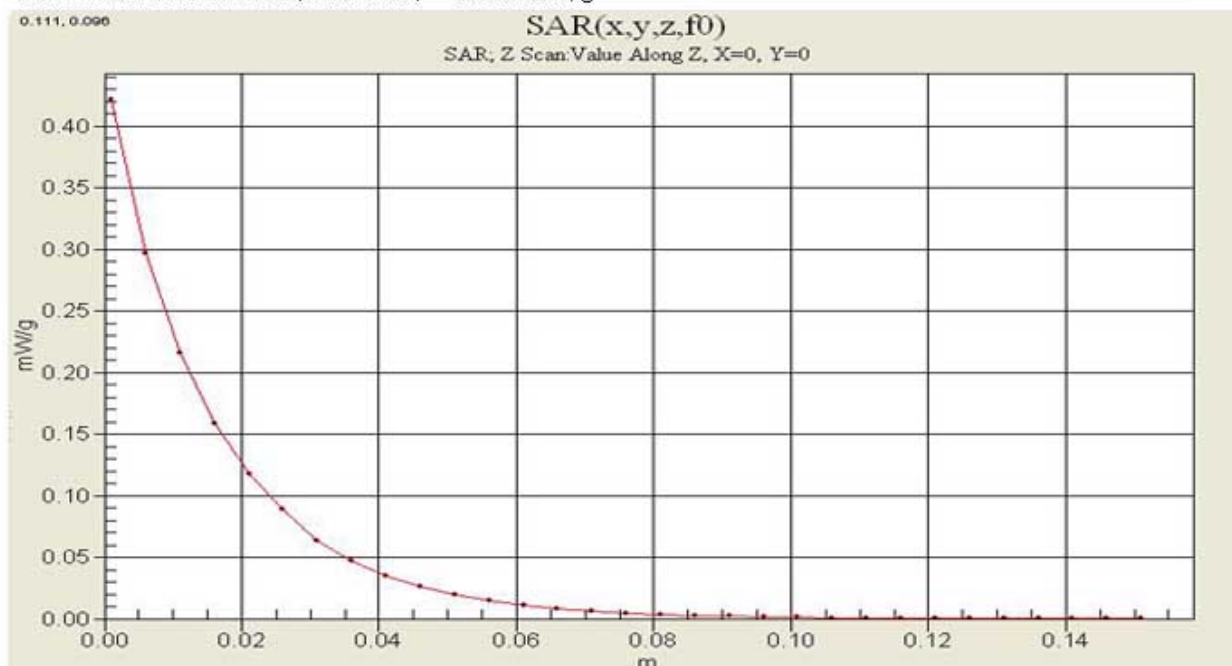

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : PCS1900 / Antenna : Fixed / Channel : 1175

Liquid Temperature : 22.4℃

Date Tested : June 15, 2006

DUT: PN-320; Type: Folder; Serial: #1

Communication System: PCS 1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(5.16, 5.16, 5.16); Calibrated: 2006-03-23

- Sensor-Surface: 0mm (Fix Surface)


- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 1175/Z Scan (1x1x31): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.12 mW/g

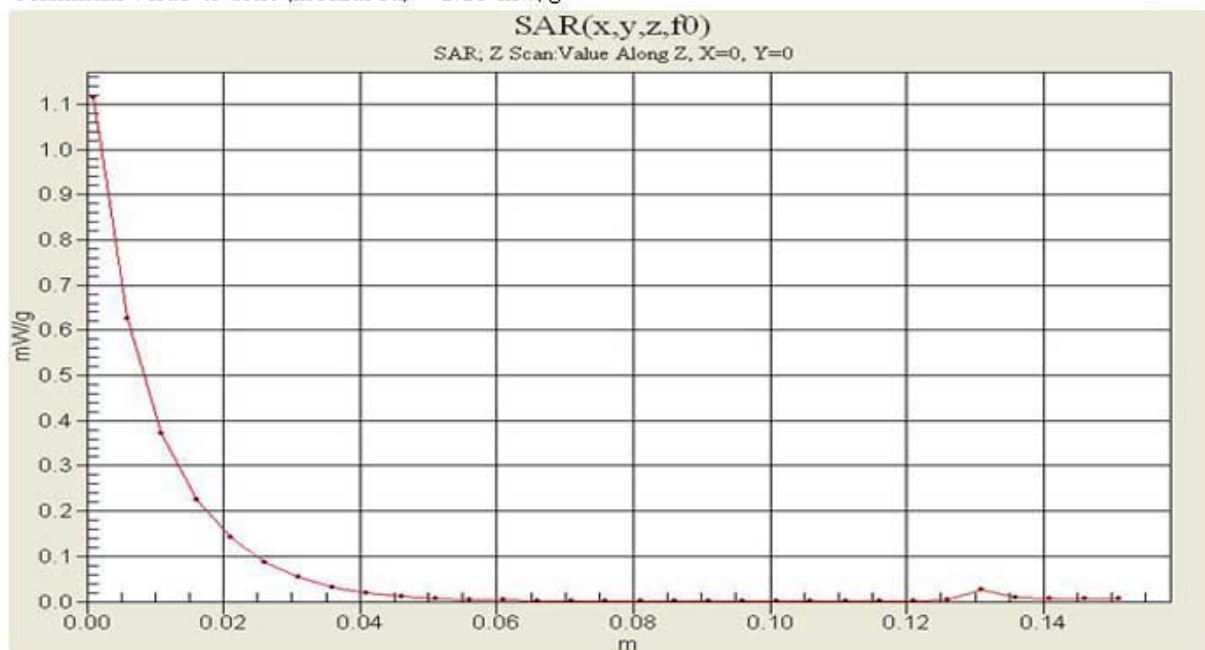

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : PCS1900 / Antenna : Fixed Channel : 600 (Body)

Liquid Temperature : 22.4°C

Date Tested : June 15, 2006

DUT: PN-320-Body; Type: Folder; Serial: #1

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.53$ mho/m; $\epsilon_r = 52.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ; Measurement SW: DASY4, V4.6 Build 23

DASY4 Configuration:

- Probe: ET3DV6 - SN1609; ConvF(4.63, 4.63, 4.63); Calibrated: 2006-03-23

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

PCS Body 600/Z Scan (1x1x31): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm

Maximum value of SAR (measured) = 0.585 mW/g

