

ATTACHMENT O – SAR TEST PLOTS (3 of 3)

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Channel : 384(Body)
Liquid Temperature : 21.7 °C
Date Tested : October 25, 2006

DUT: PN-810; Type: Slide down; Serial: PCC810-1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.99 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.71, 6.71, 6.71); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 384/Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.632 mW/g

CDMA Body 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 22.0 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 0.793 W/kg

SAR(1 g) = 0.596 mW/g; SAR(10 g) = 0.423 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.633 mW/g

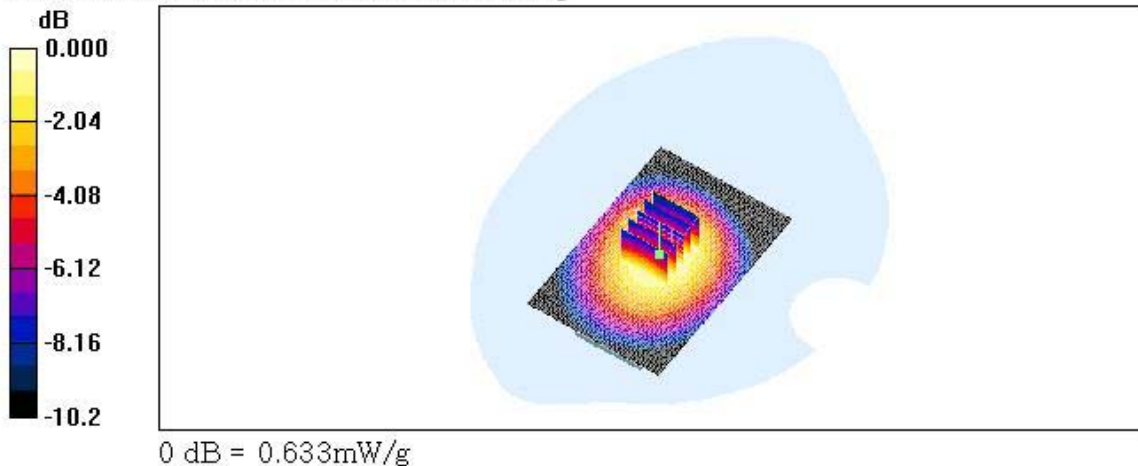

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835(Bluetooth) / Channel : 384(Body)
Liquid Temperature : 21.7 °C
Date Tested : October 25, 2006

DUT: PN-810; Type: Slide down; Serial: PCC810-1

Communication System: CDMA 835MHz FCC, Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.99 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.71, 6.71, 6.71); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 384/Area Scan (61x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.622 mW/g


CDMA Body 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.0 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 0.793 W/kg

SAR(1 g) = 0.593 mW/g; SAR(10 g) = 0.422 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.630 mW/g

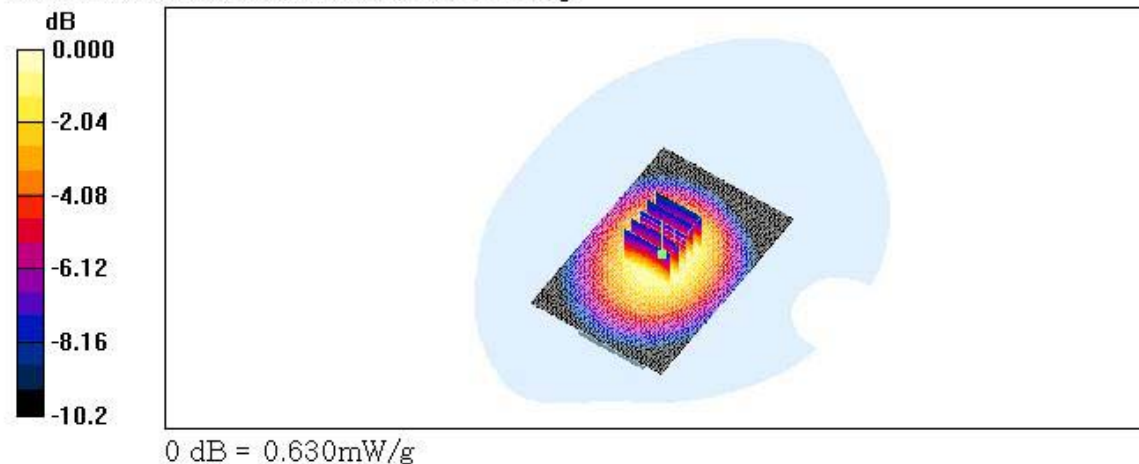

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835(EVDO) / Channel : 384(Body)
Liquid Temperature : 21.7 °C
Date Tested : October 25, 2006

DUT: PN-810; Type: Slide down; Serial: PCC810-1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.99 \text{ mho/m}$; $\epsilon_r = 53.4$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.71, 6.71, 6.71); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 384/Area Scan (61x91x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.623 mW/g


CDMA Body 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$

Reference Value = 21.9 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 0.780 W/kg

SAR(1 g) = 0.589 mW/g; SAR(10 g) = 0.422 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.622 mW/g

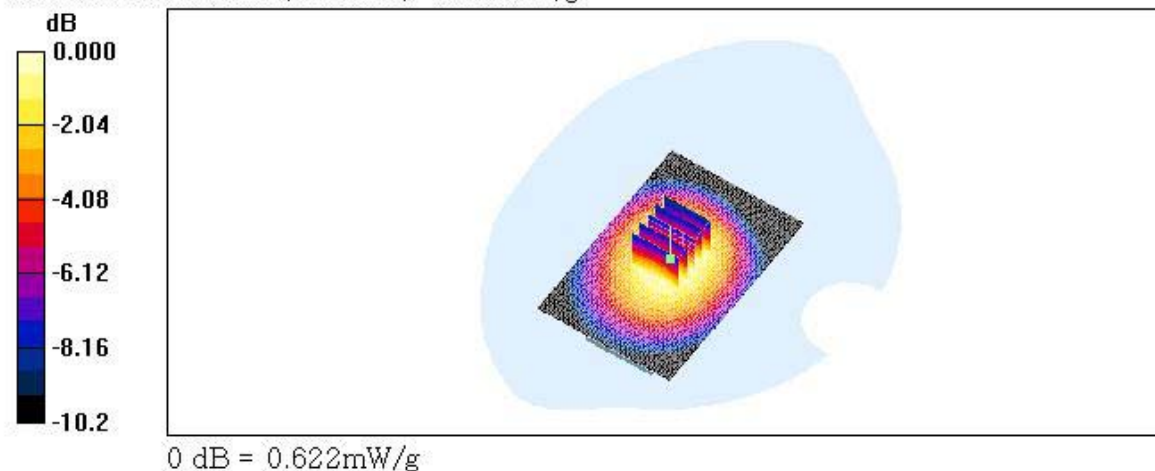

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : PCS1900 / Channel :600(Body)
Liquid Temperature : 21.6℃
Date Tested : October 26, 2006

DUT: PN-810; Type: Slide down; Serial: PCC810-1


Communication System: PCS 1900MHz FCC; Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.48 \text{ mho/m}$; $\epsilon_r = 51.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section ;Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(4.8, 4.8, 4.8); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

CDMA Body 600/Area Scan (61x91x1): Measurement grid: $\Delta x=15\text{mm}$, $\Delta y=15\text{mm}$
Maximum value of SAR (interpolated) = 0.650 mW/g

CDMA Body 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x=8\text{mm}$, $\Delta y=8\text{mm}$, $\Delta z=5\text{mm}$
Reference Value = 22.5 V/m; Power Drift = -0.091 dB
Peak SAR (extrapolated) = 0.913 W/kg
SAR(1 g) = 0.573 mW/g; SAR(10 g) = 0.328 mW/g
Maximum value of SAR (measured) = 0.637 mW/g

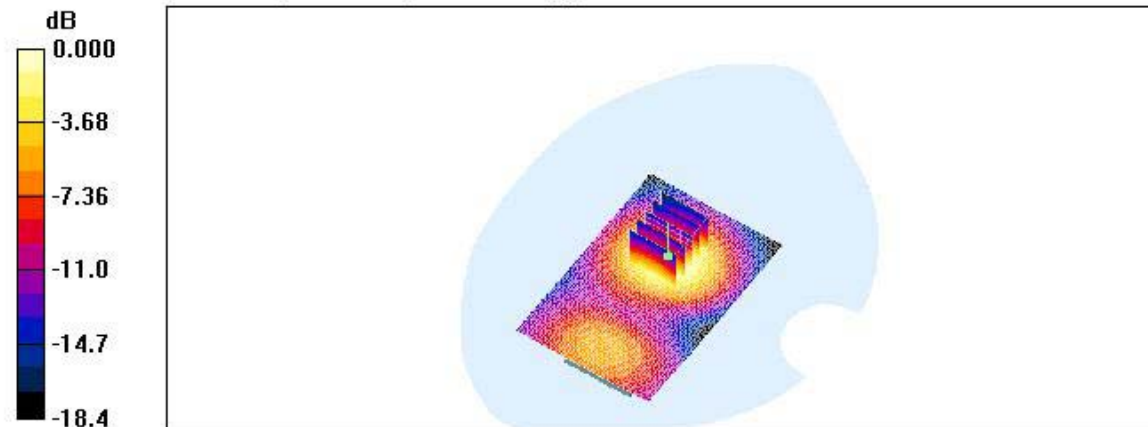

0 dB = 0.637mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : PCS1900(Bluetooth) / Channel :600(Body)

Liquid Temperature : 21.6 °C

Date Tested : October 26, 2006

DUT: PN-810; Type: Slide down; Serial: PCC810-1

Communication System: PCS 1900MHz FCC; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ;Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(4.8, 4.8, 4.8); Calibrated: 2006-08-25

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

CDMA Body 600/Area Scan (61x91x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.639 mW/g


CDMA Body 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 22.4 V/m; Power Drift = -0.103 dB

Peak SAR (extrapolated) = 0.879 W/kg

SAR(1 g) = 0.562 mW/g; SAR(10 g) = 0.324 mW/g

Maximum value of SAR (measured) = 0.615 mW/g

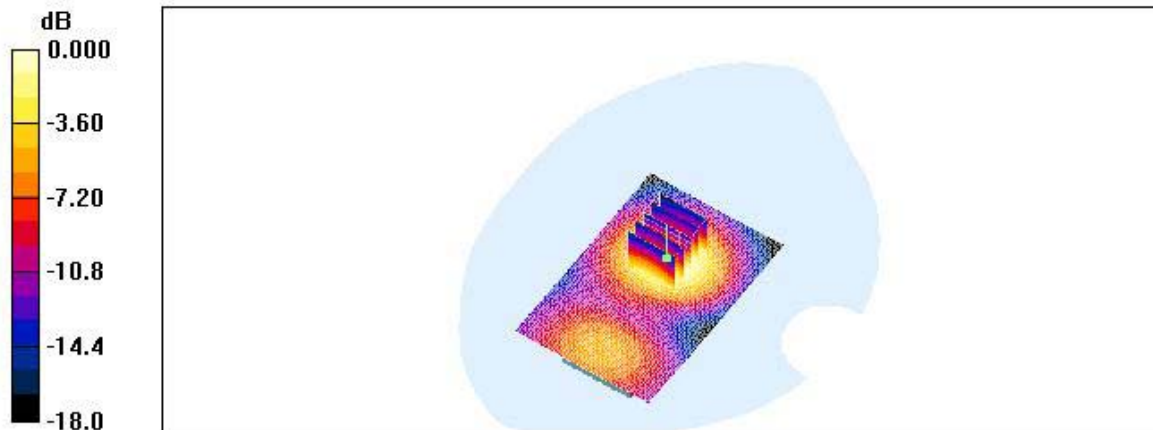

0 dB = 0.615mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : PCS1900(EVDO) / Channel :600(Body)
Liquid Temperature : 21.6℃
Date Tested : October 26, 2006

DUT: PN-810; Type: Slide down; Serial: PCC810-1


Communication System: PCS 1900MHz FCC; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³
Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(4.8, 4.8, 4.8); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 1800/1900 MHz; Type: SAM

CDMA Body 600/Area Scan (61x91x1): Measurement grid: $\Delta x=15$ mm, $\Delta y=15$ mm
Maximum value of SAR (interpolated) = 0.639 mW/g

CDMA Body 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x=8$ mm, $\Delta y=8$ mm, $\Delta z=5$ mm
Reference Value = 22.3 V/m; Power Drift = -0.052 dB
Peak SAR (extrapolated) = 0.877 W/kg
SAR(1 g) = 0.563 mW/g; SAR(10 g) = 0.324 mW/g
Maximum value of SAR (measured) = 0.624 mW/g

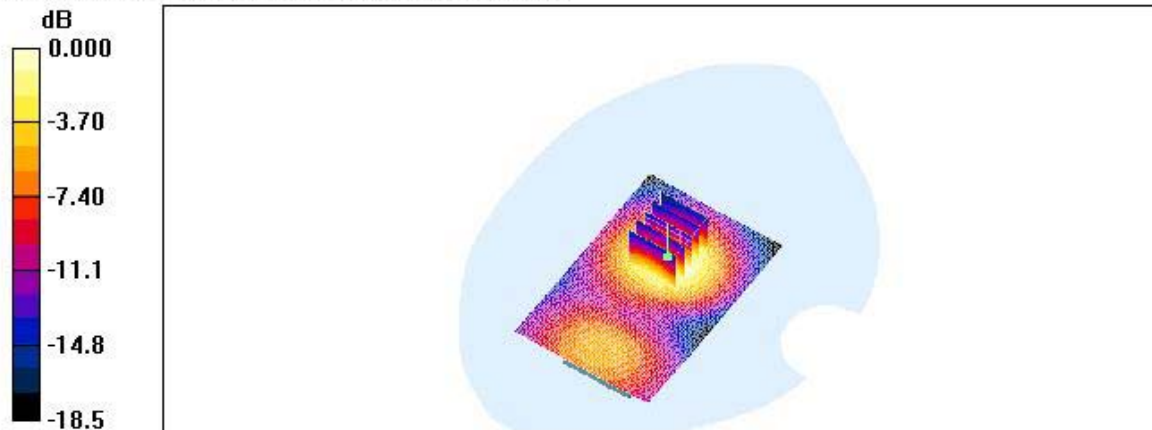

0 dB = 0.624mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Channel : 777
Liquid Temperature : 21.7 °C
Date Tested : October 25, 2006

DUT: PN-810; Type: Slide down; Serial: PCC810-1


Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 41.1$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 777/Z Scan (1x1x31): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.373 mW/g

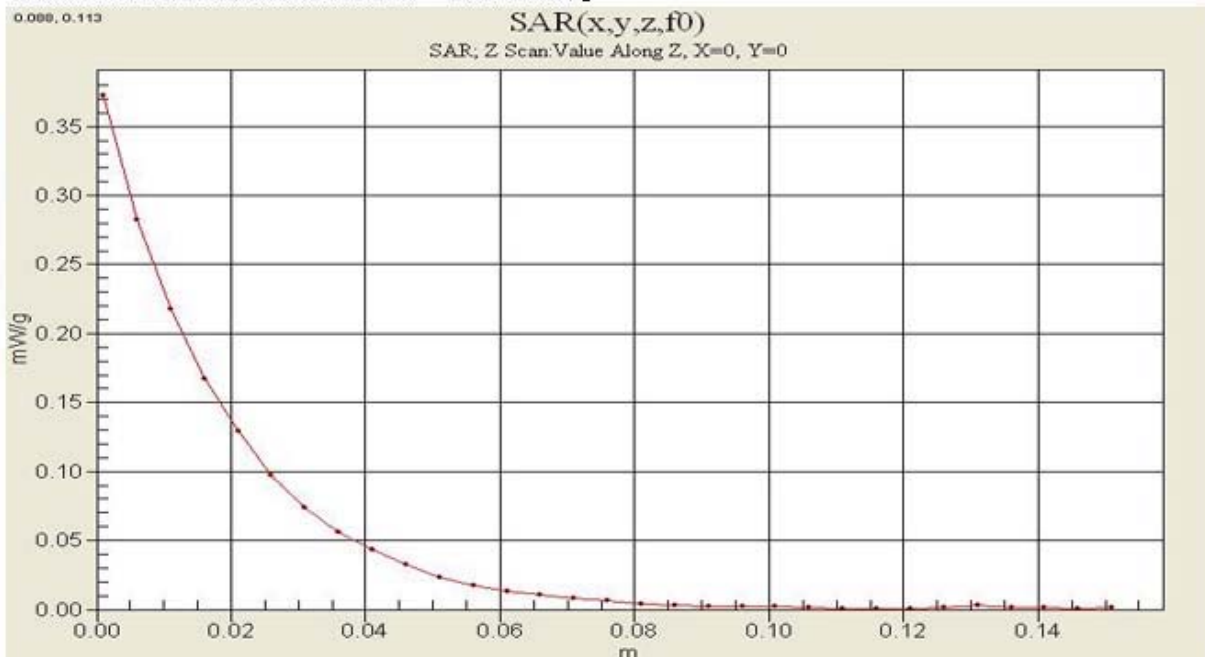

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : PCS1900 / Channel : 600

Liquid Temperature : 21.6℃

Date Tested : October 26, 2006

DUT: PN-810; Type: Slide down; Serial: PCC810-1

Communication System: PCS 1900MHz FCC; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.38 \text{ mho/m}$; $\epsilon_r = 40.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:


- Probe: ET3DV6 - SN1798; ConvF(5.6, 5.6, 5.6); Calibrated: 2006-08-25

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

Right touch 600/Z Scan (1x1x31): Measurement grid: $\Delta x = 20\text{mm}$, $\Delta y = 20\text{mm}$, $\Delta z = 5\text{mm}$
Maximum value of SAR (measured) = 0.758 mW/g

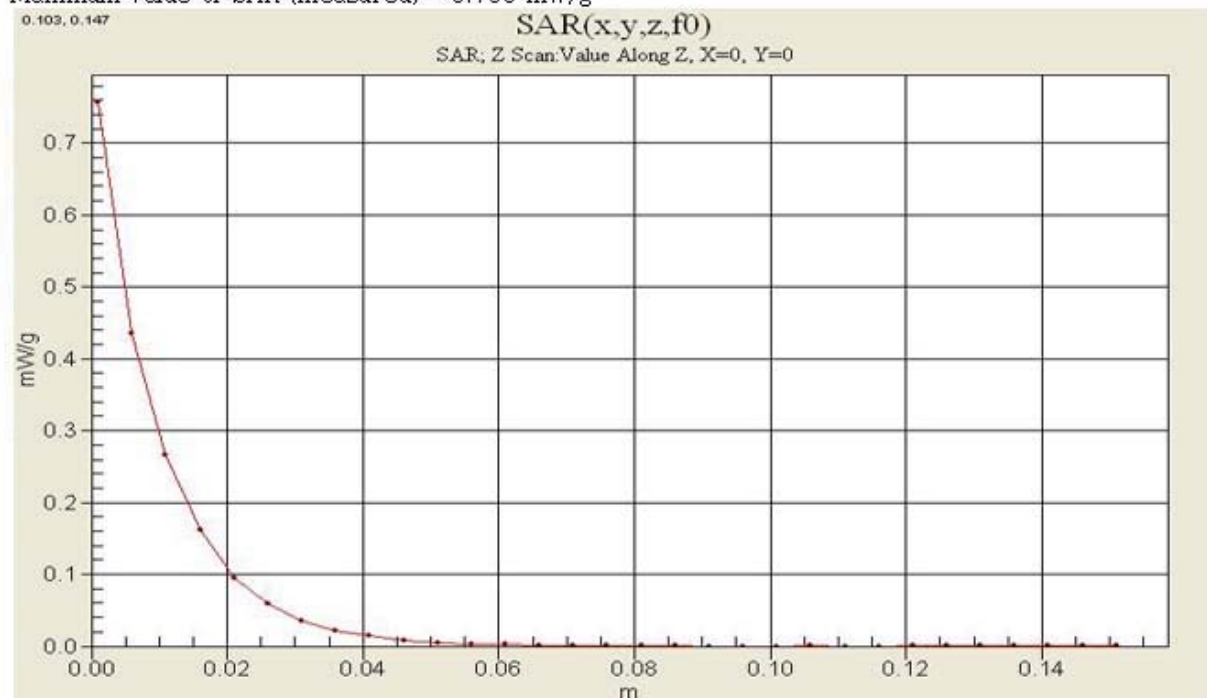

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Channel : 384(Body)

Liquid Temperature : 21.7 °C

Date Tested : October 25, 2006

DUT: PN-810; Type: Slide down; Serial: PCC810-1

Communication System: CDMA 835MHz FCC, Frequency: 836.52 MHz,Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section ;Measurement SW: DASY4, V4.7 Build 44


DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.71, 6.71, 6.71); Calibrated: 2006-08-25
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn447; Calibrated: 2005-11-30
- Phantom: SAM 835/900 MHz; Type: SAM

CDMA Body 384/Z Scan (1x1x31): Measurement grid: $dx=20$ mm, $dy=20$ mm, $dz=5$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.599 mW/g

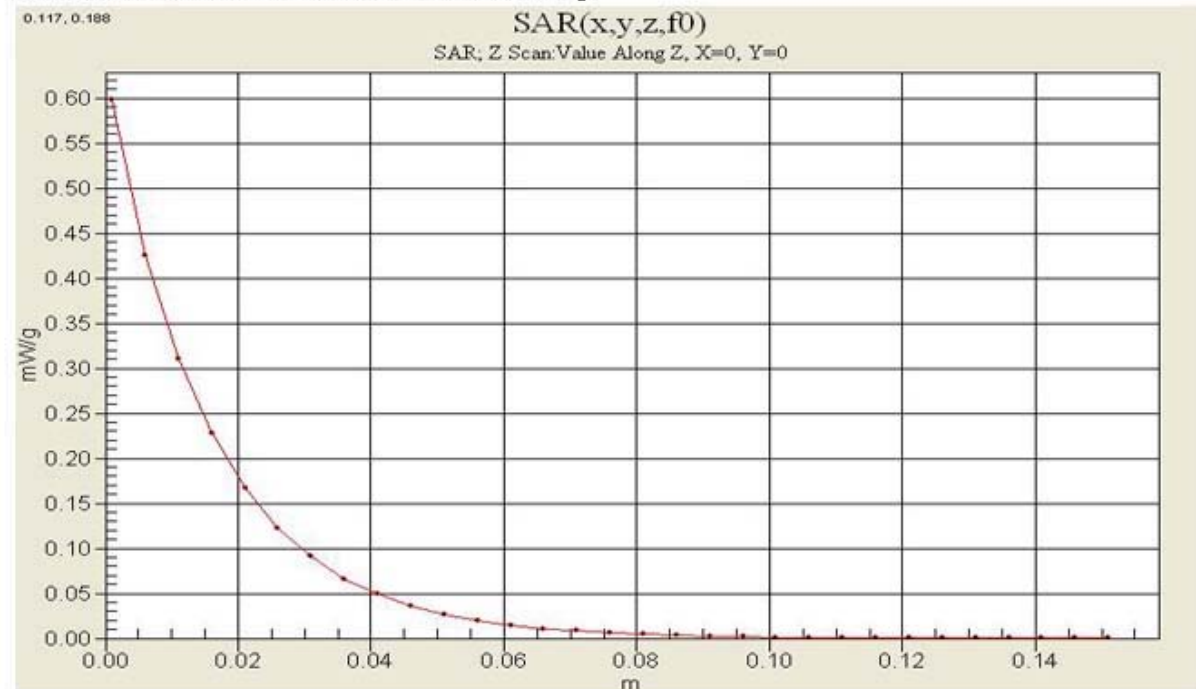

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : PCS1900 / Channel :600(Body)

Liquid Temperature : 21.6℃

Date Tested : October 26, 2006

DUT: PN-810; Type: Slide down; Serial: PCC810-1

Communication System: PCS 1900MHz FCC; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.48 \text{ mho/m}$; $\epsilon_r = 51.3$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(4.8, 4.8, 4.8); Calibrated: 2006-08-25

- Sensor-Surface: 0mm (Fix Surface)

- Electronics: DAE4 Sn447; Calibrated: 2005-11-30

- Phantom: SAM 1800/1900 MHz; Type: SAM

CDMA Body 600/Z Scan (1x1x31): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=5\text{mm}$

Maximum value of SAR (measured) = 0.548 mW/g

