

ATTACHMENT O – SAR TEST PLOTS (1 of 3)

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Antenna : in / Channel : 1013
Liquid Temperature : 21.6 °C
Date Tested : April 29, 2006

DUT: PN-E330; Type: Folder; Serial: #1


Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.88 \text{ mho/m}$; $\epsilon_r = 42.1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 19

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 1013/Area Scan (51x111x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.845 mW/g

Left touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 23.0 V/m; Power Drift = -0.204 dB
Peak SAR (extrapolated) = 1.17 W/kg
SAR(1 g) = 0.796 mW/g; SAR(10 g) = 0.527 mW/g
Maximum value of SAR (measured) = 0.864 mW/g

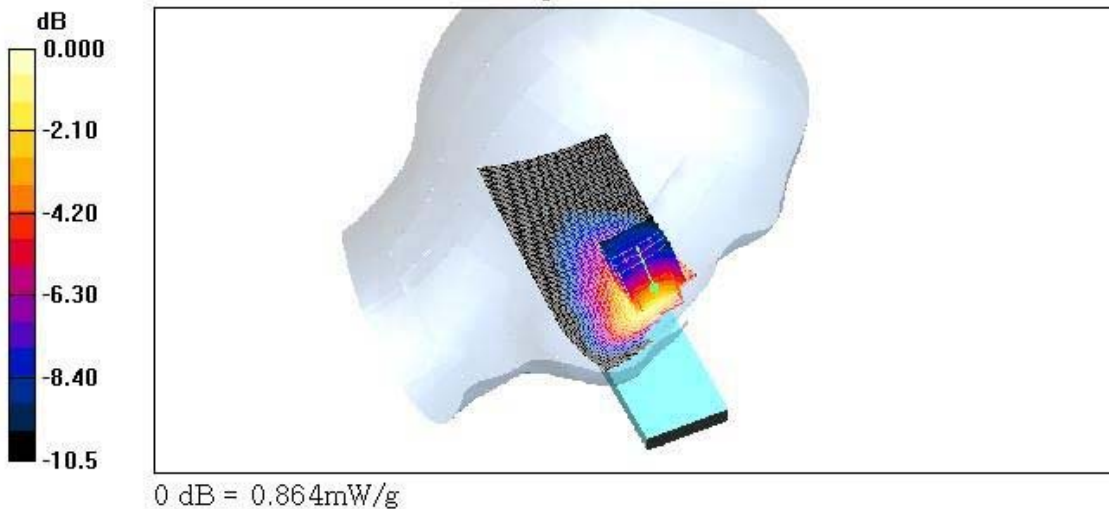

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Antenna : out / Channel : 1013
Liquid Temperature : 21.6 °C
Date Tested : April 29, 2006

DUT: PN-E330; Type: Folder; Serial: #1


Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 825$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³
Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 19

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 1013/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.879 mW/g

Left touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 22.2 V/m; Power Drift = 0.132 dB
Peak SAR (extrapolated) = 1.23 W/kg
SAR(1 g) = 0.832 mW/g; SAR(10 g) = 0.548 mW/g
Maximum value of SAR (measured) = 0.893 mW/g

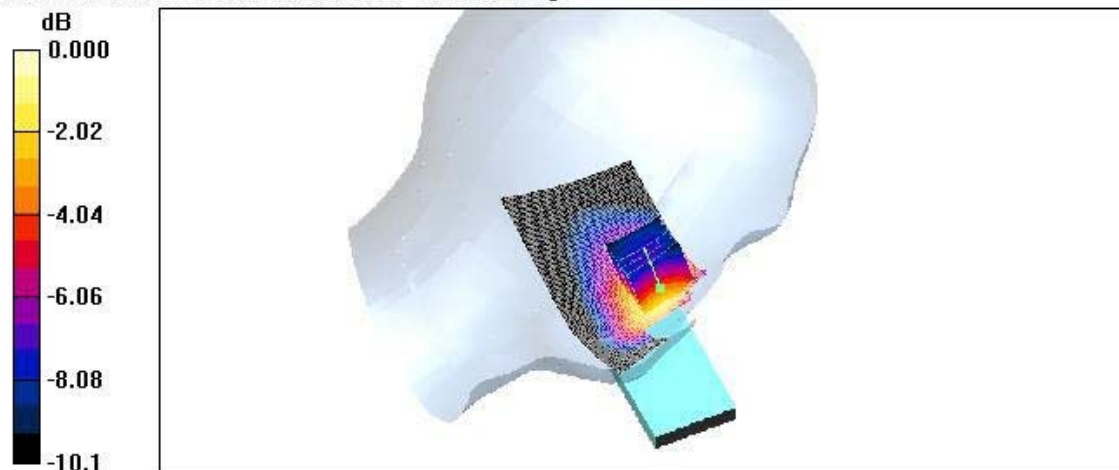

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Antenna : in / Channel : 363
Liquid Temperature : 21.6 °C
Date Tested : April 29, 2006

DUT: PN-E330; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz;Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.891$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section ;Measurement SW: DASY4, V4.6 Build 19

DASY4 Configuration:


- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 363/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.940 mW/g

Left touch 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 21.2 V/m; Power Drift = -0.142 dB
Peak SAR (extrapolated) = 1.27 W/kg
SAR(1 g) = 0.870 mW/g; SAR(10 g) = 0.573 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.941 mW/g

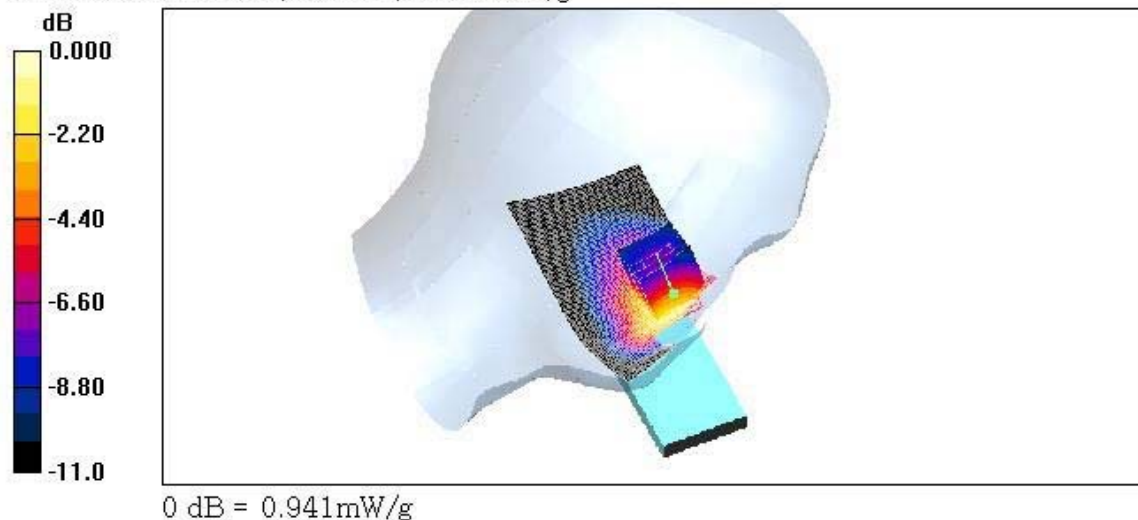

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Antenna : out / Channel : 363
Liquid Temperature : 21.6 °C
Date Tested : April 29, 2006

DUT: PN-E330; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.891$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 19

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 363/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm


Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.896 mW/g

Left touch 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.7 V/m; Power Drift = 0.033 dB
Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.842 mW/g; SAR(10 g) = 0.554 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.917 mW/g

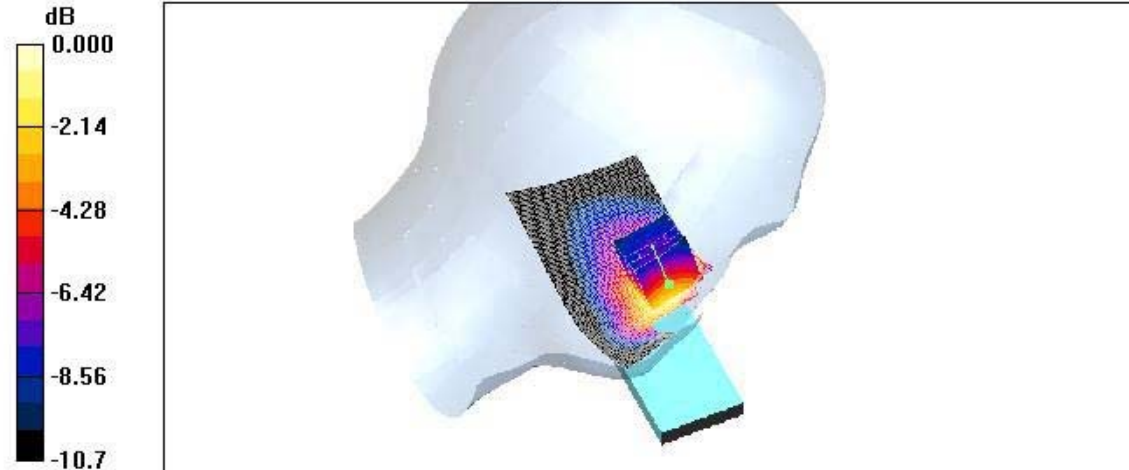

0 dB = 0.917mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Antenna : in / Channel : 777
Liquid Temperature : 21.6 °C
Date Tested : April 29, 2006

DUT: PN-E330; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 19

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 777/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 1.00 mW/g

Left touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 21.8 V/m; Power Drift = -0.135 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.925 mW/g; SAR(10 g) = 0.612 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.00 mW/g

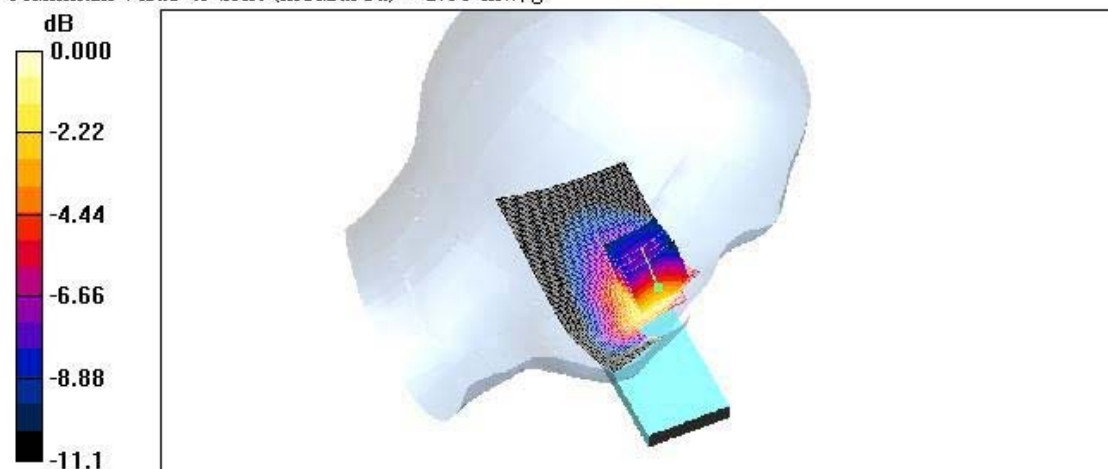

0 dB = 1.00mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Antenna : out / Channel : 777
Liquid Temperature : 21.6 °C
Date Tested : April 29, 2006

DUT: PN-E330; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC, Frequency: 848.31 MHz,Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³
Phantom section: Left Section ;Measurement SW: DASY4, V4.6 Build 19

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 777/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.582 mW/g

Left touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 17.5 V/m; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 0.818 W/kg

SAR(1 g) = 0.556 mW/g; SAR(10 g) = 0.365 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.603 mW/g

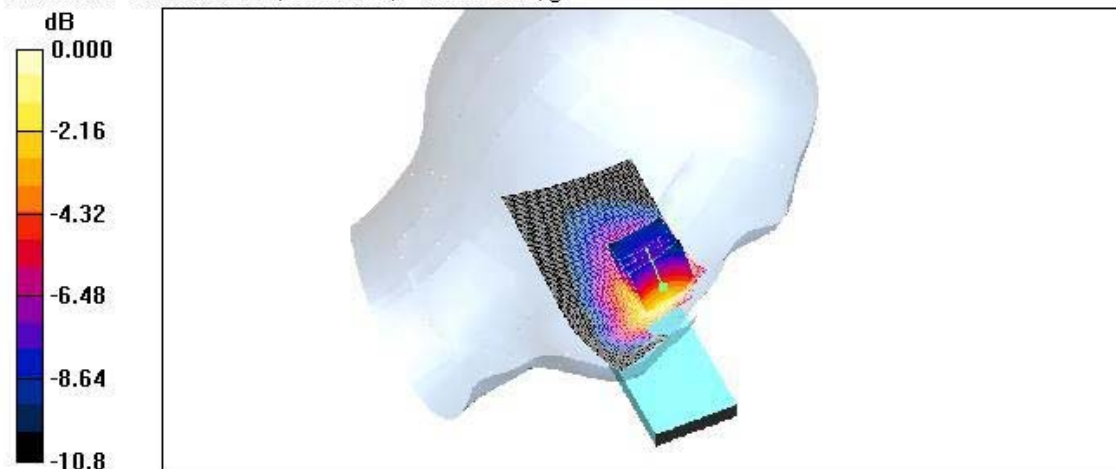

0 dB = 0.603mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Antenna : in / Channel : 1013
Liquid Temperature : 21.6 °C
Date Tested : April 29, 2006

DUT: PN-E330; Type: Folder; Serial: #1


Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 825$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 19

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 1013/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 1.13 mW/g

Right touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 26.0 V/m; Power Drift = -0.133 dB
Peak SAR (extrapolated) = 1.61 W/kg
SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.676 mW/g
Maximum value of SAR (measured) = 1.11 mW/g

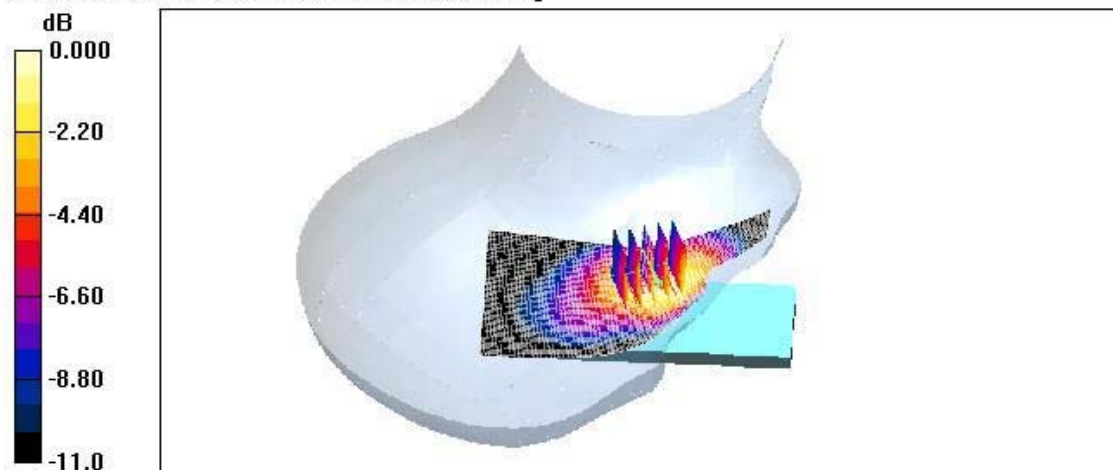

0 dB = 1.11mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMAB35 / Antenna : out / Channel : 1013
Liquid Temperature : 21.6 °C
Date Tested : April 29, 2006

DUT: PN-E330; Type: Folder; Serial: #1


Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 825$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 19

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 1013/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 1.09 mW/g

Right touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 26.6 V/m; Power Drift = -0.084 dB
Peak SAR (extrapolated) = 1.55 W/kg
SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.659 mW/g
Maximum value of SAR (measured) = 1.10 mW/g

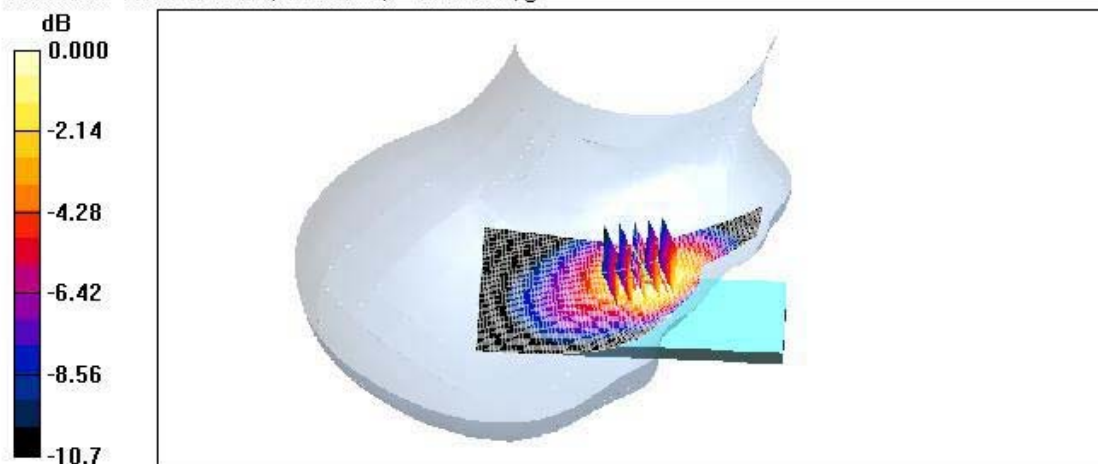

0 dB = 1.10mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Antenna : in / Channel : 363

Liquid Temperature : 21.6 °C

Date Tested : April 29, 2006

DUT: PN-E330; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.891$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 19

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 363/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.20 mW/g

Right touch 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 26.1 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 1.1 mW/g; SAR(10 g) = 0.710 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.16 mW/g

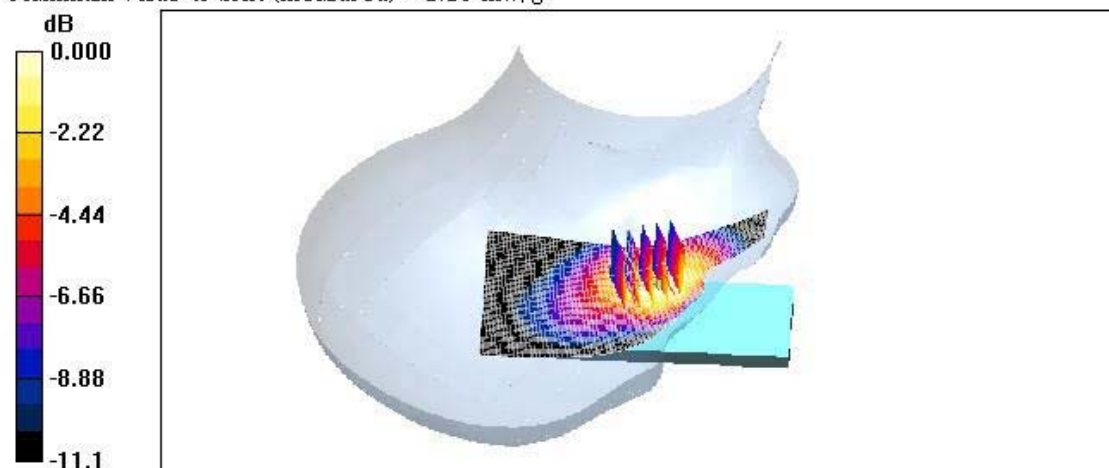

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Antenna : out / Channel : 363
Liquid Temperature : 21.6 °C
Date Tested : April 29, 2006

DUT: PN-E330; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89$ MHz, $\sigma = 0.891$ mho/m, $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 19

DASY4 Configuration:


- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 363/Area Scan (51x101x1): Measurement grid: $\Delta x=15$ mm, $\Delta y=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 1.13 mW/g

Right touch 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x=8$ mm, $\Delta y=8$ mm, $\Delta z=5$ mm
Reference Value = 26.7 V/m; Power Drift = -0.186 dB
Peak SAR (extrapolated) = 1.57 W/kg
SAR(1 g) = 1.03 mW/g; SAR(10 g) = 0.665 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.11 mW/g

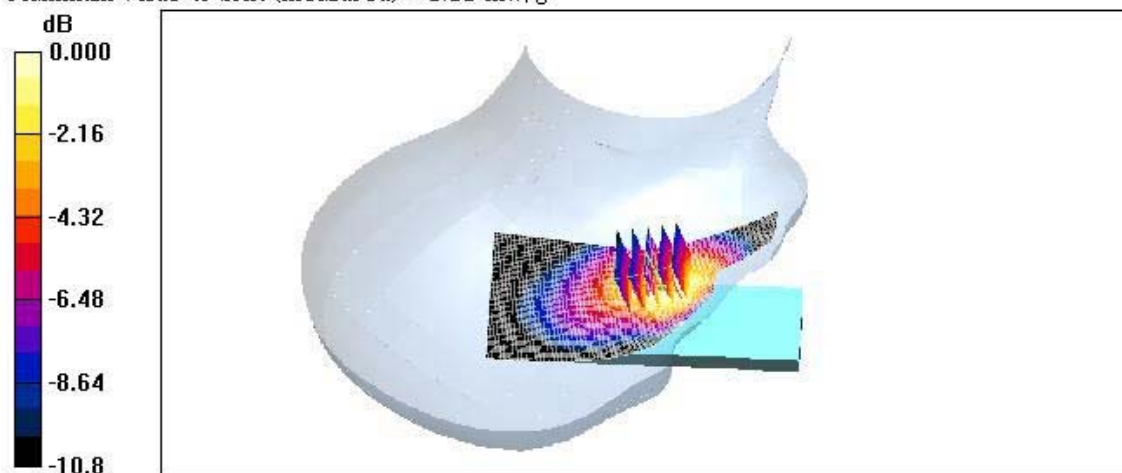

0 dB = 1.11 mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Antenna : in / Channel : 777

Liquid Temperature : 21.6 °C

Date Tested : April 29, 2006

DUT: PN-E330; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 848.31$ MHz, $\sigma = 0.902$ mho/m, $\epsilon_r = 41.7$, $\rho = 1000$ kg/m³

Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 19

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 777/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.26 mW/g

Right touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.7 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.741 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.22 mW/g

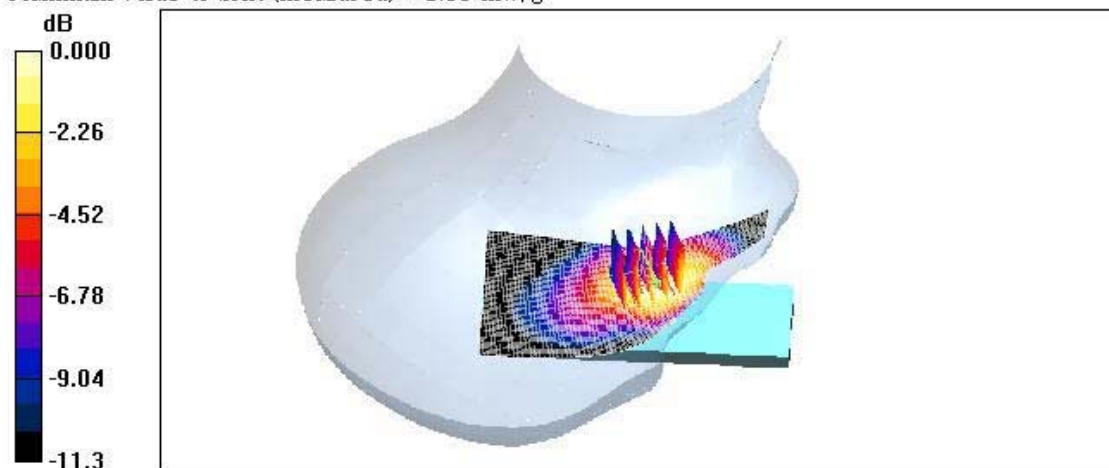

0 dB = 1.22mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Antenna : in / Channel : 777(E-battery)
Liquid Temperature : 21.6 °C
Date Tested : April 29, 2006

DUT: PN-E330; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 848.31$ MHz, $\sigma = 0.902$ mho/m, $\epsilon_r = 41.7$, $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 19

DASY4 Configuration:


- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 777/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 1.16 mW/g

Right touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 25.4 V/m; Power Drift = 0.095 dB
Peak SAR (extrapolated) = 1.62 W/kg
SAR(1 g) = 1.05 mW/g; SAR(10 g) = 0.670 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.15 mW/g

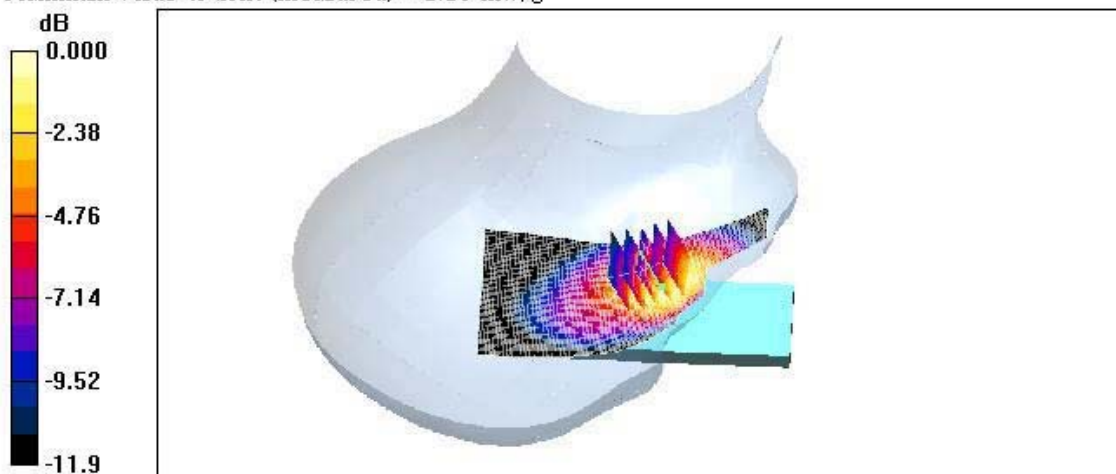

0 dB = 1.15mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Antenna : in / Channel : 777(Bluetooth)
Liquid Temperature : 21.6 °C
Date Tested : April 29, 2006

DUT: PN-E330; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 19

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 777/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 1.23 mW/g


Right touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 25.9 V/m; Power Drift = -0.114 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.713 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.21 mW/g

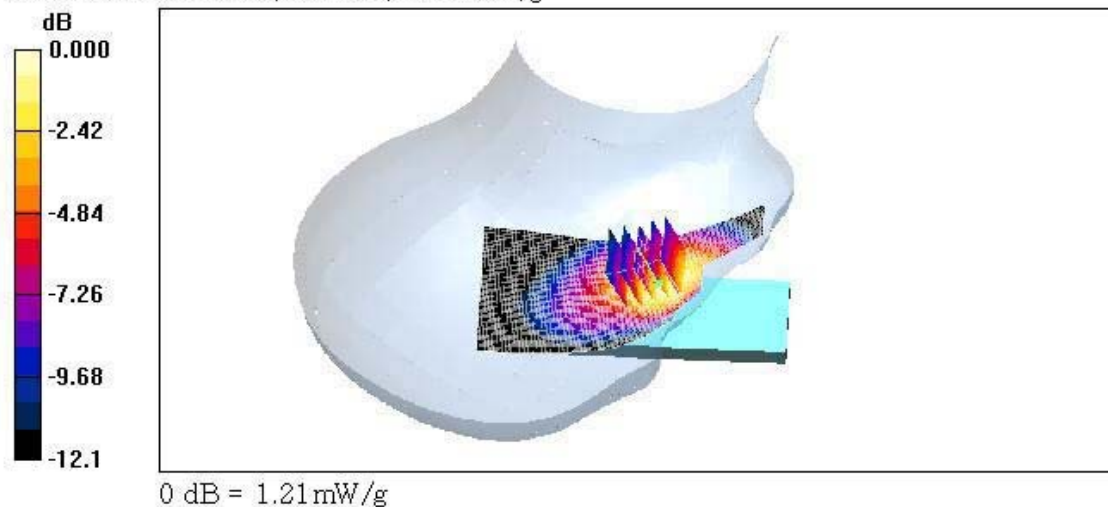

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Antenna : out / Channel : 777
Liquid Temperature : 21.6 °C
Date Tested : April 29, 2006

DUT: PN-E330; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.902$ mho/m; $\epsilon_r = 41.7$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 19

DASY4 Configuration:


- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 777/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.751 mW/g

Right touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm
Reference Value = 21.1 V/m; Power Drift = -0.066 dB
Peak SAR (extrapolated) = 1.03 W/kg
SAR(1 g) = 0.679 mW/g; SAR(10 g) = 0.438 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.727 mW/g

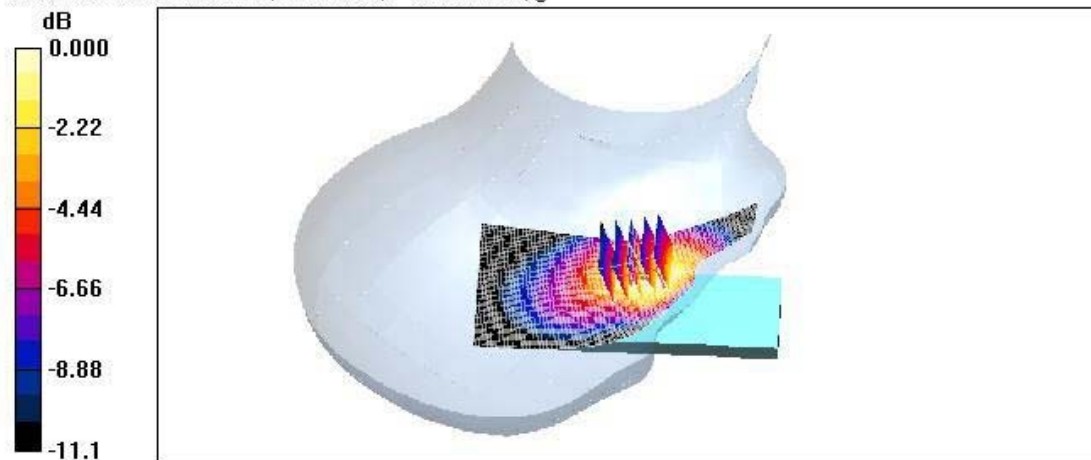

0 dB = 0.727mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Antenna : in / Channel : 363
Liquid Temperature : 21.6 °C
Date Tested : April 29, 2006

DUT: PN-E330; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.891$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³
Phantom section: Left Section ; Measurement SW: DASY4, V4.6 Build 19

DASY4 Configuration:


- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left tilt 363/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.245 mW/g

Left tilt 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm
Reference Value = 14.6 V/m; Power Drift = -0.068 dB
Peak SAR (extrapolated) = 0.286 W/kg
SAR(1 g) = 0.225 mW/g; SAR(10 g) = 0.168 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.236 mW/g

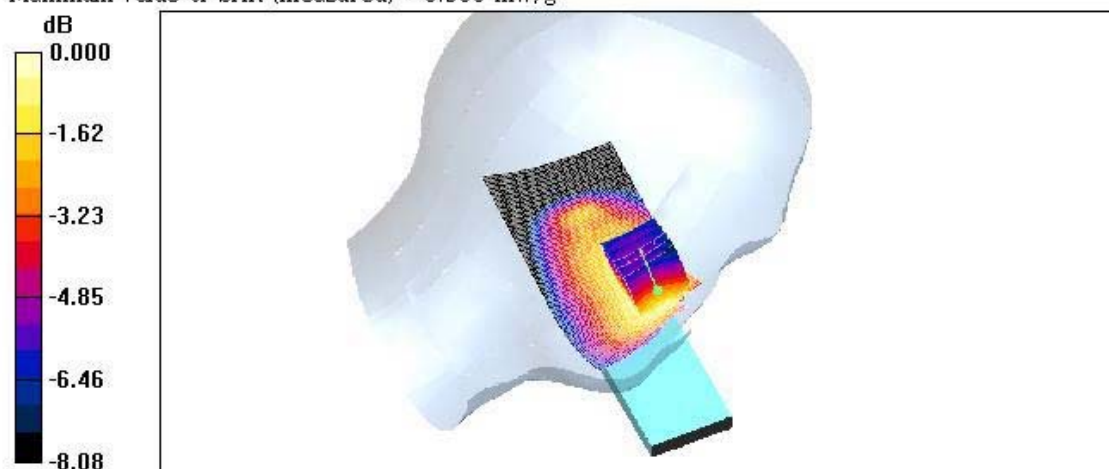

0 dB = 0.236mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Antenna : out / Channel : 363

Liquid Temperature : 21.6 °C

Date Tested : April 29, 2006

DUT: PN-E330; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.891$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section ;Measurement SW: DASY4, V4.6 Build 19

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

Left tilt 363/Area Scan (51x101x1): Measurement grid: $\Delta x=15$ mm, $\Delta y=15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.194 mW/g

Left tilt 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x=8$ mm, $\Delta y=8$ mm, $\Delta z=5$ mm


Reference Value = 12.8 V/m; Power Drift = -0.114 dB

Peak SAR (extrapolated) = 0.230 W/kg

SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.134 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.192 mW/g

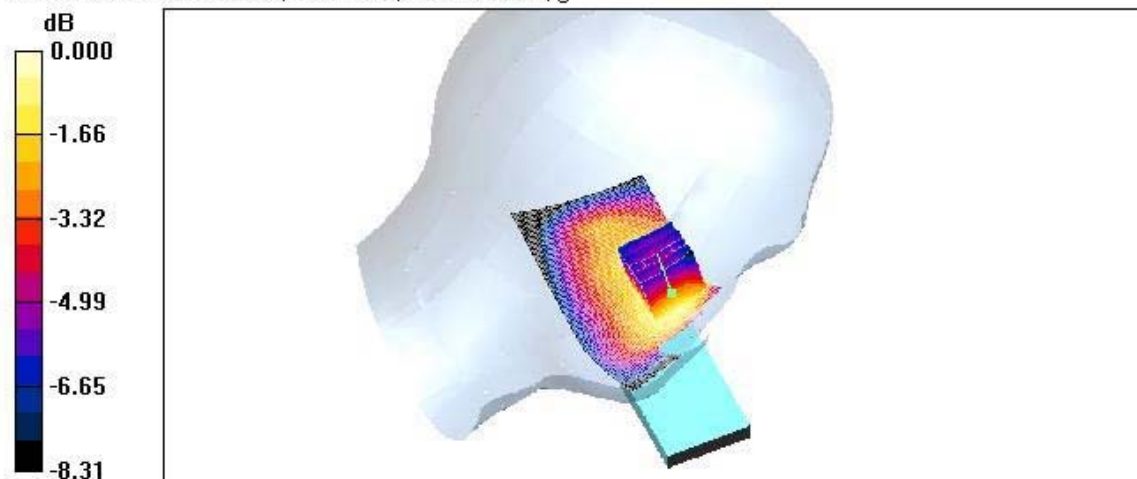

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Antenna : in / Channel : 363
Liquid Temperature : 21.6 °C
Date Tested : April 29, 2006

DUT: PN-E330; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.891$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 19

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 363/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm


Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.291 mW/g

Right tilt 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 16.5 V/m; Power Drift = 0.040 dB
Peak SAR (extrapolated) = 0.346 W/kg

SAR(1 g) = 0.274 mW/g; SAR(10 g) = 0.203 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.294 mW/g

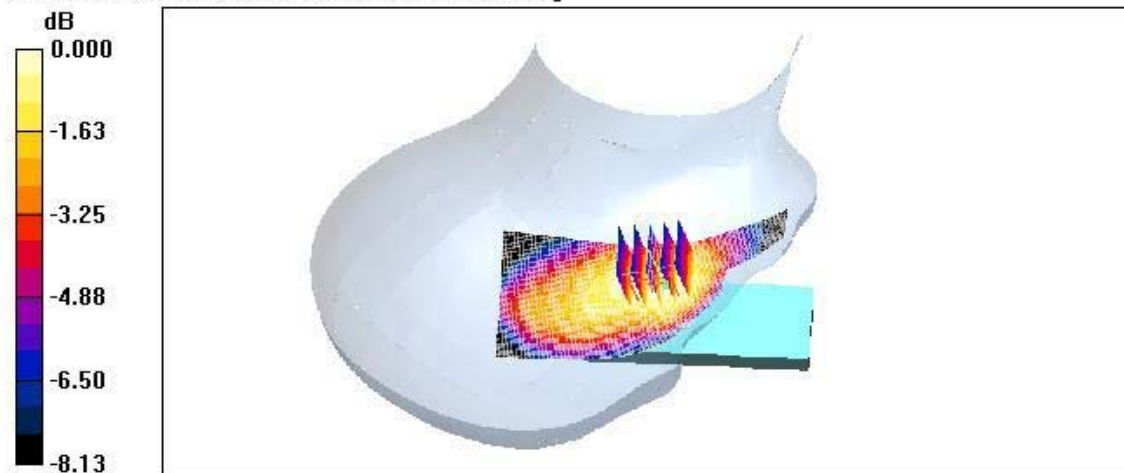

0 dB = 0.294mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Antenna : out / Channel : 363
Liquid Temperature : 21.6 °C
Date Tested : April 29, 2006

DUT: PN-E330; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 835.89 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 835.89$ MHz; $\sigma = 0.891$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.6 Build 19

DASY4 Configuration:

- Probe: ET3DV6 - SN1607; ConvF(6.18, 6.18, 6.18); Calibrated: 2005-08-30
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 363/Area Scan (51x101x1): Measurement grid: dx=15mm, dy=15mm

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.235 mW/g

Right tilt 363/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.9 V/m; Power Drift = -0.042 dB
Peak SAR (extrapolated) = 0.282 W/kg
SAR(1 g) = 0.222 mW/g; SAR(10 g) = 0.166 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 0.234 mW/g

