




# PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA  
Tel. 410.290.6652 / Fax 410.290.6554  
<http://www.pctestlab.com>



## HEARING AID COMPATIBILITY CERTIFICATE

**Applicant Name:**  
Hyundai Curitel Inc.  
San 136-1, Ami-Ri,  
Bubal-Eub, Ichon-Si,  
Kyoungki-Do, 467-701  
South Korea

**Date of Testing:**  
May 24, 2005  
**Test Site/Location:**  
PCTEST Lab, Columbia, MD, USA  
**Test Report Serial No.:**  
HAC.0506090424-R2.PP4

**FCC ID:** PP4TX-210

**APPLICANT:** HYUNDAI CURITEL INC.

**Application Type:** Class II Permissive Change  
**FCC Rule Part(s):** § 20.19(b), §6.3(v), §7.3(v)  
**HAC Standard:** ANSI PC63.19-2005 D3.6  
**FCC Classification:** Licensed Transmitter Held to Ear (PCE)  
**EUT Type:** Dual-Band CDMA Phone  
**Model(s):** TX-210  
**Tx Frequency:** 824.04 - 848.97 MHz (AMPS)  
824.70 - 848.31 MHz (CDMA)  
1851.25 - 1908.75 MHz (PCS)  
**Test Device Serial No.:** Pre-Production Sample [S/N: #2]  
**Class II Permissive Change(s):** Adding HAC Rating

**PC63.19 HAC Rated Category:** M3 (RF EMISSIONS)



This wireless portable device has been shown to be compatible with hearing aids under the above rated category, specified in ANSI/IEEE Std. PC63.19 and had been tested in accordance with the specified measurement procedures. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

*PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.*

  
Alfred Cirwithian  
Vice President Engineering





PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 1 of 63

# TABLE OF CONTENTS

---

1.	INTRODUCTION .....	3
2.	TEST SITE LOCATION .....	4
3.	EUT DESCRIPTION .....	5
4.	SYSTEM SPECIFICATIONS .....	6
5.	TEST PROCEDURE .....	11
6.	ANSI/IEEE PC63.19 PERFORMANCE CATEGORIES .....	13
7.	SYSTEM CHECK .....	14
8.	MODULATION FACTOR .....	17
9.	OVERALL MEASUREMENT SUMMARY .....	19
10.	EQUIPMENT LIST .....	22
11.	MEASUREMENT UNCERTAINTY .....	23
12.	TEST DATA .....	24
13.	PROBE CALIBRATION .....	41
14.	SETUP PHOTOGRAPHS .....	59
15.	CONCLUSION .....	61
16.	REFERENCES .....	62

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 2 of 63

# 1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-8658<sup>1</sup> to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide suffer from hearing loss.

## Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- RF Magnetic-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.

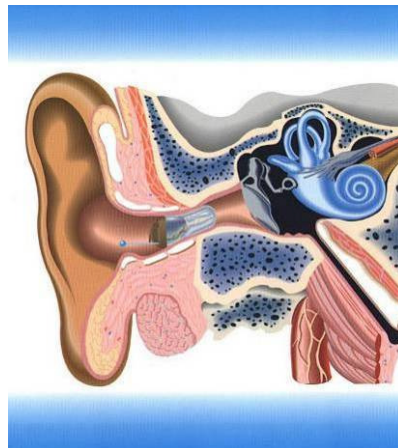




Figure 1 Hearing Aid *in-vitu*

<sup>1</sup> FCC Rule & Order, WT Docket 01-309 RM-8658


PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 3 of 63

## 2. TEST SITE LOCATION

### 2.1 INTRODUCTION

The map at the right shows the location of the PCTEST LABORATORY in Columbia, Maryland. It is in proximity to the FCC Laboratory, the Baltimore-Washington International (BWI) airport, the city of Baltimore and Washington, DC (See Figure 2).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49' 38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4 on October 19, 2002.

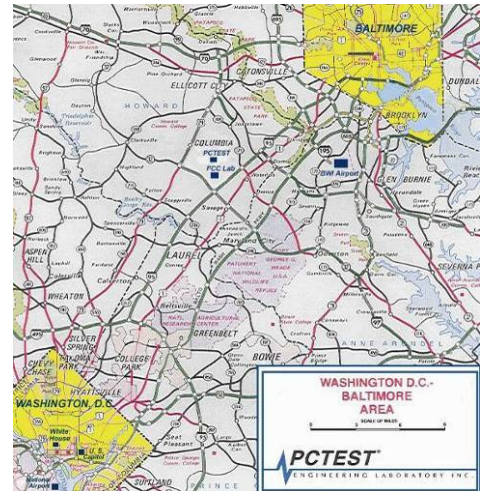

**Figure 2**  
Map of the Greater Baltimore and Metropolitan Washington, D.C. area

### 2.2 Test Facility / NVLAP Accreditation:

Measurements were performed at an independent accredited PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC 2451).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, CTIA Test Plans, and wireless testing for FCC, HAC, CTIA OTA and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules.
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) in AMPS and CDMA mobile phones.



<b>PCTEST™ HAC REPORT</b>	<b>PCTEST</b> <small>Engineering Laboratory, Inc.</small>	<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 4 of 63

### 3. EUT DESCRIPTION



FCC ID: PP4TX-210  
 Manufacturer: Hyundai Curitel Inc.  
 San 136-1, Ami-Ri,  
 Bubal-Eub, Ichon-Si,  
 Kyoungki-Do, 467-701

Trade Name: Curitel  
 Model(s): TX-210  
 Serial Number: #2  
 Tx Frequencies: 824.04 - 848.97 MHz (AMPS)  
 824.70 - 848.31 MHz (CDMA)  
 1851.25 - 1908.75 MHz (PCS)

Antenna Configurations: Extendable Antenna  
 Maximum Conducted Power (EMC/SAR): 25.5 dBm (CDMA), 25.0 dBm (PCS)  
 Maximum Conducted Power (HAC): 25.5 dBm (CDMA), 25.0 dBm (PCS)  
 HAC Test Configurations: CDMA, Antenna In, Channels 1013, 384, 777  
 CDMA, Antenna Out, Channels 1013, 384, 777  
 PCS, Antenna In Channels 25, 600, 1175  
 PCS, Antenna Out Channels 25, 600, 1175

FCC Classification: Licensed Transmitter Held to Ear (PCE)  
 EUT Type: Dual-Band CDMA Phone




**Figure 3**  
**Device Under Test**

PCTEST™ HAC REPORT	PCTEST wireless	FCC MEASUREMENT REPORT	CURITEL	Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 5 of 63

## 4. SYSTEM SPECIFICATIONS

### ER3DV6 E-Field Probe Description


Construction:	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges
Calibration:	In air from 100 MHz to 3.0 GHz (absolute accuracy $\pm 6.0\%$ , $k=2$ )
Frequency:	100 MHz to > 6 GHz; Linearity: $\pm 0.2$ dB (100 MHz to 3 GHz)
Directivity	$\pm 0.2$ dB in air (rotation around probe axis) $\pm 0.4$ dB in air (rotation normal to probe axis)
Dynamic Range	2 V/m to > 1000 V/m (M3 or better device readings fall well below diode compression point)
Linearity:	$\pm 0.2$ dB
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.5 mm



**Figure 4**  
E-field Free-space Probe

### H3DV6 H-Field Probe Description

Construction:	Three concentric loop sensors with 3.8 mm loop diameters Resistively loaded detector diodes for linear response Built-in shielding against static charges
Frequency:	200 MHz to 3 GHz (absolute accuracy $\pm 6.0\%$ , $k=2$ ); Output linearized
Directivity:	$\pm 0.25$ dB (spherical isotropy error)
Dynamic Range:	10 mA/m to 2 A/m at 1 GHz (M3 or better device readings fall well below diode compression point)
Dimensions:	Overall length: 330 mm (Tip: 40 mm) Tip diameter: 6 mm (Body: 12 mm) Distance from probe tip to dipole centers: 3 mm
E-Field Interference:	< 10% at 3 GHz (for plane wave)





**Figure 5**  
H-Field Free-space Probe

### Probe Tip Description

HAC field measurements take place in the close near field with high gradients. Increasing the measuring distance from the source will generally decrease the measured field values (in case of the validation dipole approx. 10% per mm).

Magnetic field sensors are measuring the integral of the H-field across their sensor area surrounded by the loop. They are calibrated in a precise, homogeneous field. When measuring a gradient field, the result will be very close to the field in the center of the loop which is equivalent to the value of a homogeneous field equivalent to the center value. But it will be different from the field at the border of the loop.

PCTEST™ HAC REPORT	 PCTEST	FCC MEASUREMENT REPORT	 CURITEL	Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 6 of 63

Consequently, two sensors with different loop diameters - both calibrated ideally - would give different results when measuring from the edge of the probe sensor elements. The behavior for electrically small E-field sensors is equivalent.


The magnetic field loops of our H3D probes are concentric, with the center 3mm from the tip for H3DV6. Their radius is 1.9mm.



The electric field probes have a more irregular internal geometry because it is physically not possible to have the 3 orthogonal sensors situated with the same center. The effect of the different sensor centers is accounted for in our HAC uncertainty budget ("sensor displacement"). Their geometric center is at 2.5mm from the tip, and the element ends are 1.1mm closer to the tip.

### Probe Response to Frequency

The E-field sensors have inherently a very flat frequency response. They are calibrated with a number of frequencies resulting in a common calibration factor, with the frequency behavior documented in the calibration certificate (See also below).

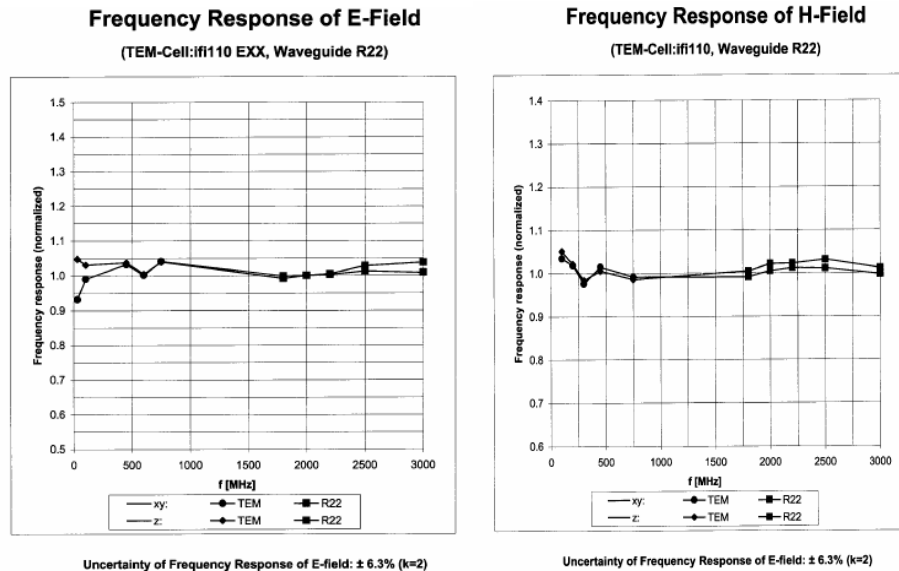H-field sensors have a frequency dependent sensitivity which is evaluated for a series of frequencies also visible in the specific certificate. The calibration factors result from a fitting algorithm. The proper conversion is calculated by the DASY4 software depending on the frequency setting in the procedure.



PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 7 of 63



## SPEAG Robotic System

E-field and H-field measurements are performed using the DASY4 automated dosimetric assessment system. The DASY4 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, Pentium 4 computer, near-field probe, probe alignment sensor, and the HAC phantom. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF).





**Figure 6**  
SPEAG Robotic System



**Figure 7**  
PCTEST Lab Acoustics Facility

## System Hardware


A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the Gateway Pentium 4 2.53 GHz computer with Windows XP system and RF Measurement Software DASY4 v4.5 (with HAC Extension), A/D interface card, monitor, mouse, and keyboard. The Staubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 8 of 63





## System Electronics

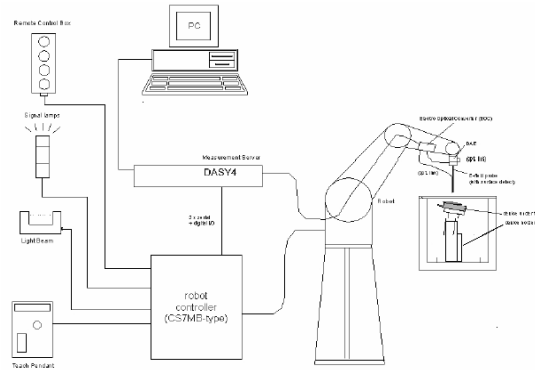The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.



**Figure 8**  
SPEAG Robotic System Diagram

PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 9 of 63

## DASY4 Instrumentation Chain

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i} \quad (20.1)$$

with  $V_i$  = compensated signal of channel i (i = x, y, z)  
 $U_i$  = input signal of channel i (i = x, y, z)  
 $cf$  = crest factor of exciting field (DASY parameter)  
 $dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E - fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$\text{H - fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with  $V_i$  = compensated signal of channel i (i = x, y, z)  
 $Norm_i$  = sensor sensitivity of channel i (i = x, y, z)  
 $\mu\text{V}/(\text{V/m})^2$  for E-field Probes  
 $ConvF$  = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 $f$  = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in V/m  
 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):



$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2} \quad (20.2)$$

The primary field data are used to calculate the derived field units.

The measurement/integration time per point, as specified by the system manufacturer is >500 ms.

The signal response time is evaluated as the time required by the system to reach 90% of the expected final value after an on/off switch of the power source with an integration time of 500 ms and a probe response time of <5 ms. In the current implementation, DASY4 waits longer than 100 ms after having reached the grid point before starting a measurement, i.e., the response time uncertainty is negligible.


If the device under test does not emit a CW signal, the integration time applied to measure the electric field at a specific point may introduce additional uncertainties due to the discretization. The tolerances for the different systems had the worst-case of 2.6%.



PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 10 of 63

## 5. TEST PROCEDURE

### I. RF EMISSIONS

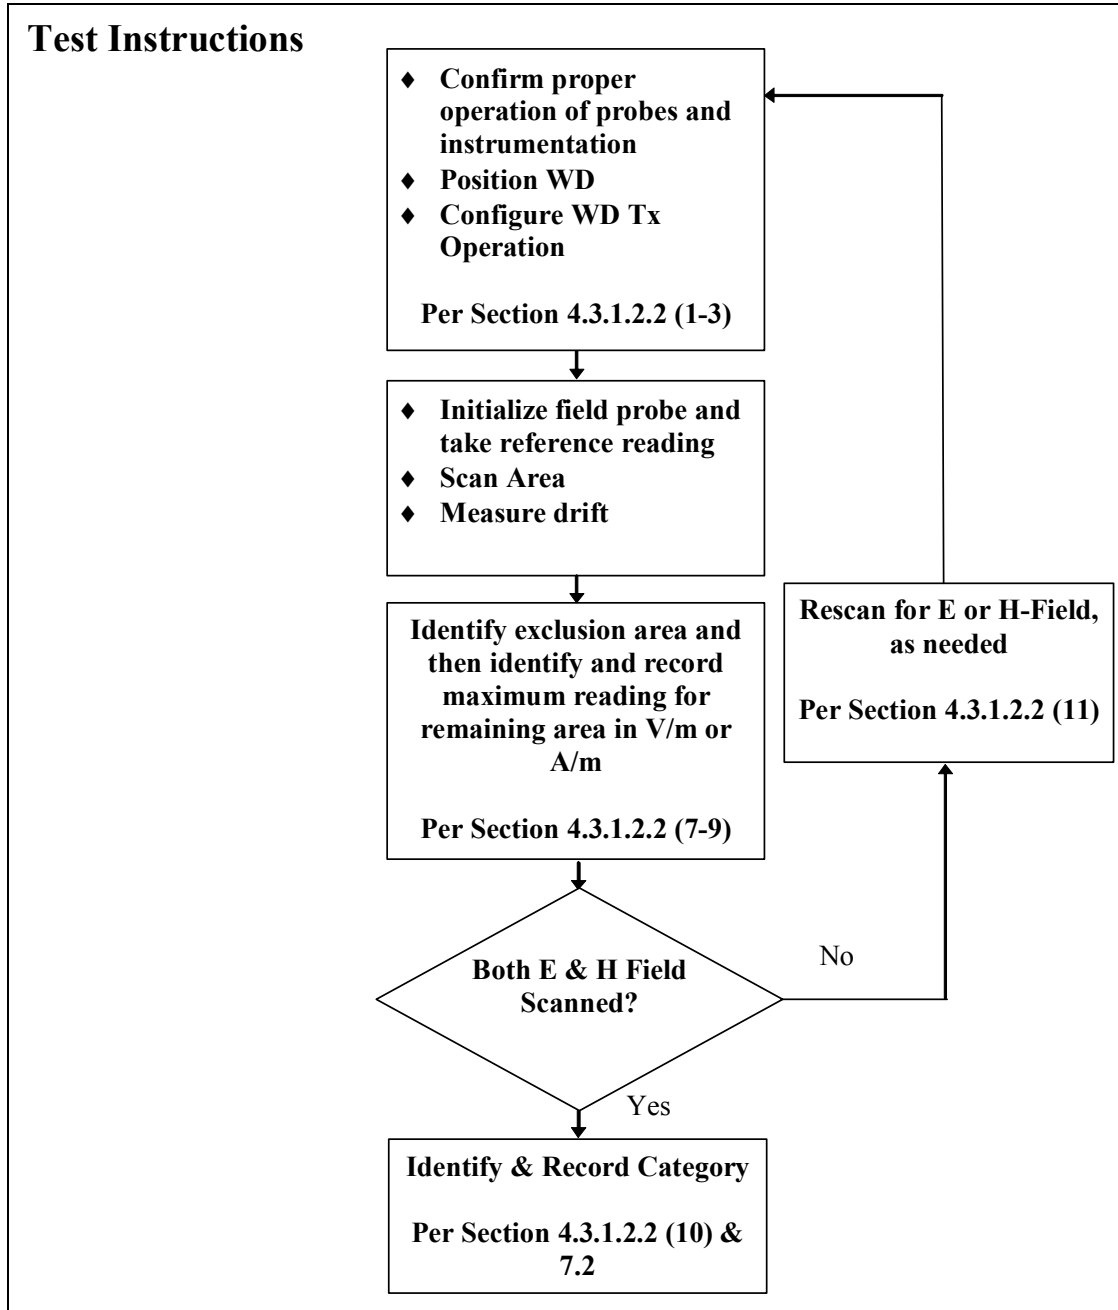Per PC63.19-2005:




PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 11 of 63

## Test Setup



**Figure 9**

E/H-Field Emissions Test Setup Diagram

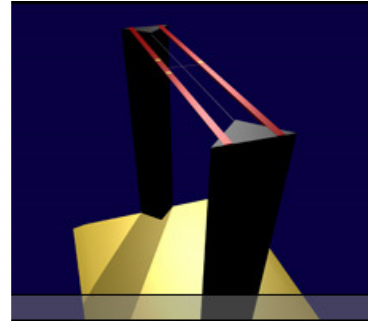



**Figure 10**  
HAC Phantom

## RF Emissions Test Procedure:

The following illustrate a typical RF emissions test scan over a wireless communications device:

1. Proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed.
2. WD is positioned in its intended test position, acoustic output point perpendicular to the field probe.
3. The WD operation for maximum rated RF output power was configured and confirmed with the base station simulator, at the test channel and other normal operating parameters as intended for the test. The battery was ensured to be fully charged before each test.
4. The center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The WD audio output was positioned tangent (as physically possible) to the measurement plane.
5. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the HAC Phantom.
6. The measurement system measured the field strength at the reference location.
7. Measurements at 2mm increments in the 5 x 5 cm region were performed and recorded. A 360° rotation about the azimuth axis at the maximum interpolated position was measured. For the worst-case condition, the peak reading from this rotation was used in re-evaluating the HAC category.
8. The system performed a drift evaluation by measuring the field at the reference location.
9. Steps 1-8 were done for both the E and H-Field measurements.

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 12 of 63

## 6. ANSI/IEEE PC63.19 PERFORMANCE CATEGORIES

### I. RF EMISSIONS

The ANSI Standard presents performance requirements for acceptable interoperability of hearing aids with wireless communications devices. When these parameters are met, a hearing aid operates acceptably in close proximity to a wireless communications device.

Category	Hearing aid RF Parameters		Telephone RF Parameters	
	Near field Category	E-field immunity CW dB(V/m)	H-field immunity CW dB(A/m)	E-field emissions CW dB(V/m)
M1	30.0 to 35.0	-23.0 to -18.0	46-51 + 0.5 x AWF	-4.4 to 0.6 +0.5 x AWF
M2	35.0 to 40.0	-18.0 to -13.0	41-46 + 0.5 x AWF	-9.4 to -4.4 +0.5 x AWF
M3	40.0 to 45.0	-13.0 to -8.0	36-41 + 0.5 x AWF	-14.4 to -9.4 +0.5 x AWF
M4	> 45.0	> -8.0	< 36 + 0.5 x AWF	< -14.4 + 0.5 x AWF

Table 6.1



Hearing aid and WD near-field categories as defined in draft ANSI PC63.19. During testing, the hearing aid must maintain an input-referenced interference level of less than 55 dB and a gain compression of less than 6 dB.

### II. Articulation Weighing Factor (AWF)

Standard	Technology	Articulation Weighing Factor (AWF)
T1/T1P1/3GPP	UMTS (WCDMA)	0
IS-95	CDMA	0
iDEN™	TDMA (22 and 11 Hz)	0
J-STD-007	GSM (217 Hz)	-5

Table 6.2

AWF has been developed from information presented to the committee regarding the interference potential of the various modulation types according to ANSI PC63.19


PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 13 of 63

## 7. SYSTEM CHECK

### I. System Check Parameters

The input signal was an unmodulated continuous wave. The following points were taken into consideration in performing this check:

- Average Input Power  $P = 100\text{mW RMS}$  ( $20\text{dBm RMS}$ ) after adjustment for return loss
- The test fixture must meet the 2 wavelength separation criterion
- The proper measurement of the 1 cm probe to dipole separation, which is measured from top surface of the dipole to the calibration reference point of the sensor, defined by the probe manufacturer is shown in the following diagram:

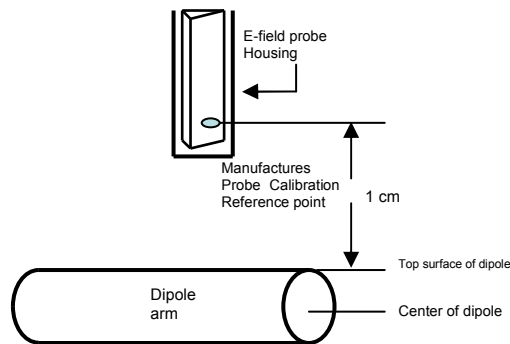

**Figure 11**  
Separation Distance from Dipole to Field Probe

RF power was recorded using both an average reading meter and a peak reading meter. Readings of the probe are provided by the measurement system.

To assure proper operation of the near-field measurement probe the input power to the dipole shall be commensurate with the full rated output power of the wireless device (e.g. - for a cellular phone wireless device the average peak antenna input power will be on the order of  $100\text{mW}$  (i.e. -  $20\text{dBm}$ ) RMS after adjustment for any mismatch.



### II. Validation Procedure

A dipole antenna meeting the requirements given in PC63.19 was placed in the position normally occupied by the WD.

The length of the dipole was scanned with both E-field and H-field probes and the maximum values for each were recorded.


#### Measurement of CW

Using the near-field measurement system, scan the antenna over the radiating dipole and record the greatest field reading observed. Due to the nature of E-fields about freespace dipoles, the two E-field peaks measured over the dipole are averaged to compensate for non-parallelity of the setup (


PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 14 of 63

see manufacturer method on dipole calibration certificates, page 2. Field strength measurements shall be made only when the probe is stationary.

RF power was recorded using both an average and a peak power reading meter.

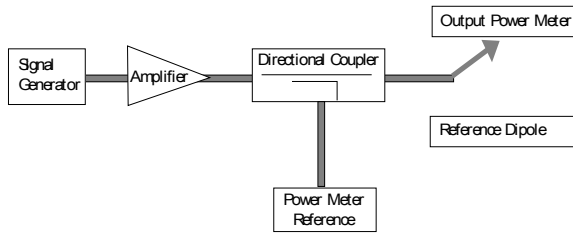

**Figure 12**  
Setup for Desired Output Power to Dipole

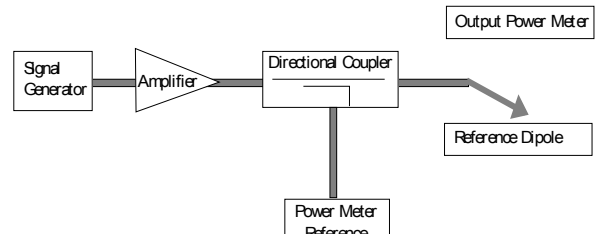

**Figure 13**  
Setup to Dipole


Using this setup configuration, the signal generator was adjusted for the desired output power (100mW) at a specified frequency. The reference power from the coupled port of the directional coupler is recorded.

Next, the output cable is connected to the reference dipole, as shown in Figure Figure 13



The input signal level was adjusted until the reference power from the coupled port of the directional coupler was the same as previously recorded, to compensate for the impedance mismatch between the output cable and the reference dipole.

To assure proper operation of the near-field measurement probe the input power to the reference dipole was verified to the full rated output power of the wireless device. The dipole was secured in a holder in a manner to meet the 20 dB reflection. The near-field measurement probe was positioned over the dipole.

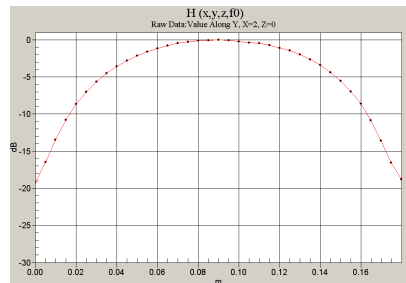
The antenna was scanned over the appropriate sized area to cover the dipole from end to end. SPEAG uses 2D interpolation algorithms between the measured points. Please see below two dimensional plots showing that the interpolated values interpolate smoothly between 5mm steps for a free-space RF dipole:



**Figure 14**  
2-D Raw Data from scan along dipole axis

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 15 of 63



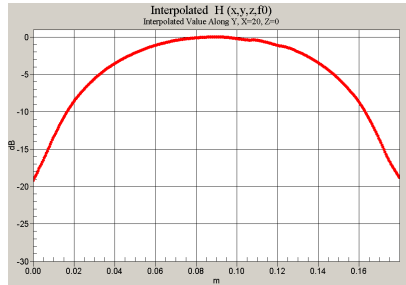


**Figure 15**  
2-D Interpolated points from scan along dipole axis

### III. System Check Results

Frequency (MHz)	Signal Type	Peak Input Power (W)	E-field Result (V/m)	Target Field (A/m)	% Deviation
835	CW	0.100	203.4	185.1	9.9%
835	80% AM	0.100	134.9		
835	CDMA	0.100	201.4		
1880	CW	0.100	144.2	145.8	-1.1%
1880	80% AM	0.100	92.5		
1880	CDMA	0.100	143.4		

Frequency (MHz)	Signal Type	Peak Input Power (W)	H-field Result (A/m)	Target Field (A/m)	% Deviation
835	CW	0.100	0.495	0.470	5.3%
835	80% AM	0.100	0.333		
835	CDMA	0.100	0.496		
1880	CW	0.100	0.443	0.450	-1.6%
1880	80% AM	0.100	0.283		
1880	CDMA	0.100	0.440		

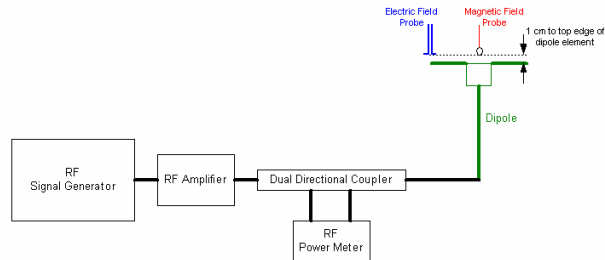

**Figure 16**  
System Check Setup


PCTEST™ HAC REPORT	PCTEST	FCC MEASUREMENT REPORT	CURITEL	Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 16 of 63

## 8. MODULATION FACTOR


A calibration was made of the modulation response of the probe and its instrumentation chain. This calibration was performed with the field probe, attached to its instrumentation. The response of the probe system to a CW field at the frequency(s) of interest is compared to its response to a modulated signal with equal peak amplitude to that of a CW signal. The field level of the test signals are ensured to be more than 10 dB above the ambient level and the noise floor of the instrumentation being used. The ratio of the CW reading to that taken with a modulated field were applied to the readings taken of modulated fields of the specified type.

**This was done using the following procedure:**

1. The probe was fixed close to the field maxima of the reference dipole antenna, as illustrated in Figure 17.
2. The probe was illuminated with a CW signal at the intended measurement frequency.
3. The reading of the probe measurement system of the CW signal was recorded.
4. Using a Spectrum Analyzer, the level of the CW signal being used to drive the field generating device was determined (See below plot).

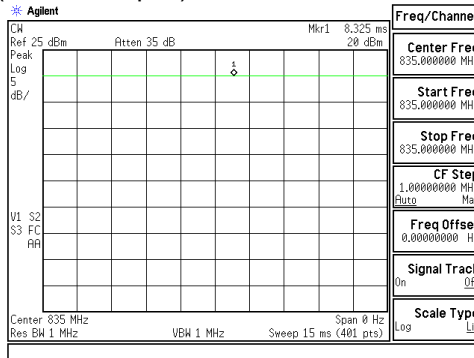

5. A modulated signal was substituted using a signal generator in place of the CW signal. The peak amplitude during transmission was adjusted to equal the amplitude of the CW signal on the Spectrum Analyzer. (See below plot)

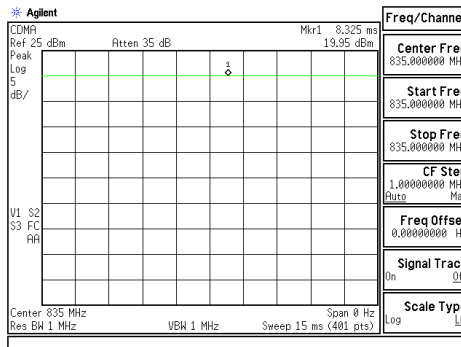

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 17 of 63

6. The reading of the probe measurement system was recorded with the modulated signal.

7. The ratio of the CW reading to modulated signal reading is the probe modulation factor (PMF).

The modulation factors obtained were applied to readings taken of the actual wireless device, in order to obtain an accurate peak field reading using the formula:



$$\text{Peak} = 20 \cdot \log (\text{Raw} \cdot \text{PMF})$$

This method correlates well with the modulation using the DUT in the alternative substitution method.

**Modulation Factors:**

f (MHz)	Protocol	Peak Power (dBm)	Ave. E-Field (V/m)	Avg. H-Field (A/m)	E-Field Modulation Factor	H-Field Modulation Factor
835	CDMA	20	181.2	0.463	1.00	1.01
835	CW	20	181.8	0.468		
1880	CDMA	20	140.1	0.447	1.00	1.00
1880	CW	20	139.9	0.446		

**Figure 17**  
Modulation Factors

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 18 of 63

## 9. OVERALL MEASUREMENT SUMMARY

FCC ID:	PP4TX-210
Model:	TX-210
S/N:	#2



### I. E-FIELD EMISSIONS:

**Table 1**  
**HAC Data Summary for E-field**

Mode	Channel	Backlight	Antenna	Conducted Power at BS (dBm)	Measured Drift (%)	Time Avg. Field (V/m)	Peak Field (dBV/m)	Limit (dBV/m)	FCC MARGIN (dB)	RESULT
<b>E-field Emissions</b>										
CDMA	1013	ON	In	25.3	-4.5%	47.70	33.6	41.0	-7.40	M4
CDMA	384	ON	In	25.0	-2.3%	28.26	29.1	41.0	-11.95	M4
CDMA	777	ON	In	25.2	1.5%	39.31	31.9	41.0	-9.08	M4
PCS	25	ON	In	25.4	1.2%	40.78	32.2	41.0	-8.80	M4
PCS	600	ON	In	25.3	-2.0%	22.59	27.1	41.0	-13.93	M4
PCS	1175	ON	In	25.3	-2.9%	33.17	30.4	41.0	-10.60	M4
CDMA	1013	ON	Out	25.3	-3.0%	53.97	34.7	41.0	-6.33	M4
CDMA	384	ON	Out	25.0	-0.4%	32.57	30.3	41.0	-10.71	M4
CDMA	777	ON	Out	25.2	-1.1%	41.47	32.4	41.0	-8.62	M4
PCS	25	ON	Out	25.4	-3.3%	70.90	37.0	41.0	-3.96	M3
PCS	600	ON	Out	25.3	-3.5%	57.39	35.2	41.0	-5.79	M4
PCS	1175	ON	Out	25.3	-4.4%	62.38	35.9	41.0	-5.07	M4
PCS	25	OFF	Out	25.4	-4.8%	70.33	37.0	41.0	-4.03	M3



**Figure 18**  
Sample E-field Scan Overlay

PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 19 of 63

FCC ID:	PP4TX-210
Model:	TX-210
S/N:	#2



## II. H-FIELD EMISSIONS:

**Table 2  
HAC Data Summary for H-field**

Mode	Channel	Backlight	Antenna	Conducted Power at BS (dBm)	Measured Drift (%)	Time Avg. Field (A/m)	Peak Field (dBA/m)	Limit (dBA/m)	FCC MARGIN (dB)	RESULT
<b>H-field Emissions</b>										
CDMA	1013	ON	In	25.3	-0.7%	0.118	-18.5	-9.4	-9.08	M4
CDMA	384	ON	In	25.0	1.7%	0.069	-23.1	-9.4	-13.73	M4
CDMA	777	ON	In	25.2	-4.3%	0.093	-20.6	-9.4	-11.17	M4
PCS	25	ON	In	25.4	-4.3%	0.140	-17.1	-9.4	-7.71	M4
PCS	600	ON	In	25.3	-3.0%	0.070	-23.1	-9.4	-13.70	M4
PCS	1175	ON	In	25.3	-0.9%	0.082	-21.8	-9.4	-12.40	M4
CDMA	1013	ON	Out	25.3	-2.1%	0.088	-21.0	-9.4	-11.58	M4
CDMA	384	ON	Out	25.0	-2.0%	0.186	-14.5	-9.4	-5.10	M4
CDMA	777	ON	Out	25.2	-4.4%	0.118	-18.5	-9.4	-9.09	M4
PCS	25	ON	Out	25.4	-3.8%	0.111	-19.1	-9.4	-9.71	M4
PCS	600	ON	Out	25.3	2.3%	0.103	-19.7	-9.4	-10.34	M4
PCS	1175	ON	Out	25.3	0.3%	0.126	-18.0	-9.4	-8.64	M4



**Figure 19**  
Sample H-field Scan Overlay


PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 20 of 63

FCC ID:	PP4TX-210
Model:	TX-210
S/N:	#2

### III. Worst-case Configuration Evaluation



**Table 3**  
**Peak Reading from 360° Probe Rotation at Azimuth axis**

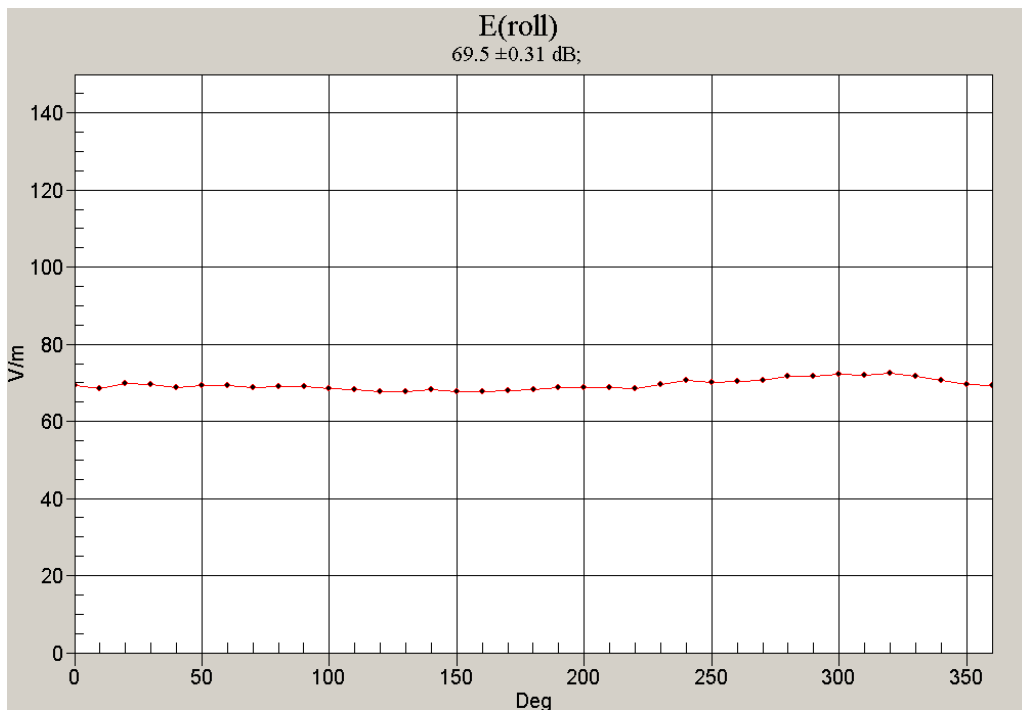Mode	Channel	Backlight	Antenna	Conducted Power at BS (dBm)	Measured Drift (%)	Time Avg. Field (V/m)	Peak Field (dBV/m)	Limit (dBV/m)	FCC MARGIN (dB)	RESULT
<b>Probe Rotation</b>										
PCS	25	ON	Out	25.4	-3.3%	72.47	37.2	41.0	-3.77	M3



**Figure 20**  
**Worst-Case Probe Rotation about Azimuth axis**

\* Note: Location of worst-case configuration probe rotation is illustrated in Figure 18 or Figure 19



PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 21 of 63

## 10. EQUIPMENT LIST

Manufacturer	Make / Equipment	Calibration Due	Asset No.
HP	437B Power Meter	May 2006	3125U24437
Amplifier Research	5S1G4 (5W, 800MHz-4.2GHz)	January 2006	22322
Gigatronics	80701A (0.05-18GHz) Power Sensor	April 2006	1833460
HP	8482H (30mW-3W) Power Sensor	February 2006	2237A02084
HP	8594A Spectrum Analyzer	February 2006	3051A00187
Gigatronics	8657A Universal Power Meter	April 2006	1835256
HP	8753E (30kHz-6GHz) Network Analyzer	February 2006	JP38020182
Agilent	8960 Base Station Simulator	January 2006	PCT080
Agilent	Base Station Simulator	May 2006	661
Rohde & Schwarz	CMD80 Base Station Simulator	June 2006	830805/005
Rohde & Schwarz	CMU200 Base Station Simulator	November 2005	650378
Agilent	ESG-D Signal Generator	October 2005	
Optix	Fiber-Optic Line	N/A	
SPEAG	Freespace 1880 MHz Dipole	February 2007	1002
SPEAG	Freespace 1900 MHz Dipole	February 2007	1002
SPEAG	Freespace 2450 MHz Dipole	February 2007	1004
SPEAG	Freespace H-field Probe	October 2005	6180
SPEAG	Freespace E-field Probe	January 2006	2332
Bruel & Kjaer	HATS System	December 2005	687
Hosa	High Precision TRS Cable	N/A	
EMCO	Model 3115 (1-18GHz) Horn Antenna	October 2006	9203-2178
EMCO	Model 3115 (1-18GHz) Horn Antenna	October 2006	9704-5182
Rohde & Schwarz	NRVS Power Meter	June 2006	
RF Lindgren Model 26-2/2-0	Shielded Screen Room	N/A	6710 (PCT270)
MicroCoax	(1.0-26.5GHz) Microwave Cables	N/A	N/A
HP	8648D (9kHz-4GHz) Signal Generator	October 2005	3613A00315
Rohde & Schwarz	(0.1-1000MHz) Signal Generator	September 2005	894215/012
Ray Proof Model S81	Shielded Semi-Anechoic Chamber	N/A	R2437 (PCT278)
Narda	3020A (50-1000MHz) Bi-Directional Coax Coupler	January 2006	
HP	8901A Modulation Analyzer	January 2006	2432A03467
HP	8903B Audio Analyzer	January 2006	3011A09025

**Table 4**  
Equipment List

\*Calibration traceable to the National Institute of Standards and Technology (NIST).

PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 22 of 63



## 11. MEASUREMENT UNCERTAINTY



Wireless Communications Device Near-Field Measurement						
Uncertainty Estimation						
Uncertainty Component	Data (dB)	Data Type	Prob. Dist.	Divisor	Unc. (dB)	Notes/Comments
<b>Measurement System</b>						
RF System Reflections	0.50	Tolerance	R	1.73	0.30	* Refl. < -20 dB
RF Ambient Conditions	0.20	Tolerance	R	1.73	0.12	
Field Probe Conversion Factor	0.42	Tolerance	R	1.73	0.25	
Field Probe Isotropy	0.11	Tolerance	R	1.73	0.06	
Field Probe Frequency Response	0.135	Tolerance	R	1.73	0.08	
Field Probe Linearity	0.025	Tolerance	R	1.73	0.01	
Boundary Effects	0.105	Accuracy	R	1.73	0.06	
Sensor Displacement	0.66	Accuracy	R	1.73	0.39	*
Probe Positioning Accuracy	0.20	Accuracy	R	1.73	0.12	*
Probe Positioner	0.050	Accuracy	R	1.73	0.03	*
Extrapolation/Interpolation	0.045	Tolerance	R	1.73	0.03	*
System Detection Limit	0.05	Tolerance	R	1.73	0.03	*
Readout Electronics	0.015	Tolerance	N	1.00	0.02	*
Integration Time	0.11	Tolerance	R	1.73	0.06	*
Response Time	0.033	Tolerance	R	1.73	0.02	*
Phantom Thickness	0.10	Tolerance	R	1.73	0.06	*
<b>Test Sample Related</b>						
Device Positioning Vertical	0.4	Tolerance	R	1.73	0.24	*
Device Positioning Lateral	0.045	Tolerance	N	1	0.05	*
Device Holder and Phantom	0.1	Tolerance	R	1.73	0.06	*
Power Drift	0.21	Tolerance	N	1	0.21	
<i>Combined Standard Uncertainty (k=1)</i>					0.65	16.1%
<i>Expanded Uncertainty [95% confidence]</i>					1.30	32.3%

**Table 5**  
Uncertainty Estimation Table

Notes:



1. Test equipment are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297. All equipment have traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.
2. \* Uncertainty specifications from Schmidt & Partner Engineering AG (not site specific)

Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid immunity tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 23 of 63

## 12. TEST DATA

See following Attached Pages for Test Data.

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 24 of 63

  
**PCTEST Hearing-Aid Compatibility Facility**

**DUT: HAC Dipole 835 MHz**  
 Type: CD835V3  
 Serial: 1003

Communication System: CW; Frequency: 835 MHz;

Measurement Standard: DASy4 (High Precision Assessment)


DASy4 Configuration:



- Probe: ER3DV6 - SN2332; Calibrated: 1/31/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn637; Calibrated: 9/22/2004
- Phantom: HAC Phantom; Type: SD HAC P01 BA;
- Measurement SW: DASy4, V4.5 Build 19;

**CW/Hearing Aid Compatibility Test (41x361x1):** Measurement grid: dx=5mm, dy=5mm  
 Maximum value of Total field (slot averaged) = 209.3 V/m  
**Hearing Aid Near-Field Category: M1 (AWF 0 dB)**

E in V/m (Time averaged)			E in V/m (Slot averaged)		
Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
185.4	197.4	190.3	185.4	197.4	190.3
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
101.9	106.0	101.7	101.9	106.0	101.7
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
197.1	209.3	198.2	197.1	209.3	198.2

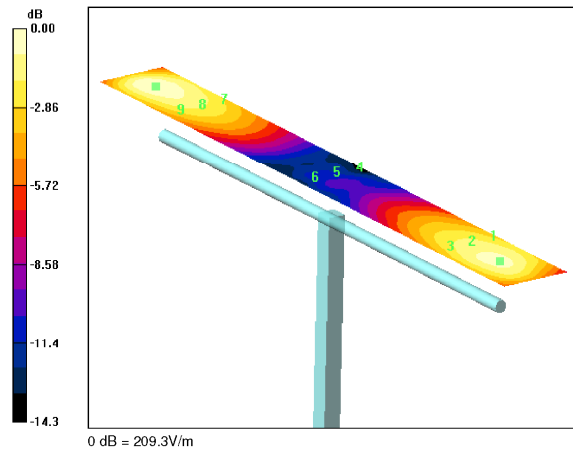Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15



<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 25 of 63

  
**PCTEST Hearing-Aid Compatibility Facility**

**DUT: HAC Dipole 1900 MHz**  
 Type: CD1880V3  
 Serial: 1002

**Communication System: CW; Frequency: 1880 MHz;**

Measurement Standard: DASy4 (High Precision Assessment)


DASy4 Configuration:



- Probe: ER3DV6 - SN2332; Calibrated: 1/31/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn637; Calibrated: 9/22/2004
- Phantom: HAC Phantom; Type: SD HAC P01 BA;
- Measurement SW: DASy4, V4.5 Build 19;

**CW/Hearing Aid Compatibility Test (41x181x1):** Measurement grid: dx=5mm, dy=5mm  
 Maximum value of Total field (slot averaged) = 149.3 V/m  
**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

E in V/m (Time averaged)			E in V/m (Slot averaged)		
Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
<b>134.1</b>	<b>139.7</b>	<b>135.4</b>	<b>134.1</b>	<b>139.7</b>	<b>135.4</b>
Grid 4	<b>Grid 5</b>	Grid 6	Grid 4	<b>Grid 5</b>	Grid 6
<b>97.4</b>	<b>100.1</b>	<b>96.7</b>	<b>97.4</b>	<b>100.1</b>	<b>96.7</b>
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
<b>142.4</b>	<b>149.3</b>	<b>143.8</b>	<b>142.4</b>	<b>149.3</b>	<b>143.8</b>

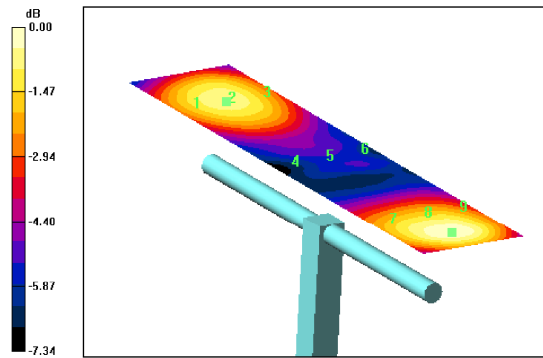Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15



<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 26 of 63

**PCTEST**  
w i r e l e s s  
PCTEST Hearing-Aid Compatibility Facility

**DUT: HAC Dipole 835 MHz**  
Type: CD835V3  
Serial: 1003

Communication System: CW; Frequency: 835 MHz;

Measurement Standard: DASY4 (High Precision Assessment)


DASY4 Configuration:

- Probe: H3DV6 - SN6180; Calibrated: 10/6/2004
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn637; Calibrated: 9/22/2004
- Phantom: HAC Phantom; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.5 Build 19;

**CW/Hearing Aid Compatibility Test (41x361x1):** Measurement grid: dx=5mm, dy=5mm  
Maximum value of Total field (slot averaged) = 0.495 A/m  
**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

H in A/m (Time averaged)			H in A/m (Slot averaged)		
Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
0.409	0.444	0.429	0.409	0.444	0.429
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
0.468	0.495	0.467	0.468	0.495	0.467
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
0.416	0.442	0.414	0.416	0.442	0.414

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

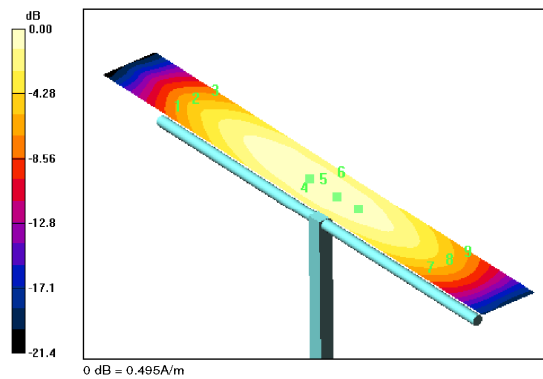

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 27 of 63

  
**PCTEST Hearing-Aid Compatibility Facility**

**DUT: HAC Dipole 1900 MHz**  
 Type: CD1880V3  
 Serial: 1002

**Communication System: CW; Frequency: 1880 MHz;**

Measurement Standard: DASy4 (High Precision Assessment)


DASy4 Configuration:



- Probe: H3DV6 - SN6180; Calibrated: 10/6/2004
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn637; Calibrated: 9/22/2004
- Phantom: HAC Phantom; Type: SD HAC P01 BA;
- Measurement SW: DASy4, V4.5 Build 19;

**CW/Hearing Aid Compatibility Test (41x181x1):** Measurement grid: dx=5mm, dy=5mm  
 Maximum value of Total field (slot averaged) = 0.443 A/m  
**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

H in A/m (Time averaged)			H in A/m (Slot averaged)		
Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
0.372	0.395	0.375	0.372	0.395	0.375
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
0.420	0.443	0.421	0.420	0.443	0.421
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
0.388	0.403	0.382	0.388	0.403	0.382

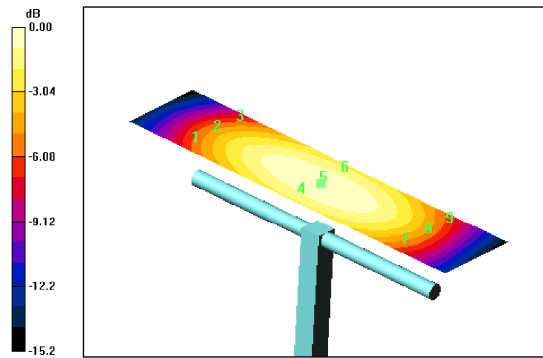Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15



<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 28 of 63

  
**PCTEST Hearing-Aid Compatibility Facility**

**DUT: HAC Dipole 835 MHz**  
 Type: CD835V3  
 Serial: 1003

**Communication System: CDMA; Frequency: 835 MHz;**

Measurement Standard: DAS4 (High Precision Assessment)


DAS4 Configuration:



- Probe: ER3DV6 - SN2332; Calibrated: 1/31/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn637; Calibrated: 9/22/2004
- Phantom: HAC Phantom, Type: SD HAC.P01 BA;
- Measurement SW: DAS4, V4.5 Build 19;

**CDMA/Hearing Aid Compatibility Test (41x361x1):** Measurement grid: dx=5mm, dy=5mm  
 Maximum value of Total field (slot averaged) = 205.3 V/m  
**Hearing Aid Near-Field Category: M1 (AWF 0 dB)**

E in V/m (Time averaged)			E in V/m (Slot averaged)		
Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
187.8	197.4	190.1	187.8	197.4	190.1
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
101.9	105.7	101.8	101.9	105.7	101.8
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
196.5	205.3	196.2	196.5	205.3	196.2

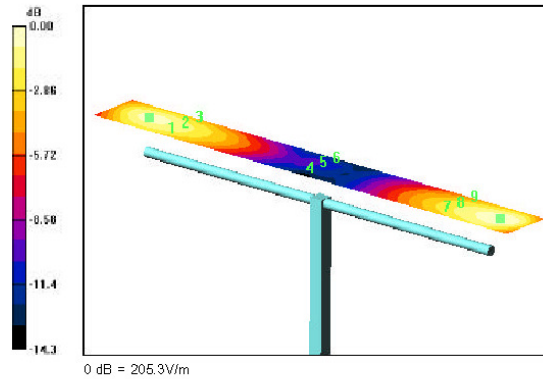Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15



<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 29 of 63



  
**PCTEST Hearing-Aid Compatibility Facility**

**DUT: HAC Dipole 1900 MHz**  
 Type: CD1880V3  
 Serial: 1002

**Communication System: CDMA; Frequency: 1880 MHz;**

Measurement Standard: DASy4 (High Precision Assessment)


DASy4 Configuration:

- Probe: ER3DV6 - SN2332; Calibrated: 1/31/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn637; Calibrated: 9/22/2004
- Phantom: HAC Phantom; Type: SD HAC P01 BA;
- Measurement SW: DASy4, V4.5 Build 19;



**CDMA/Hearing Aid Compatibility Test (41x181x1):** Measurement grid: dx=5mm, dy=5mm  
 Maximum value of Total field (slot averaged) = 143.4 V/m  
**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

E in V/m (Time averaged)			E in V/m (Slot averaged)		
Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
<b>134.1</b>	<b>139.7</b>	<b>135.4</b>	<b>134.1</b>	<b>139.7</b>	<b>135.4</b>
Grid 4	<b>Grid 5</b>	Grid 6	Grid 4	<b>Grid 5</b>	Grid 6
<b>97.5</b>	<b>100.1</b>	<b>97.1</b>	<b>97.5</b>	<b>100.1</b>	<b>97.1</b>
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
<b>140.2</b>	<b>147.1</b>	<b>140.6</b>	<b>140.2</b>	<b>147.1</b>	<b>140.6</b>

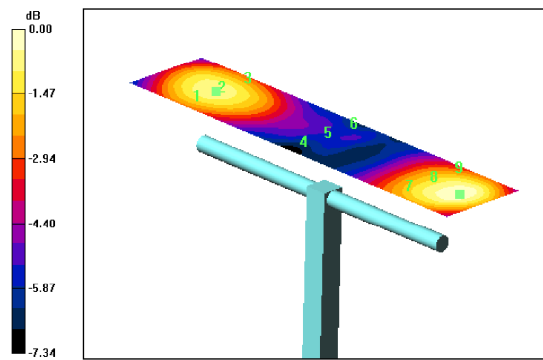Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15



0 dB = 147.1V/m

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 30 of 63

  
**PCTEST Hearing-Aid Compatibility Facility**

**DUT: HAC Dipole 835 MHz**  
 Type: CD835V3  
 Serial: 1003

Communication System: CDMA; Frequency: 835 MHz;

Measurement Standard: DASy4 (High Precision Assessment)


DASy4 Configuration:



- Probe: H3DV6 - SN6180; Calibrated: 10/6/2004
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn637; Calibrated: 9/22/2004
- Phantom: HAC Phantom; Type: SD HAC P01 BA;
- Measurement SW: DASy4, V4.5 Build 19;

**CDMA/Hearing Aid Compatibility Test (41X361X1):** Measurement grid: dx=5mm, dy=5mm  
 Maximum value of Total field (slot averaged) = 0.496 A/m  
**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

H in A/m (Time averaged)			H in A/m (Slot averaged)		
Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
<b>0.410</b>	<b>0.443</b>	<b>0.417</b>	<b>0.410</b>	<b>0.443</b>	<b>0.417</b>
Grid 4	<b>Grid 5</b>	Grid 6	Grid 4	<b>Grid 5</b>	Grid 6
<b>0.469</b>	<b>0.496</b>	<b>0.467</b>	<b>0.469</b>	<b>0.496</b>	<b>0.467</b>
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
<b>0.416</b>	<b>0.442</b>	<b>0.412</b>	<b>0.416</b>	<b>0.442</b>	<b>0.412</b>

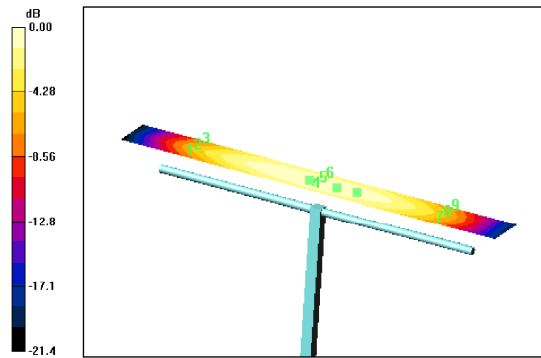Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15



<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 31 of 63

  
**PCTEST Hearing-Aid Compatibility Facility**

**DUT: HAC Dipole 1900 MHz**  
 Type: CD1880V3  
 Serial: 1002

**Communication System: CDMA; Frequency: 1880 MHz;**

Measurement Standard: DASy4 (High Precision Assessment)


DASy4 Configuration:



- Probe: H3DV6 - SN6180; Calibrated: 10/6/2004
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn637; Calibrated: 9/22/2004
- Phantom: HAC Phantom; Type: SD HAC P01 BA;
- Measurement SW: DASy4, V4.5 Build 19;

**CDMA/Hearing Aid Compatibility Test (41x181x1):** Measurement grid: dx=5mm, dy=5mm  
 Maximum value of Total field (slot averaged) = 0.440 A/m  
**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

H in A/m (Time averaged)			H in A/m (Slot averaged)		
Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
<b>0.372</b>	<b>0.396</b>	<b>0.370</b>	<b>0.372</b>	<b>0.396</b>	<b>0.370</b>
Grid 4	<b>Grid 5</b>	Grid 6	Grid 4	<b>Grid 5</b>	Grid 6
<b>0.420</b>	<b>0.440</b>	<b>0.421</b>	<b>0.420</b>	<b>0.440</b>	<b>0.421</b>
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
<b>0.389</b>	<b>0.400</b>	<b>0.385</b>	<b>0.389</b>	<b>0.400</b>	<b>0.385</b>

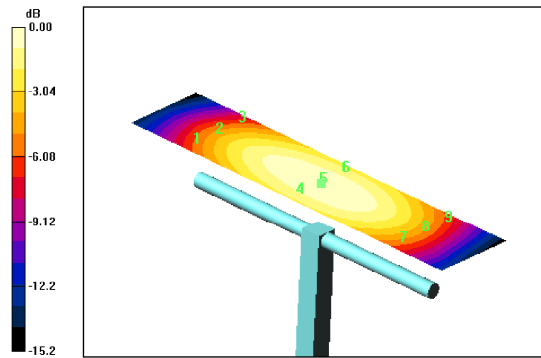Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15



<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 32 of 63



**PCTEST Hearing-Aid Compatibility Facility**

**DUT: HAC Dipole 835 MHz**

Type: CD835V3  
Serial: 1003

**Communication System: 80% AM; Frequency: 835 MHz;**

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: ER3DV6 - SN2332; Calibrated: 1/31/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn637; Calibrated: 3/22/2004
- Phantom: HAC Main; Type: SD HAC P01 BA;
- Measurement SW: DASy4, V4.5 Build 13;


**80%AM/Hearing Aid Compatibility Test (41x361x1):** Measurement grid: dx=5mm, dy=5mm  
Maximum value of Total field (slot averaged) = 195.2 V/m

**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

E in V/m (Time averaged) E in V/m (Slot averaged)

Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
131.0	132.4	113.8	186.2	188.2	161.8
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
73.0	74.0	62.4	103.8	105.2	88.7
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
136.5	137.4	114.2	193.9	195.2	162.3

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

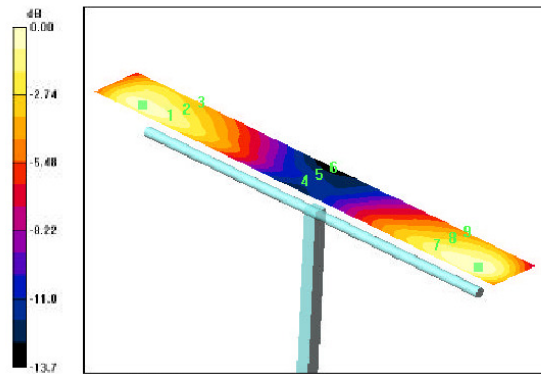

0 dB = 137.4V/m

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 33 of 63



PCTEST Hearing-Aid Compatibility Facility

DUT: HAC Dipole 1900 MHz

Type: CD1880V3

Serial: 1002

Communication System: 80% AM; Frequency: 1880 MHz;

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: ER3DV6 - SN2332; Calibrated: 1/31/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn637; Calibrated: 9/22/2004
- Phantom: HAC Main; Type: SD HAC P01 BA;
- Measurement SW: DASy4, V4.5 Build 19;

80%AM/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm


Maximum value of Total field (slot averaged) = 132.8 V/m

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

E in V/m (Time averaged) E in V/m (Slot averaged)

Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
88.0	91.6	87.9	125.1	130.1	125.0
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
64.8	66.6	64.3	92.1	94.7	91.4
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
87.6	93.4	91.8	124.5	132.8	130.5

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

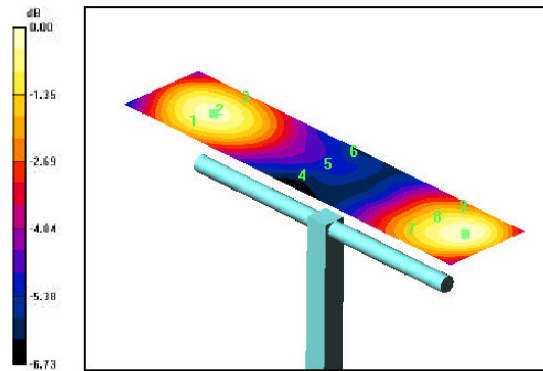

0 dB = 93.4V/m

PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 34 of 63



**PCTEST Hearing-Aid Compatibility Facility**

**DUT: HAC Dipole 835 MHz**

Type: CD835V3  
Serial: 1003

**Communication System: 80% AM; Frequency: 835 MHz;**

Measurement Standard: DAS14 (High Precision Assessment)

DAS14 Configuration:

- Probe: H3DV6 - SN6180; Calibrated: 10/6/2004
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 SN637; Calibrated: 9/22/2004
- Phantom: HAC Main; Type: SD HAC P01 BA;
- Measurement SW: DAS14, V4.5 Build 19;

**80%AM/Hearing Aid Compatibility Test 5 (41x361x1):** Measurement grid: dx=5mm, dy=5mm


Maximum value of Total field (slot averaged) = 0.473 A/m

**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

H in A/m (Time averaged) H in A/m (Slot averaged)

Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
0.277	0.295	0.281	0.393	0.419	0.399
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
0.315	0.333	0.319	0.447	0.473	0.454
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
0.268	0.291	0.282	0.380	0.413	0.401

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

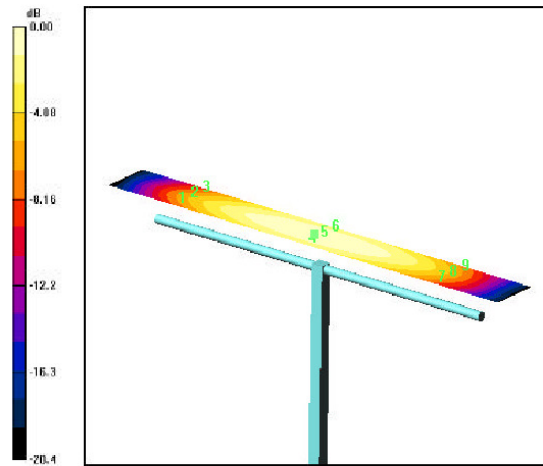

0 dB = 0.333A/m

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 35 of 63



PCTEST Hearing-Aid Compatibility Facility

DUT: HAC Dipole 1900 MHz

Type: CD1880V3  
Serial: 1002

Communication System: 80% AM; Frequency: 1880 MHz;

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:


- Probe: H3DV6 - SN6180; Calibrated: 10/6/2004
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 SN637; Calibrated: 9/22/2004
- Phantom: HAC Main; Type: SD HAC P01 BA;
- Measurement SW: DASy4, V4.5 Build 19;

**80% AM/Hearing Aid Compatibility Test (41x181x1):** Measurement grid: dx=5mm, dy=5mm  
Maximum value of Total field (slot averaged) = 0.402 A/m  
**Hearing Aid Near-Field Category: M2 (AWF 0 dB)**

H in A/m (Time averaged) H in A/m (Slot averaged)

Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
0.231	0.249	0.236	0.328	0.355	0.335
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
0.263	0.283	0.271	0.374	0.402	0.385
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
0.236	0.252	0.243	0.336	0.359	0.346

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

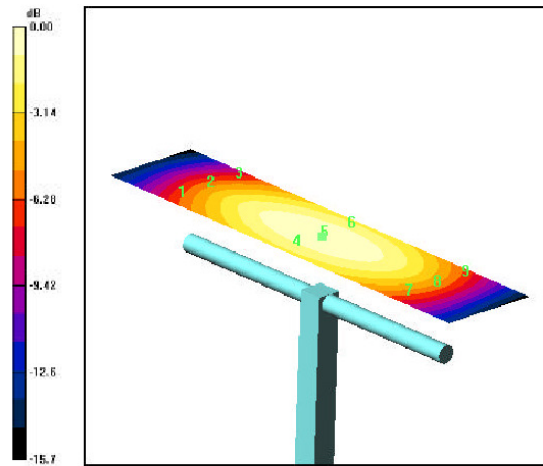

0 dB = 0.283A/m

PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 36 of 63





**PCTEST Hearing-Aid Compatibility Facility**

**DUT: TX-210**

Type: Dual-Band CDMA Phone  
 Serial: #2  
 Backlight on  
 Duty Cycle: 1:1

**Communication System: Cellular CDMA; Frequency: 824.7 MHz;**

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: ER3DV6 - SN2332; Calibrated: 1/31/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn637; Calibrated: 9/22/2004
- Phantom: HAC Phantom; Type: SD HAC P01 BA;
- Measurement SW: DASy4, V4.5 Build 19;


**Ch.1013, Ant In/Hearing Aid Compatibility Test (261x261x1):** Measurement grid: dx=2mm, dy=2mm  
 Maximum value of Total field (slot averaged) = 47.7 V/m

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

E in V/m (Time averaged)    E in V/m (Slot averaged)

Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
41.2	45.5	43.8	41.2	45.5	43.8
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
43.1	47.7	46.7	43.1	47.7	46.7
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
39.9	44.8	44.5	39.9	44.8	44.5

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

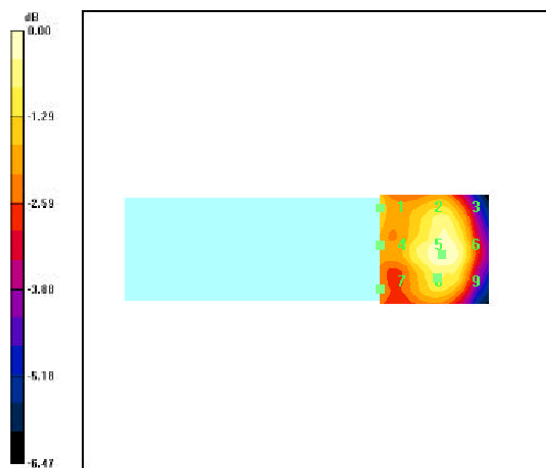

0 dB = 47.7V/m

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 37 of 63



**PCTEST Hearing-Aid Compatibility Facility**

**DUT: TX-210**

Type: Dual-Band CDMA Phone  
 Serial: #2  
 Backlight on  
 Duty Cycle: 1:1

**Communication System: PCS CDMA; Frequency: 1851.25 MHz;**

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:


- Probe: ER3DV6 - SN2332; Calibrated: 1/31/2005
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn637; Calibrated: 9/22/2004
- Phantom: HAC Phantom; Type: SD HAC P01 BA;
- Measurement SW: DASy4, V4.5 Build 19;

**Ch.0025, Ant Out/Hearing Aid Compatibility Test (261x261x1):** Measurement grid: dx=2mm, dy=2mm  
 Maximum value of Total field (slot averaged) = 70.9 V/m  
**Hearing Aid Near-Field Category: M3 (AWF 0 dB)**

E in V/m (Time averaged)    E in V/m (Slot averaged)

Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
46.0	66.8	66.7	46.0	66.8	66.7
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
50.0	70.9	70.3	50.0	70.9	70.3
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
45.1	65.6	65.5	45.1	65.6	65.5

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

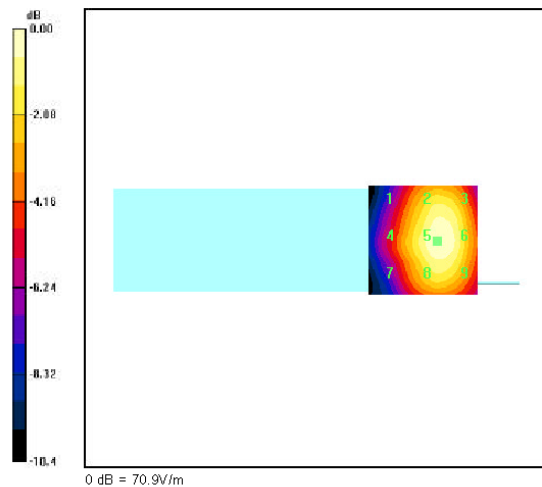

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 38 of 63



**PCTEST Hearing-Aid Compatibility Facility**

**DUT: TX-210**

Type: Dual-Band CDMA Phone  
 Serial: #2  
 Backlight on  
 Duty Cycle: 1:1

**Communication System: Cellular CDMA; Frequency: 836.52 MHz;**

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: H3DV6 - SN6180; Calibrated: 10/6/2004
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn637; Calibrated: 9/22/2004
- Phantom: HAC Phantom; Type: SD HAC P01 BA;
- Measurement SW: DASy4, V4.5 Build 19;

**Ch.0384, Ant Out/Hearing Aid Compatibility Test (261x261x1):** Measurement grid: dx=2mm, dy=2mm


Maximum value of Total field (slot averaged) = 0.186 A/m

**Hearing Aid Near-Field Category: M4 (AWF 0 dB)**

H in A/m (Time averaged) H in A/m (Slot averaged)

Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
0.186	0.147	0.111	0.186	0.147	0.111
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
0.173	0.140	0.111	0.173	0.140	0.111
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
0.165	0.127	0.102	0.165	0.127	0.102

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

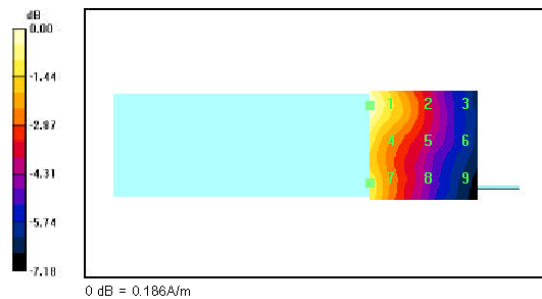

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 39 of 63



PCTEST Hearing-Aid Compatibility Facility

**DUT: TX-210**  
 Type: Dual-Band CDMA Phone  
 Serial: #2  
 Backlight on  
 Duty Cycle: 1:1

Communication System: PCS CDMA; Frequency: 1908.75 MHz;

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: HSDV6 - SN6180; Calibrated: 10/6/2004
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn637; Calibrated: 3/22/2004
- Phantom: HAC Phantom; Type: SD HAC P01 BA;
- Measurement SW: DASy4, V4.5 Build 13;

**Ch.1175, Ant Out/Hearing Aid Compatibility Test (261x261x1):** Measurement grid: dx=2mm, dy=2mm


Maximum value of Total field (slot averaged) = 0.126 A/m

Hearing Aid Near-Field Category: **M4 (AWF 0 dB)**

H in A/m (Time averaged)    H in A/m (Slot averaged)

Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
0.126	0.106	0.069	0.126	0.106	0.069
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
0.117	0.094	0.067	0.117	0.094	0.067
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
0.125	0.122	0.100	0.125	0.122	0.100

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

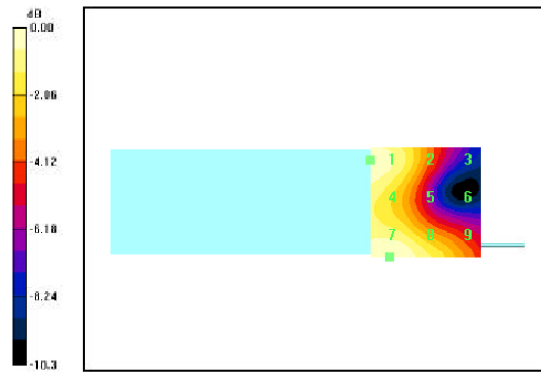



0 dB = 0.126A/m

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 40 of 63

## 13. PROBE CALIBRATION

The following pages include the probe calibration used to evaluate HAC for the DUT.

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 41 of 63

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC test**

Certificate No. **ER3-2332\_Jan05**

**CALIBRATION CERTIFICATE**

Object **ER3DV6 - SN:2332**

Calibration procedure(s) **QA CAL-02.v4  
Calibration procedure for E-field probes optimized for close near field  
evaluations in air**

Calibration date: **January 31, 2005**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-May-04 (METAS, No. 251-00388)	May-05
Power sensor E4412A	MY41495277	5-May-04 (METAS, No. 251-00388)	May-05
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-04 (METAS, No. 251-00403)	Aug-05
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-04 (METAS, No. 251-00389)	May-05
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-04 (METAS, No. 251-00404)	Aug-05
Reference Probe ER3DV6	SN: 2328	6-Oct-04 (SPEAG, No. ER3-2328_Oct04)	Oct-05
DAE4	SN: 617	19-Jan-05 (SPEAG, No. DAE4-617_Jan05)	Jan-06

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov 05

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: February 19, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: ER3-2332\_Jan05

Page 1 of 9

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 42 of 63

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**



**NORM<sub>x,y,z</sub>** sensitivity in free space  
**DCP** diode compression point  
**Polarization  $\varphi$**   $\varphi$  rotation around probe axis  
**Polarization  $\vartheta$**   $\vartheta$  rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e.,  $\vartheta = 0$  is normal to probe axis  
**Connector Angle** information used in DASY system to align probe sensor X to the robot coordinate system

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1309-1996, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", 1996.

**Methods Applied and Interpretation of Parameters:**

- **NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  for XY sensors and  $\vartheta = 90$  for Z sensor ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).
- **NORM(f)<sub>x,y,z</sub>** = **NORM<sub>x,y,z</sub>** \* *frequency\_response* (see Frequency Response Chart).
- **DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency.
- **Spherical isotropy (3D deviation from isotropy)**: in a locally homogeneous field realized using an open waveguide setup.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the **NORM<sub>x</sub>** (no uncertainty required).

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 43 of 63



# Probe ER3DV6

## SN:2332

Manufactured: September 9, 2003  
Calibrated: January 31, 2005

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 44 of 63



**DASY - Parameters of Probe: ER3DV6 SN:2332**

Sensitivity in Free Space [ $\mu\text{V}/(\text{V}/\text{m})^2$ ]		Diode Compression <sup>A</sup>	
NormX	1.34 ± 10.1 % (k=2)	DCP X	95 mV
NormY	1.47 ± 10.1 % (k=2)	DCP Y	95 mV
NormZ	1.64 ± 10.1 % (k=2)	DCP Z	97 mV

## Frequency Correction

X	0.0
Y	0.0
Z	0.0



## Sensor Offset (Probe Tip to Sensor Center)

X	2.5 mm
Y	2.5 mm
Z	2.5 mm


Connector Angle 139 °

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.



<sup>A</sup> numerical linearization parameter: uncertainty not required

PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 45 of 63


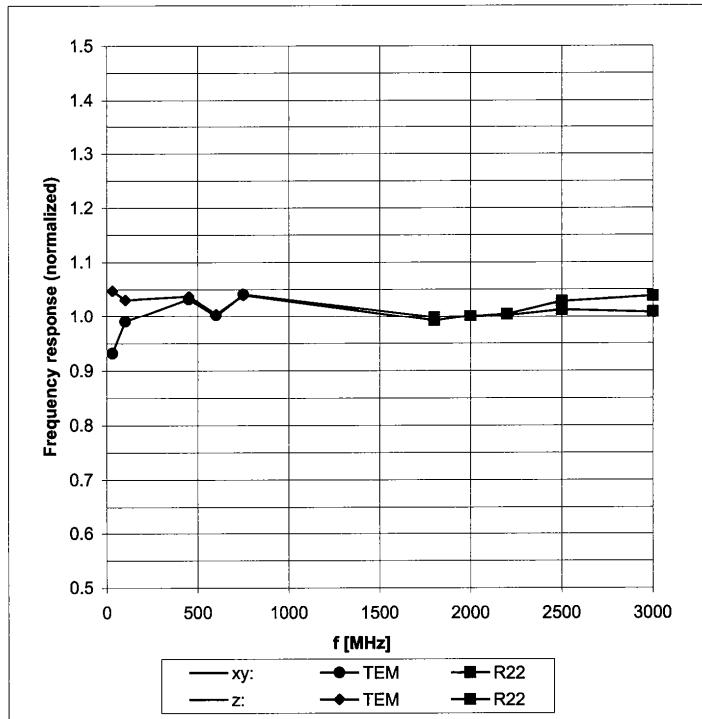
### Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide R22)





Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)



<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 46 of 63

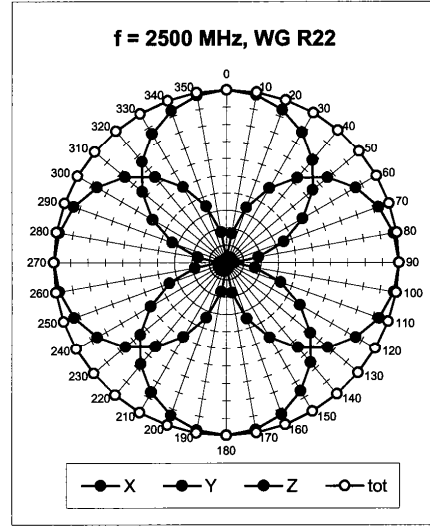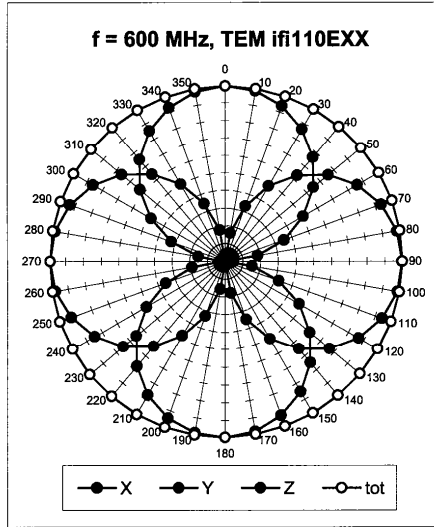Receiving Pattern ( $\phi$ ),  $\vartheta = 0^\circ$

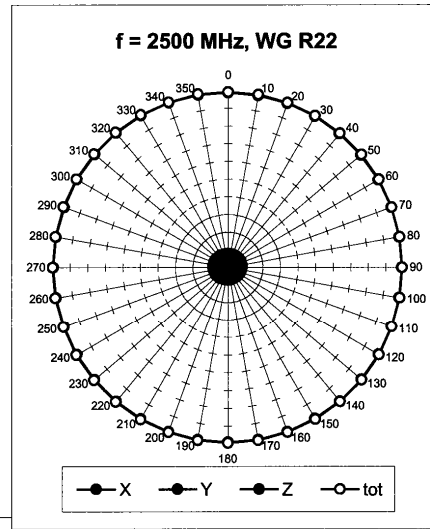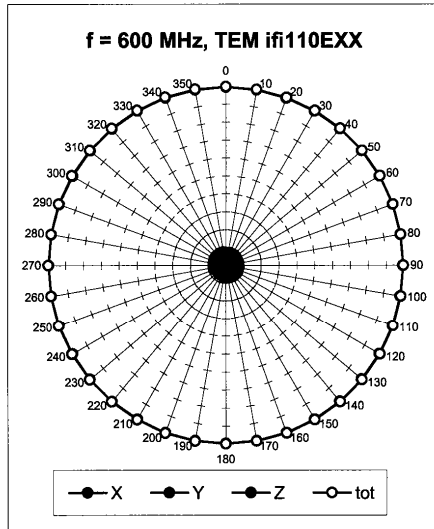


Receiving Pattern ( $\phi$ ),  $\vartheta = 90^\circ$




PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 47 of 63

### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

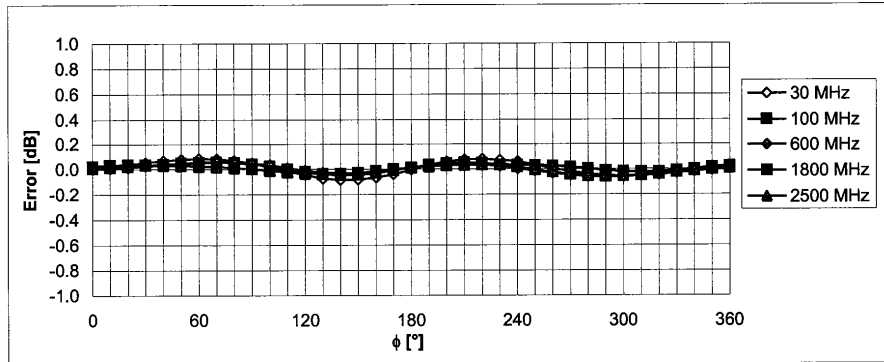



Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)


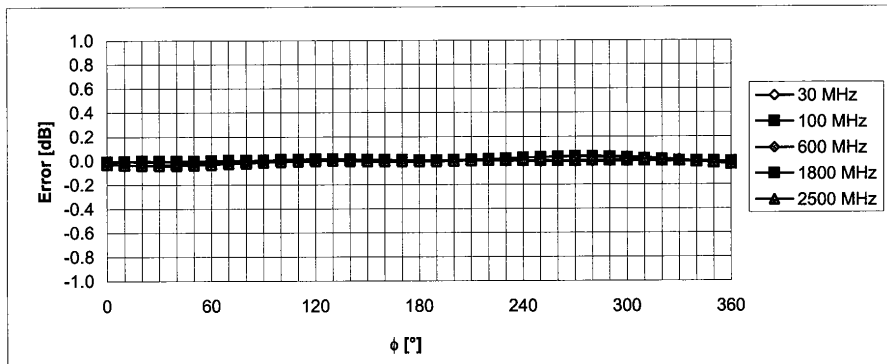
### Receiving Pattern ( $\phi$ ), $\vartheta = 90^\circ$





Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 48 of 63

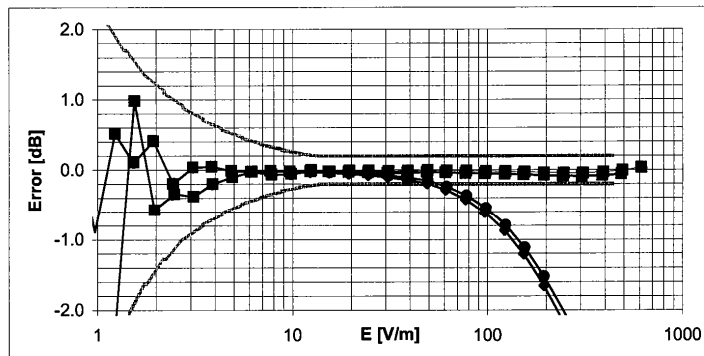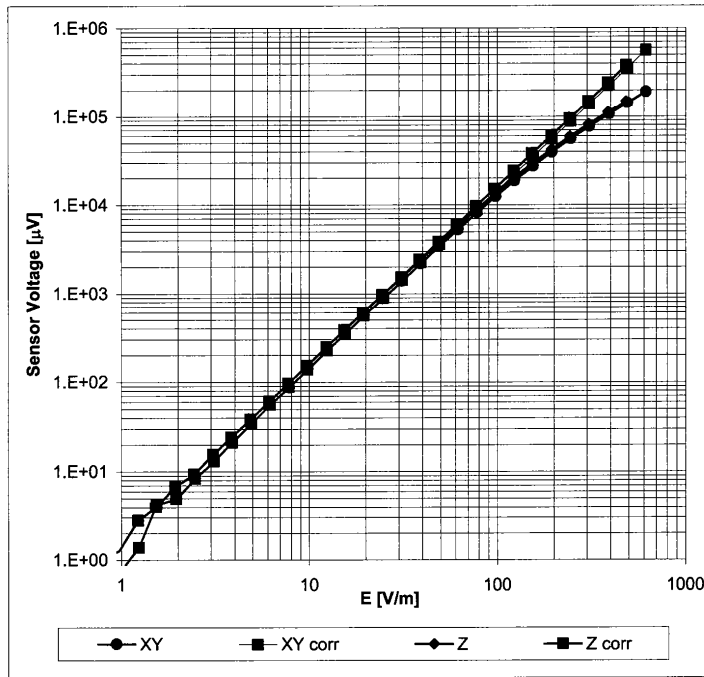
### Dynamic Range f(E-field) (Waveguide R22, f = 1800 MHz)





Uncertainty of Linearity Assessment:  $\pm 0.6\%$  (k=2)

PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 49 of 63
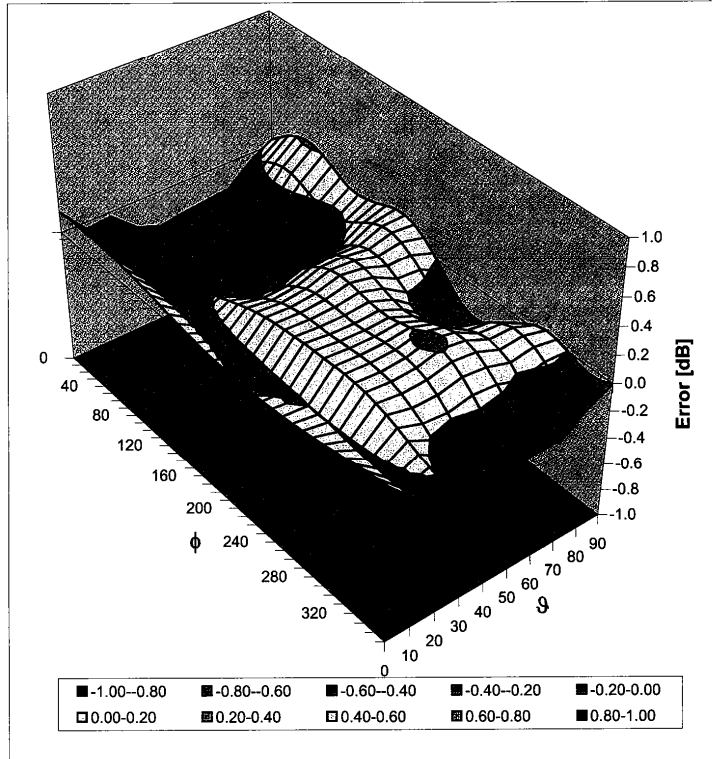
### Deviation from Isotropy in Air Error ( $\phi, \theta$ ), $f = 900$ MHz



**Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )**

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 50 of 63

Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **PC Test**

Certificate No: H3-6180\_Oct04

CALIBRATION CERTIFICATE			
Object	H3DV6 - SN:6180		
Calibration procedure(s)	QA CAL-03.v4 Calibration procedure for H-field probes optimized for close near field evaluations in air		
Calibration date:	October 6, 2004		
Condition of the calibrated item	In Tolerance		
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity &lt; 70%.</p> <p>Calibration Equipment used (M&amp;TE critical for calibration)</p>			
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-May-04 (METAS, No. 251-00388)	May-05
Power sensor E4412A	MY41495277	5-May-04 (METAS, No. 251-00388)	May-05
Reference 3 dB Attenuator	SN: S5054 (3c)	3-Apr-03 (METAS, No. 251-00403)	Aug-05
Reference 20 dB Attenuator	SN: S5066 (20b)	3-May-04 (METAS, No. 251-00389)	May-05
Reference 30 dB Attenuator	SN: S5129 (30b)	3-Apr-03 (METAS, No. 251-00404)	Aug-05
Reference Probe H3DV6	SN: S065	17-Dec-03 (SPEAG, No. H3-6065_Dec03)	Dec-04
DAE4	SN: 617	26-May-04 (SPEAG, No. DAE4-617_May04)	May-05
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-03)	In house check: Nov 04
Calibrated by:	Name Katja Pokovic	Function Technical Manager	Signature 
Approved by:	Name Niels Kuster	Function Quality Manager	Signature 
<p>Issued: October 23, 2004</p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p>			

Certificate No: H3-6180\_Oct04

Page 1 of 8

PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 51 of 63

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
 Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
 Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**



**NORM<sub>x,y,z</sub>** sensitivity in free space  
**DCP** diode compression point  
**Polarization  $\varphi$**   $\varphi$  rotation around probe axis  
**Polarization  $\vartheta$**   $\vartheta$  rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e.,  $\vartheta = 0$  is normal to probe axis  
**Connector Angle** information used in DASYS system to align probe sensor X to the robot coordinate system

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1309-1996, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", 1996.

**Methods Applied and Interpretation of Parameters:**

- **X, Y, Z<sub>a0a1a2</sub>**: Assessed for E-field polarization  $\vartheta = 90$  for XY sensors and  $\vartheta = 0$  for Z sensor ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).
- **X, Y, Z(f)<sub>a0a1a2</sub>** = X, Y, Z<sub>a0a1a2</sub> \* *frequency\_response* (see Frequency Response Chart).
- **DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency.
- **Spherical isotropy (3D deviation from isotropy)**: in a locally homogeneous field realized using an open waveguide setup.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the X<sub>a0a1a2</sub> (no uncertainty required).

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 52 of 63





# Probe H3DV6

## SN:6180

Manufactured: July 6, 2004  
Calibrated: October 6, 2004

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 53 of 63

**DASY - Parameters of Probe: H3DV6 SN:6180**

Sensitivity in Free Space [A/m /  $\sqrt{\mu\text{V}}$ ]

	a0	a1	a2	
X	2.490E-03	1.788E-05	-2.842E-05	± 5.0 % (k=2)
Y	2.681E-03	3.017E-05	-3.113E-05	± 5.0 % (k=2)
Z	2.912E-03	-1.610E-05	1.858E-05	± 5.0 % (k=2)

Diode Compression<sup>1</sup>

DCP X	85 mV
DCP Y	85 mV
DCP Z	87 mV



Sensor Offset (Probe Tip to Sensor Center)

X	3.0 mm
Y	3.0 mm
Z	3.0 mm

Connector Angle 4 °


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>1</sup> numerical linearization parameter: uncertainty not required



PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 54 of 63

### Frequency Response of H-Field

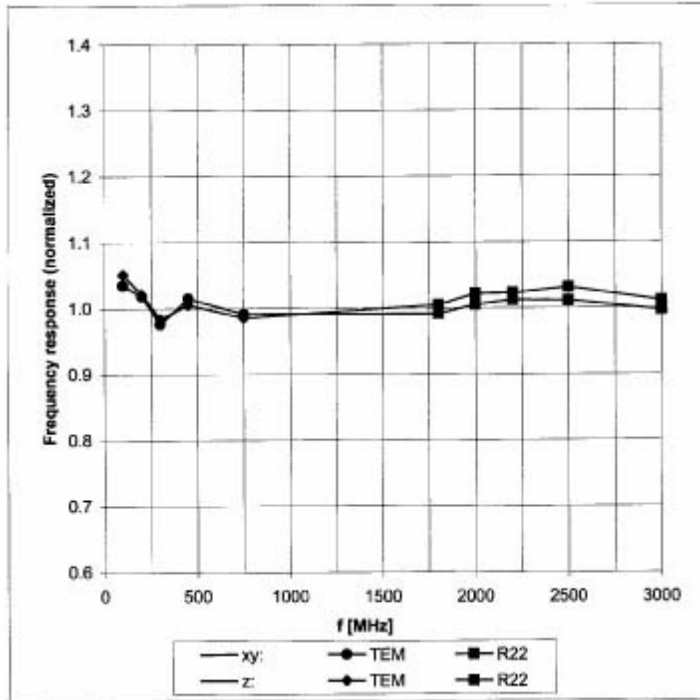
(TEM-Cell:ifi110, Waveguide R22)




Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)



<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 55 of 63

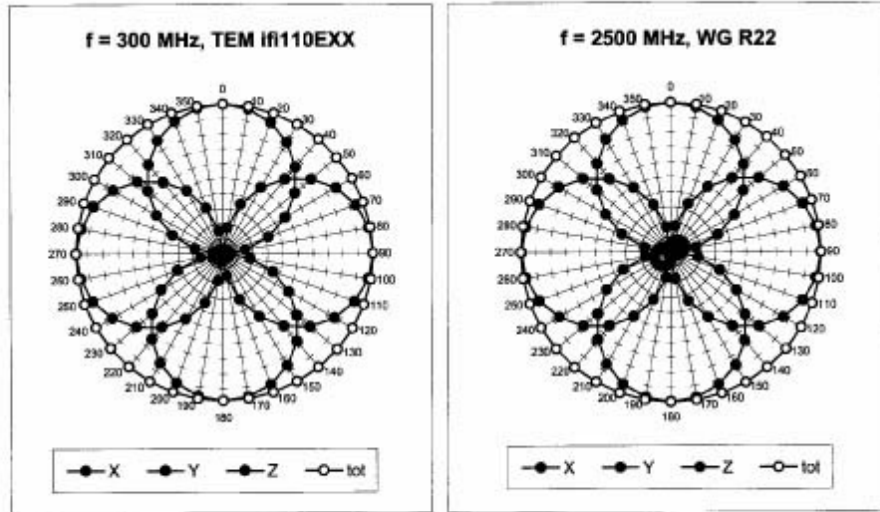**Receiving Pattern ( $\phi$ ),  $\vartheta = 90^\circ$**

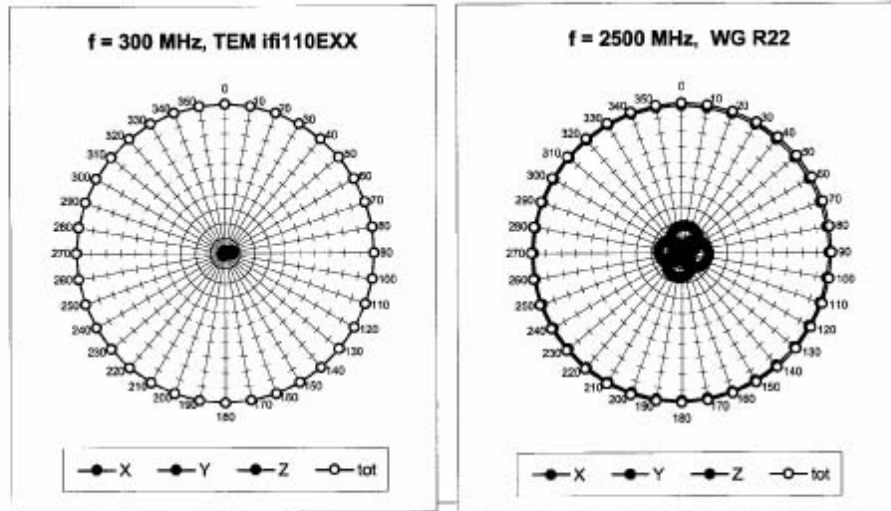


**Receiving Pattern ( $\phi$ ),  $\vartheta = 0^\circ$**




PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 56 of 63

### Receiving Pattern ( $\phi$ ), $\vartheta = 90^\circ$

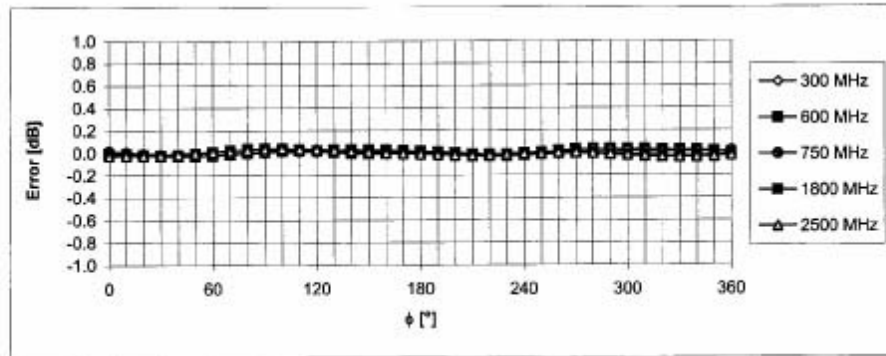



Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)


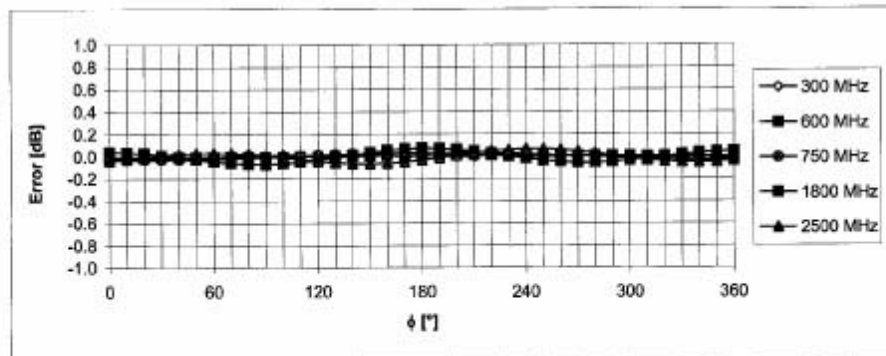
### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$





Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 57 of 63
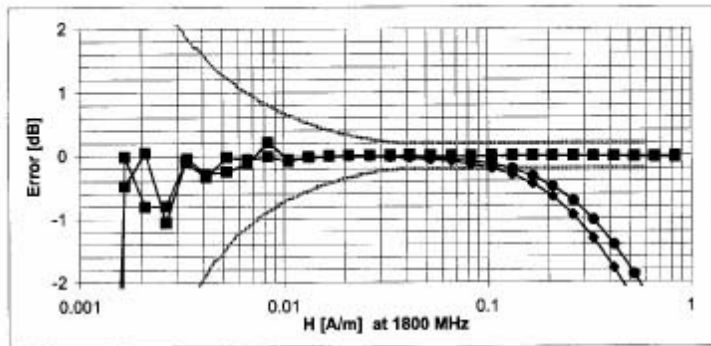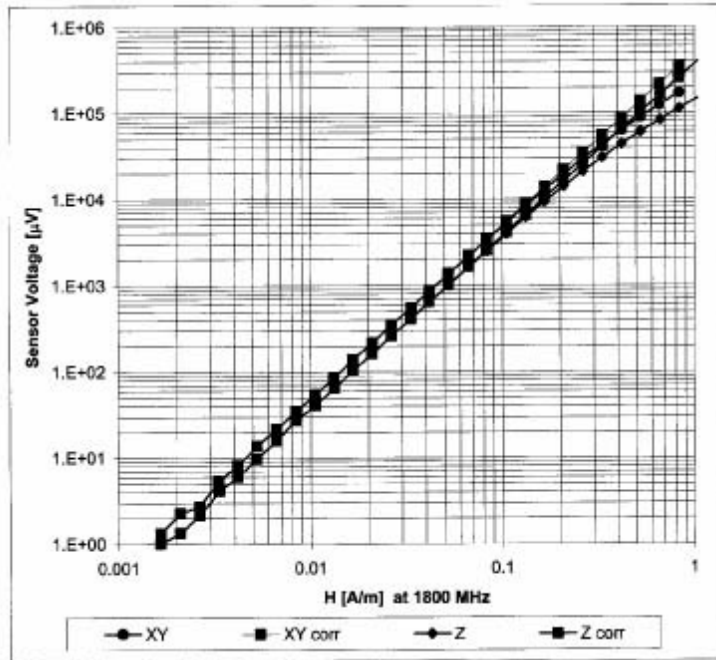
### Dynamic Range f(H-field) (Waveguide R22, f = 1800 MHz)





Uncertainty of Linearity Assessment:  $\pm 0.6\%$  (k=2)

PCTEST™ HAC REPORT		FCC MEASUREMENT REPORT		Reviewed by: Quality Manager
HAC Filename: HAC.0506090424-R2.PP4	Test Dates: May 24, 2005	EUT Type: Dual-Band CDMA Phone	FCC ID: PP4TX-210	Page 58 of 63

## 15. CONCLUSION



The measurements indicate that the wireless communications device complies with the HAC limits specified in accordance with the ANSI PC63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

Please note that the M-rating for this equipment only represents the field interference possible against a hypothetical and typical hearing aid. The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 61 of 63



## 16. REFERENCES

1. ANSI PC63.19-2005 D3.6, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.", New York, NY, IEEE, April 2005.
2. Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
3. Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
4. Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices, " IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
5. Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
6. Byrne, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
7. Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells, " U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
8. Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
9. EHIMA GSM Project, Development phase, Project Report (1<sup>st</sup> part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
10. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.
11. EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
12. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
13. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
14. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 62 of 63



15. Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
16. Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
17. Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Construction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
18. Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7<sup>th</sup> International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.
19. Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
20. Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
21. Ma, M. A., Sreenivashiah, I. , and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
22. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
23. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
24. Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
25. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
26. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

<b>PCTEST™ HAC REPORT</b>		<b>FCC MEASUREMENT REPORT</b>		<b>Reviewed by:</b> Quality Manager
<b>HAC Filename:</b> HAC.0506090424-R2.PP4	<b>Test Dates:</b> May 24, 2005	<b>EUT Type:</b> Dual-Band CDMA Phone	<b>FCC ID:</b> PP4TX-210	Page 63 of 63