

ATTACHMENT O – SAR TEST PLOTS (3 of 4)

TX-215A

SAM I Phantom, Left Hand (CRP) Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 1.0; Head 1900 MHz: $\sigma = 1.44 \text{ mho/m}$ $\epsilon_r = 38.5$ $\rho =$

1.00 g/cm³

Cube 5x5x7: SAR (1g): 0.556 mW/g, SAR (10g): 0.338 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.21 dB

Comment :

MODEL: TX-215A

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: in

Mode: PCS CDMA / Channel: 25 (1851.25MHz)

Conducted Power : 25.0 dBm

Liquid Temperature : 21.5°C

Date Tested : June 13, 2005

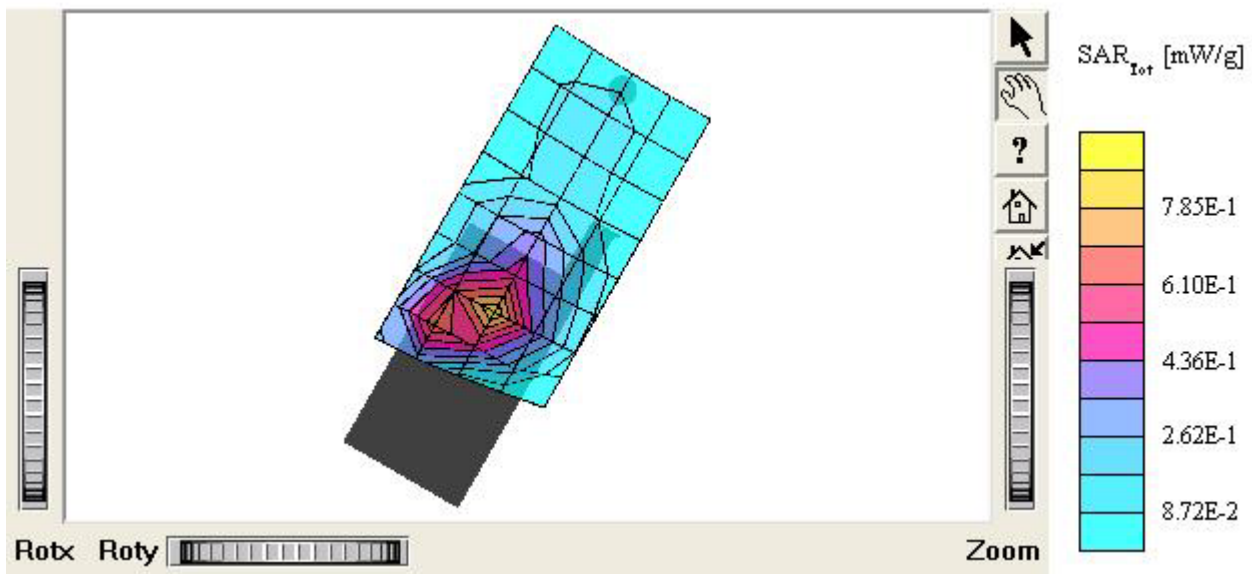

TX-215A

SAM I Phantom, Left Hand (CRP) Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 1.0; Head 1900 MHz: $\sigma = 1.44$ mho/m $\epsilon_r = 38.5$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.0784 mW/g, SAR (10g): 0.0512 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.08 dB

Comment :

MODEL: TX-215A

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: out

Mode: PCS CDMA / Channel: 25 (1851.25MHz)

Conducted Power : 25.0 dBm

Liquid Temperature : 21.5°C

Date Tested : June 13, 2005

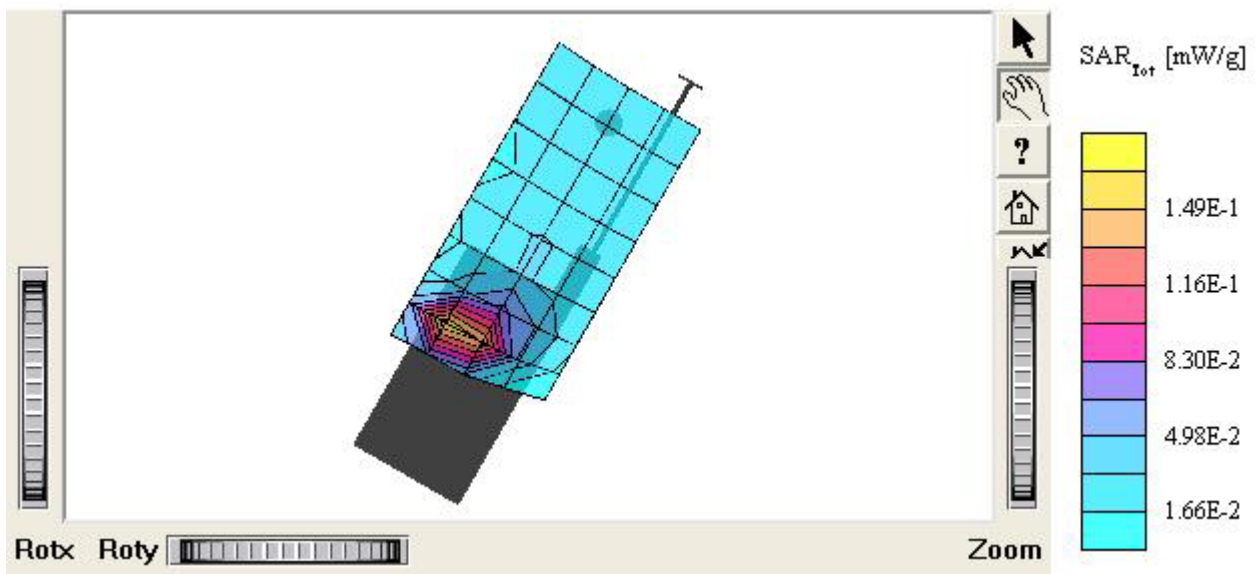

TX-215A

SAM I Phantom; Left Hand (CRP) Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 1.0; Head 1900 MHz: $\sigma = 1.44$ mho/m $\epsilon_r = 38.5$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR(1g): 0.726 mW/g, SAR(10g): 0.438 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.08 dB

Comment :

MODEL: TX-215A

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: in

Mode: PCS CDMA / Channel: 600 (1880.00MHz)

Conducted Power : 25.0 dBm

Liquid Temperature : 21.5°C

Date Tested : June 13, 2005

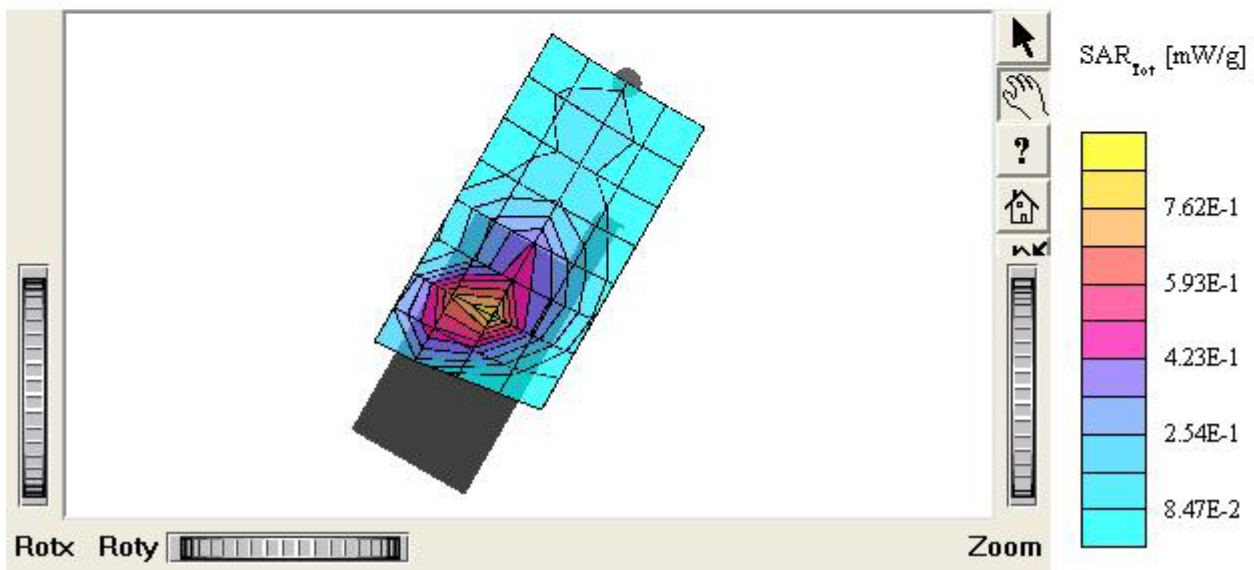

TX-215A

SAM I Phantom, Left Hand (CRP) Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 1.0; Head 1900 MHz: $\sigma = 1.44$ mho/m $\epsilon_r = 38.5$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.697 mW/g, SAR (10g): 0.427 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.14 dB

Comment :

MODEL: TX-215A(E-battery)

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: in

Mode: PCS CDMA / Channel: 600 (1880.00MHz)

Conducted Power : 25.0 dBm

Liquid Temperature : 21.5°C

Date Tested : June 13, 2005

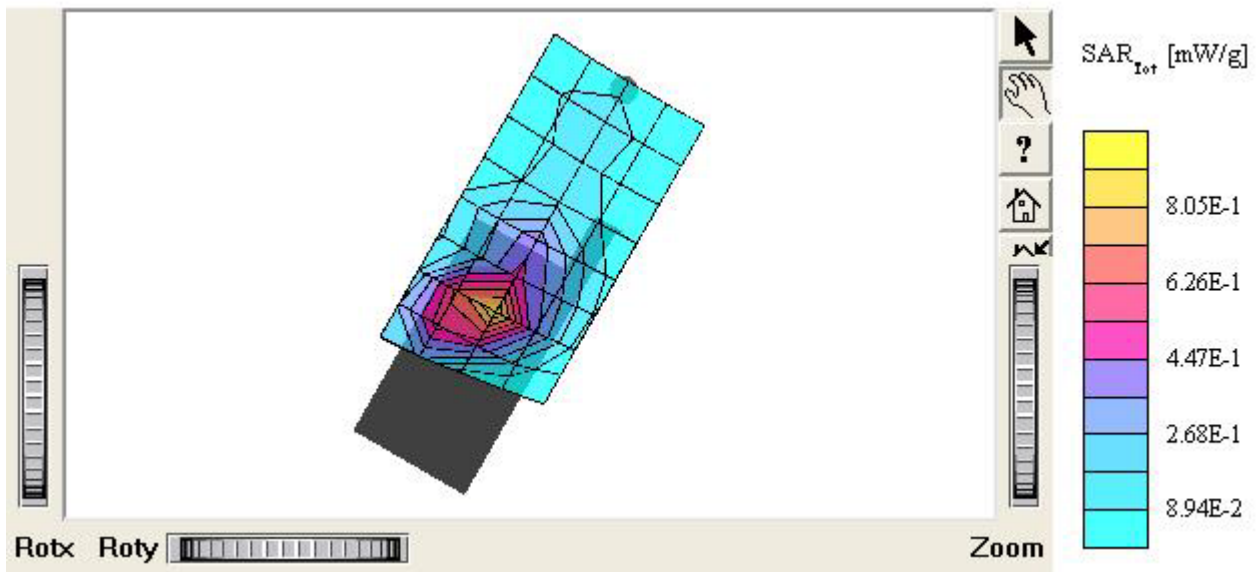

TX-215A

SAM I Phantom, Left Hand (CRP) Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 1.0; Head 1900 MHz: $\sigma = 1.44$ mho/m $\epsilon_r = 38.5$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.0961 mW/g, SAR (10g): 0.0601 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.17 dB

Comment :

MODEL: TX-215A

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: out

Mode: PCS CDMA / Channel: 600 (1880.00MHz)

Conducted Power : 25.0 dBm

Liquid Temperature : 21.5°C

Date Tested : June 13, 2005

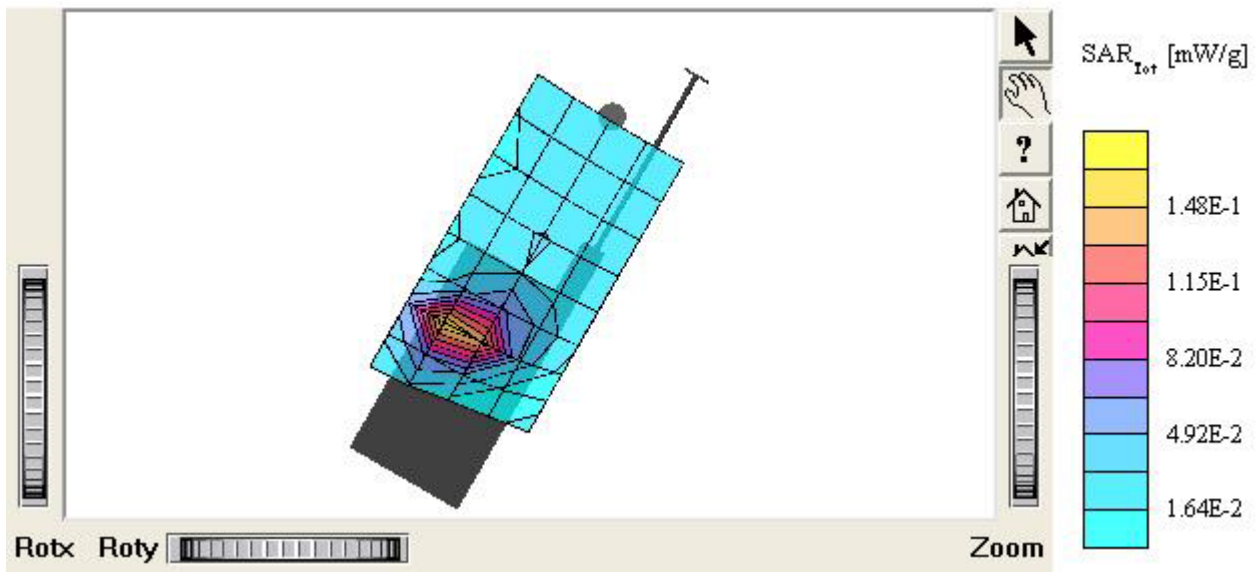

TX-215A

SAM I Phantom, Left Hand (CRP) Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 1.0; Head 1900 MHz: $\sigma = 1.44 \text{ mho/m}$ $\epsilon_r = 38.5$ $\rho =$

1.00 g/cm³

Cube 5x5x7: SAR (1g): 0.619 mW/g, SAR (10g): 0.373 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.29 dB

Comment :

MODEL: TX-215A

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: in

Mode: PCS CDMA / Channel: 1175 (1908.75MHz)

Conducted Power : 25.0 dBm

Liquid Temperature : 21.5°C

Date Tested : June 13, 2005

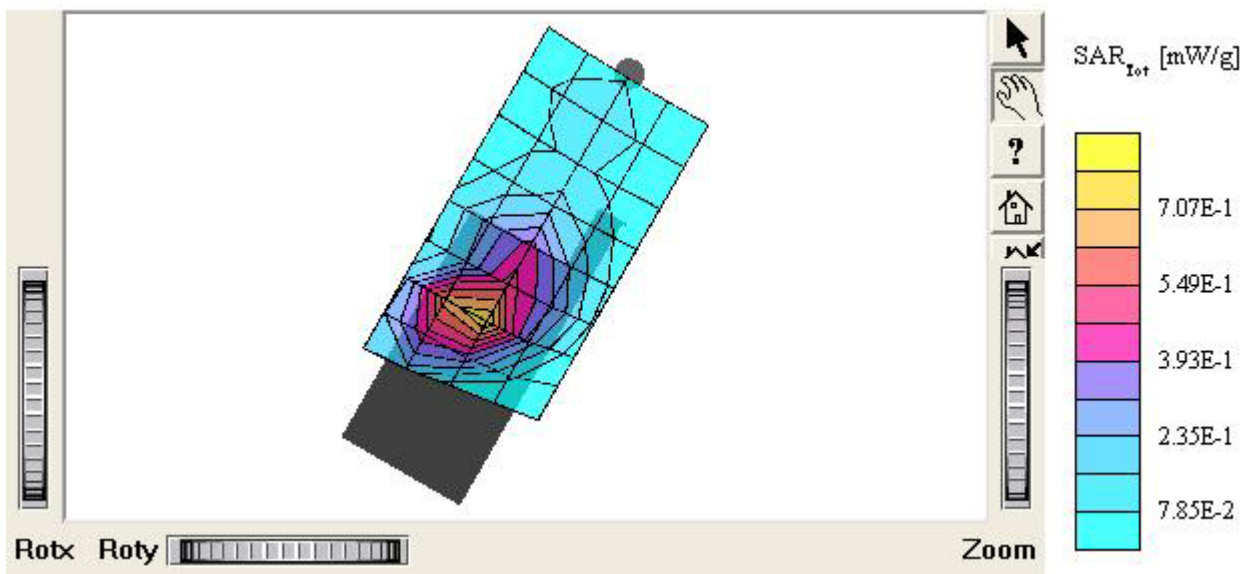

TX-215A

SAM I Phantom, Left Hand (CRP) Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 1.0; Head 1900 MHz: $\sigma = 1.44$ mho/m $\epsilon_r = 38.5$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.152 mW/g, SAR (10g): 0.0958 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.11 dB

Comment :

MODEL: TX-215A

Company: Hyundai Curitel Inc.


Test Position: Left Touch / Antenna: out

Mode: PCS CDMA / Channel: 1175 (1908.75MHz)

Conducted Power : 25.0 dBm

Liquid Temperature : 21.5°C

Date Tested : June 13, 2005

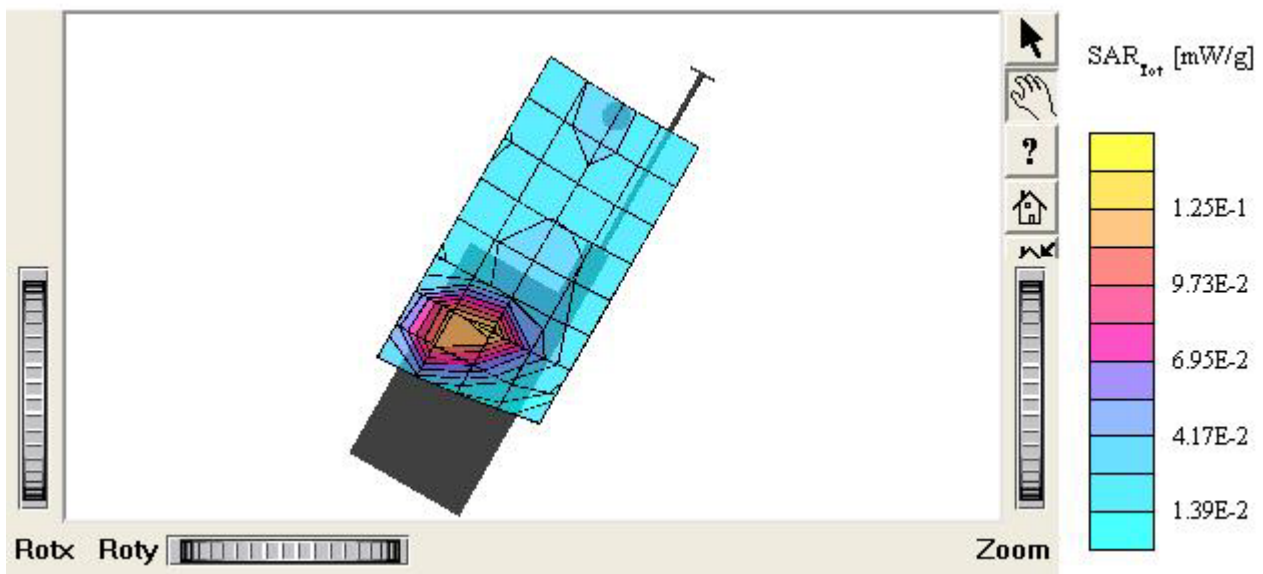

TX-215A

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 1.0; Head 1900 MHz: $\sigma = 1.44 \text{ mho/m}$ $\epsilon_r = 38.5$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.551 mW/g, SAR (10g): 0.352 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Peak: 0.876 mW/g; Powerdrift: 0.02 dB

Comment :

MODEL: TX-215A

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: in

Mode: PCS CDMA / Channel: 25 (1851.25MHz)

Conducted Power : 25.0 dBm

Liquid Temperature : 21.5°C

Date Tested : June 13, 2005

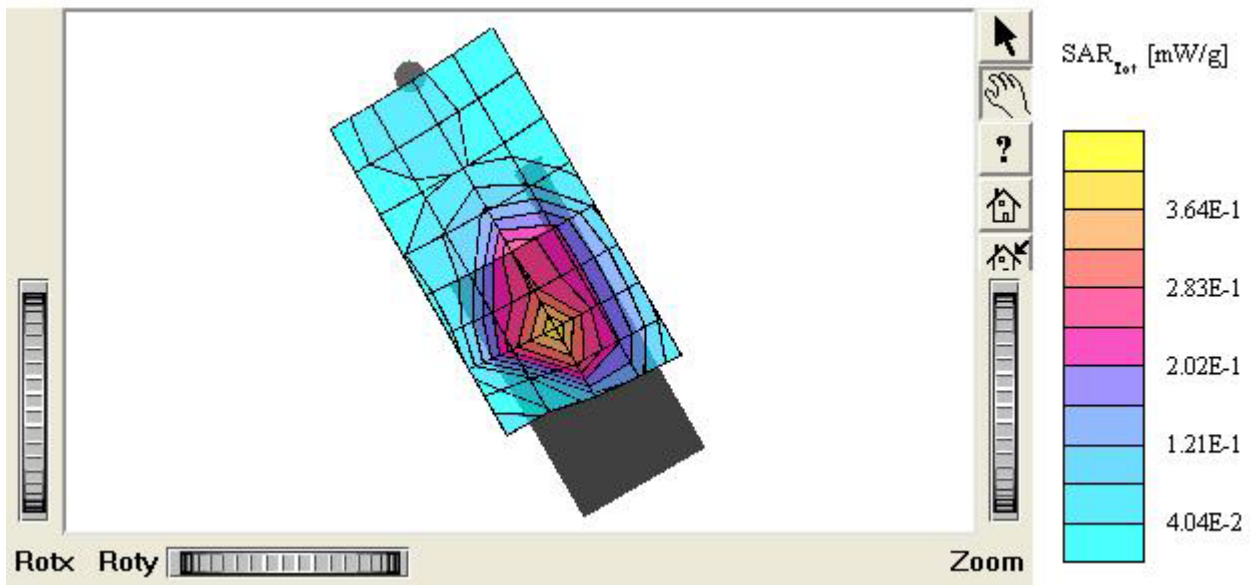

TX-215A

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 1.0; Head 1900 MHz: $\sigma = 1.44 \text{ mho/m}$ $\epsilon_r = 38.5$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.0901 mW/g, SAR (10g): 0.0512 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Peak: 0.164 mW/g; Powerdrift: 0.05 dB

Comment :

MODEL: TX-215A

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: out

Mode: PCS CDMA / Channel: 25 (1851.25MHz)

Conducted Power : 25.0 dBm

Liquid Temperature : 21.5°C

Date Tested : June 13, 2005

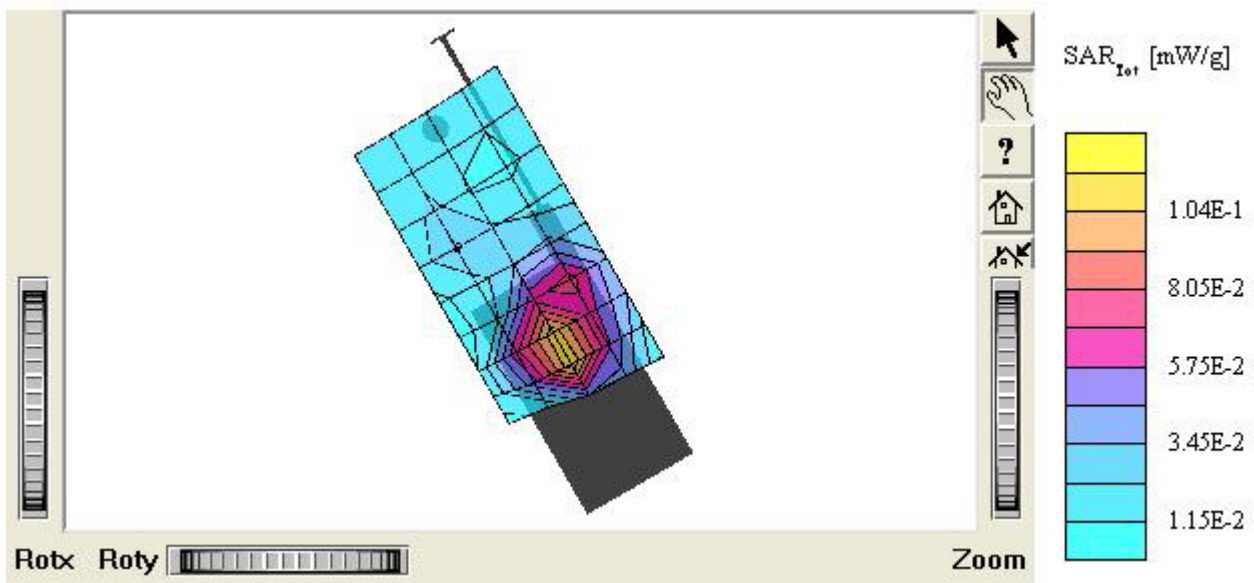

TX-215A

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 1.0; Head 1900 MHz: $\sigma = 1.44 \text{ mho/m}$ $\epsilon_r = 38.5$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.601 mW/g, SAR (10g): 0.342 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Peak: 1.01 mW/g; Powerdrift: 0.00 dB

Comment :

MODEL: TX-215A

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: in

Mode: PCS CDMA / Channel: 600 (1880.00MHz)

Conducted Power : 25.0 dBm

Liquid Temperature : 21.5°C

Date Tested : June 13, 2005

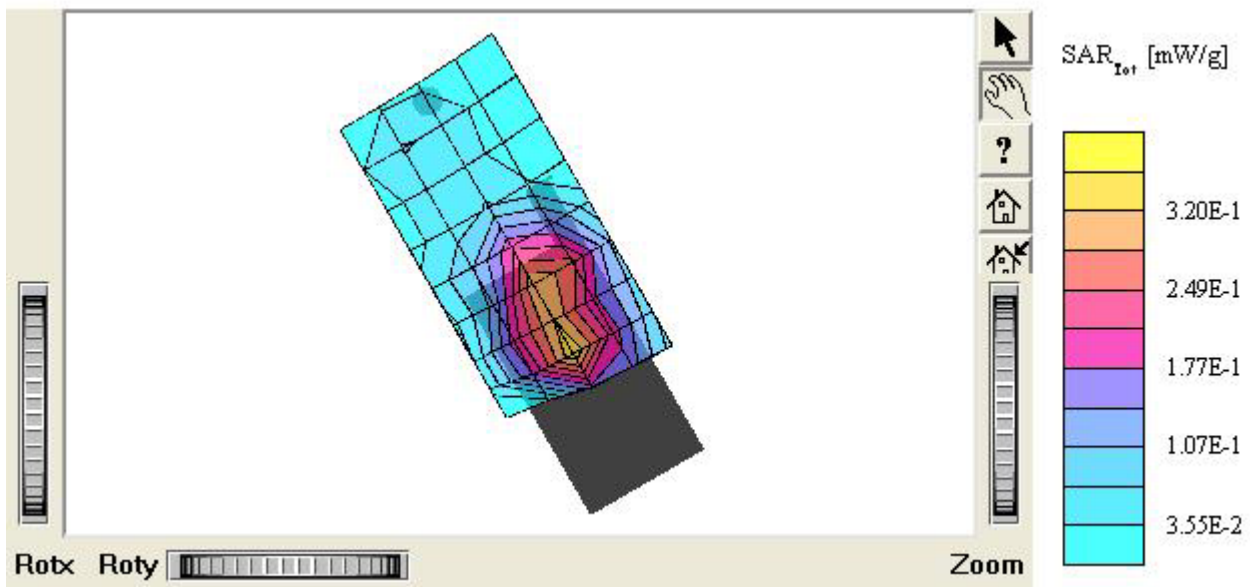

TX-215A

SAM I Phantom, Right Hand (CRP) Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 1.0; Head 1900 MHz: $\sigma = 1.44 \text{ mho/m}$ $\epsilon_r = 38.5$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.166 mW/g, SAR (10g): 0.0893 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Peak: 0.305 mW/g; Powerdrift: -0.12 dB

Comment :

MODEL: TX-215A

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: out

Mode: PCS CDMA / Channel: 600 (1880.00MHz)

Conducted Power : 25.0 dBm

Liquid Temperature : 21.5°C

Date Tested : June 13, 2005

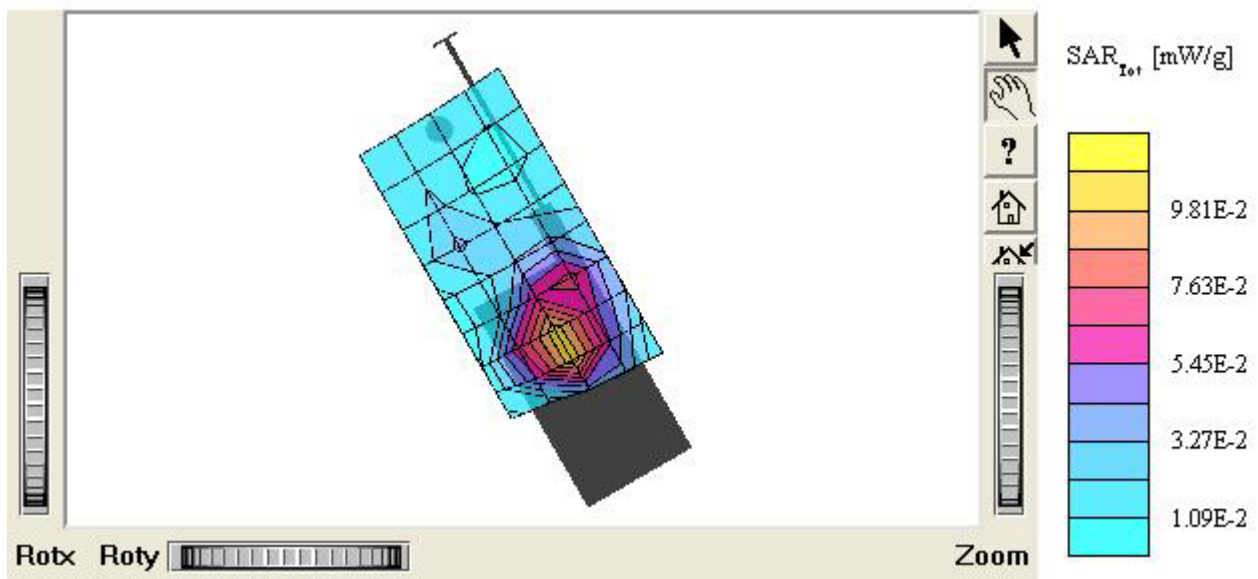

TX-215A

SAM I Phantom, Right Hand (CRP) Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 1.0; Head 1900 MHz: $\sigma = 1.44 \text{ mho/m}$ $\epsilon_r = 38.5$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.605 mW/g, SAR (10g): 0.369 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Peak: 0.956 mW/g; Powerdrift: 0.05 dB

Comment :

MODEL: TX-215A

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: in

Mode: PCS CDMA / Channel: 1175 (1908.75MHz)

Conducted Power : 25.0 dBm

Liquid Temperature : 21.5°C

Date Tested : June 13, 2005

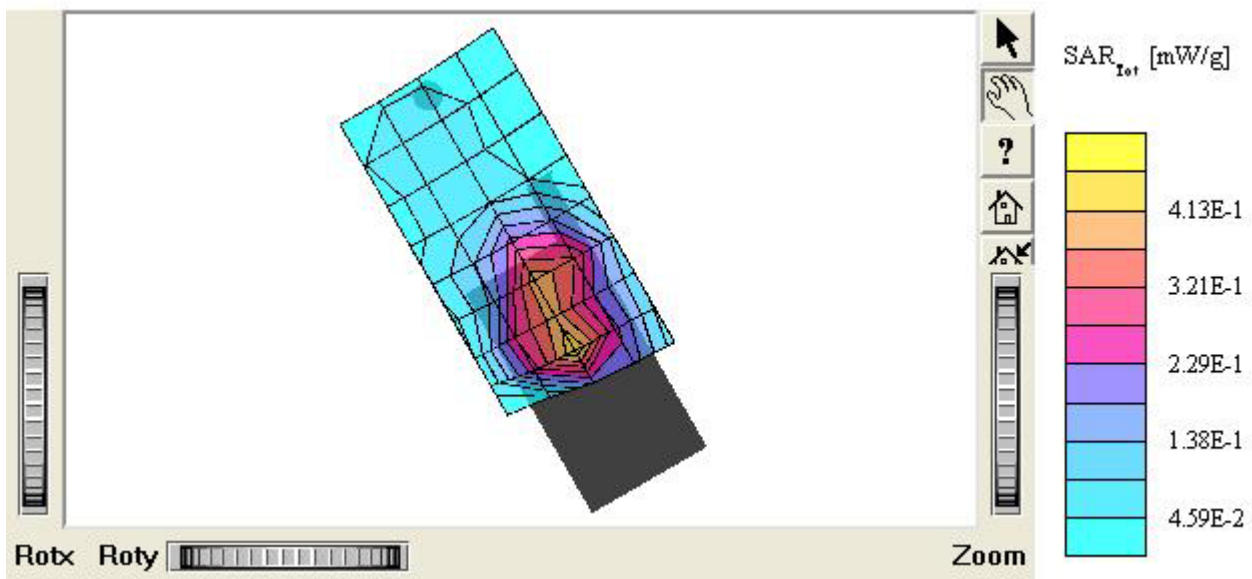

TX-215A

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 1.0; Head 1900 MHz: $\sigma = 1.44 \text{ mho/m}$ $\epsilon_r = 38.5$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.169 mW/g, SAR (10g): 0.107 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Peak: 0.258 mW/g; Powerdrift: -0.07 dB

Comment :

MODEL: TX-215A

Company: Hyundai Curitel Inc.


Test Position: Right Touch / Antenna: out

Mode: PCS CDMA / Channel: 1175 (1908.75MHz)

Conducted Power : 25.0 dBm

Liquid Temperature : 21.5°C

Date Tested : June 13, 2005

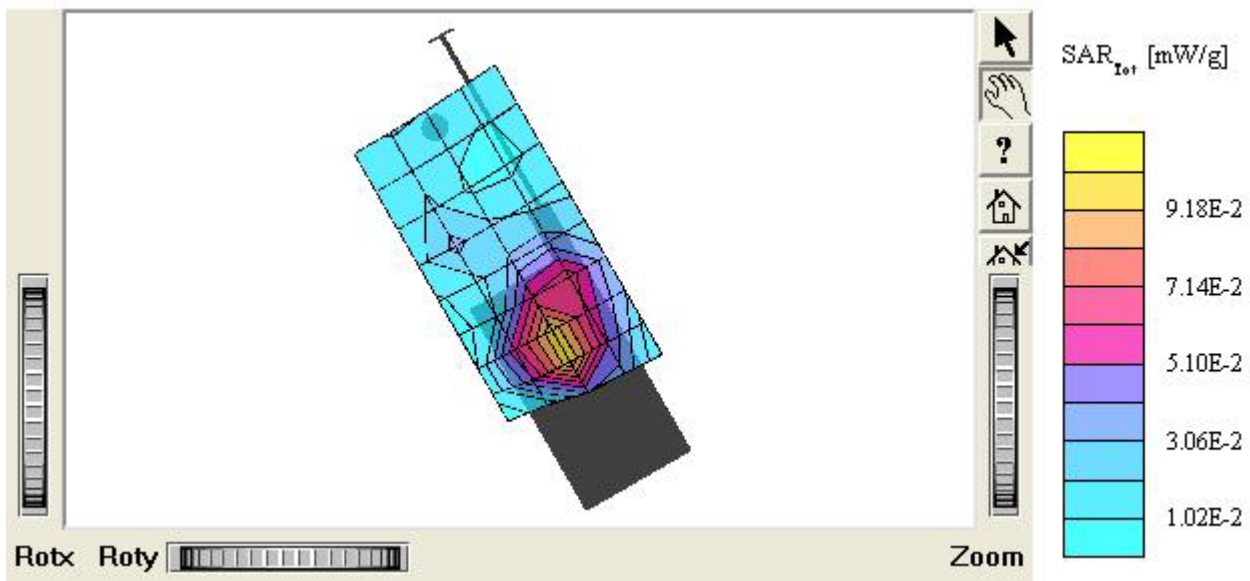

TX-215A

SAM I Phantom; Left Hand (CRP) Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 1.0; Head 1900 MHz: $\sigma = 1.44$ mho/m $\epsilon_r = 38.5$ $\rho = 1.00$ g/cm³

Cube 5x5x7; SAR(1g): 0.158 mW/g, SAR(10g): 0.0958 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.17 dB

Comment :

MODEL: TX-215A

Company: Hyundai Curitel Inc.


Test Position: Left Tilt 15° / Antenna: in

Mode: PCS CDMA / Channel: 600 (1880.00MHz)

Conducted Power : 25.0 dBm

Liquid Temperature : 21.5°C

Date Tested : June 13, 2005

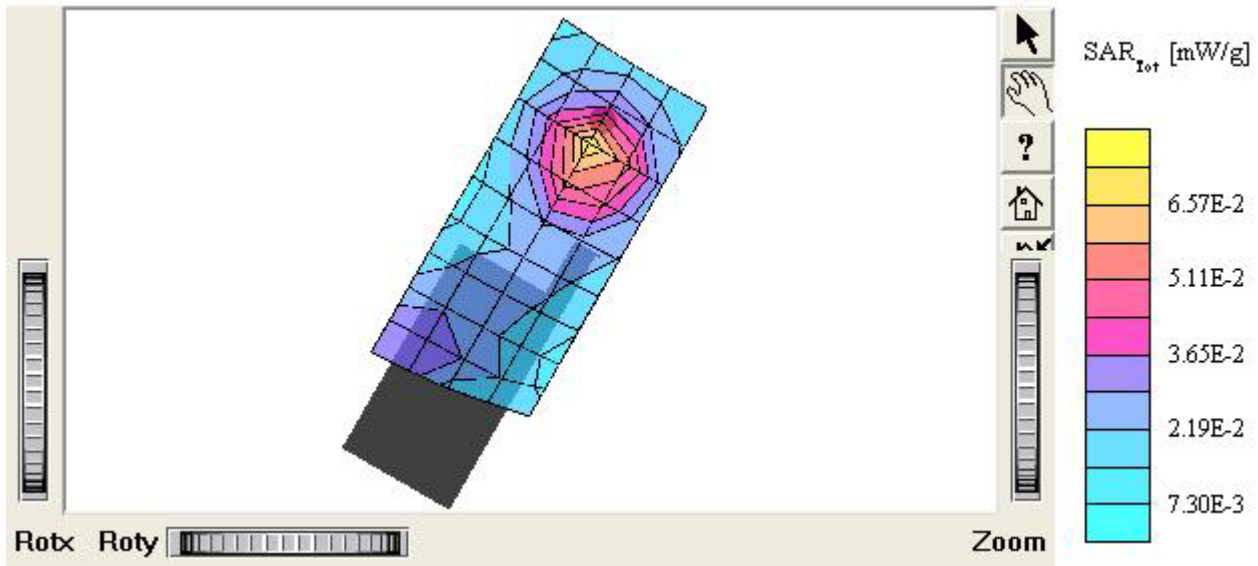

TX-215A

SAM I Phantom, Left Hand (CRP) Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 1.0; Head 1900 MHz: $\sigma = 1.44 \text{ mho/m}$ $\epsilon_r = 38.5$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.0923 mW/g, SAR (10g): 0.0594 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Powerdrift: -0.22 dB

Comment :

MODEL: TX-215A

Company: Hyundai Curitel Inc.


Test Position: Left Tilt 15° / Antenna: out

Mode: PCS CDMA / Channel: 600 (1880.00MHz)

Conducted Power : 25.0 dBm

Liquid Temperature : 21.5°C

Date Tested : June 13, 2005

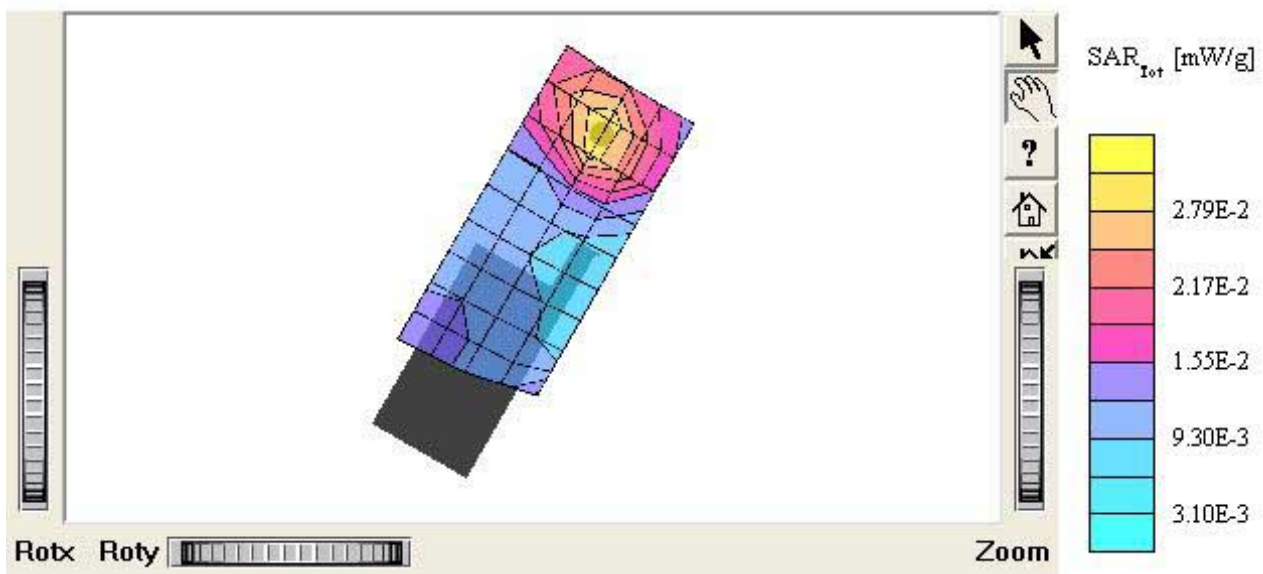

TX-215A

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 1.0; Head 1900 MHz: $\sigma = 1.44 \text{ mho/m}$ $\epsilon_r = 38.5$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.131 mW/g, SAR (10g): 0.0818 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Peak: 0.209 mW/g; Powerdrift: 0.02 dB

Comment :

MODEL: TX-215A

Company: Hyundai Curitel Inc.


Test Position: Right Tilt 15° / Antenna: in

Mode: PCS CDMA / Channel: 600 (1880.00MHz)

Conducted Power : 25.0 dBm

Liquid Temperature : 21.5°C

Date Tested : June 13, 2005

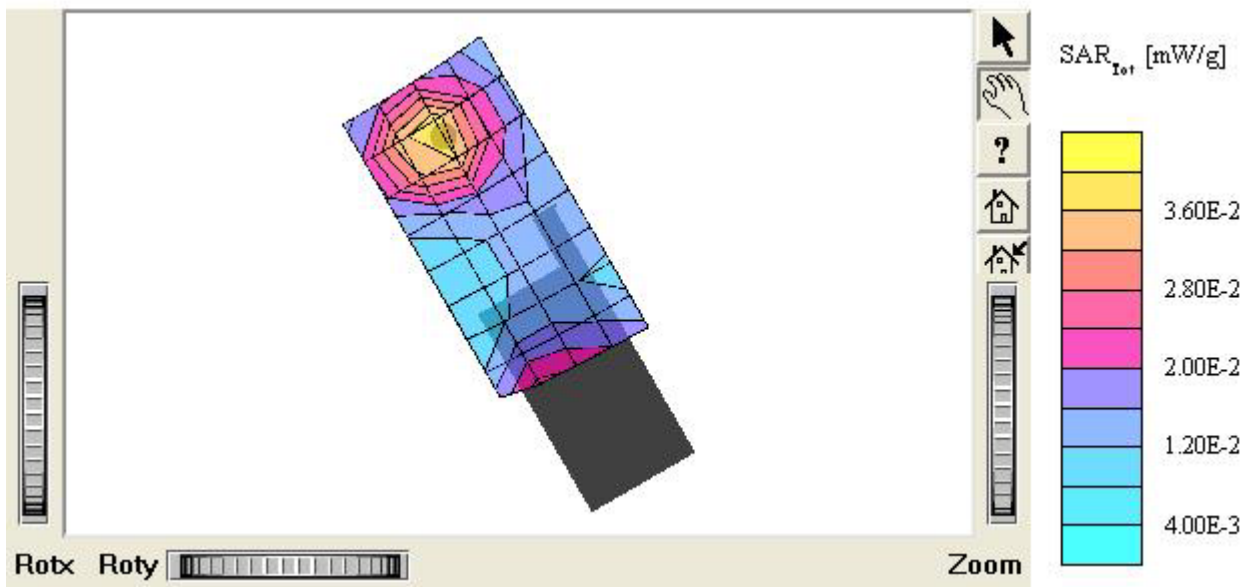

TX-215A

SAM I Phantom; Right Hand (CRP) Section; Position: (90°,180°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1609; ConvF(5.34,5.34,5.34); Crest factor: 1.0; Head 1900 MHz: $\sigma = 1.44 \text{ mho/m}$ $\epsilon_r = 38.5$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR(1g): 0.0857 mW/g, SAR(10g): 0.0559 mW/g

Coarse: Dx = 15.0, Dy = 15.0, Dz = 10.0

Peak: 0.143 mW/g; Powerdrift: 0.12 dB

Comment :

MODEL: TX-215A

Company: Hyundai Curitel Inc.

Test Position: Right Tilt 15° / Antenna: out

Mode: PCS CDMA / Channel: 600 (1880.00MHz)

Conducted Power : 25.0 dBm

Liquid Temperature : 21.5°C

Date Tested : June 13, 2005

