

ATTACHMENT A – HAC TEST PLOTS

Test Laboratory : HCT
 Company : PANTECH&CURITEL COMMUNICATIONS, INC.
 Mode : CDMA / Antenna : In / Channel : 1013
 Date Tested : December 27, 2005

DUT: TX-215A; Type: Folder (Ant in); Serial: #1
Program Name: HAC E Device

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Device Section

DASY4 Configuration:
 - Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2005-04-27
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE4 Sn614; Calibrated: 2005-04-21
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA


E Scan 10mm above Device Reference/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 35.4 V/m
 Probe Modulation Factor = 0.990
 Reference Value = 34.5 V/m; Power Drift = 0.118 dB
Hearing Aid Hear-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
30.7	33.8	31.7
Grid 4	Grid 5	Grid 6
32.2	35.4	32.8
Grid 7	Grid 8	Grid 9
27.4	30.7	28.6

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

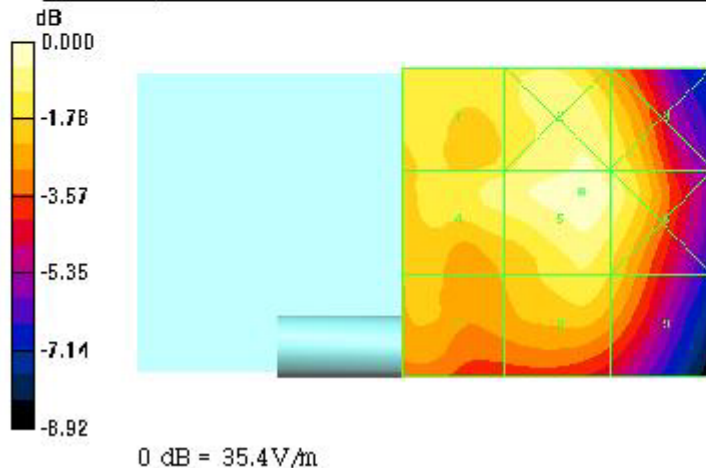

Test Laboratory : HCT
 Company : PANTECH&CURITEL COMMUNICATIONS, INC.
 Mode : CDMA / Antenna : Out / Channel : 1013
 Date Tested : December 27, 2005

DUT: TX-215A; Type: Folder (Ant in); Serial: #1
Program Name: HAC E Device

Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Device Section

DASY4 Configuration:
 - Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2005-04-27
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE4 Sn614; Calibrated: 2005-04-21
 - Phantom: HAC Test Arch; Type: SDHAC P01 BA


E Scan 10mm above Device Reference/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 32.3 V/m
 Probe Modulation Factor = 0.890
 Reference Value = 33.0 V/m; Power Drift = -0.058 dB
Hearing Aid Hear-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
33.6	31.1	29.0
Grid 4	Grid 5	Grid 6
32.0	32.3	30.3
Grid 7	Grid 8	Grid 9
30.0	27.4	25.5

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

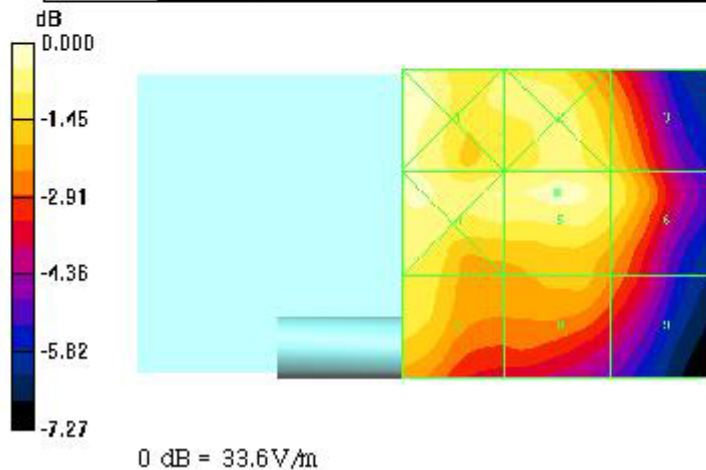

Test Laboratory : HCT
 Company : PANTECH&CURITEL COMMUNICATIONS, INC.
 Mode : CDMA / Antenna : In / Channel : 384
 Date Tested : December 27, 2005

DUT: TX-215A; Type: Folder (Ant in); Serial: #1
Program Name: HAC E Device

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Device Section

DASY4 Configuration:
 - Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2005-04-27
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE4 Sn614; Calibrated: 2005-04-21
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA


E Scan 10mm above Device Reference/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm dy=5mm
 Maximum value of peak Total field = 40.6 V/m
 Probe Modulation Factor = 0.990
 Reference Value = 41.8 V/m; Power Drift = -0.158 dB
Hearing Aid Hear-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
38.3	38.8	36.4
Grid 4	Grid 5	Grid 6
37.6	40.6	37.9
Grid 7	Grid 8	Grid 9
34.8	34.8	33.0

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

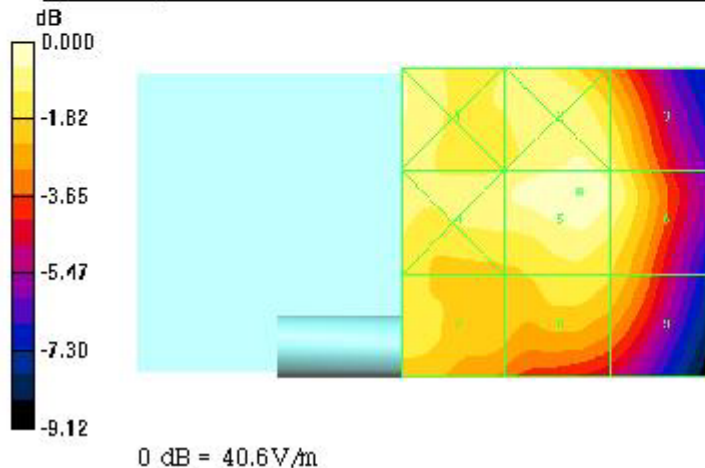

Test Laboratory : HCT
 Company : PANTECH&CURITEL COMMUNICATIONS, INC.
 Mode : CDMA/ Antenna : Out/ Channel : 394
 Date Tested : December 27, 2005

DUT: TX-215A; Type: Folder (Ant in); Serial: #1
Program Name: HAC E Device

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0 \text{ mho/m}$, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: E Device Section

DASY4 Configuration:
 - Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2005-04-27
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE4 Sn614; Calibrated: 2005-04-21
 - Phantom: HAC Test Arch; Type: SDHAC P01 BA


E Scan 10mm above Device Reference/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 89.8 V/m
 Probe Modulation Factor = 0.990
 Reference Value = 89.7 V/m; Power Drift = -0.100 dB
Hearing Aid Hear-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
42.8	37.2	33.6
Grid 4	Grid 5	Grid 6
40.8	39.3	35.1
Grid 7	Grid 8	Grid 9
39.2	33.2	29.6

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

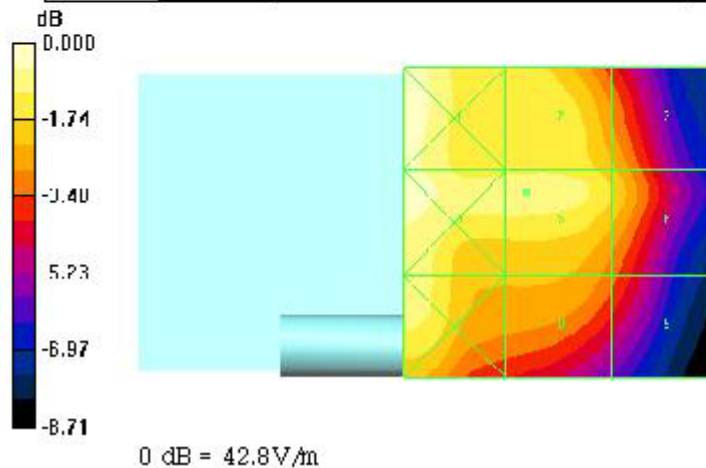

Test Laboratory : HCT
Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA / Antenna : In / Channel : 777
Date Tested : December 27, 2005

DUT: TX-215A; Type: Folder (Ant in); Serial: #1
Program Name: HAC E Device

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
Phantom section: E Device Section

DASY4 Configuration:
- Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2005-04-27
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn614; Calibrated: 2005-04-21
- Phantom: HAC Test Arch; Type: SD HAC P01 BA


E Scan 10mm above Device Reference/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm
Maximum value of peak Total field = 40.4 V/m
Probe Modulation Factor = 0.880
Reference Value = 40.7 V/m; Power Drift = -0.037 dB
Hearing Aid Hear-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
34.4	38.7	36.8
Grid 4	Grid 5	Grid 6
36.6	40.4	38.4
Grid 7	Grid 8	Grid 9
31.5	35.4	33.6

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

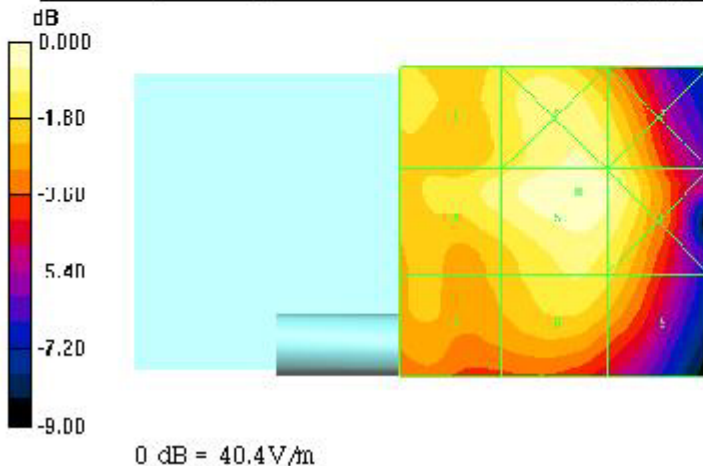

Test Laboratory : HCT
 Company : PANTECH&CURITEL COMMUNICATIONS, INC.
 Mode : CDMA / Antenna : Out / Channel : 777
 Date Tested : December 27, 2005

DUT: TX-215A; Type: Folder (Ant in); Serial: #1
Program Name: HAC E Device

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Device Section

DASY4 Configuration:
 - Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2005-04-27
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE4 Sn614; Calibrated: 2005-04-21
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA


E Scan 10mm above Device Reference/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 38.7 V/m
 Probe Modulation Factor = 0.990
 Reference Value = 89.8 V/m; Power Drift = 0.019 dB
Hearing Aid Hear-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
37.8	36.9	34.7
Grid 4	Grid 5	Grid 6
37.1	38.7	36.3
Grid 7	Grid 8	Grid 9
35.1	33.3	31.2

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

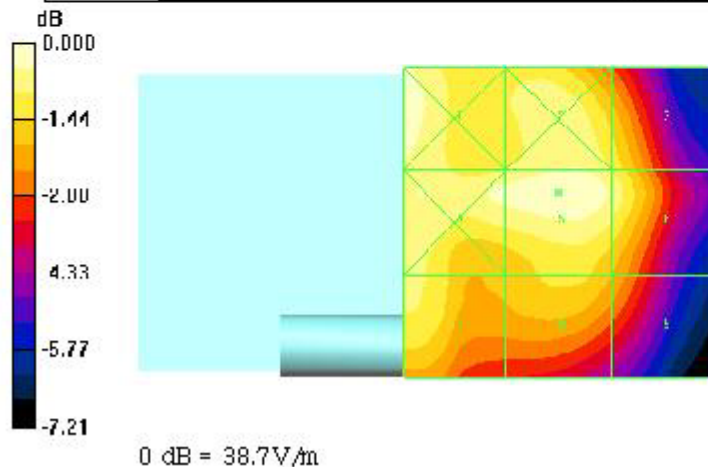

Test Laboratory : HCT
 Company : PANTECH&CURITEL COMMUNICATIONS, INC.
 Mode : PCS / Antenna : In / Channel : 25
 Date Tested : December 27, 2005

DUT: TX-215A; Type: Folder (Ant in); Serial: #1
Program Name: HAC E Device

Communication System: PCS1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Device Section

DASY4 Configuration:
 - Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2005-04-27
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE4 Sn614; Calibrated: 2005-04-21
 - Phantom: HAC Test Arch; Type: SDHAC P01 BA


E Scan 10mm above Device Reference/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 20.7 V/m
 Probe Modulation Factor = 1.01
 Reference Value = 16.5 V/m; Power Drift = -0.024 dB
Hearing Aid Hear-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
18.7	16.5	16.5
Grid 4	Grid 5	Grid 6
15.8	20.7	20.7
Grid 7	Grid 8	Grid 9
17.8	20.9	20.8

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

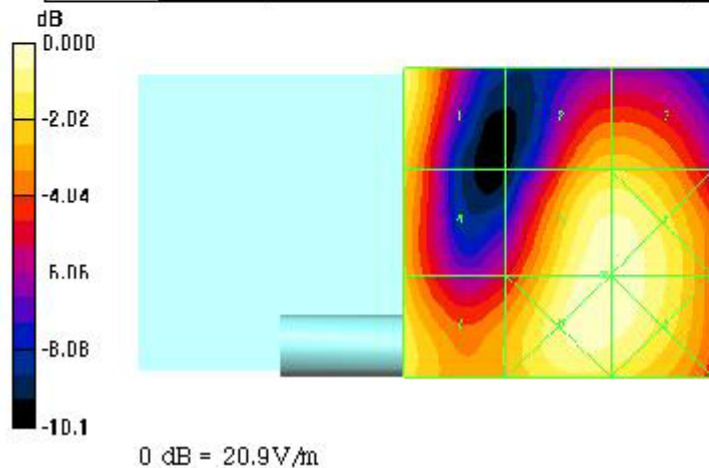

Test Laboratory : HCT
 Company : PANTECH&CURITEL COMMUNICATIONS, INC.
 Mode : PCS / Antenna : Out / Channel : 25
 Date Tested : December 27, 2005

DUT: TX-215A; Type: Folder (Ant in); Serial: #1
Program Name: HAC E Device

Communication System: PCS1900; Frequency: 1851.25 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Device Section

DASY4 Configuration:
 - Probe: ER3DV6 - SN2343; CorvF(1, 1, 1); Calibrated: 2005-04-27
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE4 Sn614; Calibrated: 2005-04-21
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA


E Scan 10mm above Device Reference/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm dy=5mm
 Maximum value of peak Total field = 23.0 V/m
 Probe Modulation Factor = 1.01
 Reference Value = 21.8 V/m; Power Drift = 0.078 dB
Hearing Aid Hear-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
20.6	22.6	21.5
Grid 4	Grid 5	Grid 6
21.4	23.0	21.8
Grid 7	Grid 8	Grid 9
16.5	17.9	17.1

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

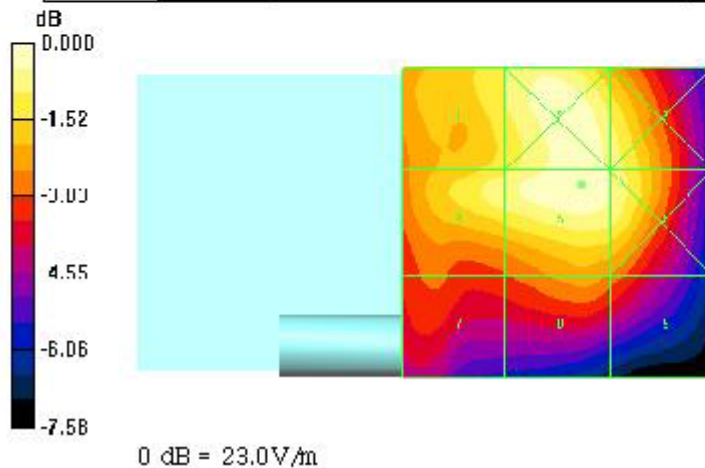

Test Laboratory : HCT
 Company : PANTECH&CURITEL COMMUNICATIONS, INC.
 Mode : PCS / Antenna : In / Channel : 800
 Date Tested : December 27, 2005

DUT: TX-215A; Type: Folder (Ant in); Serial: #1
Program Name: HAC E Device

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Device Section

DASY4 Configuration:
 - Probe : ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2005-04-27
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE4 Sn614; Calibrated: 2005-04-21
 - Phantom: HAC Test Arch; Type: SDHAC P01 BA


E Scan 10mm above Device Reference/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm dy=5mm
 Maximum value of peak Total field = 31.6 V/m
 Probe Modulation Factor = 1.01
 Reference Value = 25.1 V/m; Power Drift = -0.011 dB
Hearing Aid Hear-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
23.6	24.6	24.6
Grid 4	Grid 5	Grid 6
18.5	31.6	31.3
Grid 7	Grid 8	Grid 9
25.5	32.0	31.4

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

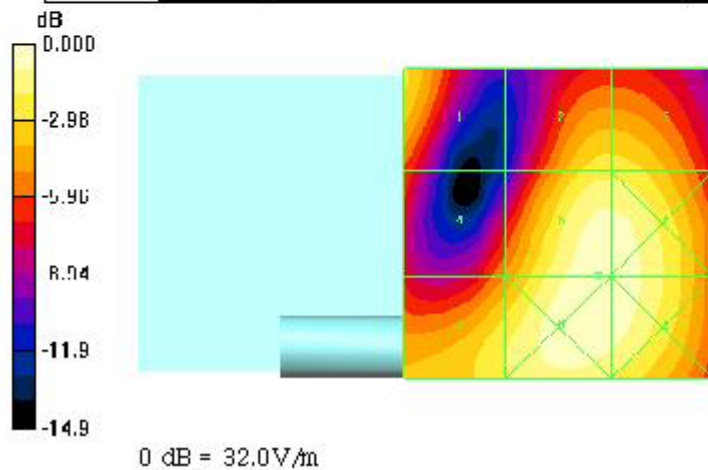

Test Laboratory : HCT
 Company : PANTECH&CURITEL COMMUNICATIONS, INC.
 Mode : PCS / Antenna : Out / Channel : 600
 Date Tested : December 27, 2005

DUT: TX-215A; Type: Folder (Ant in); Serial: #1
Program Name: HAC E Device

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Device Section

DASY4 Configuration:
 - Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2005-04-27
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE4 Sn614; Calibrated: 2005-04-21
 - Phantom: HAC Test Arch; Type: SD HAC P01 BA


E Scan 10mm above Device Reference/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm dy=5mm
 Maximum value of peak Total field = 25.3 V/m
 Probe Modulation Factor = 1.01
 Reference Value = 24.1 V/m; Power Drift = -0.088 dB
Hearing Aid Hear-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
23.7	24.9	22.8
Grid 4	Grid 5	Grid 6
24.6	25.3	23.4
Grid 7	Grid 8	Grid 9
20.1	20.3	18.5

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

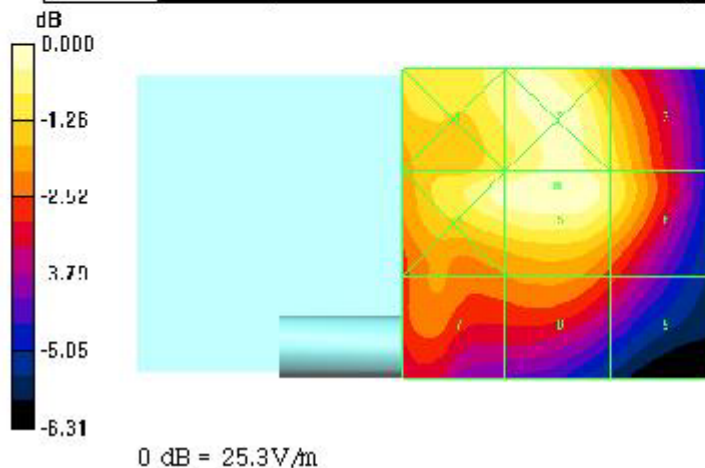

Test Laboratory : HCT
 Company : PANTECH&CURITEL COMMUNICATIONS, INC.
 Mode : PCS / Antenna : In / Channel : 1175
 Date Tested : December 27, 2005

DUT: TX-215A; Type: Folder (Ant in); Serial: #1
Program Name: HAC E Device

Communication System: PCS1900; Frequency: 1908.75 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
 Phantom section: E Device Section

DASY4 Configuration:
 - Probe: ER3DV6 - SN2343; ConvF(1, 1, 1); Calibrated: 2005-04-27
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE4 Sn614; Calibrated: 2005-04-21
 - Phantom: HAC Test Arch; Type: SDHAC P01 BA

E Scan 10mm above Device Reference/Hearing Aid Compatibility Test (101x101x1):

Measurement grid: dx=5mm, dy=5mm
 Maximum value of peak Total field = 25.4 V/m
 Probe Modulation Factor = 1.01
 Reference Value = 16.8 V/m; Power Drift = -0.018 dB
Hearing Aid Hear-Field Category: M4 (AWF 0 dB)

Peak E-field in V/m

Grid 1	Grid 2	Grid 3
25.8	19.3	19.7
Grid 4	Grid 5	Grid 6
20.0	24.7	24.8
Grid 7	Grid 8	Grid 9
21.2	25.4	25.3

Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19
	-5	<47.3	<0.15

