


Dielectric Chip Antenna




■ Test Radiation Pattern for ZEPHYR

항 목				특 성
Frequency Range [MHz]				2400 ~ 2485
SWR [Max]				3 : 1 (Typ 2.5 : 1)
Input Impedance [Ω]				50 Ohm
Polarization				Linear
Gain [dBi]	Total Gain (Peak / Avg) [dBi]			1.81 / -4.15
	Azimuth	Theta	Peak	-5.09
			Average	-8.64
		Phi	Peak	-6.50
			Average	-11.33
	Elevation 1	Theta	Peak	-0.52
			Average	-5.82
		Phi	Peak	1.55
			Average	-5.55
	Elevation 2	Theta	Peak	-11.46
			Average	-16.63
		Phi	Peak	1.81
			Average	-4.15


Dielectric Chip Antenna

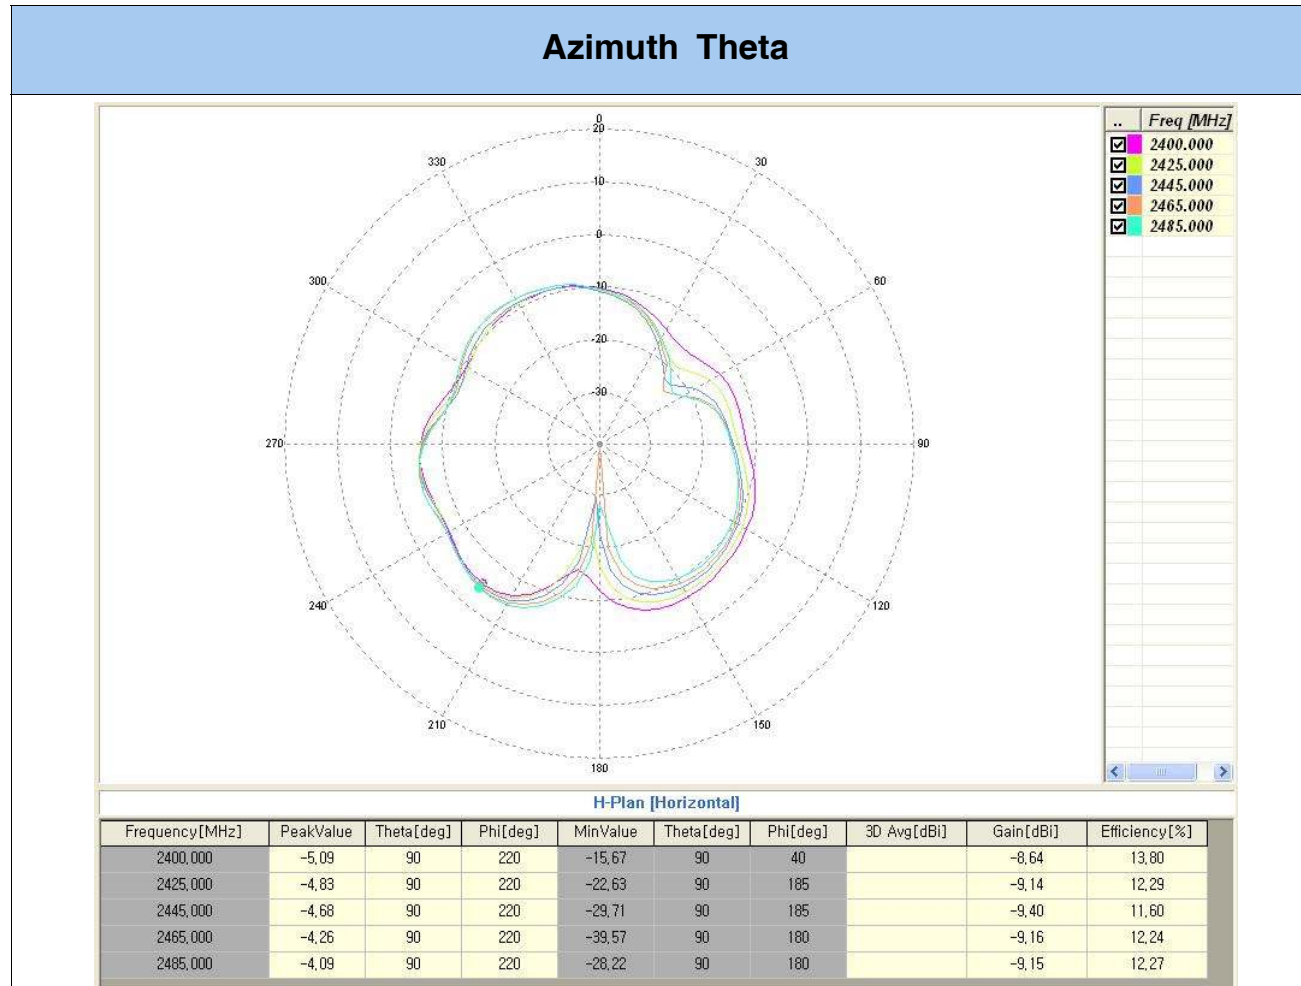


Dielectric Chip Antenna

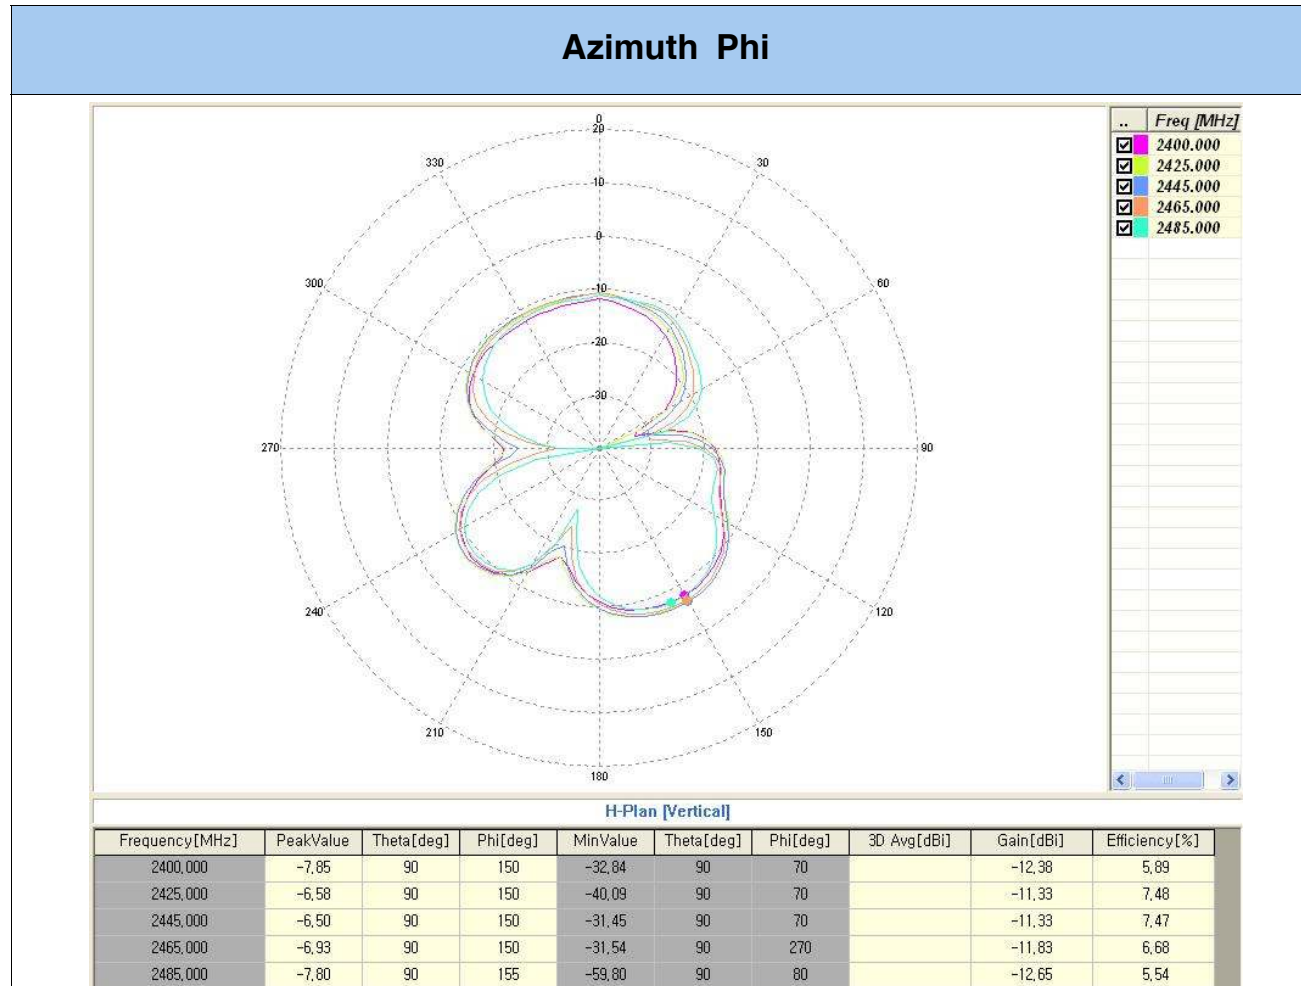


Dielectric Chip Antenna

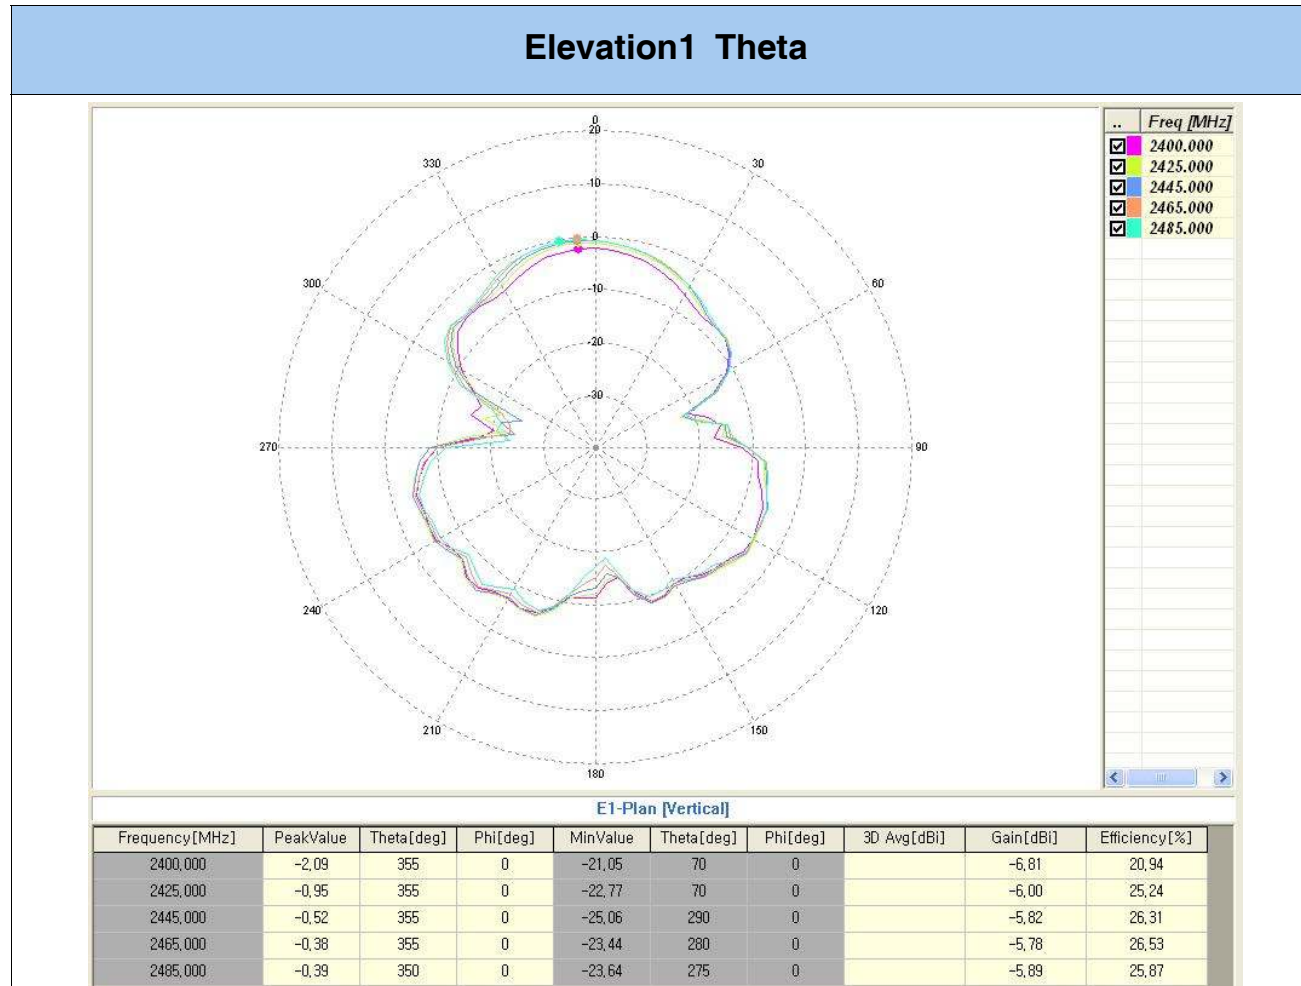

Dielectric Chip Antenna

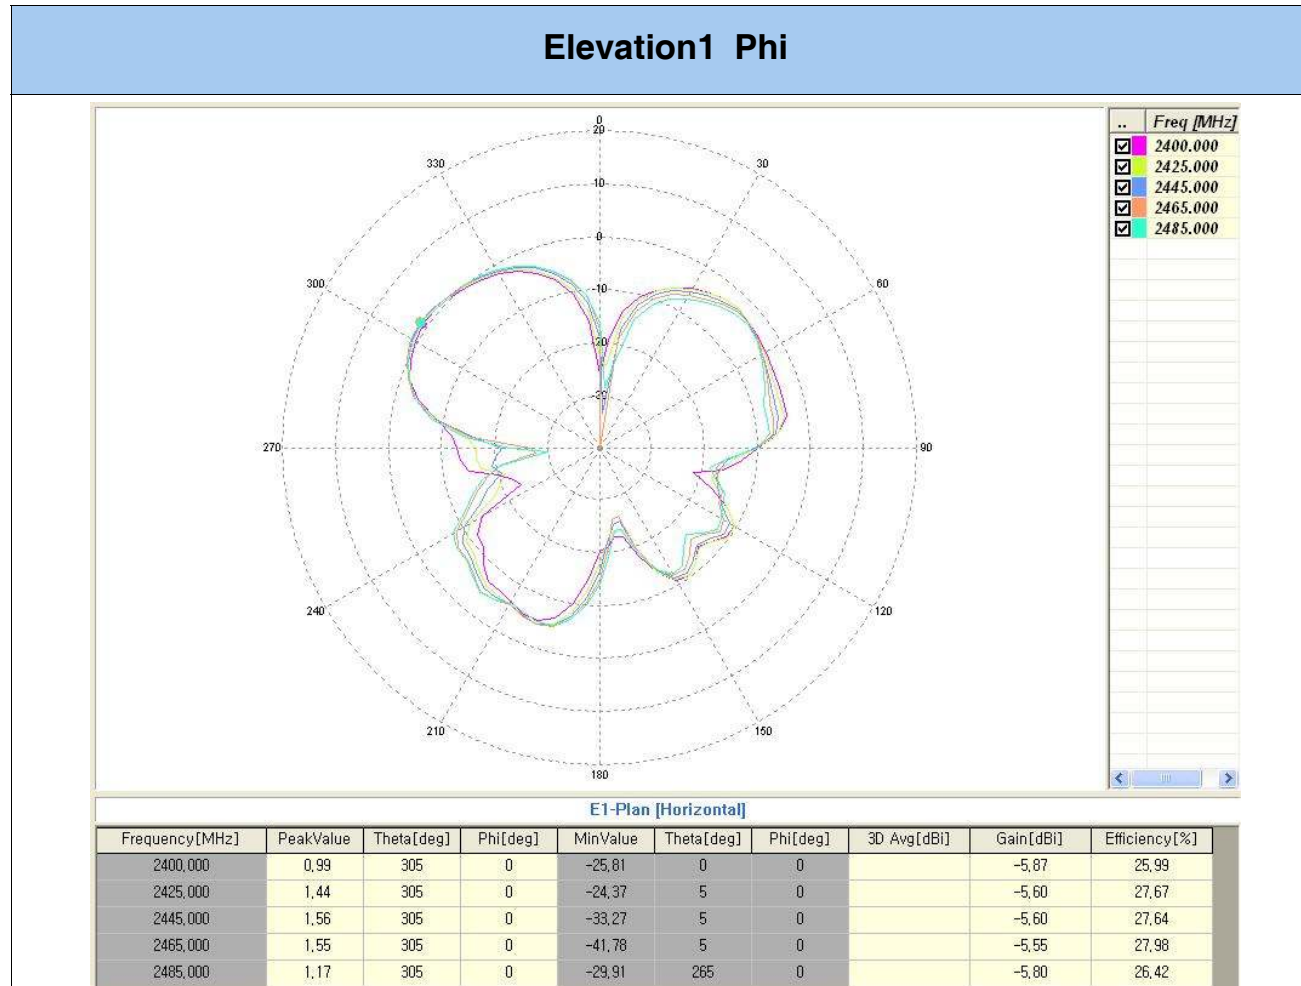

Dielectric Chip Antenna

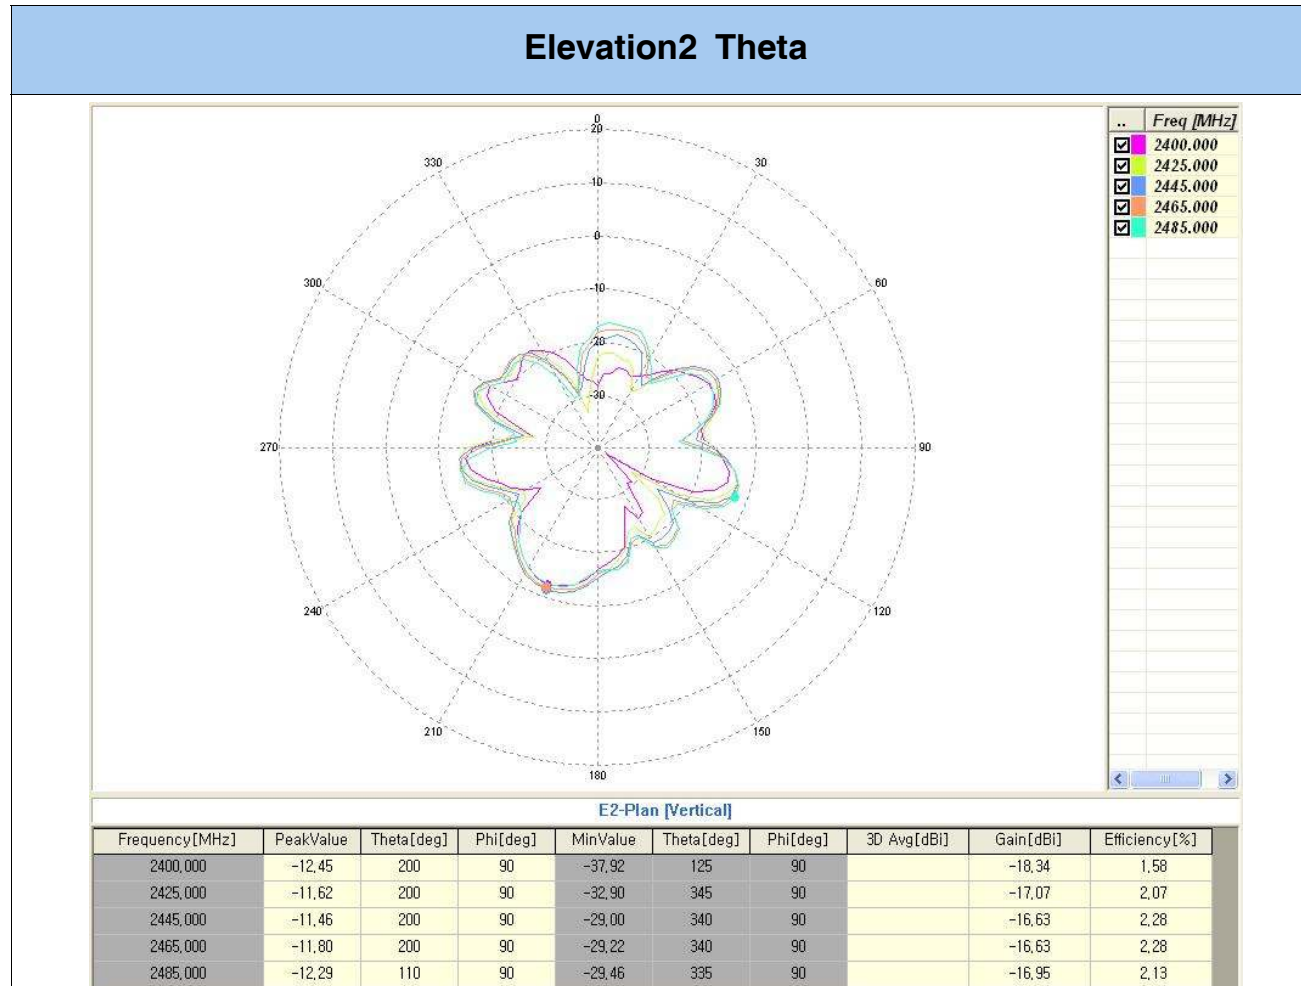

Dielectric Chip Antenna

