


## Appendix D. Co-location Report

## 1. Results of Radiated Emissions for Co-located


Temperature	23°C	Humidity	62%
Test Engineer	Sean Ku	Configurations	2.4GHz Bluetooth + 2.4GHz WLAN

### Horizontal

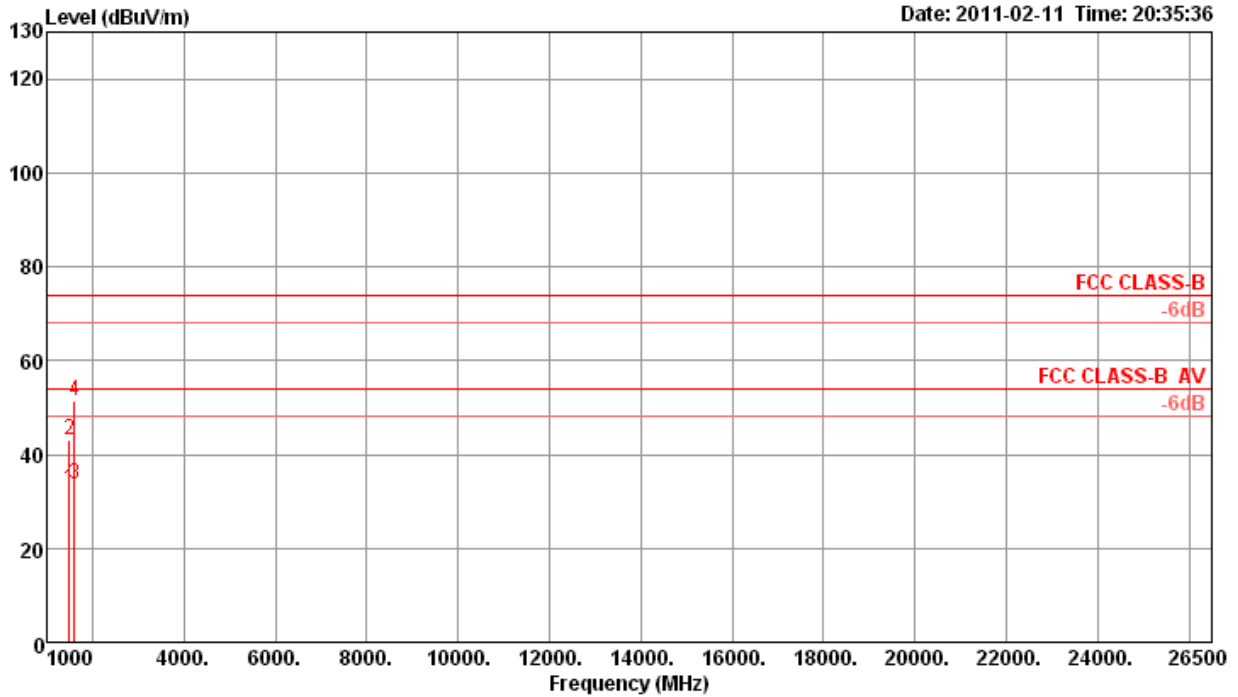

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	1497.33	32.53	54.00	-21.47	39.51	2.32	34.90	25.60	184	100	Average	HORIZONTAL
2	1497.48	43.18	74.00	-30.82	50.16	2.32	34.90	25.60	184	100	Peak	HORIZONTAL
3 a	1595.64	33.61	54.00	-20.39	40.34	2.31	34.90	25.86	192	100	Average	HORIZONTAL
4 p	1598.74	51.27	74.00	-22.73	58.00	2.31	34.90	25.86	192	100	Peak	HORIZONTAL

Vertical

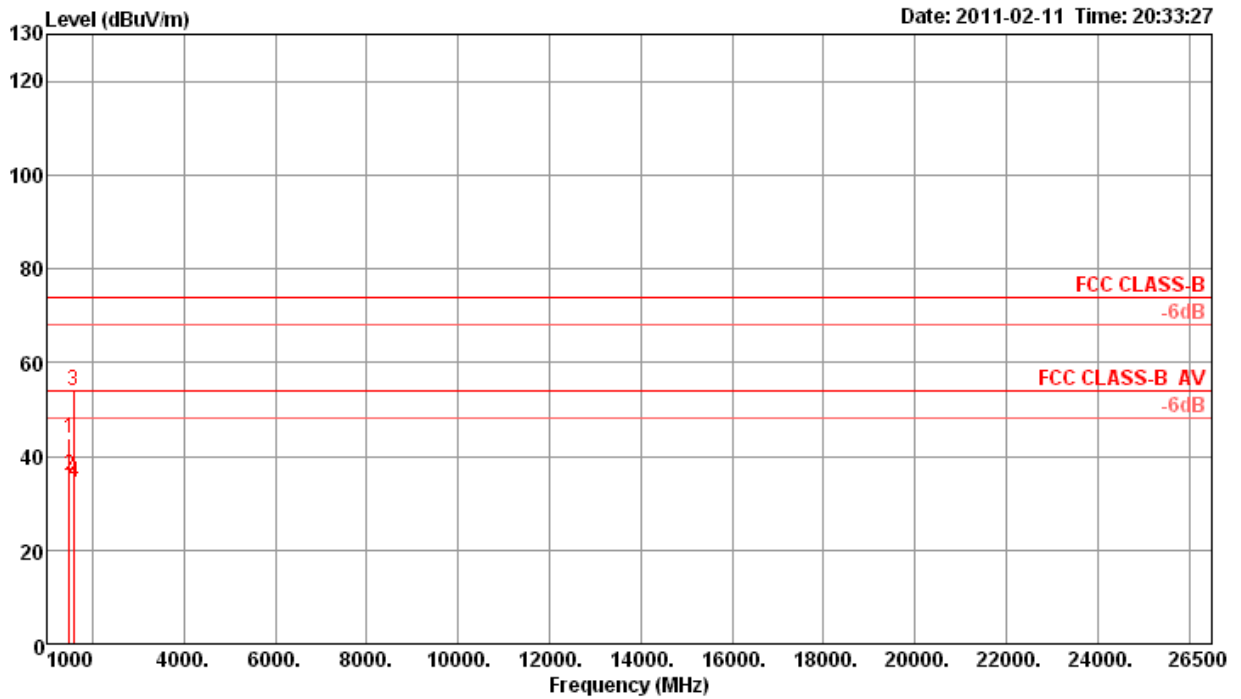

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	1497.19	43.65	74.00	-30.35	50.63	2.32	34.90	25.60	266	100	Peak	VERTICAL
2 a	1497.24	35.76	54.00	-18.24	42.74	2.32	34.90	25.60	266	100	Average	VERTICAL
3 p	1594.64	53.95	74.00	-20.05	60.68	2.31	34.90	25.86	96	100	Peak	VERTICAL
4	1596.40	34.50	54.00	-19.50	41.23	2.31	34.90	25.86	96	100	Average	VERTICAL