



**FCC 47 CFR PART 15 SUBPART C &
INDUSTRY CANADA RSS-210**

TEST REPORT

For

802.11n 1x1 PCIe Minicard transceiver

Model: AR5B95

Trade Name: Atheros

Issued to

**Atheros Communications, Inc.
5480 Great America Parkway Santa Clara CA 95054**

Issued by

**Compliance Certification Services Inc.
No. 11, Wu-Gong 6th Rd., Wugu Industrial Park,
Taipei Hsien 248, Taiwan (R.O.C.)
<http://www.ccsemc.com.tw>
service@tw.ccsemc.com**



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

- 1. TEST RESULT CERTIFICATION.....3**
- 2. EUT DESCRIPTION4**
- 3. TEST METHODOLOGY5**
 - 3.1 EUT CONFIGURATION5
 - 3.2 EUT EXERCISE.....5
 - 3.3 GENERAL TEST PROCEDURES.....5
 - 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....6
 - 3.5 DESCRIPTION OF TEST MODES7
- 4. INSTRUMENT CALIBRATION.....8**
 - 4.1 MEASURING INSTRUMENT CALIBRATION8
 - 4.2 MEASUREMENT EQUIPMENT USED8
- 5. FACILITIES AND ACCREDITATIONS9**
 - 5.1 FACILITIES9
 - 5.2 EQUIPMENT.....9
 - 5.3 LABORATORY ACCREDITATIONS AND LISTING.....9
 - 5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....10
- 6. SETUP OF EQUIPMENT UNDER TEST11**
 - 6.1 SETUP CONFIGURATION OF EUT.....11
 - 6.2 SUPPORT EQUIPMENT11
- 7. APPLICABLE RULES FOR INDUSTRY CANADA RSS-21012**
- 8. FCC PART 15.247 REQUIREMENTS & RSS-210 REQUIREMENTS.....18**
 - 8.1 99% BANDWIDTH18
 - 8.2 6DB BANDWIDTH26
 - 8.3 PEAK POWER.....34
 - 8.4 AVERAGE POWER.....42
 - 8.5 BAND EDGES MEASUREMENT50
 - 8.6 PEAK POWER SPECTRAL DENSITY115
 - 8.7 SPURIOUS EMISSIONS.....123
 - 8.8 RADIATED EMISSIONS130
 - 8.9 POWERLINE CONDUCTED EMISSIONS.....183
- APPENDIX I RADIO FREQUENCY EXPOSURE.....186**
- APPENDIX II PHOTOGRAPHS OF TEST SETUP.....189**



1. TEST RESULT CERTIFICATION

Applicant: Atheros Communications, Inc.
5480 Great America Parkway Santa Clara CA 95054

Equipment Under Test: 802.11n 1x1 PCIe Minicard transceiver

Trade Name: Atheros

Model: AR5B95

Date of Test: November 23 ~ December 8, 2008

| APPLICABLE STANDARDS | |
|--|-------------------------|
| STANDARD | TEST RESULT |
| FCC 47 CFR Part 15 Subpart C & INDUSTRY CANADA RSS-210 | No non-compliance noted |

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 and Industry Canada RSS-210.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Rex Lai
Section Manager
Compliance Certification Services Inc.

Amanda Wu
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

| | | | | |
|------------------------------|--|------------------------|---------------------------|--------------------------|
| Product | 802.11n 1x1 PCIe Minicard transceiver | | | |
| Trade Name | Atheros | | | |
| Model Number | AR5B95 | | | |
| Model Discrepancy | N/A | | | |
| Power Supply | Powered by host device | | | |
| Frequency Range | IEEE 802.11b: 2412 ~ 2462 MHz IEEE 802.11g: 2412 ~ 2462 MHz draft 802.11n Standard-20 MHz: 2412 ~ 2462 MHz draft 802.11n Standard-40 MHz: 2422 ~ 2452 MHz | | | |
| Transmit Power | Mode | Frequency Range | Output Power (dBm) | Output Power (mw) |
| | 802.11b | 2412 - 2462 | 21.13 | 129.7179 |
| | 802.11g | 2412 - 2462 | 25.21 | 331.8945 |
| | 802.11n Standard-20 MHz | 2412 - 2462 | 25.28 | 337.2873 |
| | 802.11n Standard-40 MHz | 2422 - 2452 | 21.95 | 156.6751 |
| Modulation Technique | IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) draft 802.11n Standard-20 MHz Channel mode: OFDM (6.5, 7.2, 13, 14.4, 14.44, 19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps) draft 802.11n Wide-40 MHz Channel mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150, 162, 180, 216, 240, 243, 270, 300 Mbps) | | | |
| Number of Channels | IEEE 802.11b/g mode: 11 Channels draft 802.11n Standard-20 MHz Channel mode: 11 Channels draft 802.11n Wide-40 MHz Channel mode: 7 Channels | | | |
| Antenna Specification | 1. PIFA Antenna / Gain: 3.62 dBi 2. Dipole Antenna / Gain: 3.2 dBi | | | |

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **PPD-AR5B95** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 2, and RSS-210 Issue 7.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

The tests documented in this report were performed in accordance with IC RSS-210, IC RSS-Gen, IC RSS-102, and ANSI C63.4.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|---------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.52525 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 156.7 - 156.9 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 162.0125 - 167.17 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 167.72 - 173.2 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 240 - 285 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | 322 - 335.4 | | |

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



DESCRIPTION OF TEST MODES

The EUT is an 802.11n 1x1 PCIe Minicard transceiver, with both full length and half length boards.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

Both half length and full length boards were evaluated on conducted and radiated emissions tests to find the worst case.

For RF conducted emissions, all tests were performed on full length board.

For RF radiated emissions, all tests were performed on both half and full length boards.

All final tests in the 802.11b mode were made at 1 Mb/s.

All final tests in the 802.11g mode were made at 6 Mb/s.

All final tests in the 802.11n HT20 mode were made at 6.5Mbps.

All final tests in the 802.11n HT40 mode were made at 13.5Mbps

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.



4. INSTRUMENT CALIBRATION

MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

| Conducted Emissions Test Site | | | | |
|-------------------------------|--------------|--------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilent | E4446A | MY43360131 | 02/24/2009 |

| 3M Semi Anechoic Chamber | | | | |
|--------------------------|-----------------|-------------------|--------------------------------------|--------------------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| Spectrum Analyzer | Agilent | E4446A | US42510252 | 09/10/2009 |
| Test Receiver | Rohde&Schwarz | ESCI | 100064 | 11/30/2009 |
| Switch Controller | TRC | Switch Controller | SC94050010 | 05/03/2009 |
| 4 Port Switch | TRC | 4 Port Switch | SC94050020 | 05/03/2009 |
| Horn-Antenna | TRC | HA-0502 | 06 | 06/04/2009 |
| Horn-Antenna | TRC | HA-0801 | 04 | 06/18/2009 |
| Horn-Antenna | TRC | HA-1201A | 01 | 08/10/2009 |
| Horn-Antenna | TRC | HA-1301A | 01 | 08/11/2009 |
| Bilog- Antenna | Sunol Sciences | JB3 | A030205 | 03/28/2009 |
| Turn Table | Max-Full | MFT-120S | T120S940302 | N.C.R. |
| Antenna Tower | Max-Full | MFA-430 | A440940302 | N.C.R. |
| Controller | Max-Full | MF-CM886 | CC-C-1F-13 | N.C.R. |
| Site NSA | CCS | N/A | FCC MRA: TW1309 IC: IC 2324G-1/-2 | 10/17/2010 11/04/2010 |
| Test S/W | LABVIEW (V 6.1) | | | |

Remark: The measurement uncertainty is less than $\pm 3.7046\text{dB}$ (30MHz ~ 1GHz), $\pm 3.0958\text{dB}$ (Above 1GHz) which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

| Powerline Conducted Emissions Test Site | | | | |
|---|--------------------|--------|---------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due |
| EMI TEST RECEIVER 9kHz-30MHz | ROHDE & SCHWARZ | ESHS30 | 828144/003 | 11/18/2009 |
| TWO-LINE V-NETWORK 9kHz-30MHz | SCHAFFNER | NNB41 | 03/10013 | 06/11/2009 |
| LISN 10kHz-100MHz | EMCO | 3825/2 | 9106-1809 | 04/09/2009 |
| Test S/W | LABVIEW (V 6.1) | | | |

Remark: The measurement uncertainty is less than $\pm 2.81\text{dB}$, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



5. FACILITIES AND ACCREDITATIONS

FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.




Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 0824-01 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC 2324G-1 for 3M Semi Anechoic Chamber A, 2324G-2 for 3M Semi Anechoic Chamber B.

TABLE OF ACCREDITATIONS AND LISTINGS

| Country | Agency | Scope of Accreditation | Logo |
|---------|-----------------|--|---|
| USA | FCC | 3M Semi Anechoic Chamber (FCC MRA: TW1309) to perform FCC Part 15/18 measurements |  FCC MRA: TW1309 |
| Taiwan | TAF | LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11 |  |
| Canada | Industry Canada | 3M Semi Anechoic Chamber (IC 2324G-1 & IC 2324G-2) to perform |  IC 2324G-1 IC 2324G-2 |

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

SUPPORT EQUIPMENT

| No | Equipment | Brand | Model | Series No. | FCC ID | Data Cable | Power Cord |
|----|--|--------|---------------|------------|---|------------|---|
| 1. | Notebook PC | IBM | 2672 (X31) | 9985H9M | WLAN: ANO20030400LEG Bluetooth: ANO20020100MTN | N/A | AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core |
| 2. | Test kit | N/A | N/A | N/A | N/A | N/A | N/A |
| 3. | Super a/g 108Mbps Wireless Lan Router (Remote) | PLANEX | BLW-04SA G | 40DDA0421 | SJ9-BLW54SAG | N/A | Unshielded, 1.8m |

Remark:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*



7. APPLICABLE RULES FOR INDUSTRY CANADA RSS-210

RSS-210 §2 General Certification Requirements and Specifications

RSS-210 §2.1 Frequency Stability

When the carrier frequency stability is not specified, it need not be tested, provided that the carrier frequency is chosen such that the fundamental modulation products (meaning the nominal bandwidth) lie totally within the bands listed in Tables 2, 3, 4 and 5 and do not fall into any restricted band listed in Table 1. Due account shall be taken of carrier frequency drift as a result of aging, temperature, humidity, and supply voltage variations when using frequencies near the band edges.

RSS-210 §2.2 Restricted Bands and Unwanted Emission Frequencies

Restricted bands, identified in Table 1, are designated primarily for safety-of-life services (distress calling and certain aeronautical bands), certain satellite downlinks, radio astronomy, and some government uses. Except where otherwise indicated, the following restrictions apply:

- (a) Fundamental components of modulation of LPDs shall not fall within the restricted bands of Table 1.
- (b) Unwanted emissions falling into restricted bands of Table 1 shall meet Tables 2 and 3 limits. It should also be noted that unwanted emissions falling in non-restricted bands do not need to be suppressed to a level lower than the Table 2 and 3 limits.
- (c) Unwanted emissions not falling within restricted frequency bands may also use the limits specified in the applicable annex.

RSS-210 §2.3 Licence-exempt Receivers

Category I licence-exempt receivers are required to have their spurious emissions comply with Section 7.2.3 of RSS-Gen.

RSS-210 §2.6 General Field Strength Limits

Table 2 and 3 list the permissible levels of unwanted emissions of transmitters and receivers. However, transmitters with field strengths that do not exceed the limits in these tables may also operate in these frequency bands, other than the restricted bands of Table 1 and the TV bands (i.e. unwanted emissions of transmitters and receivers are permitted to fall into Table 1 and TV frequencies but intentional emissions are prohibited). See the note of Table 2 for further details.

**RSS-210 §2.7 Tables****RSS-210 Table 1: Restricted Frequency Bands** ^(Note)

| MHz | MHz | MHz | MHz | GHz |
|-----------------|--------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 8.37625-8.38675 | -- | 1718.8-1722.2 | 9.0-9.2 |
| -- | 8.41425-8.41475 | 156.52475-156.52525 | 2200-2300 | 9.3-9.5 |
| 2.1735-2.1905 | 12.29-12.293 | 156.7-156.9 | 2310-2390 | 10.6-12.7 |
| 3.020-3.026 | 12.51975-12.52025 | -- | -- | 13.25-13.4 |
| 4.125-4.128 | 12.57675-12.57725 | -- | 2655-2900 | 14.47-14.5 |
| 4.17725-4.17775 | 13.36-13.41 | 240-285 | 3260-3267 | 15.35-16.2 |
| 4.20725-4.20775 | 16.42-16.423 | 322-335.4 | 3332-3339 | 17.7-21.4 |
| 5.677-5.683 | 16.69475-16.69525 | 399.9-410 | 3345.8-3358 | 22.01-23.12 |
| 6.215-6.218 | 16.80425-16.80475 | 608-614 | 3500-4400 | 23.6-24.0 |
| 6.26775-6.26825 | 25.5-25.67 | 960-1427 | 4500-5150 | 31.2-31.8 |
| 6.31175-6.31225 | 37.5-38.25 | 1435-1626.5 | 5350-5460 | 36.43-36.5 |
| 8.291-8.294 | 73-74.6; 74.8-75.2 | 1645.5-1646.5 | 7250-7750 | Above 38.6 |
| 8.362-8.366 | 108-138 | 1660-1710 | 8025-8500 | |

Note: Certain frequency bands listed in Table 2 and above 38.6 GHz are designated for low-power licence-exempt applications. These frequency bands and the requirements that apply to the devices are set out in this Standard as well as RSS-310.

RSS-210 Table 2: General Field Strength Limits for Transmitters and Receivers at Frequencies Above 30 MHz ^(Note)

| Frequency (MHz) | Field Strength microvolts/m at 3 metres (watts, e.i.r.p.) | |
|-----------------|--|--------------|
| | Transmitters | Receivers |
| 30-88 | 100 (3 nW) | 100 (3 nW) |
| 88-216 | 150 (6.8 nW) | 150 (6.8 nW) |
| 216-960 | 200 (12 nW) | 200 (12 nW) |
| Above 960 | 500 (75 nW) | 500 (75 nW) |

Note: Transmitting devices are not permitted in Table 1 bands or in TV bands (54-72 MHz, 76-88 MHz, 174-216 MHz, 470-608 MHz, and 614-806 MHz). Prohibition of operation in TV bands does not apply to momentary devices, or to medical telemetry devices in the band 174-216 MHz, and to perimeter protection systems in the bands 54-72 and 76-88 MHz. The perimeter protection devices are to meet Table 3 field strengths limits.

**RSS-210 Table 3: General Field Strength Limits for Transmitters at Frequencies Below 30 MHz (Transmit)**

| Frequency (fundamental or spurious) | Field Strength (microvolts/m) | Magnetic H-Field (microamperes/m) | Measurement Distance (metres) |
|-------------------------------------|-------------------------------|-----------------------------------|-------------------------------|
| 9-490 kHz | 2,400/F (F in kHz) | 2,400/377F (F in Hz) | 300 |
| 490-1.705 kHz | 24,000/F (F in kHz) | 24,000/377F (F in kHz) | 30 |
| 1.705-30 MHz | 30 | N/A | 30 |

Note: The emission limits for the bands 9-90 kHz and 110-490 kHz are based on measurements employing an average detector.

RSS-210 §Annex 8: Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands

This section applies to systems that employ frequency hopping (FH) and digital modulation technology in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. Systems in these bands may employ frequency hopping, digital modulation and or a combination (hybrid) of both techniques.

A frequency hopping system that synchronizes with another or several other systems (to avoid frequency collision among them) via off-air sensing or via connecting cables is not hopping randomly and therefore is not in compliance with RSS-210.

RSS-210 §A8.2 Digital Modulation Systems

These include systems employing digital modulation techniques resulting in spectral characteristics similar to direct sequence systems. The following applies to all three bands.

RSS-210 §A8.4 Transmitter Output Power and e.i.r.p. Requirements

(4) For systems employing digital modulation techniques operating in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands, the maximum peak conducted power shall not exceed 1 W. Except as provided in Section A8.4(5), the e.i.r.p. shall not exceed 4 W.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power (see RSS-Gen)

(5) Point-to-point systems in the bands 2400-2483.5 MHz and 5725-5850 MHz are permitted to have an e.i.r.p. higher than 4 W, provided that the higher e.i.r.p. is achieved by employing higher gain directional antennas and not higher transmitter output powers. Point-to-multipoint systems, omni-directional applications and multiple co-located transmitters transmitting the same information are prohibited from exceeding 4 W e.i.r.p. However, remote stations of point-to-multipoint systems shall be allowed to operate at greater than 4 W e.i.r.p. under the same conditions as for point-to-point systems.

Note: "Fixed, point-to-point operation", excludes point-to-multipoint systems, omnidirectional applications and multiple co-located transmitters transmitting the same information.



RSS-210 §A8.5 Out-of-band Emissions

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required.

RSS-Gen §2 General Information

Unless otherwise indicated, radiocommunications equipment is subject to licensing pursuant to subsection 4(1) of the *Radiocommunication Act*.

RSS-Gen §2.1.2 Category II Equipment

Category II equipment comprises radio devices where a standard has been prescribed but for which a TAC is not required, that is, equipment certification by Industry Canada or a Certification Body (CB) is not required (certification exempt), pursuant to subsection 4(3) of the *Radiocommunication Act*. The manufacturer or importer shall nevertheless ensure that the standards are complied with. A test report shall be available on request and the device shall be properly labelled.

RSS-Gen §2.2 Receivers

Radiocommunication receivers are defined as Category I equipment or Category II equipment by the characteristics outlined below.

RSS-Gen §2.2.1 Category I Equipment Receivers

A receiver is classified as Category I equipment if it meets one of the following conditions:

- (a) is a stand-alone receiver that is tunable to any frequency in the band 30-960 MHz;
- (b) is a receiver that is associated with Category I transmitters; or
- (c) is a scanner receiver.

Except for scanner receivers, which have their own RSSs, Category I receivers shall comply with the limits for receiver spurious emissions set out in Section 6 of this RSS-Gen, and shall be certified under the RSS applicable to the transmitter type with which the receiver is associated or designed to operate (NOT under RSS-Gen).

RSS-Gen §2.2.2 Category II Equipment Receivers

A receiver is classified as Category II equipment if it is not meeting the conditions of Section 2.2.1.

RSS-Gen §2.2.3 Licence-exempt Receivers

Paging receivers, “receive-only” earth stations operating with satellites approved by Industry Canada, and stand-alone receivers which are exempted from licensing, can be classified as either Category I or Category II. These receivers shall comply with the requirements of RSS-210 or RSS-310, respectively.



RSS-Gen §2.3 Licence-exempt Low-power Radiocommunication Devices (LPDs)

Licence-exempt low-power radiocommunication devices are devices which have intentional and unwanted emissions of very low signal levels such that they can co-exist with licensed radio services. LPDs are required to operate on a “no-interference no-protection” basis (i.e. they may not cause radio interference and cannot claim protection from interference). The requirements for LPDs are generally described in Section 7.

RSS-Gen §5.5 Exposure of Humans to RF Fields

Before equipment certification is granted, the applicable requirements of RSS-102 shall be met.

RSS-Gen §6 Receiver Spurious Emission Standard

The following receiver spurious emission limits shall be complied with:

(a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 1.

RSS-Gen Table 1 - Spurious Emission Limits for Receivers

| Frequency (MHz) | Field Strength microvolts/m at 3 metres |
|-----------------|---|
| 30-88 | 100 |
| 88-216 | 150 |
| 216-960 | 200 |
| Above 960 | 500 |

(b) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5 nanowatts above 1 GHz.

RSS-Gen §7.1.4 Transmitter Antenna

A transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. Testing shall be performed using the highest-gain antenna of each combination of transmitter and antenna type for which certification is being sought, with the transmitter output power set at the maximum level. Any antenna of the same type and having equal or lesser gain as an antenna that had been successfully tested for certification with the transmitter, will also be considered certified with the transmitter, and may be used and marketed with the transmitter. The manufacturer shall include with the application for certification a list of acceptable antenna types to be used with the transmitter.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer. Any antenna gain in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power before using the power limits specified in RSS-210 or RSS-310 for devices of RF output powers of 10 milliwatts or less. For devices of output powers greater than 10 milliwatts, except devices subject to RSS-210 Annex 8 (Frequency Hopping and Digital Modulation Systems Operating in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz Bands) or RSS-210 Annex 9 (Local Area Network Devices), the total antenna gain shall be added to the measured RF output power before using the specified power limits. For devices subject to RSS-210 Annex 8 or Annex 9, the antenna gain shall not be added.



RSS-Gen §7.2.2 Transmitter and Receiver AC Power Lines Conducted Emission Limits

Except when the requirements applicable to a given device state otherwise, for any licence-exempt radiocommunication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in Table 2. The tighter limit applies at the frequency range boundaries.

RSS-Gen Table 2 – AC Power Lines Conducted Emission Limits

| Frequency Range (MHz) | Conducted limit (dBµV) | |
|-----------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15 to 0.5 | 66 to 56* | 56 to 46* |
| 0.5 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

**Decreases with the logarithm of the frequency*




8. FCC PART 15.247 REQUIREMENTS & RSS-210 REQUIREMENTS

99% BANDWIDTH

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled.



Test Data

Test mode: IEEE 802.11b mode

| Channel | Frequency (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|---------------------|
| Low | 2412 | 15.7471 |
| Mid | 2437 | 15.8233 |
| High | 2462 | 15.8463 |

Test mode: IEEE 802.11g mode

| Channel | Frequency (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|---------------------|
| Low | 2412 | 17.2904 |
| Mid | 2437 | 17.0652 |
| High | 2462 | 17.1352 |

Test mode: draft 802.11n Standard-20 MHz Channel mode

| Channel | Frequency (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|---------------------|
| Low | 2412 | 18.2507 |
| Mid | 2437 | 18.2120 |
| High | 2462 | 18.1713 |

Test mode: draft 802.11n Standard-40 MHz Channel mode

| Channel | Frequency (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|---------------------|
| Low | 2422 | 36.4438 |
| Mid | 2437 | 36.4542 |
| High | 2452 | 36.4783 |




Test Plot

IEEE 802.11b mode

99% Bandwidth (CH Low)

Agilent 14:16:54 Dec 9, 2008

R T

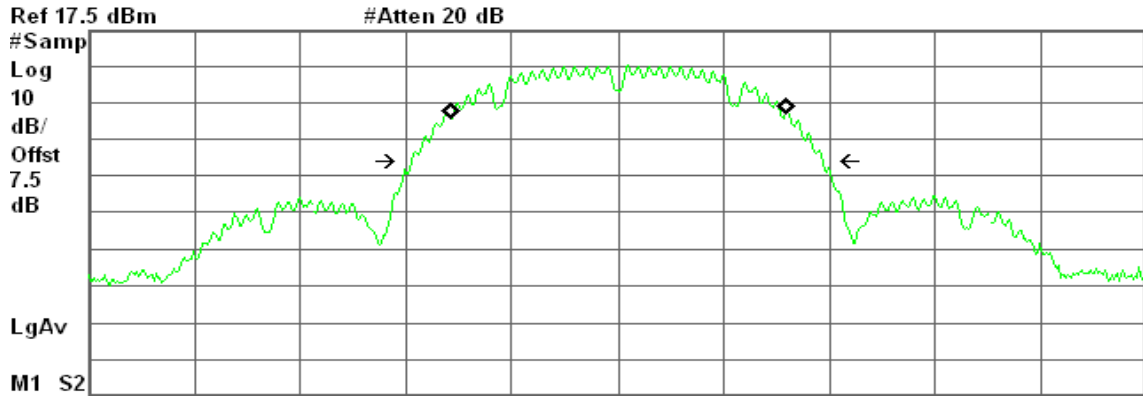

Center 2.412 00 GHz Span 50 MHz
 #Res BW 300 kHz #VBW 1 MHz Sweep 1.68 ms (601 pts)

Occupied Bandwidth
15.7471 MHz


Occ BW % Pwr 99.00 %
 x dB -26.00 dB

Transmit Freq Error 17.994 kHz
 x dB Bandwidth 19.298 MHz*

99% Bandwidth (CH Mid)

Agilent 14:15:33 Dec 9, 2008

R T

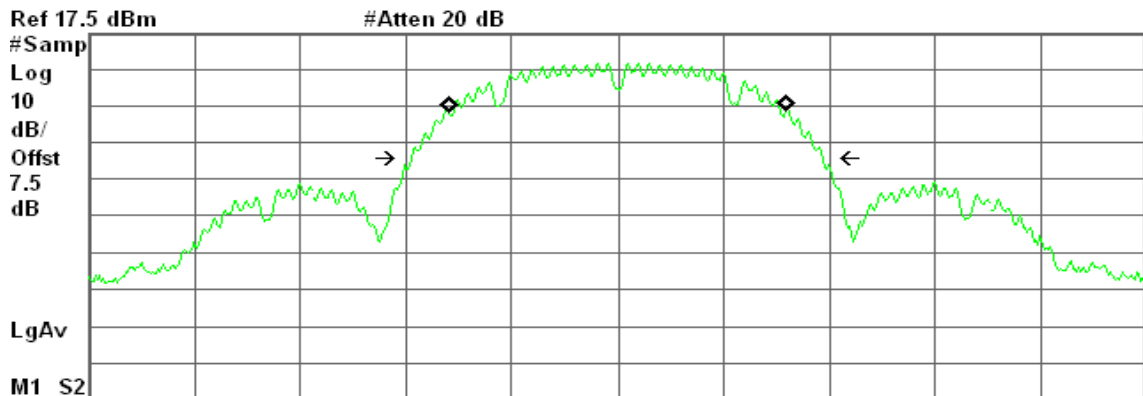

Center 2.437 00 GHz Span 50 MHz
 #Res BW 300 kHz #VBW 1 MHz Sweep 1.68 ms (601 pts)

Occupied Bandwidth
15.8233 MHz

Occ BW % Pwr 99.00 %
 x dB -26.00 dB


Transmit Freq Error 1.945 kHz
 x dB Bandwidth 19.323 MHz*



99% Bandwidth (CH High)

Agilent 14:14:28 Dec 9, 2008

R T

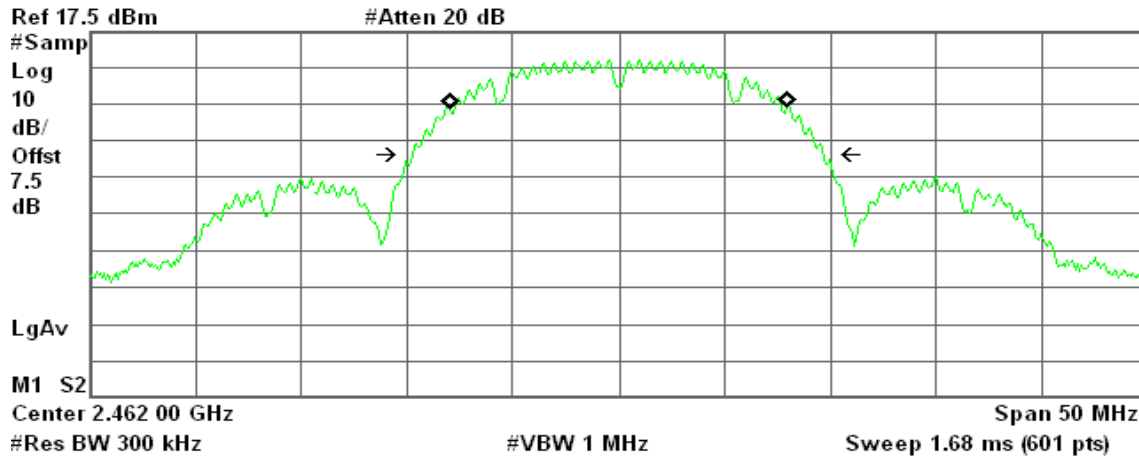

Occupied Bandwidth
15.8463 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error -6.284 kHz
x dB Bandwidth 19.336 MHz*

IEEE 802.11g mode

99% Bandwidth (CH Low)

Agilent 14:09:49 Dec 9, 2008

R T

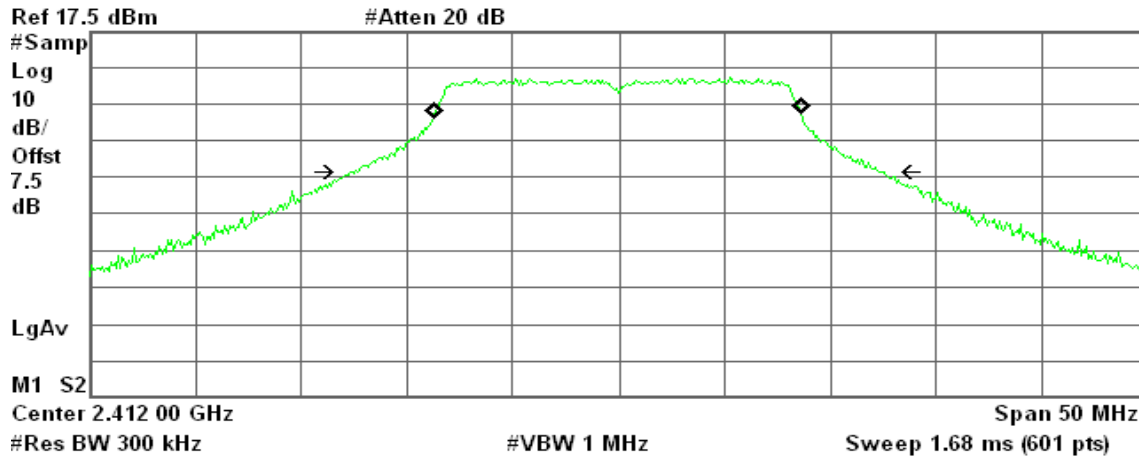

Occupied Bandwidth
17.2904 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error -41.776 kHz
x dB Bandwidth 25.227 MHz*



99% Bandwidth (CH Mid)

Agilent 14:11:53 Dec 9, 2008

R T

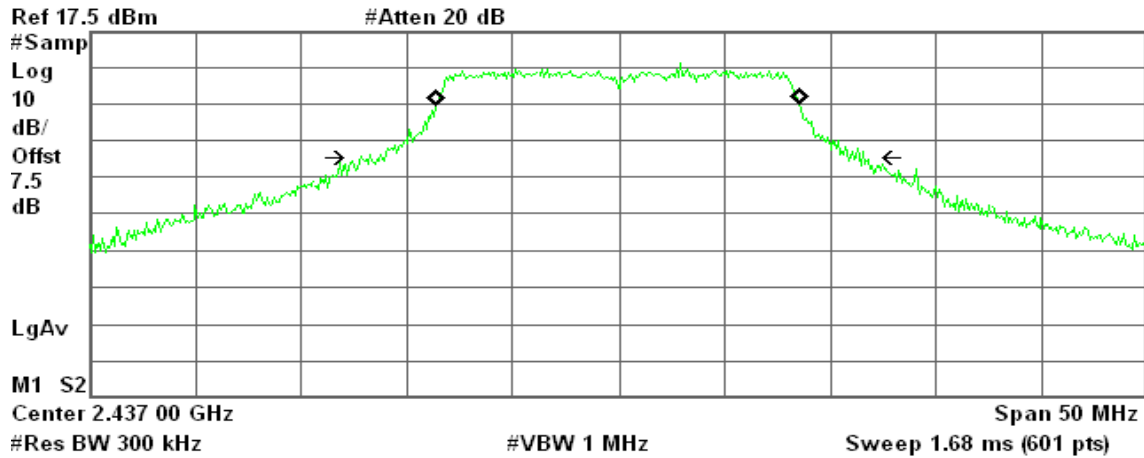

Occupied Bandwidth
17.0652 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -39.050 kHz
x dB Bandwidth 23.811 MHz*

99% Bandwidth (CH High)

Agilent 14:13:23 Dec 9, 2008

R T

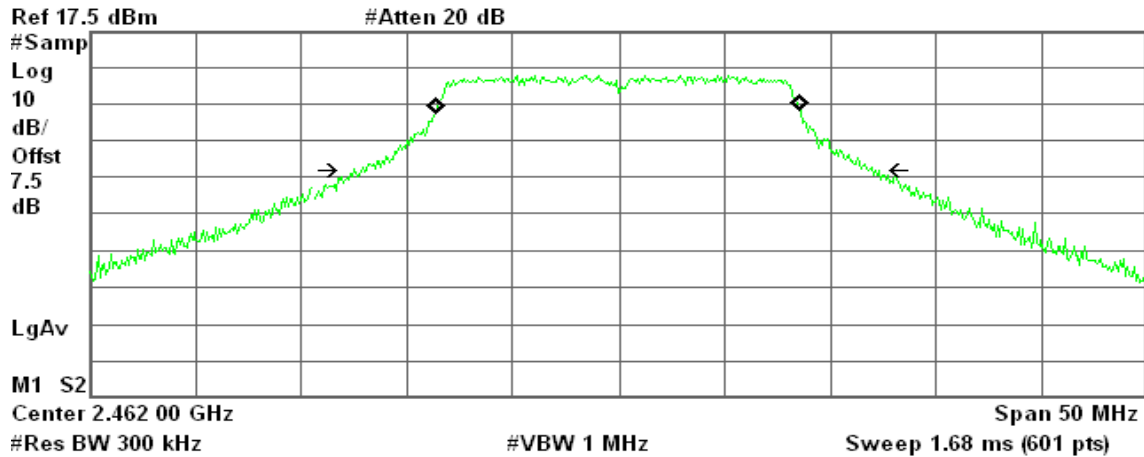

Occupied Bandwidth
17.1352 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error -38.305 kHz
x dB Bandwidth 24.551 MHz*




draft 802.11n Standard-20 MHz Channel mode

99% Bandwidth (CH Low)

Agilent 14:19:40 Dec 9, 2008

R T

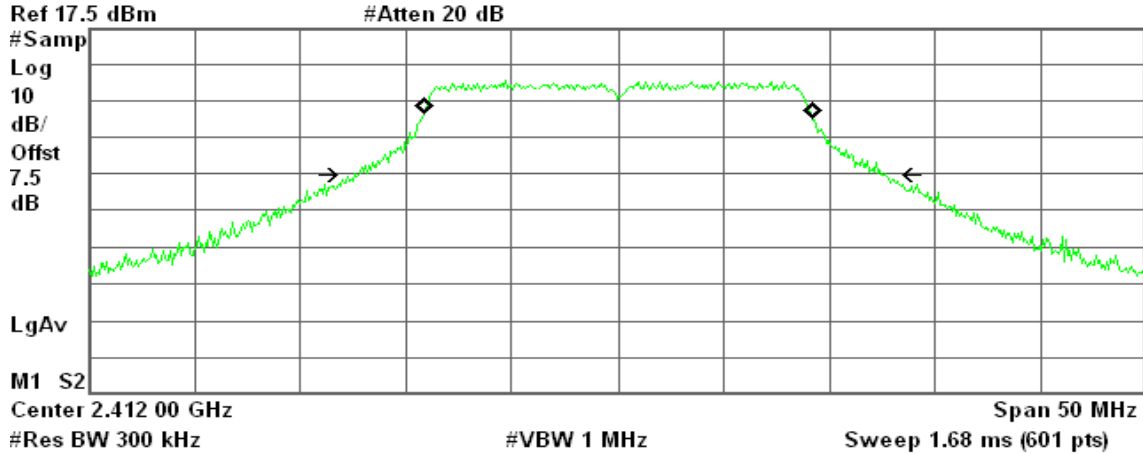

Occupied Bandwidth
18.2507 MHz


Occ BW % Pwr 99.00 %
x dB -26.00 dB

Transmit Freq Error 21.082 kHz
x dB Bandwidth 25.134 MHz*

99% Bandwidth (CH Mid)

Agilent 14:21:00 Dec 9, 2008

R T

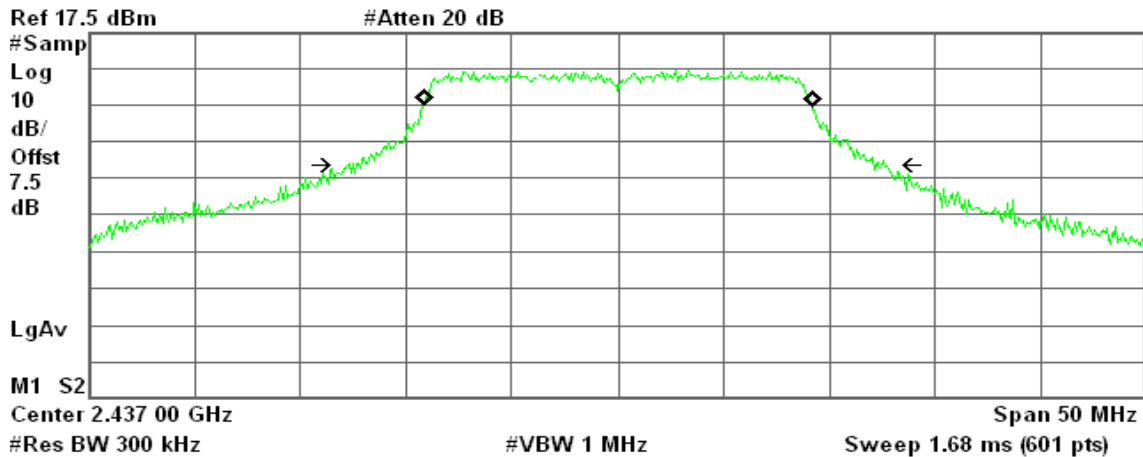

Occupied Bandwidth
18.2120 MHz

Occ BW % Pwr 99.00 %
x dB -26.00 dB


Transmit Freq Error 24.347 kHz
x dB Bandwidth 25.419 MHz*



99% Bandwidth (CH High)

Agilent 14:21:45 Dec 9, 2008

R T

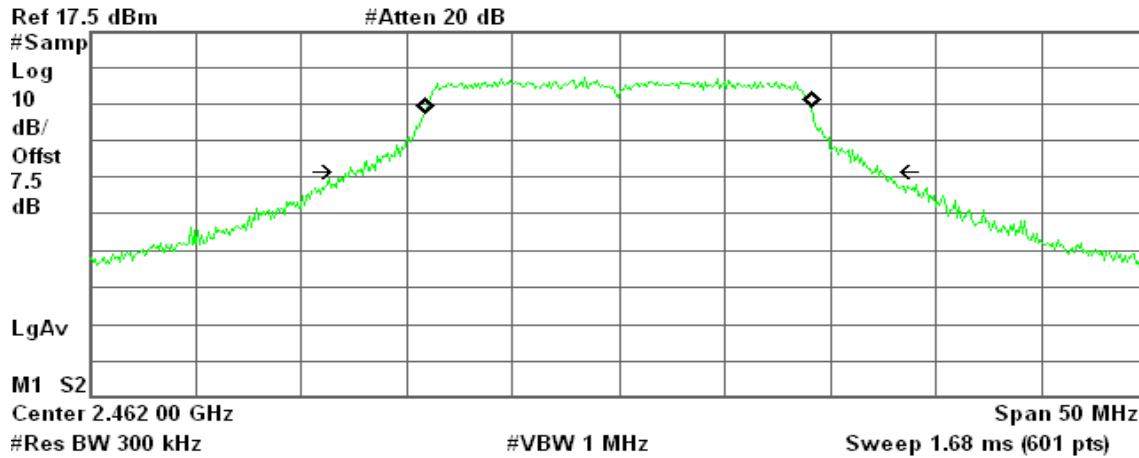

Occupied Bandwidth

18.1713 MHz

| | |
|--------------|-----------|
| Occ BW % Pwr | 99.00 % |
| x dB | -26.00 dB |


| | |
|---------------------|-------------|
| Transmit Freq Error | -6.994 kHz |
| x dB Bandwidth | 25.188 MHz* |

draft 802.11n Wide-40 MHz Channel mode

99% Bandwidth (CH Low)

Agilent 14:25:07 Dec 9, 2008

R T

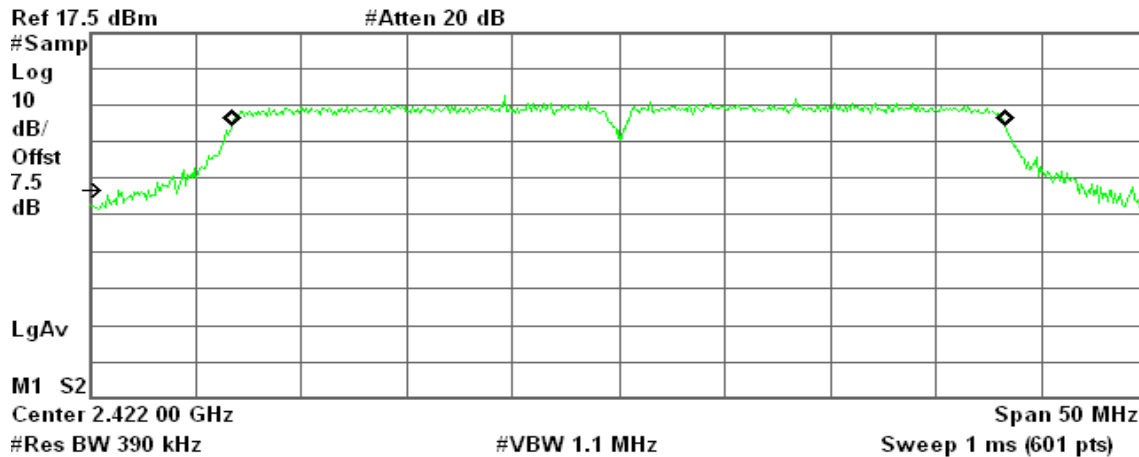

Occupied Bandwidth

36.4438 MHz

| | |
|--------------|-----------|
| Occ BW % Pwr | 99.00 % |
| x dB | -26.00 dB |

| | |
|---------------------|-------------|
| Transmit Freq Error | 8.791 kHz |
| x dB Bandwidth | 48.035 MHz* |



99% Bandwidth (CH Mid)

Agilent 14:24:44 Dec 9, 2008

R T



Ref 17.5 dBm #Atten 20 dB
 #Samp Log 10 dB/Offst 7.5 dB
 LgAv
 M1 S2
 Center 2.437 00 GHz Span 50 MHz
 #Res BW 390 kHz #VBW 1.1 MHz Sweep 1 ms (601 pts)

Occupied Bandwidth
 36.4542 MHz


Occ BW % Pwr 99.00 %
 x dB -26.00 dB

Transmit Freq Error -10.911 kHz
 x dB Bandwidth 48.650 MHz*

99% Bandwidth (CH High)

Agilent 14:24:20 Dec 9, 2008

R T

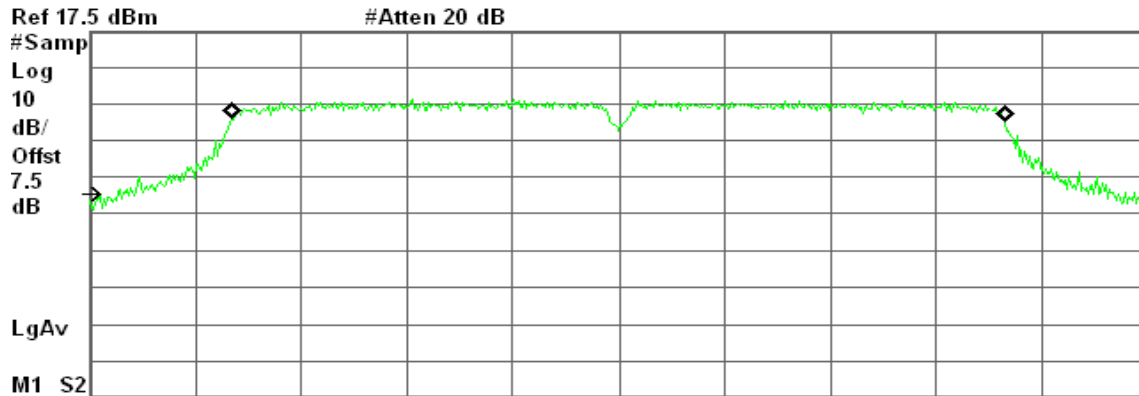

Ref 17.5 dBm #Atten 20 dB
 #Samp Log 10 dB/Offst 7.5 dB
 LgAv
 M1 S2
 Center 2.452 00 GHz Span 50 MHz
 #Res BW 390 kHz #VBW 1.1 MHz Sweep 1 ms (601 pts)

Occupied Bandwidth
 36.4783 MHz

Occ BW % Pwr 99.00 %
 x dB -26.00 dB

Transmit Freq Error -16.148 kHz
 x dB Bandwidth 48.689 MHz*




6DB BANDWIDTH

LIMIT

According to §15.247(a)(2) & RSS-210 §A8.2(1), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = RBW, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted

**Test Data****Test mode: IEEE 802.11b mode**

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | Limit (kHz) | Result |
|---------|-----------------|---------------------|-------------|--------|
| Low | 2412 | 10.00 | >500 | PASS |
| Mid | 2437 | 11.08 | | PASS |
| High | 2462 | 10.00 | | PASS |

Test mode: IEEE 802.11g mode

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | Limit (kHz) | Result |
|---------|-----------------|---------------------|-------------|--------|
| Low | 2412 | 16.50 | >500 | PASS |
| Mid | 2437 | 16.42 | | PASS |
| High | 2462 | 16.50 | | PASS |

Test mode: draft 802.11n Standard-20 MHz Channel mode

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | Limit (kHz) | Result |
|---------|-----------------|---------------------|-------------|--------|
| Low | 2412 | 17.83 | >500 | PASS |
| Mid | 2437 | 17.67 | | PASS |
| High | 2462 | 17.83 | | PASS |

Test mode: draft 802.11n Wide-40 MHz Channel mode

| Channel | Frequency (MHz) | 6dB Bandwidth (MHz) | Limit (kHz) | Result |
|---------|-----------------|---------------------|-------------|--------|
| Low | 2422 | 35.58 | >500 | PASS |
| Mid | 2437 | 36.33 | | PASS |
| High | 2452 | 36.08 | | PASS |



Test Plot

IEEE 802.11b mode

6dB Bandwidth (CH Low)

Agilent 12:56:22 Nov 24, 2008

R T


6dB BW, b Mode Low Ch.

Δ Mkr1 10.00 MHz

Ref 20 dBm

Atten 20 dB

-0.74 dB

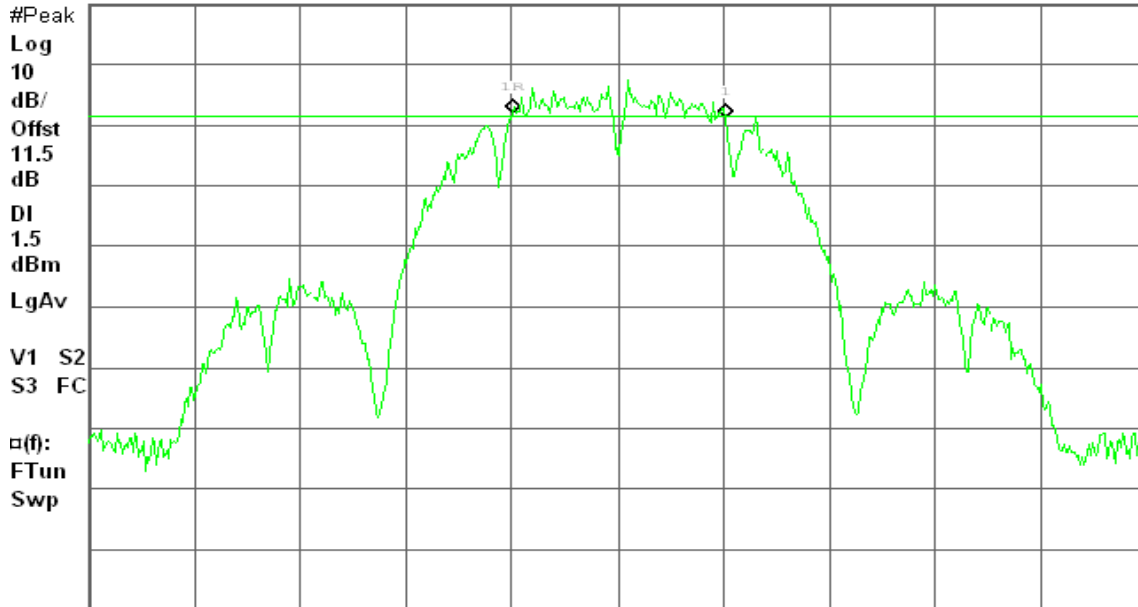

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH Mid)

Agilent 13:03:17 Nov 24, 2008

R T


6dB BW, b Mode Mid Ch.

Δ Mkr1 11.08 MHz

Ref 20 dBm

Atten 20 dB

-0.33 dB

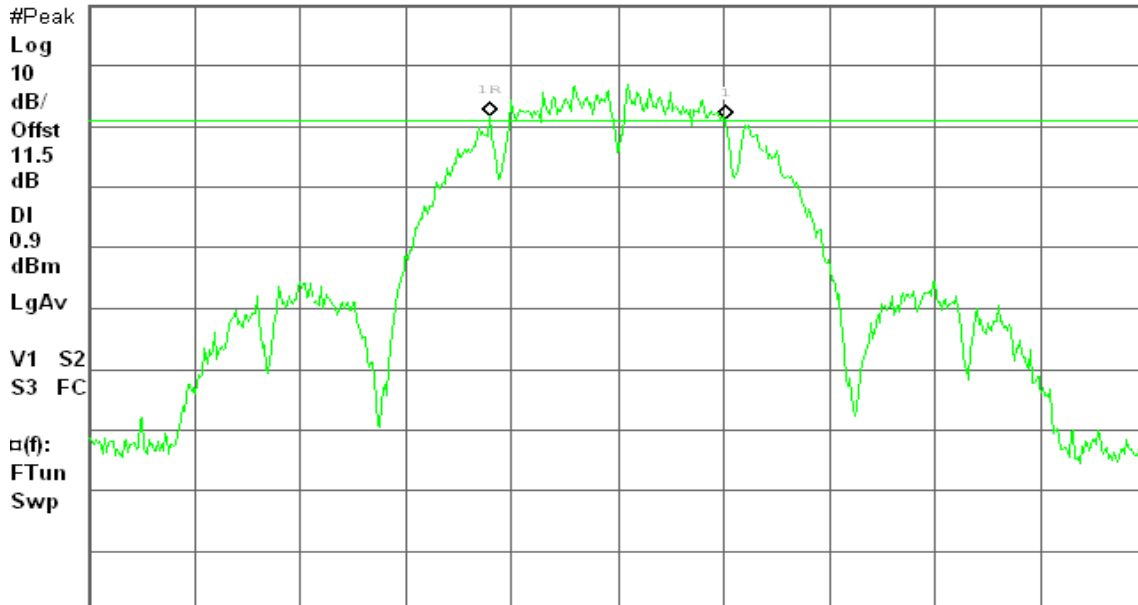

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH High)

Agilent 13:17:50 Nov 24, 2008

R T

6dB BW, b Mode High Ch.

Δ Mkr1 10.00 MHz

Ref 20 dBm

Atten 20 dB

-0.78 dB

#Peak

Log

10

dB/

Offst

11.5

dB

DI

2.7

dBm

LgAv


V1 S2

S3 FC

□(f):

FTun

Swp

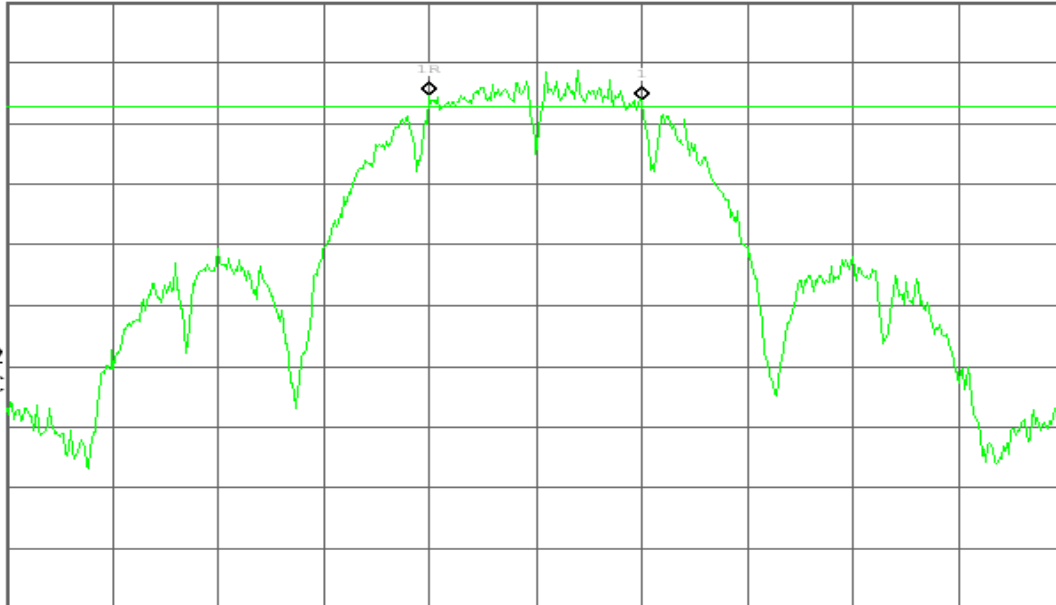

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

IEEE 802.11g mode

6dB Bandwidth (CH Low)

Agilent 12:08:32 Nov 24, 2008

R T

6dB BW, g Mode Low Ch.

Δ Mkr1 16.50 MHz

Ref 20 dBm

Atten 20 dB

0.67 dB

#Peak

Log

10

dB/

Offst

11.5

dB

DI

-5.3

dBm

LgAv


V1 S2

S3 FC

□(f):

FTun

Swp

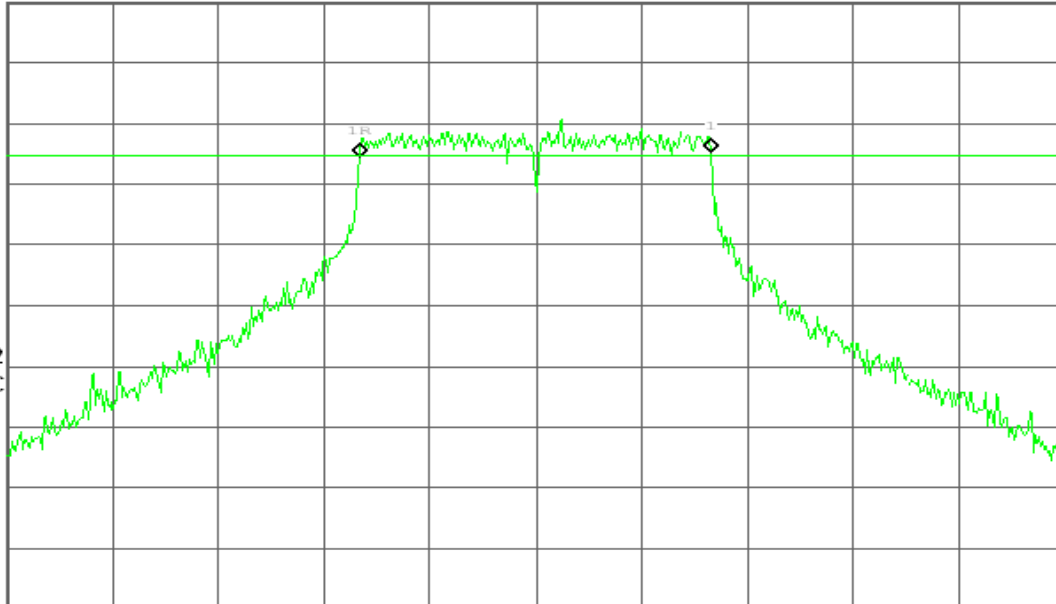

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH Mid)

Agilent 14:50:39 Nov 24, 2008

R T


6dB BW, g Mode Mid Ch.

Δ Mkr1 16.42 MHz

Ref 20 dBm

Atten 20 dB

2.13 dB

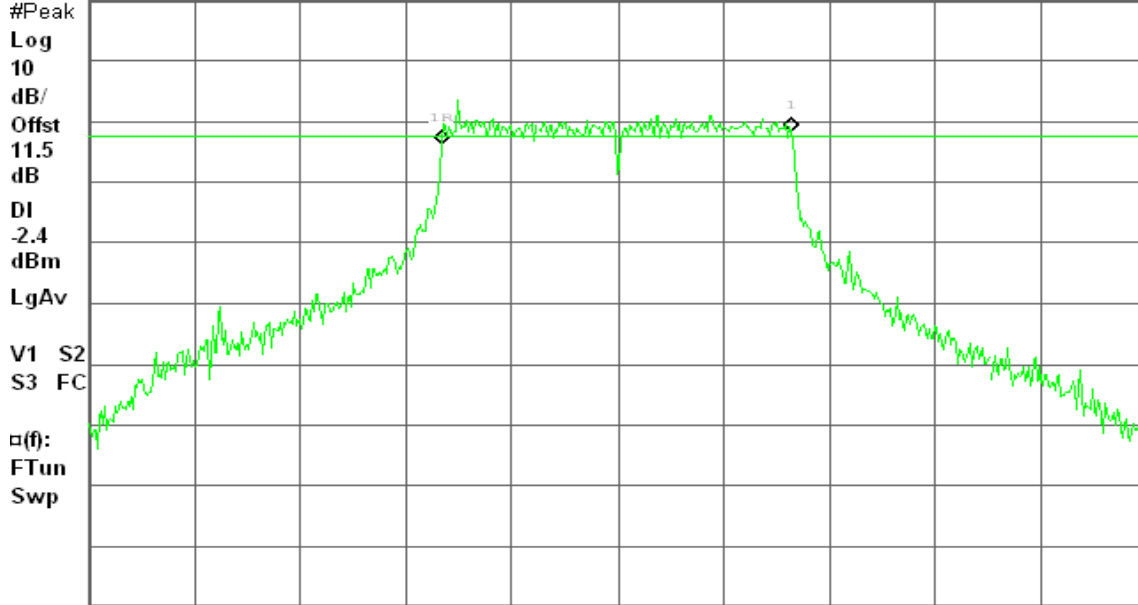

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 14:56:31 Nov 24, 2008

R T


6dB BW, g Mode High Ch.

Δ Mkr1 16.50 MHz

Ref 20 dBm

Atten 20 dB

-0.06 dB

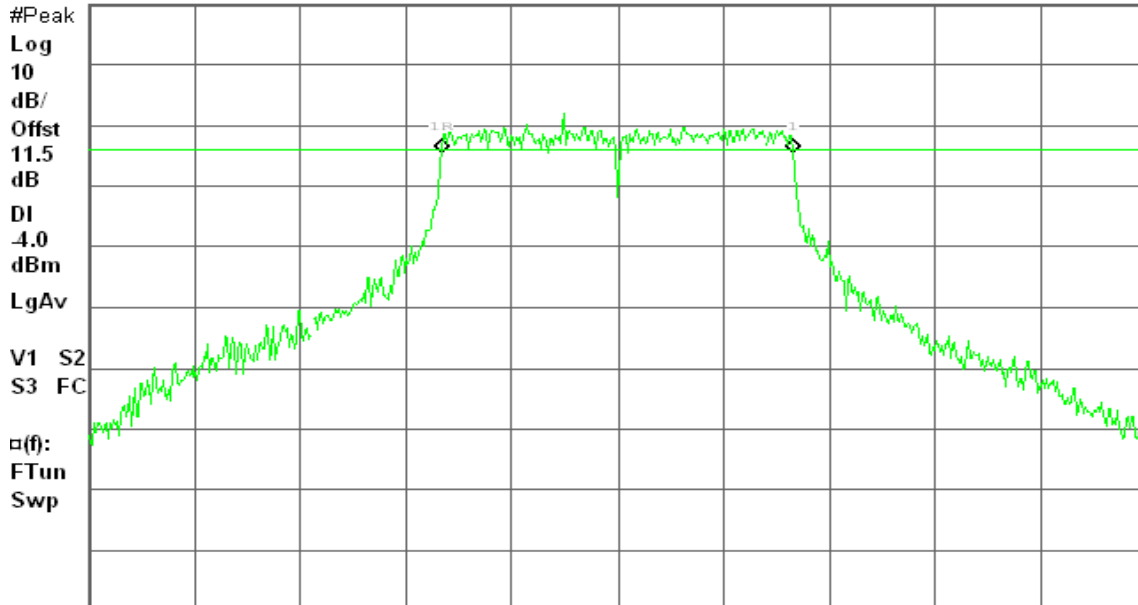

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



draft 802.11n Standard-20 MHz Channel mode

6dB Bandwidth (CH Low)

Agilent 13:24:06 Nov 24, 2008

R T


6dB BW, g Mode Low Ch.

Δ Mkr1 17.83 MHz

Ref 20 dBm

Atten 20 dB

-0.71 dB

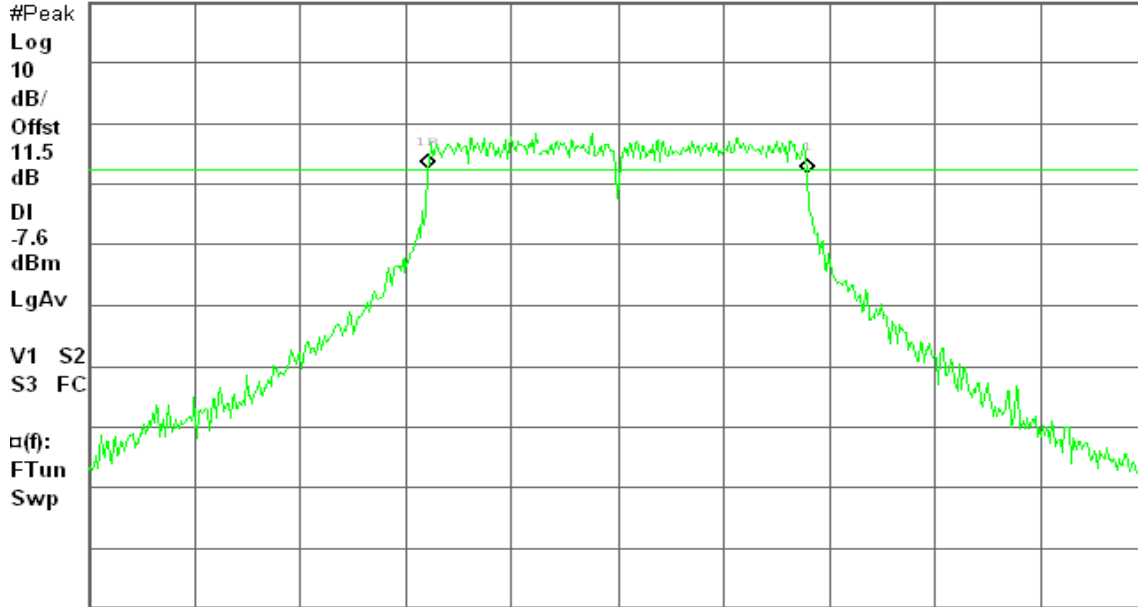

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH Mid)

Agilent 15:09:11 Nov 24, 2008

R T


6dB BW, g Mode Mid Ch.

Δ Mkr1 17.67 MHz

Ref 20 dBm

Atten 20 dB

0.41 dB

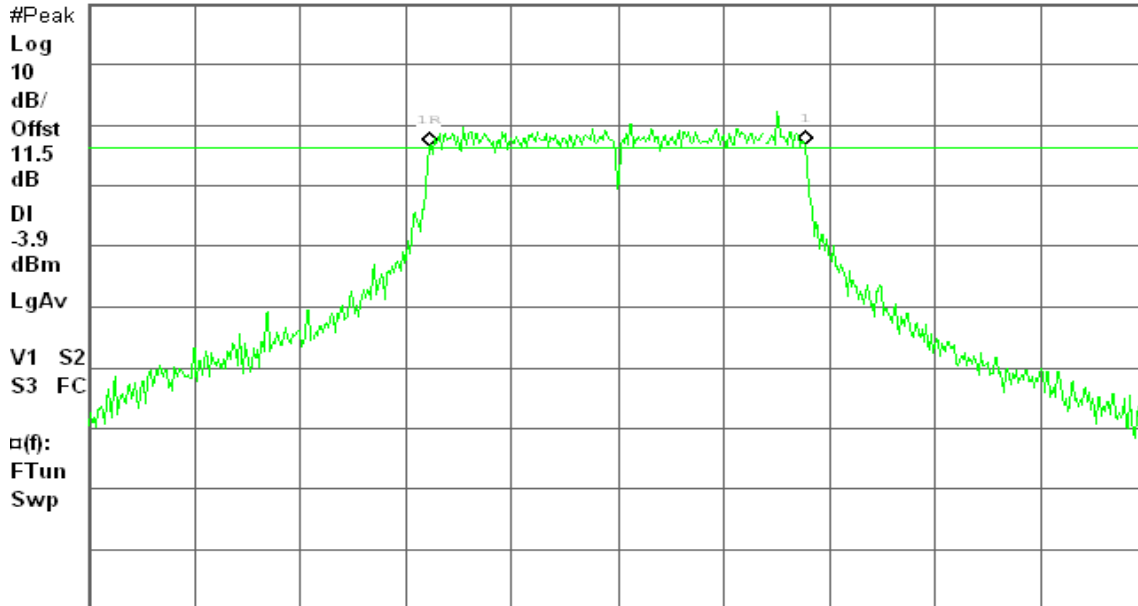

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH High)

Agilent 15:14:25 Nov 24, 2008

R T


6dB BW, g Mode High Ch.

Δ Mkr1 17.83 MHz

Ref 20 dBm

Atten 20 dB

0.62 dB

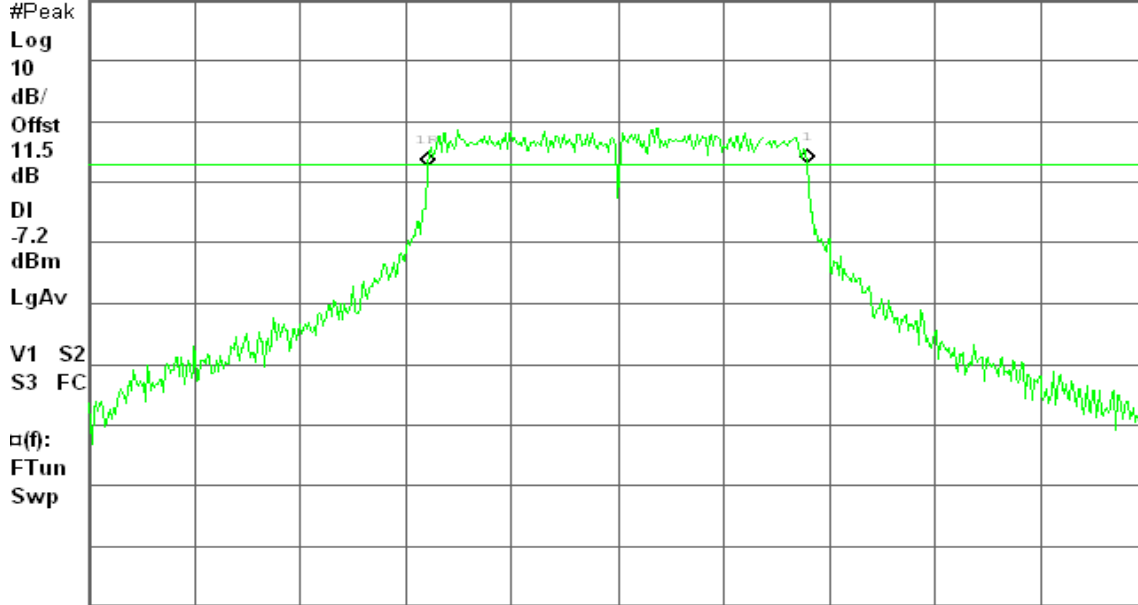

Center 2.462 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

draft 802.11n Wide-40 MHz Channel mode

6dB Bandwidth (CH Low)

Agilent 13:53:50 Nov 24, 2008

R T


6dB BW, g Mode Low Ch.

Δ Mkr1 35.58 MHz

Ref 20 dBm

Atten 20 dB

0.14 dB

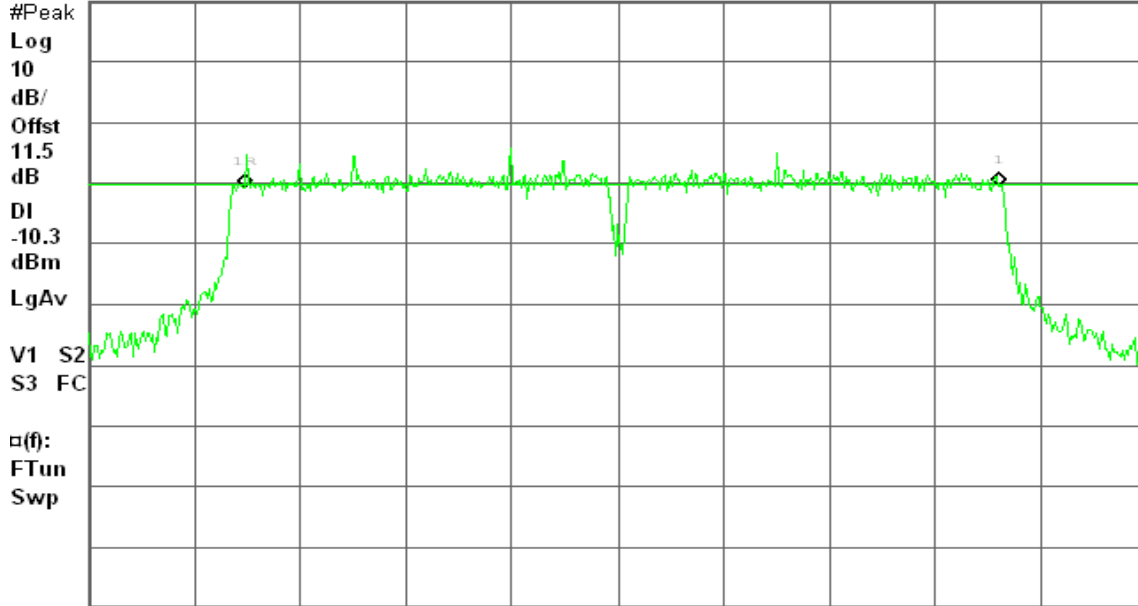

Center 2.422 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH Mid)

Agilent 14:03:31 Nov 24, 2008

R T


6dB BW, g Mode Mid Ch.

Δ Mkr1 36.33 MHz

Ref 20 dBm

Atten 20 dB

0.04 dB

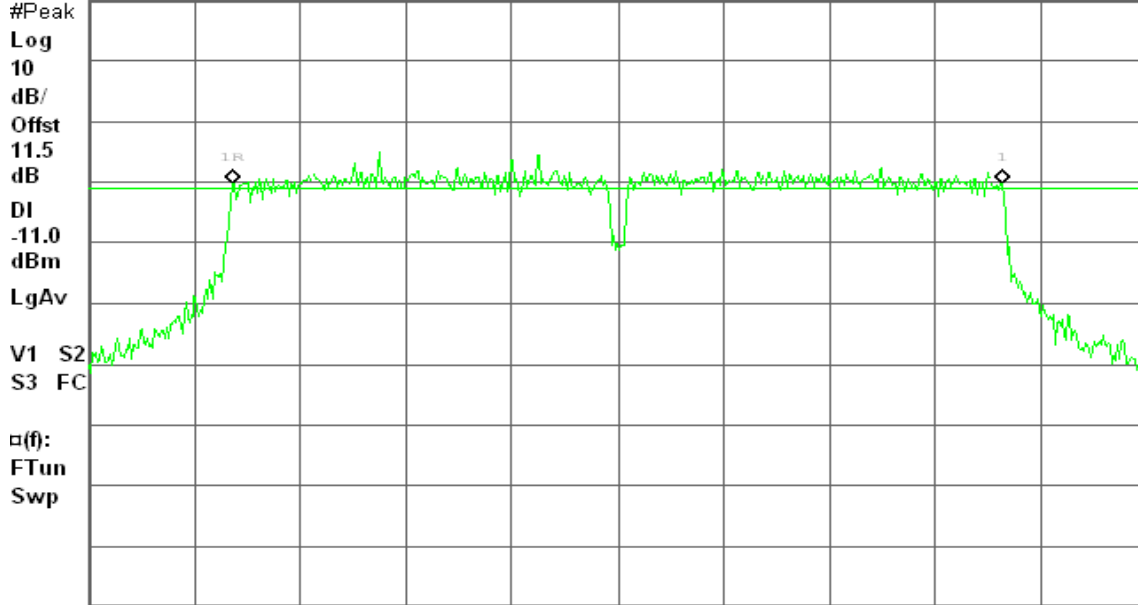

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH High)

Agilent 14:10:02 Nov 24, 2008

R T


6dB BW, g Mode High Ch.

Δ Mkr1 36.08 MHz

Ref 20 dBm

Atten 20 dB

0.61 dB

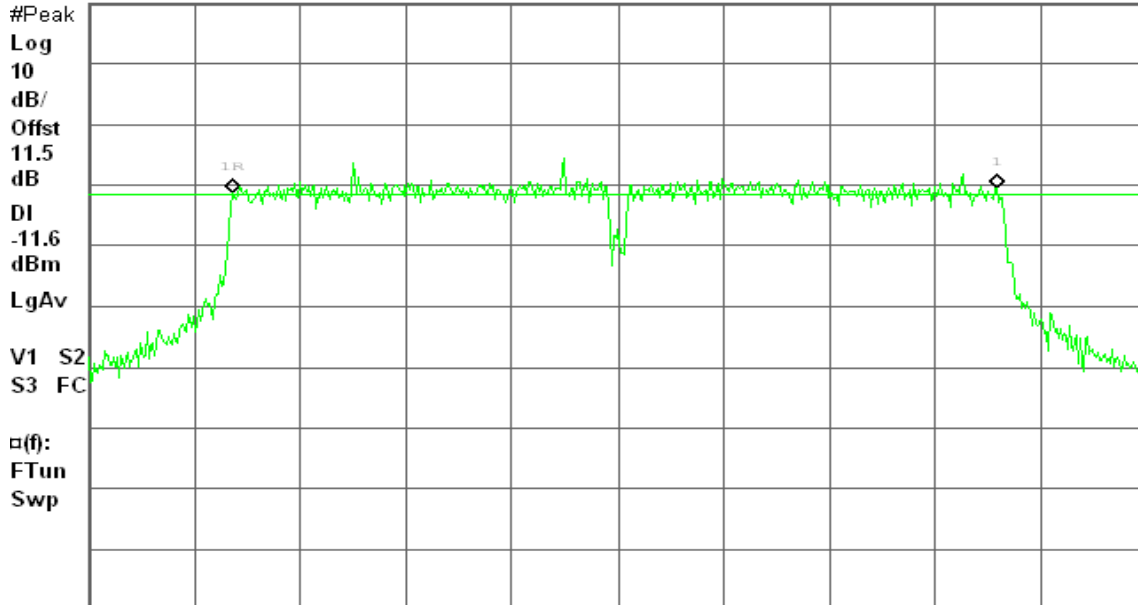

Center 2.452 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)




PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3) & RSS-210 §A8.4(4), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

1. Peak power is measured using the spectrum analyzer's internal channel power integration function.
2. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.

TEST RESULTS

No non-compliance noted

**Test Data****Test mode: IEEE 802.11b mode**

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Limit (W) | Result |
|---------|-----------------|--------------------|------------------|-----------|--------|
| Low | 2412 | 20.37 | 0.1089 | 1.00 | PASS |
| Mid | 2437 | 20.56 | 0.1138 | | PASS |
| High | 2462 | 21.13 | 0.1297 | | PASS |

Test mode: IEEE 802.11g mode

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Limit (W) | Result |
|---------|-----------------|--------------------|------------------|-----------|--------|
| Low | 2412 | 21.99 | 0.1581 | 1.00 | PASS |
| Mid | 2437 | 25.21 | 0.3319 | | PASS |
| High | 2462 | 23.09 | 0.2037 | | PASS |

Test mode: draft 802.11n Standard-20 MHz Channel mode

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Limit (W) | Result |
|---------|-----------------|--------------------|------------------|-----------|--------|
| Low | 2412 | 21.03 | 0.1268 | 1.00 | PASS |
| Mid | 2437 | 25.28 | 0.3373 | | PASS |
| High | 2462 | 21.99 | 0.1581 | | PASS |

Test mode: draft 802.11n Wide-40 MHz Channel mode

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Limit (W) | Result |
|---------|-----------------|--------------------|------------------|-----------|--------|
| Low | 2422 | 17.58 | 0.0573 | 1.00 | PASS |
| Mid | 2437 | 21.95 | 0.1567 | | PASS |
| High | 2452 | 17.53 | 0.0566 | | PASS |




Test Plot

IEEE 802.11b mode

Peak Power (CH Low)

Agilent 12:24:19 Nov 26, 2008

R T

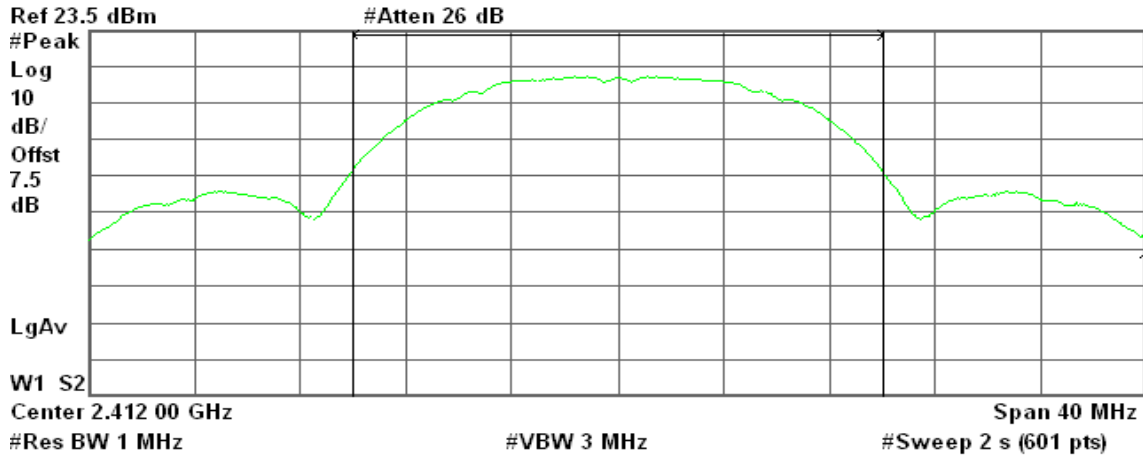

Channel Power

20.37 dBm / 20.0000 MHz


Power Spectral Density

-52.64 dBm/Hz

Peak Power (CH Mid)

Agilent 12:22:57 Nov 26, 2008

R T

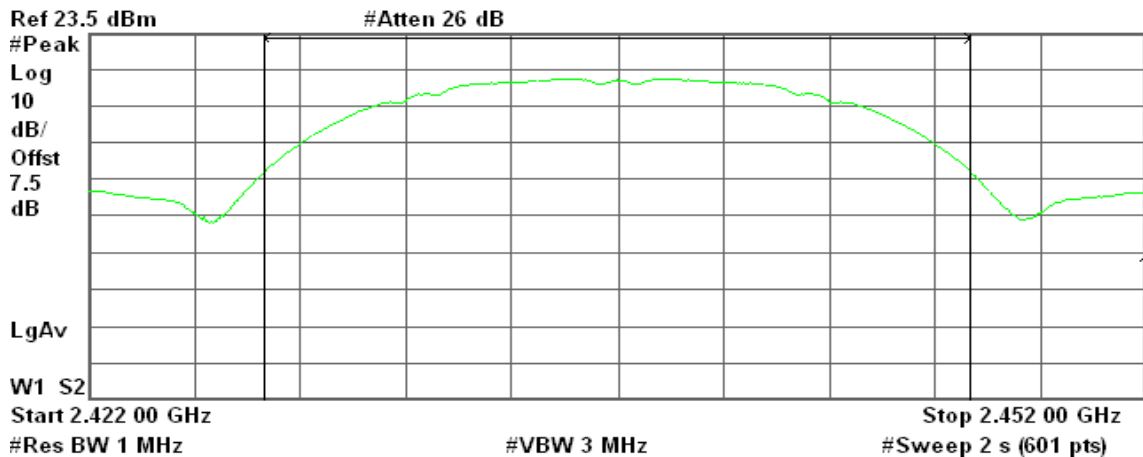

Channel Power

20.56 dBm / 20.0000 MHz

Power Spectral Density


-52.45 dBm/Hz



Peak Power (CH High)

Agilent 12:22:30 Nov 26, 2008

R T

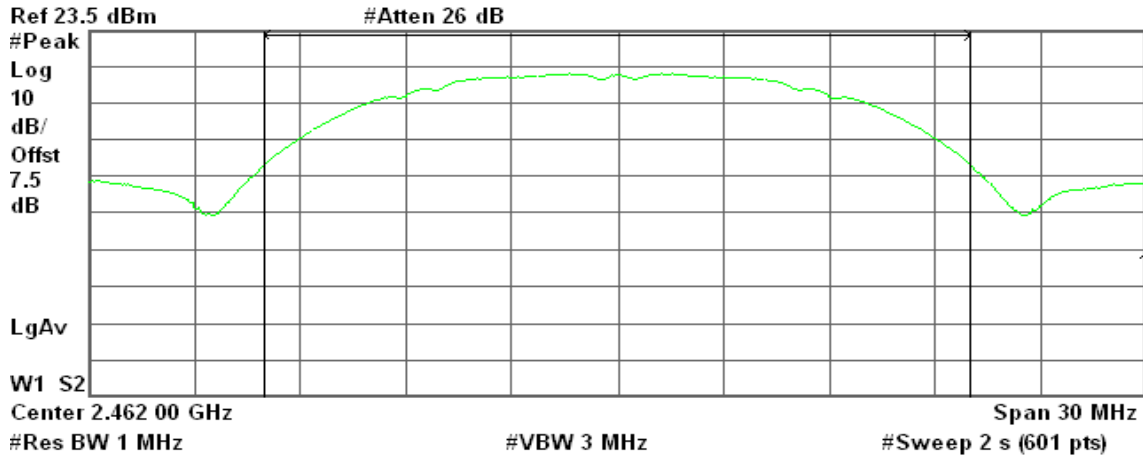

Channel Power

21.13 dBm / 20.0000 MHz

Power Spectral Density


-51.88 dBm/Hz

IEEE 802.11g mode

Peak Power (CH Low)

Agilent 12:15:51 Nov 26, 2008

R T

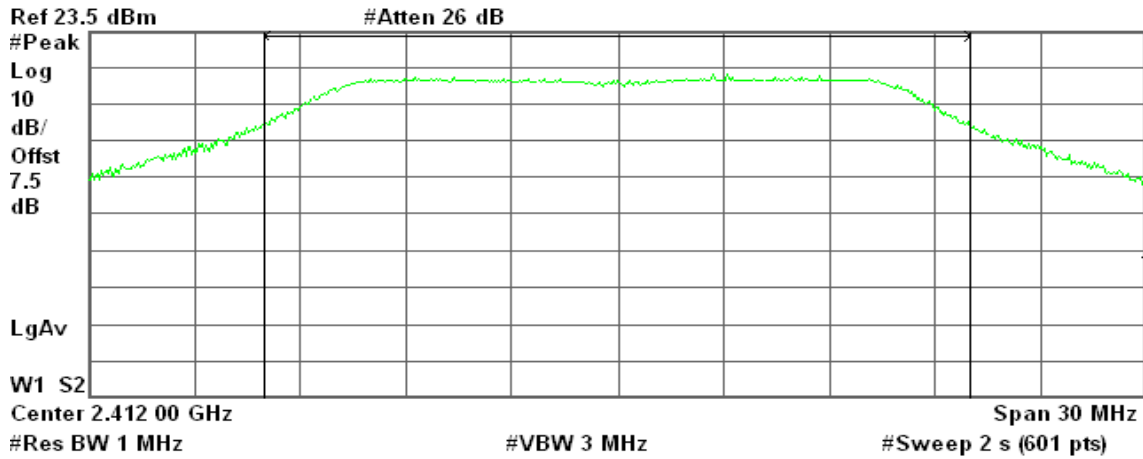

Channel Power

21.99 dBm / 20.0000 MHz

Power Spectral Density


-51.02 dBm/Hz



Peak Power (CH Mid)

Agilent 12:19:34 Nov 26, 2008

R T

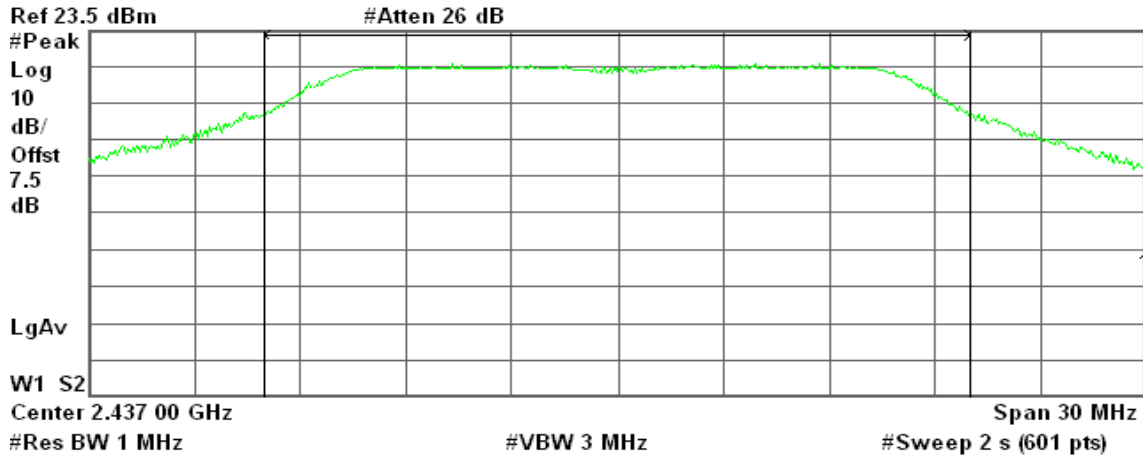

Channel Power

25.21 dBm / 20.0000 MHz


Power Spectral Density

-47.80 dBm/Hz

Peak Power (CH High)

Agilent 12:20:12 Nov 26, 2008

R T

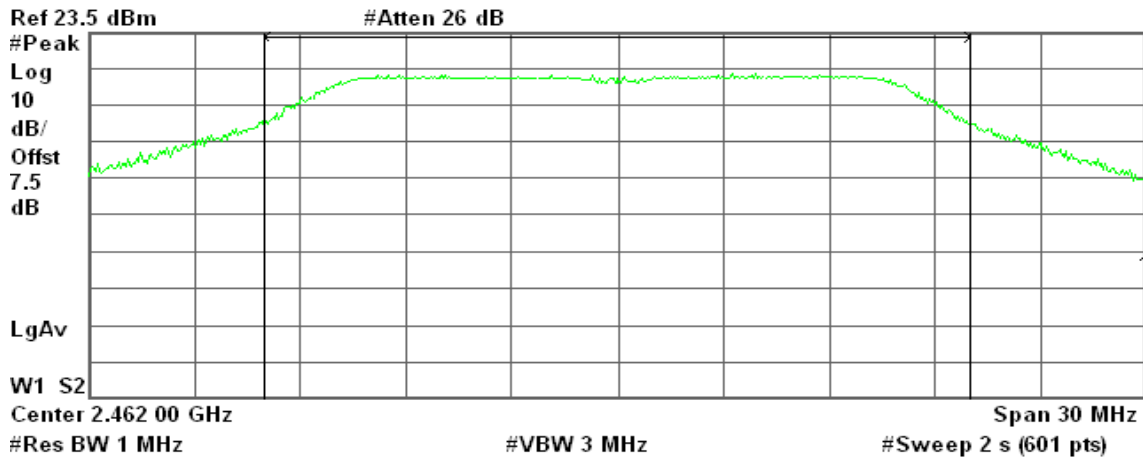

Channel Power

23.09 dBm / 20.0000 MHz

Power Spectral Density

-49.92 dBm/Hz




draft 802.11n Standard-20 MHz Channel mode

Peak Power (CH Low)

Agilent 12:26:15 Nov 26, 2008

R T

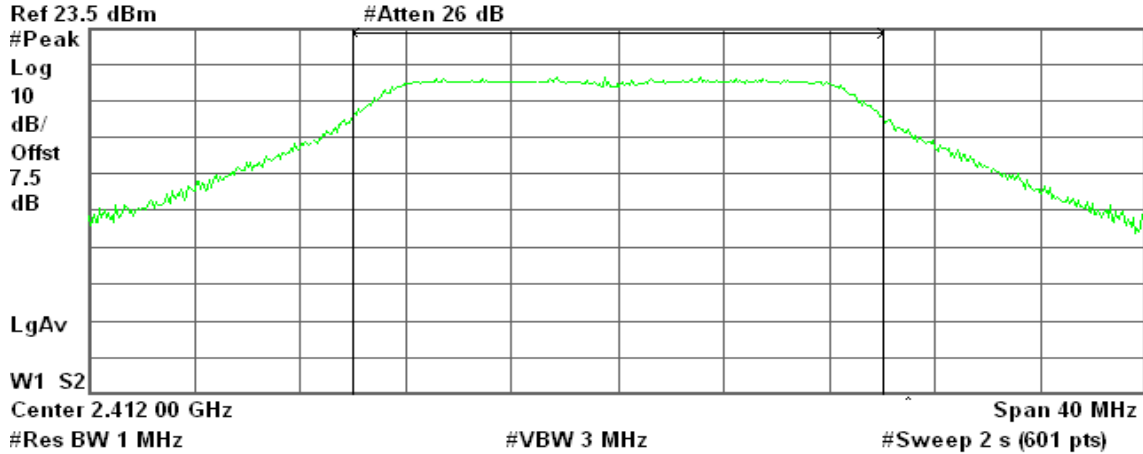

Channel Power

21.03 dBm / 20.0000 MHz


Power Spectral Density

-51.98 dBm/Hz

Peak Power (CH Mid)

Agilent 12:28:13 Nov 26, 2008

R T

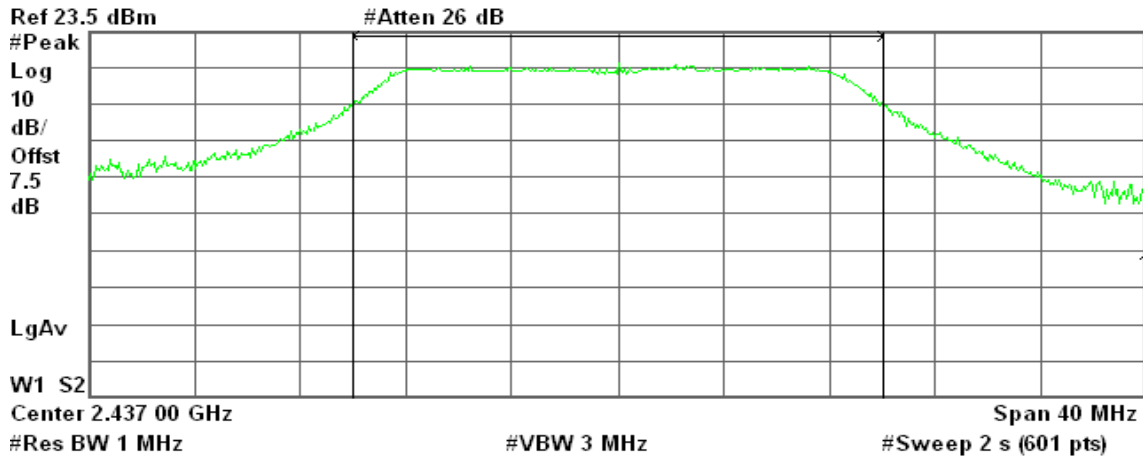

Channel Power

25.28 dBm / 20.0000 MHz

Power Spectral Density


-47.73 dBm/Hz



Peak Power (CH High)

Agilent 12:28:55 Nov 26, 2008

R T

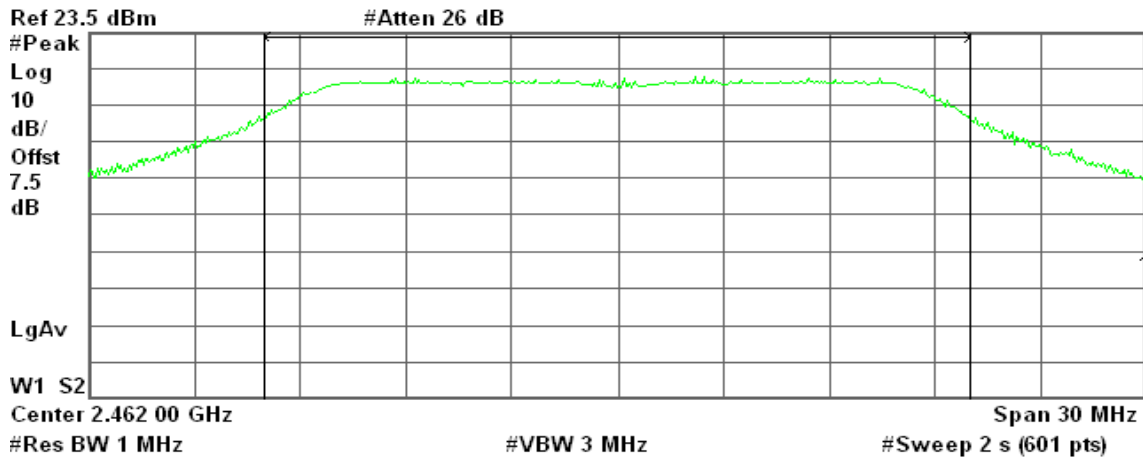

Channel Power

21.99 dBm / 20.0000 MHz

Power Spectral Density


-51.02 dBm/Hz

draft 802.11n Wide-40 MHz Channel mode

Peak Power (CH Low)

Agilent 12:33:43 Nov 26, 2008

R T

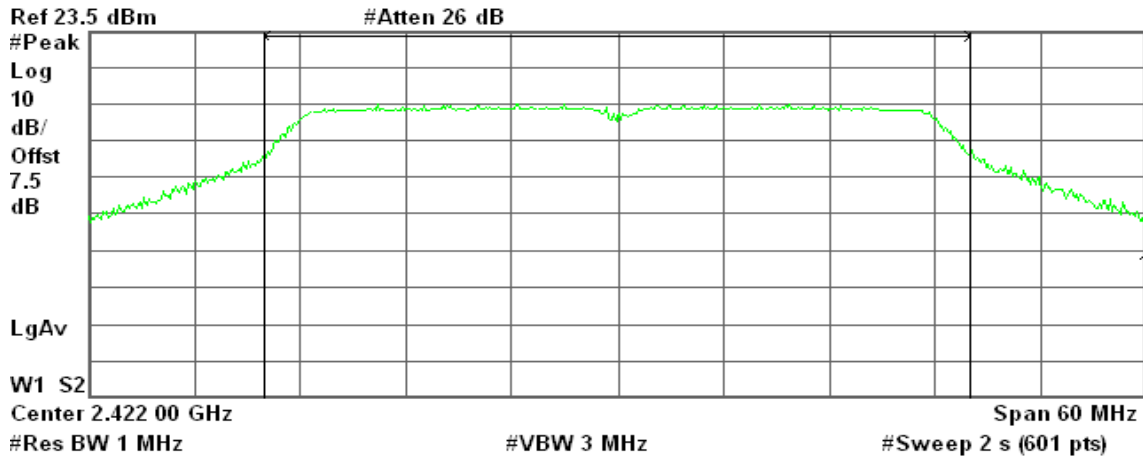

Channel Power

17.58 dBm / 40.0000 MHz

Power Spectral Density


-58.44 dBm/Hz



Peak Power (CH Mid)

Agilent 12:32:28 Nov 26, 2008

R T

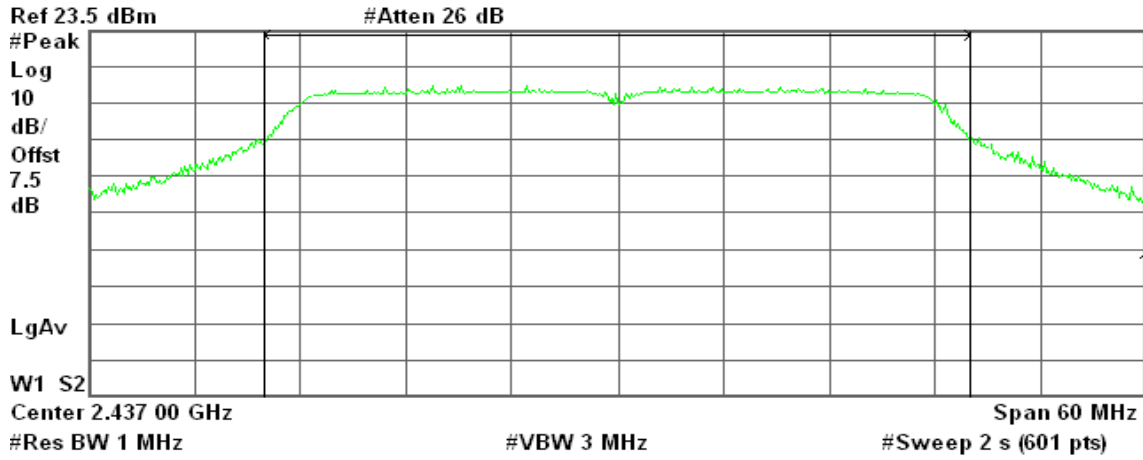

Channel Power

21.95 dBm / 40.0000 MHz


Power Spectral Density

-54.07 dBm/Hz

Peak Power (CH High)

Agilent 12:31:51 Nov 26, 2008

R T

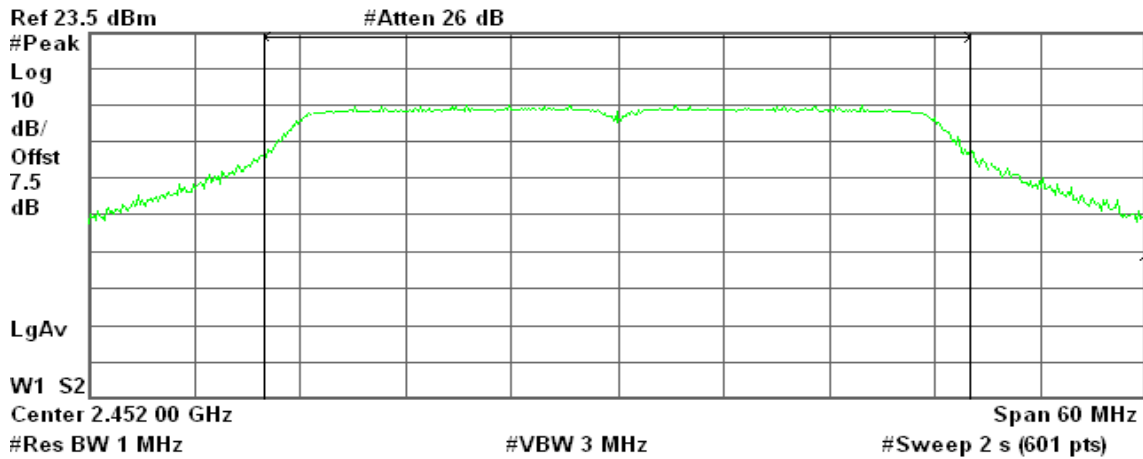

Channel Power

17.53 dBm / 40.0000 MHz

Power Spectral Density

-58.49 dBm/Hz




AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.

TEST RESULTS

No non-compliance noted

**Test Data****Test mode: IEEE 802.11b mode**

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) |
|---------|-----------------|--------------------|------------------|
| Low | 2412 | 17.22 | 0.0527 |
| Mid | 2437 | 17.80 | 0.0603 |
| High | 2462 | 18.02 | 0.0634 |

Test mode: IEEE 802.11g mode

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) |
|---------|-----------------|--------------------|------------------|
| Low | 2412 | 13.82 | 0.0241 |
| Mid | 2437 | 17.08 | 0.0511 |
| High | 2462 | 14.70 | 0.0295 |

Test mode: draft 802.11n Standard-20 MHz Channel mode

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) |
|---------|-----------------|--------------------|------------------|
| Low | 2412 | 12.84 | 0.0192 |
| Mid | 2437 | 17.09 | 0.0512 |
| High | 2462 | 13.76 | 0.0238 |

Test mode: draft 802.11n Wide-40 MHz Channel mode

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) |
|---------|-----------------|--------------------|------------------|
| Low | 2422 | 9.66 | 0.0092 |
| Mid | 2437 | 13.50 | 0.0224 |
| High | 2452 | 9.24 | 0.0084 |




Test Plot

IEEE 802.11b mode

Average Power (CH Low)

Agilent 12:23:58 Nov 26, 2008

R T

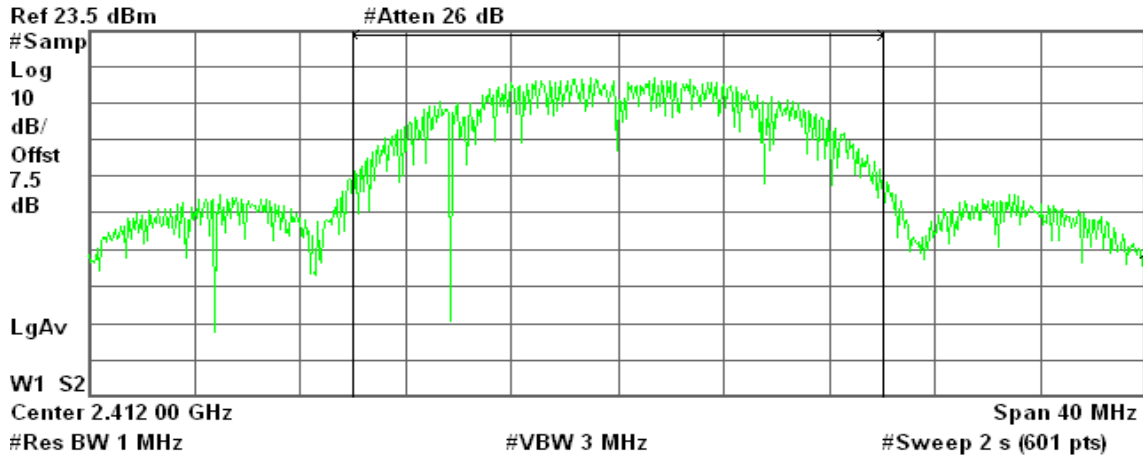

Channel Power

17.22 dBm / 20.0000 MHz


Power Spectral Density

-55.79 dBm/Hz

Average Power (CH Mid)

Agilent 12:23:17 Nov 26, 2008

R T

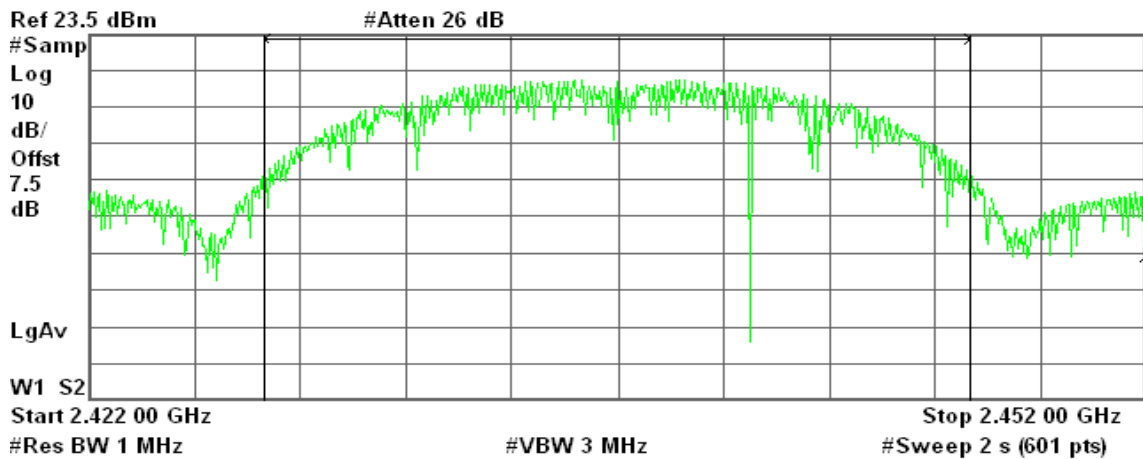

Channel Power

17.80 dBm / 20.0000 MHz

Power Spectral Density


-55.21 dBm/Hz



Average Power (CH High)

Agilent 12:22:06 Nov 26, 2008

R T

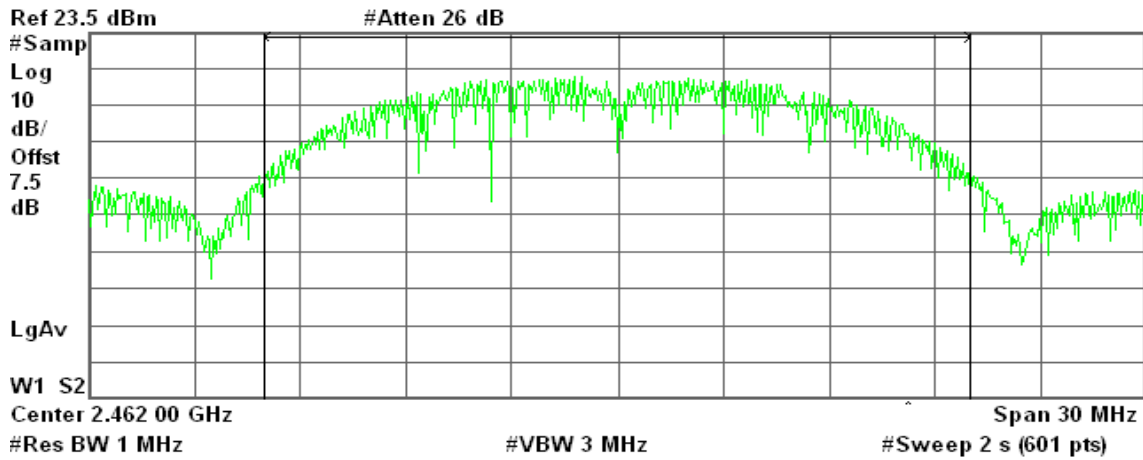

Channel Power

18.02 dBm / 20.0000 MHz

Power Spectral Density


-54.99 dBm/Hz

IEEE 802.11g mode

Average Power (CH Low)

Agilent 12:16:51 Nov 26, 2008

R T

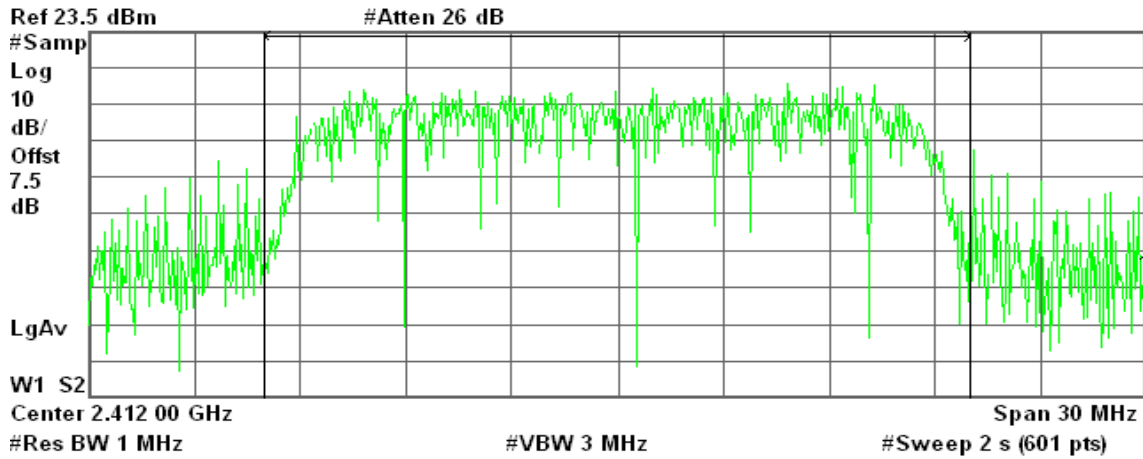

Channel Power

13.82 dBm / 20.0000 MHz

Power Spectral Density


-59.19 dBm/Hz



Average Power (CH Mid)

Agilent 12:18:49 Nov 26, 2008

R T

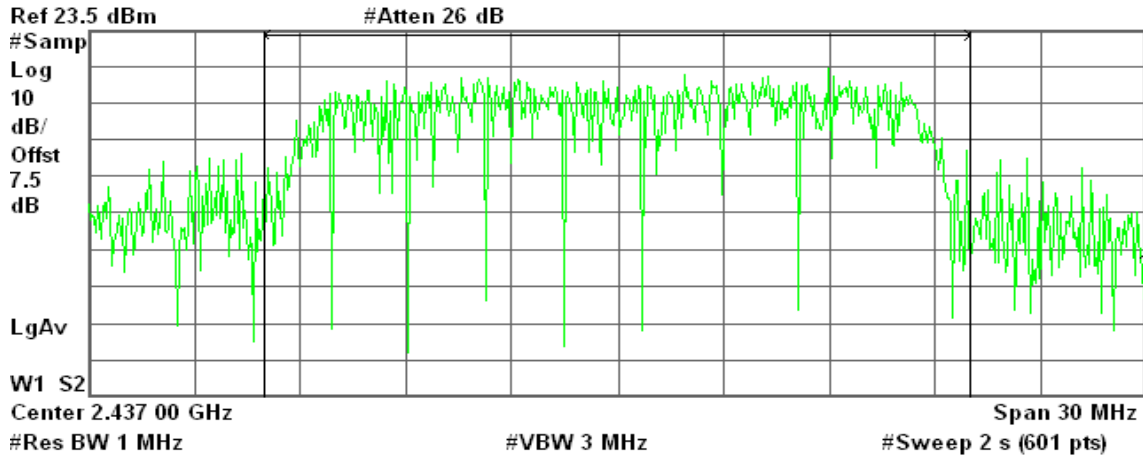

Channel Power

17.08 dBm / 20.0000 MHz


Power Spectral Density

-55.93 dBm/Hz

Average Power (CH High)

Agilent 12:20:32 Nov 26, 2008

R T

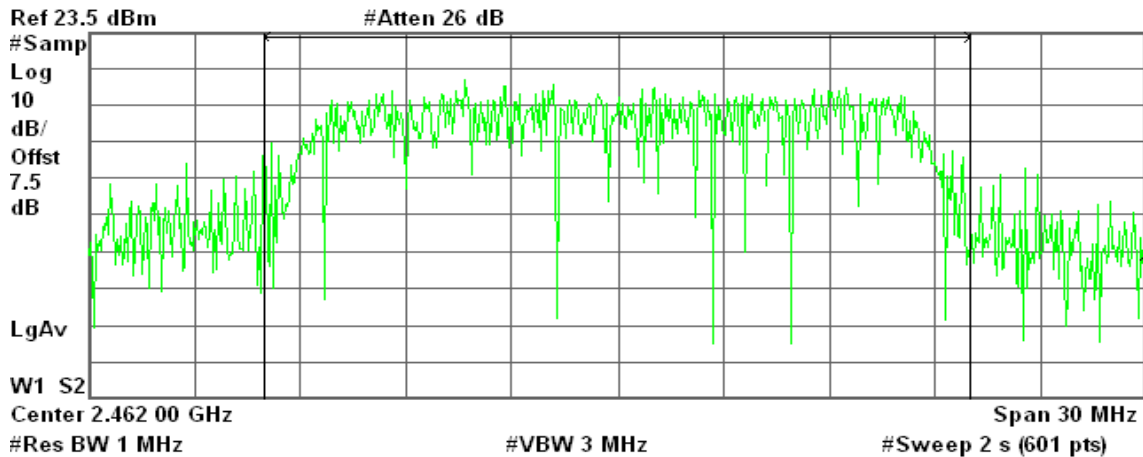

Channel Power

14.70 dBm / 20.0000 MHz

Power Spectral Density

-58.31 dBm/Hz



draft 802.11n Standard-20 MHz Channel mode

Average Power (CH Low)

Agilent 23:18:37 Nov 26, 2008

R T



Channel Power

12.84 dBm / 20.0000 MHz


Power Spectral Density

-60.17 dBm/Hz

Average Power (CH Mid)

Agilent 12:27:54 Nov 26, 2008

R T

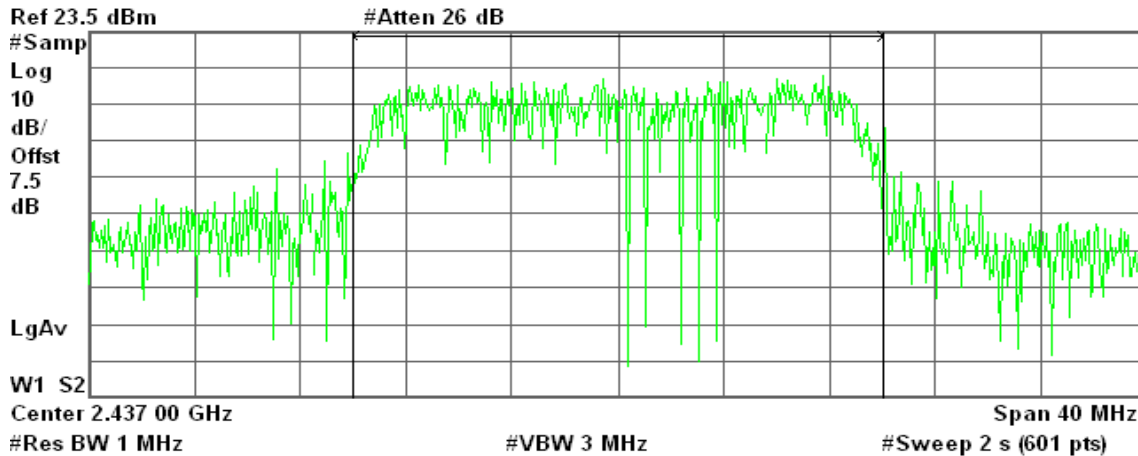

Channel Power

17.09 dBm / 20.0000 MHz

Power Spectral Density


-55.92 dBm/Hz



Average Power (CH High)

Agilent 12:29:16 Nov 26, 2008

R T

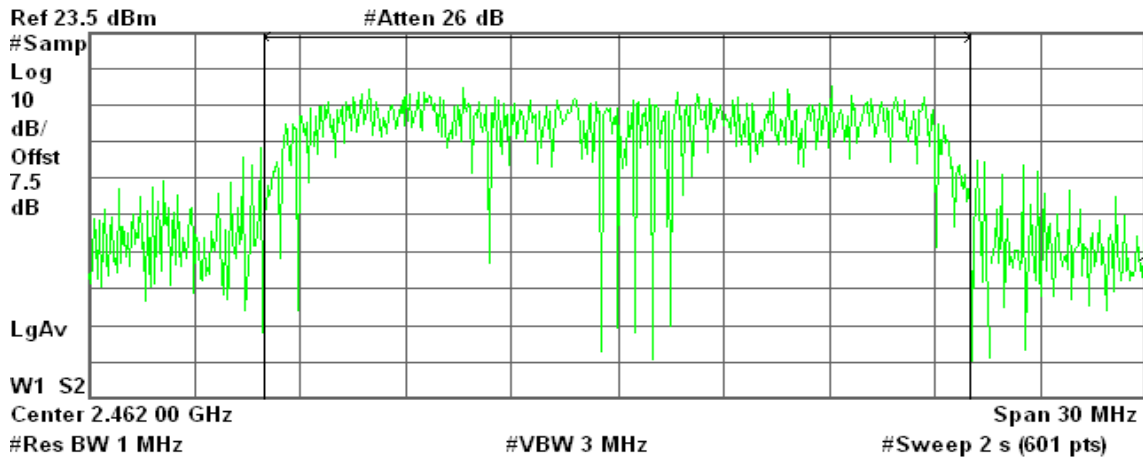

Channel Power

13.76 dBm / 20.0000 MHz

Power Spectral Density


-59.25 dBm/Hz

draft 802.11n Wide-40 MHz Channel mode

Average Power (CH Low)

Agilent 12:33:26 Nov 26, 2008

R T

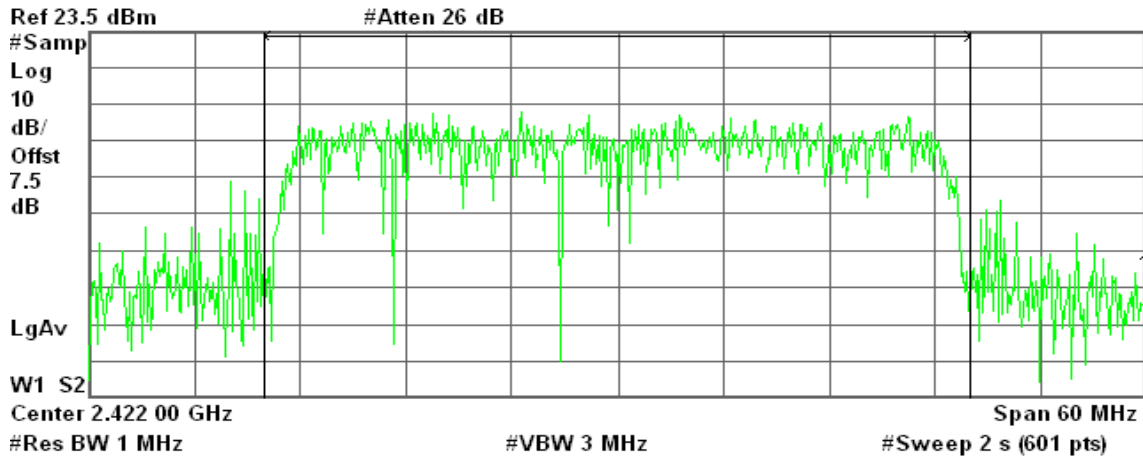

Channel Power

9.66 dBm / 40.0000 MHz

Power Spectral Density


-66.36 dBm/Hz



Average Power (CH Mid)

Agilent 12:32:49 Nov 26, 2008

R T

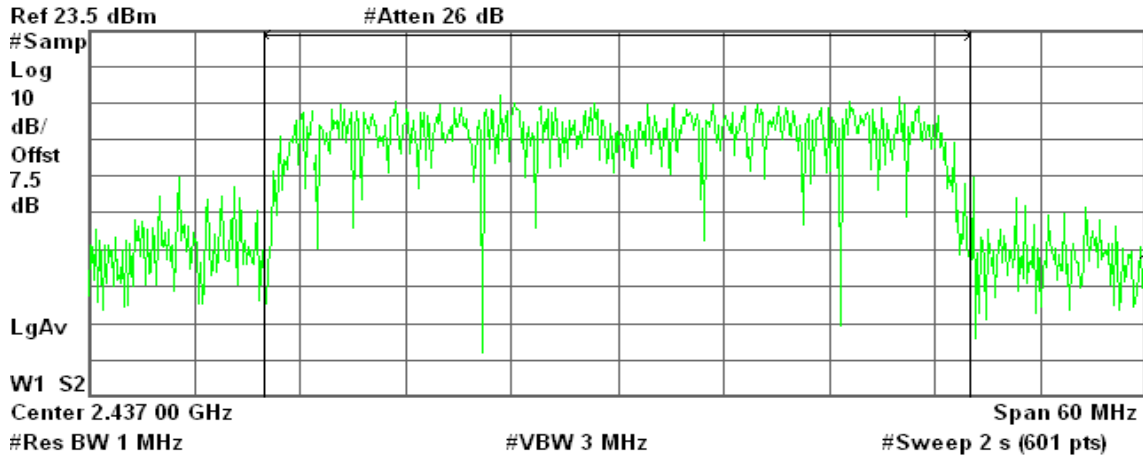

Channel Power

13.50 dBm / 40.0000 MHz


Power Spectral Density

-62.52 dBm/Hz

Average Power (CH High)

Agilent 12:31:31 Nov 26, 2008

R T

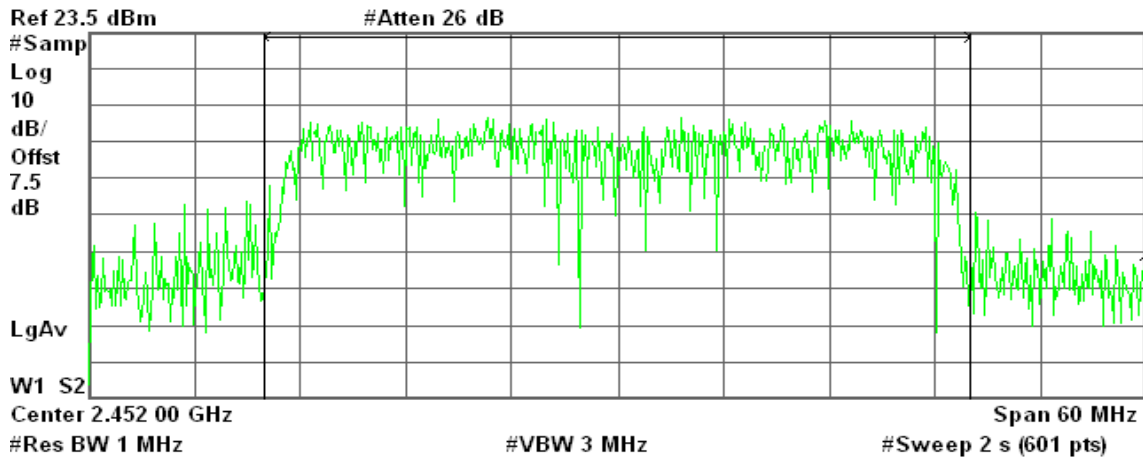

Channel Power

9.24 dBm / 40.0000 MHz

Power Spectral Density


-66.78 dBm/Hz

BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d) & RSS-210 §A8.5, in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

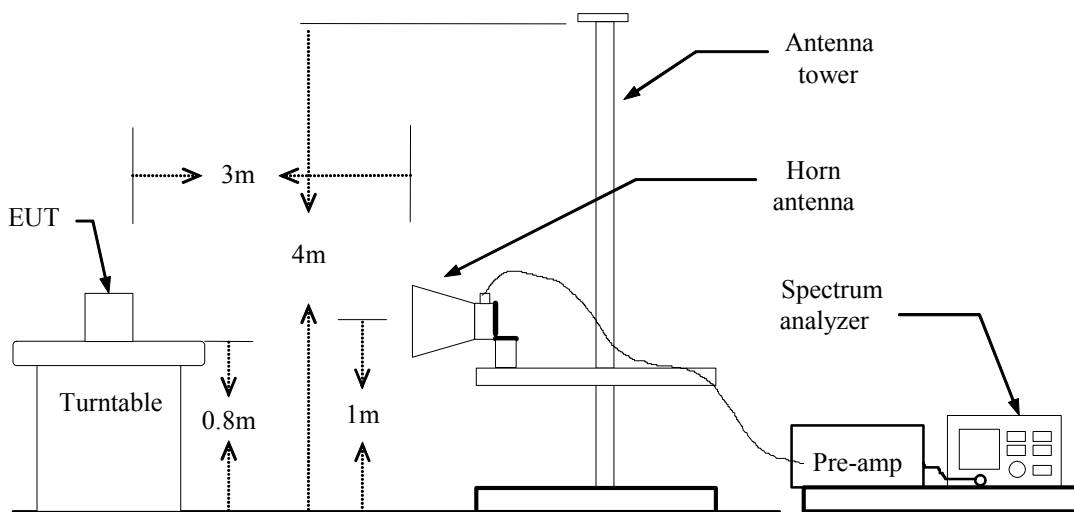

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.



HALF LENGTH Board / PIFA ANTENNA

Band Edges (IEEE 802.11b mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 20:43:33 Nov 26, 2008

R T

Mkr1 2.390 0 GHz
60.61 dBμV

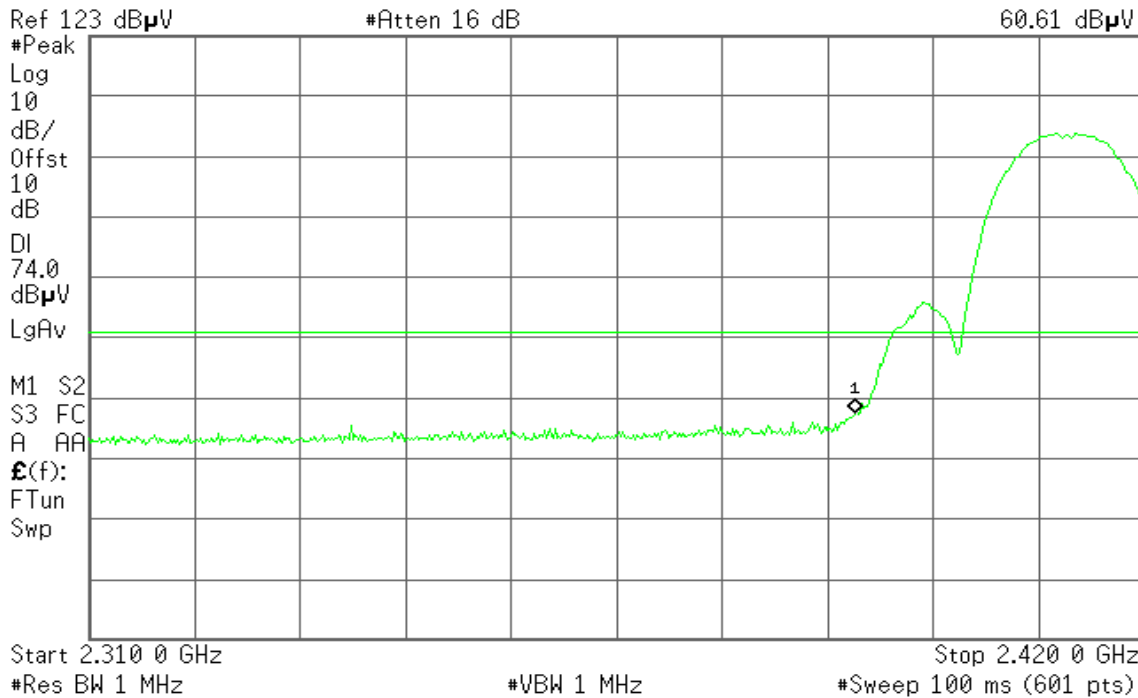


Detector mode: Average

Polarity: Vertical

Agilent 20:44:52 Nov 26, 2008

R T

Mkr1 2.390 0 GHz
49.04 dBμV

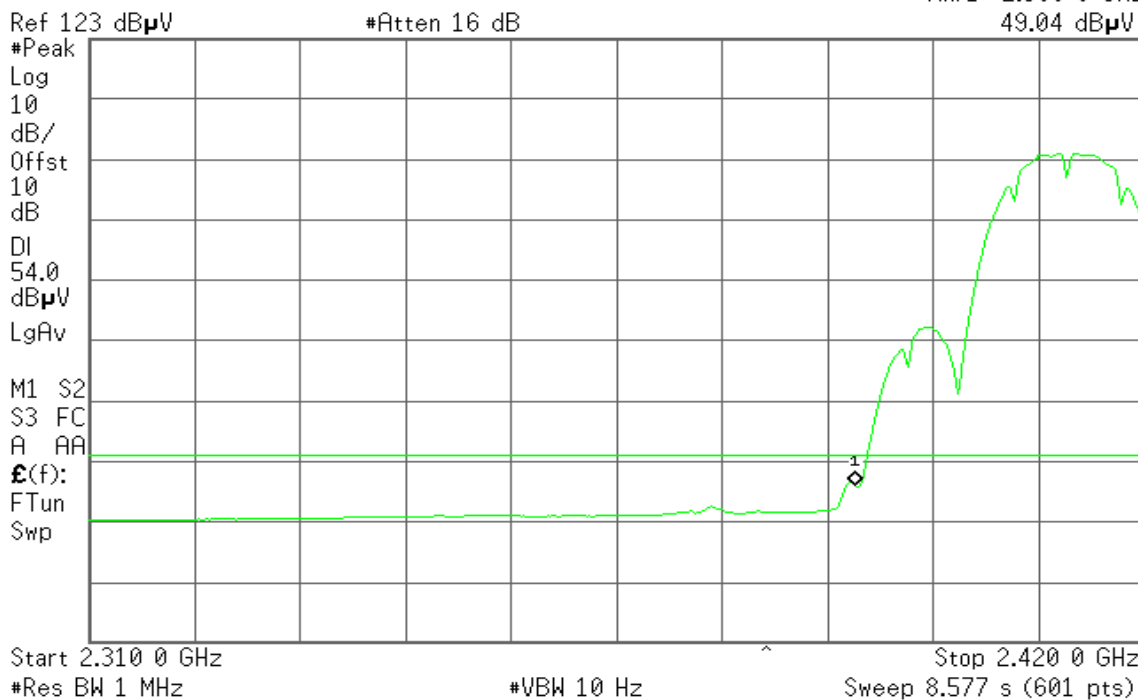




Detector mode: Peak

Polarity: Horizontal

Agilent 20:50:24 Nov 26, 2008

R T

Mkr1 2.390 0 GHz
61.37 dBµV

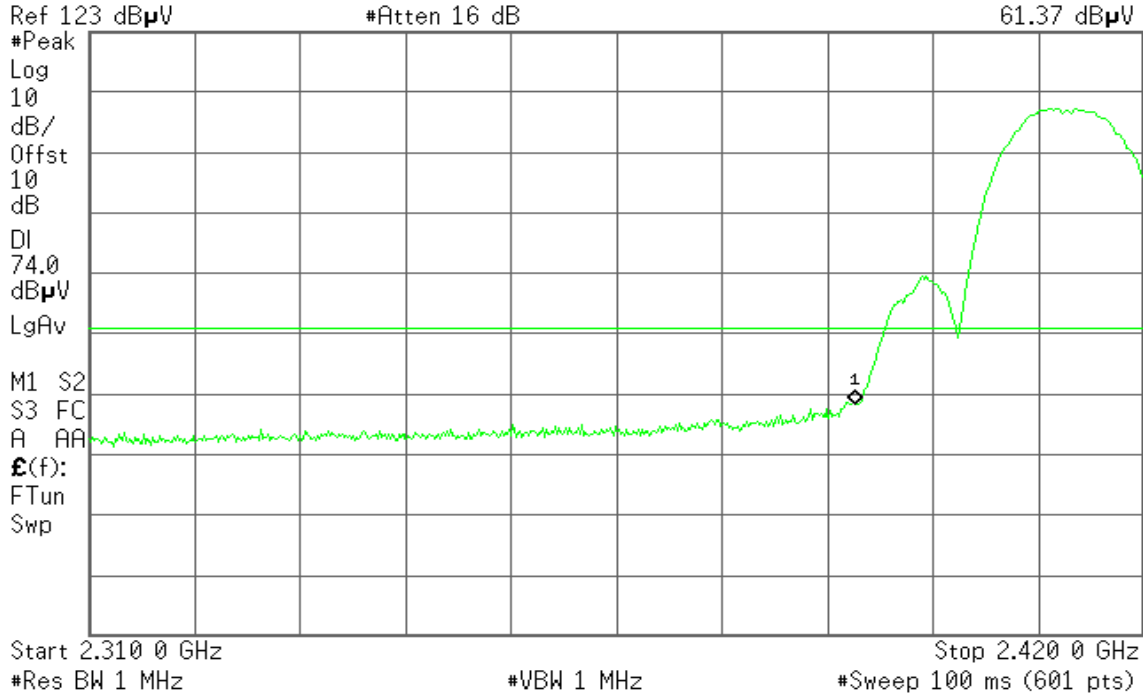


Detector mode: Average

Polarity: Horizontal

Agilent 20:51:45 Nov 26, 2008

R T

Mkr1 2.390 0 GHz
51.49 dBµV

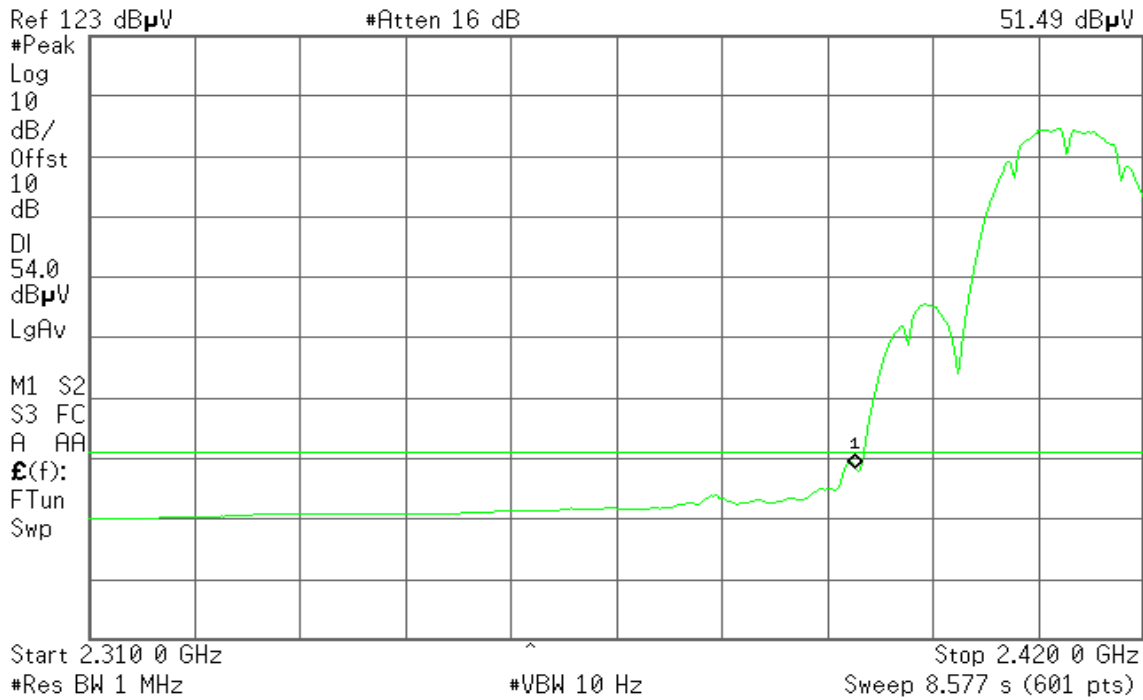



Band Edges (IEEE 802.11b mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 21:14:58 Nov 26, 2008

R T

Mkr1 2.483 50 GHz
60.06 dB μ V

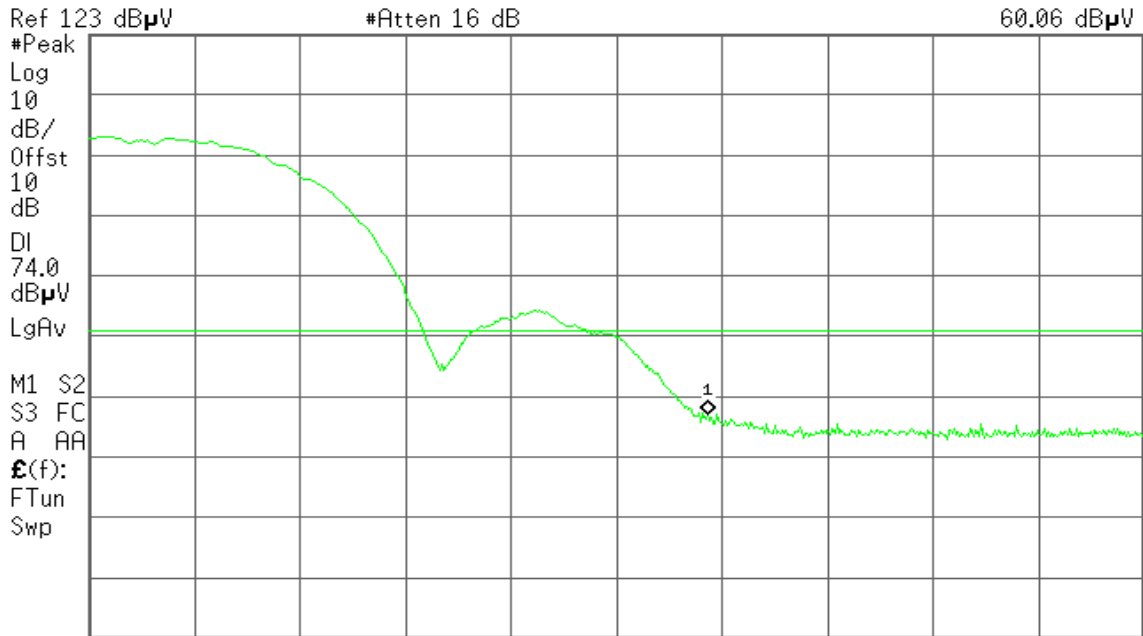

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 21:15:20 Nov 26, 2008

R T

Mkr1 2.483 50 GHz
47.74 dB μ V

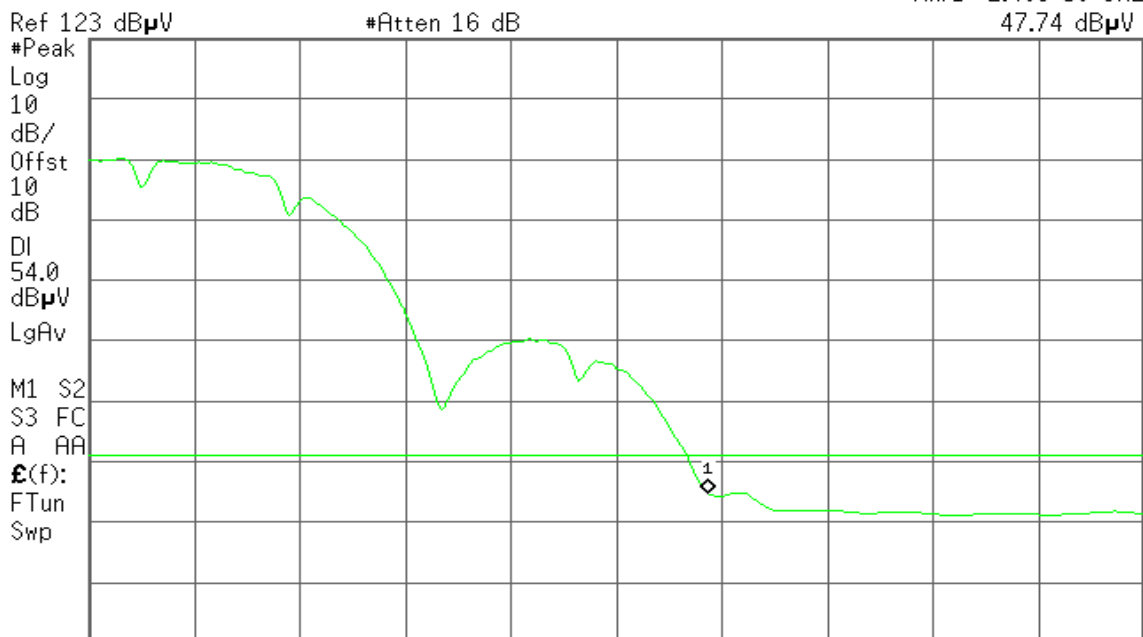

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 21:10:30 Nov 26, 2008

R T

Mkr1 2.483 50 GHz
61.51 dB μ V

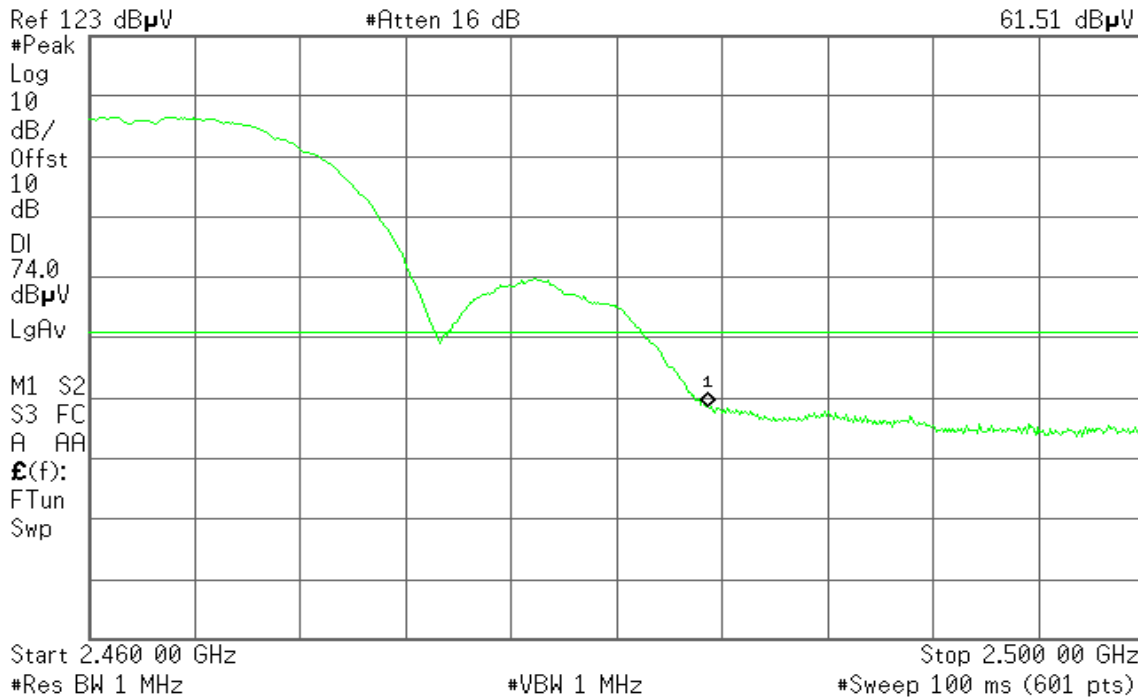


Detector mode: Average

Polarity: Horizontal

Agilent 21:10:56 Nov 26, 2008

R T

Mkr1 2.483 50 GHz
50.52 dB μ V

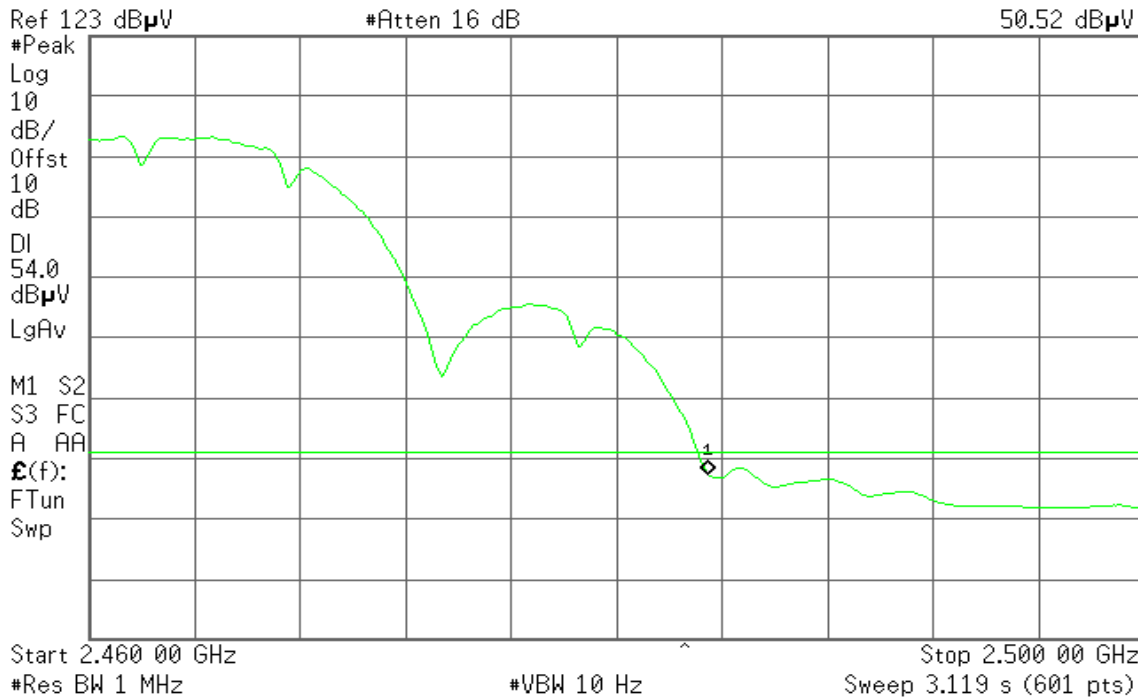



Band Edges (IEEE 802.11g mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 21:40:49 Nov 26, 2008

R T

Mkr1 2.390 0 GHz
64.97 dB μ V

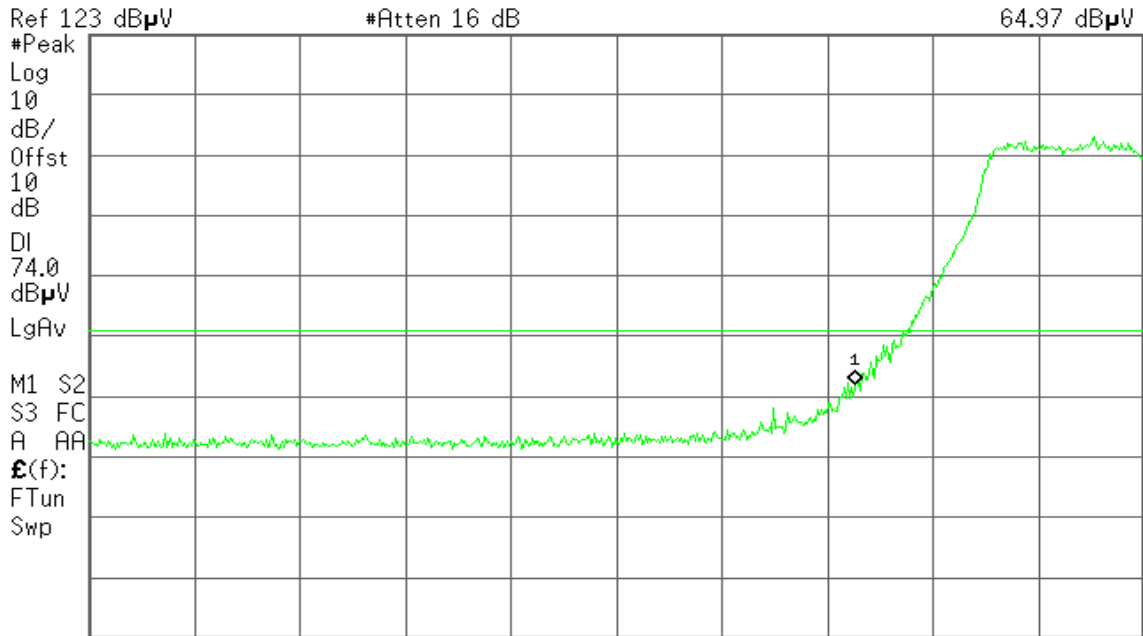


Detector mode: Average

Polarity: Vertical

Agilent 21:41:05 Nov 26, 2008

R T

Mkr1 2.390 0 GHz
48.52 dB μ V

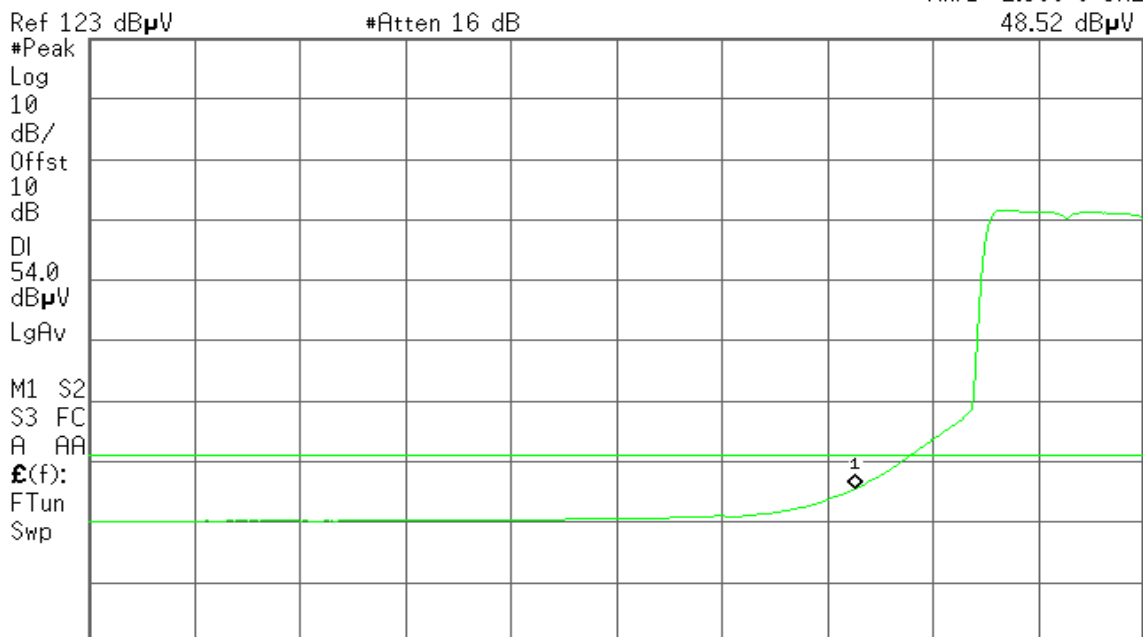




Detector mode: Peak

Polarity: Horizontal

Agilent 21:36:03 Nov 26, 2008

R T

Mkr1 2.390 0 GHz
70.14 dBμV

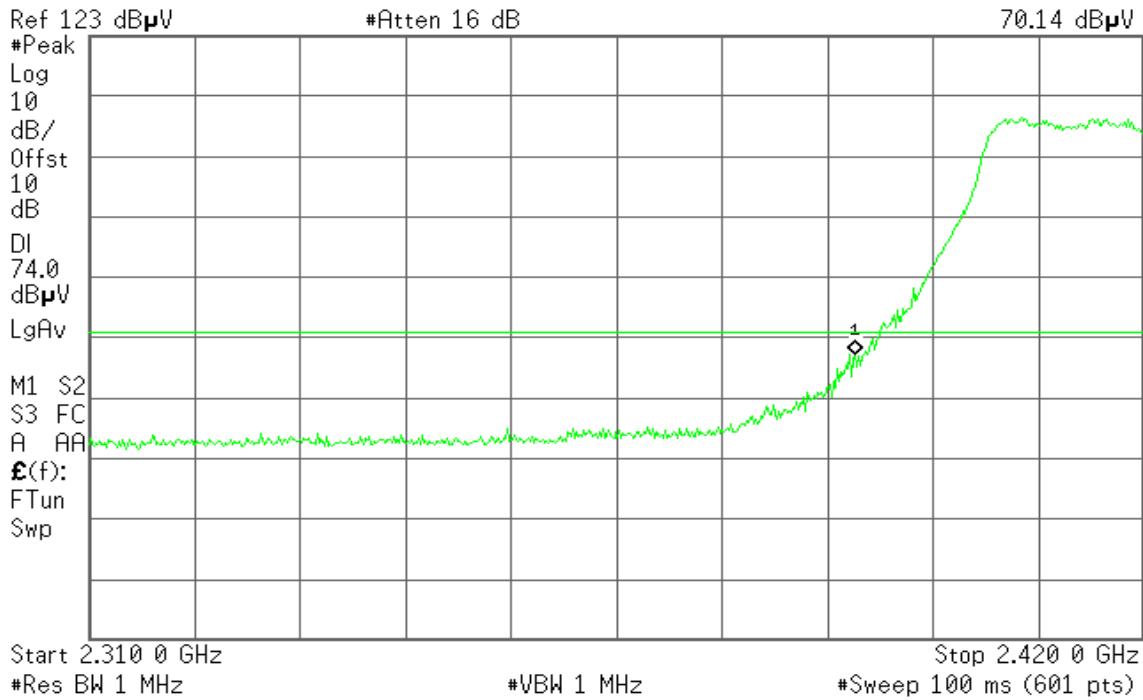


Detector mode: Average

Polarity: Horizontal

Agilent 21:36:50 Nov 26, 2008

R T

Mkr1 2.390 0 GHz
51.46 dBμV

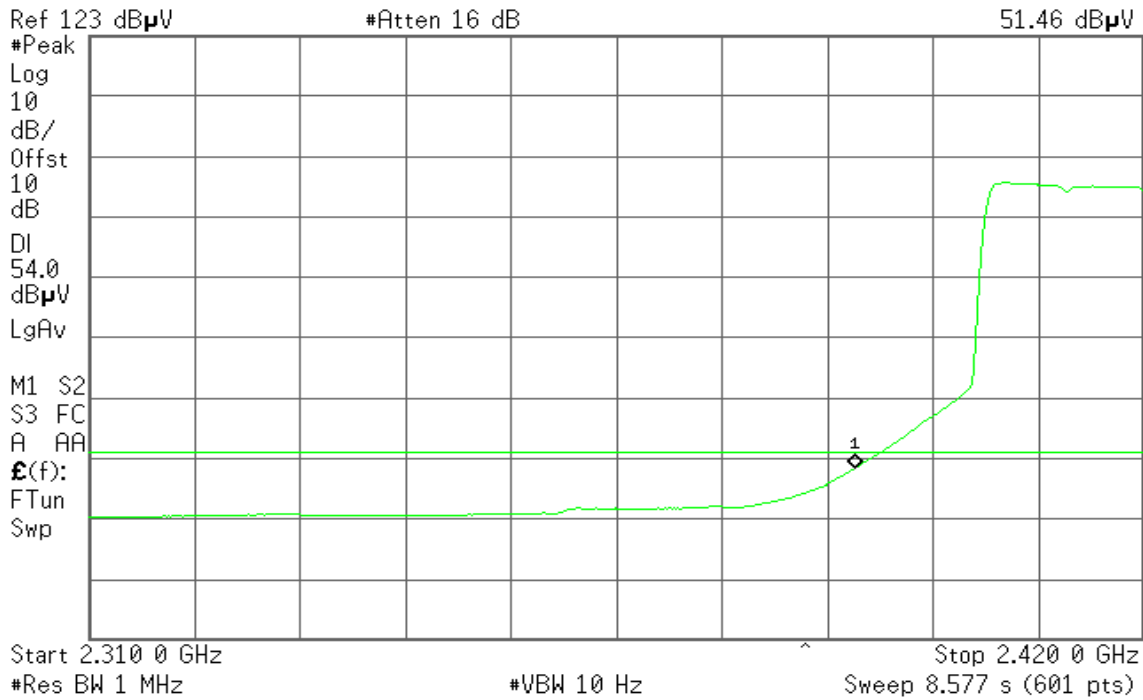



Band Edges (IEEE 802.11g mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 21:28:29 Nov 26, 2008

R T

Mkr1 2.483 50 GHz
68.96 dB μ V

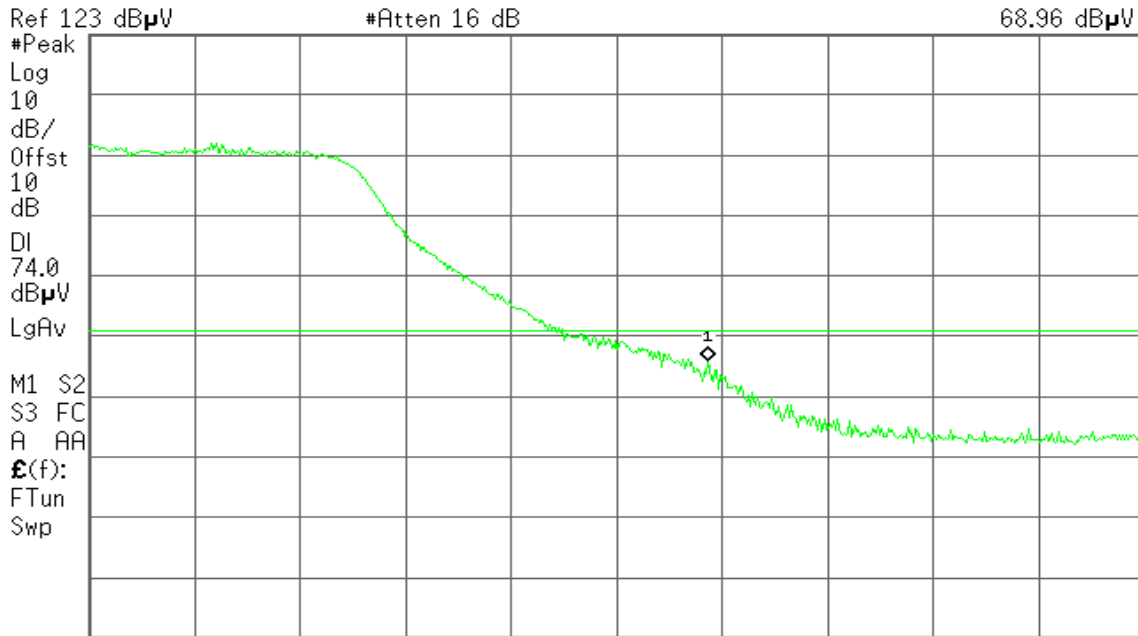

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 21:28:51 Nov 26, 2008

R T

Mkr1 2.483 50 GHz
47.47 dB μ V

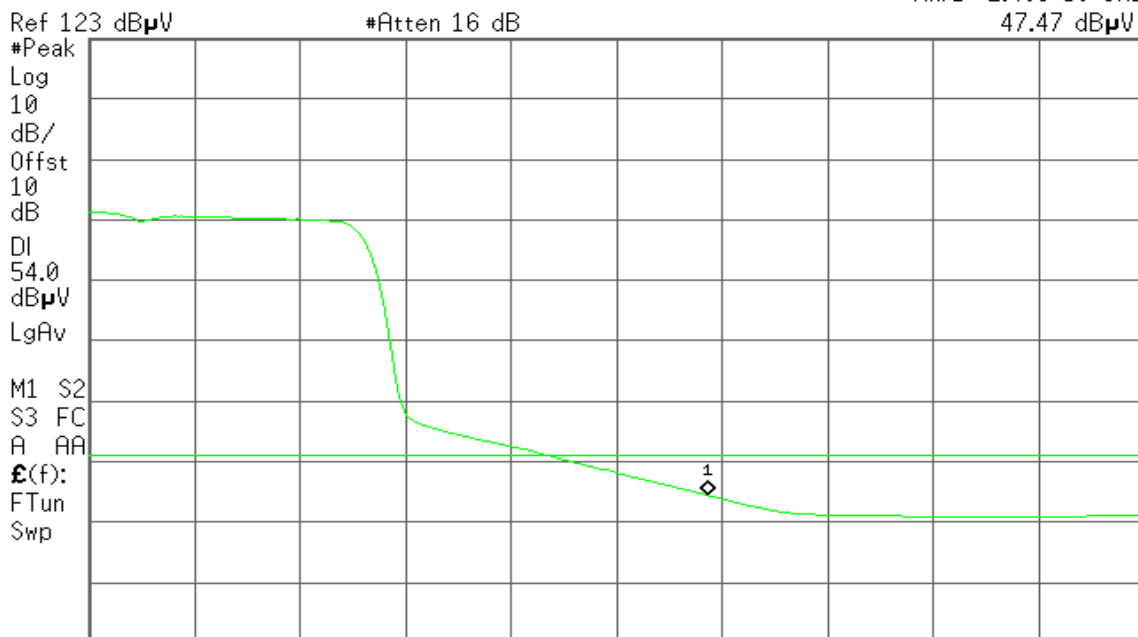

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 21:23:11 Nov 26, 2008

R T

Mkr1 2.483 50 GHz
72.09 dBμV

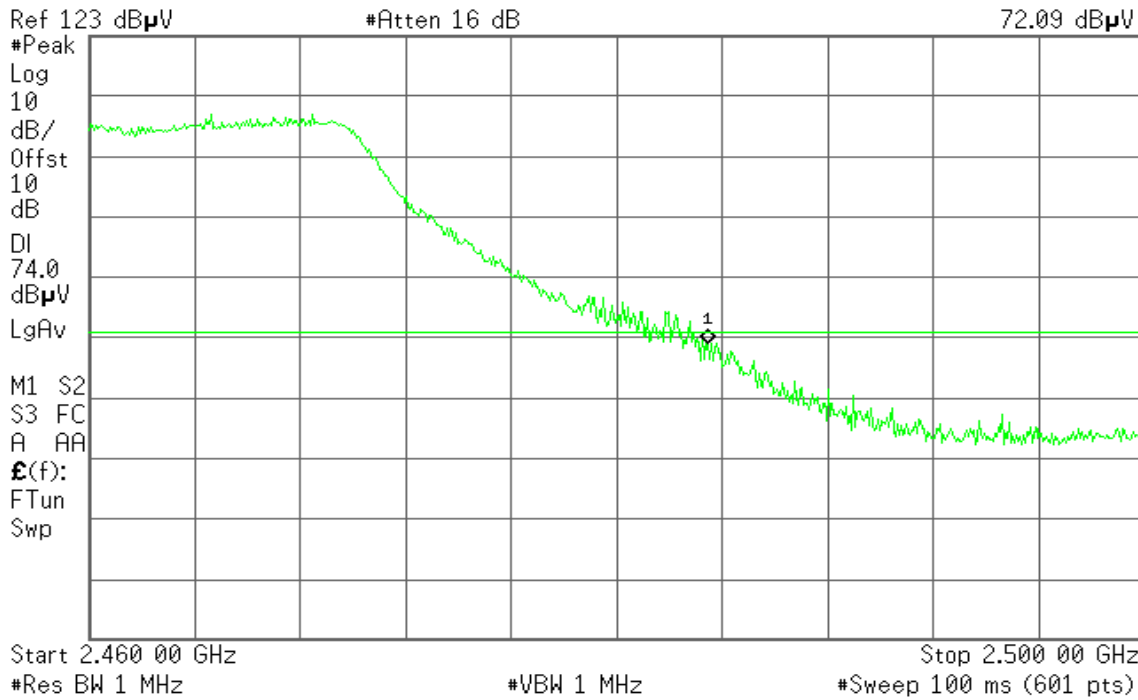


Detector mode: Average

Polarity: Horizontal

Agilent 21:22:45 Nov 26, 2008

R T

Mkr1 2.483 50 GHz
51.96 dBμV

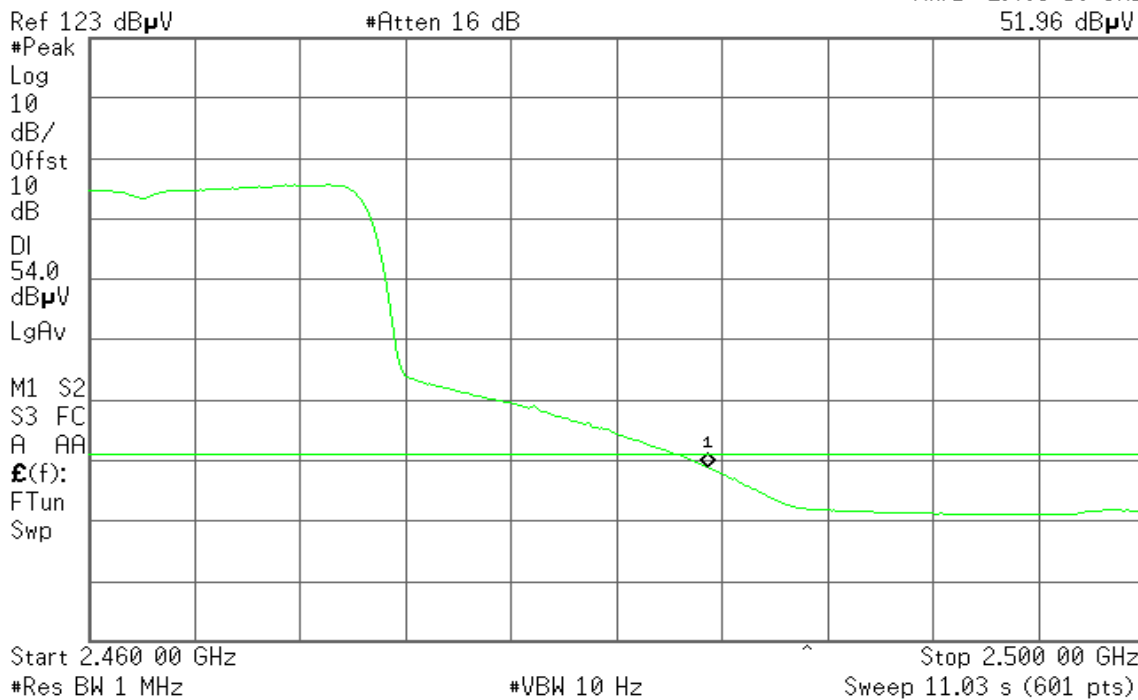



Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 21:50:43 Nov 26, 2008

R T

Mkr1 2.390 0 GHz
63.43 dB μ V

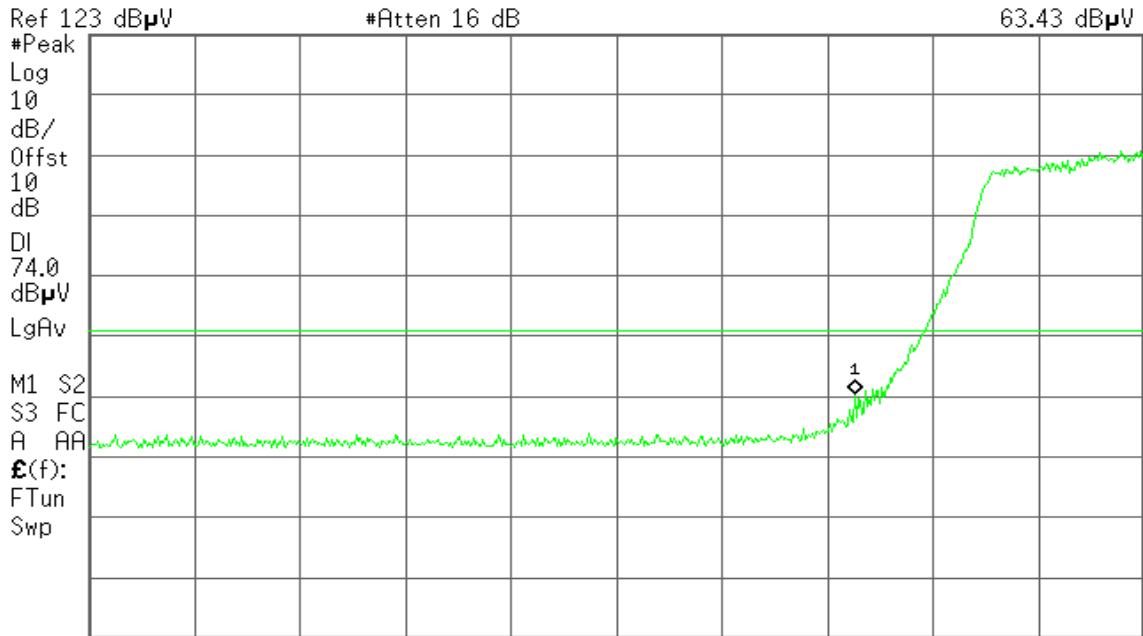

Start 2.310 0 GHz #Res BW 1 MHz #VBW 1 MHz Stop 2.420 0 GHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 21:51:12 Nov 26, 2008

R T

Mkr1 2.390 0 GHz
45.71 dB μ V

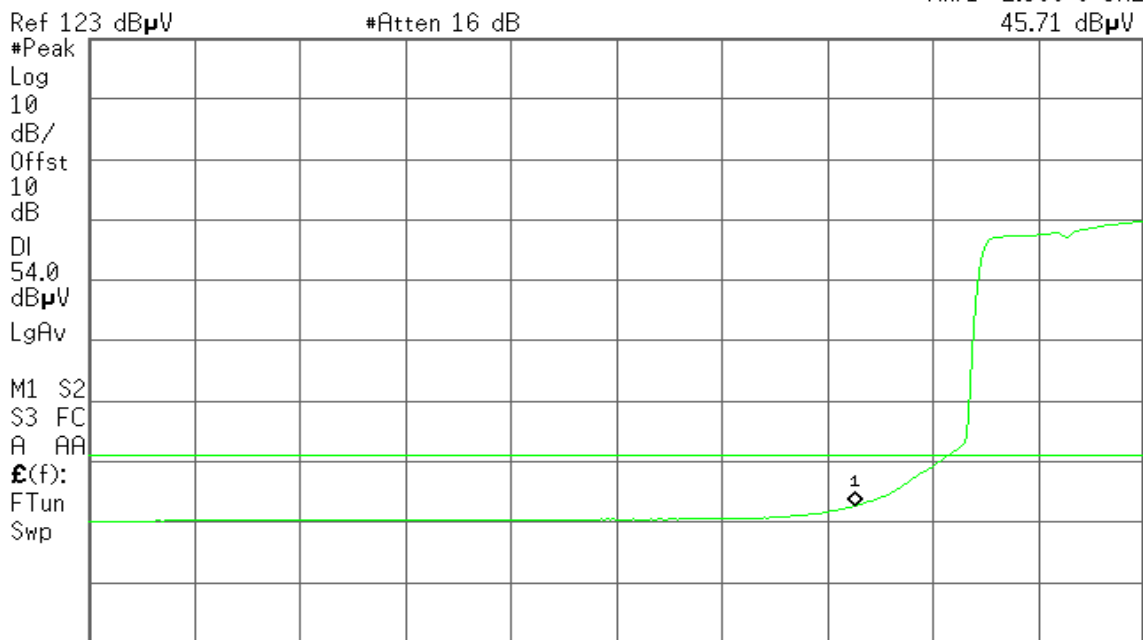

Start 2.310 0 GHz #Res BW 1 MHz #VBW 10 Hz Stop 2.420 0 GHz Sweep 8.577 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 21:46:43 Nov 26, 2008

R T

Mkr1 2.390 0 GHz
67.68 dBμV

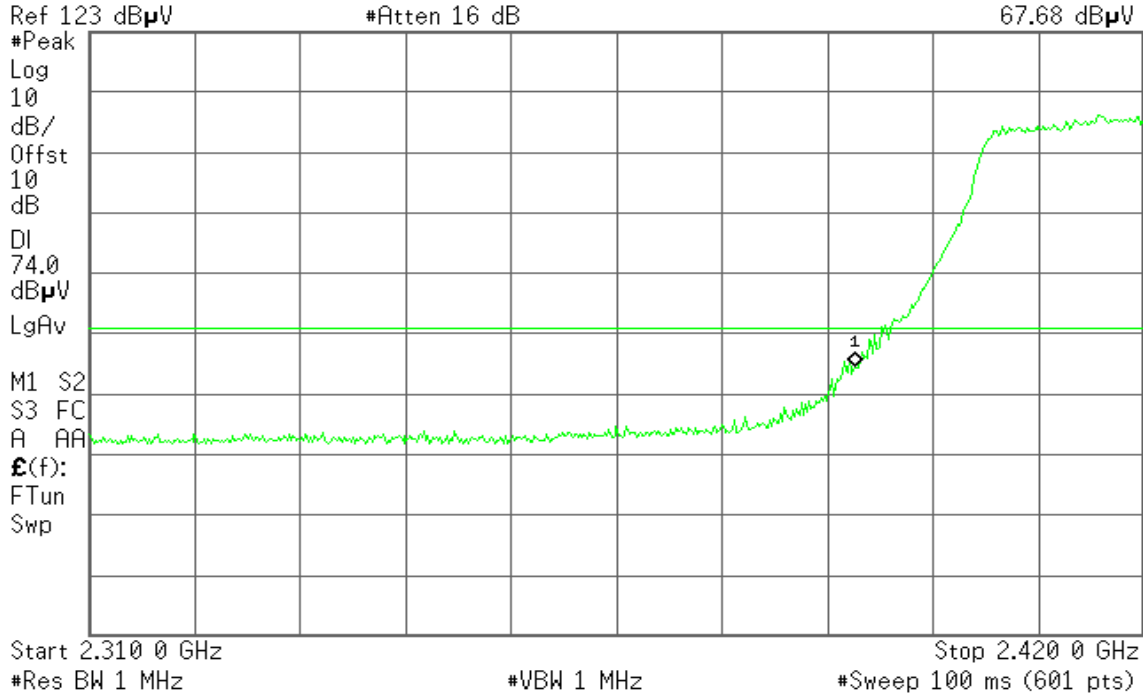


Detector mode: Average

Polarity: Horizontal

Agilent 21:47:14 Nov 26, 2008

R T

Mkr1 2.390 0 GHz
50.08 dBμV

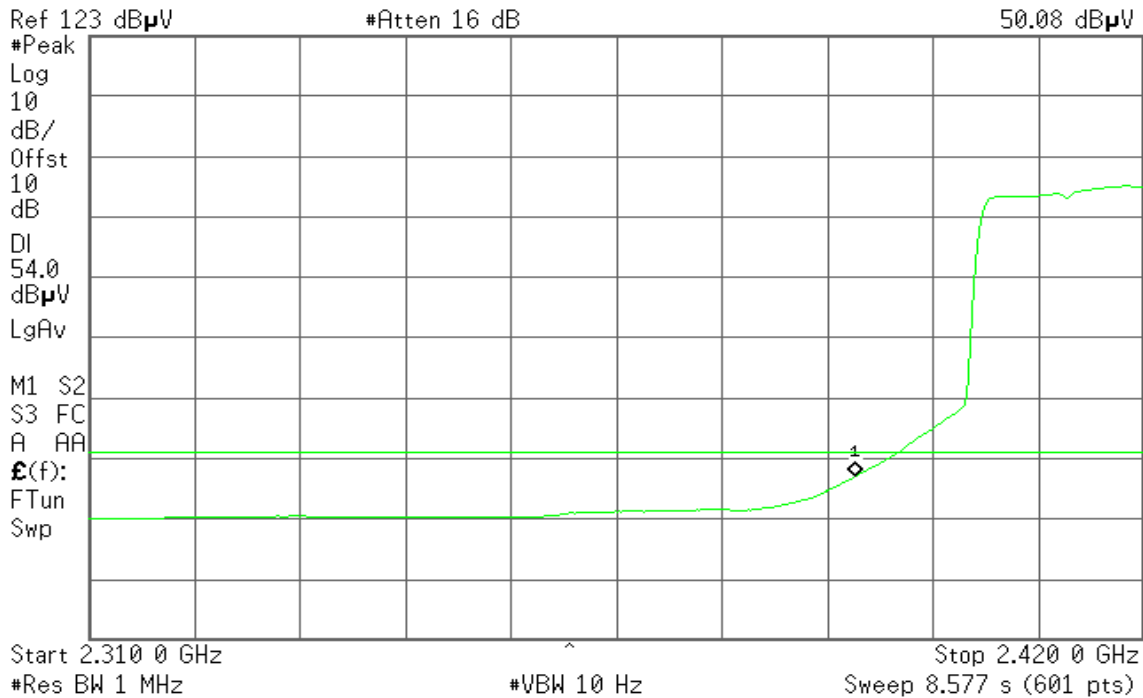



Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 22:07:36 Nov 26, 2008

R T

Mkr1 2.483 50 GHz
62.86 dB μ V

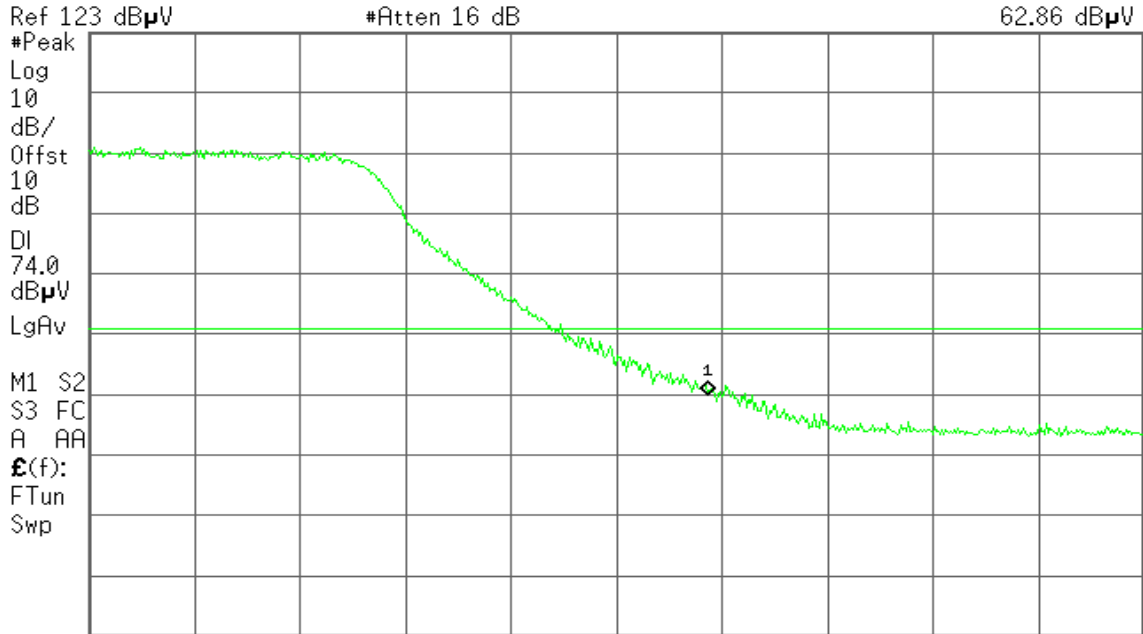

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 22:08:32 Nov 26, 2008

R T

Mkr1 2.483 50 GHz
46.99 dB μ V

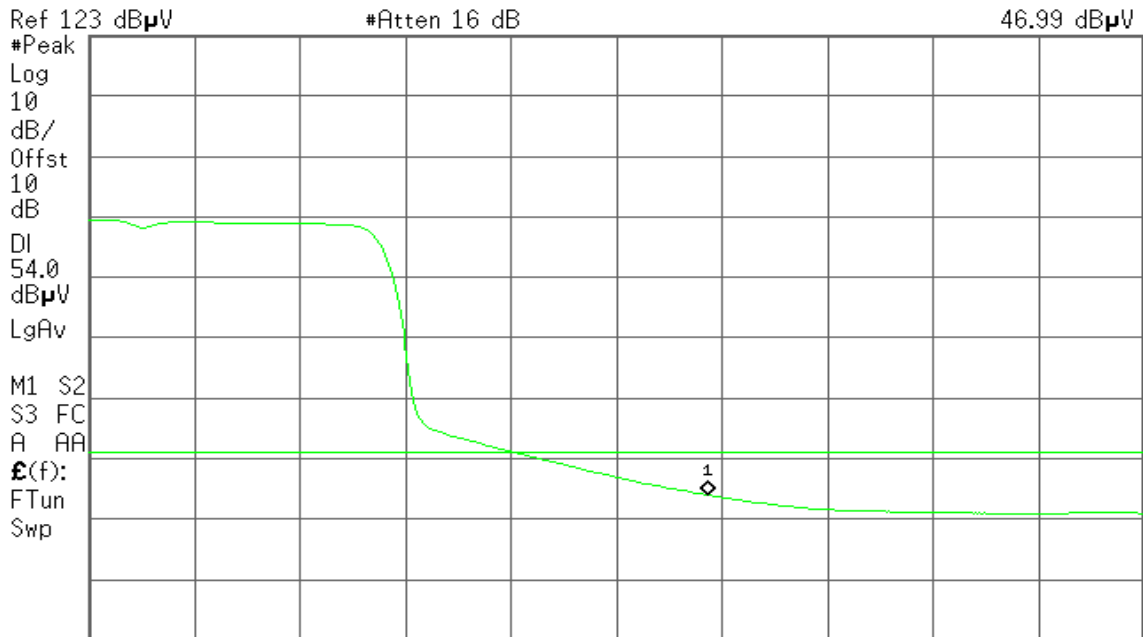

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 22:01:07 Nov 26, 2008

R T

Mkr1 2.483 50 GHz
72.73 dB μ V

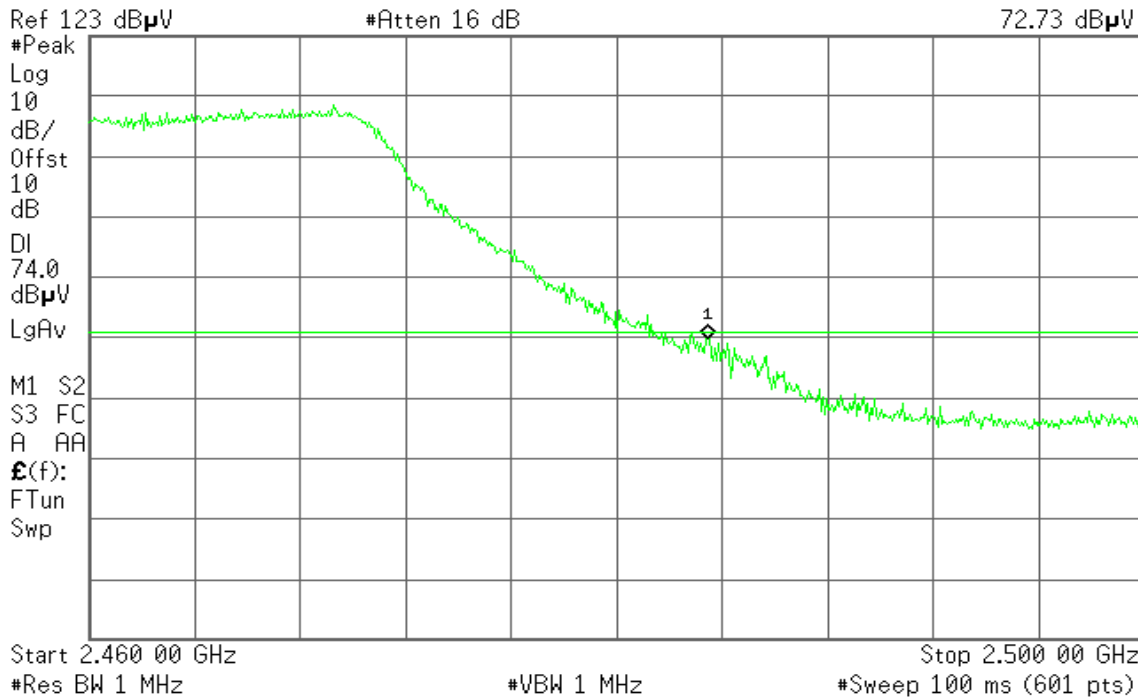


Detector mode: Average

Polarity: Horizontal

Agilent 22:00:37 Nov 26, 2008

R T

Mkr1 2.483 50 GHz
53.56 dB μ V

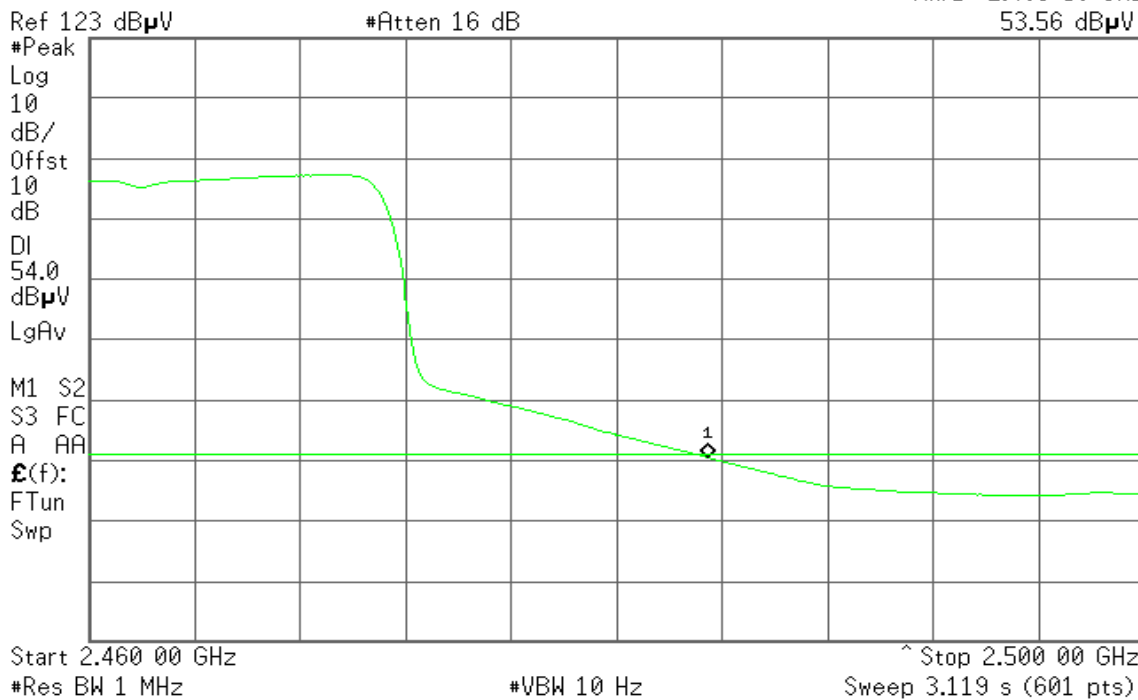




Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 22:35:48 Nov 26, 2008

R T

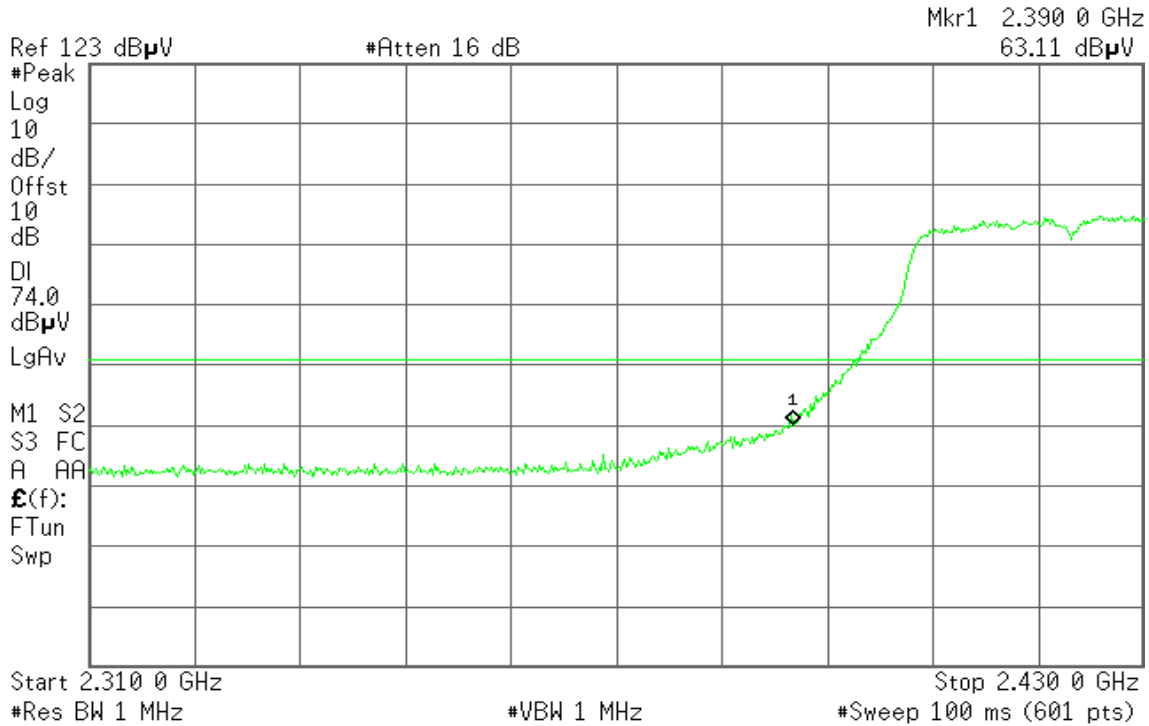


Detector mode: Average

Polarity: Vertical

Agilent 22:36:13 Nov 26, 2008

R T

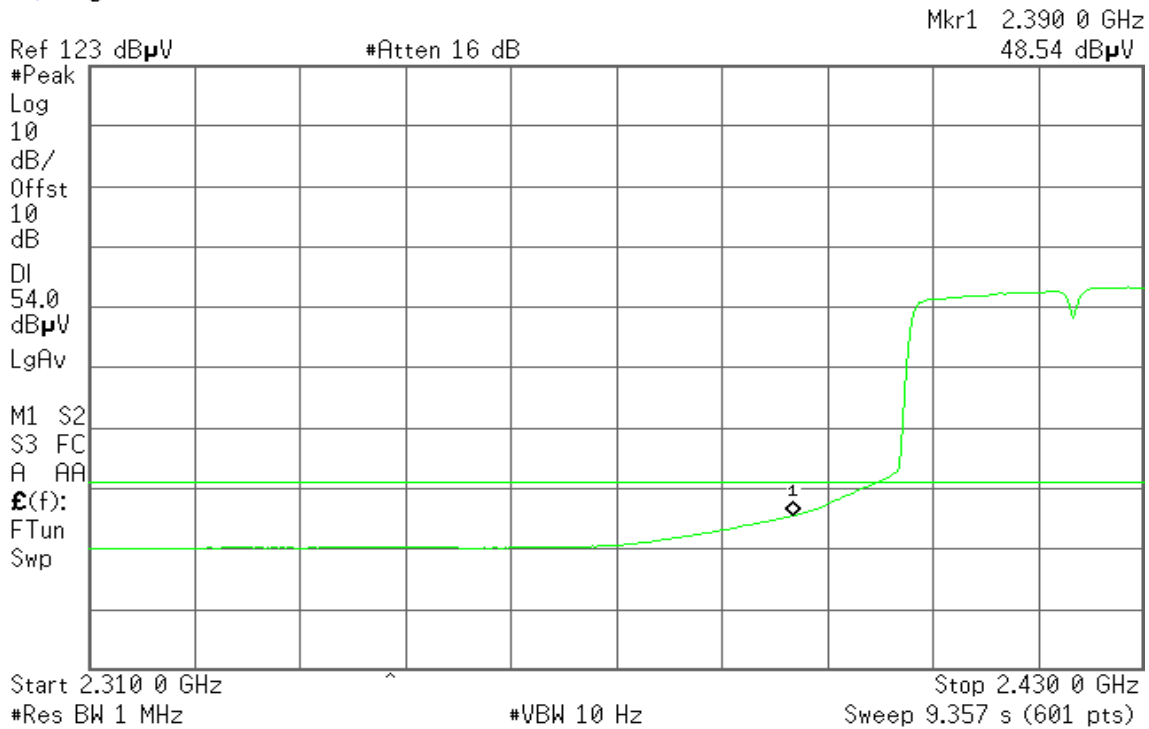




Detector mode: Peak

Polarity: Horizontal

Agilent 22:29:54 Nov 26, 2008

R T

Mkr1 2.390 0 GHz
69.63 dBμV

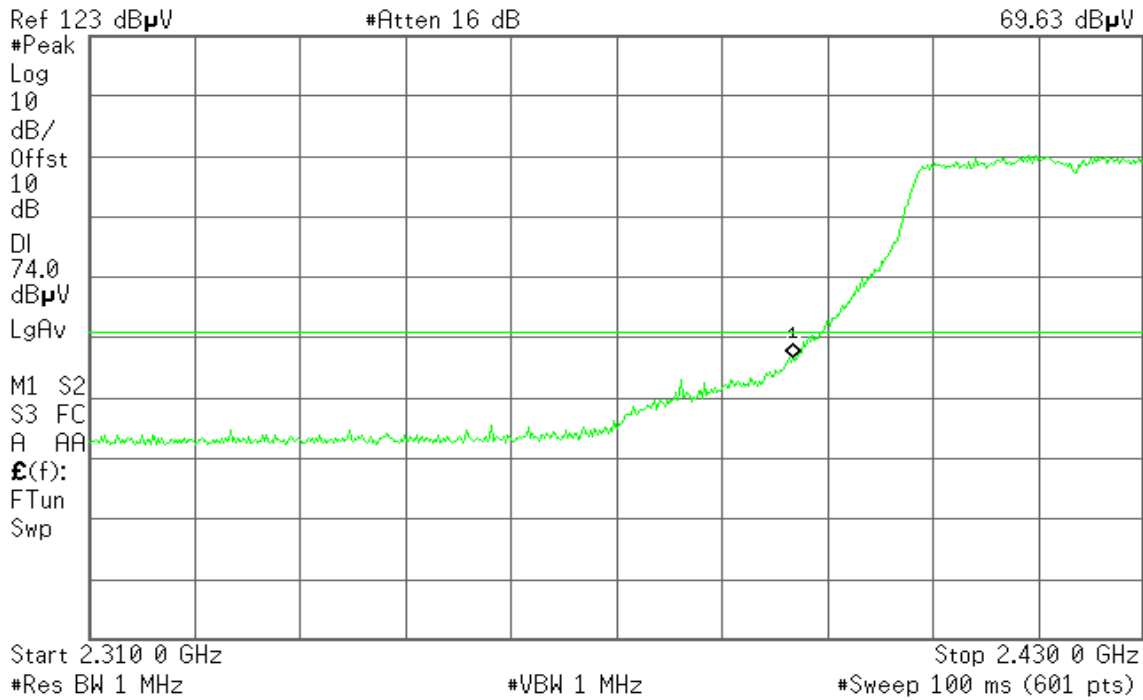


Detector mode: Average

Polarity: Horizontal

Agilent 22:30:29 Nov 26, 2008

R T

Mkr1 2.390 0 GHz
53.57 dBμV

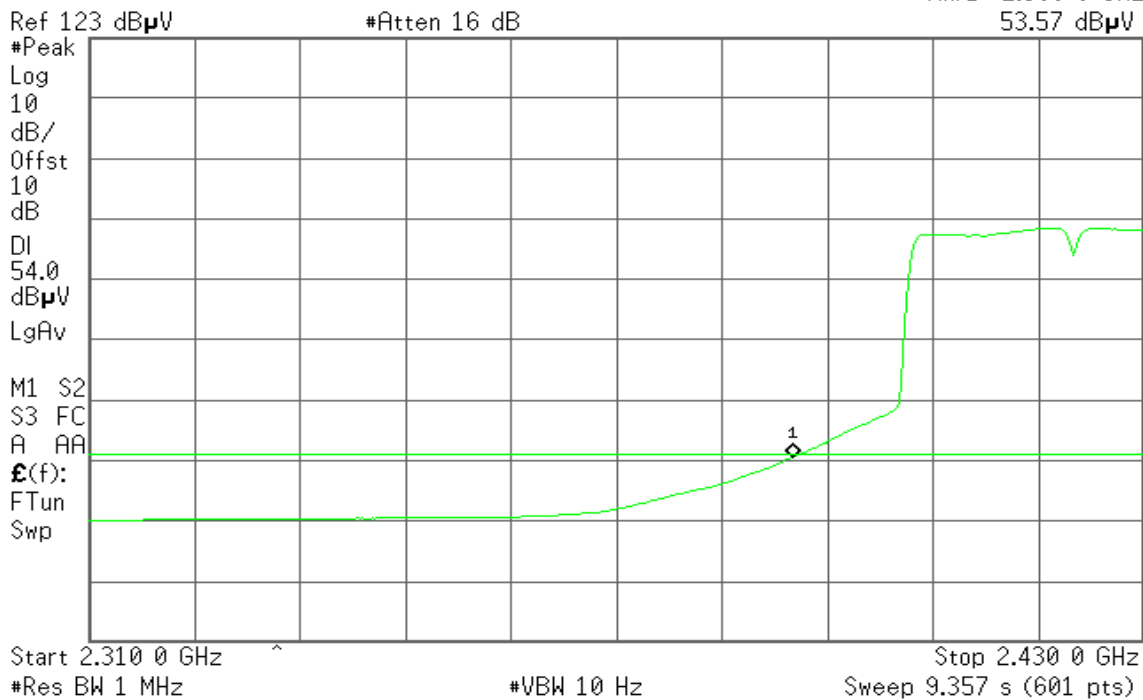



Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 22:21:31 Nov 26, 2008

R T

Mkr1 2.483 50 GHz
66.20 dB μ V

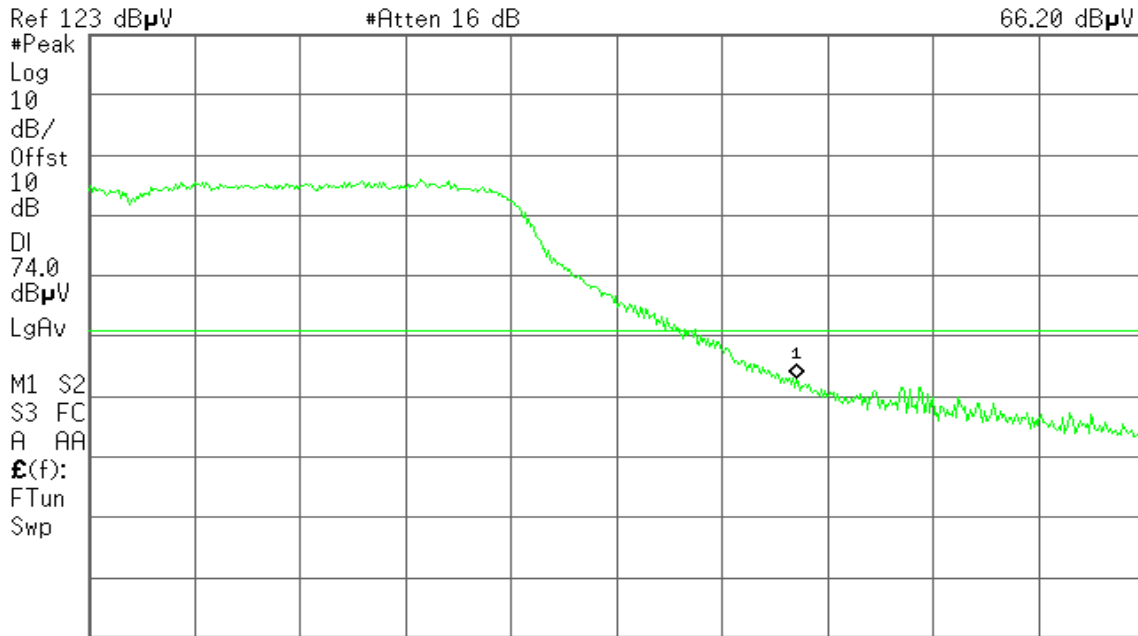

Start 2.450 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 22:21:56 Nov 26, 2008

R T

Mkr1 2.483 50 GHz
46.90 dB μ V

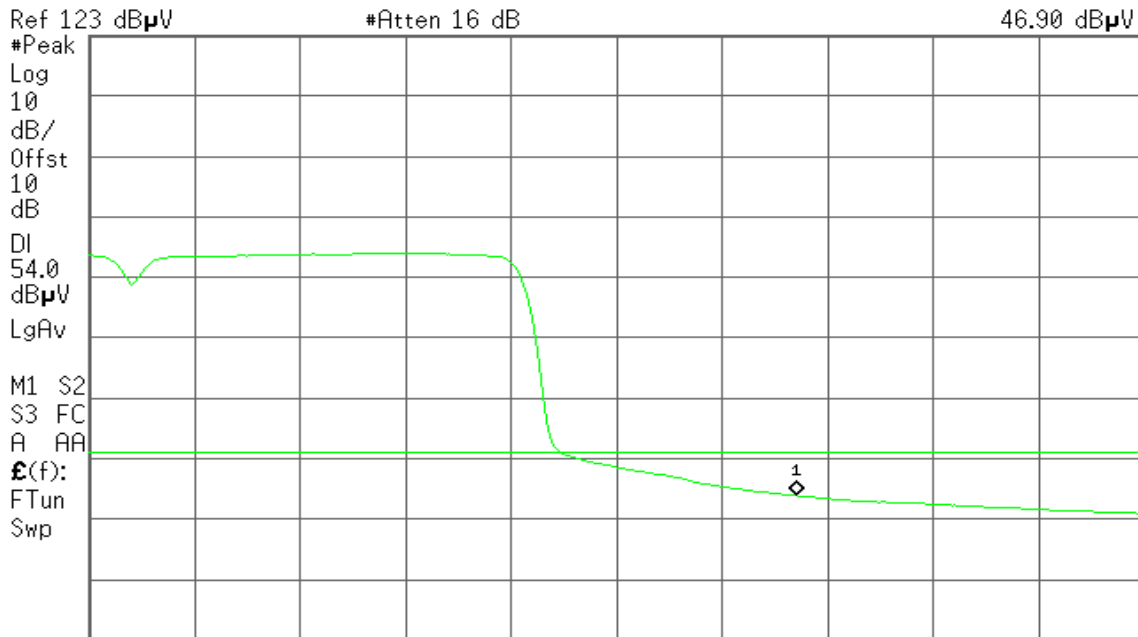

Start 2.450 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.899 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 22:15:13 Nov 26, 2008

R T

Mkr1 2.483 50 GHz
70.24 dBμV

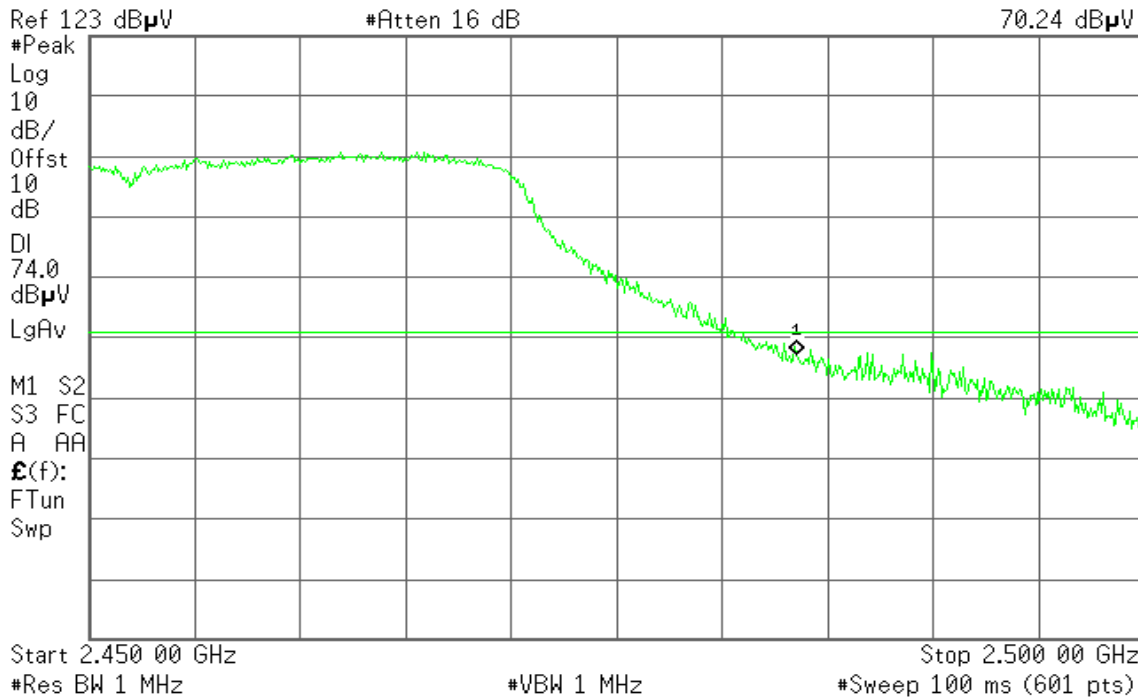


Detector mode: Average

Polarity: Horizontal

Agilent 22:14:28 Nov 26, 2008

R T

Mkr1 2.483 50 GHz
51.23 dBμV

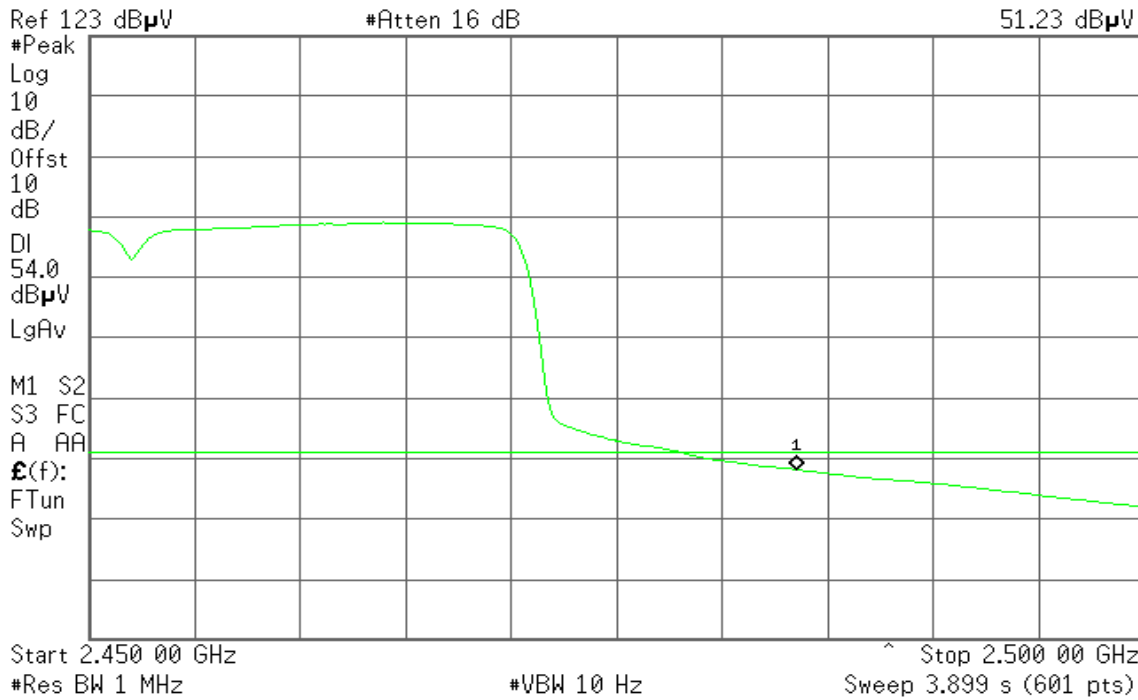



HALF LENGTH BOARD / DIPOLE ANTENNA

Band Edges (IEEE 802.11b mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 18:49:33 Nov 25, 2008

R T

Mkr1 2.390 0 GHz
61.97 dBµV

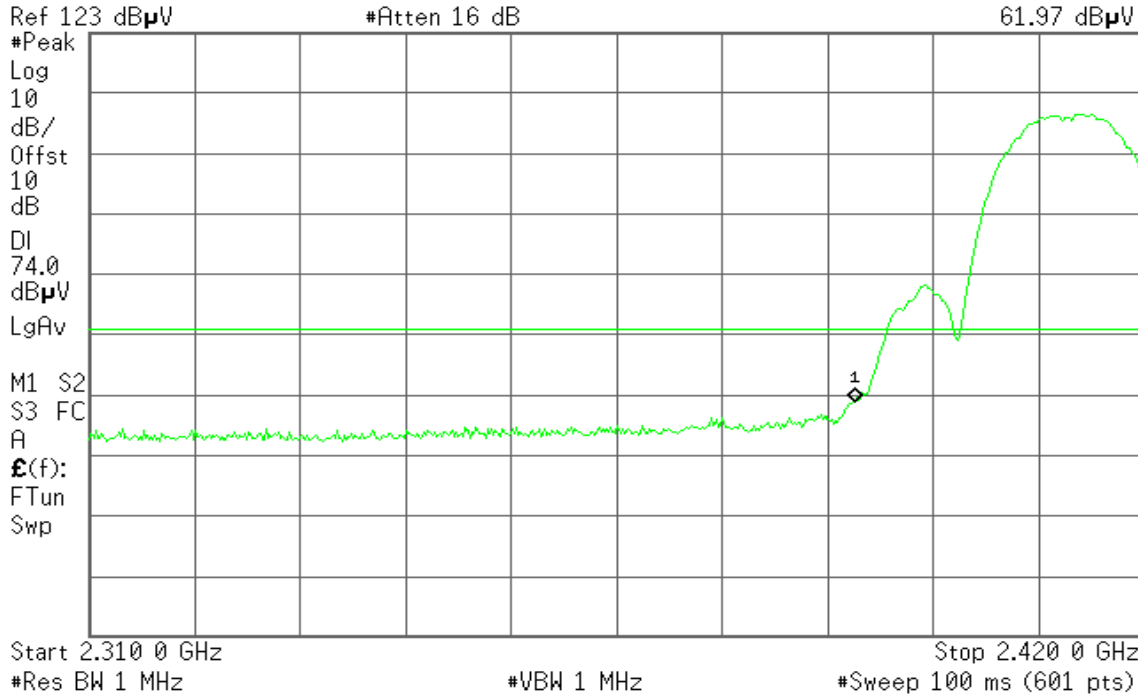


Detector mode: Average

Polarity: Vertical

Agilent 18:50:00 Nov 25, 2008

R T

Mkr1 2.390 0 GHz
51.83 dBµV

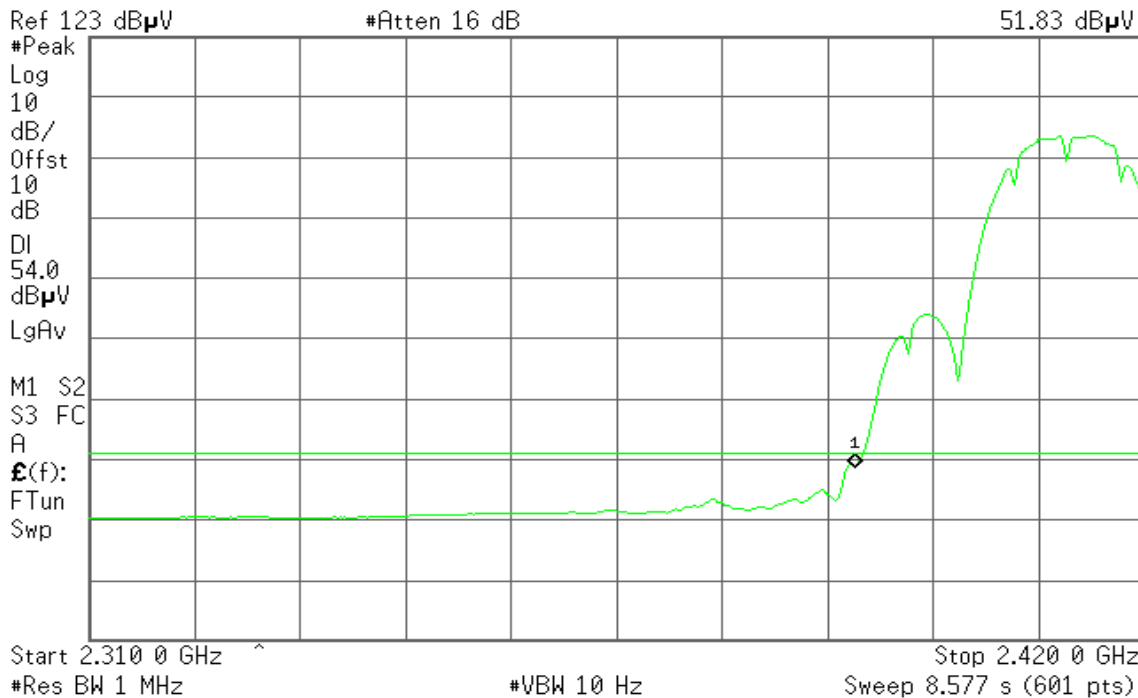




Detector mode: Peak

Polarity: Horizontal

Agilent 18:56:28 Nov 25, 2008

R T

Mkr1 2.390 0 GHz
55.03 dBμV

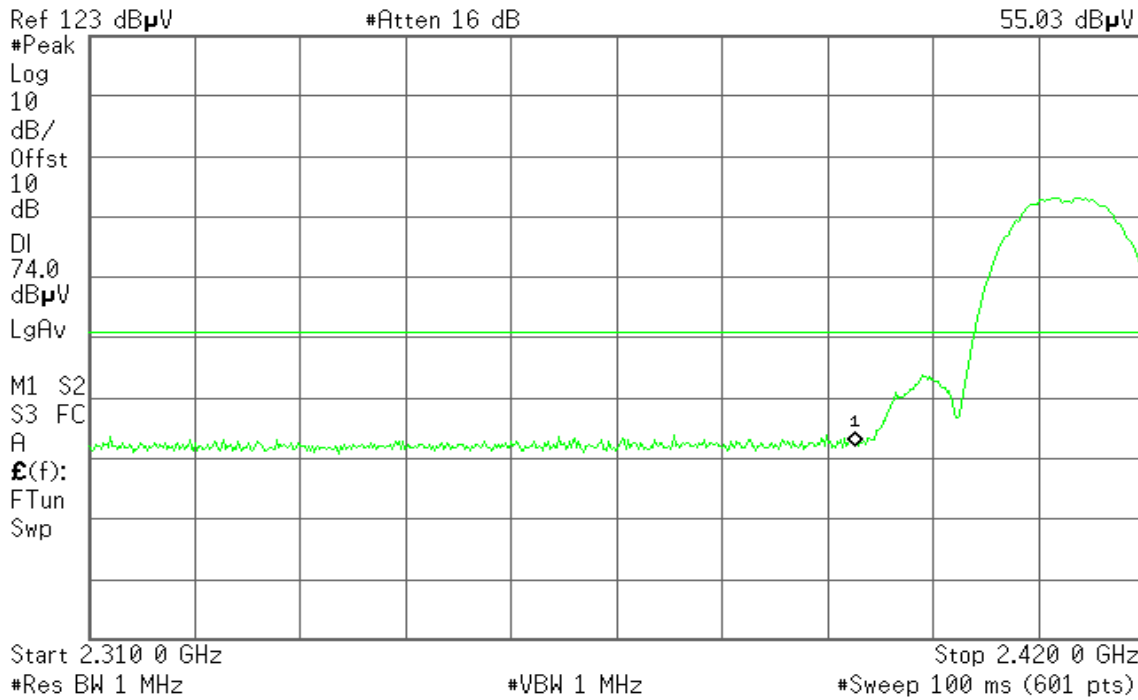


Detector mode: Average

Polarity: Horizontal

Agilent 18:55:26 Nov 25, 2008

R T

Mkr1 2.390 0 GHz
44.04 dBμV

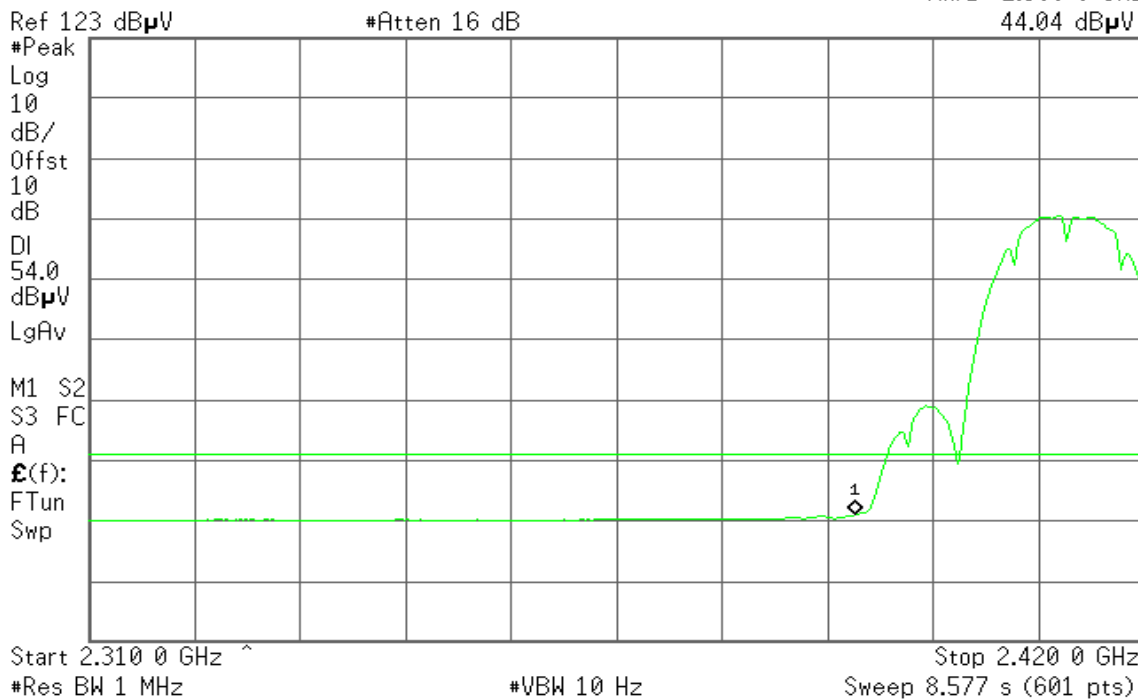



Band Edges (IEEE 802.11b mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 19:06:38 Nov 25, 2008

R T

Mkr1 2.483 50 GHz
60.13 dBμV

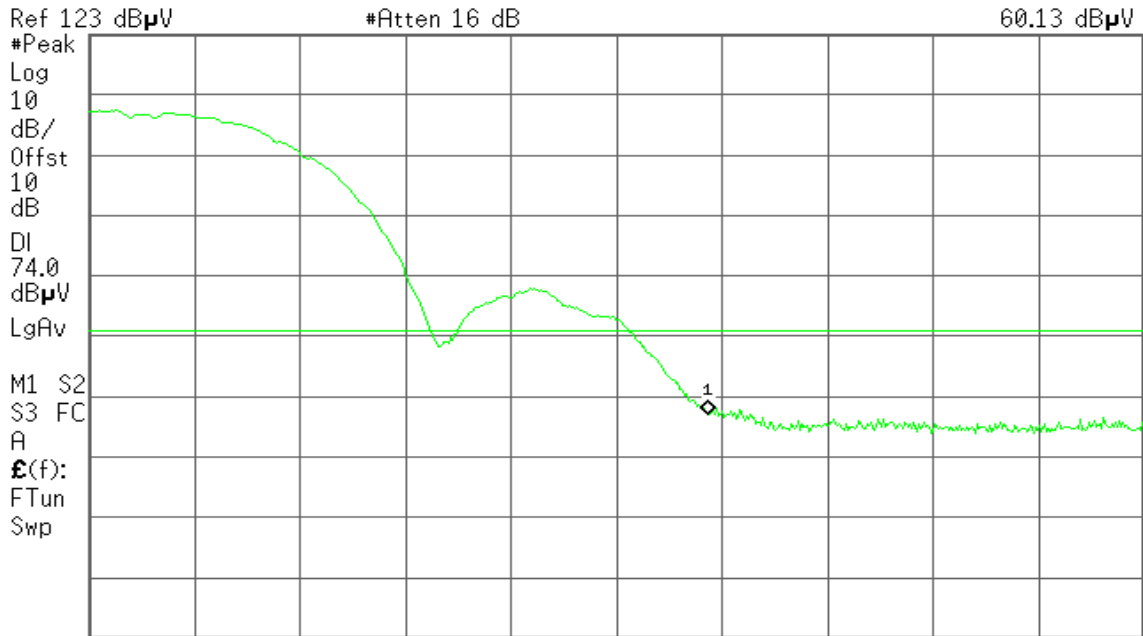

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 19:07:22 Nov 25, 2008

R T

Mkr1 2.483 50 GHz
49.78 dBμV

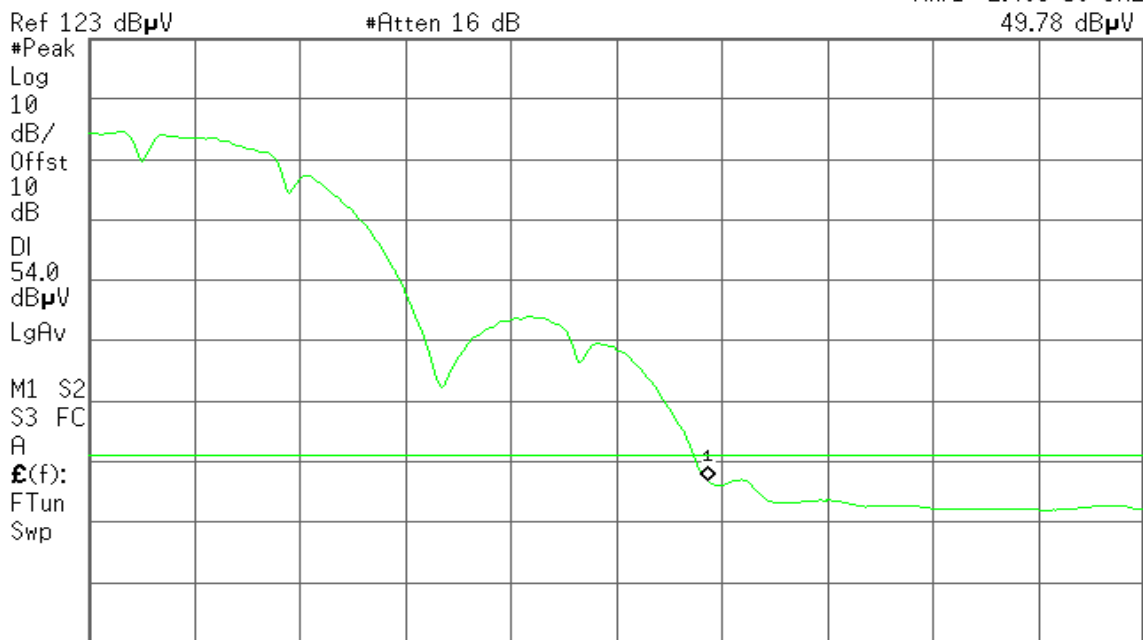

Start 2.460 00 GHz^

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 19:22:26 Nov 25, 2008

R T

Mkr1 2.483 50 GHz
55.92 dBμV

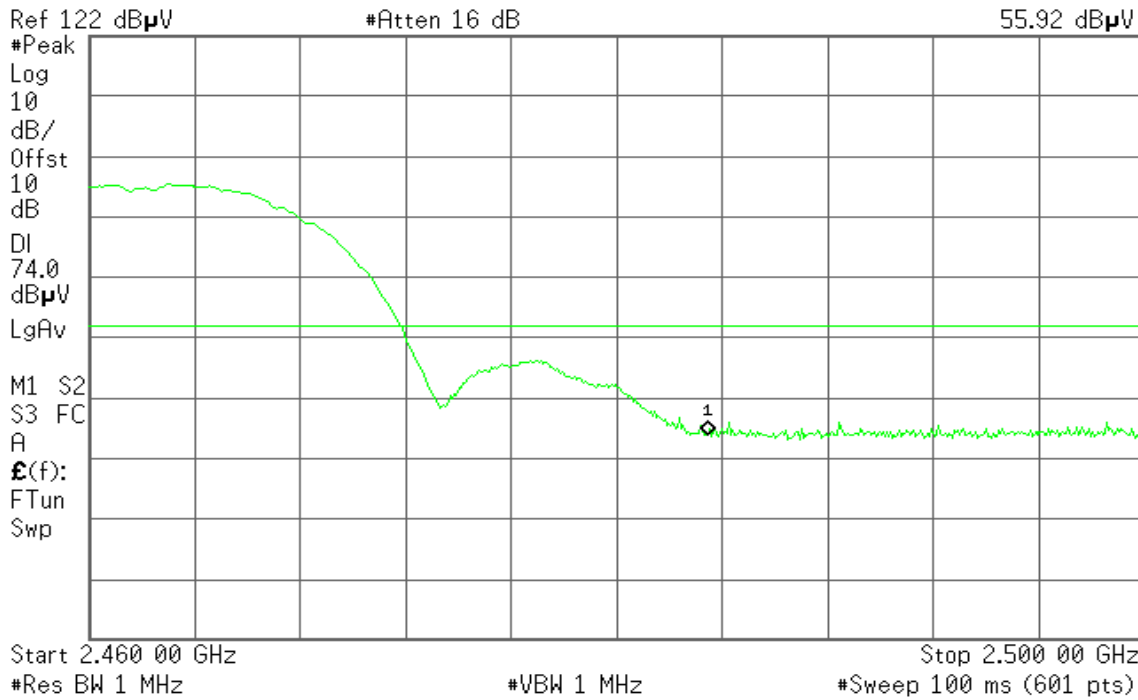


Detector mode: Average

Polarity: Horizontal

Agilent 19:22:53 Nov 25, 2008

R T

Mkr1 2.483 50 GHz
44.18 dBμV

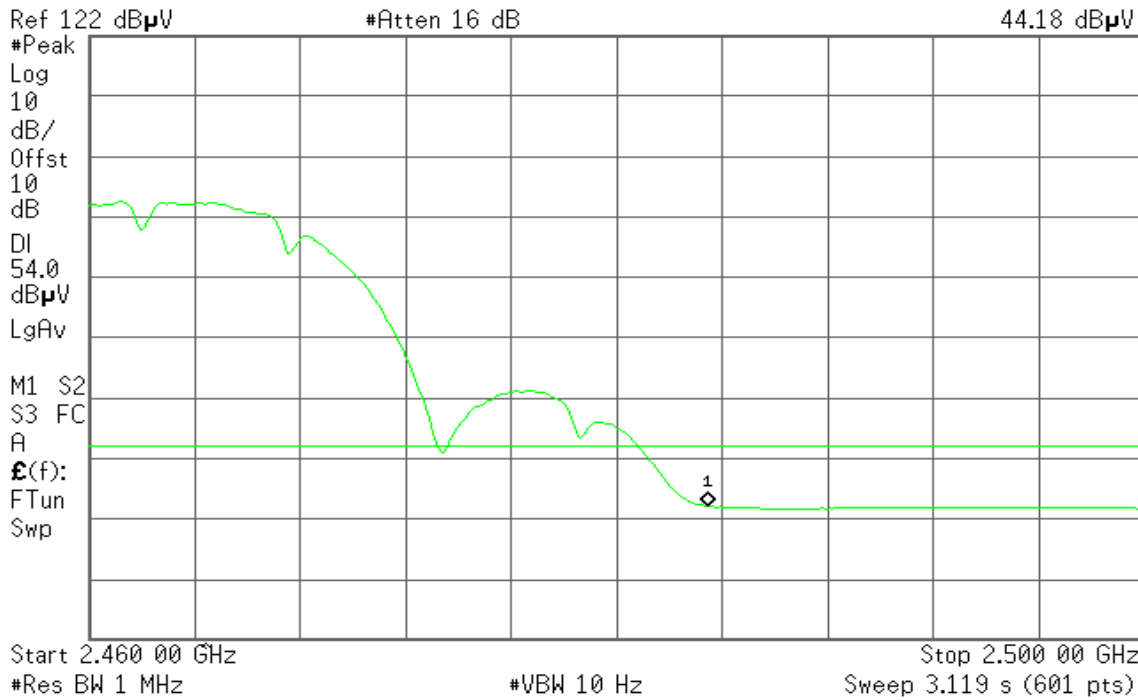



Band Edges (IEEE 802.11g mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 20:09:29 Nov 25, 2008

R T

Mkr1 2.390 0 GHz
70.22 dBμV

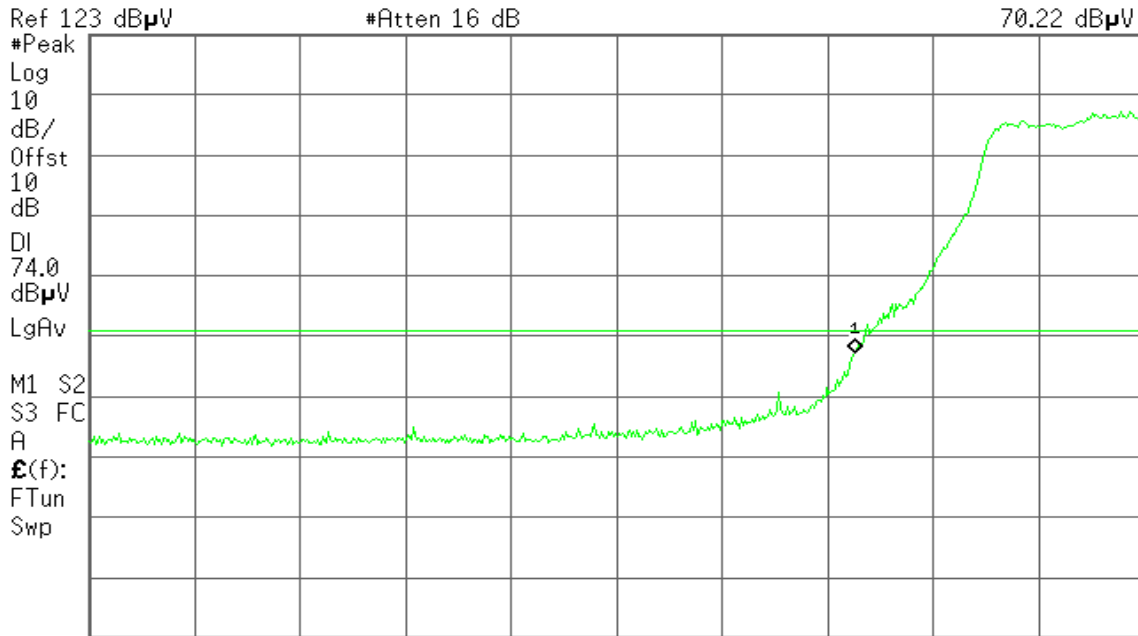

Start 2.310 0 GHz

Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 20:10:36 Nov 25, 2008

R T

Mkr1 2.390 0 GHz
70.22 dBμV

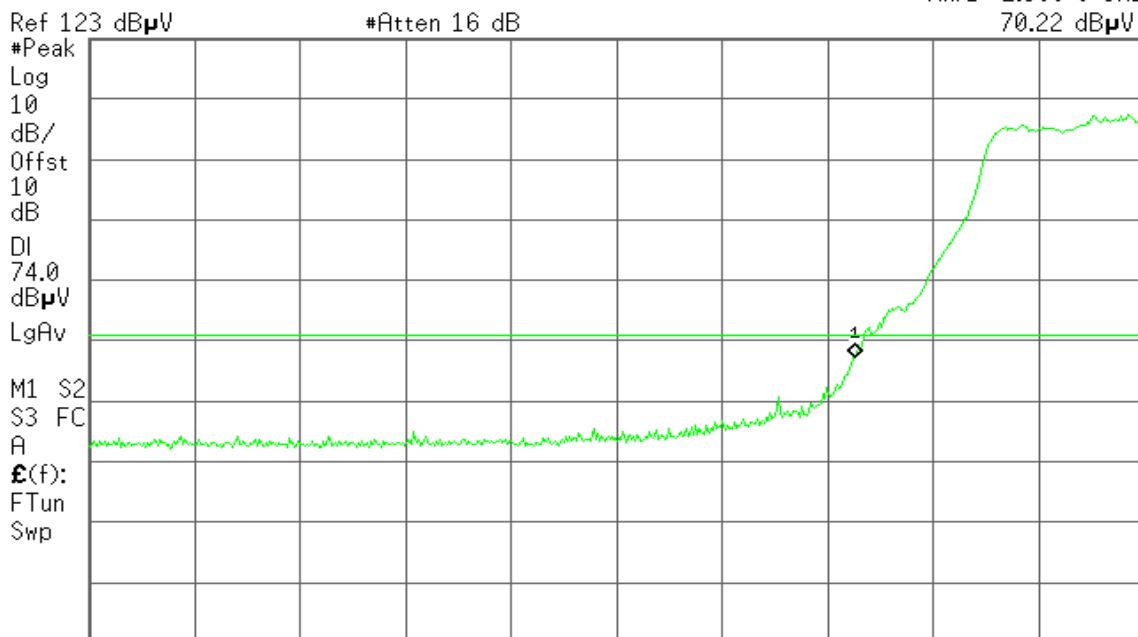

Start 2.310 0 GHz

Stop 2.420 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 20:15:33 Nov 25, 2008

R T

Mkr1 2.390 0 GHz
59.46 dBμV

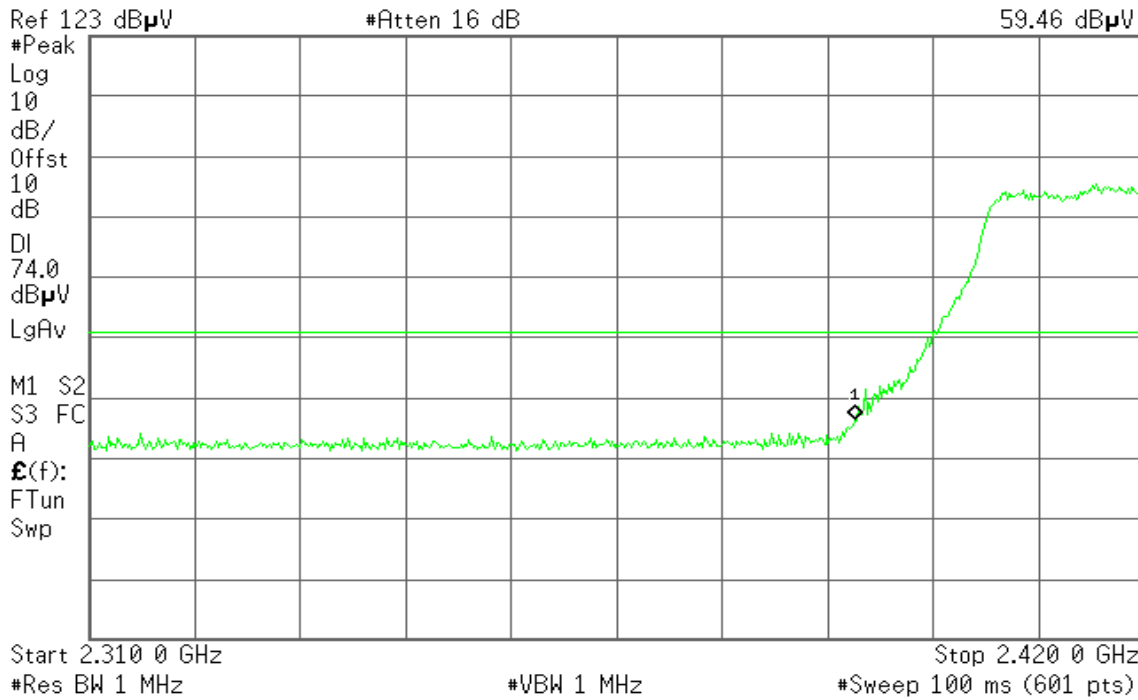


Detector mode: Average

Polarity: Horizontal

Agilent 20:15:56 Nov 25, 2008

R T

Mkr1 2.390 0 GHz
44.90 dBμV

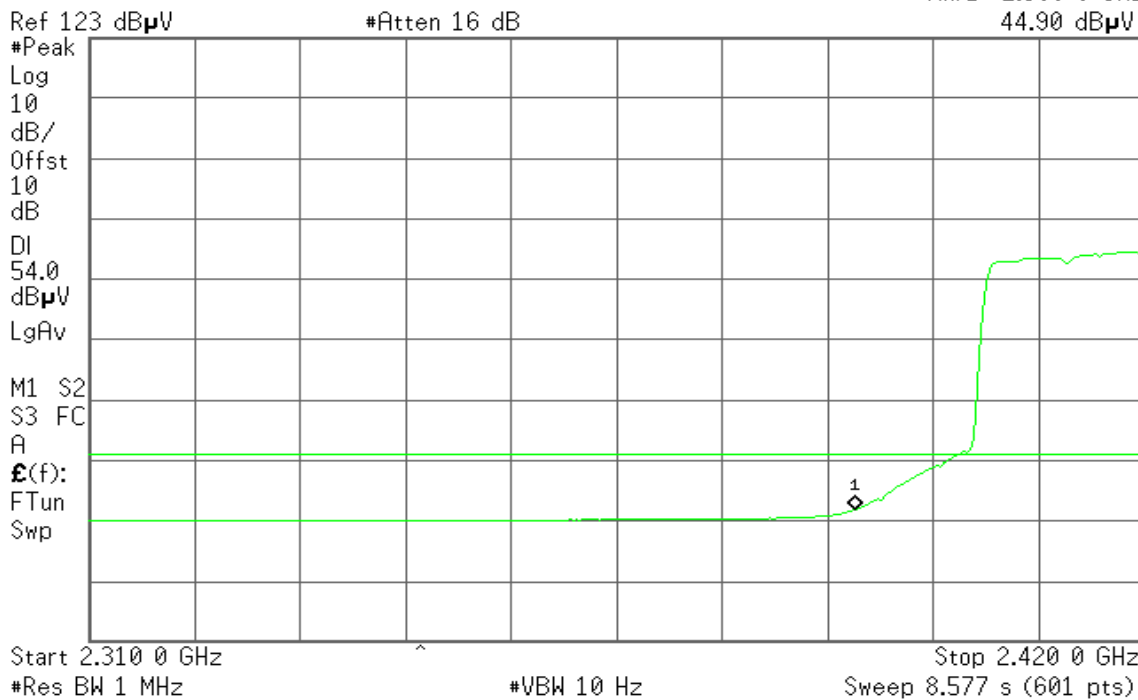



Band Edges (IEEE 802.11g mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 19:42:59 Nov 25, 2008

R T

Mkr1 2.483 50 GHz
69.02 dBμV

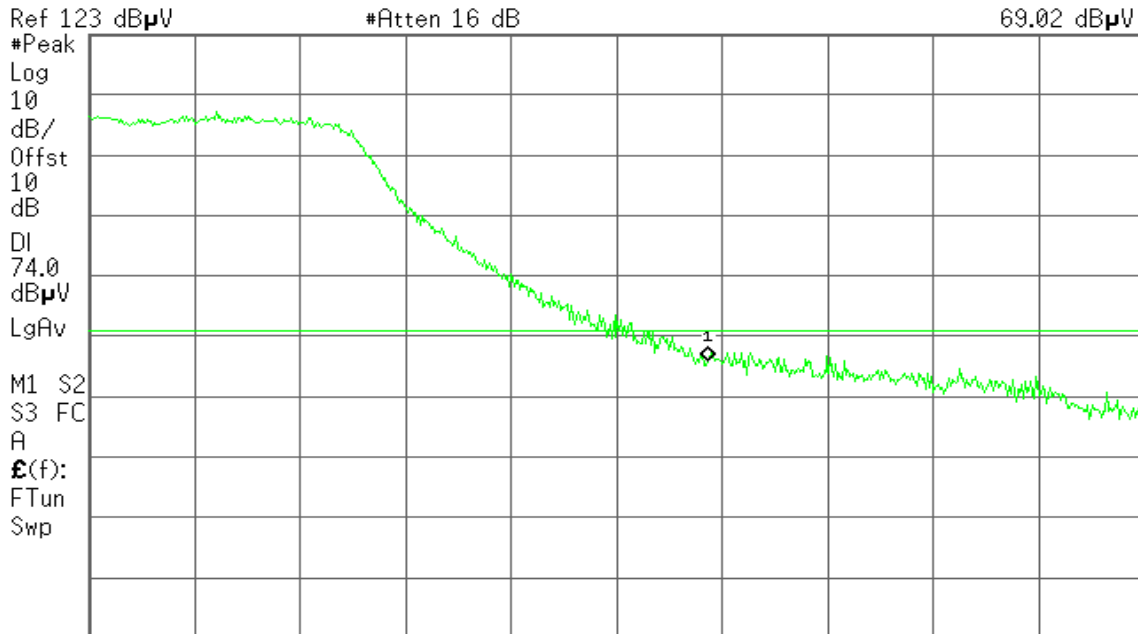

Start 2.460 00 GHz Stop 2.500 00 GHz
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Vertical

Agilent 19:42:33 Nov 25, 2008

R T

Mkr1 2.483 50 GHz
53.79 dBμV



Start 2.460 00 GHz Stop 2.500 00 GHz
#Res BW 1 MHz #VBW 10 Hz Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 19:54:19 Nov 25, 2008

R T

Mkr1 2.483 50 GHz
60.80 dBμV

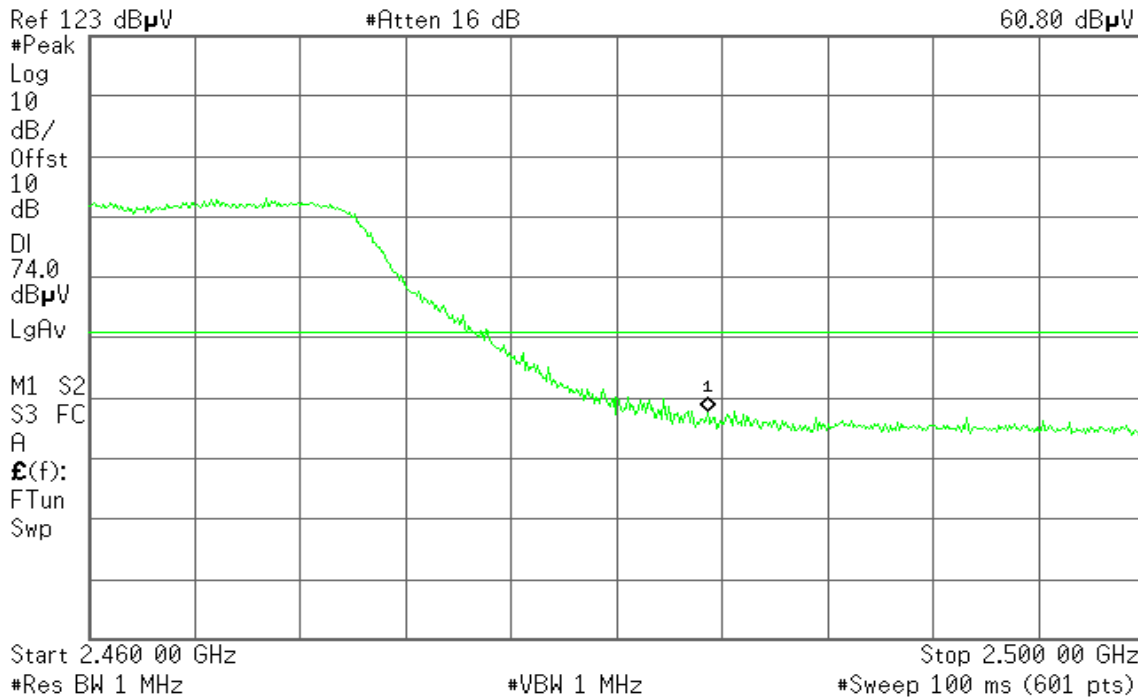


Detector mode: Average

Polarity: Horizontal

Agilent 19:54:38 Nov 25, 2008

R T

Mkr1 2.483 50 GHz
45.24 dBμV

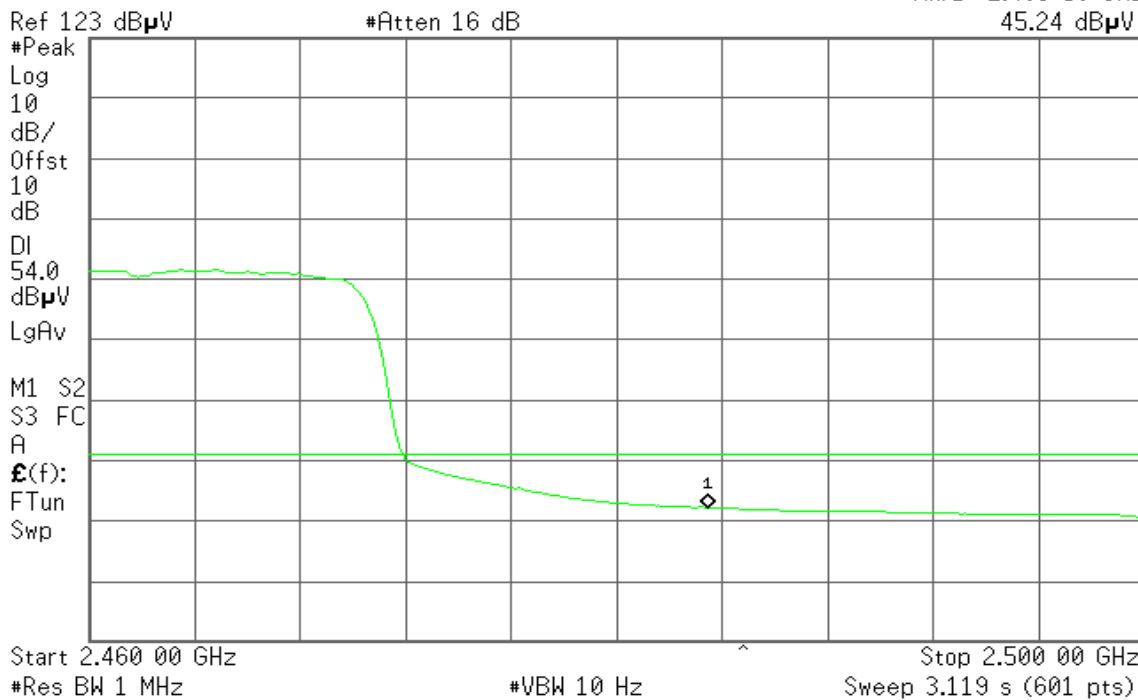



Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 20:23:52 Nov 25, 2008

R T

Mkr1 2.390 0 GHz
68.81 dB μ V

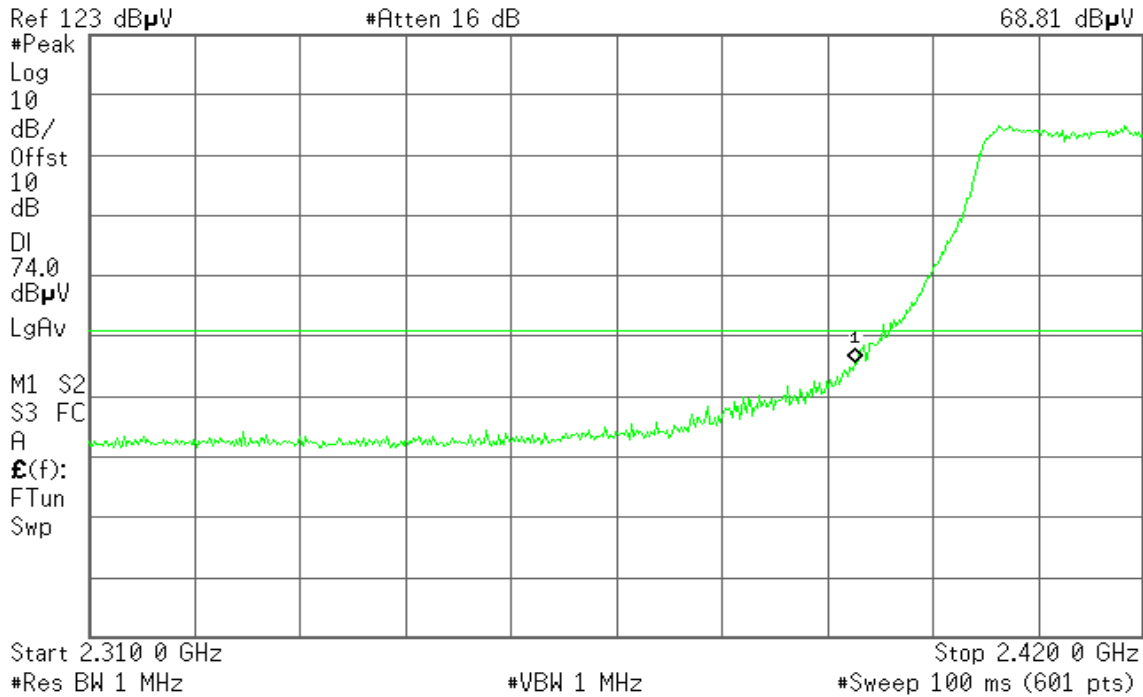


Detector mode: Average

Polarity: Vertical

Agilent 20:23:29 Nov 25, 2008

R L

Mkr1 2.390 0 GHz
52.88 dB μ V

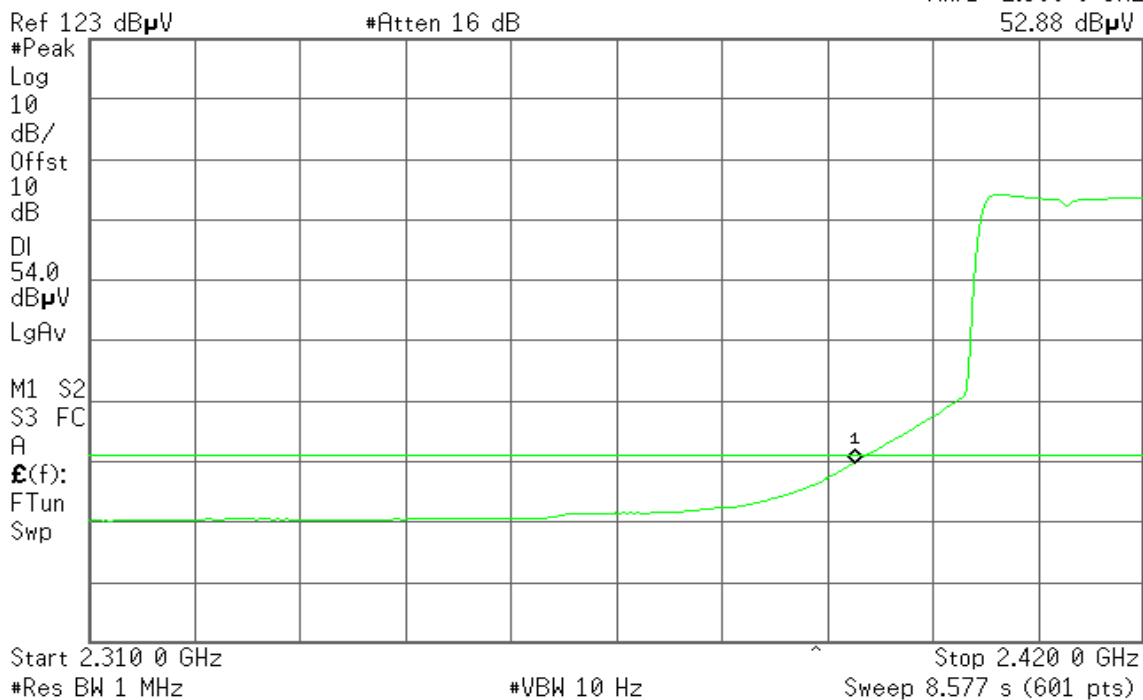




Detector mode: Peak

Polarity: Horizontal

Agilent 20:34:27 Nov 25, 2008

R T

Mkr1 2.390 0 GHz
60.56 dBμV

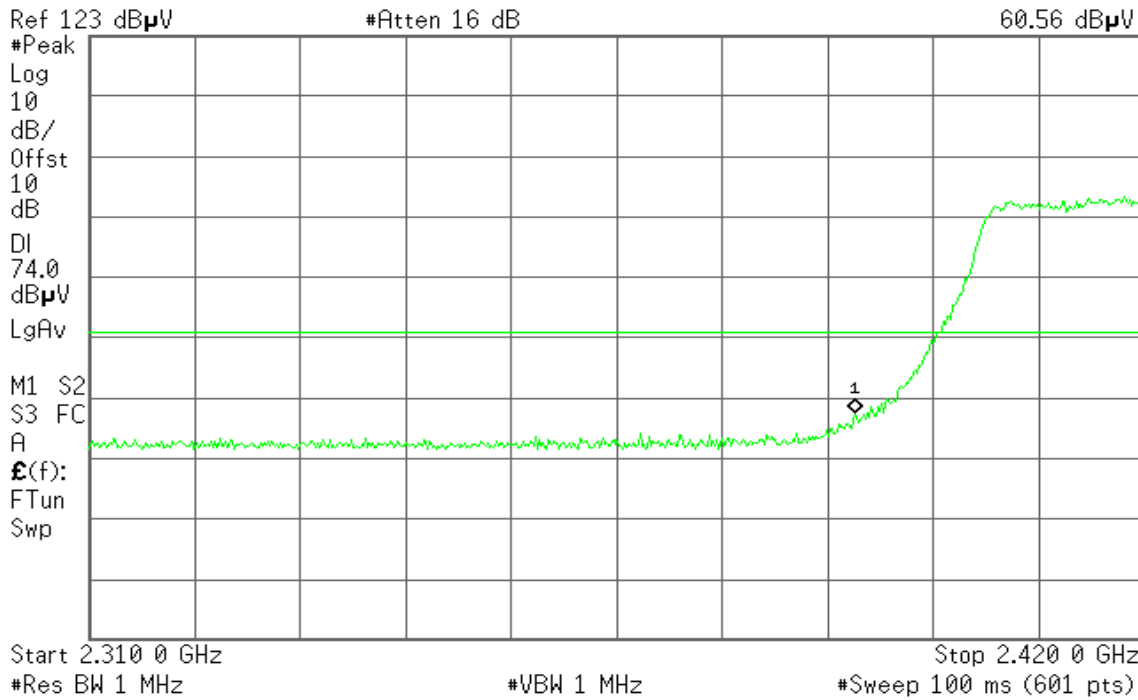


Detector mode: Average

Polarity: Horizontal

Agilent 20:33:44 Nov 25, 2008

R T

Mkr1 2.390 0 GHz
45.58 dBμV

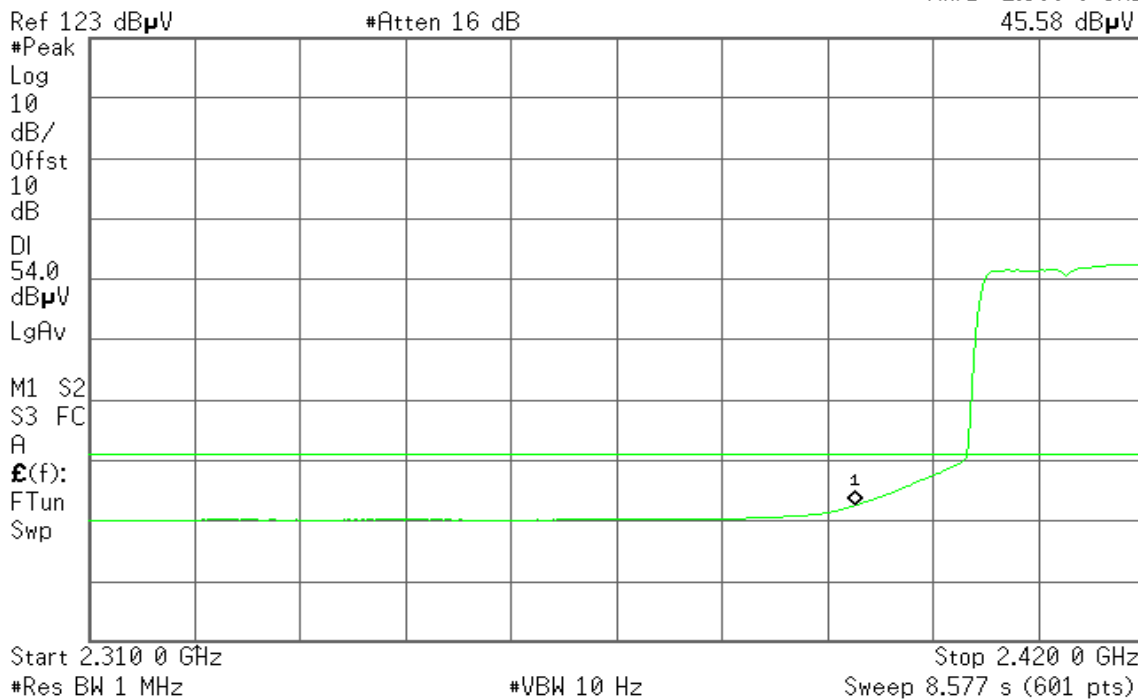



Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 20:44:24 Nov 25, 2008

R T

Mkr1 2.483 50 GHz
70.62 dB μ V

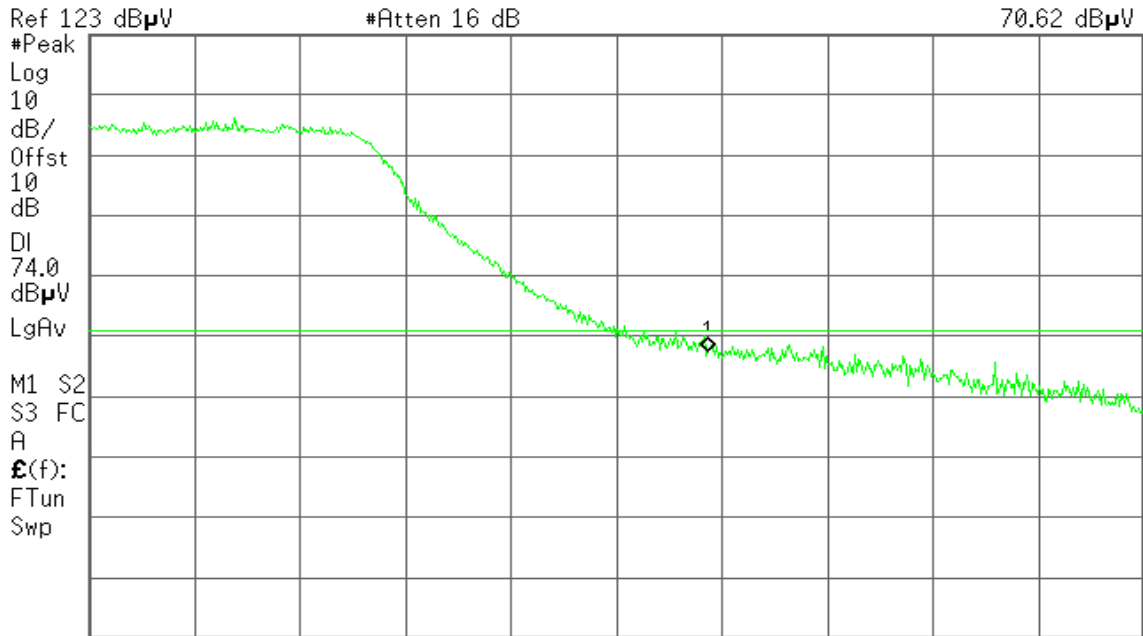

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 20:44:53 Nov 25, 2008

R T

Mkr1 2.483 50 GHz
53.23 dB μ V

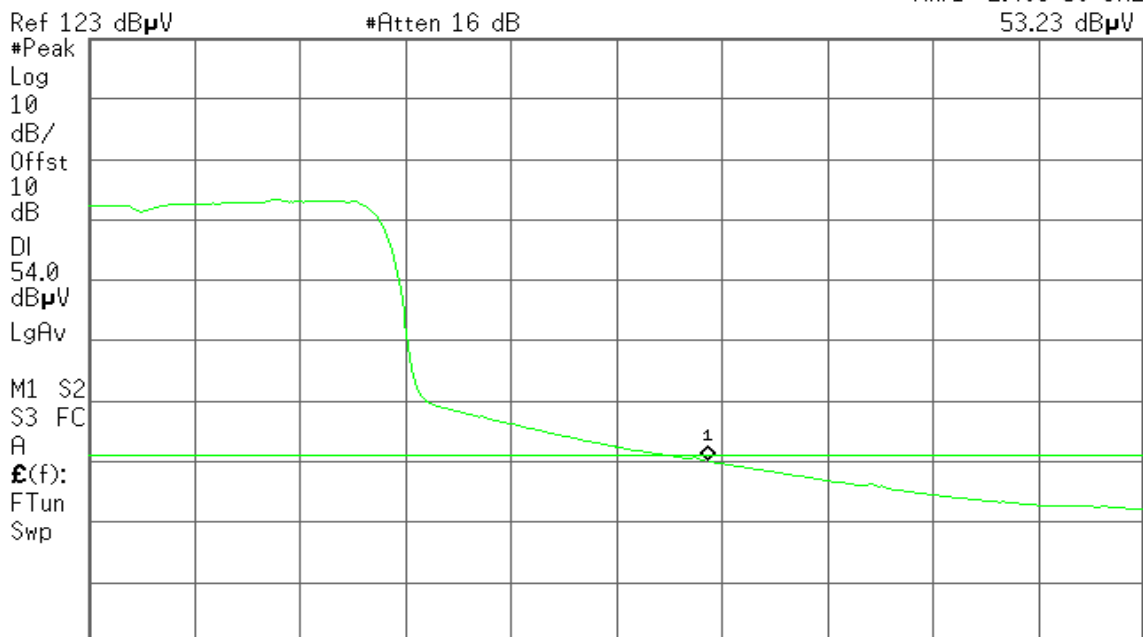

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 20:48:53 Nov 25, 2008

R T

Mkr1 2.483 50 GHz
57.57 dBμV

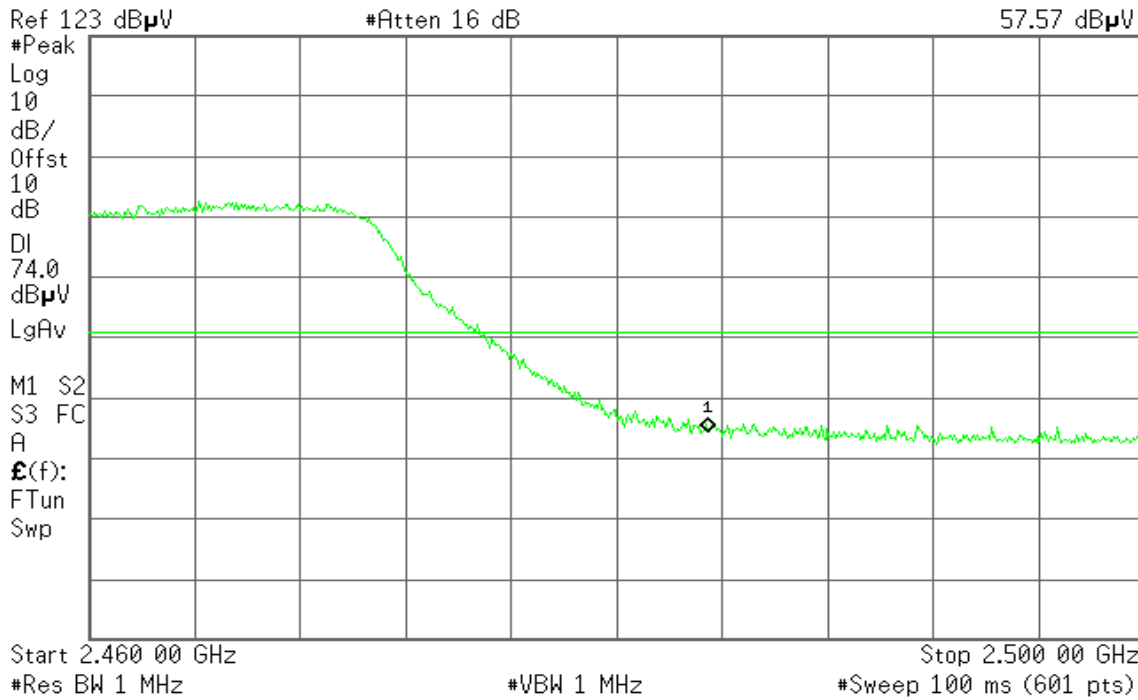


Detector mode: Average

Polarity: Horizontal

Agilent 20:49:14 Nov 25, 2008

R T

Mkr1 2.483 50 GHz
45.05 dBμV

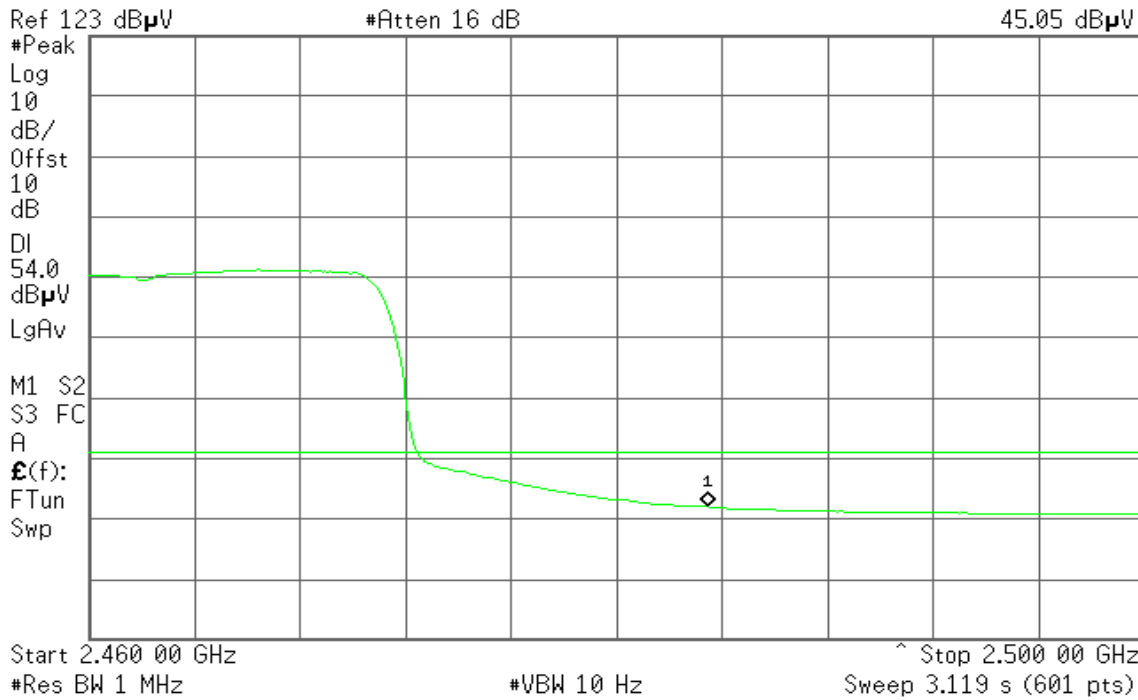



Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 21:17:00 Nov 25, 2008

R T

Mkr1 2.390 0 GHz
68.40 dB μ V

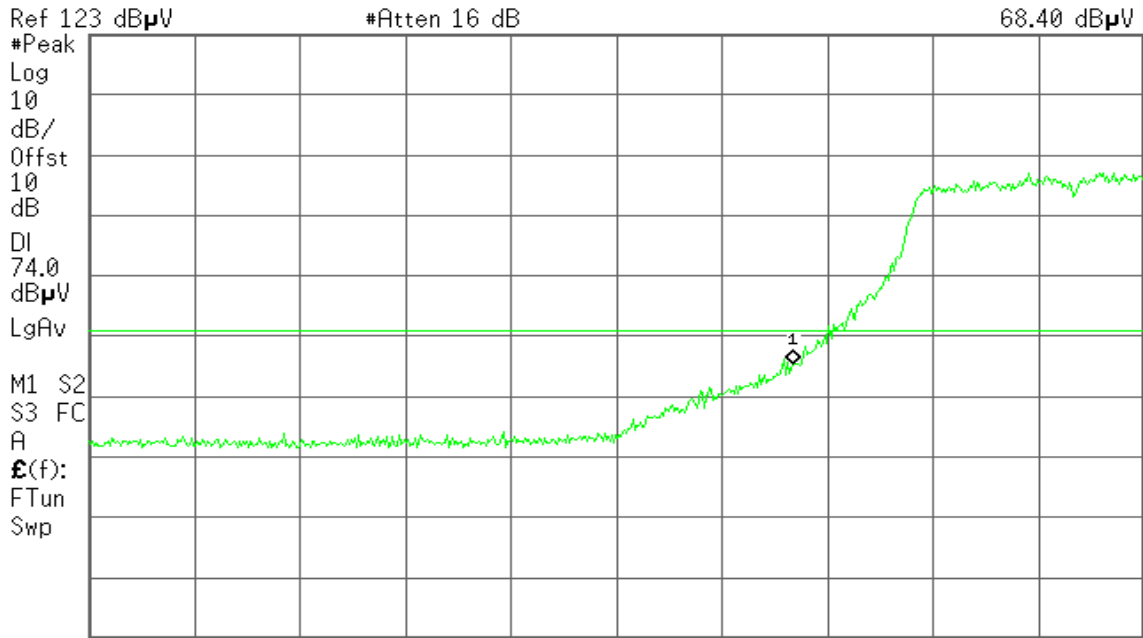


Detector mode: Average

Polarity: Vertical

Agilent 21:16:30 Nov 25, 2008

R T

Mkr1 2.390 0 GHz
53.36 dB μ V

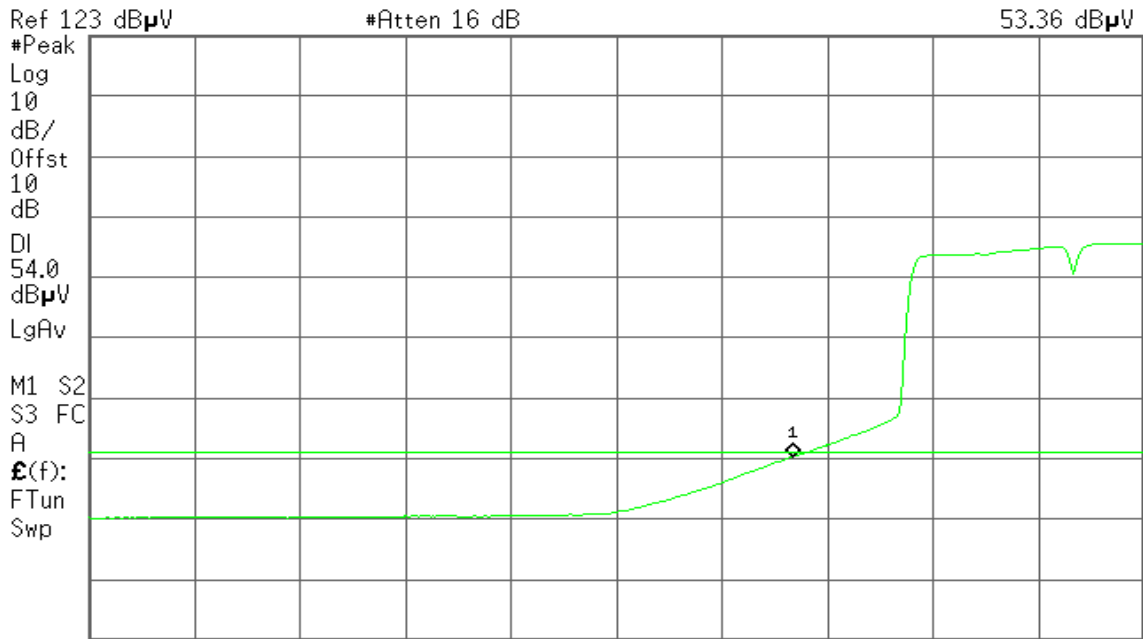




Detector mode: Peak

Polarity: Horizontal

Agilent 21:22:35 Nov 25, 2008

R T

Mkr1 2.390 0 GHz
58.10 dBμV

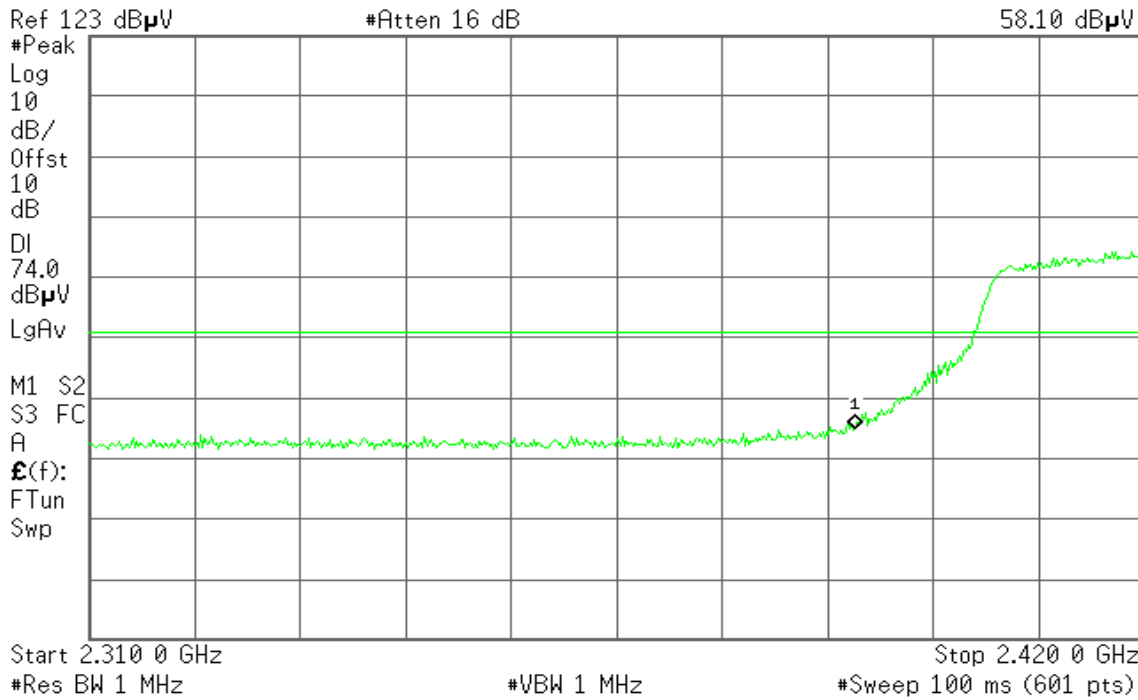


Detector mode: Average

Polarity: Horizontal

Agilent 21:23:03 Nov 25, 2008

R T

Mkr1 2.390 0 GHz
45.26 dBμV

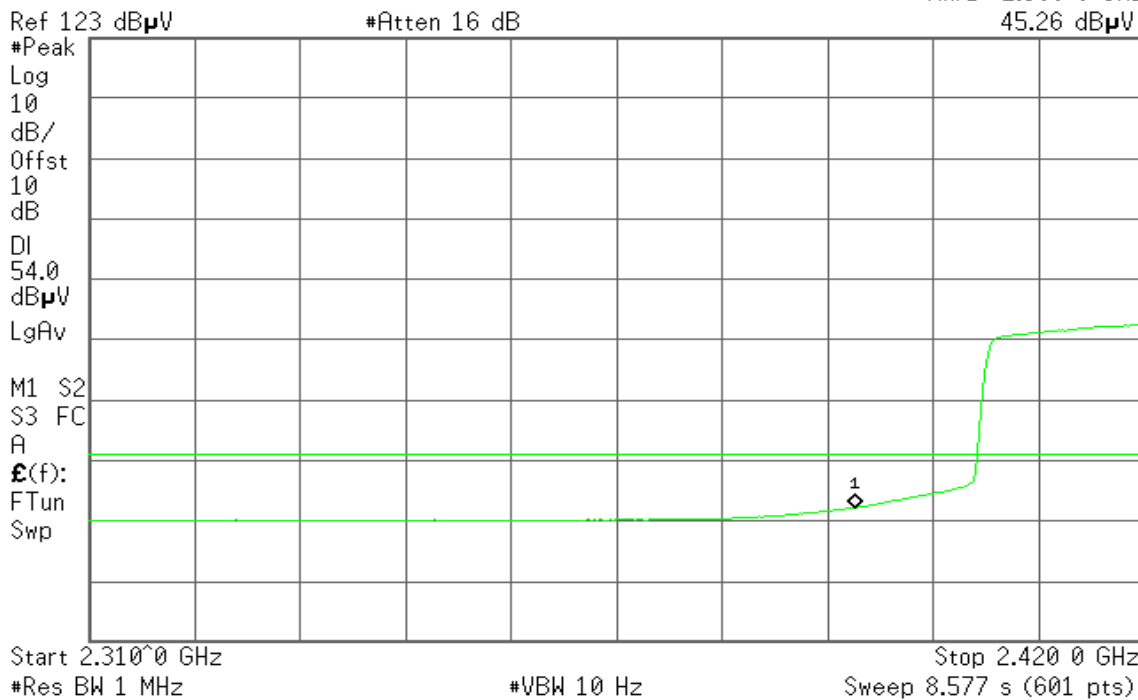



Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 20:57:44 Nov 25, 2008

R T

Mkr1 2.483 50 GHz
67.69 dB μ V

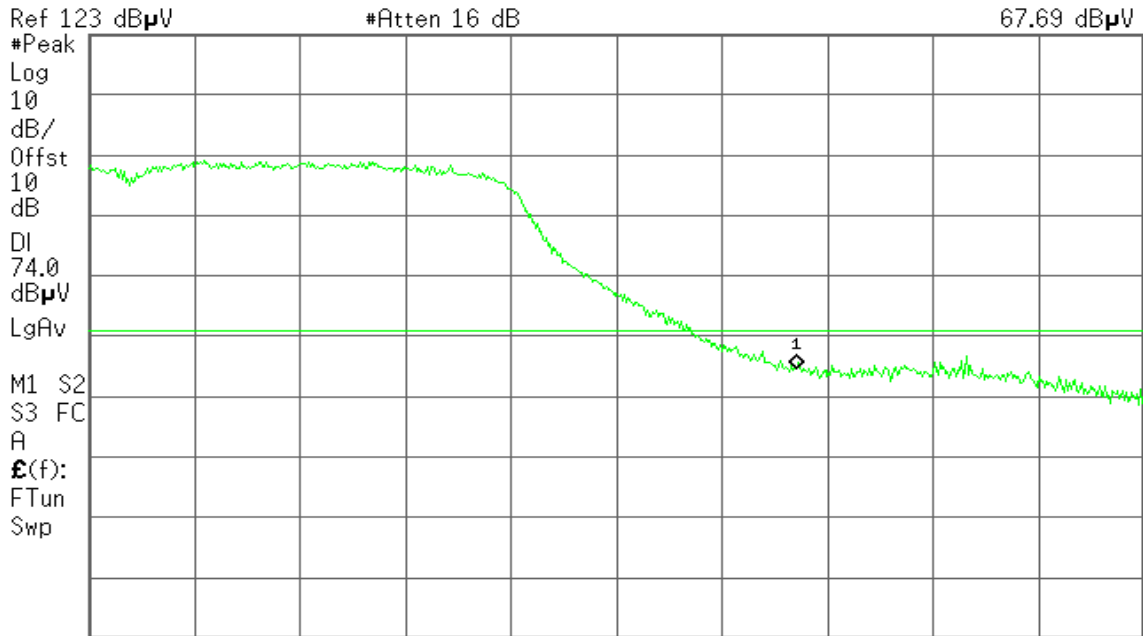

Start 2.450 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 20:57:09 Nov 25, 2008

R T

Mkr1 2.483 50 GHz
53.09 dB μ V

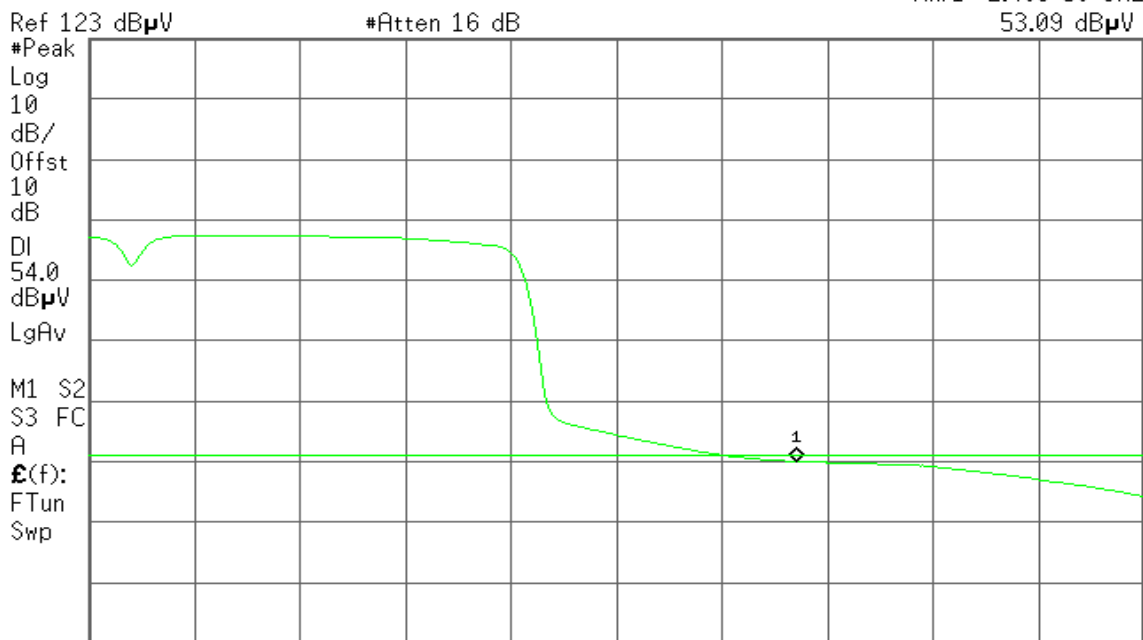

Start 2.450 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.899 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 21:05:00 Nov 25, 2008

R T

Mkr1 2.483 50 GHz
60.10 dBµV

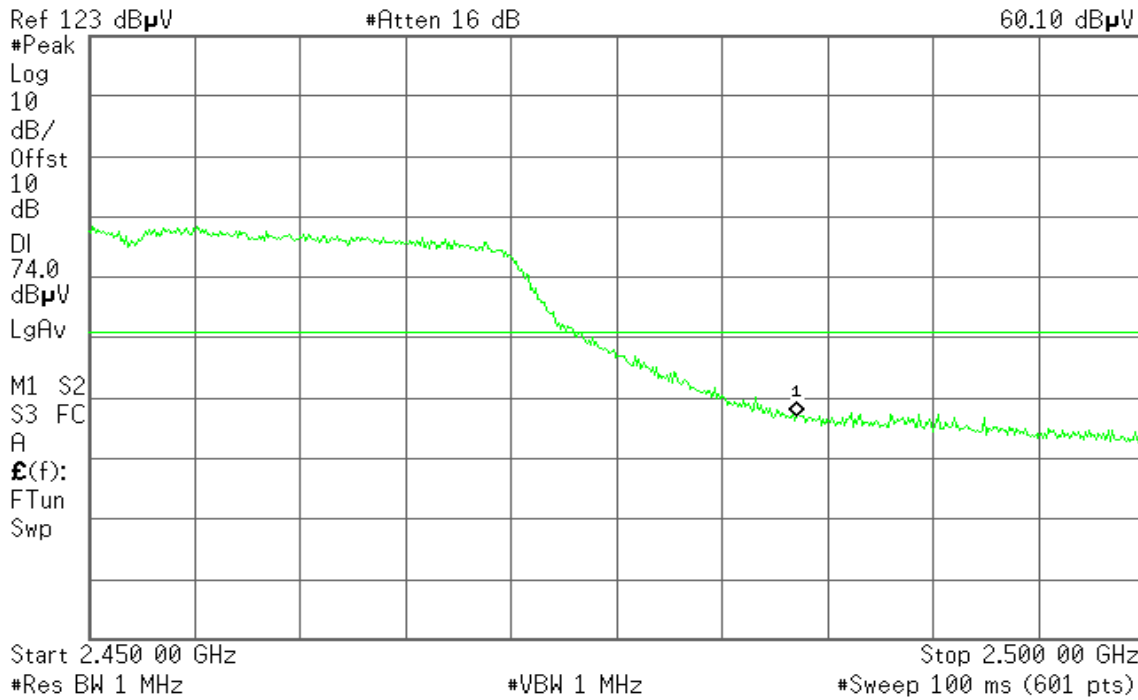


Detector mode: Average

Polarity: Horizontal

Agilent 21:05:20 Nov 25, 2008

R T

Mkr1 2.483 50 GHz
46.81 dBµV

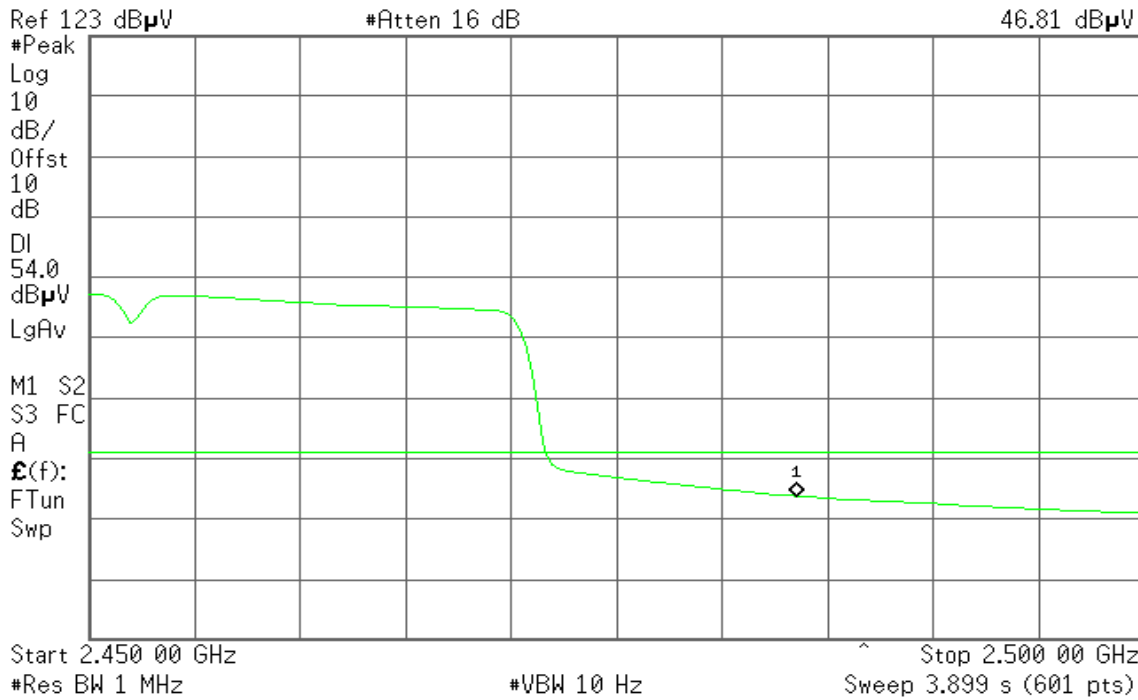



FULL LENGTH BOARD / PIFA ANTENNA

Band Edges (IEEE 802.11b mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 20:34:47 Nov 21, 2008

R L

Mkr1 2.390 0 GHz
58.69 dBμV

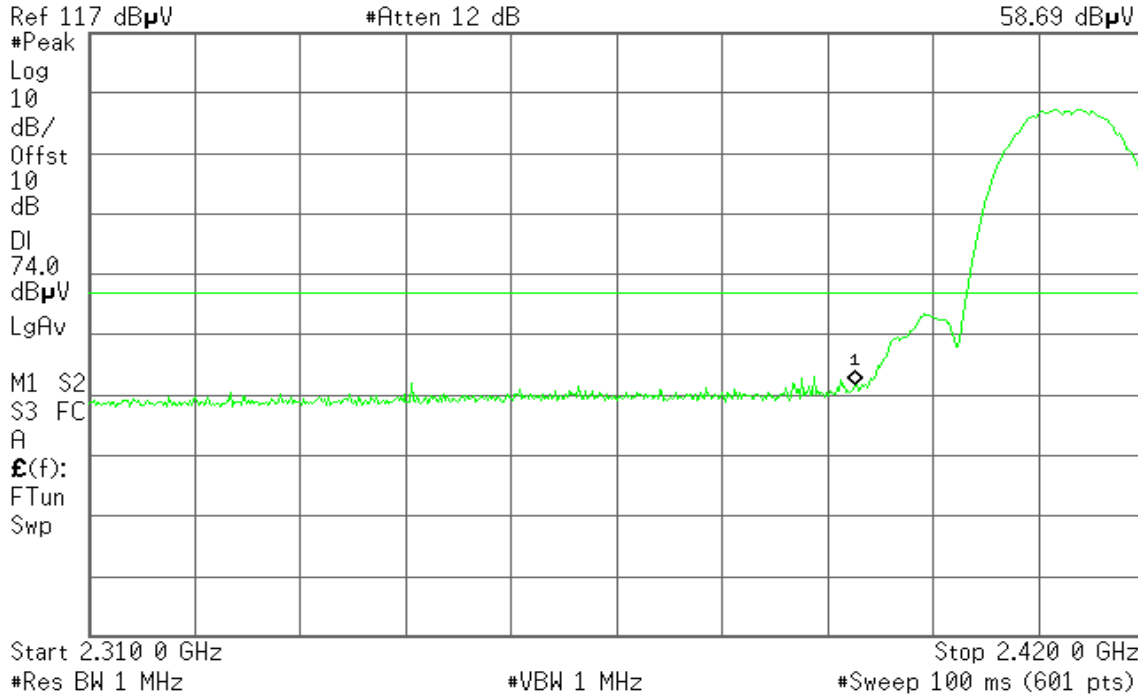


Detector mode: Average

Polarity: Vertical

Agilent 20:35:08 Nov 21, 2008

R L

Mkr1 2.390 0 GHz
45.37 dBμV

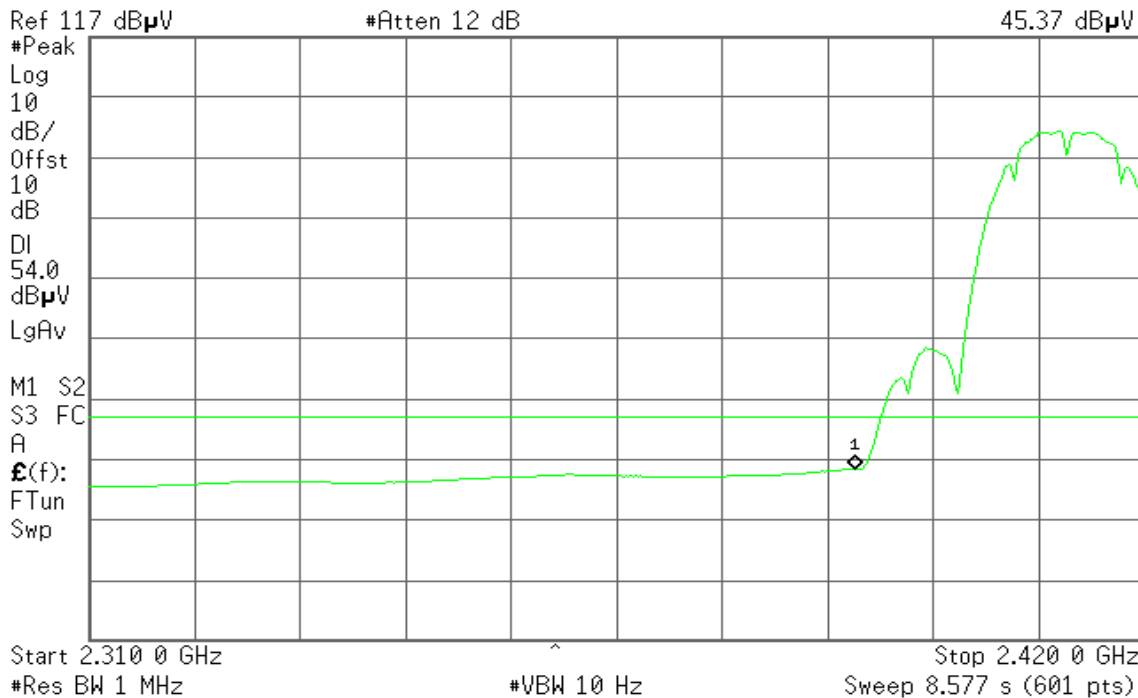




Detector mode: Peak

Polarity: Horizontal

Agilent 20:31:13 Nov 21, 2008

R L

Mkr1 2.390 0 GHz
62.38 dB μ V

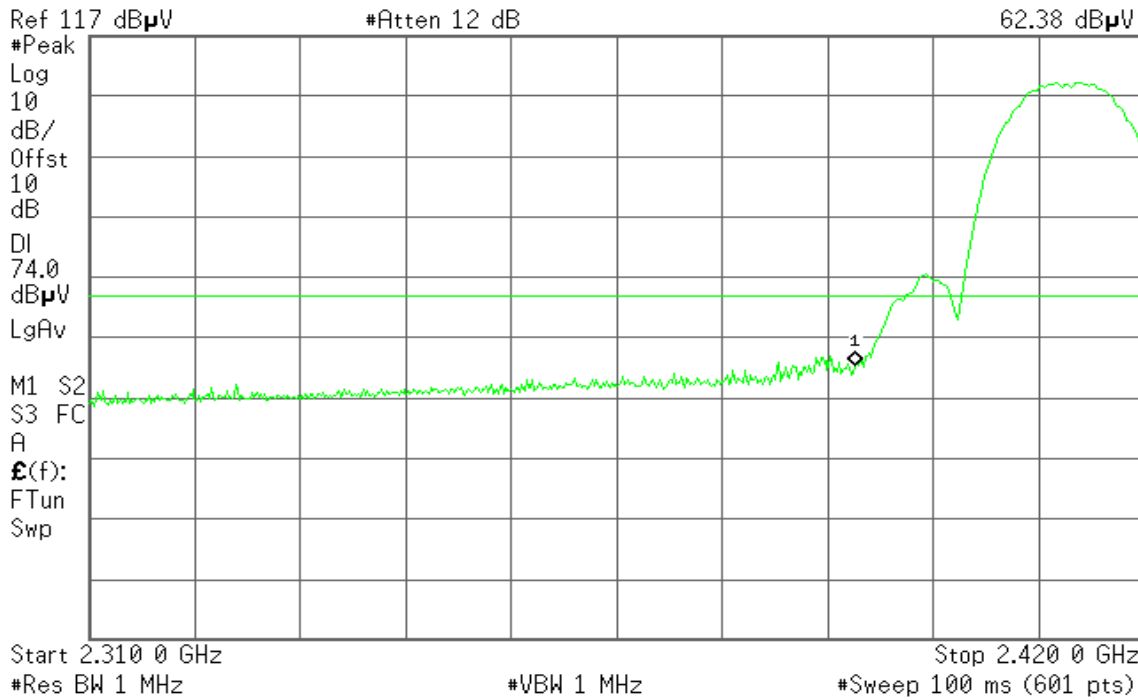


Detector mode: Average

Polarity: Horizontal

Agilent 20:31:45 Nov 21, 2008

R L

Mkr1 2.390 0 GHz
48.82 dB μ V

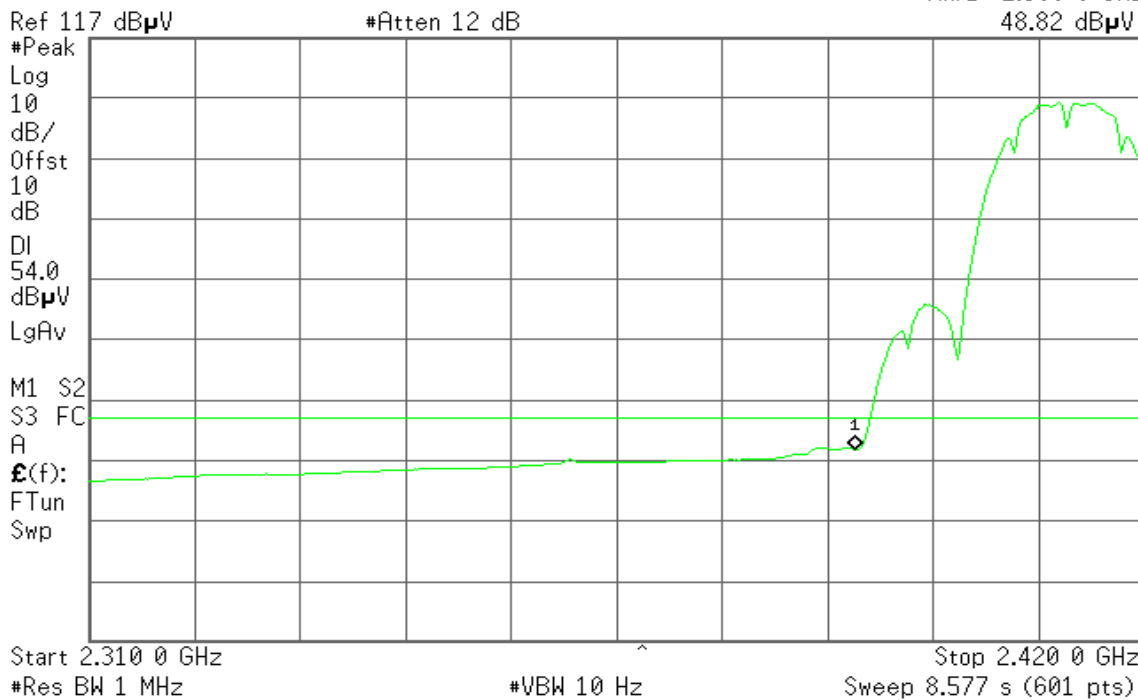



Band Edges (IEEE 802.11b mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 20:26:12 Nov 21, 2008

R L

Mkr1 2.483 50 GHz
59.66 dBμV

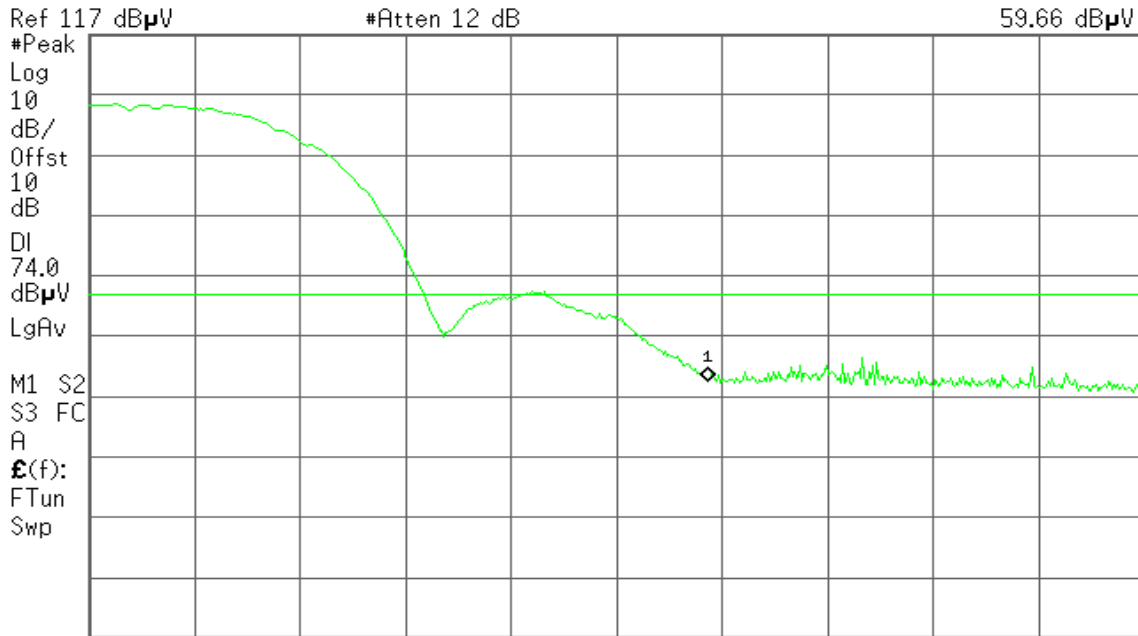

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 20:26:37 Nov 21, 2008

R L

Mkr1 2.483 50 GHz
48.19 dBμV

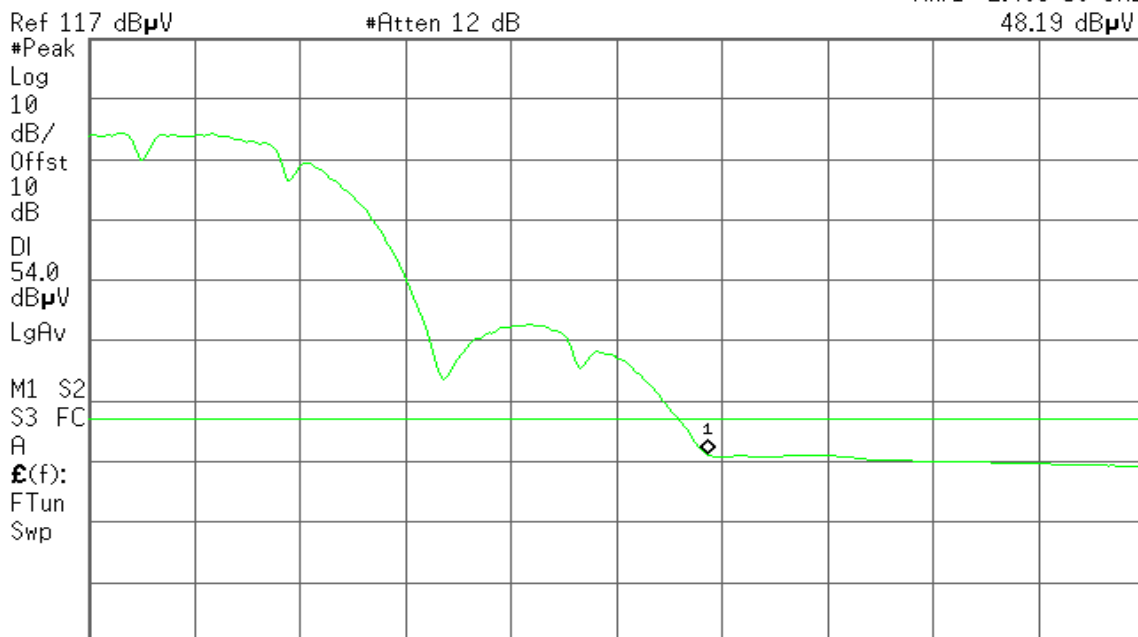

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 20:22:00 Nov 21, 2008

R L

Mkr1 2.483 50 GHz
62.11 dB μ V

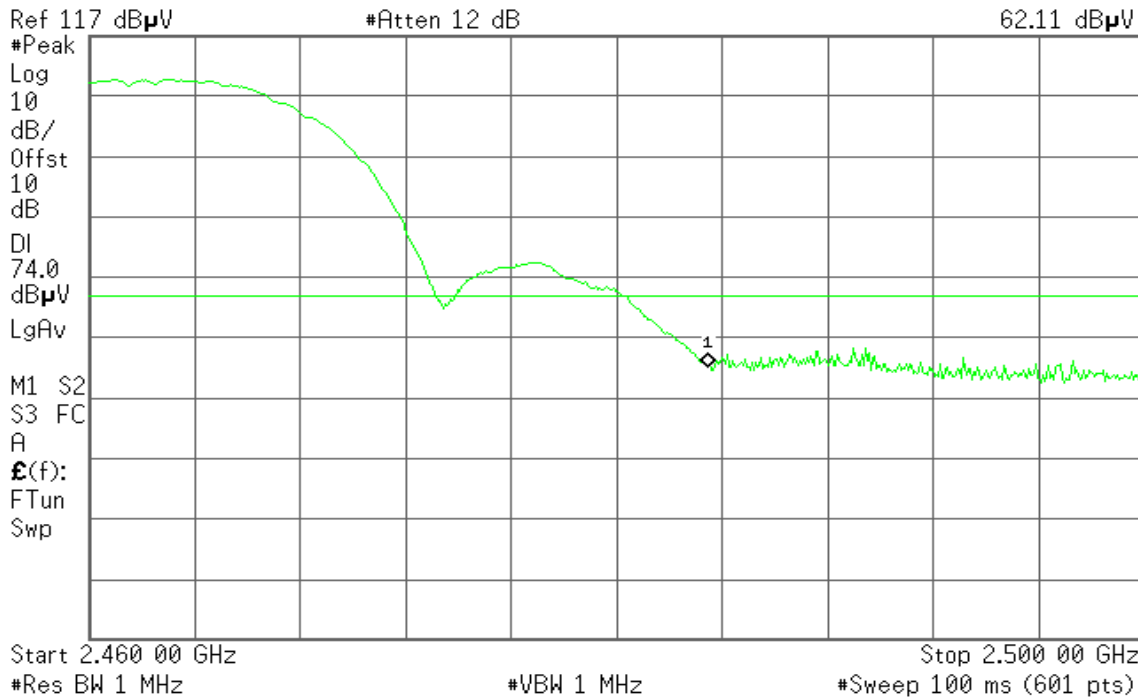


Detector mode: Average

Polarity: Horizontal

Agilent 20:22:22 Nov 21, 2008

R L

Mkr1 2.483 50 GHz
50.61 dB μ V

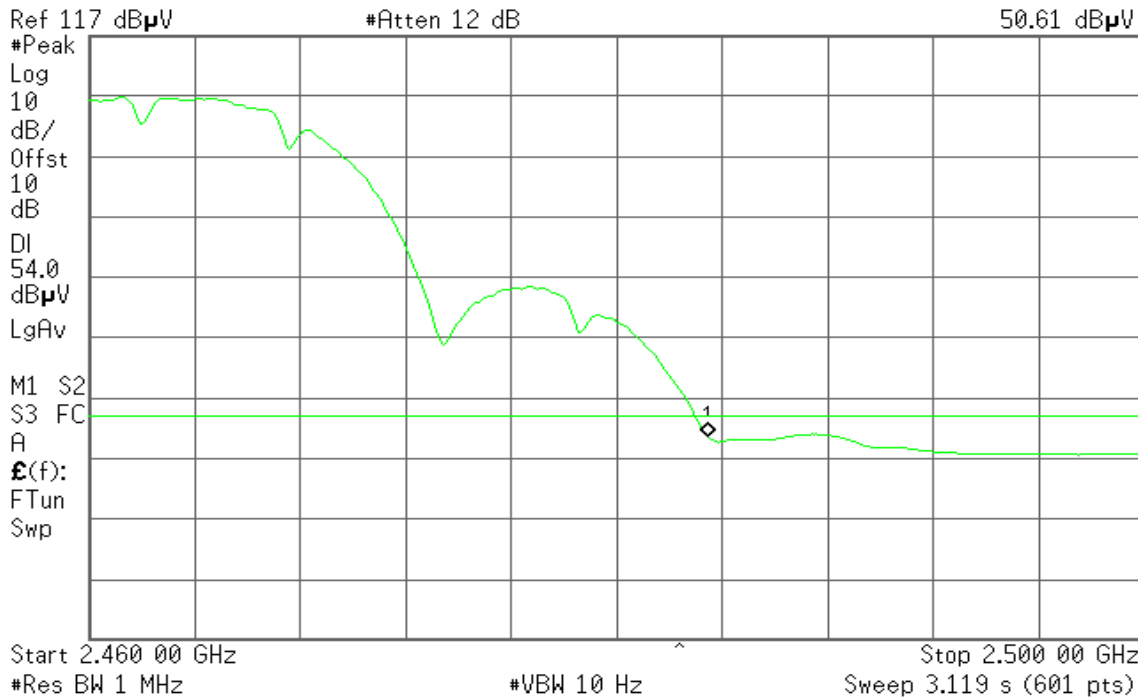



Band Edges (IEEE 802.11g mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 19:44:54 Nov 21, 2008

R L

Mkr1 2.390 0 GHz
66.24 dBμV

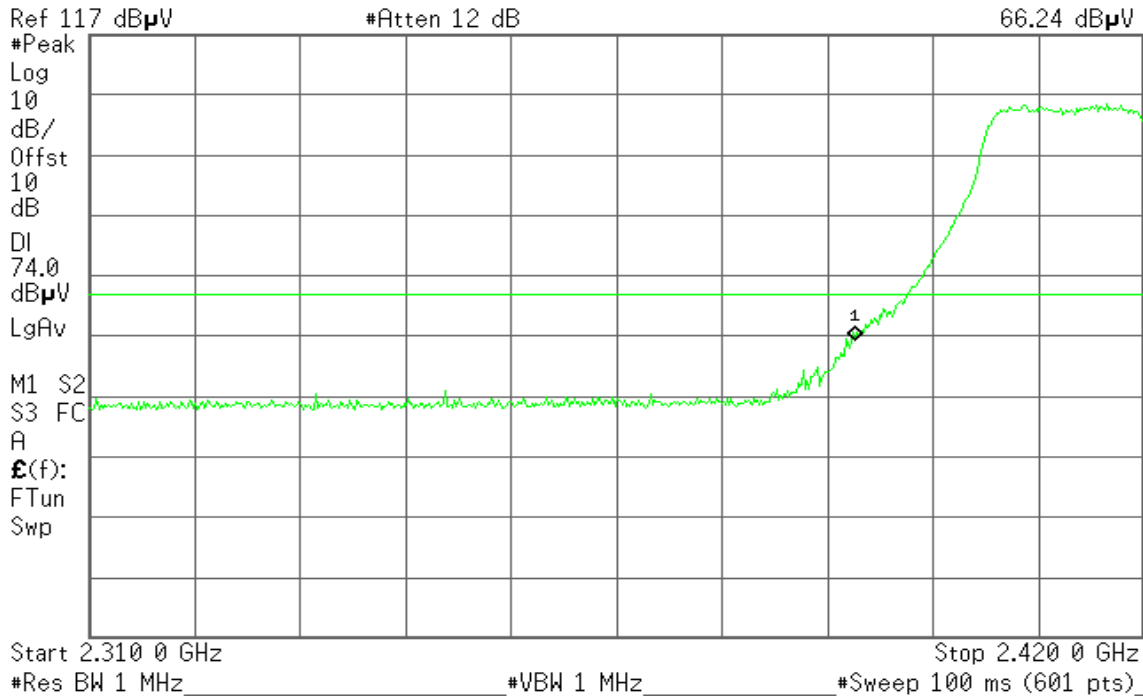


Detector mode: Average

Polarity: Vertical

Agilent 19:45:24 Nov 21, 2008

R L

Mkr1 2.390 0 GHz
47.90 dBμV

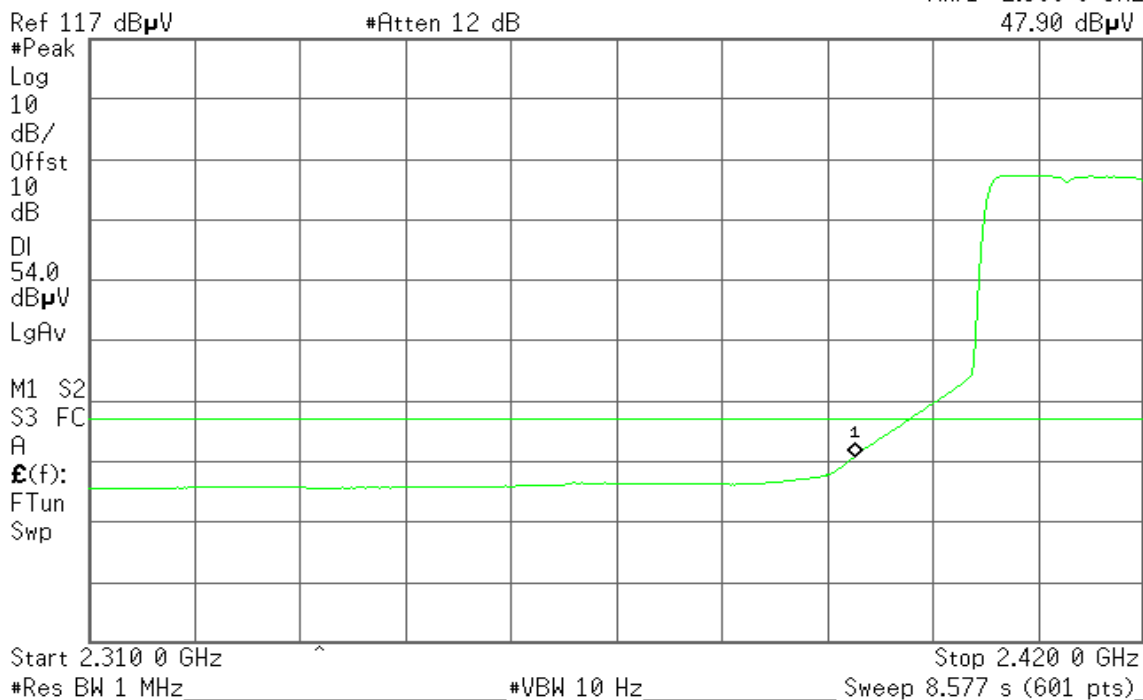




Detector mode: Peak

Polarity: Horizontal

Agilent 19:40:23 Nov 21, 2008

R L

Mkr1 2.390 0 GHz
72.60 dBμV

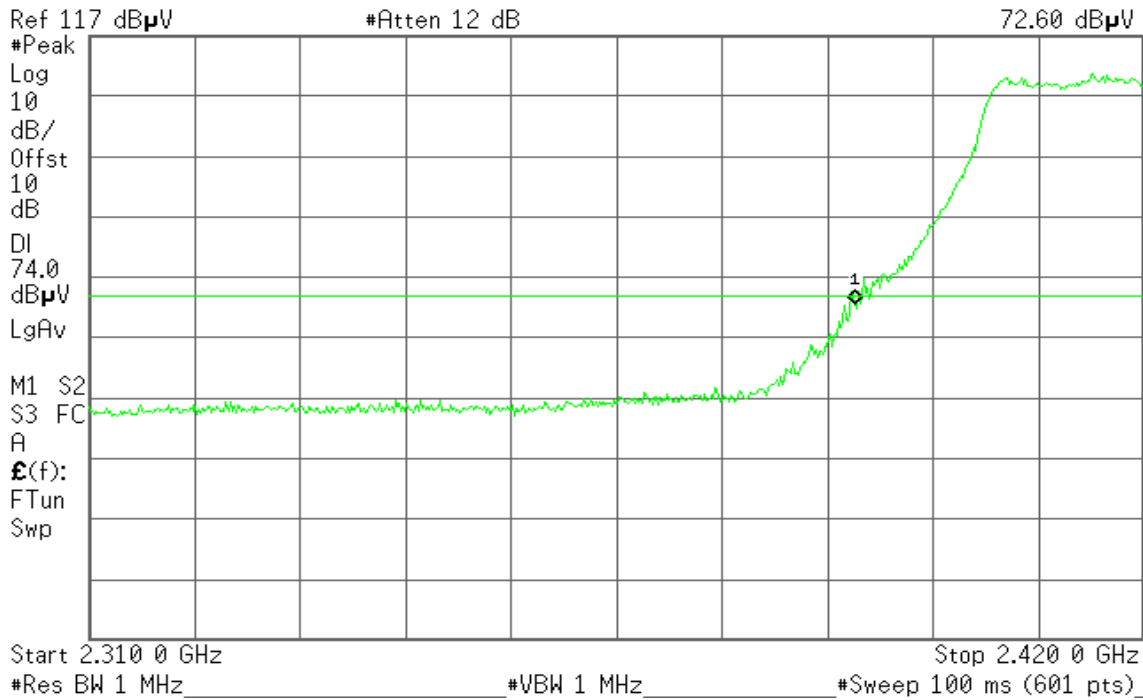


Detector mode: Average

Polarity: Horizontal

Agilent 19:39:44 Nov 21, 2008

R L

Mkr1 2.390 0 GHz
52.97 dBμV

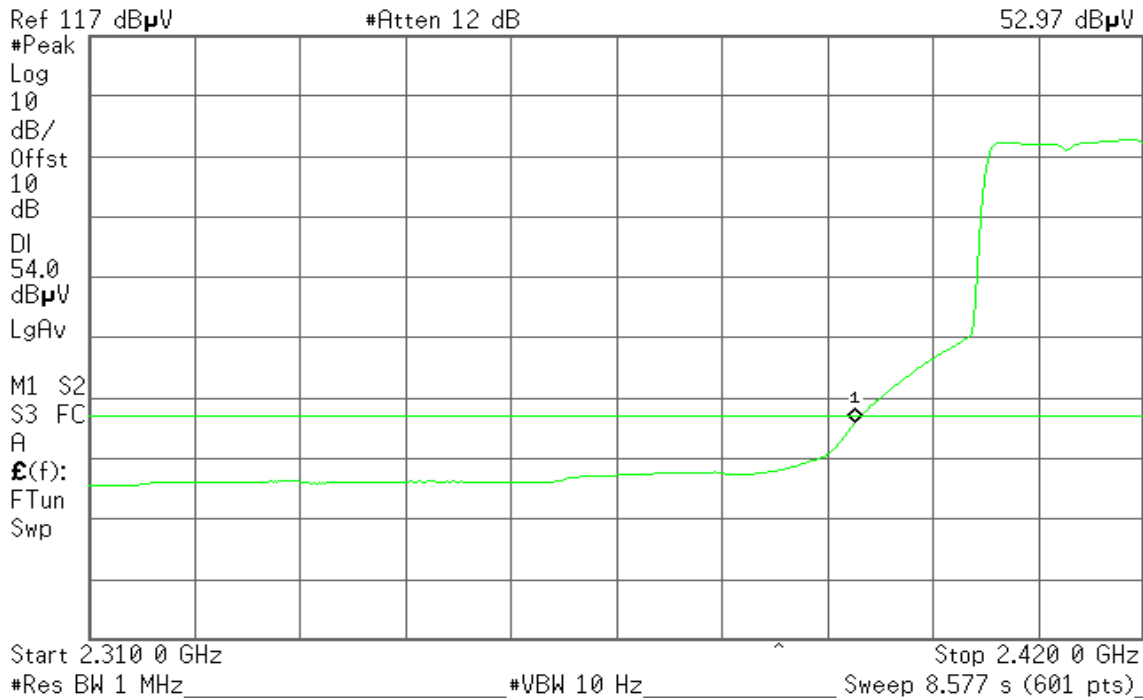



Band Edges (IEEE 802.11g mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 20:04:38 Nov 21, 2008

R L

Mkr1 2.483 50 GHz
67.64 dB μ V

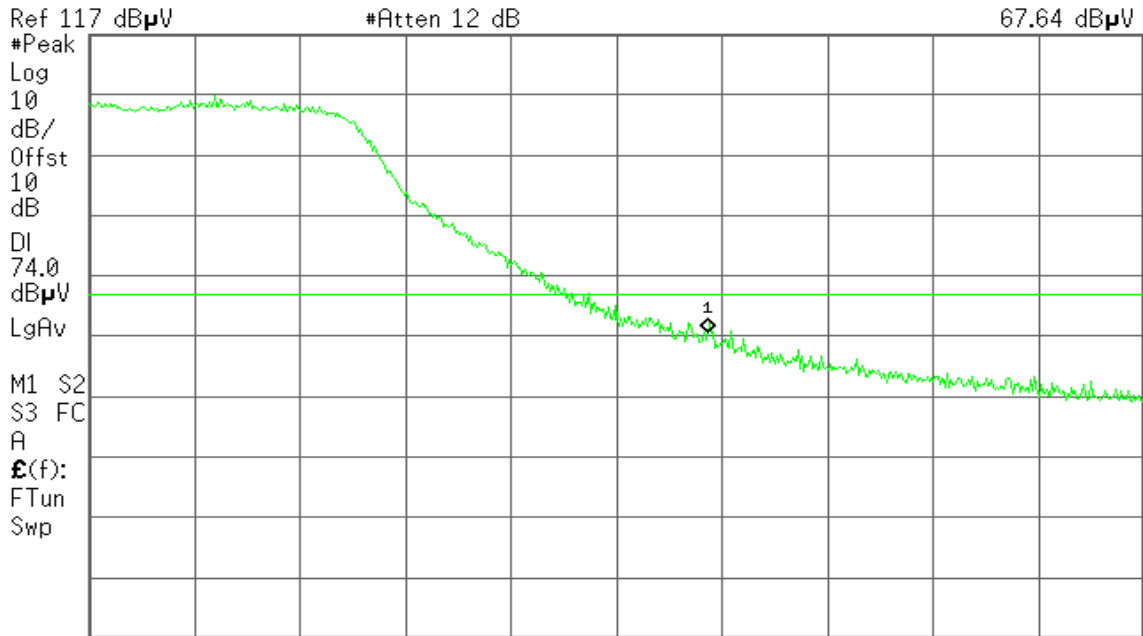

Start 2.460 00 GHz #Res BW 1 MHz #VBW 1 MHz Stop 2.500 00 GHz #Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Vertical

Agilent 20:05:14 Nov 21, 2008

R L

Mkr1 2.483 50 GHz
46.82 dB μ V



Start 2.460 00 GHz #Res BW 1 MHz #VBW 10 Hz Stop 2.500 00 GHz Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 19:58:06 Nov 21, 2008

R L

Mkr1 2.483 50 GHz
70.88 dBµV

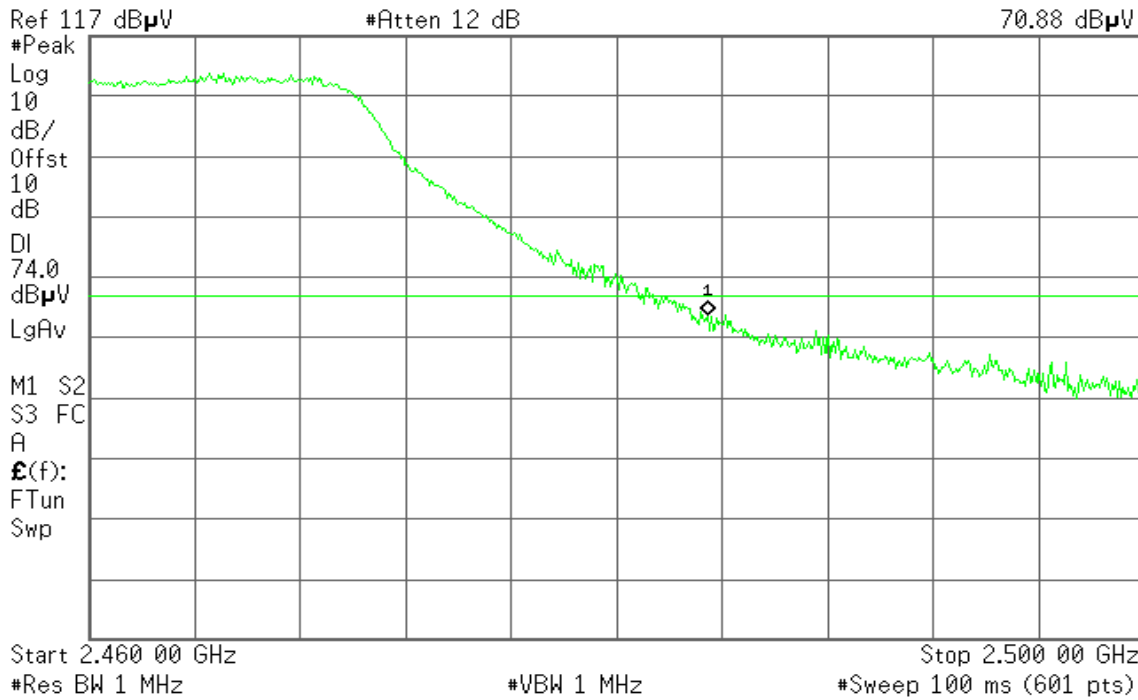


Detector mode: Average

Polarity: Horizontal

Agilent 19:56:37 Nov 21, 2008

R L

Mkr1 2.483 50 GHz
52.74 dBµV

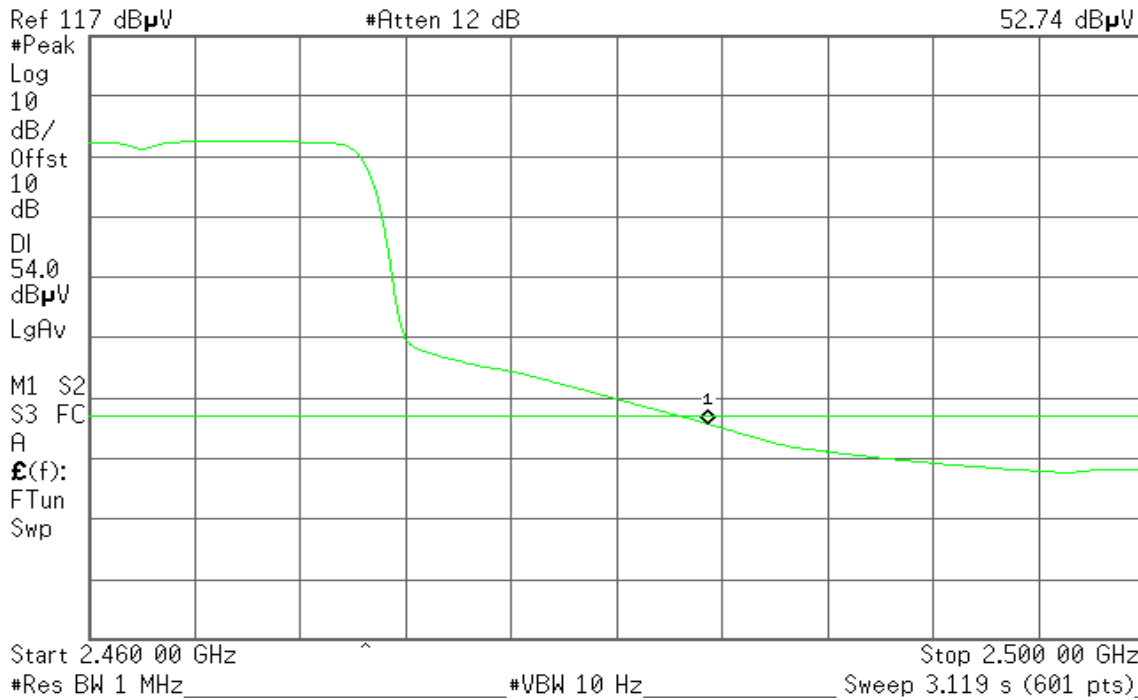



Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 19:46:54 Nov 21, 2008

R L

Mkr1 2.390 0 GHz
66.76 dBμV

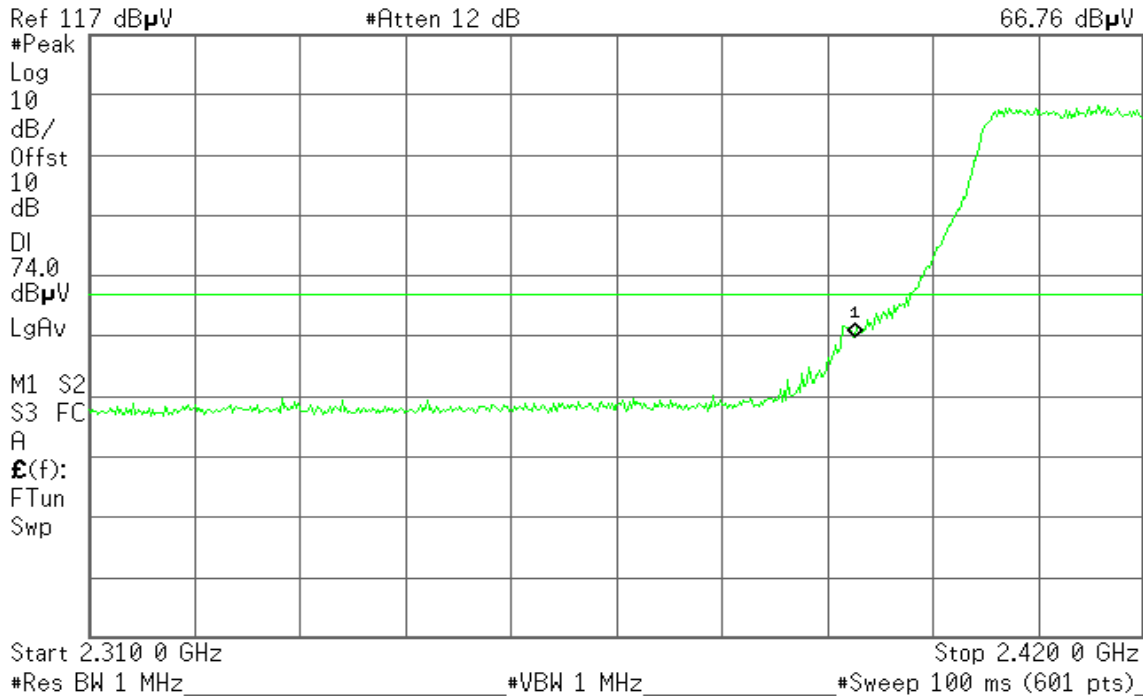


Detector mode: Average

Polarity: Vertical

Agilent 19:46:31 Nov 21, 2008

R L

Mkr1 2.390 0 GHz
49.55 dBμV

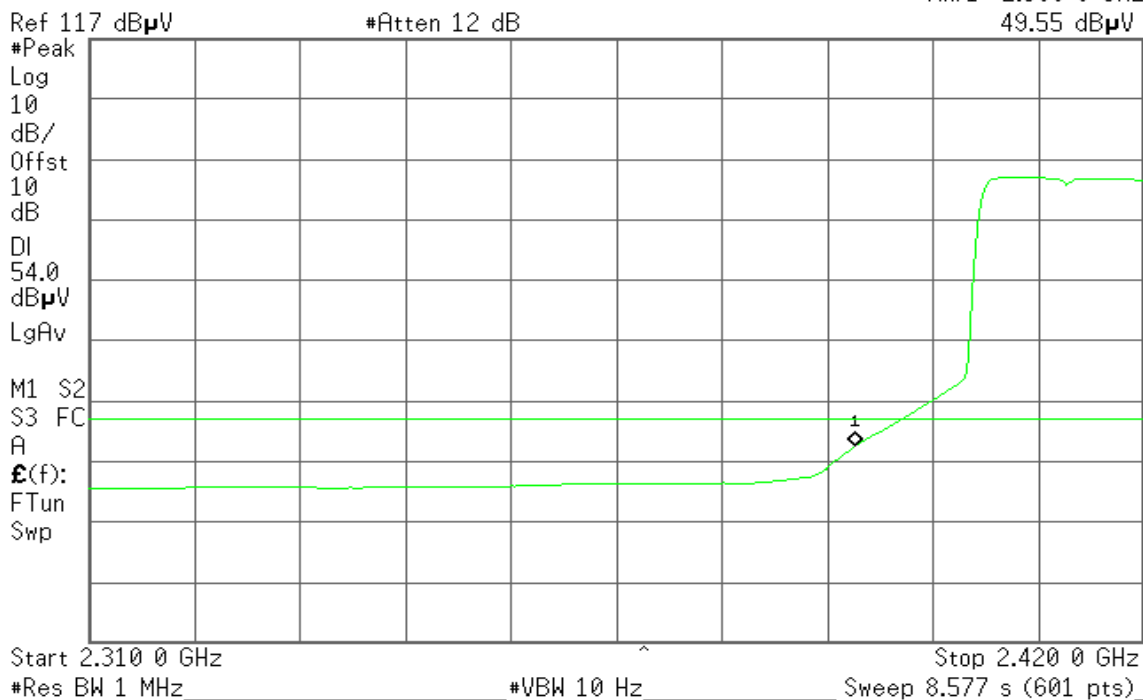




Detector mode: Peak

Polarity: Horizontal

Agilent 19:36:05 Nov 21, 2008

R L

Mkr1 2.390 0 GHz
72.62 dBμV

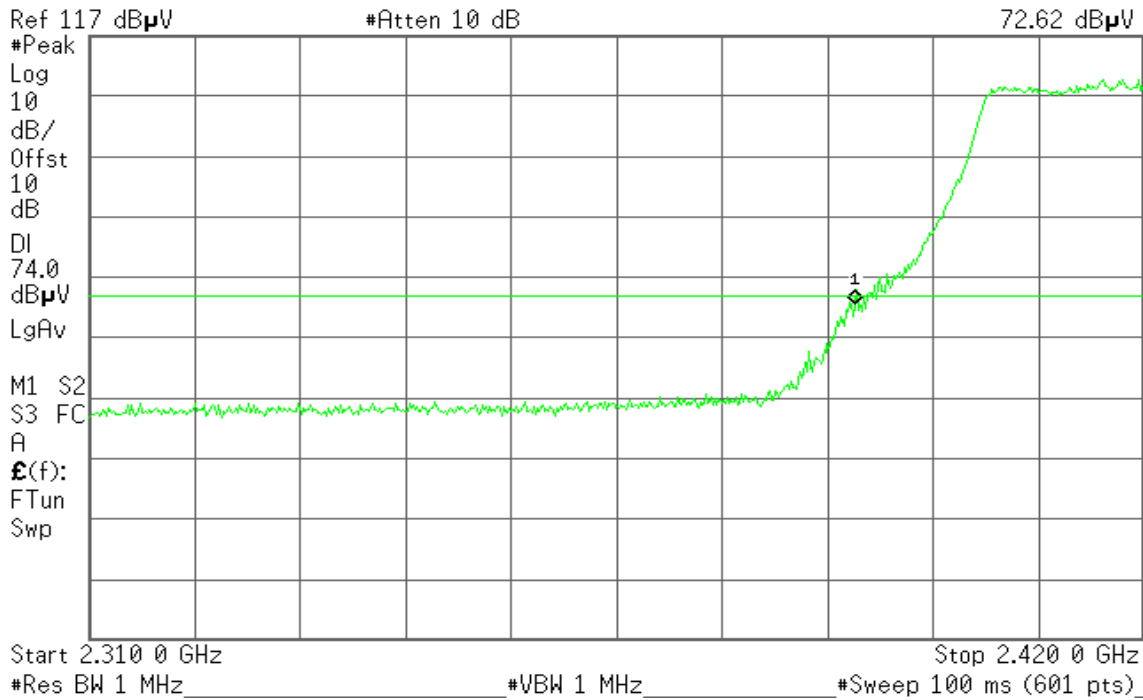


Detector mode: Average

Polarity: Horizontal

Agilent 19:35:35 Nov 21, 2008

R L

Mkr1 2.390 0 GHz
53.01 dBμV

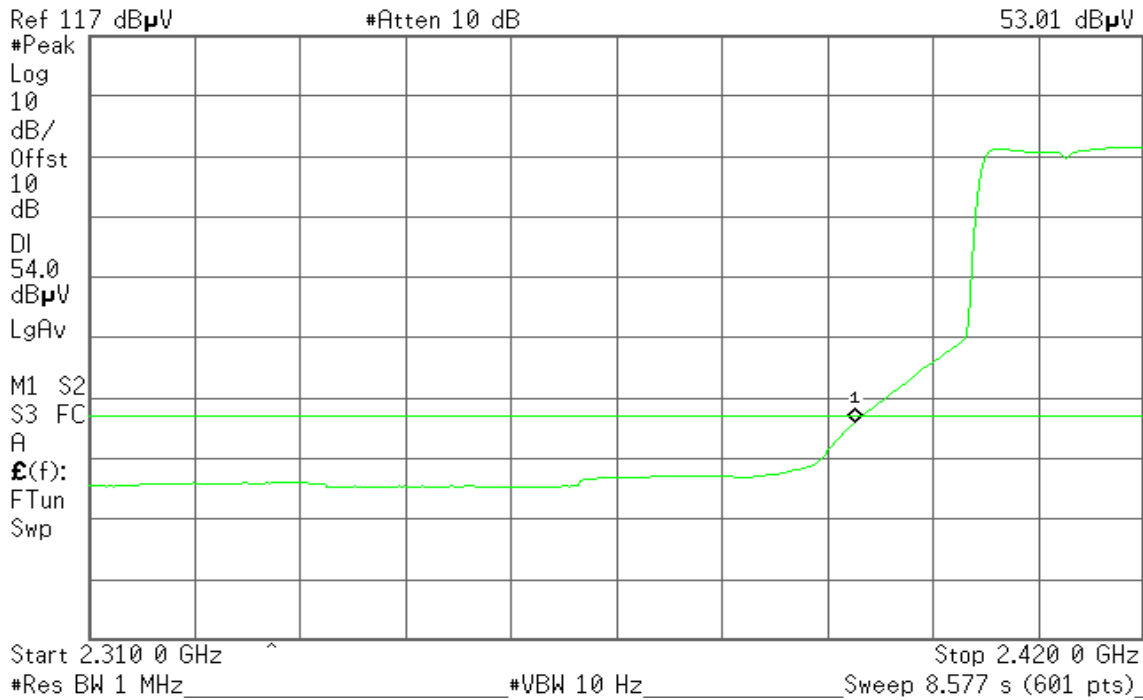



Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 20:06:49 Nov 21, 2008

R L

Mkr1 2.483 50 GHz
61.36 dB μ V

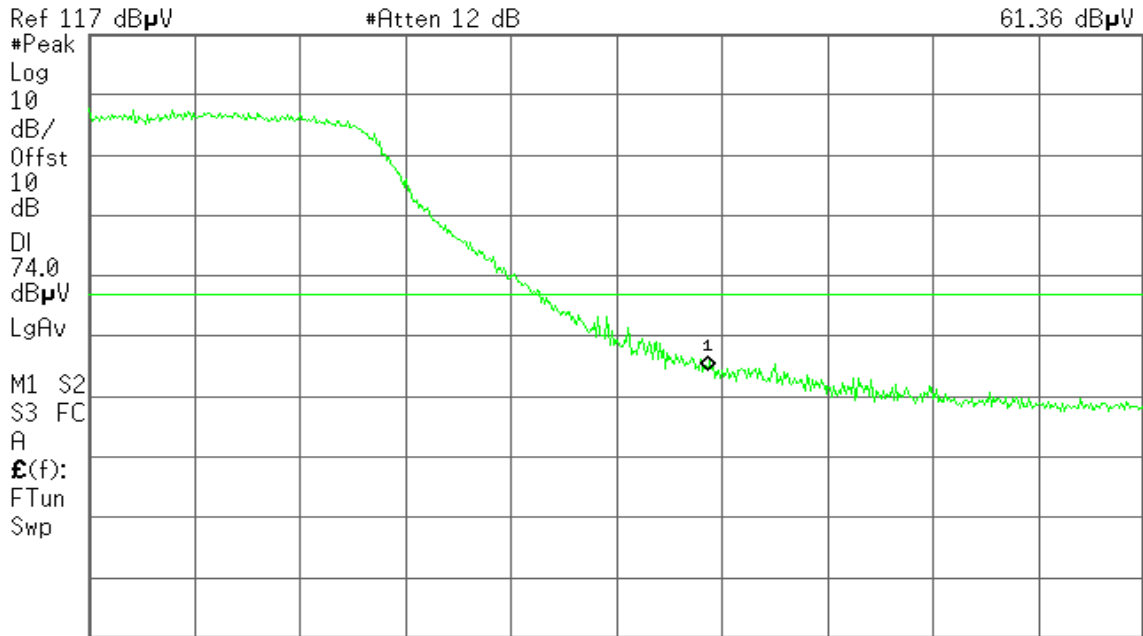

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 20:06:32 Nov 21, 2008

R L

Mkr1 2.483 50 GHz
46.65 dB μ V

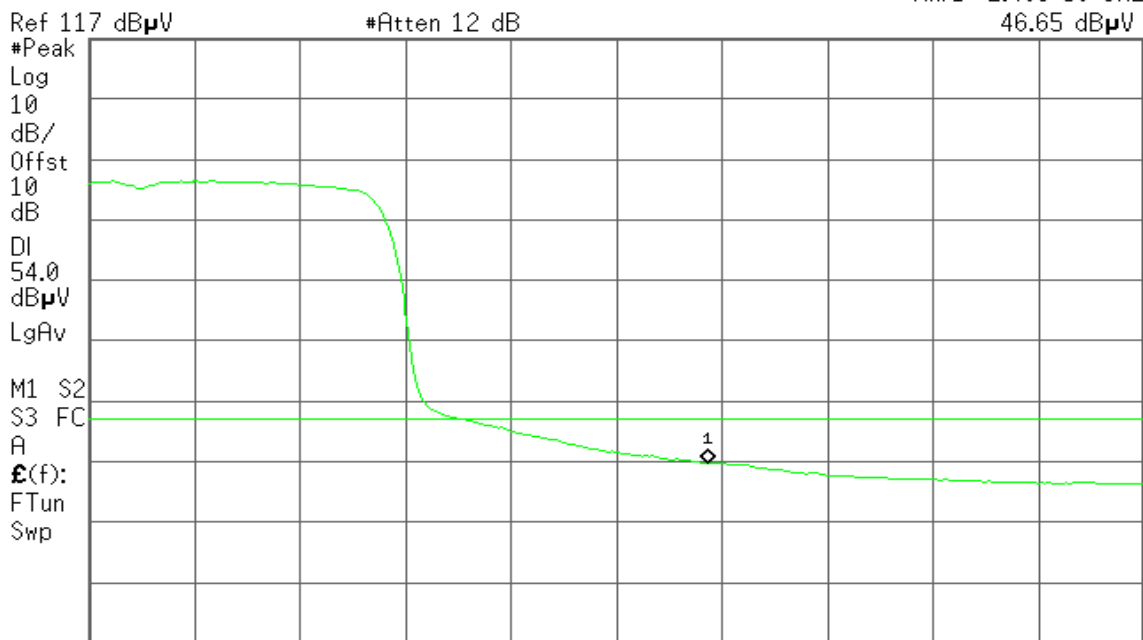

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 19:54:30 Nov 21, 2008

R L

Mkr1 2.483 50 GHz
69.74 dB μ V

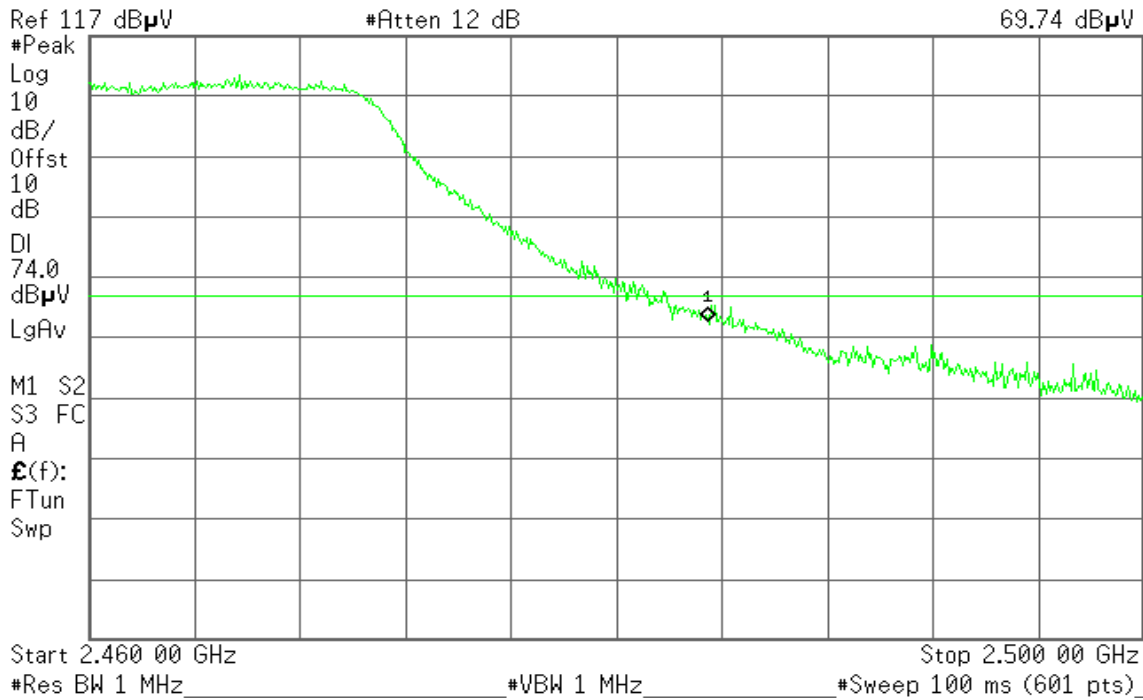


Detector mode: Average

Polarity: Horizontal

Agilent 19:53:47 Nov 21, 2008

R L

Mkr1 2.483 50 GHz
53.34 dB μ V

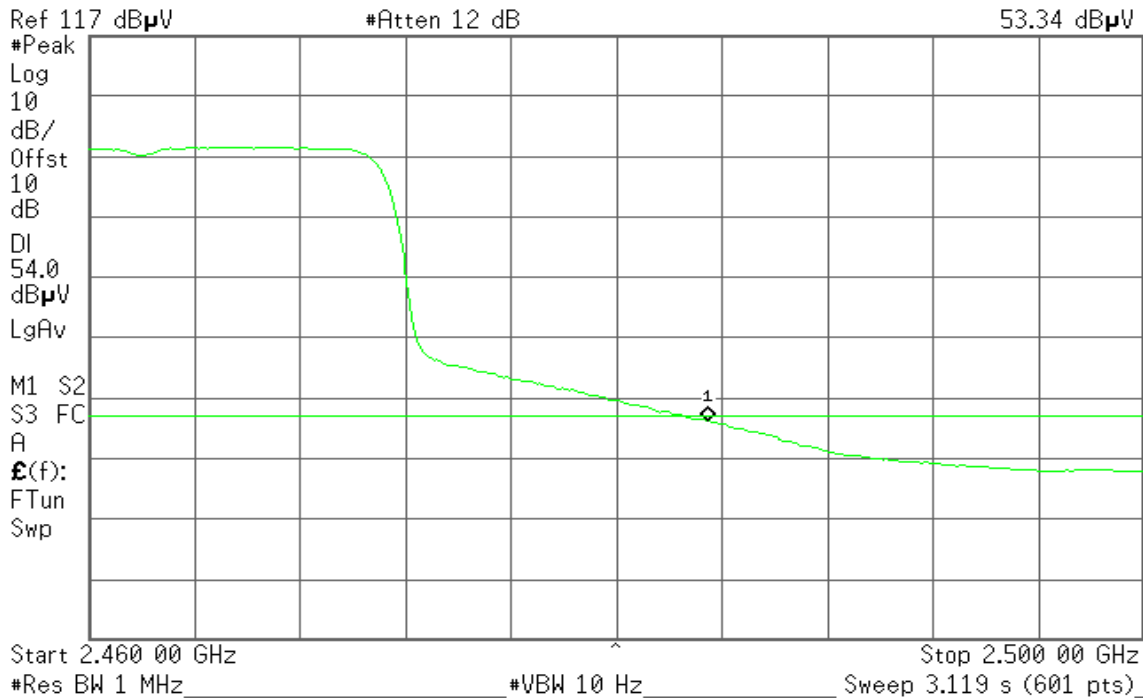



Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 19:17:28 Nov 21, 2008

R T

Mkr1 2.390 0 GHz
63.71 dBμV

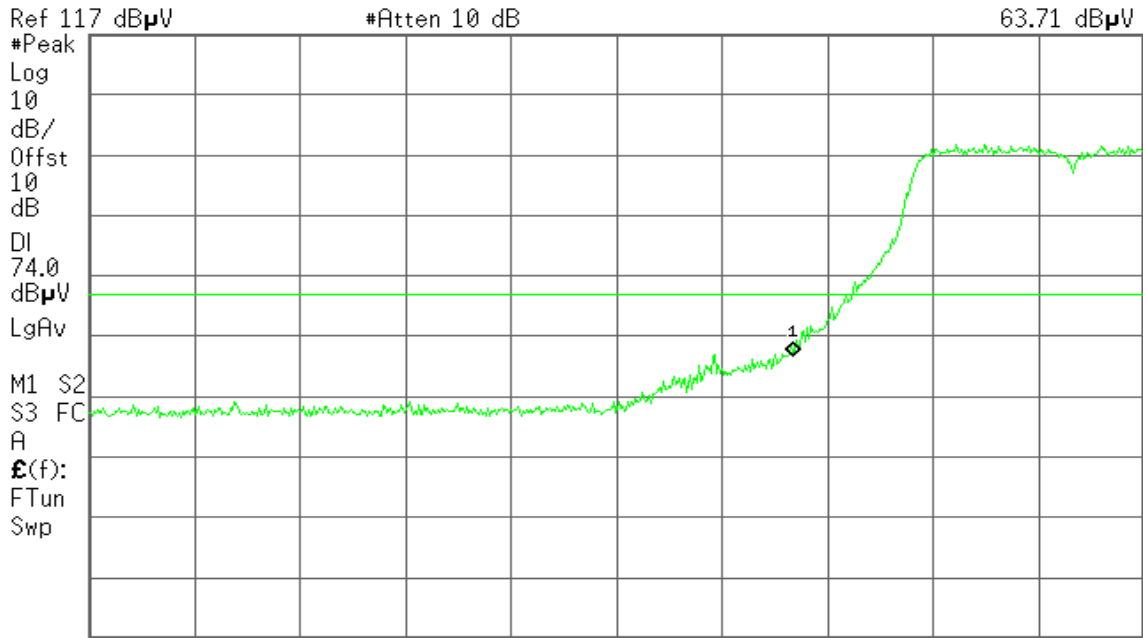

Start 2.310 0 GHz

Stop 2.430 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 19:17:49 Nov 21, 2008

R T

Mkr1 2.390 0 GHz
48.92 dBμV

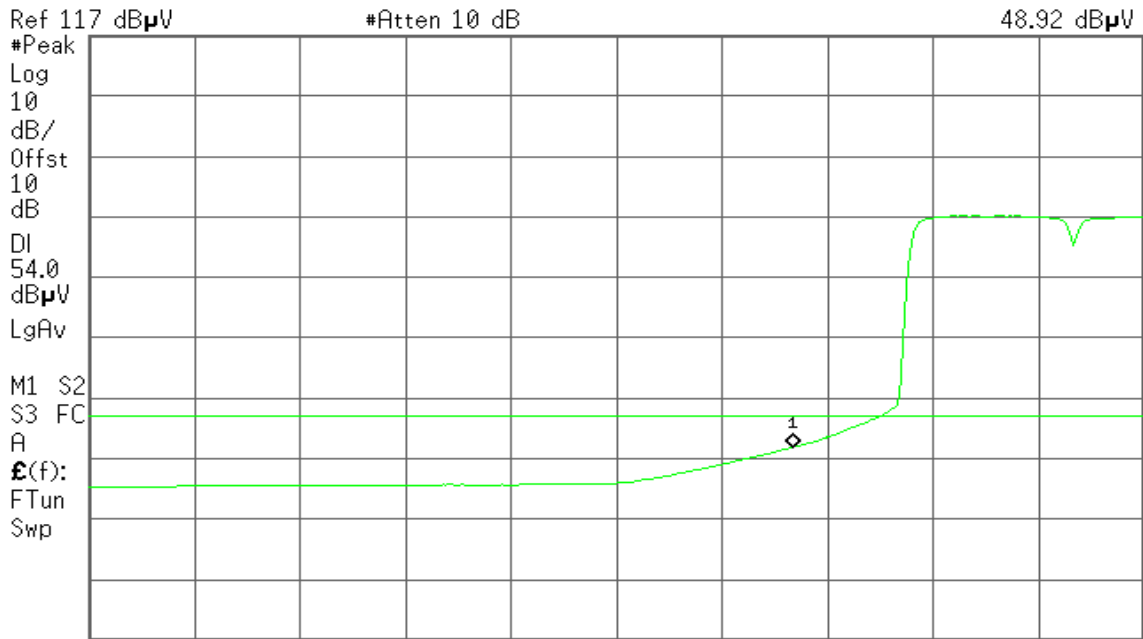

Start 2.310 0 GHz

Stop 2.430 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 9.357 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 19:14:13 Nov 21, 2008

R L

Mkr1 2.390 0 GHz
69.72 dBμV

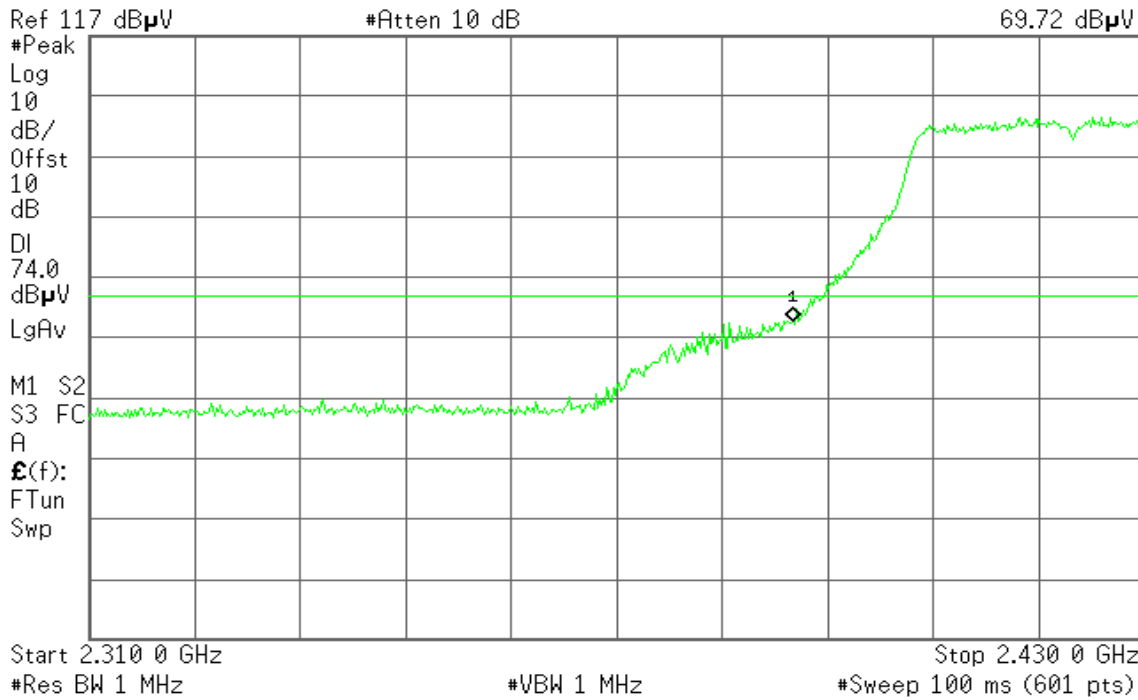


Detector mode: Average

Polarity: Horizontal

Agilent 19:13:48 Nov 21, 2008

R T

Mkr1 2.390 0 GHz
53.78 dBμV

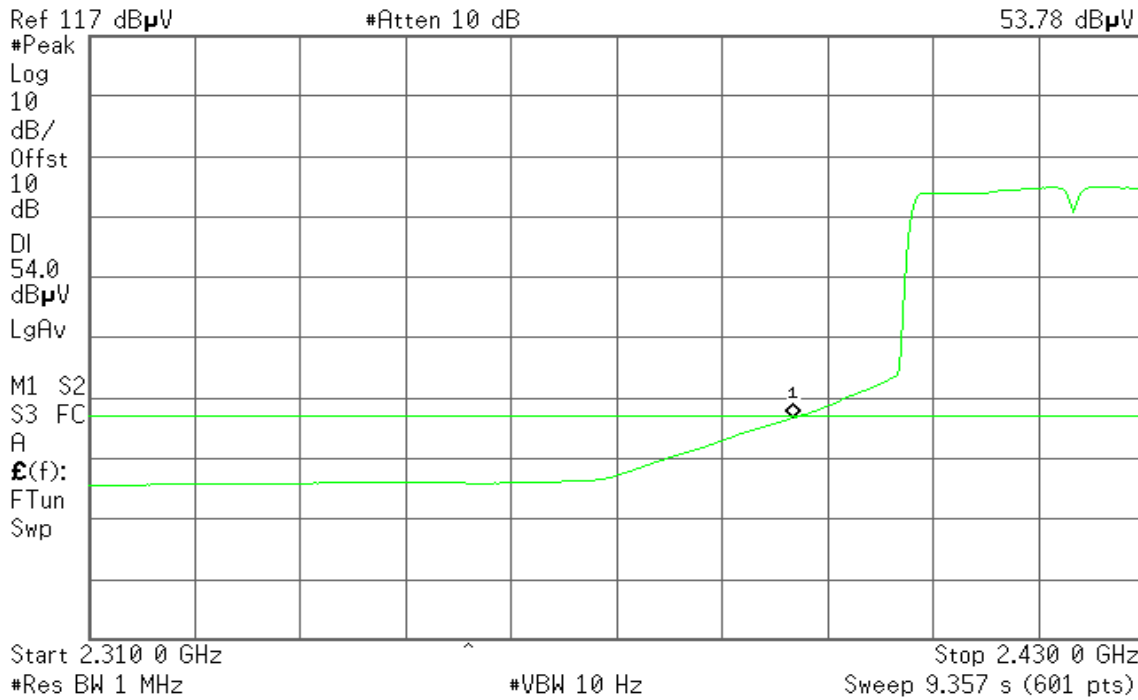



Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 19:07:49 Nov 21, 2008

R L

Mkr1 2.483 50 GHz
66.50 dBμV

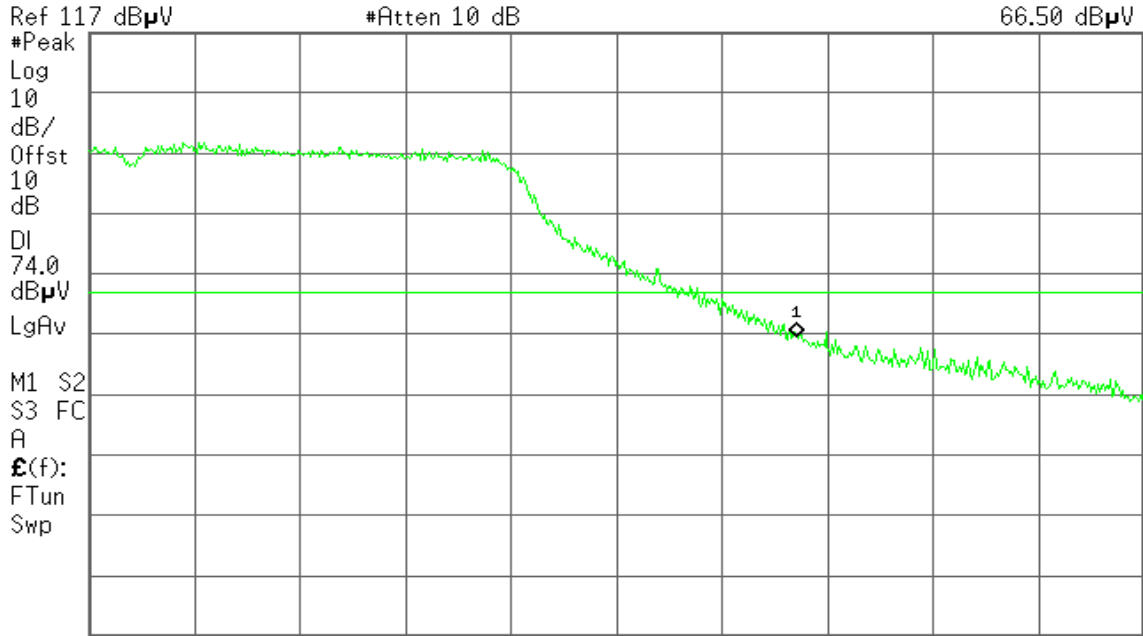

Start 2.450 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 19:08:11 Nov 21, 2008

R L

Mkr1 2.483 50 GHz
49.82 dBμV

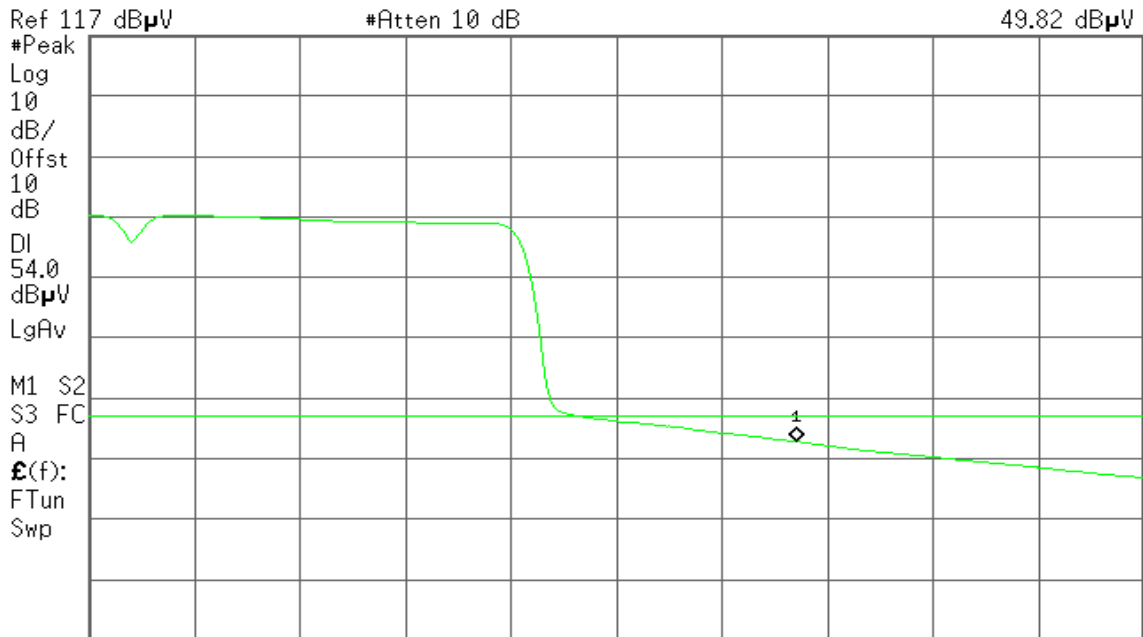

Start 2.450 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.899 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 19:02:52 Nov 21, 2008

R L

Mkr1 2.483 50 GHz
70.08 dBμV

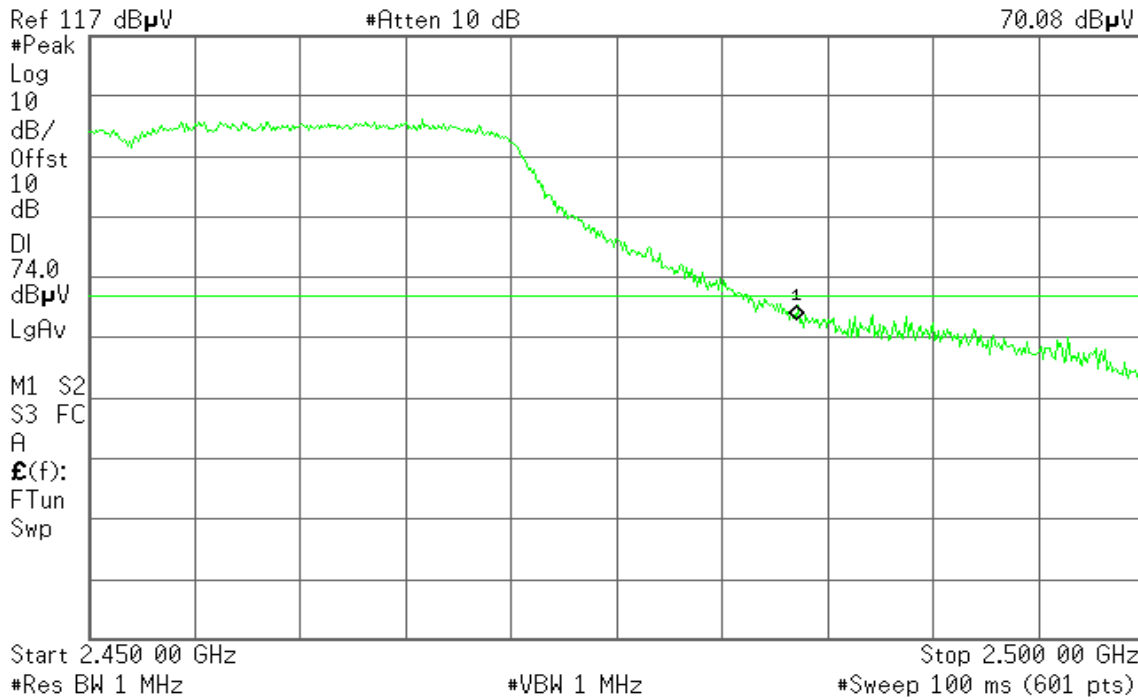


Detector mode: Average

Polarity: Horizontal

Agilent 19:02:01 Nov 21, 2008

R L

Mkr1 2.483 50 GHz
53.33 dBμV

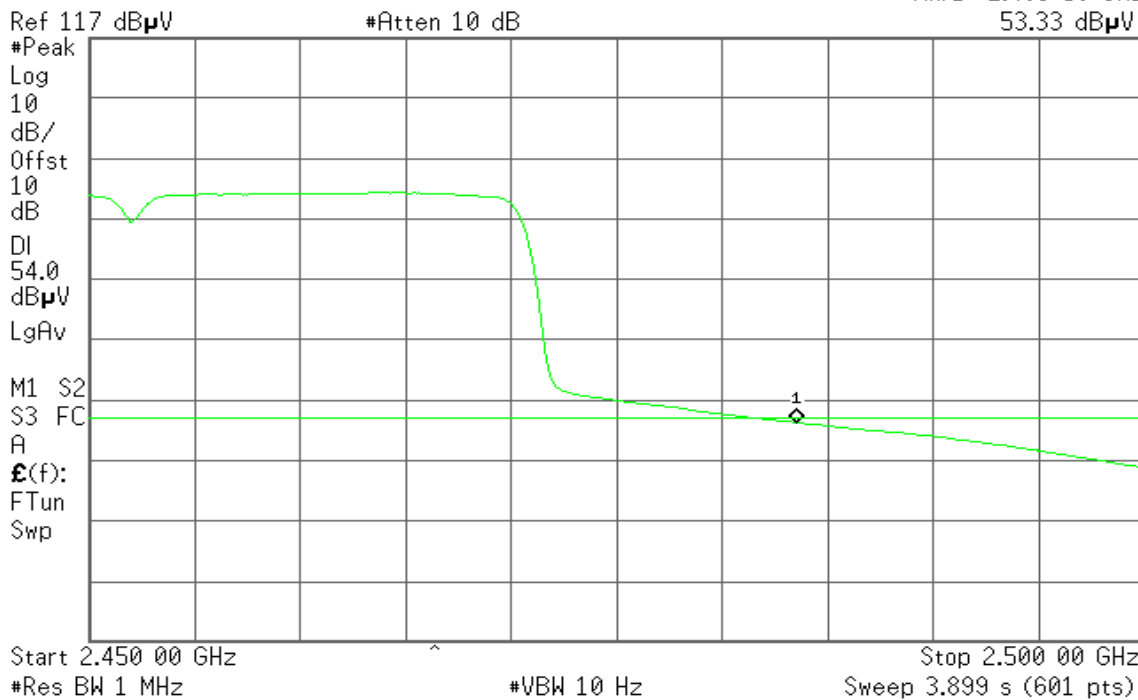



FULL LENGTH BOARD / Dipole ANTENNA

Band Edges (IEEE 802.11b mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 21:58:33 Nov 21, 2008

R T

Mkr1 2.390 0 GHz
62.67 dB μ V

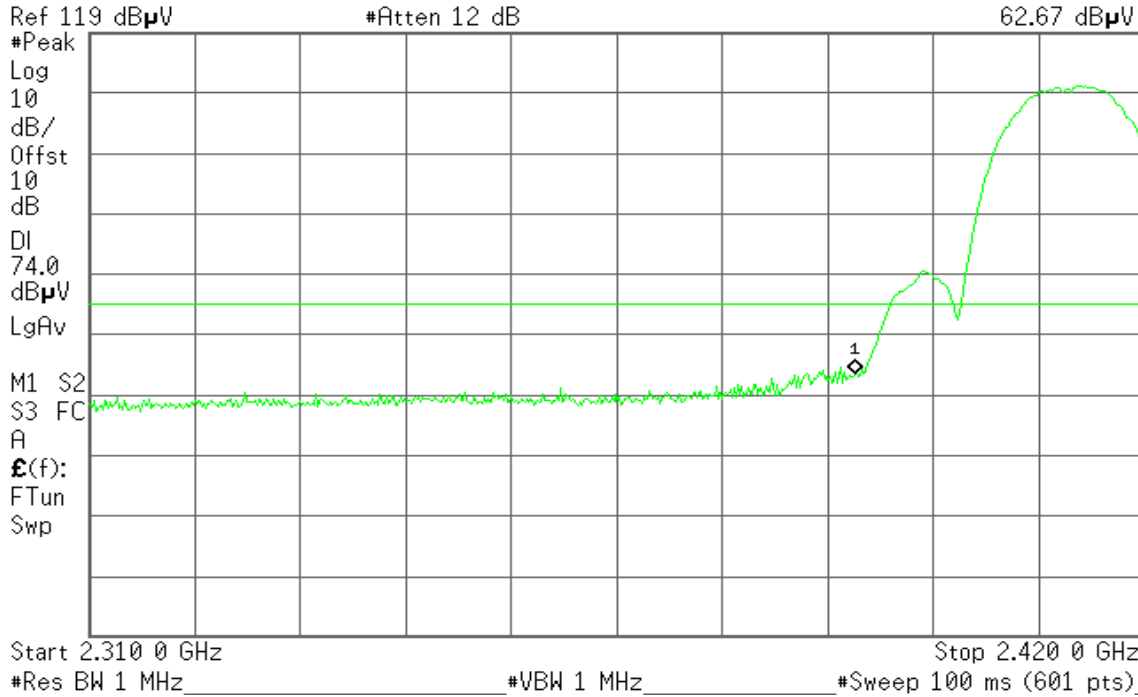


Detector mode: Average

Polarity: Vertical

Agilent 21:59:01 Nov 21, 2008

R T

Mkr1 2.390 0 GHz
50.53 dB μ V

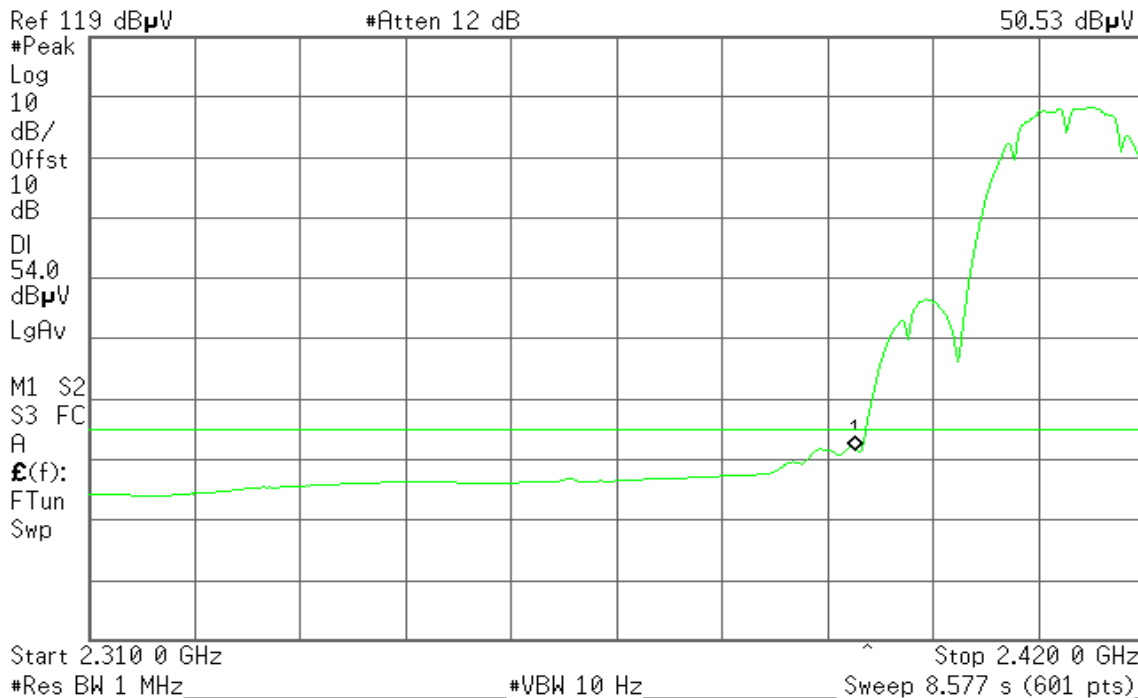




Detector mode: Peak

Polarity: Horizontal

Agilent 15:35:25 Nov 23, 2008

R T

Mkr1 2.390 0 GHz
57.19 dBμV

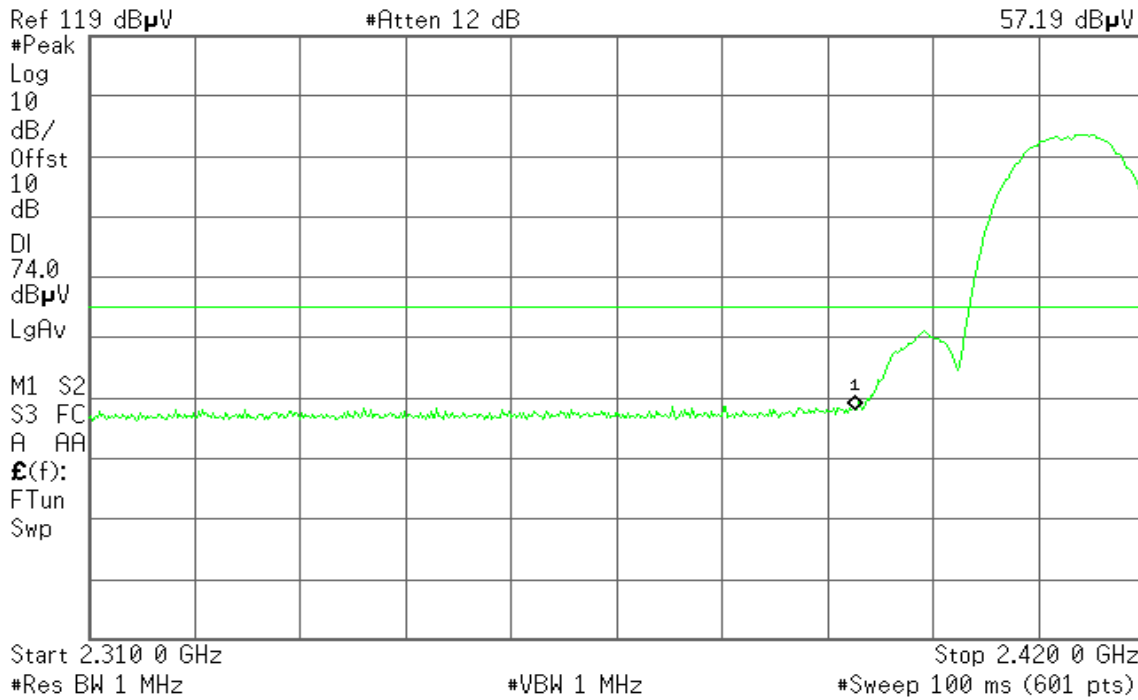


Detector mode: Average

Polarity: Horizontal

Agilent 15:36:00 Nov 23, 2008

R T

Mkr1 2.390 0 GHz
44.12 dBμV

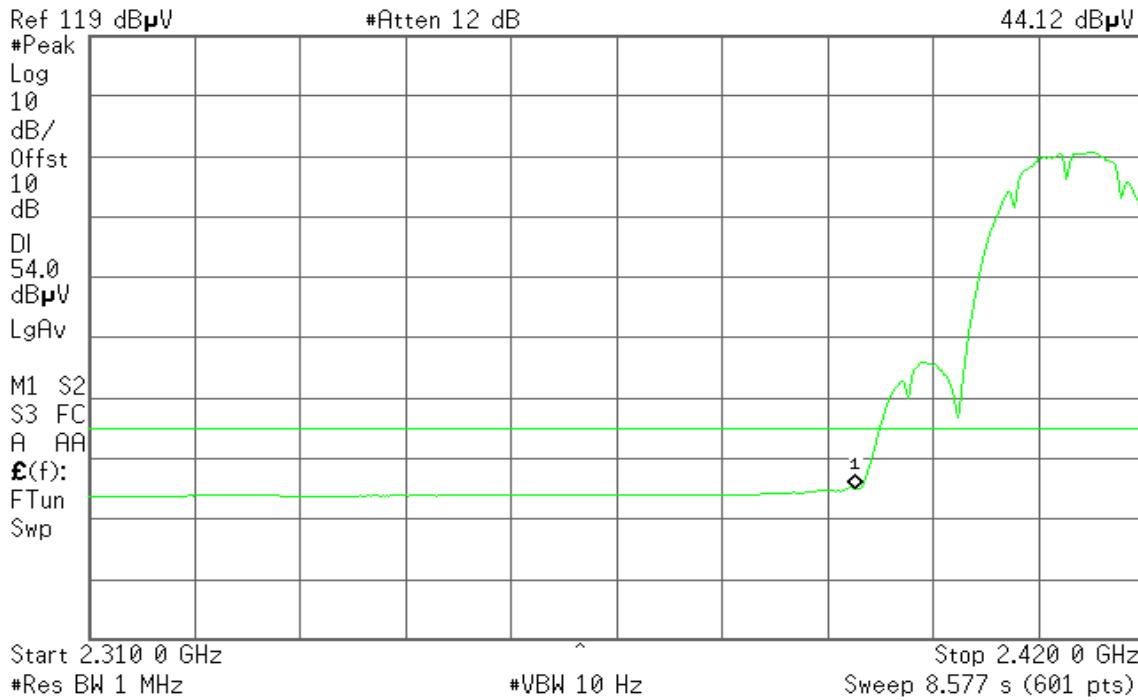



Band Edges (IEEE 802.11b mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 22:03:05 Nov 21, 2008

R T

Mkr1 2.483 50 GHz
60.02 dBμV

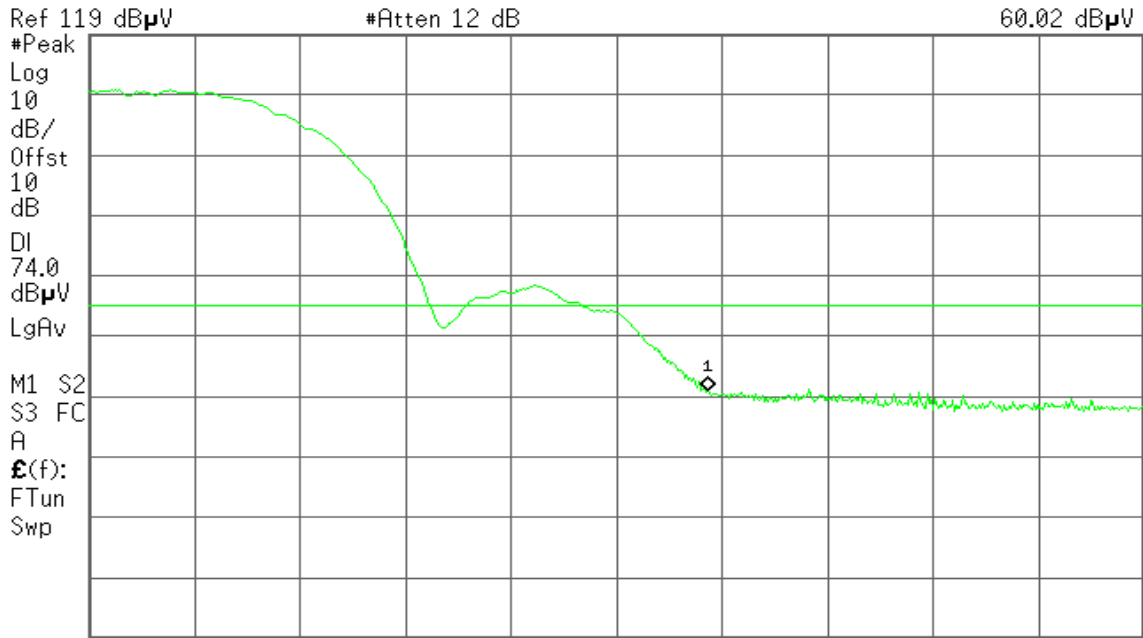

Start 2.460 00 GHz Stop 2.500 00 GHz
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 22:03:30 Nov 21, 2008

R T

Mkr1 2.483 50 GHz
48.10 dBμV

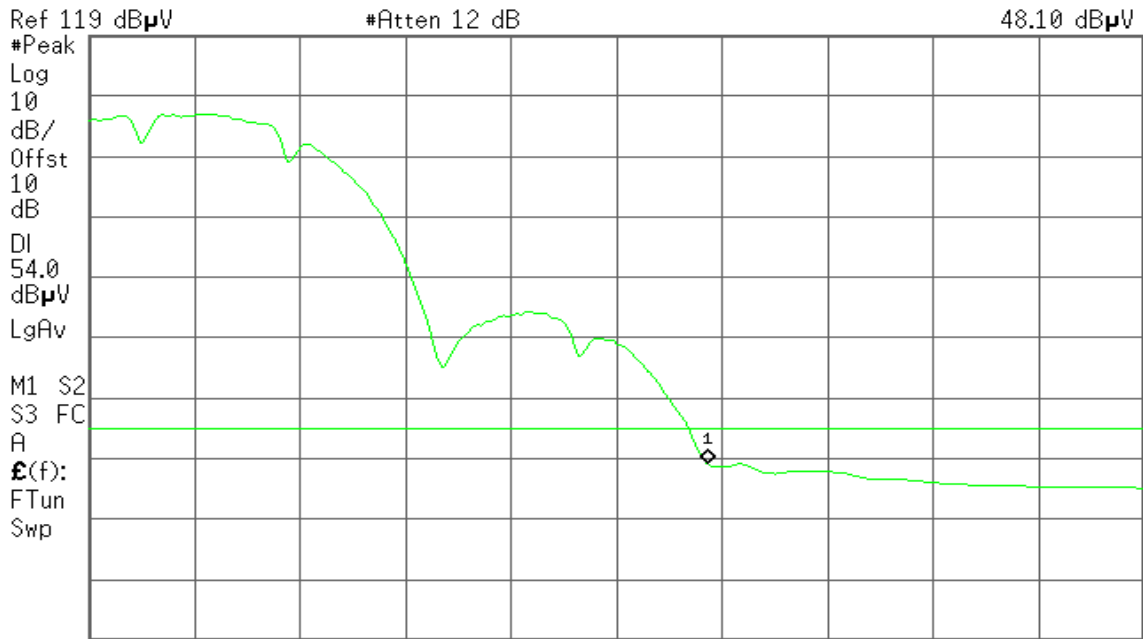

Start 2.460 00 GHz Stop 2.500 00 GHz
#Res BW 1 MHz #VBW 10 Hz Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 15:48:53 Nov 23, 2008

R T

Mkr1 2.483 50 GHz
55.53 dBμV

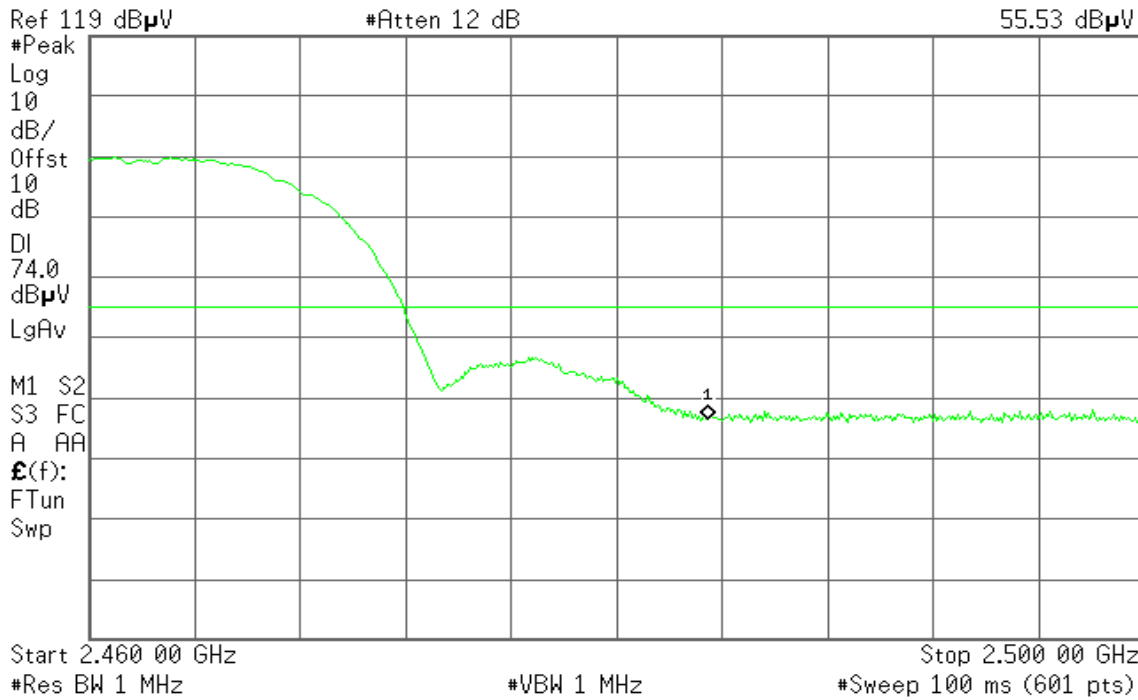


Detector mode: Average

Polarity: Horizontal

Agilent 15:49:12 Nov 23, 2008

R T

Mkr1 2.483 50 GHz
43.20 dBμV

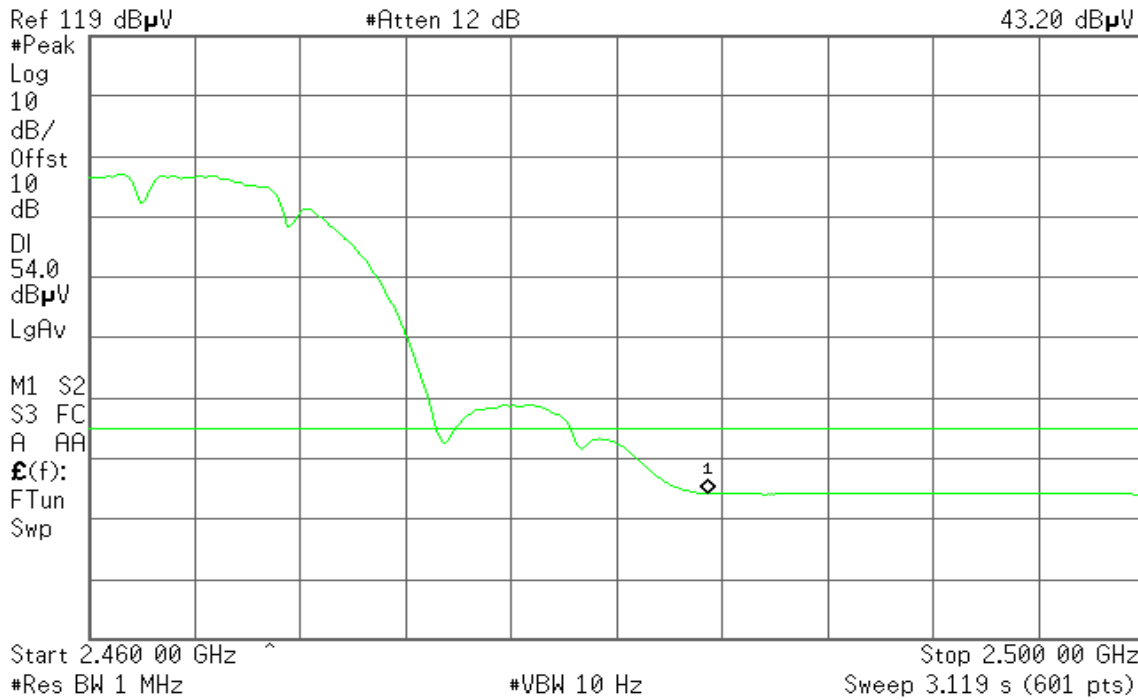



Band Edges (IEEE 802.11g mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 21:26:56 Nov 21, 2008

R T

Mkr1 2.390 0 GHz
72.38 dBμV

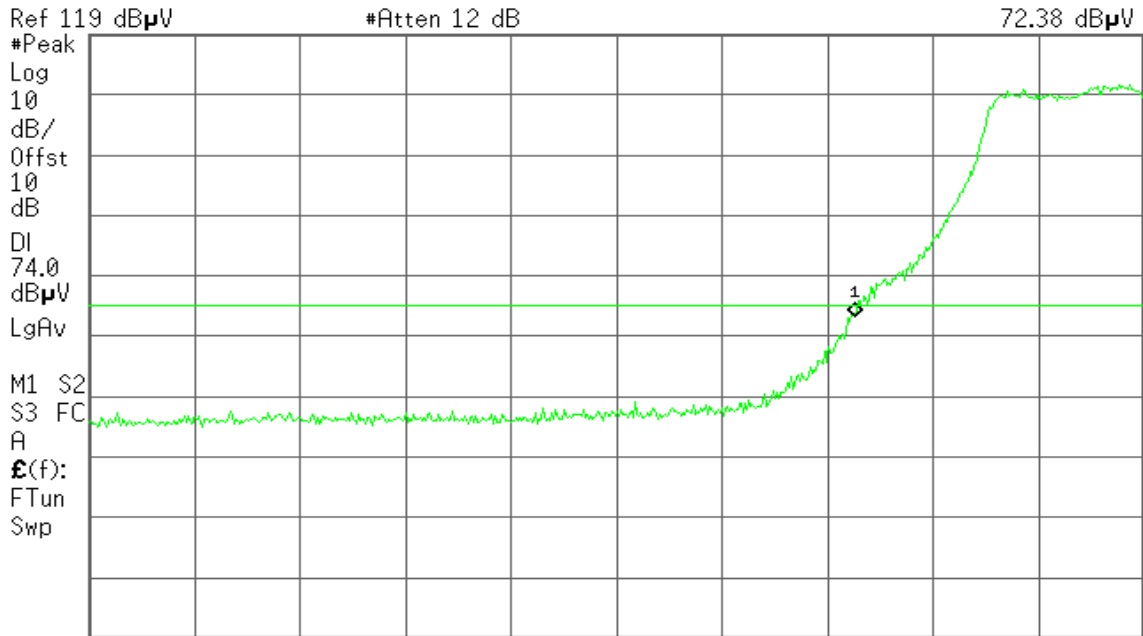

#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 21:26:16 Nov 21, 2008

R T

Mkr1 2.390 0 GHz
52.93 dBμV

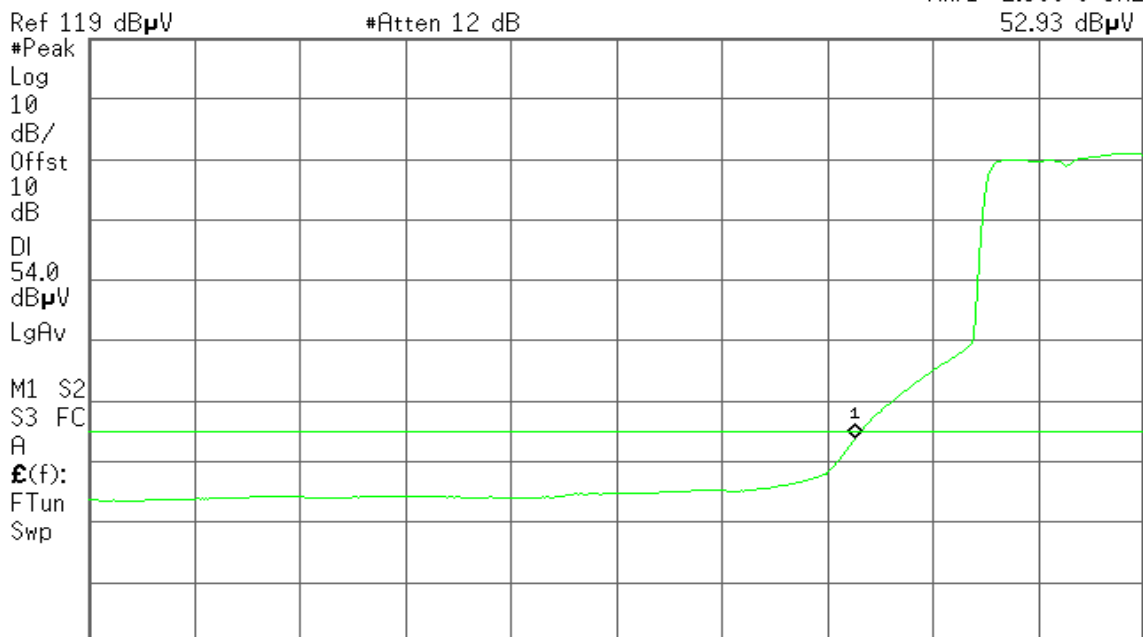

#Res BW 1 MHz #VBW 10 Hz Sweep 8.577 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 16:15:40 Nov 23, 2008

R T

Mkr1 2.390 0 GHz
63.96 dBμV

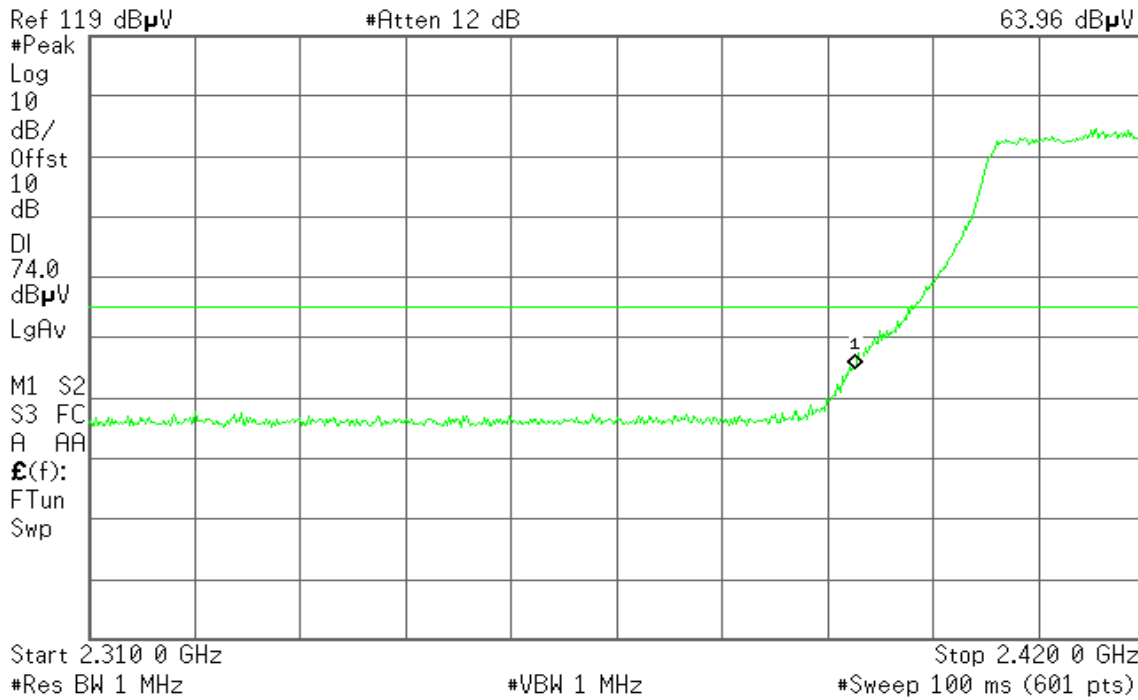


Detector mode: Average

Polarity: Horizontal

Agilent 16:14:58 Nov 23, 2008

R T

Mkr1 2.390 0 GHz
46.95 dBμV

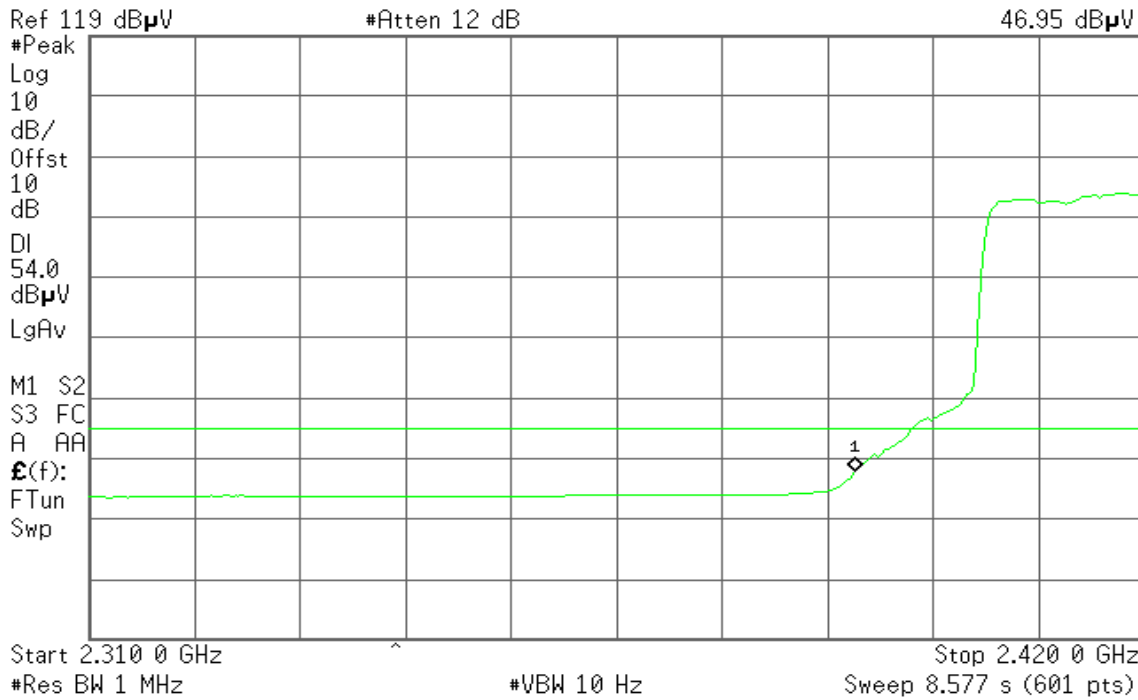



Band Edges (IEEE 802.11g mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 21:38:34 Nov 21, 2008

R T

Mkr1 2.483 50 GHz
71.23 dB μ V

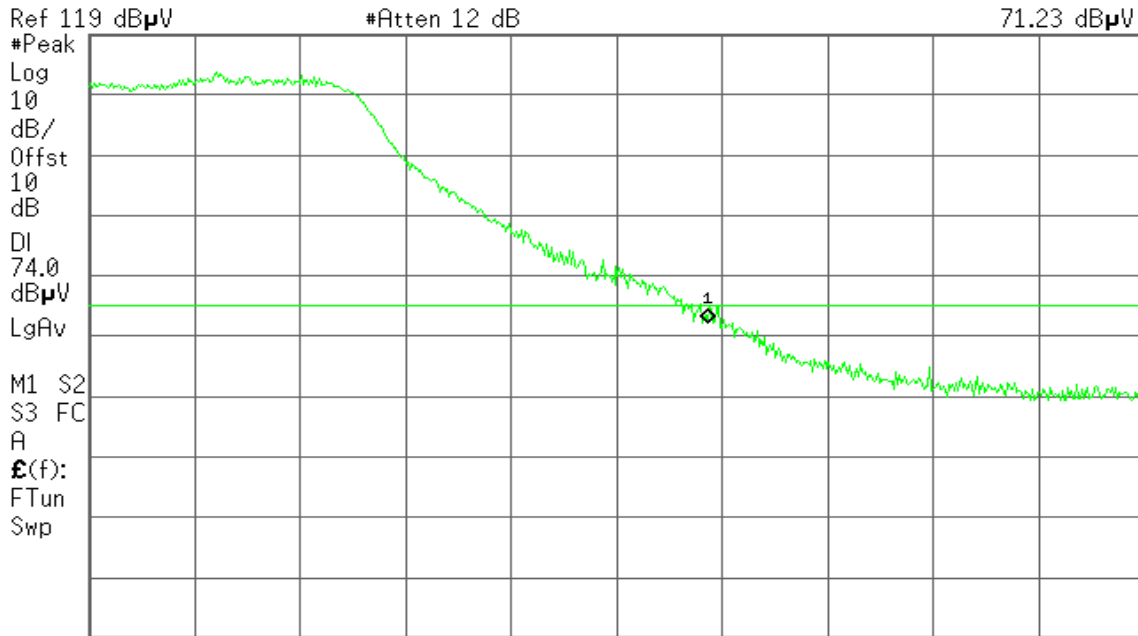

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 21:38:00 Nov 21, 2008

R T

Mkr1 2.483 50 GHz
53.44 dB μ V

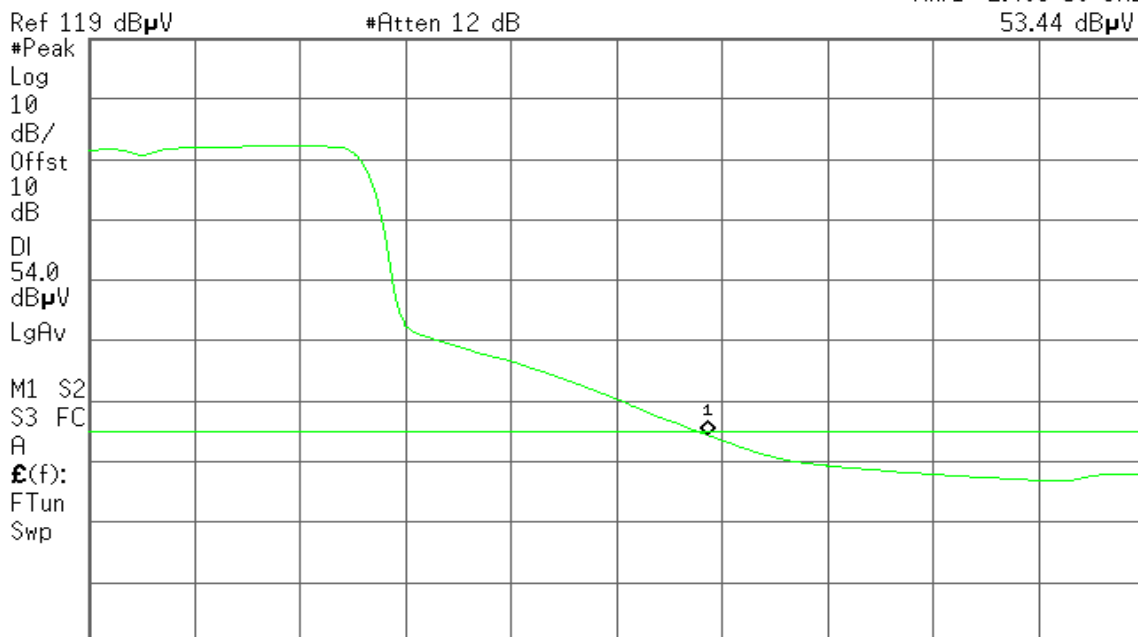

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 15:54:53 Nov 23, 2008

R T

Mkr1 2.483 50 GHz
57.65 dBμV

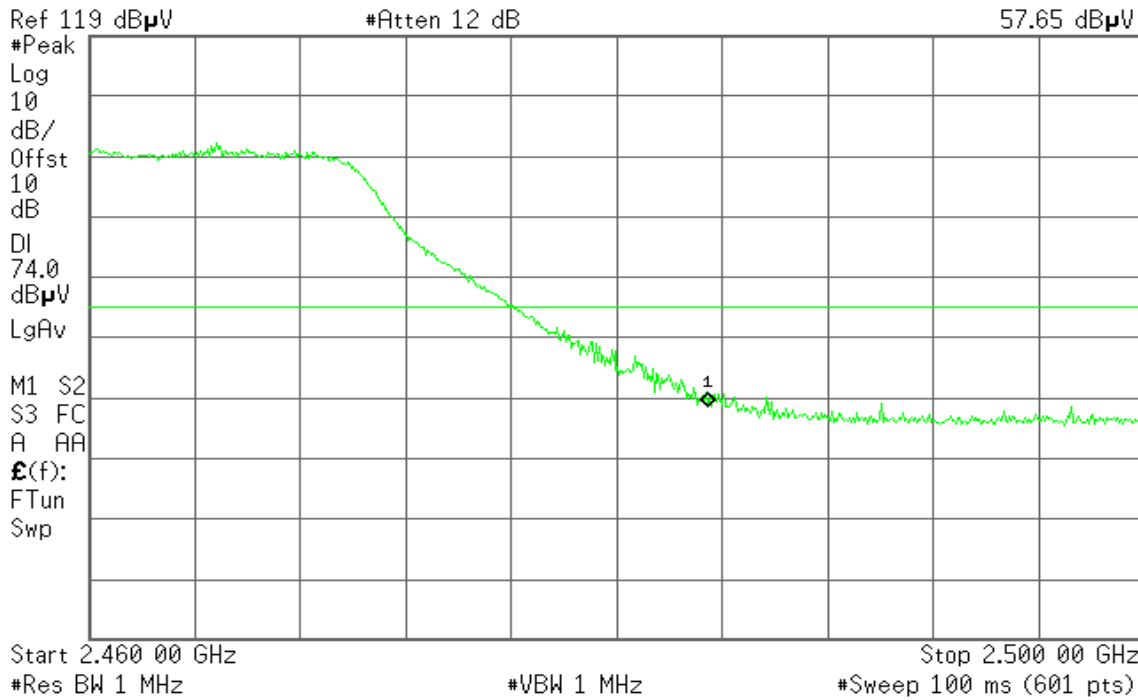


Detector mode: Average

Polarity: Horizontal

Agilent 15:55:22 Nov 23, 2008

R T

Mkr1 2.483 50 GHz
44.32 dBμV

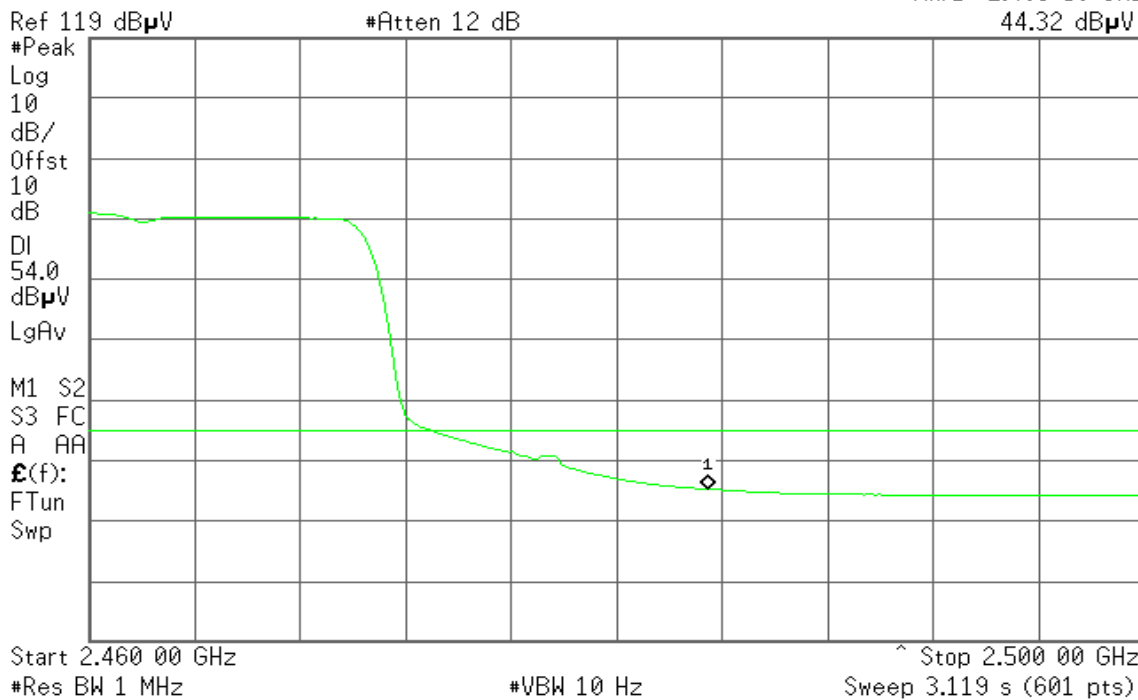




Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 21:28:48 Nov 21, 2008

R T

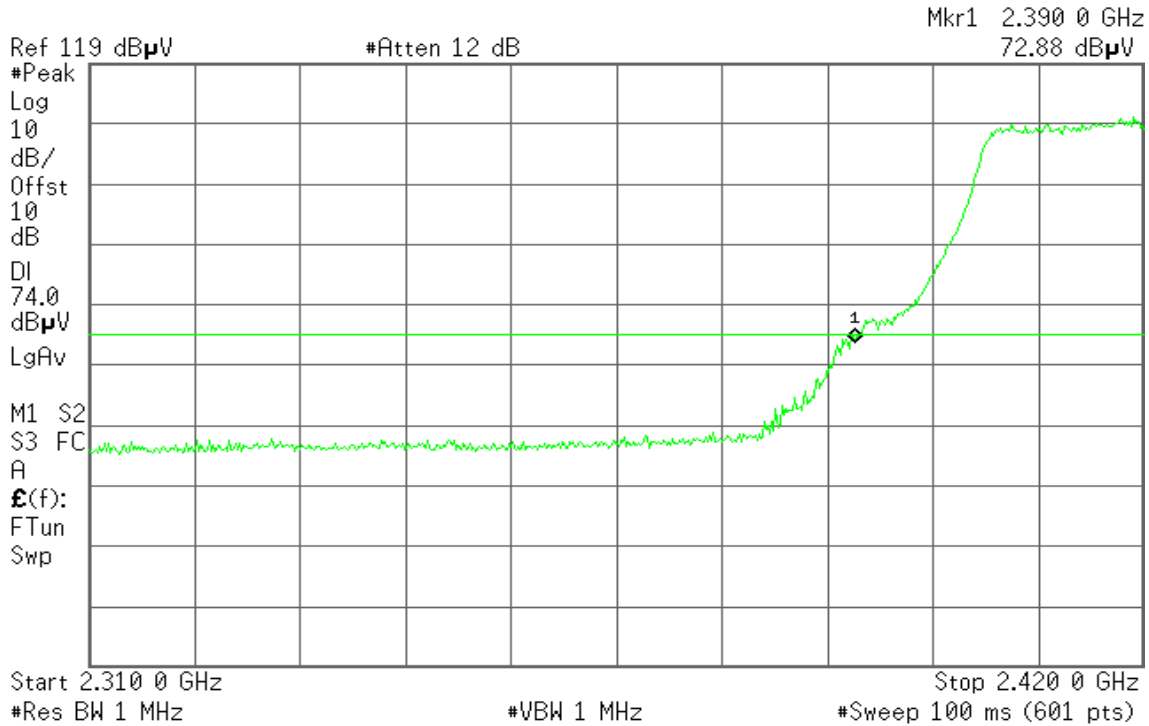


Detector mode: Average

Polarity: Vertical

Agilent 21:29:17 Nov 21, 2008

R T

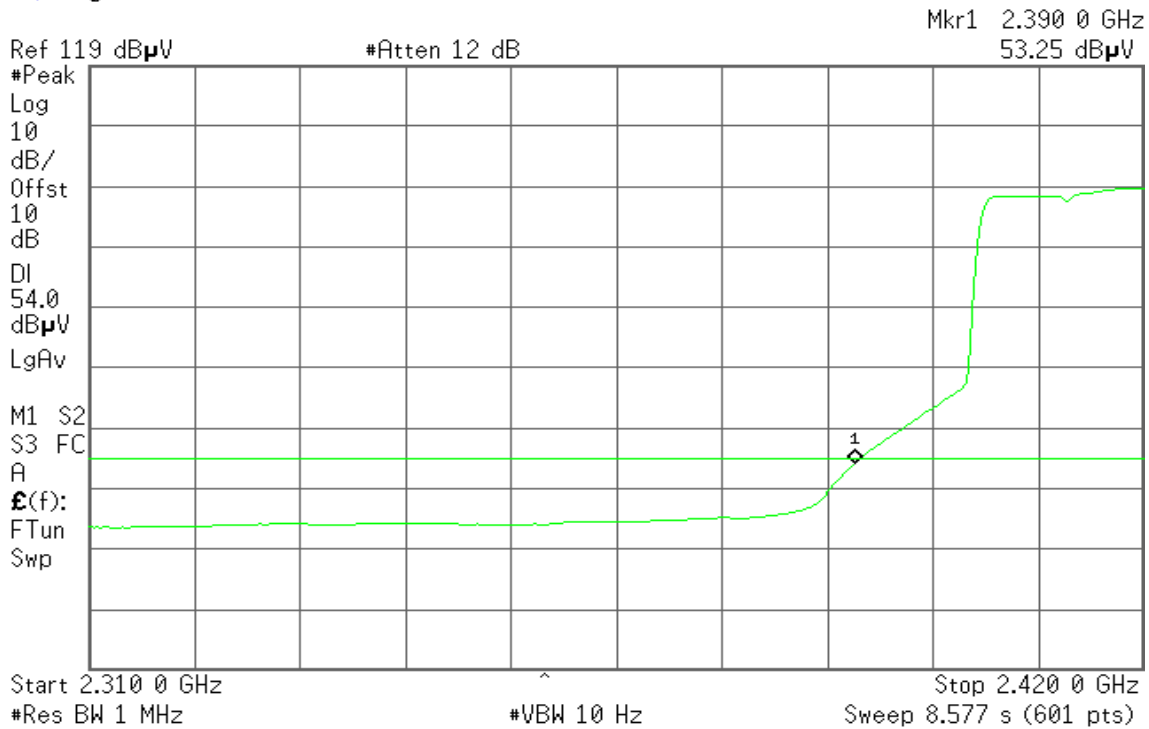




Detector mode: Peak

Polarity: Horizontal

Agilent 16:18:58 Nov 23, 2008

R T

Mkr1 2.390 0 GHz
63.64 dBμV

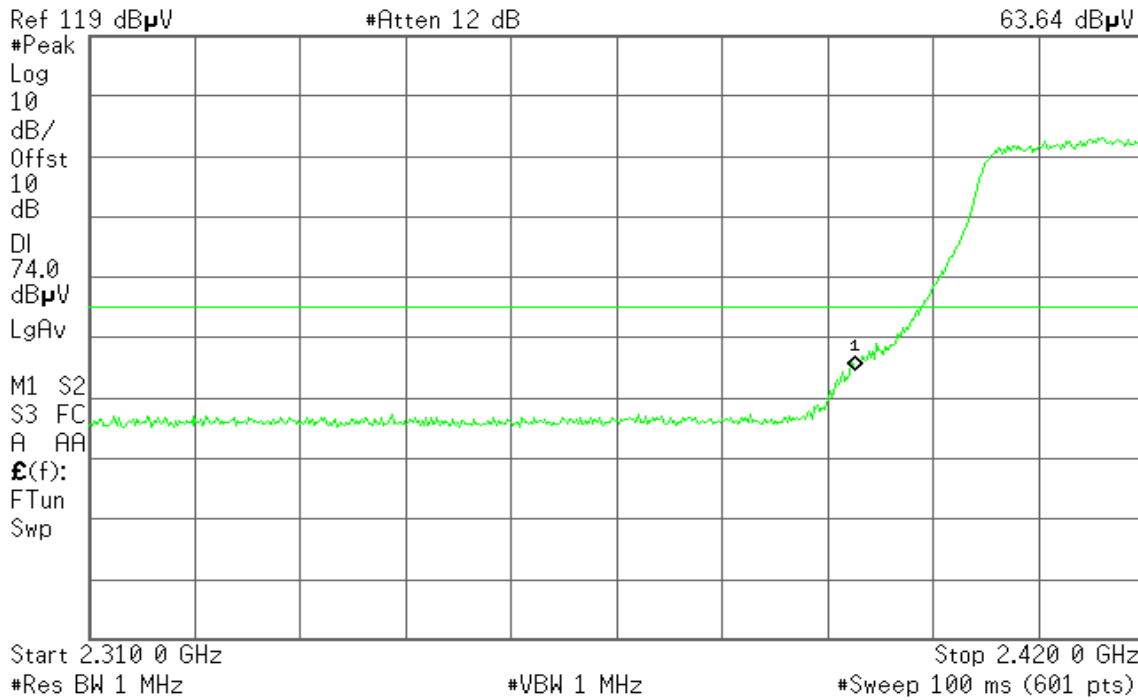


Detector mode: Average

Polarity: Horizontal

Agilent 16:19:28 Nov 23, 2008

R T

Mkr1 2.390 0 GHz
46.50 dBμV

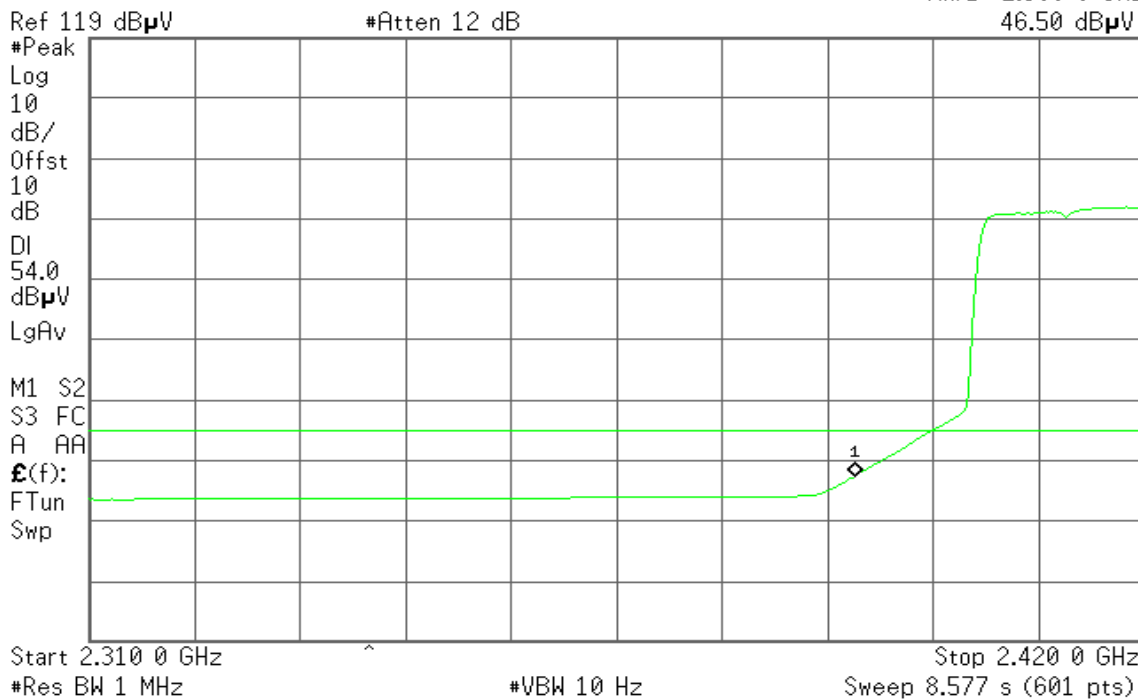



Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 21:42:02 Nov 21, 2008

R T

Mkr1 2.483 50 GHz
72.77 dB μ V

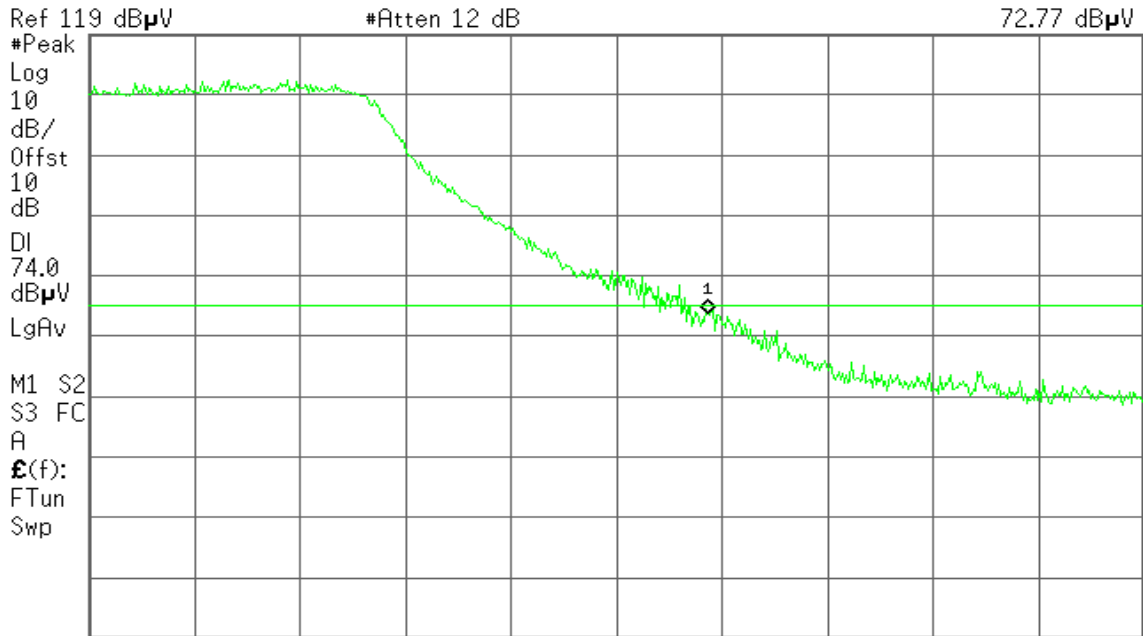

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 21:42:46 Nov 21, 2008

R T

Mkr1 2.483 50 GHz
53.64 dB μ V

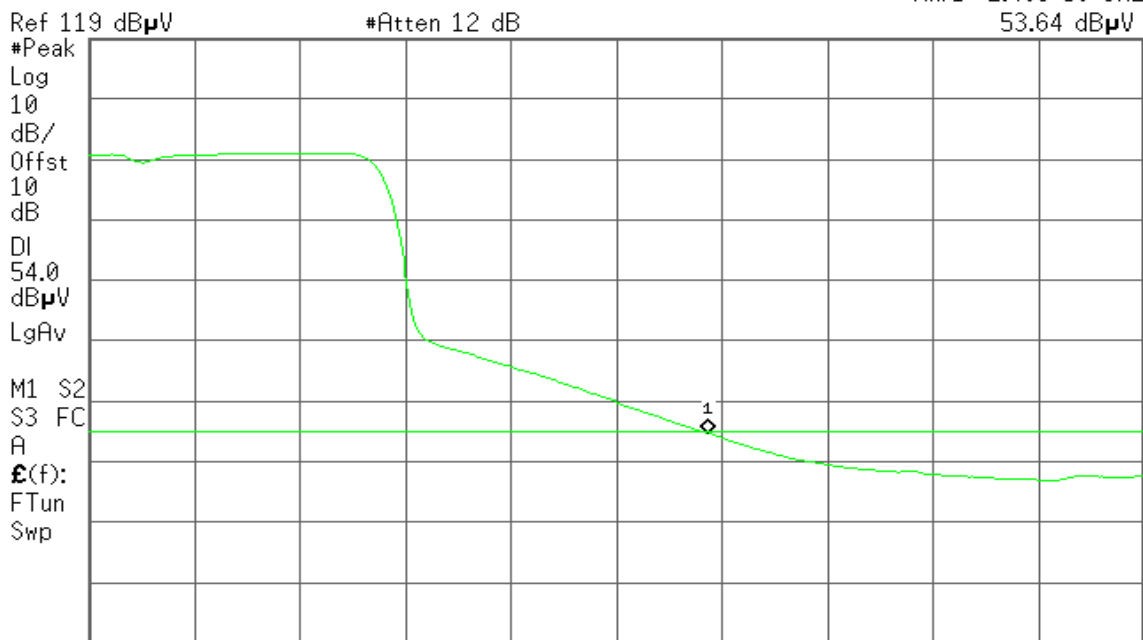

Start 2.460 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 16:32:53 Nov 23, 2008

R T

Mkr1 2.483 50 GHz
59.13 dBμV

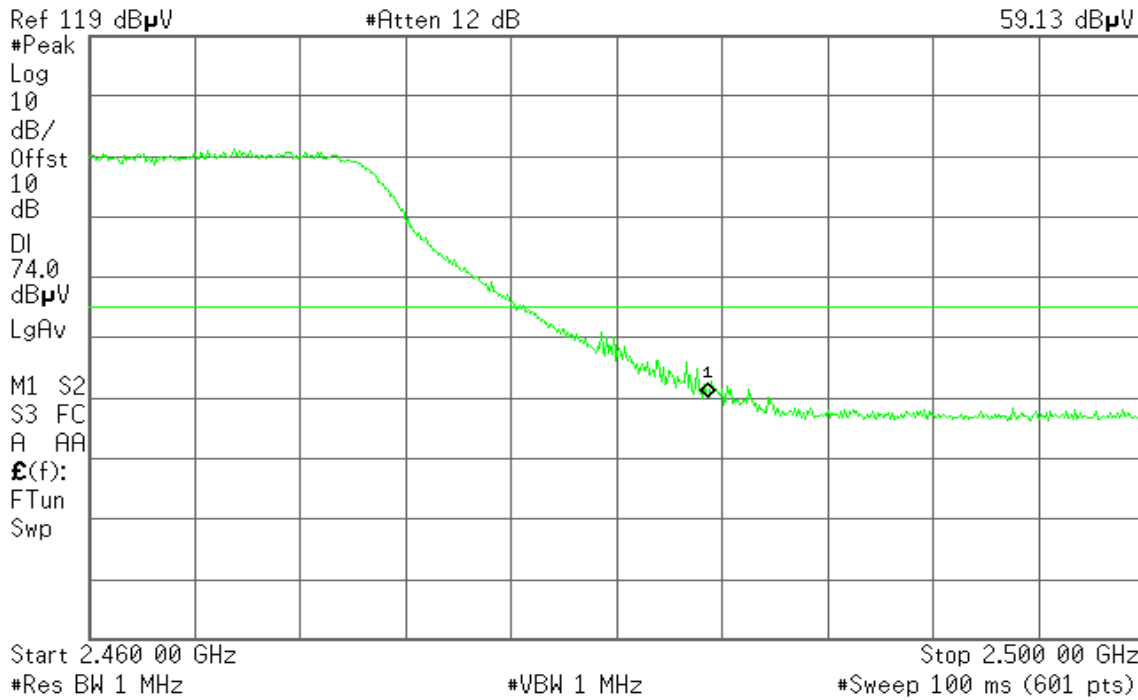


Detector mode: Average

Polarity: Horizontal

Agilent 16:33:31 Nov 23, 2008

R T

Mkr1 2.483 50 GHz
43.81 dBμV

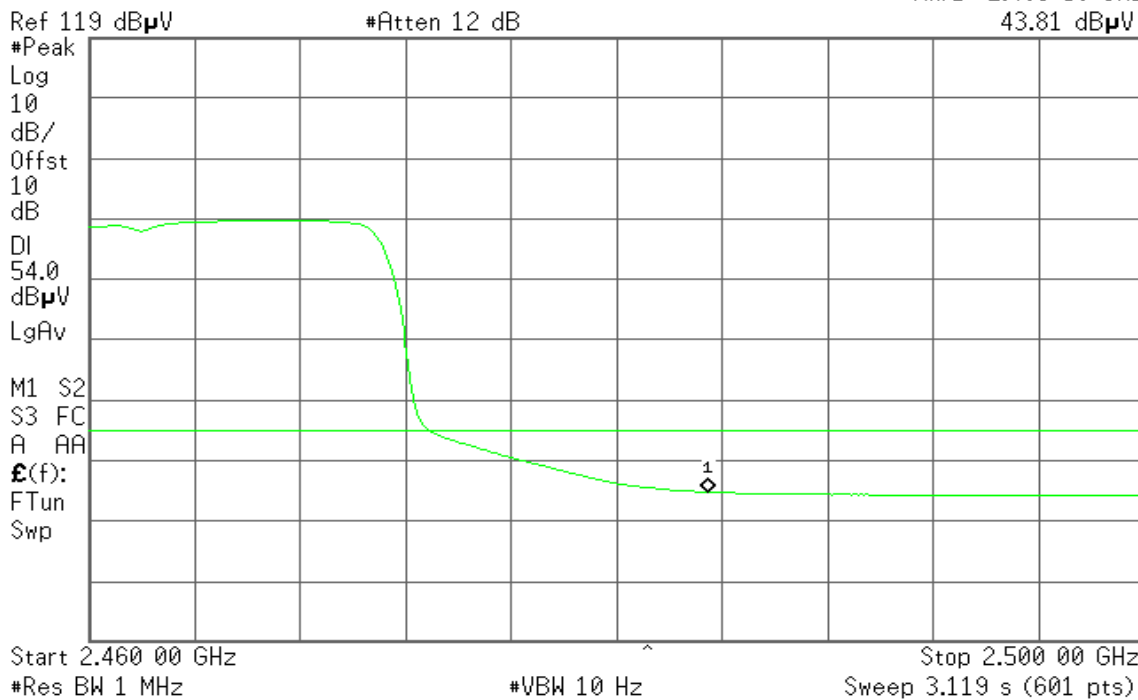



Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 21:15:13 Nov 21, 2008

R T

Mkr1 2.390 0 GHz
69.61 dB μ V

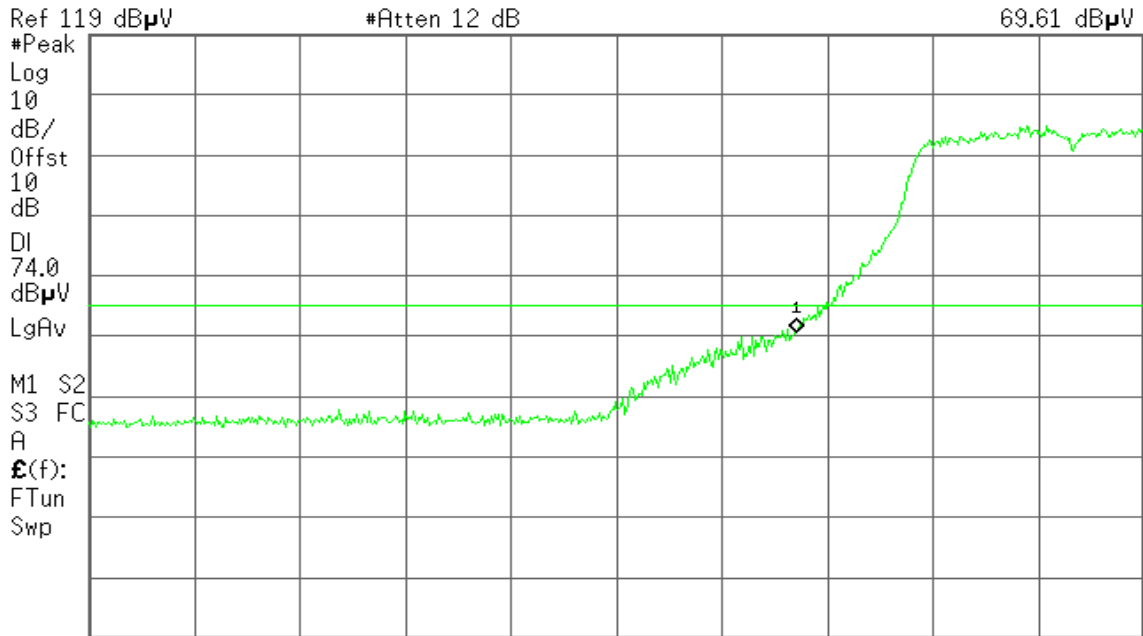

Start 2.310 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.430 0 GHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 21:14:52 Nov 21, 2008

R T

Mkr1 2.390 0 GHz
53.19 dB μ V

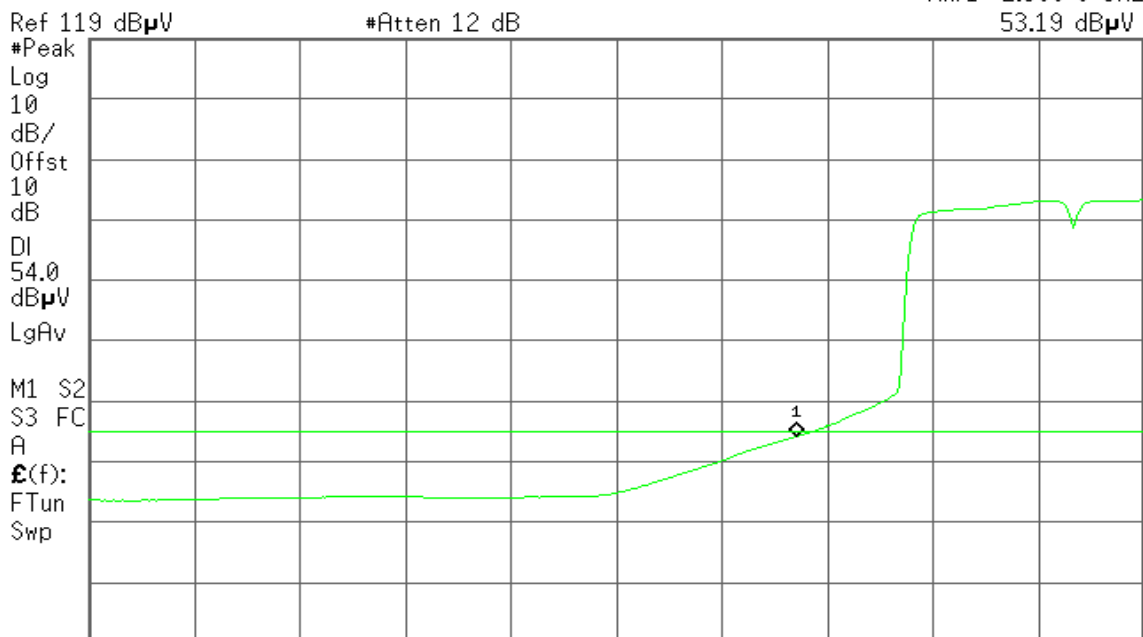

Start 2.310 0 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.430 0 GHz

Sweep 9.357 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 21:19:30 Nov 21, 2008

R T

Mkr1 2.390 0 GHz
62.58 dBμV

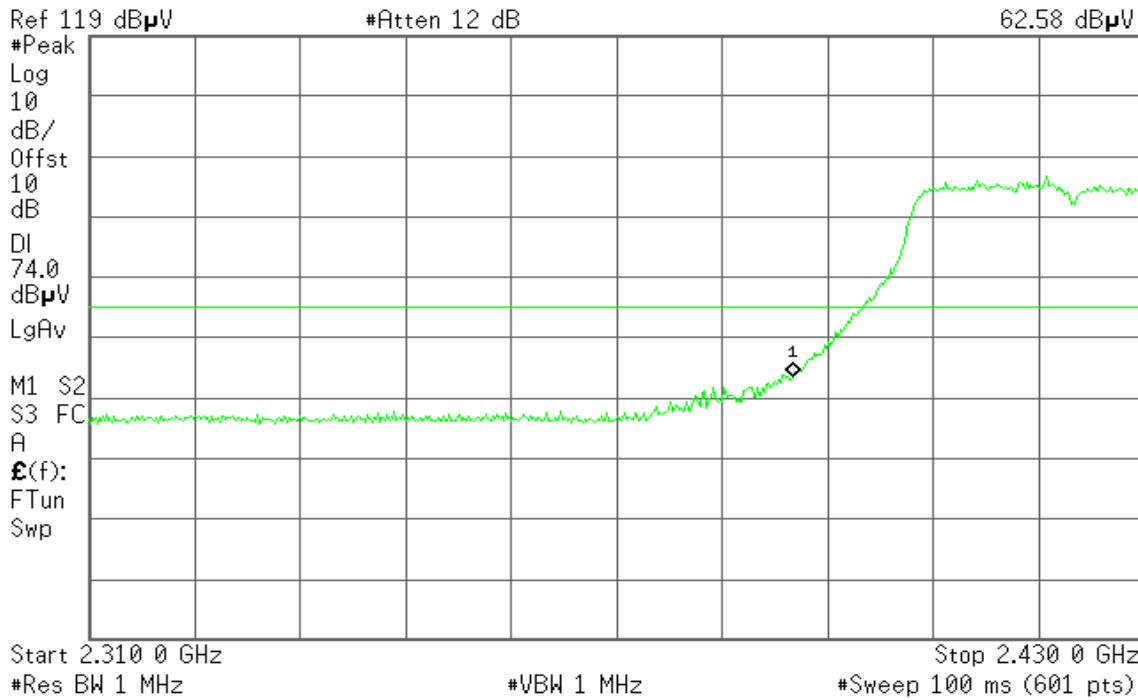


Detector mode: Average

Polarity: Horizontal

Agilent 21:19:51 Nov 21, 2008

R T

Mkr1 2.390 0 GHz
46.56 dBμV

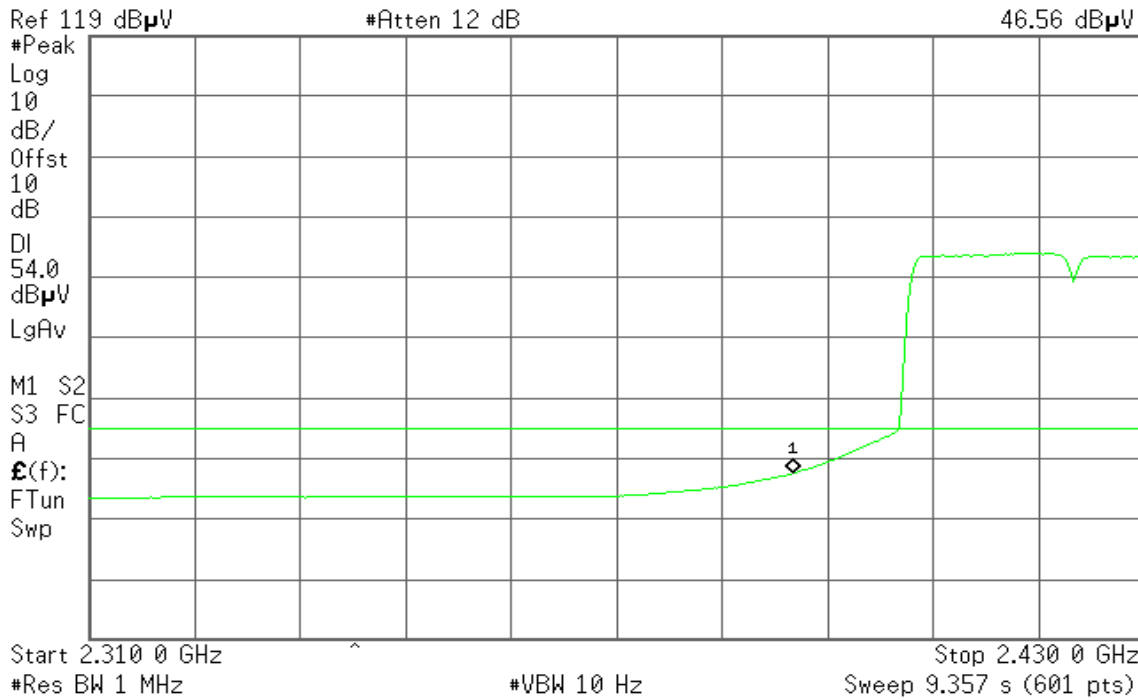



Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 21:05:50 Nov 21, 2008

R T

Mkr1 2.483 50 GHz
69.25 dB μ V

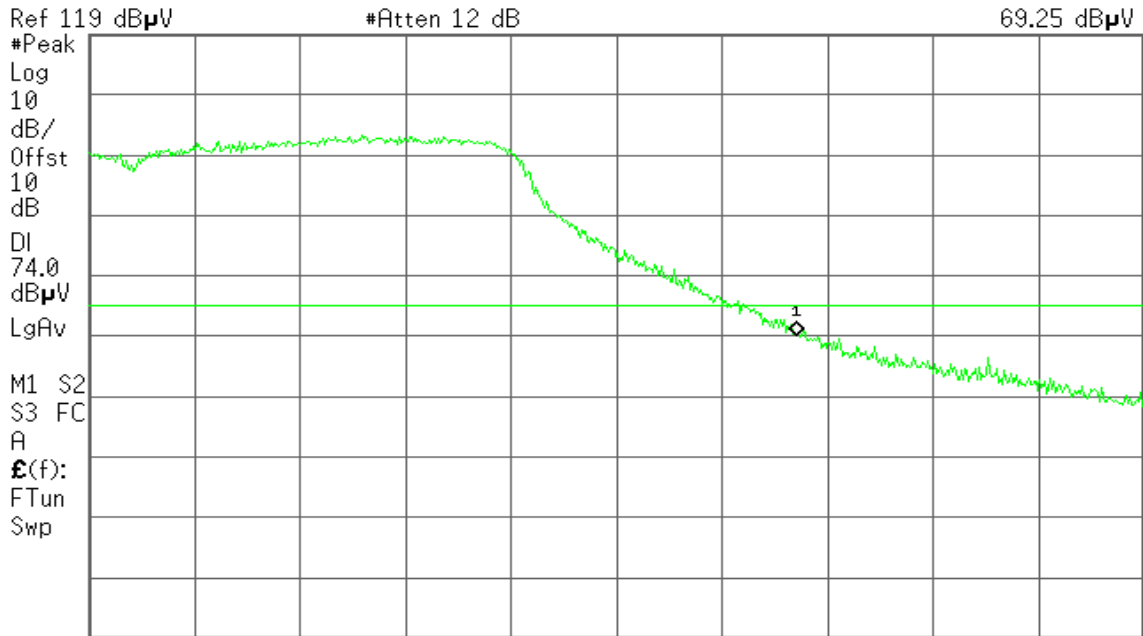

Start 2.450 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

#Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 21:05:32 Nov 21, 2008

R T

Mkr1 2.483 50 GHz
52.86 dB μ V

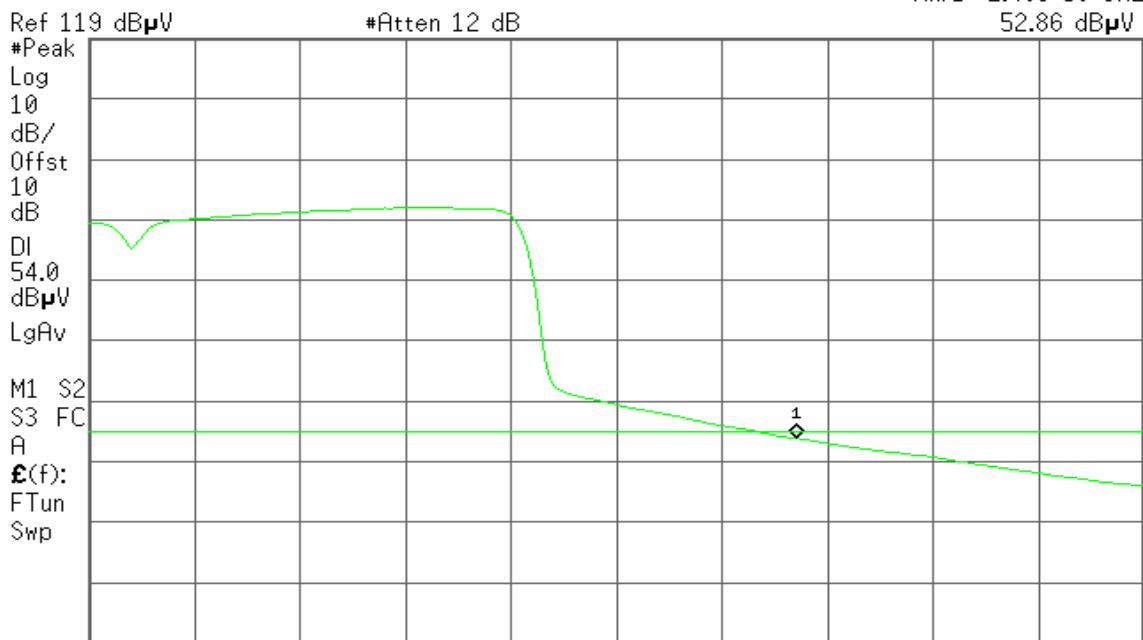

Start 2.450 00 GHz

Stop 2.500 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 3.899 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 16:43:32 Nov 23, 2008

R T

Mkr1 2.483 50 GHz
62.39 dBμV

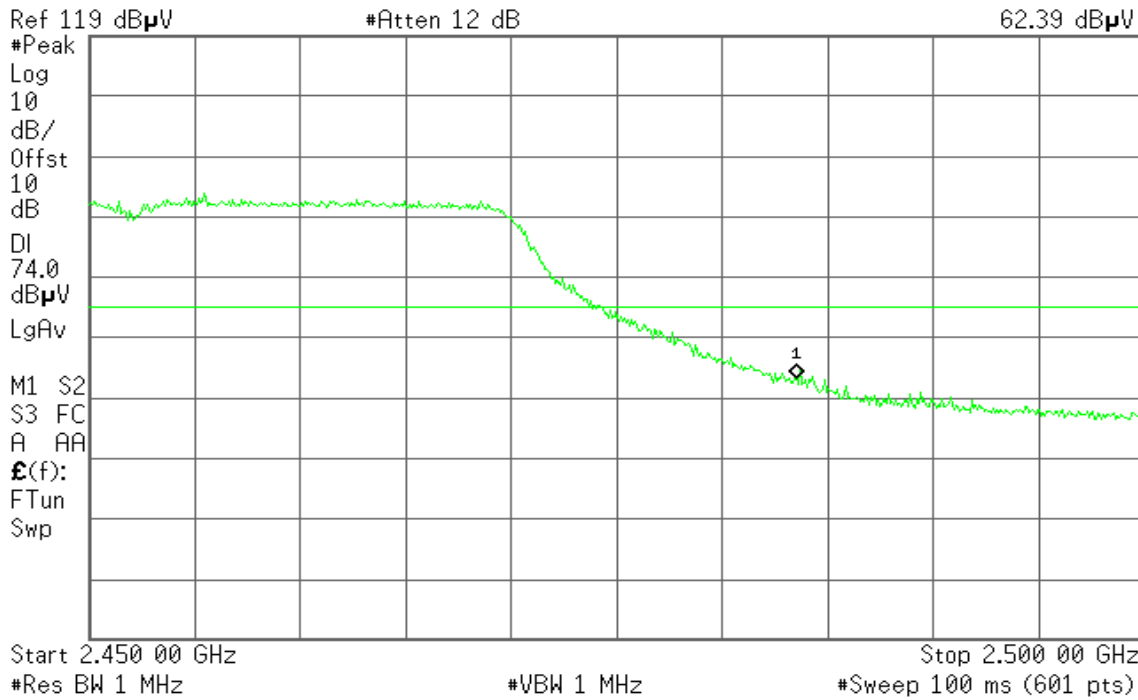


Detector mode: Average

Polarity: Horizontal

Agilent 16:43:54 Nov 23, 2008

R T

Mkr1 2.483 50 GHz
46.42 dBμV

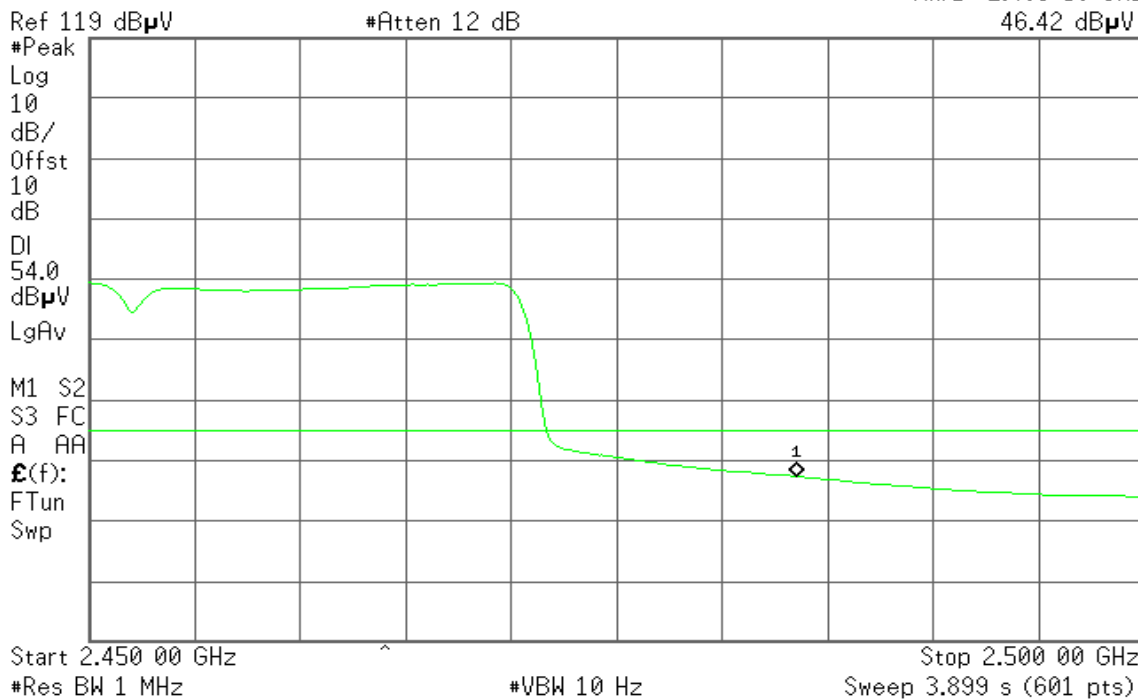


PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e) & RSS-210 §A8.2, for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f) & RSS-210 §A8.3, the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep time = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

**Test Data****Test mode: IEEE 802.11b mode**

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------|-------------|--------|
| Low | 2412 | -6.57 | 8.00 | PASS |
| Mid | 2437 | -5.23 | | PASS |
| High | 2462 | -4.36 | | PASS |

Test mode: IEEE 802.11g mode

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------|-------------|--------|
| Low | 2412 | -10.84 | 8.00 | PASS |
| Mid | 2437 | -7.59 | | PASS |
| High | 2462 | -9.89 | | PASS |

Test mode: draft 802.11n Standard-20 MHz Channel mode

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------|-------------|--------|
| Low | 2412 | -12.39 | 8.00 | PASS |
| Mid | 2437 | -7.49 | | PASS |
| High | 2462 | -11.50 | | PASS |

Test mode: draft 802.11n Wide-40 MHz Channel mode


| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Result |
|---------|-----------------|------------|-------------|--------|
| Low | 2422 | -17.55 | 8.00 | PASS |
| Mid | 2437 | -12.94 | | PASS |
| High | 2452 | -18.54 | | PASS |




Test Plot

IEEE 802.11b mode

PPSD (CH Low)

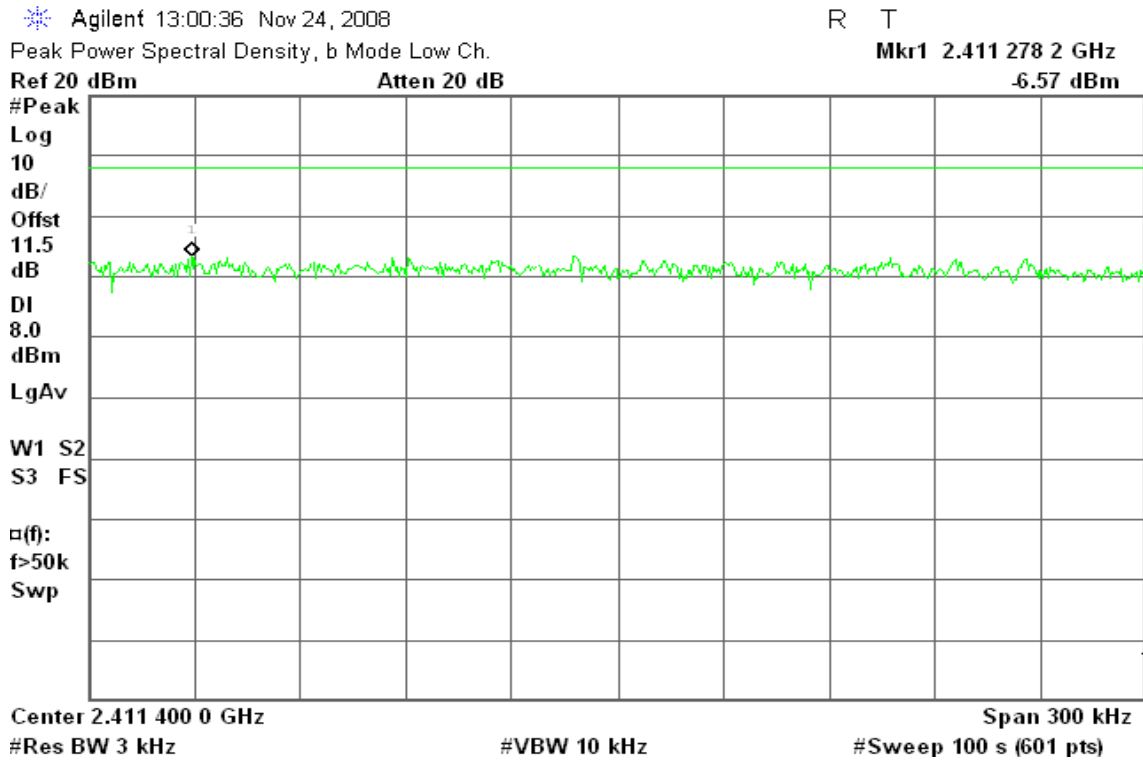

PPSD (CH Mid)

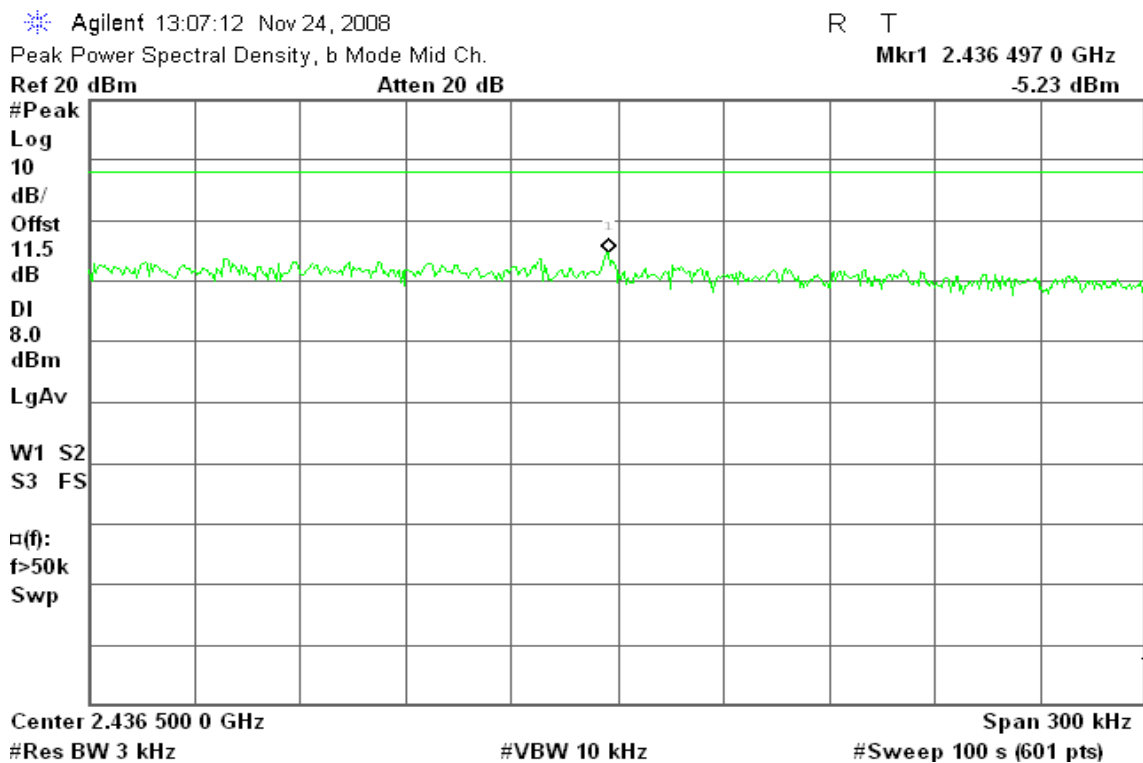



PPSD (CH High)

Agilent 13:21:40 Nov 24, 2008

R T


Peak Power Spectral Density, b Mode High Ch.

Mkr1 2.462 775 4 GHz

Ref 20 dBm

Atten 20 dB

-4.36 dBm

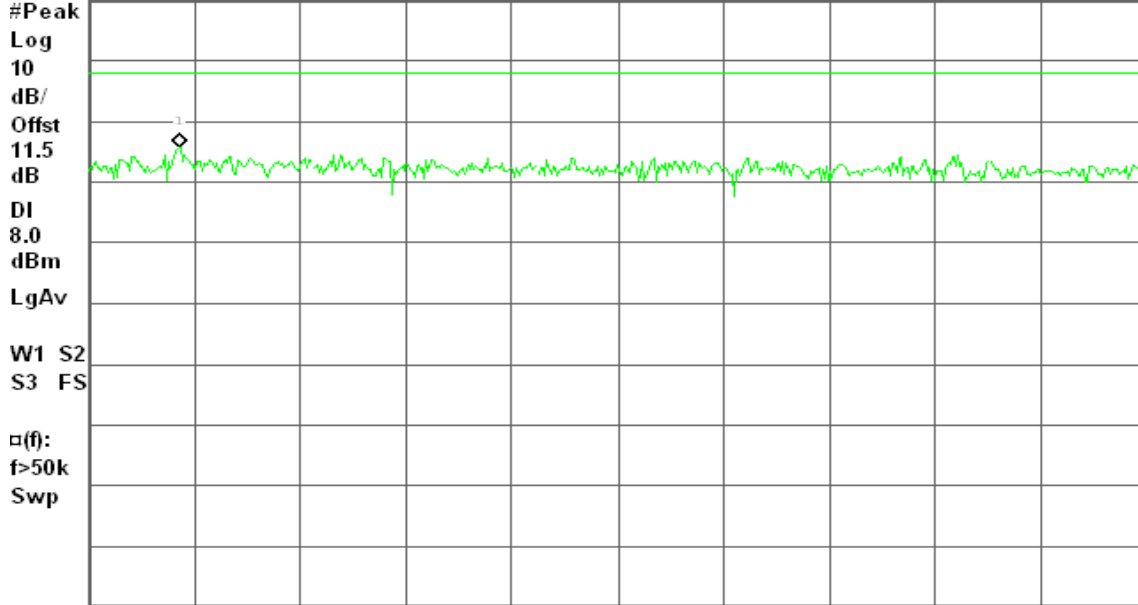

Center 2.462 900 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

IEEE 802.11g mode

PPSD (CH Low)

Agilent 13:13:52 Nov 26, 2008

R T


Peak Power Spectral Density, g Mode Low Ch.

Mkr1 2.410 402 0 GHz

Ref 20 dBm

Atten 20 dB

-10.84 dBm

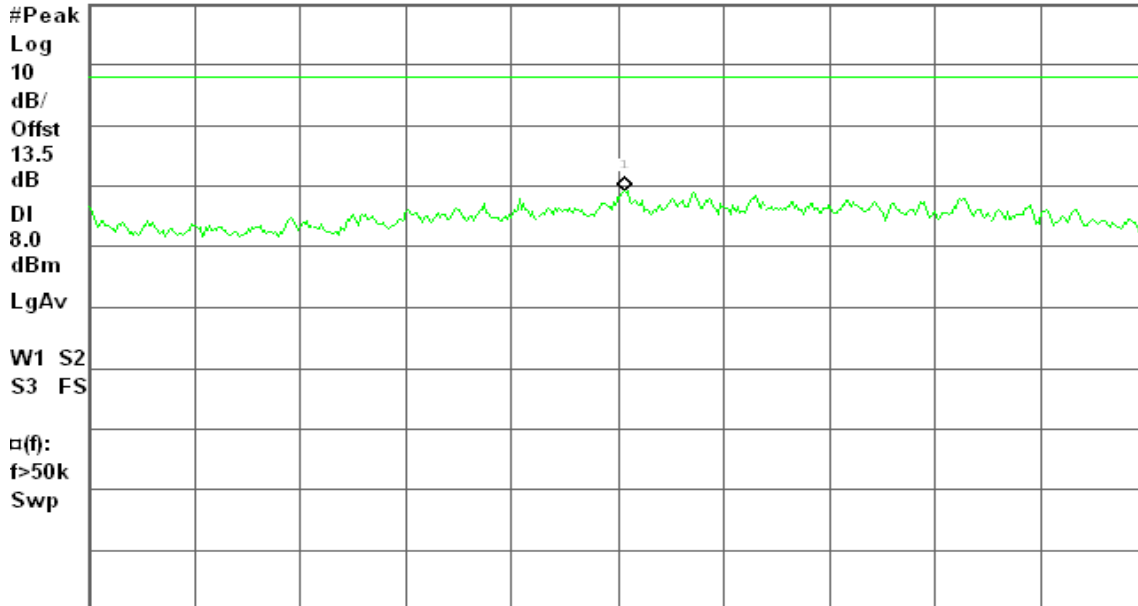

Center 2.410 400 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)



PPSD (CH Mid)

Agilent 13:08:56 Nov 26, 2008

R T


Peak Power Spectral Density, g Mode Mid Ch.

Mkr1 2.437 901 0 GHz

Ref 20 dBm

Atten 20 dB

-7.59 dBm

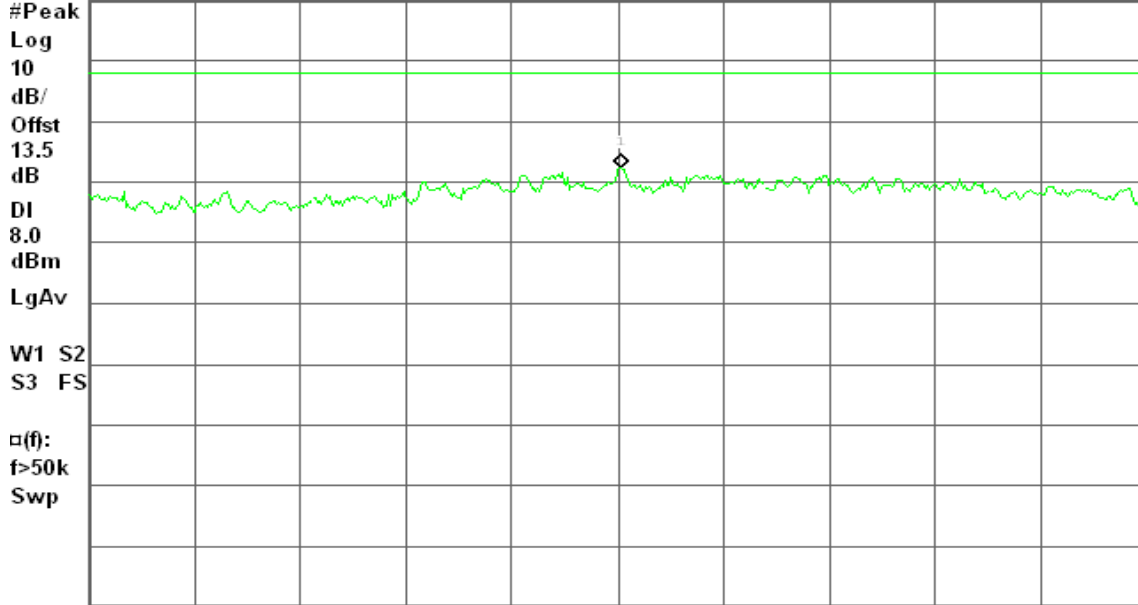

Center 2.437 900 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

PPSD (CH High)

Agilent 13:04:38 Nov 26, 2008

R T


Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.469 246 6 GHz

Ref 20 dBm

Atten 20 dB

-9.89 dBm

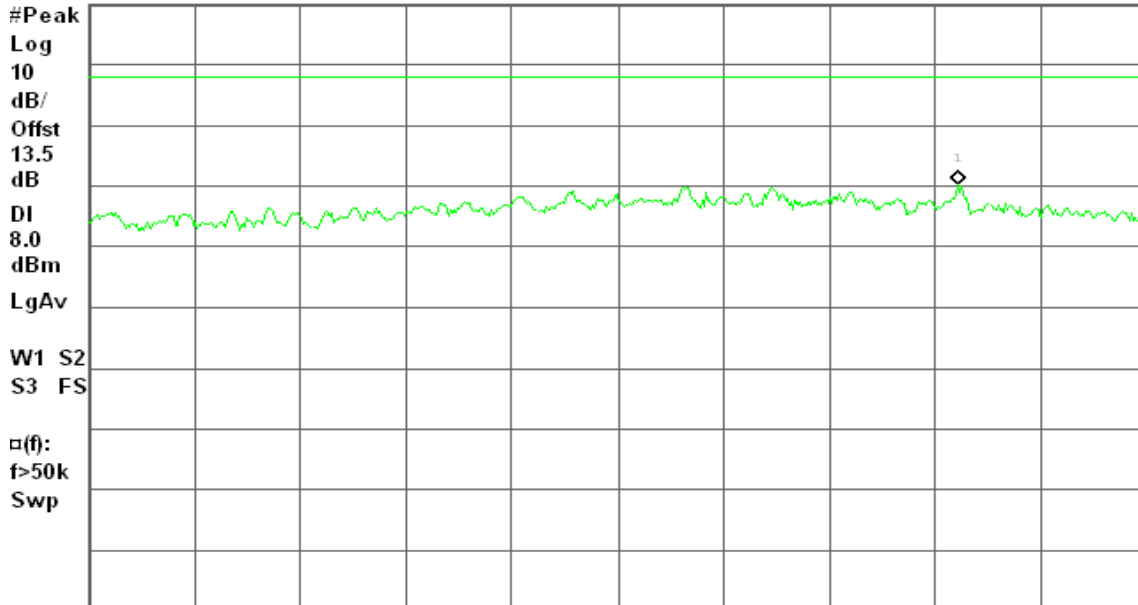

Center 2.469 150 0 GHz

Span 300 kHz

#Res BW 3 kHz


#VBW 10 kHz

#Sweep 100 s (601 pts)




draft 802.11n Standard-20 MHz Channel mode

PPSD (CH Low)

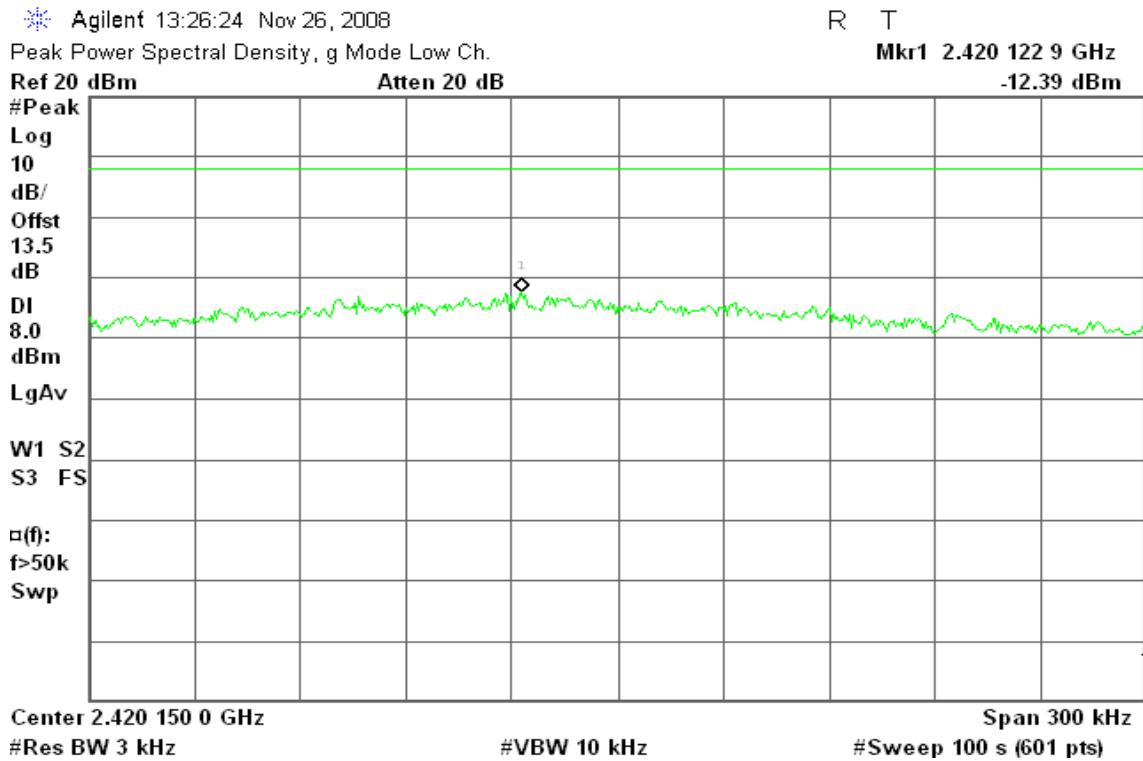

PPSD (CH Mid)

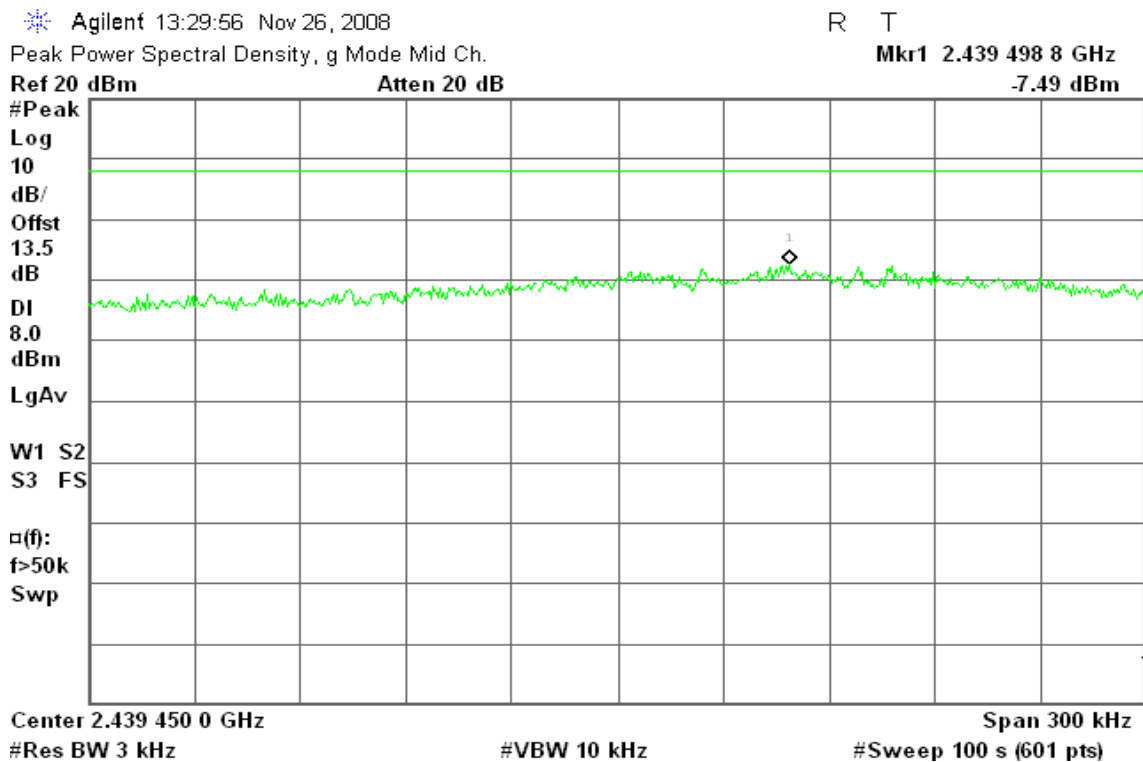



PPSD (CH High)

Agilent 13:33:19 Nov 26, 2008

R T


Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.462 291 2 GHz

Ref 20 dBm

Atten 20 dB

-11.50 dBm

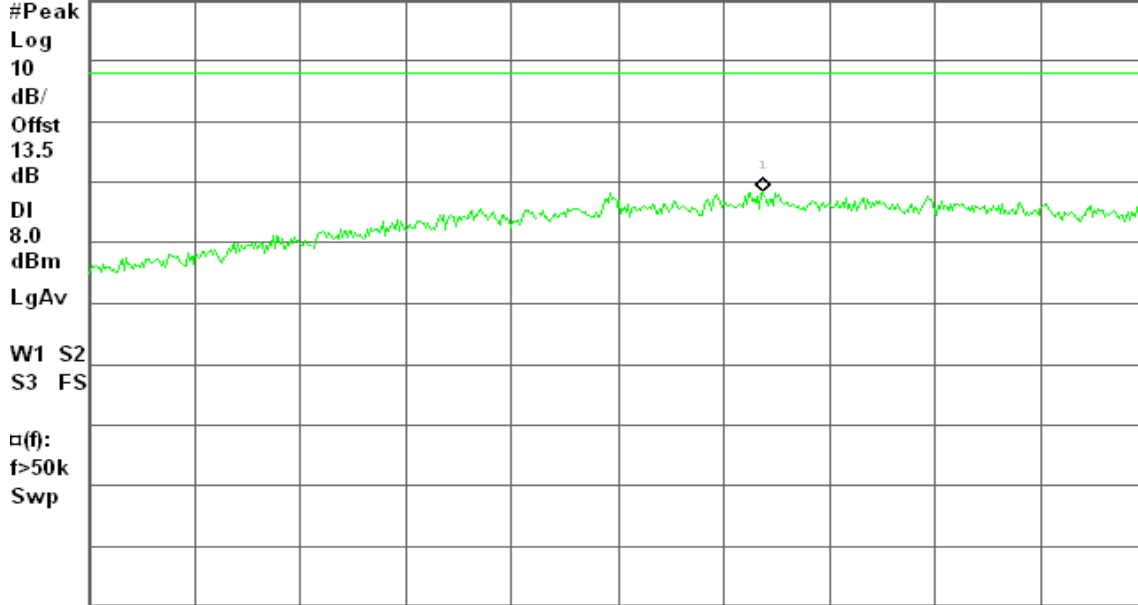

Center 2.462 250 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

draft 802.11n Wide-40 MHz Channel mode

PPSD (CH Low)

Agilent 12:39:39 Nov 26, 2008

R T


Peak Power Spectral Density, g Mode Low Ch.

Mkr1 2.420 747 5 GHz

Ref 27.5 dBm

Atten 30 dB

-17.55 dBm

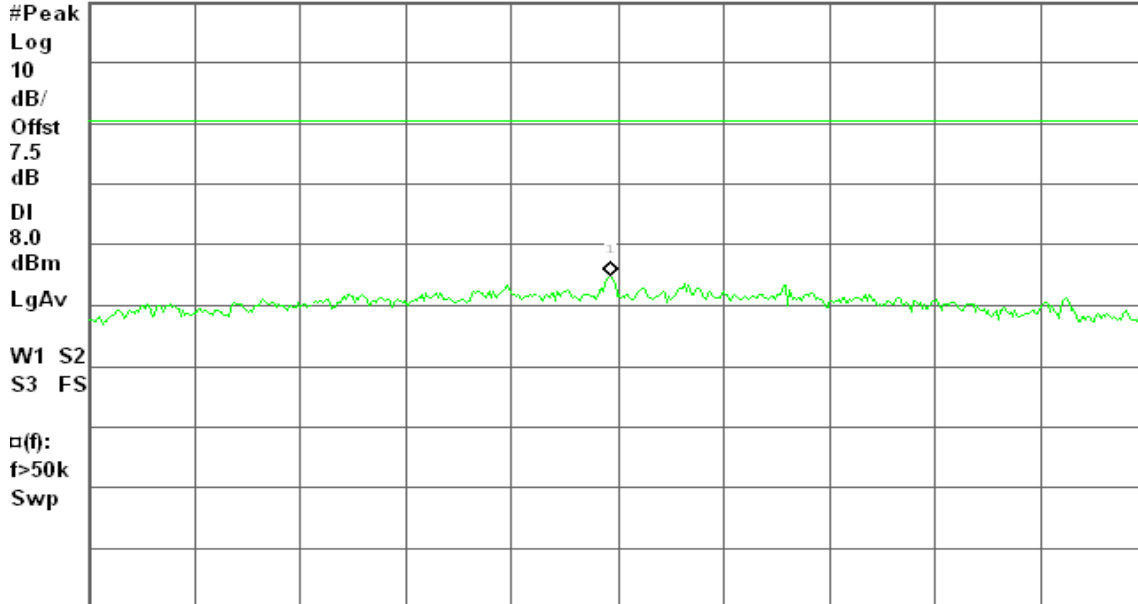

Center 2.420 750 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)



PPSD (CH Mid)

Agilent 12:43:25 Nov 26, 2008

R T


Peak Power Spectral Density, g Mode Mid Ch.

Mkr1 2.426 748 5 GHz

Ref 27.5 dBm

Atten 30 dB

-12.94 dBm

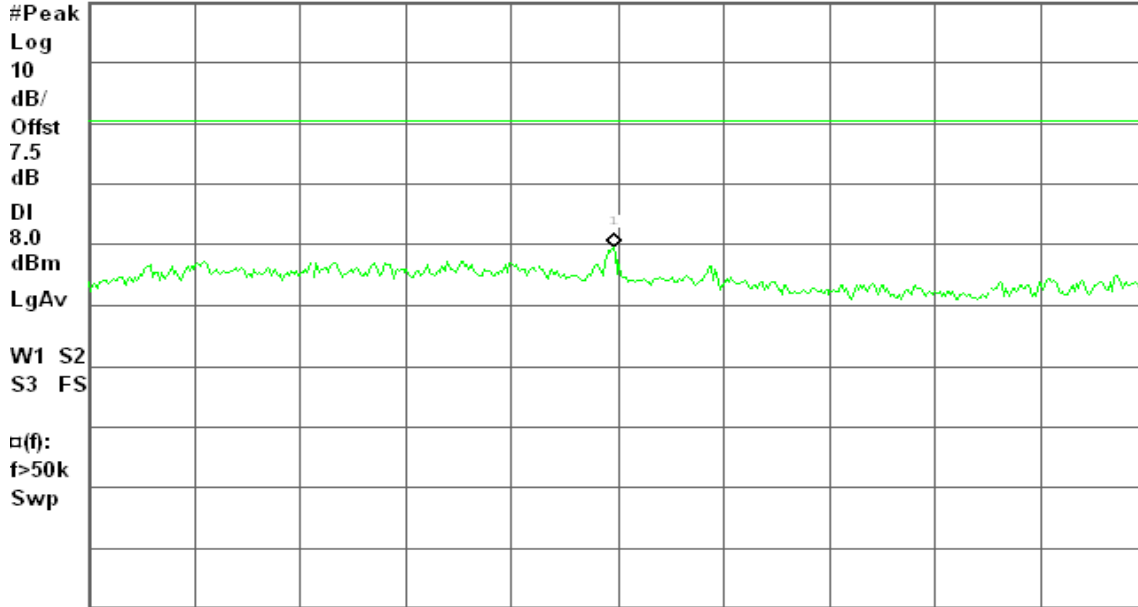

Center 2.426 750 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

PPSD (CH High)

Agilent 12:46:57 Nov 26, 2008

R T


Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.443 873 6 GHz

Ref 27.5 dBm

Atten 30 dB

-18.54 dBm

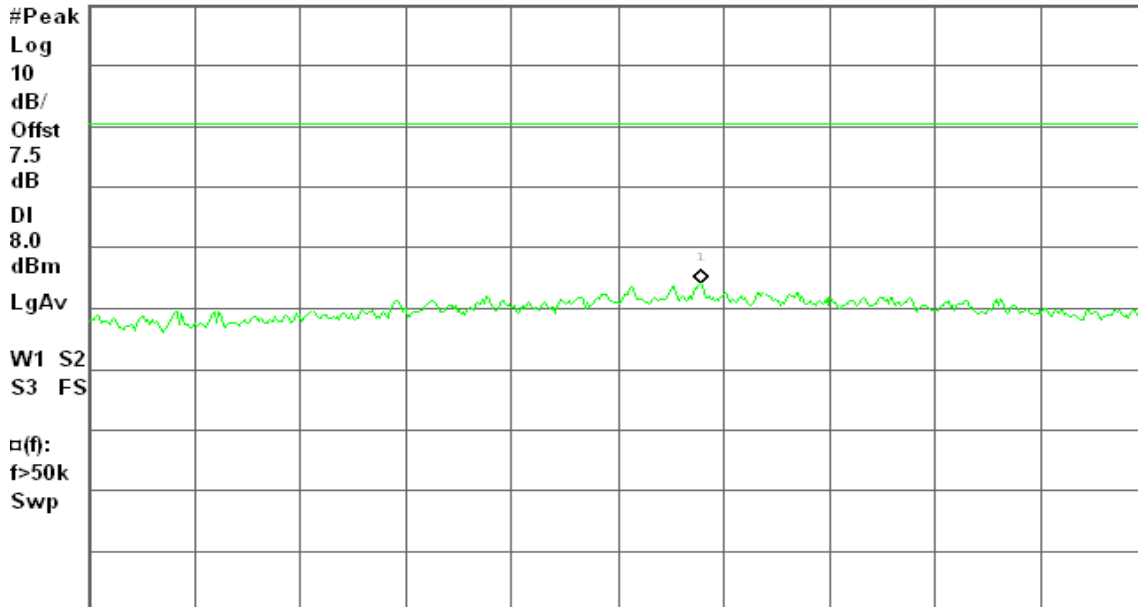

Center 2.443 850 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)


SPURIOUS EMISSIONS

Conducted Measurement

LIMIT

According to §15.247(d) & RSS-210 §A8.5, in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted



Test Plot

IEEE 802.11b mode

CH Low

Agilent 13:02:39 Nov 24, 2008

R T


Spurious, b Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 20 dB

4.26 dBm

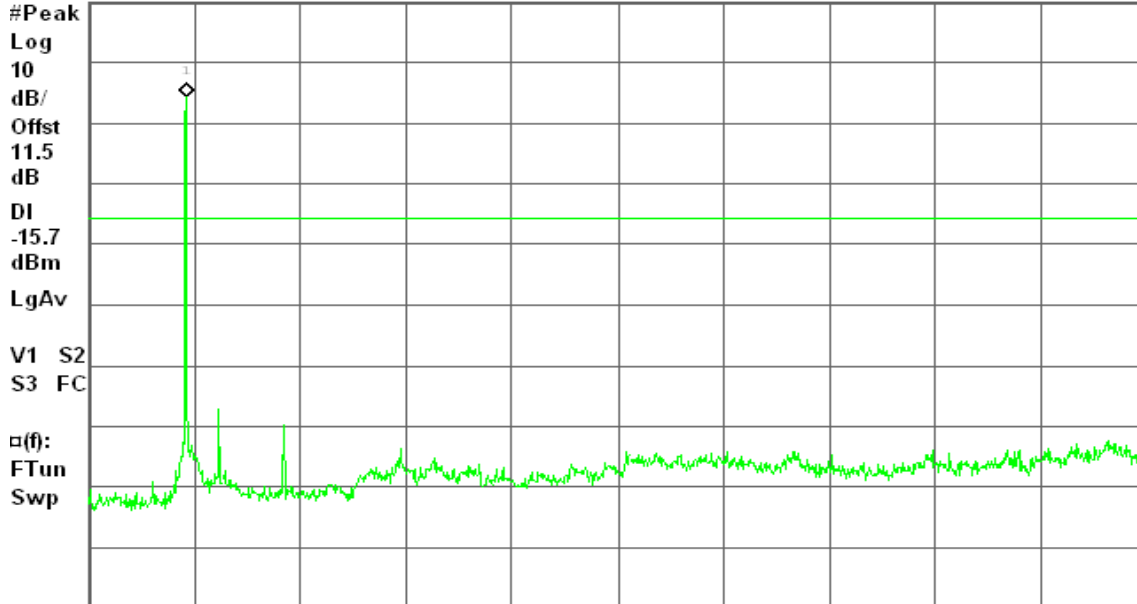

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH Mid

Agilent 13:17:02 Nov 24, 2008

R T


Spurious, b Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

5.53 dBm

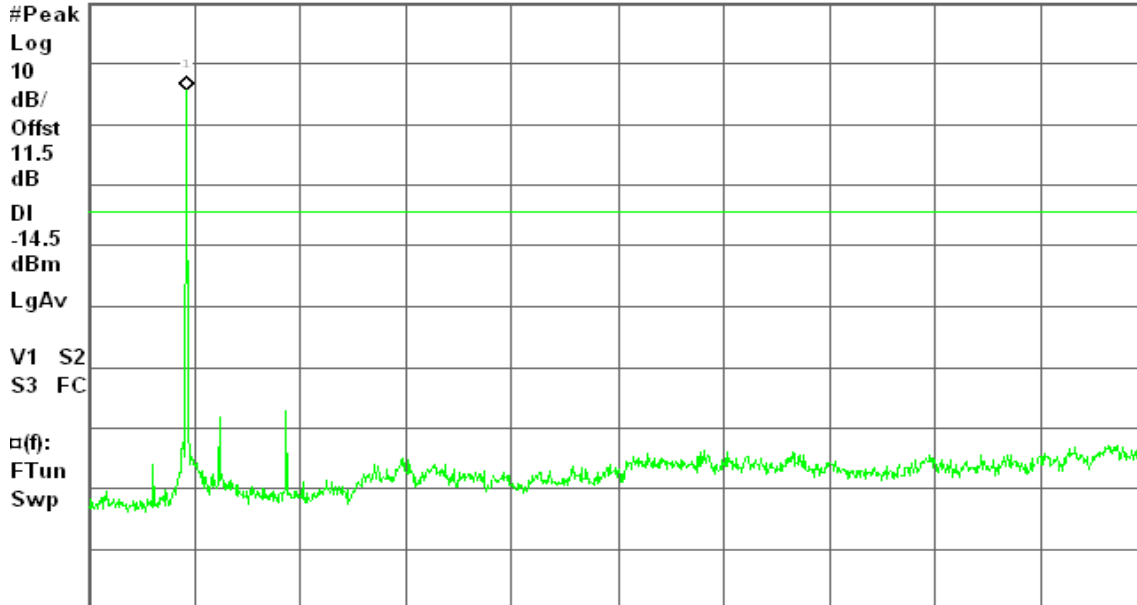

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH High

Agilent 13:22:26 Nov 24, 2008


R T

Spurious, b Mode High Ch.

Mkr1 2.47 GHz
7.87 dBm

Ref 20 dBm

Atten 20 dB

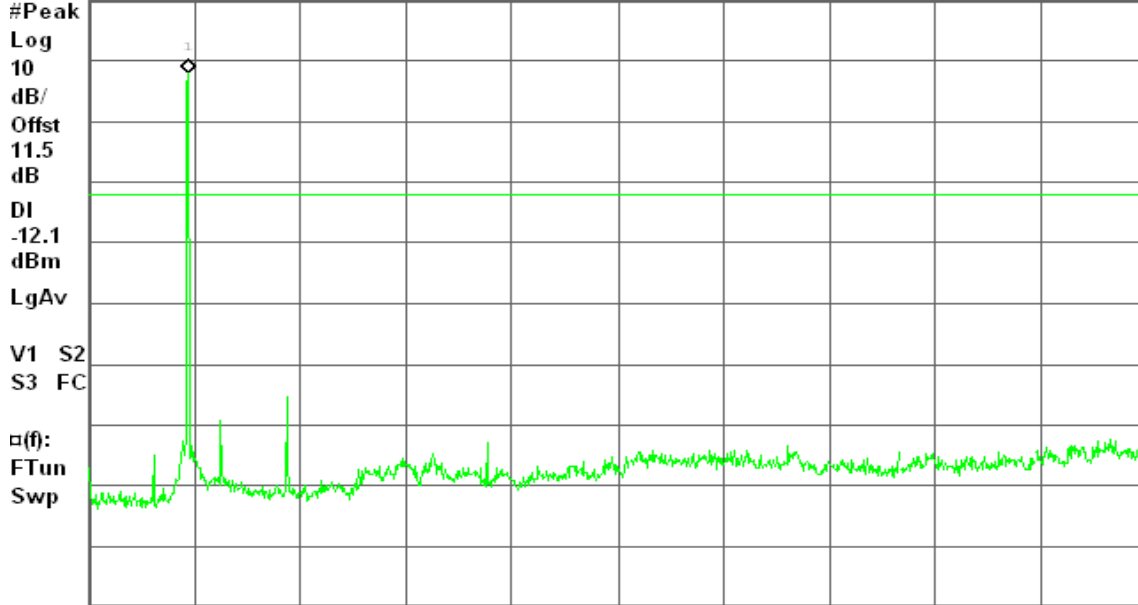

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

IEEE 802.11g mode

CH Low

Agilent 13:14:40 Nov 26, 2008


R T

Spurious, g Mode Low Ch.

Mkr1 2.42 GHz
-0.92 dBm

Ref 20 dBm

Atten 20 dB

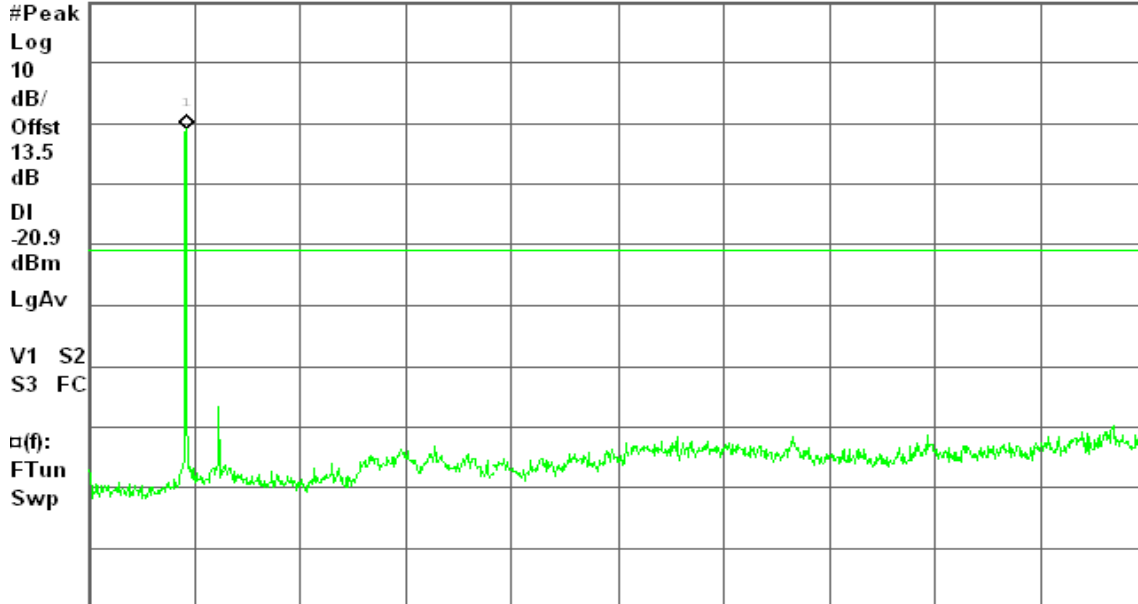

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH Mid

Agilent 13:10:04 Nov 26, 2008

R T


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

3.12 dBm

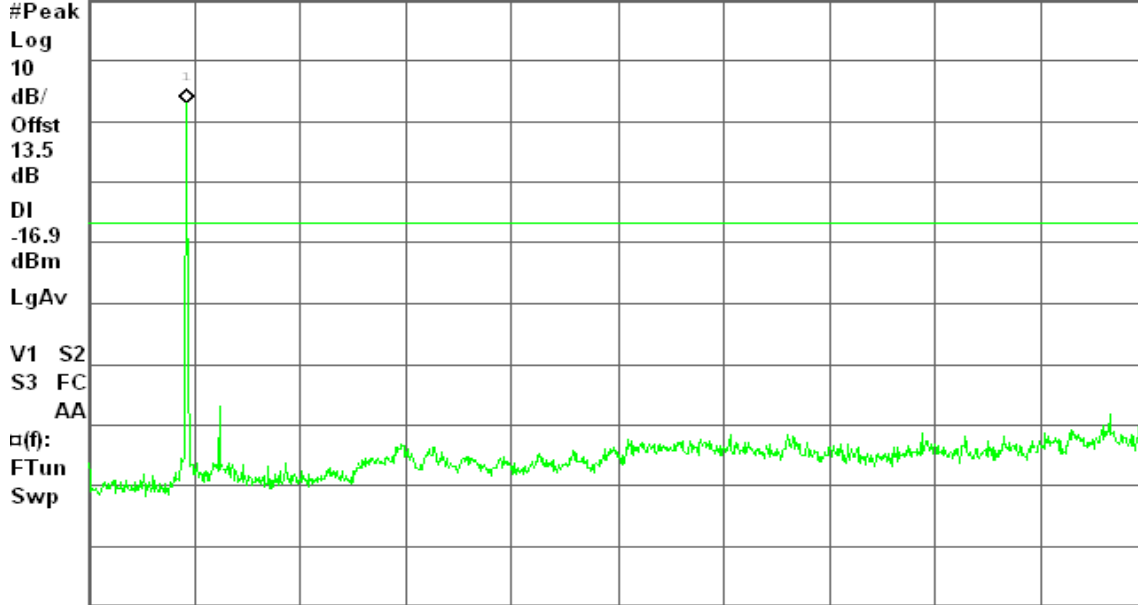

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH High

Agilent 13:05:29 Nov 26, 2008

R T


Spurious, g Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 20 dB

-0.19 dBm

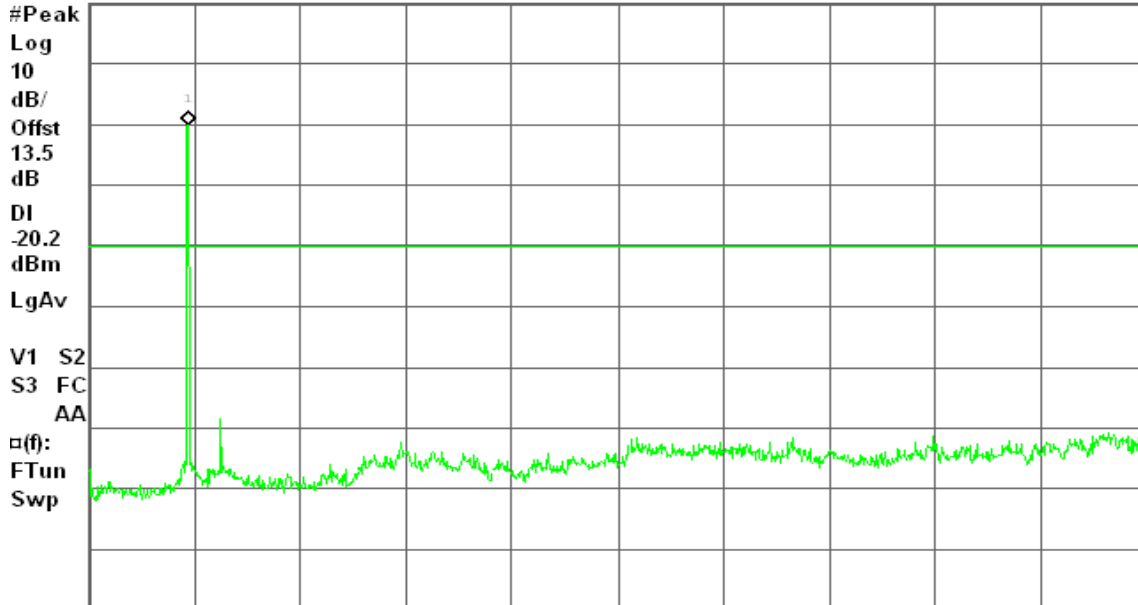

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



draft 802.11n Standard-20 MHz Channel mode

CH Low

Agilent 13:27:09 Nov 26, 2008

R T


Spurious, g Mode Low Ch.

Mkr1 2.39 GHz

Ref 20 dBm

Atten 20 dB

-2.59 dBm

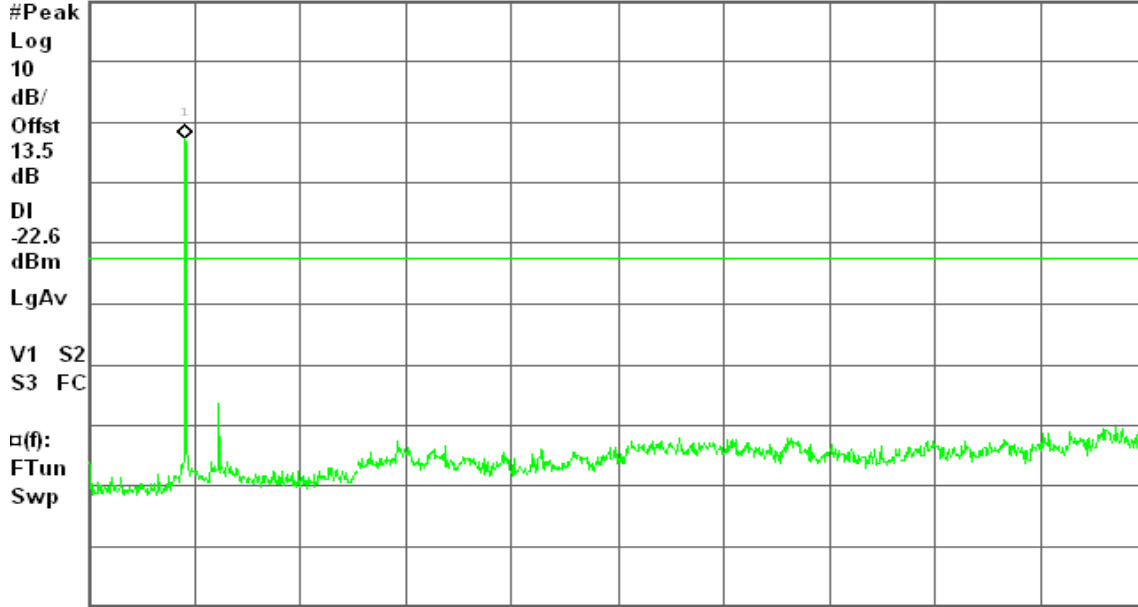

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH Mid

Agilent 13:30:39 Nov 26, 2008

R T


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

2.62 dBm

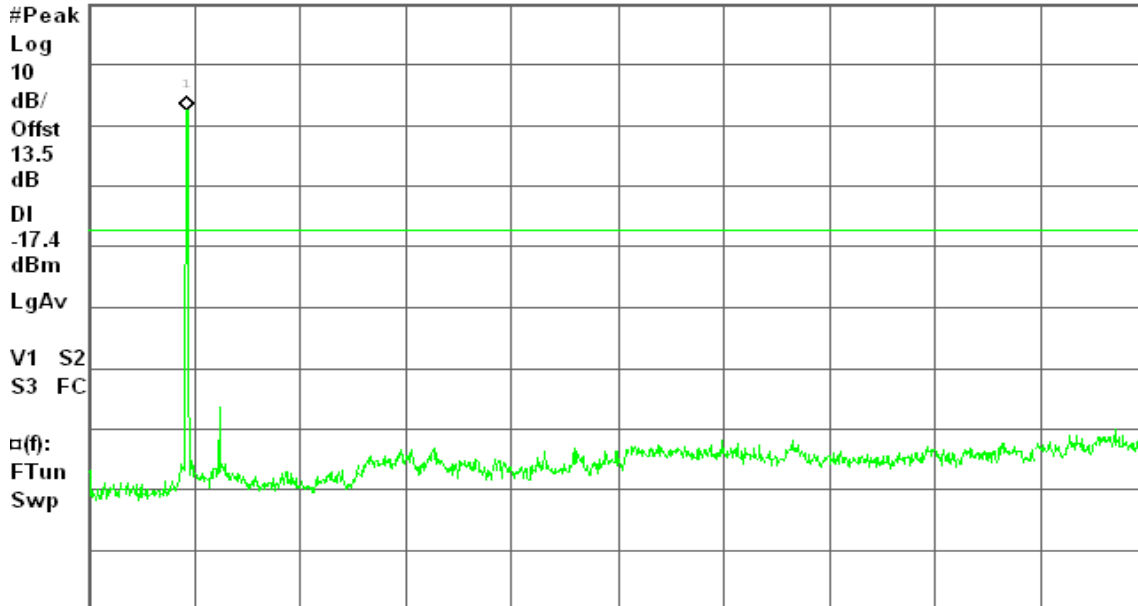

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH High

Agilent 13:34:02 Nov 26, 2008

R T


Spurious, g Mode High Ch.

Mkr1 2.47 GHz

Ref 20 dBm

Atten 20 dB

0.47 dBm

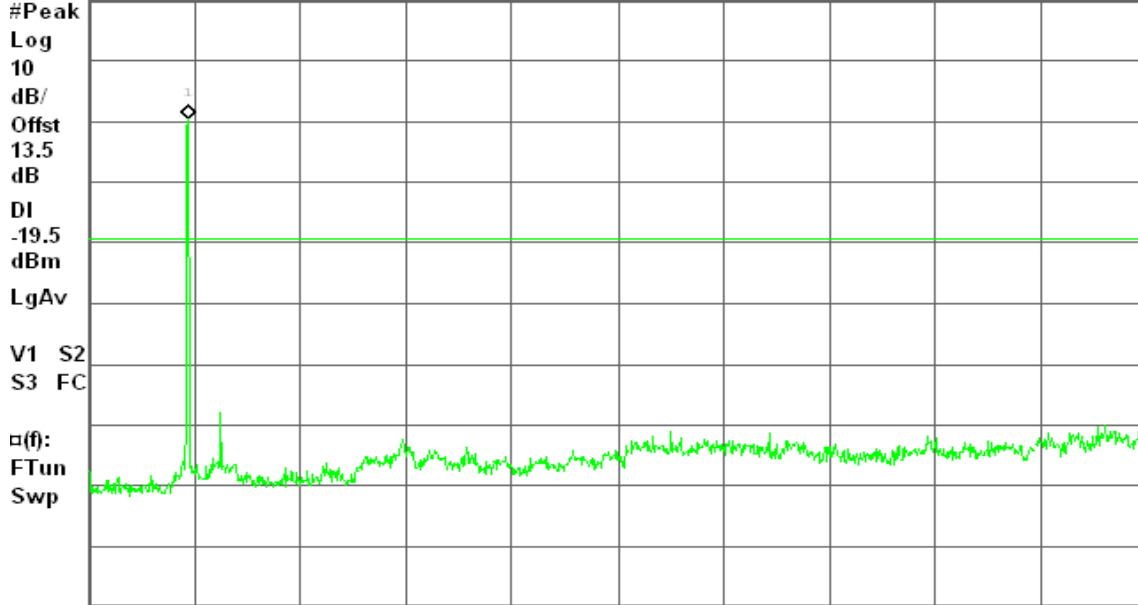

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

draft 802.11n Wide-40 MHz Channel mode

CH Low

Agilent 12:40:29 Nov 26, 2008

R T


Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 27.5 dBm

Atten 30 dB

-6.18 dBm

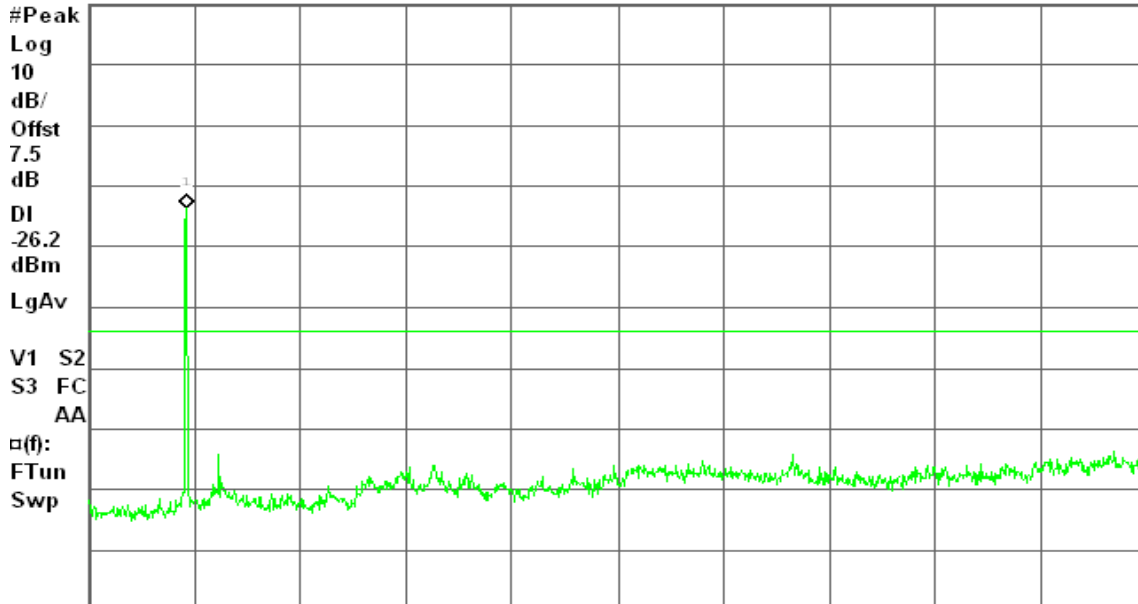

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH Mid

Agilent 12:44:08 Nov 26, 2008

R T


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 27.5 dBm

Atten 30 dB

-4.58 dBm

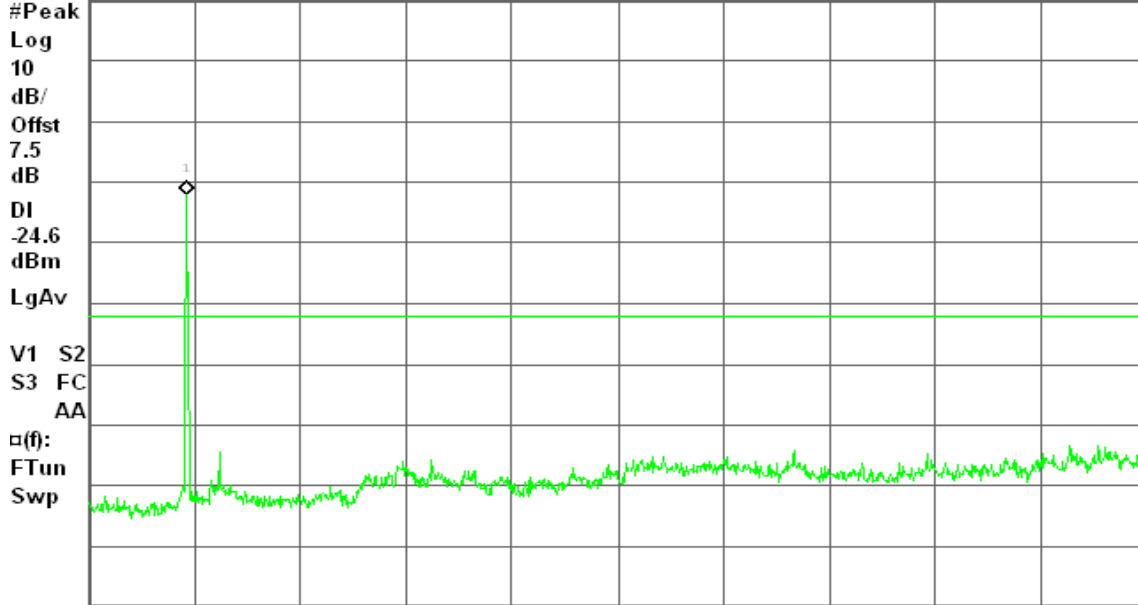

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH High

Agilent 12:48:07 Nov 26, 2008

R T


Spurious, g Mode High Ch.

Mkr1 2.45 GHz

Ref 27.5 dBm

Atten 30 dB

-9.00 dBm

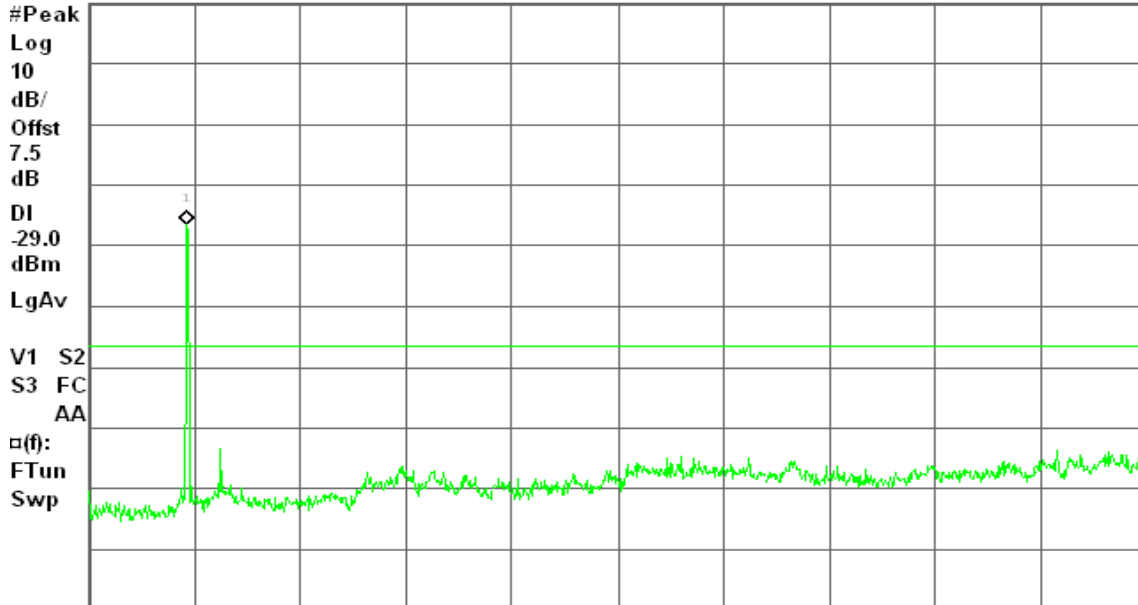

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



RADIATED EMISSIONS

LIMIT

1. According to §15.205, 209(a) & RSS-210 Clause 2.6 (Transmitter) and IC RSS-GEN Clause 6 (Receiver), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength ($\mu\text{V/m}$) | Measurement Distance (m) |
|-----------------|------------------------------------|--------------------------|
| 30-88 | 100* | 3 |
| 88-216 | 150* | 3 |
| 216-960 | 200* | 3 |
| Above 960 | 500 | 3 |


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


| Frequency (MHz) | Field Strength ($\mu\text{V/m}$ at 3-meter) | Field Strength (dB $\mu\text{V/m}$ at 3-meter) |
|-----------------|--|--|
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |

Test Configuration

Below 1 GHz

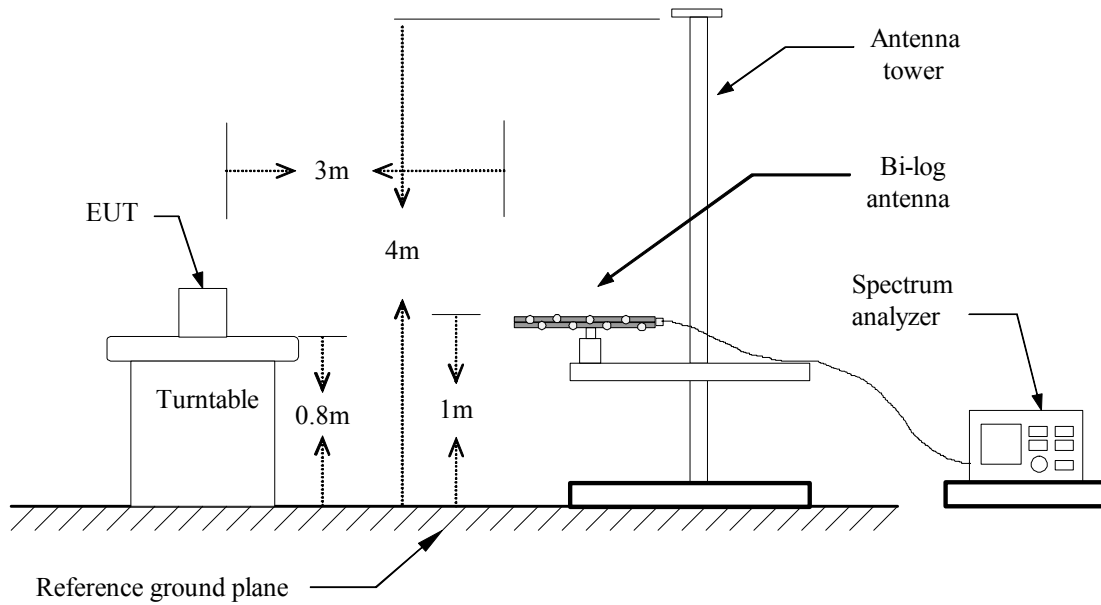

Above 1 GHz

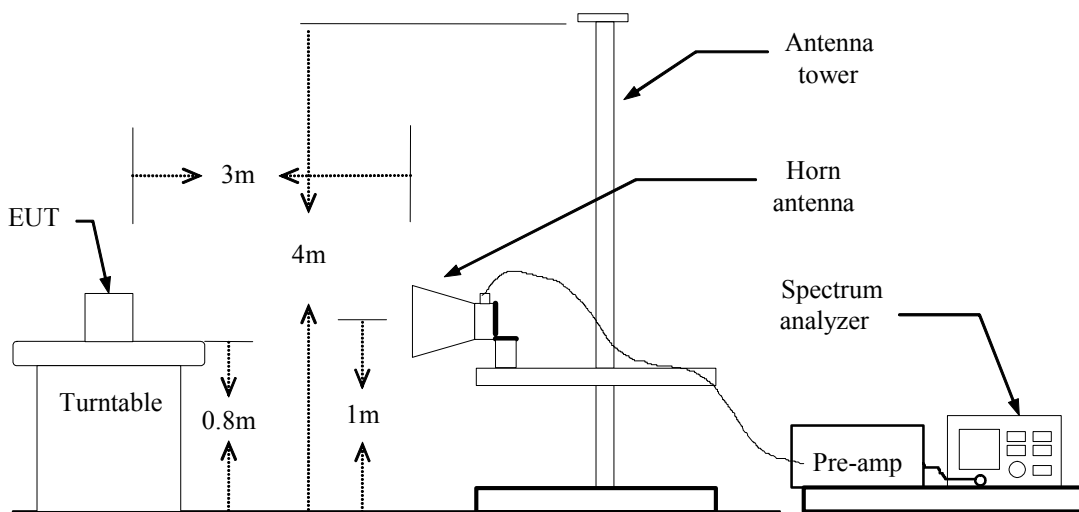



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

**Below 1GHz****Operation Mode:** Normal Link**Test Date:** November 25, 2008**Temperature:** 24°C**Tested by:** Wolf Huang**Humidity:** 50% RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------|
| 36.47 | V | 38.64 | -6.33 | 32.31 | 40.00 | -7.69 | QP |
| 99.52 | V | 44.88 | -13.36 | 31.52 | 43.50 | -11.98 | QP |
| 144.78 | V | 46.35 | -9.19 | 37.15 | 43.50 | -6.35 | Peak |
| 165.80 | V | 44.13 | -10.44 | 33.69 | 43.50 | -9.81 | QP |
| 233.70 | V | 52.47 | -9.92 | 42.54 | 46.00 | -3.46 | Peak |
| 299.98 | V | 42.25 | -8.61 | 33.64 | 46.00 | -12.36 | Peak |
| 799.53 | V | 39.22 | 0.42 | 39.63 | 46.00 | -6.37 | Peak |
| 99.52 | H | 50.33 | -13.36 | 36.97 | 43.50 | -6.53 | Peak |
| 144.78 | H | 50.27 | -9.19 | 41.08 | 43.50 | -2.42 | Peak |
| 165.80 | H | 47.26 | -10.44 | 36.82 | 43.50 | -6.68 | QP |
| 199.75 | H | 44.89 | -8.13 | 36.76 | 43.50 | -6.74 | QP |
| 232.08 | H | 53.63 | -9.94 | 43.69 | 46.00 | -2.31 | Peak |
| 298.37 | H | 49.30 | -8.63 | 40.67 | 46.00 | -5.33 | Peak |

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).



HALF LENGTH BOARD / PIFA ANTENNA

Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low

Test Date: November 26, 2008

Temperature: 21°C

Tested by: Wolf Huang

Humidity: 46 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 5000.00 | V | 50.63 | --- | -0.04 | 50.59 | --- | 74.00 | 54.00 | -3.41 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: November 26, 2008

Temperature: 21°C

Tested by: Wolf Huang

Humidity: 46 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4983.33 | V | 51.39 | --- | -0.00 | 51.39 | --- | 74.00 | 54.00 | -2.61 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** November 26, 2008**Temperature:** 21°C**Tested by:** Wolf Huang**Humidity:** 46 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4991.67 | V | 50.90 | --- | -0.02 | 50.88 | --- | 74.00 | 54.00 | -3.12 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** November 26, 2008**Temperature:** 21°C**Tested by:** Wolf Huang**Humidity:** 46 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4991.67 | V | 51.48 | --- | -0.02 | 51.46 | --- | 74.00 | 54.00 | -2.54 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: November 26, 2008

Temperature: 21°C

Tested by: Wolf Huang

Humidity: 46 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4975.00 | V | 51.84 | --- | 0.02 | 51.85 | --- | 74.00 | 54.00 | -2.15 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH High

Test Date: November 26, 2008

Temperature: 21°C

Tested by: Wolf Huang

Humidity: 46 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4983.33 | V | 51.49 | --- | -0.00 | 51.48 | --- | 74.00 | 54.00 | -2.52 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Low

Test Date: November 26, 2008

Temperature: 21°C

Tested by: Wolf Huang

Humidity: 46 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4991.67 | V | 50.79 | --- | -0.02 | 50.77 | --- | 74.00 | 54.00 | -3.23 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 4975.00 | H | 50.38 | --- | 0.02 | 50.39 | --- | 74.00 | 54.00 | -3.61 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Mid

Test Date: November 26, 2008

Temperature: 21°C

Tested by: Wolf Huang

Humidity: 46 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4983.33 | V | 50.98 | --- | -0.00 | 50.98 | --- | 74.00 | 54.00 | -3.02 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH High

Test Date: November 26, 2008

Temperature: 21°C

Tested by: Wolf Huang

Humidity: 46 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4991.67 | V | 50.69 | --- | -0.02 | 50.68 | --- | 74.00 | 54.00 | -3.32 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Low

Test Date: November 26, 2008

Temperature: 21°C

Tested by: Wolf Huang

Humidity: 46 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4983.33 | V | 51.35 | --- | -0.00 | 51.34 | --- | 74.00 | 54.00 | -2.66 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / draft 802.11n Wide-40 MHz Channel mode / CH Mid**Test Date:** November 26, 2008**Temperature:** 21°C**Tested by:** Wolf Huang**Humidity:** 46 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4983.33 | V | 50.99 | --- | -0.00 | 50.99 | --- | 74.00 | 54.00 | -3.01 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 4991.67 | H | 50.67 | --- | -0.02 | 50.65 | --- | 74.00 | 54.00 | -3.35 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH High

Test Date: November 26, 2008

Temperature: 21°C

Tested by: Wolf Huang

Humidity: 46 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4983.33 | V | 51.49 | --- | -0.00 | 51.49 | --- | 74.00 | 54.00 | -2.51 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**HALF LENGTH BOARD / Dipole ANTENNA****Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** November 25, 2008**Temperature:** 24°C**Tested by:** Wolf Huang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4983.33 | V | 50.69 | --- | -0.00 | 50.68 | --- | 74.00 | 54.00 | -3.32 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 4991.67 | V | 51.81 | --- | -0.02 | 51.79 | --- | 74.00 | 54.00 | -2.21 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH Mid**Test Date:** November 25, 2008**Temperature:** 24°C**Tested by:** Wolf Huang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4991.67 | V | 50.29 | --- | -0.02 | 50.27 | --- | 74.00 | 54.00 | -3.73 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 4983.33 | H | 50.77 | --- | -0.00 | 50.77 | --- | 74.00 | 54.00 | -3.23 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** November 25, 2008**Temperature:** 24°C**Tested by:** Wolf Huang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 4983.33 | H | 51.20 | --- | -0.00 | 51.20 | --- | 74.00 | 54.00 | -2.80 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** November 25, 2008**Temperature:** 24°C**Tested by:** Wolf Huang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: November 25, 2008

Temperature: 24°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 4983.33 | H | 51.60 | --- | -0.00 | 51.60 | --- | 74.00 | 54.00 | -2.40 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH High

Test Date: November 25, 2008

Temperature: 24°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4983.33 | V | 50.40 | --- | -0.00 | 50.40 | --- | 74.00 | 54.00 | -3.60 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Low

Test Date: November 25, 2008

Temperature: 24°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 4991.67 | H | 50.97 | --- | -0.02 | 50.95 | --- | 74.00 | 54.00 | -3.05 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Mid

Test Date: November 25, 2008

Temperature: 24°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4991.67 | V | 50.23 | --- | -0.02 | 50.21 | --- | 74.00 | 54.00 | -3.79 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 4991.67 | H | 51.70 | --- | -0.02 | 51.68 | --- | 74.00 | 54.00 | -2.32 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / draft 802.11n Standard-20 MHz Channel mode / CH High**Test Date:** November 25, 2008**Temperature:** 24°C**Tested by:** Wolf Huang**Humidity:** 50 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4983.33 | V | 50.60 | --- | -0.00 | 50.60 | --- | 74.00 | 54.00 | -3.40 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 5000.00 | H | 51.72 | --- | -0.04 | 51.68 | --- | 74.00 | 54.00 | -2.32 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Low

Test Date: November 25, 2008

Temperature: 24°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 4991.67 | H | 50.20 | --- | -0.02 | 50.18 | --- | 74.00 | 54.00 | -3.82 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Mid

Test Date: November 25, 2008

Temperature: 24°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4983.33 | V | 51.46 | --- | -0.00 | 51.46 | --- | 74.00 | 54.00 | -2.54 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH High

Test Date: November 25, 2008

Temperature: 24°C

Tested by: Wolf Huang

Humidity: 50 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4983.33 | V | 50.25 | --- | -0.00 | 50.25 | --- | 74.00 | 54.00 | -3.75 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



FULL LENGTH BOARD / PIFA ANTENNA

Operation Mode: TX / IEEE 802.11b / CH Low

Test Date: November 23, 2008

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 48 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH High

Test Date: November 23, 2008

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 46 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4925.00 | V | 53.16 | 47.91 | 0.13 | 53.29 | 48.04 | 74.00 | 54.00 | -5.96 | AVG |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Low

Test Date: November 23, 2008

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 48 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: November 23, 2008

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 46 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** November 26, 2008**Temperature:** 21°C**Tested by:** Wolf Huang**Humidity:** 46 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Low

Test Date: November 23, 2008

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 46 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4983.33 | V | 50.24 | --- | -0.00 | 50.23 | --- | 74.00 | 54.00 | -3.77 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Mid

Test Date: November 23, 2008

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 46 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH High

Test Date: November 23, 2008

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 46 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Low

Test Date: November 23, 2008

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 46 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4975.00 | V | 51.08 | --- | 0.02 | 51.09 | --- | 74.00 | 54.00 | -2.91 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Mid

Test Date: November 23, 2008

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 46 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4991.67 | V | 51.06 | --- | -0.02 | 51.04 | --- | 74.00 | 54.00 | -2.96 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH High

Test Date: November 26, 2008

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 46 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4991.67 | V | 51.06 | --- | -0.02 | 51.04 | --- | 74.00 | 54.00 | -2.96 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



FULL LENGTH BOARD / Dipole ANTENNA

Operation Mode: TX / IEEE 802.11b / CH Low

Test Date: November 23, 2008

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 48 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4825.00 | V | 49.62 | --- | 0.35 | 49.97 | --- | 74.00 | 54.00 | -4.03 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: November 23, 2008

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 48 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** November 21, 2008**Temperature:** 24°C**Tested by:** Wolf Huang**Humidity:** 45 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 4991.67 | H | 50.96 | --- | -0.02 | 50.94 | --- | 74.00 | 54.00 | -3.06 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** November 23, 2008**Temperature:** 23°C**Tested by:** Wolf Huang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
- Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
- Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
- Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
- Measurements above show only up to 6 maximum emissions noted, or would be lesser; with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
- Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** November 23, 2008**Temperature:** 23°C**Tested by:** Wolf Huang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** November 23, 2008**Temperature:** 23°C**Tested by:** Wolf Huang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Low

Test Date: November 23, 2008

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 48 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Mid

Test Date: November 23, 2008

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 48 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4875.00 | V | 50.32 | --- | 0.24 | 50.56 | --- | 74.00 | 54.00 | -3.44 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH High

Test Date: November 23, 2008

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 48 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4875.00 | V | 50.32 | --- | 0.24 | 50.56 | --- | 74.00 | 54.00 | -3.44 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Low

Test Date: November 23, 2008

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 48 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4983.33 | V | 50.23 | --- | -0.00 | 50.23 | --- | 74.00 | 54.00 | -3.77 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode / CH Mid

Test Date: November 23, 2008

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 48 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4983.33 | V | 52.00 | --- | -0.00 | 52.00 | --- | 74.00 | 54.00 | -2.00 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Wide-40 MHz Channel mode
/ CH High

Test Date: November 23, 2008

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 48 % RH

Polarity: Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 3266.67 | H | 52.10 | --- | -0.81 | 51.29 | --- | 74.00 | 54.00 | -2.71 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** RX / IEEE 802.11g / CH Mid**Test Date:** November 23, 2008**Temperature:** 23°C**Tested by:** Wolf Huang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|-----------------|-----------------------|--------------------------|--------------------------|------------------------|---------------------------|-----------------------|--------------------------|-------------|--------|
| 4978.33 | V | 50.60 | --- | 0.01 | 50.61 | --- | 74.00 | 54.00 | -3.39 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| 5853.33 | H | 50.00 | --- | 0.94 | 50.94 | --- | 74.00 | 54.00 | -3.06 | Peak |
| N/A | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a) & RSS-Gen §7.2.2, except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency Range (MHz) | Limits (dB μ V) | |
|--------------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56* | 56 to 46* |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** December 8, 2008
Temperature: 22°C **Tested by:** Eddy Chung
Humidity: 45% RH

| Freq. (MHz) | QP Reading (dBuV) | AV Reading (dBuV) | Corr. factor (dB/m) | QP Result (dBuV/m) | AV Result (dBuV/m) | QP Limit (dBuV) | AV Limit (dBuV) | QP Margin (dB) | AV Margin (dB) | Note |
|-------------|-------------------|-------------------|---------------------|--------------------|--------------------|-----------------|-----------------|----------------|----------------|------|
| 0.1500 | 49.10 | 29.80 | 0.20 | 49.30 | 30.00 | 66.00 | 56.00 | -16.70 | -26.00 | L1 |
| 0.1850 | 41.03 | 31.33 | 0.17 | 41.20 | 31.50 | 64.26 | 54.26 | -23.06 | -22.76 | L1 |
| 0.3000 | 38.18 | 32.38 | 0.12 | 38.30 | 32.50 | 60.24 | 50.24 | -21.94 | -17.74 | L1 |
| 0.4100 | 42.63 | 34.43 | 0.07 | 42.70 | 34.50 | 57.65 | 47.65 | -14.95 | -13.15 | L1 |
| 0.4950 | 35.17 | 26.37 | 0.03 | 35.20 | 26.40 | 56.08 | 46.08 | -20.88 | -19.68 | L1 |
| 25.8100 | 29.18 | 23.58 | 0.92 | 30.10 | 24.50 | 60.00 | 50.00 | -29.90 | -25.50 | L1 |
| 0.2050 | 42.65 | 35.95 | 0.15 | 42.80 | 36.10 | 63.41 | 53.41 | -20.61 | -17.31 | L2 |
| 0.3400 | 41.01 | 22.01 | 0.09 | 41.10 | 22.10 | 59.20 | 49.20 | -18.10 | -27.10 | L2 |
| 0.4000 | 43.83 | 36.93 | 0.07 | 43.90 | 37.00 | 57.85 | 47.85 | -13.95 | -10.85 | L2 |
| 0.4900 | 35.97 | 26.57 | 0.03 | 36.00 | 26.60 | 56.17 | 46.17 | -20.17 | -19.57 | L2 |
| 0.6150 | 30.77 | 22.87 | 0.03 | 30.80 | 22.90 | 56.00 | 46.00 | -25.20 | -23.10 | L2 |
| 0.7250 | 33.47 | 22.47 | 0.03 | 33.50 | 22.50 | 56.00 | 46.00 | -22.50 | -23.50 | L2 |


Remark:

1. *Measuring frequencies from 0.15 MHz to 30MHz.*
2. *The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.*
3. *The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;*
4. *L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)*



Test Plots

Conducted emissions (Line 1)

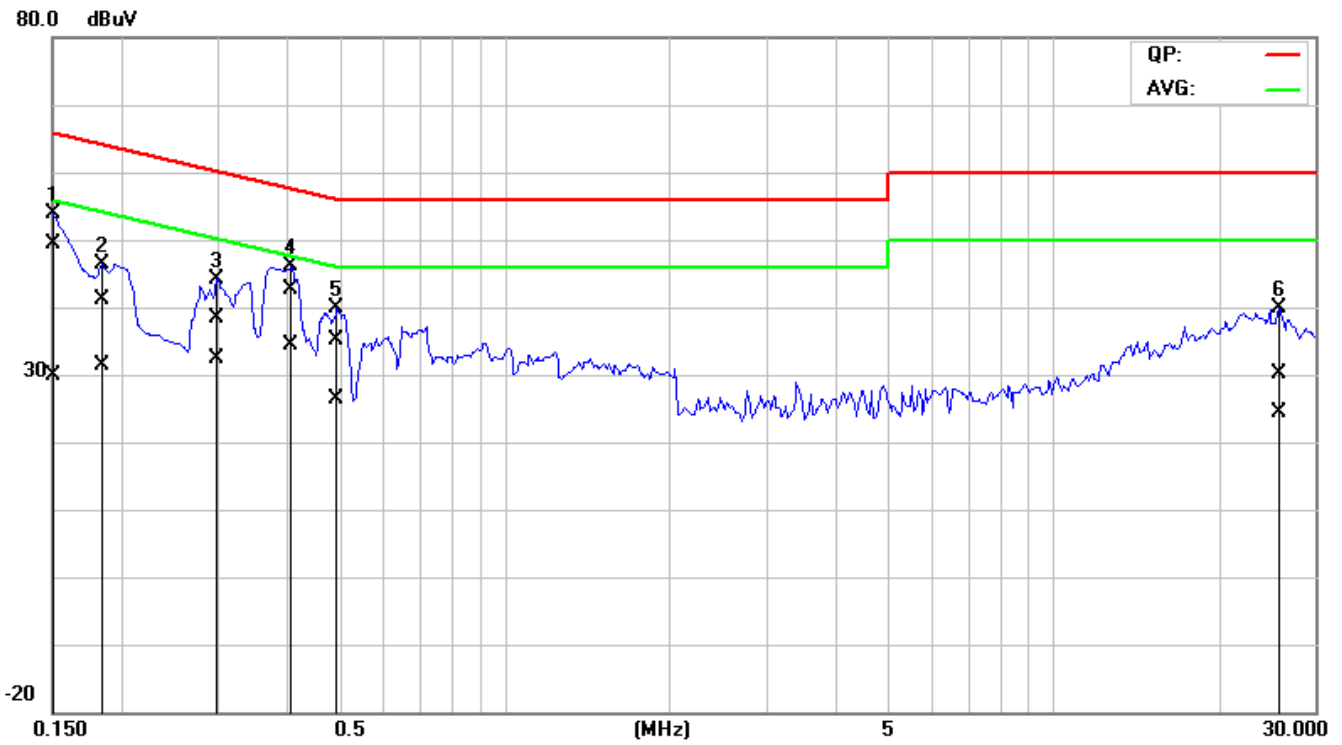

Conducted emissions (Line 2)

