

Test Laboratory: Compliance Certification Services

## Secondary Landscape

DUT: HP; Type: NA; Serial: NA

Communication System: 802.11bgn; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2412$  MHz;  $\sigma = 1.85$  mho/m;  $\epsilon_r = 52.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.48, 6.48, 6.48); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### Lapheld, 802.11b L-ch/Area Scan (10x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.21 mW/g


### Lapheld, 802.11b L-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 23.8 V/m; Power Drift = 0.113 dB

Peak SAR (extrapolated) = 2.35 W/kg

**SAR(1 g) = 0.925 mW/g; SAR(10 g) = 0.403 mW/g**

Maximum value of SAR (measured) = 1.25 mW/g

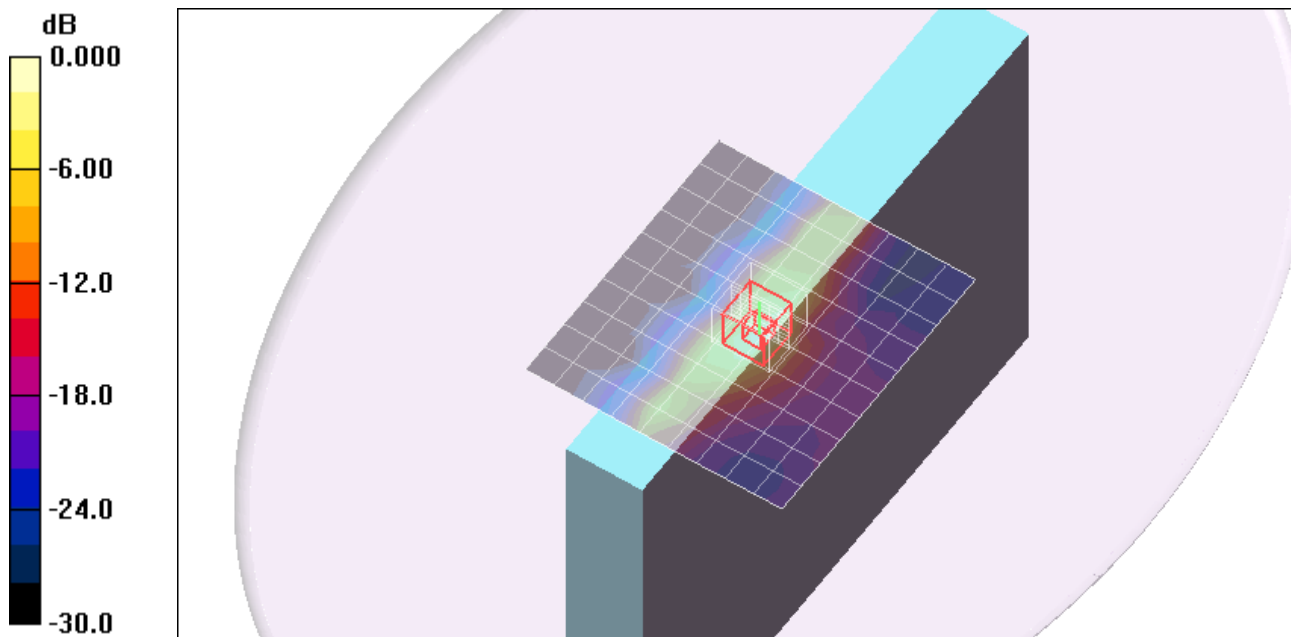

0 dB = 1.25mW/g

Test Laboratory: Compliance Certification Services

## Secondary Landscape

DUT: HP; Type: NA; Serial: NA

Communication System: 802.11bgn; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.88$  mho/m;  $\epsilon_r = 52.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.48, 6.48, 6.48); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### Lapheld, 802.11b M-ch/Area Scan (10x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.25 mW/g


### Lapheld, 802.11b M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 24.2 V/m; Power Drift = 0.332 dB

Peak SAR (extrapolated) = 2.40 W/kg

**SAR(1 g) = 0.968 mW/g; SAR(10 g) = 0.404 mW/g**

Maximum value of SAR (measured) = 1.35 mW/g

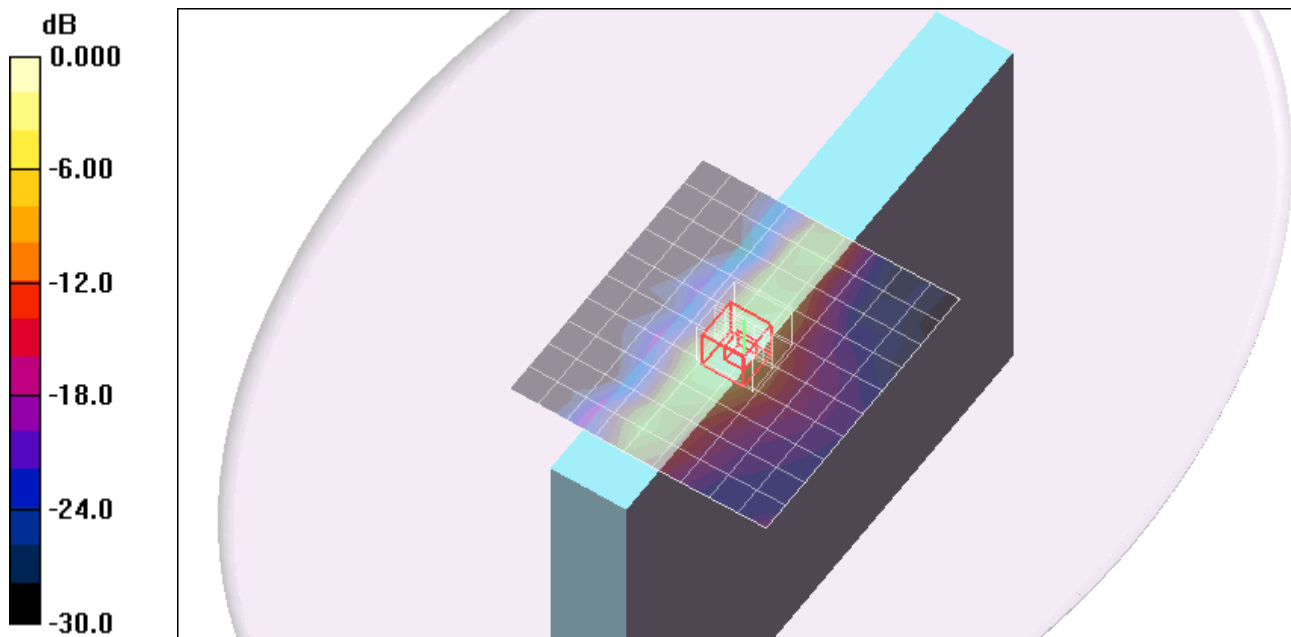

Test Laboratory: Compliance Certification Services

## Secondary Landscape

DUT: HP; Type: NA; Serial: NA

Communication System: 802.11bgn; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2462$  MHz;  $\sigma = 1.89$  mho/m;  $\epsilon_r = 52.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.48, 6.48, 6.48); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Lapheld, 802.11b H-ch/Area Scan (10x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.45 mW/g


**Lapheld, 802.11b H-ch/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 26.7 V/m; Power Drift = 0.117 dB

Peak SAR (extrapolated) = 2.62 W/kg

**SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.446 mW/g**

Maximum value of SAR (measured) = 1.50 mW/g

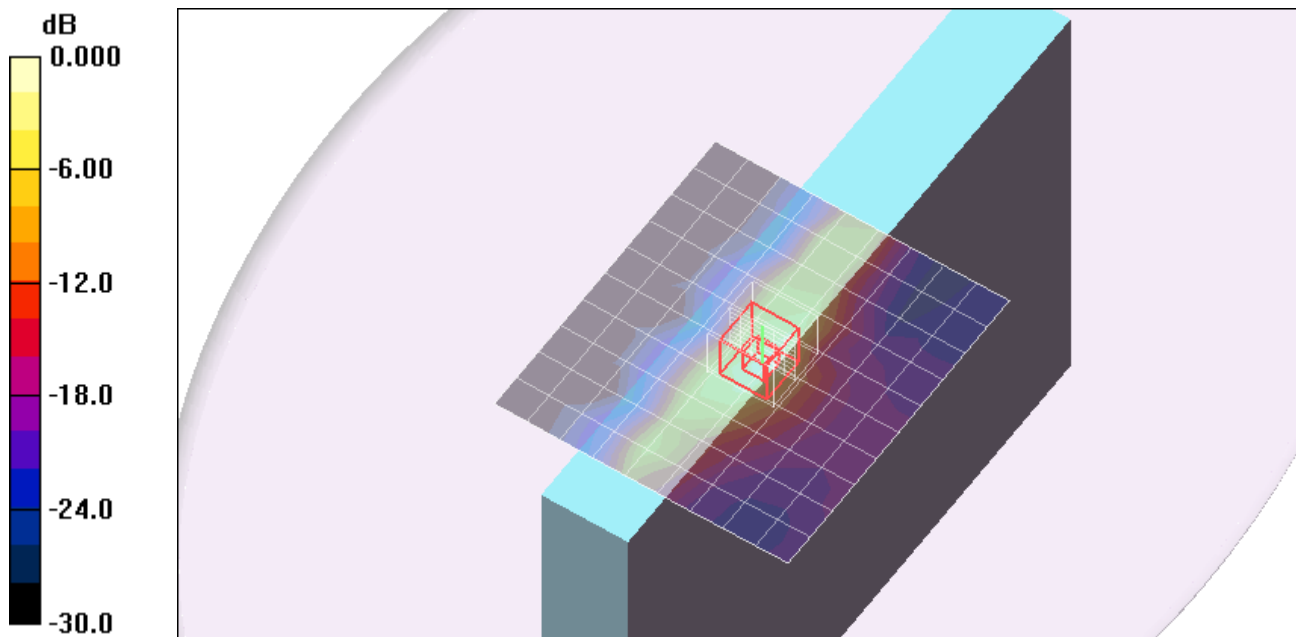

0 dB = 1.50mW/g

Test Laboratory: Compliance Certification Services


## Secondary Landscape

DUT: HP; Type: NA; Serial: NA

Communication System: 802.11bgn; Frequency: 2462 MHz; Duty Cycle: 1:1

**Lapheld, 802.11b H-ch/Z Scan (1x1x29):** Measurement grid: dx=20mm, dy=20mm, dz=3.5mm

Maximum value of SAR (measured) = 1.52 mW/g

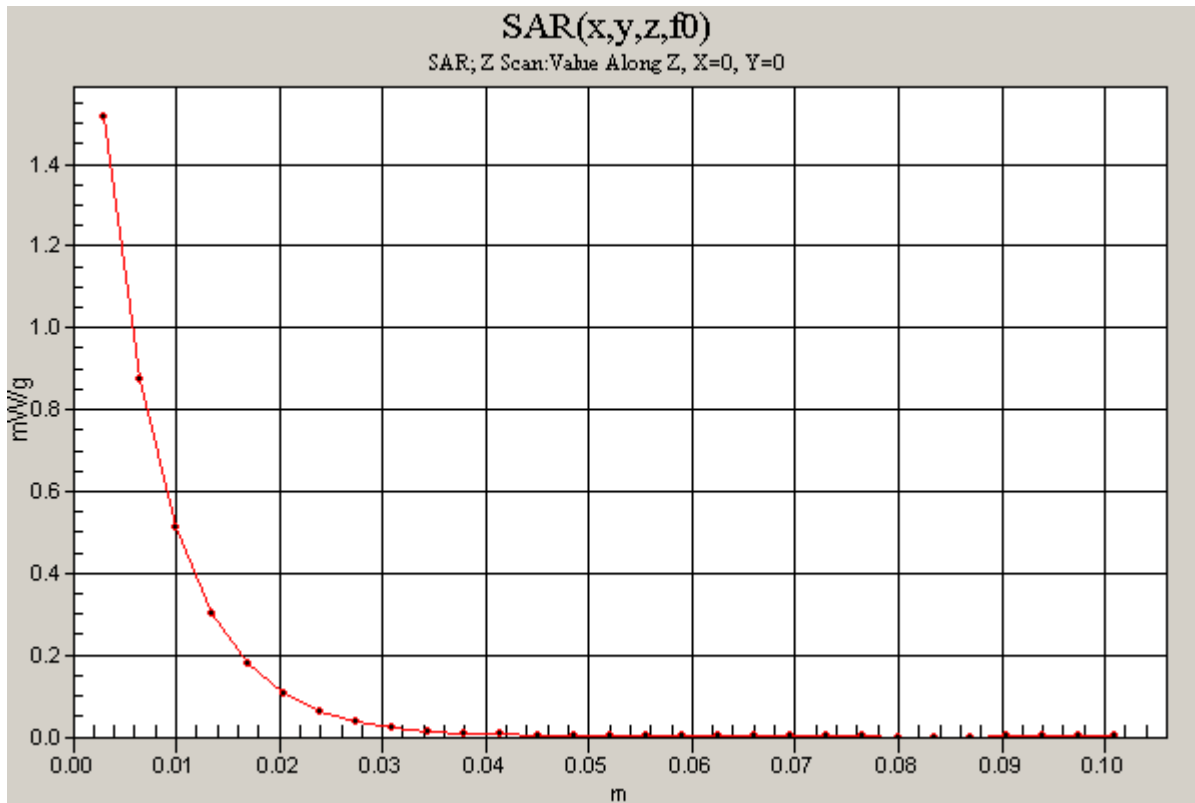

Test Laboratory: Compliance Certification Services

## Secondary Landscape\_Yageo Antenna

DUT: HP; Type: NA; Serial: NA

Communication System: 802.11bgn; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2462$  MHz;  $\sigma = 1.89$  mho/m;  $\epsilon_r = 52.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.48, 6.48, 6.48); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### Lapheld, 802.11b H-ch/Area Scan (10x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.41 mW/g


### Lapheld, 802.11b H-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 24.3 V/m; Power Drift = 0.253 dB

Peak SAR (extrapolated) = 2.38 W/kg

**SAR(1 g) = 0.923 mW/g; SAR(10 g) = 0.427 mW/g**

Maximum value of SAR (measured) = 1.37 mW/g

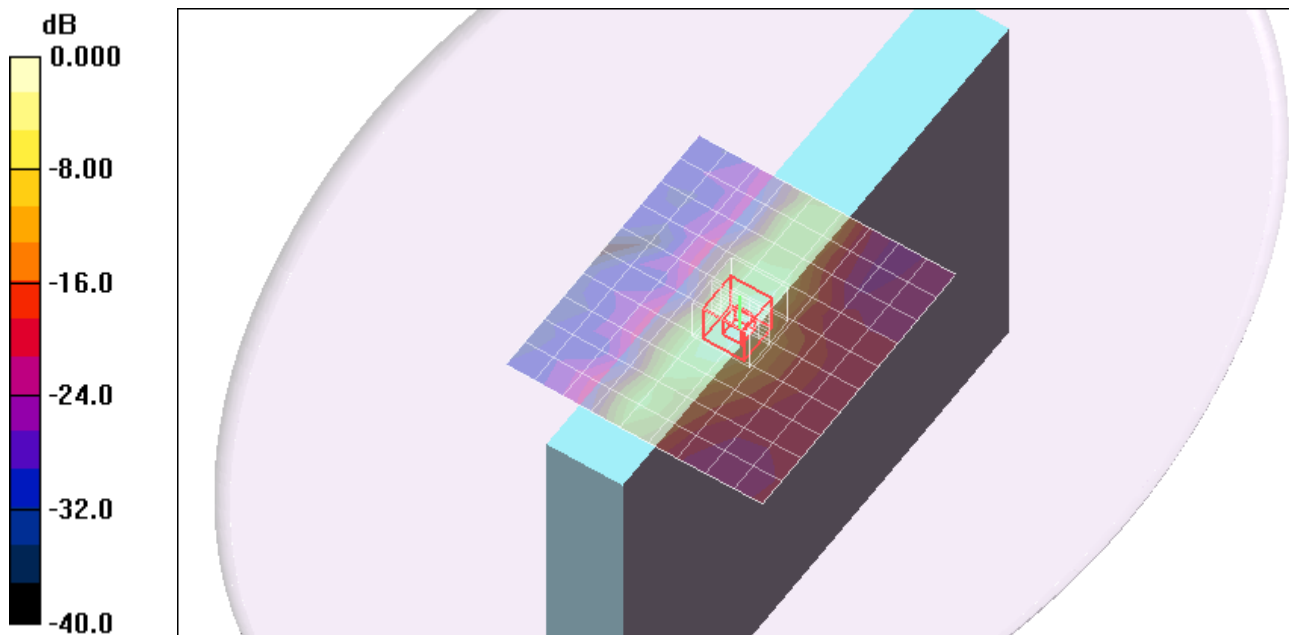

0 dB = 1.37mW/g

Test Laboratory: Compliance Certification Services

### Secondary Landscape

DUT: HP; Type: NA; Serial: NA

Communication System: 802.11bgn; Frequency: 2412 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 2412 \text{ MHz}$ ;  $\sigma = 1.86 \text{ mho/m}$ ;  $\epsilon_r = 52.2$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

- DASY4 Configuration:
- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
  - Probe: EX3DV4 - SN3686; ConvF(6.48, 6.48, 6.48); Calibrated: 3/23/2009
  - Sensor-Surface: 3mm (Mechanical Surface Detection)
  - Electronics: DAE3 Sn427; Calibrated: 10/20/2008
  - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
  - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### Lapheld, 802.11n 20MHz L-ch/Area Scan (10x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.308 mW/g


### Lapheld, 802.11n 20MHz L-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.70 V/m; Power Drift = 1.21 dB

Peak SAR (extrapolated) = 0.944 W/kg

**SAR(1 g) = 0.398 mW/g; SAR(10 g) = 0.163 mW/g**

Maximum value of SAR (measured) = 0.543 mW/g

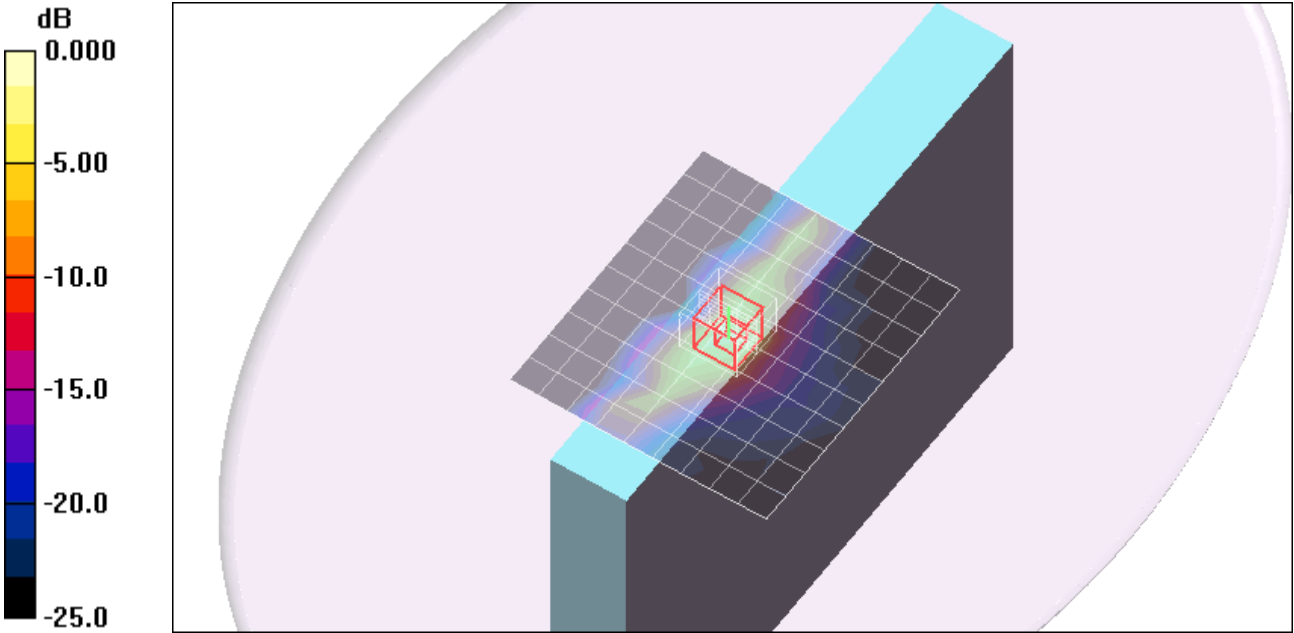

0 dB = 0.543mW/g

Test Laboratory: Compliance Certification Services

## Secondary Landscape

DUT: HP; Type: NA; Serial: NA

Communication System: 802.11bgn; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.89$  mho/m;  $\epsilon_r = 52.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.48, 6.48, 6.48); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Lapheld, 802.11n 20MHz M-ch/Area Scan (10x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.04 mW/g


**Lapheld, 802.11n 20MHz M-ch/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 21.6 V/m; Power Drift = 1.17 dB

Peak SAR (extrapolated) = 2.51 W/kg

**SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.426 mW/g**

Maximum value of SAR (measured) = 1.41 mW/g

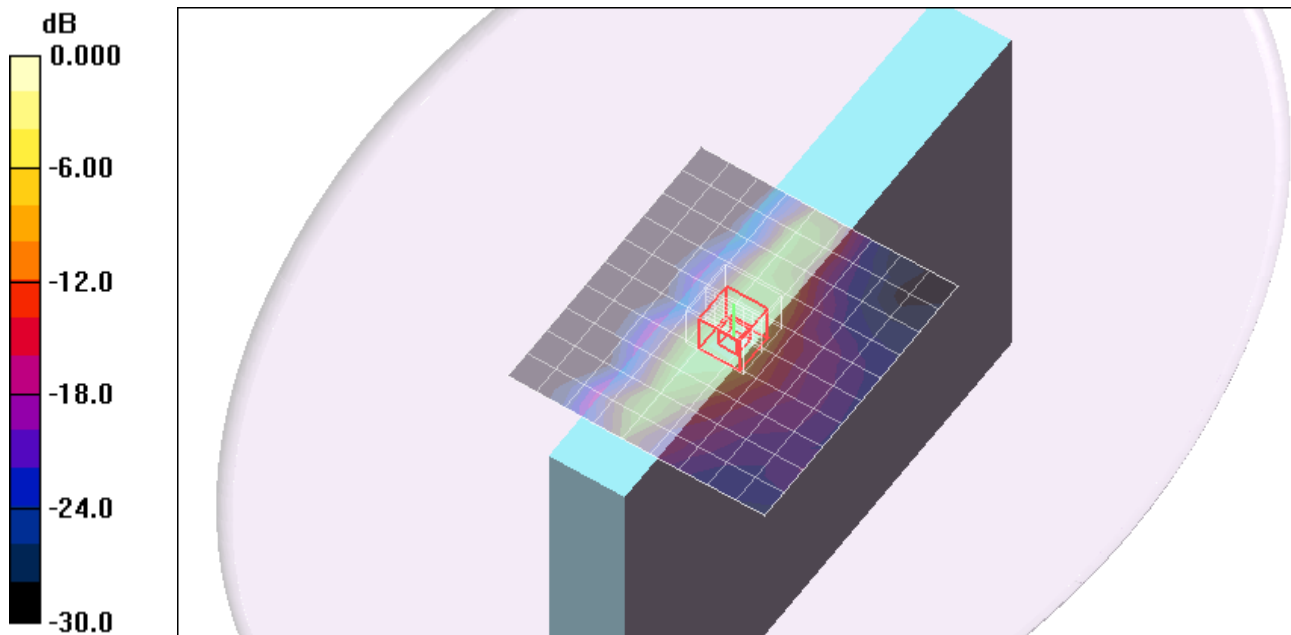

0 dB = 1.41mW/g

Test Laboratory: Compliance Certification Services

## Secondary Landscape

DUT: HP; Type: NA; Serial: NA

Communication System: 802.11bgn; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2462$  MHz;  $\sigma = 1.9$  mho/m;  $\epsilon_r = 52$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.48, 6.48, 6.48); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### Lapheld, 802.11n 20MHz H-ch/Area Scan (10x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.321 mW/g


### Lapheld, 802.11n 20MHz H-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.78 V/m; Power Drift = 2.03 dB

Peak SAR (extrapolated) = 0.982 W/kg

**SAR(1 g) = 0.414 mW/g; SAR(10 g) = 0.169 mW/g**

Maximum value of SAR (measured) = 0.565 mW/g

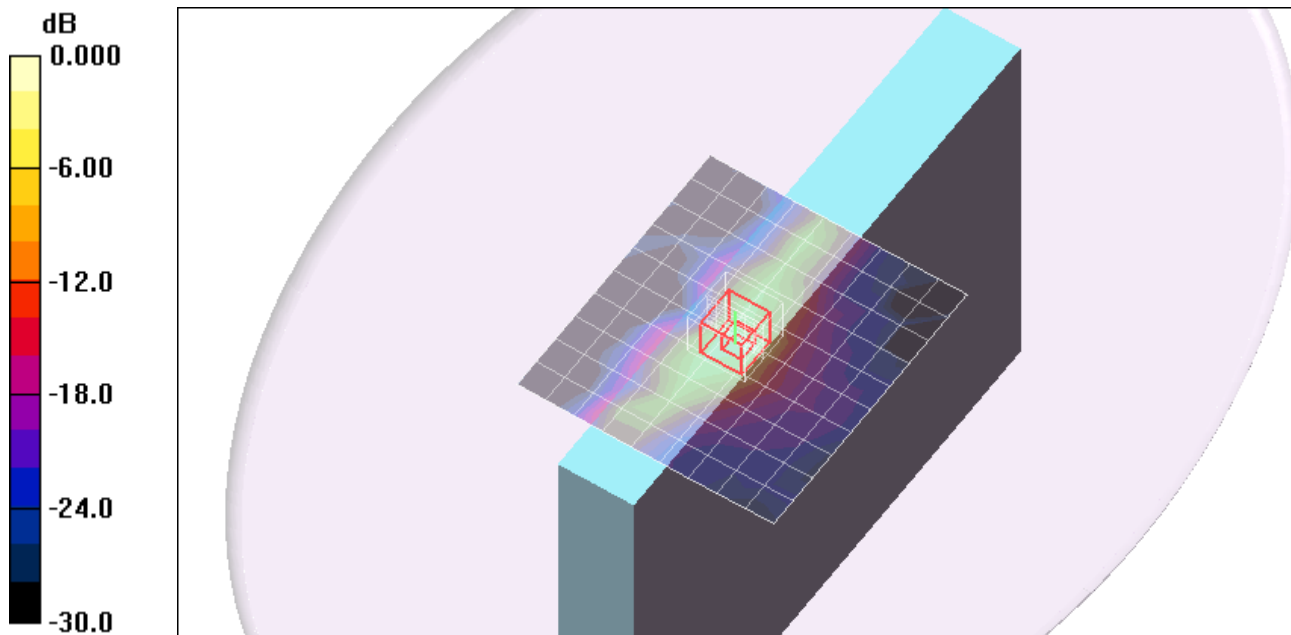

0 dB = 0.565mW/g



Test Laboratory: Compliance Certification Services

## Primary Portrait

DUT: HP; Type: NA; Serial: NA

Communication System: 802.11bg; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.89$  mho/m;  $\epsilon_r = 52.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.48, 6.48, 6.48); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

### Lapheld, 802.11b M-ch/Area Scan (10x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.092 mW/g


### Lapheld, 802.11b M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 4.86 V/m; Power Drift = -0.154 dB

Peak SAR (extrapolated) = 0.287 W/kg

**SAR(1 g) = 0.092 mW/g; SAR(10 g) = 0.044 mW/g**

Maximum value of SAR (measured) = 0.125 mW/g

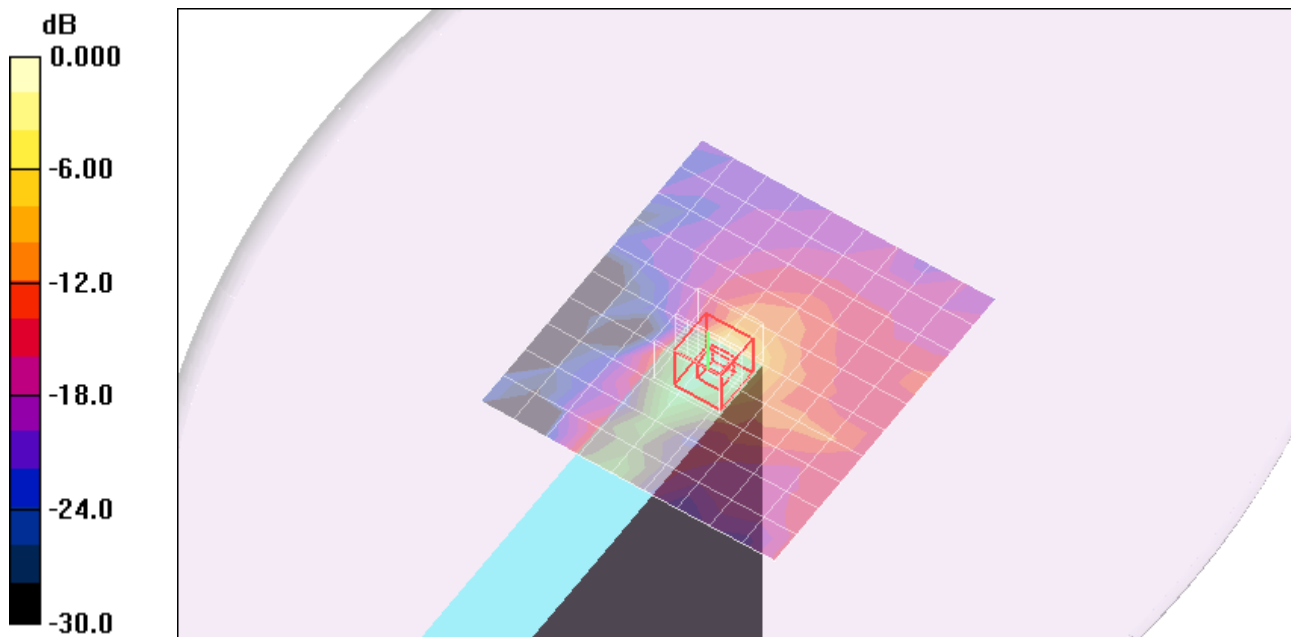

0 dB = 0.125mW/g

Test Laboratory: Compliance Certification Services

## Primary Portrait

DUT: HP; Type: NA; Serial: NA

Communication System: 802.11bg; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.89$  mho/m;  $\epsilon_r = 52.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.48, 6.48, 6.48); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Lapheld, 802.11n 20MHz M-ch/Area Scan (10x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.078 mW/g


**Lapheld, 802.11n 20MHz M-ch/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 4.35 V/m; Power Drift = -0.223 dB

Peak SAR (extrapolated) = 0.225 W/kg

**SAR(1 g) = 0.087 mW/g; SAR(10 g) = 0.036 mW/g**

Maximum value of SAR (measured) = 0.119 mW/g

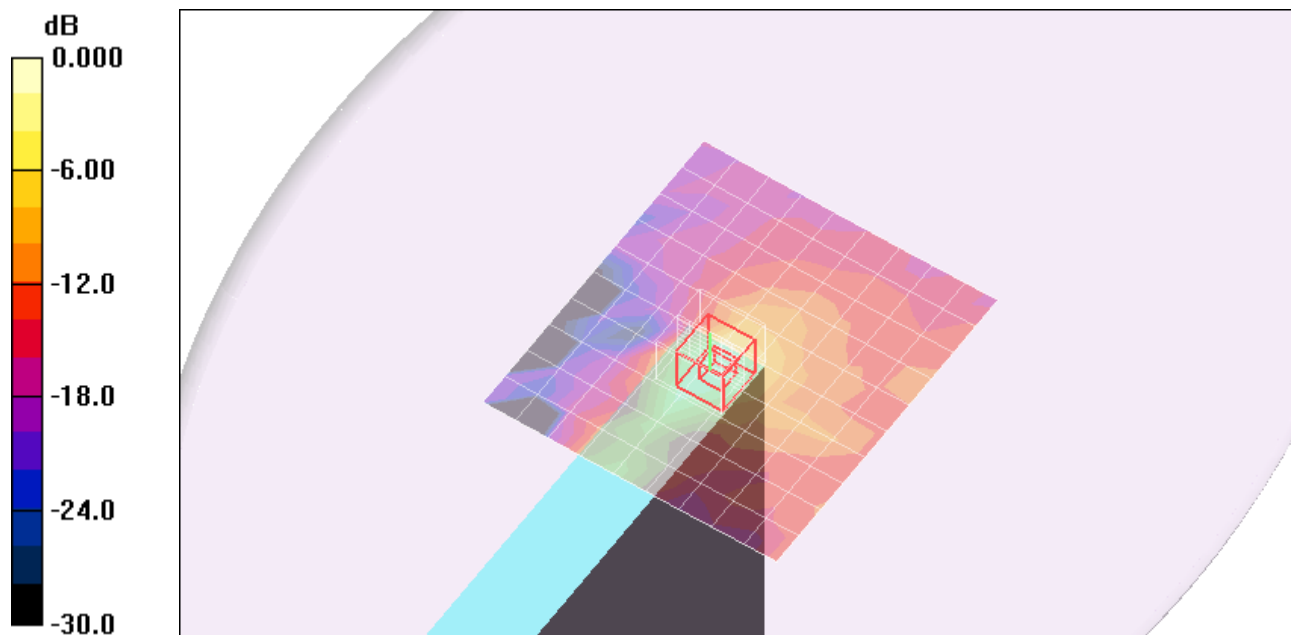

0 dB = 0.119mW/g

Test Laboratory: Compliance Certification Services

## Secondary Portrait

DUT: HP; Type: NA; Serial: NA

Communication System: 802.11bg; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.89$  mho/m;  $\epsilon_r = 52.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.48, 6.48, 6.48); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Lapheld, 802.11b M-ch/Area Scan (10x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.028 mW/g


**Lapheld, 802.11b M-ch/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 3.15 V/m; Power Drift = -1.93 dB

Peak SAR (extrapolated) = 0.069 W/kg

**SAR(1 g) = 0.031 mW/g; SAR(10 g) = 0.013 mW/g**

Maximum value of SAR (measured) = 0.044 mW/g

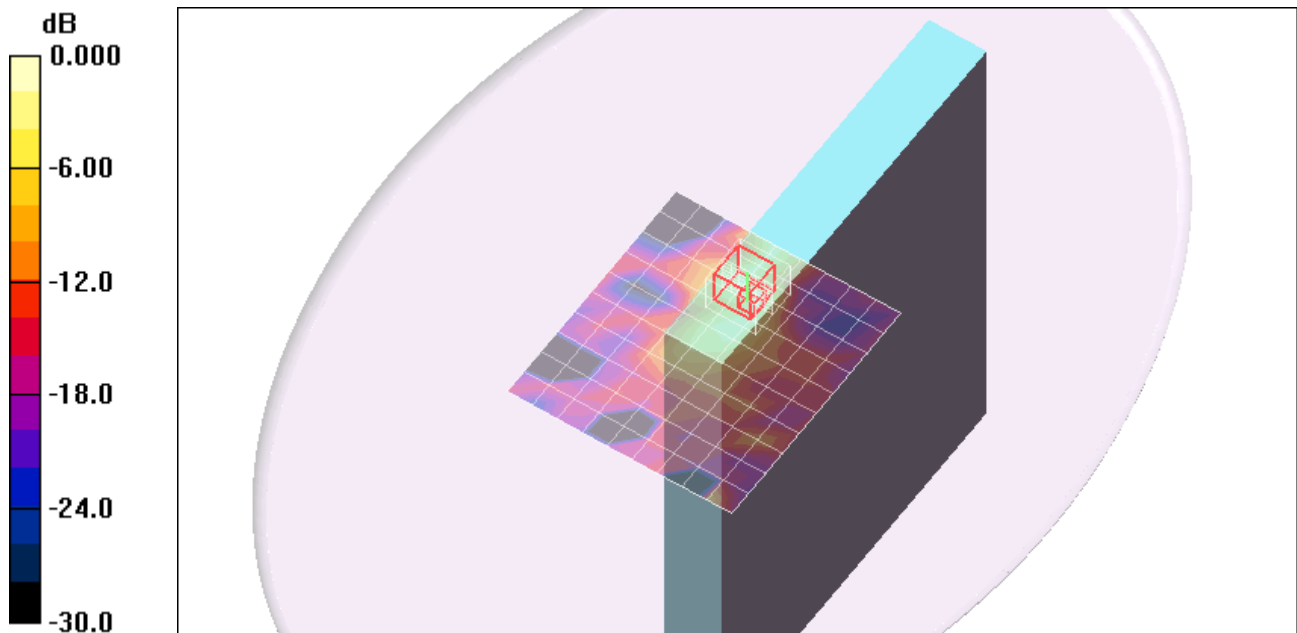

0 dB = 0.044mW/g

Test Laboratory: Compliance Certification Services

## Secondary Portrait

DUT: HP; Type: NA; Serial: NA

Communication System: 802.11bg; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.89$  mho/m;  $\epsilon_r = 52.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.48, 6.48, 6.48); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Lapheld, 802.11n 20MHz M-ch/Area Scan (10x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.025 mW/g


**Lapheld, 802.11n 20MHz M-ch/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 2.41 V/m; Power Drift = 0.573 dB

Peak SAR (extrapolated) = 0.072 W/kg

**SAR(1 g) = 0.029 mW/g; SAR(10 g) = 0.013 mW/g**

Maximum value of SAR (measured) = 0.042 mW/g

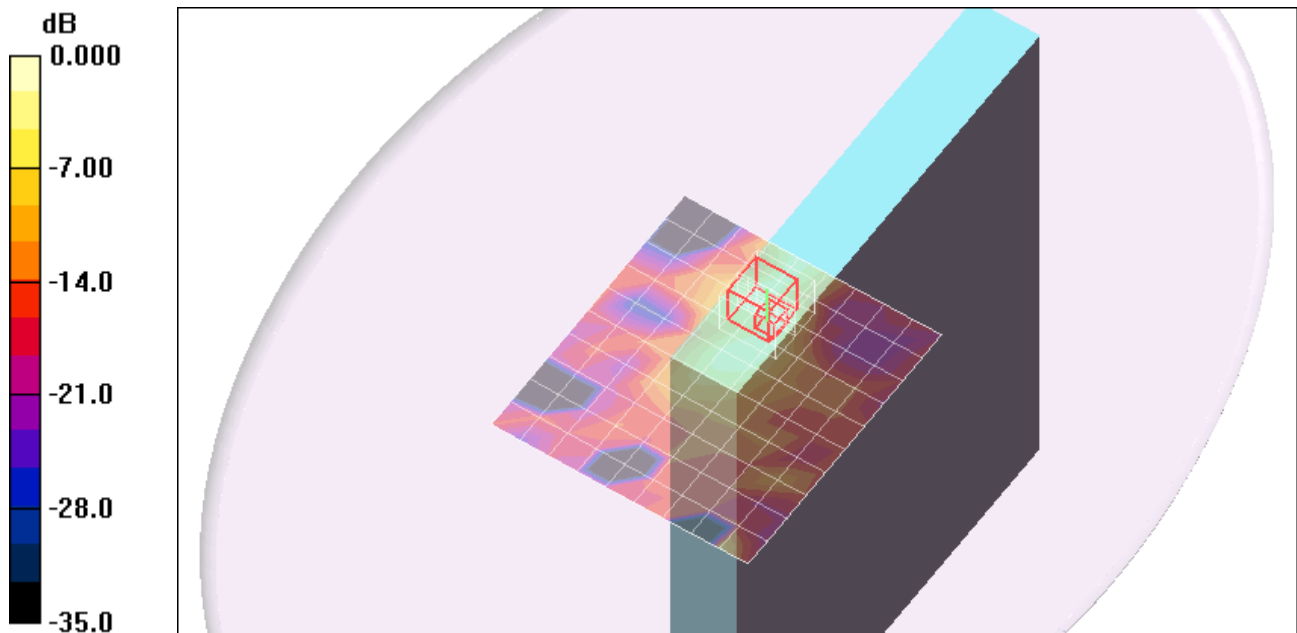

0 dB = 0.042mW/g

Test Laboratory: Compliance Certification Services

# Lapheld

DUT: HP; Type: NA; Serial: NA

Communication System: 802.11bg; Frequency: 2437 MHz;Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.89$  mho/m;  $\epsilon_r = 52.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

- DASY4 Configuration:
- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
  - Probe: EX3DV4 - SN3686; ConvF(6.48, 6.48, 6.48); Calibrated: 3/23/2009
  - Sensor-Surface: 3mm (Mechanical Surface Detection)
  - Electronics: DAE3 Sn427; Calibrated: 10/20/2008
  - Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
  - Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

## Lapheld, 802.11b M-ch/Area Scan (10x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.060 mW/g


## Lapheld, 802.11b M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 5.37 V/m; Power Drift = -0.100 dB

Peak SAR (extrapolated) = 0.170 W/kg

**SAR(1 g) = 0.052 mW/g; SAR(10 g) = 0.028 mW/g**

Maximum value of SAR (measured) = 0.061 mW/g

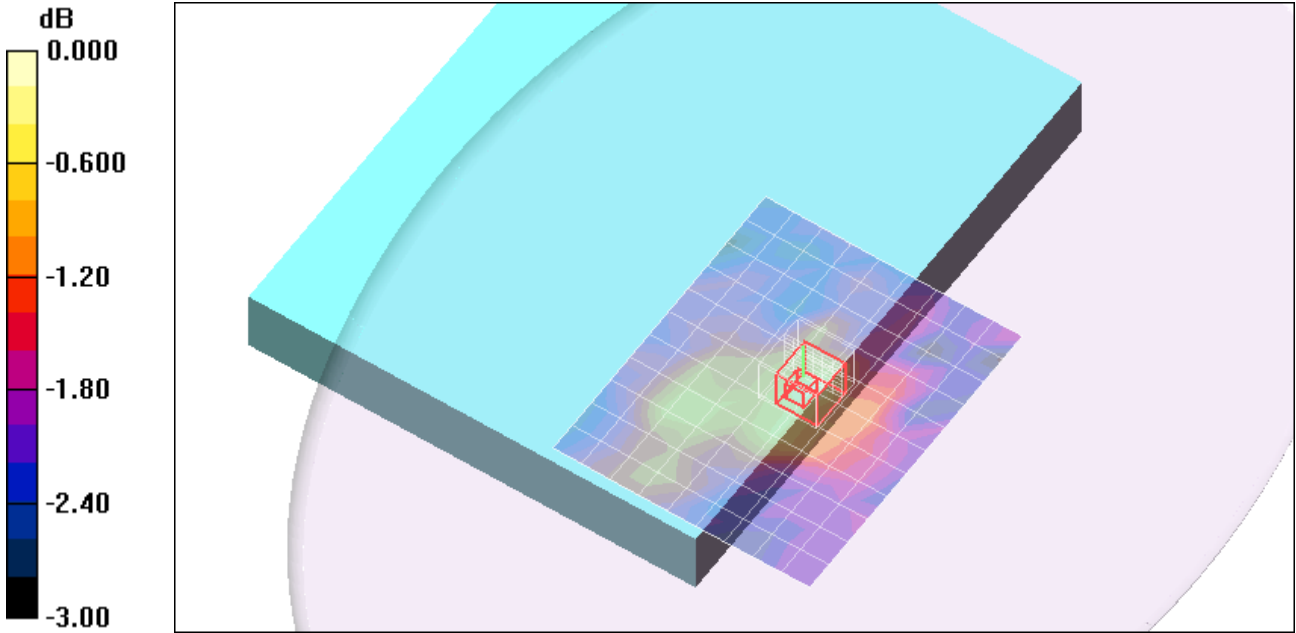

0 dB = 0.061mW/g

Test Laboratory: Compliance Certification Services

# Lapheld

DUT: HP; Type: NA; Serial: NA

Communication System: 802.11bg; Frequency: 2437 MHz;Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.89 \text{ mho/m}$ ;  $\epsilon_r = 52.2$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section

Room Ambient Temperature: 24.0 deg. C; Liquid Temperature: 23.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3686; ConvF(6.48, 6.48, 6.48); Calibrated: 3/23/2009
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 10/20/2008
- Phantom: Flat Phantom ELI4.0; Type: QDOVA001BA; Serial: SN:1003
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

## Lapheld, 802.11n 20MHz M-ch/Area Scan (10x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.055 mW/g


## Lapheld, 802.11n 20MHz M-ch/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 5.23 V/m; Power Drift = 0.387 dB

Peak SAR (extrapolated) = 0.103 W/kg

**SAR(1 g) = 0.055 mW/g; SAR(10 g) = 0.046 mW/g**

Maximum value of SAR (measured) = 0.063 mW/g

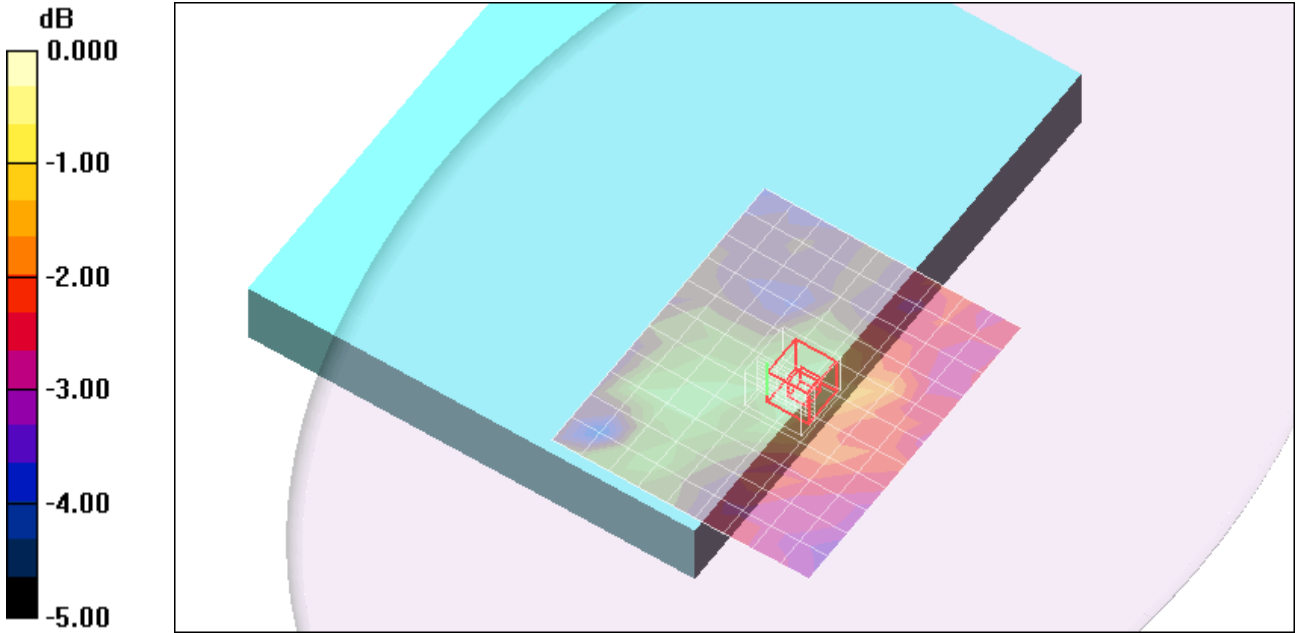

0 dB = 0.063mW/g