



Global Product Certification
EMC-EMF-Safety Approvals

EMC Technologies Pty Ltd

ABN 82 057 105 549
176 Harrick Road
Keilor Park
Victoria Australia 3042

Ph: + 613 9365 1000
Fax: + 613 9331 7455
email: melb@emctech.com.au

SAR Test Report

Report Number: M100861_FCC_AR5B97_SAR_2.4

Test Sample: Portable TABLET Computer
Radio Modules: WLAN Atheros AR5B97 & Bluetooth
CSR BSMAN3
Host PC Model Number: T580/TH550

WLAN FCC ID: PPD-AR5B97-F
WLAN IC: 4104A-AR5B97

Date of Issue: 22nd September 2010

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

CONTENTS

1.0 GENERAL INFORMATION	3
2.0 INTRODUCTION	4
3.0 TEST SAMPLE TECHNICAL INFORMATION	4
3.1 EUT (WLAN) Details.....	4
3.2 EUT (Bluetooth) Details	6
3.3 EUT (Notebook PC) Details.....	6
3.4 Test sample Accessories.....	7
3.4.1 Battery Types.....	7
4.0 TEST SIGNAL, FREQUENCY AND OUTPUT POWER	7
4.1 Battery Status	7
5.0 DETAILS OF TEST LABORATORY	8
5.1 Location	8
5.2 Accreditations	8
5.3 Environmental Factors.....	8
6.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM.....	9
6.1 Probe Positioning System.....	9
6.2 E-Field Probe Type and Performance	9
6.3 System verification.....	9
6.3.1 System verification Results @ 2450MHz.....	9
6.3.2 Deviation from reference system verification values	9
6.3.3 Liquid Depth 15cm.....	10
6.4 Phantom Properties.....	10
6.5 Tissue Material Properties.....	11
6.5.1 Liquid Temperature and Humidity.....	11
6.6 Simulated Tissue Composition Used for SAR Test.....	11
6.7 EUT Holder for Laptops and P 10.1 Phantom.....	11
7.0 SAR MEASUREMENT PROCEDURE USING DASY4.....	12
8.0 MEASUREMENT UNCERTAINTY	13
9.0 EQUIPMENT LIST AND CALIBRATION DETAILS.....	15
10.0 OET BULLETIN 65 – SUPPLEMENT C TEST METHOD.....	16
10.1 Positions	16
10.1.1 “Tablet” Position Definition (0mm spacing).....	16
10.1.2 “Edge On” Position (Portrait or Landscape).....	16
10.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes).....	16
11.0 SAR MEASUREMENT RESULTS	17
11.1 2450MHz SAR Results	17
12.0 COMPLIANCE STATEMENT	18
13.0 MULTIBAND EVALUATION CONSIDERATIONS	19
APPENDIX A1 TEST SAMPLE PHOTOGRAPHS	20
APPENDIX A2 TEST SAMPLE PHOTOGRAPHS	21
APPENDIX A3 TEST SAMPLE PHOTOGRAPHS	22
APPENDIX A4 TEST SETUP PHOTOGRAPHS	23
APPENDIX A5 TEST SAMPLE PHOTOGRAPHS	24
APPENDIX B PLOTS OF THE SAR MEASUREMENTS	28
APPENDIX C CALIBRATION DOCUMENTS.....	47



Accreditation No. 5292

SAR TEST REPORT
Report Number: M100861_FCC_AR5B97_SAR_2.4
WLAN FCC ID: PPD-AR5B97-F WLAN IC: 4104A-AR5B97

1.0 GENERAL INFORMATION

Table 1

Test Sample:	Portable TABLET Computer
Model Name:	T580/TH550
Radio Modules:	WLAN AR5B97 & Bluetooth CSR BSMAN3
Interface Type:	Half Mini-CARD Module
Device Category:	Portable Transmitter
Test Device:	Pre-Production Unit
WLAN FCC ID:	<u>PPD-AR5B97-F</u>
WLAN IC:	<u>4104A-AR5B97</u>
RF exposure Category:	General Population/Uncontrolled
Manufacturer:	Fujitsu Limited
Test Standard/s:	<ol style="list-style-type: none"> 1. Evaluating Compliance with FCC Guidelines For Human Exposure to Radiofrequency Electromagnetic Fields Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01) 2. Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands), RSS-102
Statement Of Compliance:	The Fujitsu TABLET Computer T580/TH550 with Wireless LAN model AR5B97 and Bluetooth module CSR BSMAN3 complied with the FCC General public/uncontrolled RF exposure limits of 1.6mW/g per requirements of 47CFR2.1093(d). It also complied with IC RSS-102 requirements.
Test Dates:	13 th – 14 th September 2010
Test Officer:	 <hr/> Peter Jakubiec
Authorised Signature:	 <hr/> Chris Zombolas Technical Director

This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.



SAR TEST REPORT
Portable TABLET Computer
Model: T580/TH550
Report Number: M100861 _FCC_AR5B97_SAR_2.4

2.0 INTRODUCTION

SAR testing was performed on the Fujitsu TABLET PC, Model: T580/TH550 with Atheros Half Mini-CARD Wireless LAN Module (ATHEROS 802.11 b/g/n), Model: AR5B97 & CSR Bluetooth Module, Model: BSMAN3. The Atheros module is an OEM product. The Half Mini-CARD Wireless LAN (WLAN) was tested in the dedicated host – LIFEBOOK T SERIES, Model T580/TH550. The system tested will be referred to as the EUT throughout this report.

3.0 TEST SAMPLE TECHNICAL INFORMATION

(Information supplied by the client)

3.1 EUT (WLAN) Details

Table 2

Transmitter:	Half Mini-Card Wireless LAN Module
FCC ID:	PPD-AR5B97-F
IC:	4104A-AR5B97
Wireless Module:	HB97 (11b/g/n) 2x2
Model Number:	AR5B97
Manufacturer:	Atheros Communication Inc,
Modulation Type:	DSSS for 802.11b OFDM for 802.11g OFDM for 802.11n
5GHz (802.11a/n)	-
2.4GHz (802.11b/g/n)	CCK, DQPSK, DBPSK, BPSK, QPSK, 16QAM, 64QAM
Maximum Data Rate:	802.11b = 11 Mbps, 802.11g = 54 Mbps 802.11n = 300 Mbps
Frequency Range:	2.412–2.462 GHz for 11b/g/n
Number of Channels:	11 channels for 11b/g/n with 20MHz Bandwidth 7 channels for 11n with 40MHz Bandwidth
Antenna Types:	Nissei Inverted F (1 st , 2 nd) Model: CP492575 Location: Left Top edge of LCD screen(1 st), Right Top edge of LCD screen(2 nd)
Antenna gain:	2.15 dBi (peak)
Power Supply:	3.3 VDC from PCI Express bus



Table 3 Channels and Output power setting

2.4 GHz (802.11b, 802.11g and 802.11n)

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Tx BW (MHz)	Average Power Target (dBm)	Power Control - PCDAC Setting		Average Power Measured (dBm)		
						Gain Control Tx A	Gain Control Tx B	Tx A	Tx B	
802.11b 2.4 GHz	1	2412	1	-	17.02	-	-	-	-	
	2	2417			17.25	-	-	-	-	
	3	2422				-	-	-	-	
	4	2427				-	-	-	-	
	5	2432				-	-	-	-	
	6	2437				-	-	-	-	
	7	2442				-	-	-	-	
	8	2447				-	-	-	-	
	9	2452				-	-	-	-	
	10	2457				-	-	-	-	
	11	2462				-	-	-	-	
	13	2472				16.21	-	-	-	-
						-	-	-	-	
802.11g 2.4 GHz	1	2412	6	-	14.8	-	-	-	-	
	2	2417			17.6	68	67	17.69	17.75	
	3	2422				-	-	-	-	
	4	2427				-	-	-	-	
	5	2432				-	-	-	-	
	6	2437				68	68	17.92	17.78	
	7	2442				-	-	-	-	
	8	2447				-	-	-	-	
	9	2452				-	-	-	-	
	10	2457				-	-	-	-	
	11	2462				67	69	17.70	17.71	
	13	2472				11.94	-	-	-	-
						-	-	-	-	
802.11n 2.4 GHz	1	2412	HT0	20	13.88	-	-	-	-	
	2	2417			17.37	-	-	-	-	
	3	2422				-	-	-	-	
	4	2427				-	-	-	-	
	5	2432				-	-	-	-	
	6	2437				-	-	-	-	
	7	2442				-	-	-	-	
	8	2447				-	-	-	-	
	9	2452				-	-	-	-	
	10	2457				-	-	-	-	
	11	2462				-	-	-	-	
	13	2472				11.32	-	-	-	-
						-	-	-	-	
				40 Wide		12.15	-	-	-	-
	3	2422	15.13			-	-	-	-	
	4	2427				-	-	-	-	
	6	2437				-	-	-	-	
	8	2447				-	-	-	-	
	9	2452	10.1	-	-	-	-			



3.2 EUT (Bluetooth) Details

Table 4

Transmitter:	Bluetooth
FCC ID:	PIWBSMAN
IC:	5255A-BSMAN
Model Number:	BSMAN3
Manufacturer:	CSR
Network Standard:	Bluetooth™ RF Test Specification
Modulation Type:	Frequency Hopping Spread Spectrum (FHSS)
Frequency Range:	2402 MHz to 2480 MHz
Number of Channels:	79
Carrier Spacing:	1.0 MHz
Max. Output Power:	4 dBm
Reference Oscillator:	16 MHz (Built-in)
Power Supply:	3.3 VDC from host.

Table 5 Frequency allocation:

Channel Number	Frequency (MHz)	Bluetooth Utility power setting
1*	2402	Power (Ext, Int) = 0, 56
2	2403	
3	2404	
.	.	
.	.	
39	2440	
40*	2441	
41	2442	
.	.	
.	.	
77	2478	
78	2479	
79*	2480	

*Channels tested

3.3 EUT (Notebook PC) Details

Table 6

Host notebook :	LifeBook T series
Model Name:	T580 / TH550
Serial Number:	Pre-production Sample
Manufacturer:	FUJITSU LIMITED
CPU Type and Speed:	Core i7-620M 1.47GHz
LCD	10.1"HD
Wired LAN:	Realteck RTL8111E: 10 Base-T/100 Base-TX/1000Base-T
Modem:	No
Port Replicator Model:	No
AC Adapter Model:	PXW1931N(Tamura), ADP-60ZH A (Delta)
Voltage:	19V
Current Specs:	3.16A
Watts:	60W



*The model numbers shown T580 and TH550 are for the same product. The T580 is for commercial market (there is Port-Replicator as option). The TH550 is for consumer market (there is no Port-Replicator).

3.4 Test sample Accessories

3.4.1 Battery Types

One type of Fujitsu Lithium Ion battery is used to power the EUT.

Table 7 Battery Details

Battery #1		Battery #2	
Product No.	FPCBP219	Product No.	FPCBP219
V/mAh	10.8V/5800mAh	V/mAh	10.8V/5800mAh
Serial No.	01A-Z100702001792Z	Serial No.	01A-Z091026000648Z

4.0 TEST SIGNAL, FREQUENCY AND OUTPUT POWER

ATHEROS's ART test tool was used to configure the WLAN for testing. The EUT WLAN had a total of 11 channels within the 2412 to 2462 MHz frequency band. In the frequency range 2412 MHz to 2462 MHz the EUT operates in 2 modes, OFDM and DSSS. For the SAR measurements the EUT was operating in continuous transmit mode using programming codes supplied by Fujitsu.

The Bluetooth module operates over 79 channels within the frequency range 2402 to 2480 MHz. It is possible for the Bluetooth module to operate simultaneously with the WLAN module (co-transmission). However, the standalone SAR measurement for Bluetooth module was not required (See Section 13 Multiband Evaluation Considerations).

The WLAN modules can be configured in a number of different data rates. It was found that the highest source based time averaged power was measured when using the lowest data rates available in each mode. This lowest data rate corresponds to 6Mbps in OFDM mode and 1Mbps in DSSS mode.

The frequency span of the 2450 MHz range Band was more than 10MHz consequently; the SAR levels of the test sample were measured for lowest, centre and highest channels in the applicable modes. There were no wires or other connections to the EUT during the SAR measurements.

The Transmitter power was set to be equal or higher than power specified by the manufacturer.

Table 8 Frequency and Conducted Power Results Bluetooth

Channel	Channel Frequency MHz	*Data Rate (Mbps)	Maximum Conducted Output Power Measured (dBm)
Channel 40	2441	N/A	3.9

4.1 Battery Status

The EUT battery was fully charged prior to commencement of measurements. Each SAR test was completed within 30 minutes. The battery condition was monitored by measuring the RF field at a defined position inside the phantom before the commencement of each test and again after the completion of the test. It was not possible to perform conducted power measurements at the output of the EUT, at the beginning and end of each scan due to lack of a suitable antenna port. The uncertainty associated with the power drift was less than 12% and was assessed in the uncertainty budget.



5.0 DETAILS OF TEST LABORATORY

5.1 Location

EMC Technologies Pty Ltd
176 Harrick Road
Keilor Park, (Melbourne) Victoria
Australia 3042

Telephone: +61 3 9365 1000
Facsimile: +61 3 9331 7455
email: melb@emctech.com.au
website: www.emctech.com.au

5.2 Accreditations

EMC Technologies Pty. Ltd. is accredited by the National Association of Testing Authorities, Australia (NATA).
NATA Accredited Laboratory Number: 5292

EMC Technologies Pty Ltd is NATA accredited for the following standards:

Table 9

AS/NZS 2772.1:	RF and microwave radiation hazard measurement
ACMA:	Radio communications (Electromagnetic Radiation - Human Exposure) Standard 2003 + Amdt (No. 1):2007
FCC:	Guidelines for Human Exposure to RF Electromagnetic Field OET65C 01/01
EN 50360: 2001	Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)
EN 62209-1:2006	Human Exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models instrumentation and procedures. Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (300 MHz to 3 GHz)
*EN62209-2:2010	Human Exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models instrumentation and procedures Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)
IEEE 1528: 2003	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Measurement Techniques.

*NATA accreditation pending.

Refer to NATA website www.nata.asn.au for the full scope of accreditation.

5.3 Environmental Factors

The measurements were performed in a shielded room with no background RF signals. The temperature in the laboratory was controlled to within $21 \pm 1^\circ\text{C}$, the humidity was in the range 38 % to 43%. The liquid parameters are measured daily prior to the commencement of each test. Tests were performed to check that reflections within the environment did not influence the SAR measurements. The noise floor of the DASY4 SAR measurement system using the SN1380 probe was less than $5\mu\text{V}$ in both air and liquid mediums.



6.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM

Table 10

Applicable Head Configurations	: None
Applicable Body Configurations	: Tablet Position : Edge On Position

6.1 Probe Positioning System

The measurements were performed with the near-field scanning system **DASY4 V4.7 Build 80** from Schmid & Partner Engineering AG (SPEAG). The DASY4 fully complies with the OET65 C (01-01), IEEE 1528, EN62209-1 and EN62209-2 SAR measurement requirements.

6.2 E-Field Probe Type and Performance

The SAR measurements were conducted with SPEAG dosimetric probe ET3DV6 Serial: 1380 (2.45 GHz). Please refer to appendix C for detailed information.

6.3 System verification

6.3.1 System verification Results @ 2450MHz

The following tables lists the dielectric properties of the tissue simulating liquid measured prior to SAR system verification. The results of the system verification are listed in columns 4 and 5. The forward power into the reference dipole for SAR system verification was adjusted to 250 mW.

Table 11 System verification Results (Dipole: SPEAG D2450V2 SN: 724)

1. Verification Date	2. ϵ_r (measured)	3. σ (mho/m) (measured)	4. Measured SAR 1g (mW/g)	5. Measured SAR 10g (mW/g)
13 th Sept. 2010	39.8	1.82	14.2	6.65
14 th Sept. 2010	39.9	1.79	13.7	6.40

6.3.2 Deviation from reference system verification values

The reference SAR values are derived using a reference dipole and flat section of the SAM phantom suitable for a centre frequency of 2450MHz. These reference SAR values are obtained from the IEEE Std 1528-2003 and are normalized to 1W.

The SPEAG calibration reference SAR value is the SAR system verification result obtained in a specific dielectric liquid using the validation dipole (D2450V2) during calibration. The measured one-gram SAR should be within 10% of the expected target reference values shown in table below (2450MHz) below.

Table 12 Deviation from reference system verification values @ 2450MHz

Frequency and Date	Measured SAR 1g (mW/g)	Measured SAR 1g (Normalized to 1W)	SPEAG Calibration reference SAR Value 1g (mW/g)	Deviation From SPEAG Reference 1g (%)	IEEE Std 1528 reference SAR value 1g (mW/g)	Deviation From IEEE 1g (%)
2450MHz 13 th Sept. 2010	14.2	56.80	52	9.23	52.4	8.40
2450MHz 14 th Sept. 2010	13.7	54.80	52	5.38	52.4	4.58

NOTE: All reference system verification values are referenced to 1W input power.



6.3.3 Liquid Depth 15cm

During the SAR measurement process the liquid level was maintained to a level of 15cm with a tolerance of 0.5cm.

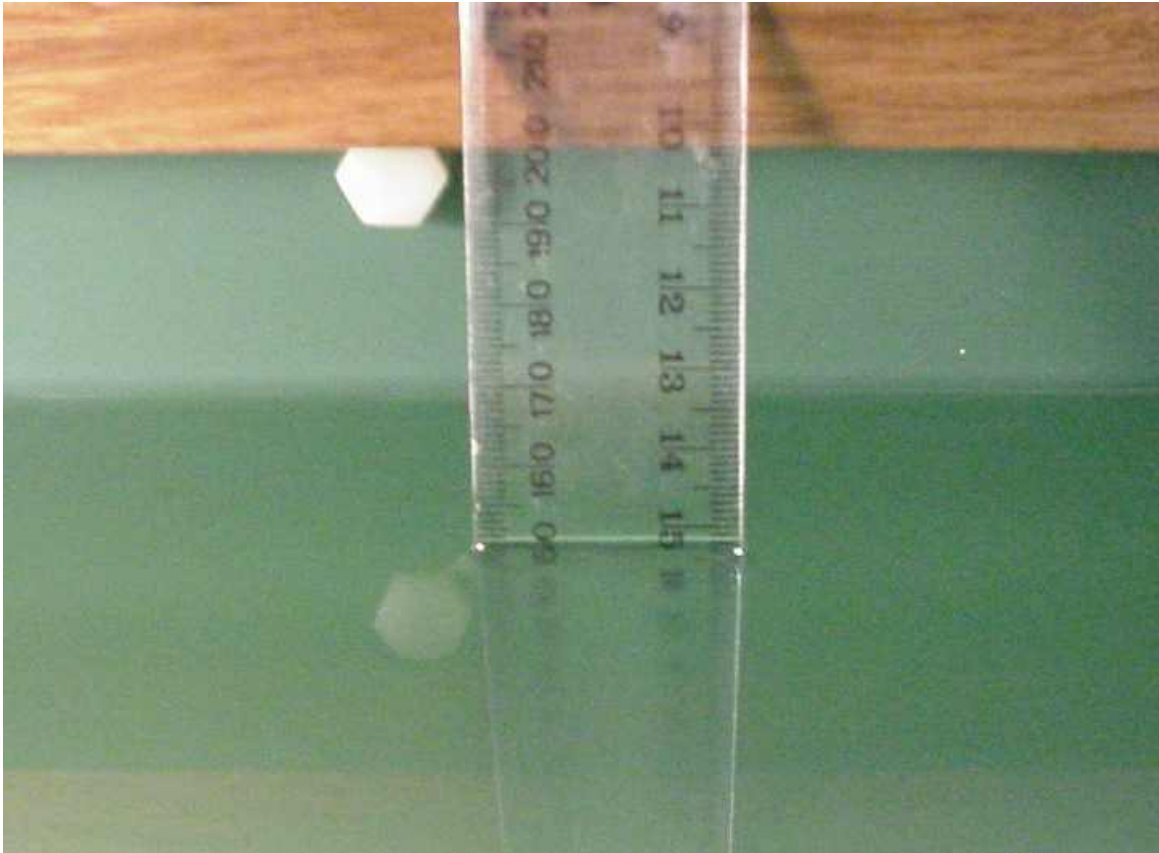


Photo of liquid Depth in Flat Phantom

6.4 Phantom Properties

The phantoms used during the testing comply with the OET65 C (01-01), IEEE 1528 EN62209-1 and EN62209-2 SAR measurement requirements.

6.5 Tissue Material Properties

The dielectric parameters of the brain simulating liquid were measured prior to SAR assessment using the HP85070A dielectric probe kit and HP8753ES Network Analyser. The actual dielectric parameters are shown in the following table.

Table 13 Measured Brain Simulating Liquid Dielectric Values for System verifications

Frequency Band	ϵ_r (measured range)	ϵ_r (target)	σ (mho/m) (measured range)	σ (target)	ρ kg/m ³
2450 MHz Brain	39.8-39.9	39.2 ±5% (37.2 to 41.2)	1.79-1.82	1.80 ±5% (1.71 to 1.89)	1000

NOTE: The brain liquid parameters were within the required tolerances of ±5%.

Table 14 Measured Body Simulating Liquid Dielectric Values

Frequency Band	ϵ_r (measured range)	ϵ_r (target)	σ (mho/m) (measured range)	σ (target)	ρ kg/m ³
2415 MHz Muscle	52.1	52.7 ±5% (50.1 to 55.3)	1.89	1.95 ±5% (1.85 to 2.05)	1000
2437 MHz Muscle	52.0	52.7 ±5% (50.1 to 55.3)	1.94	1.95 ±5% (1.85 to 2.05)	1000
2457 MHz Muscle	52.0	52.7 ±5% (50.1 to 55.3)	1.99	1.95 ±5% (1.85 to 2.05)	1000

NOTE: The brain and muscle liquid parameters were within the required tolerances of ±5%.

6.5.1 Liquid Temperature and Humidity

The humidity and dielectric/ambient temperatures were recorded during the assessment of the tissue material dielectric parameters. The difference between the ambient temperature of the liquid during the dielectric measurement and the temperature during tests was less than |2|°C.

Table 15: Temperature and Humidity recorded for each day

Date	Ambient Temperature (°C)	Liquid Temperature (°C)	Humidity (%)
13 th Sept. 2010	20.9	20.5	43.0
14 th Sept. 2010	21.3	21.0	38.0

6.6 Simulated Tissue Composition Used for SAR Test

The tissue simulating liquids are created prior to the SAR evaluation and often require slight modification each day to obtain the correct dielectric parameters.

Table 16 Tissue Type: Brain @ 2450MHz

Volume of Liquid: 30 Litres

Approximate Composition	% By Weight
Distilled Water	62.7
Salt	0.5
Triton X-100	36.8

*Refer "OET Bulletin 65 97/01 P38"

Table 17 Tissue Type: Muscle @ 2450MHz

Volume of Liquid: 60 Litres

Approximate Composition	% By Weight
Distilled Water	73.2
Salt	0.04
DGBE	26.7

6.7 EUT Holder for Laptops and P 10.1 Phantom

A low loss clamp was used to position the TABLET underneath the phantom surface. Refer to Appendix A for photographs of EUT positioning



7.0 SAR MEASUREMENT PROCEDURE USING DASY4

The SAR evaluation was performed with the SPEAG DASY4 system. A summary of the procedure follows:

- a) A measurement of the SAR value at a fixed location is used as a reference value for assessing the power drop of the EUT. The SAR at this point is measured at the start of the test, and then again at the end of the test.
- b) The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 4 mm from the inner surface of the shell. The area covers the entire dimension of the EUT and the horizontal grid spacing is 15 mm x 15 mm. The actual Area Scan has dimensions of 75mm x 120mm surrounding the test EUT. Based on this data, the area of the maximum absorption is determined by Spline interpolation.
- c) Around this point, a volume of 30 mm x 30 mm x 30 mm is assessed by measuring 7 x 7 x 7 points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:
 - (i) The data at the surface are extrapolated, since the centre of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 4 mm. The extrapolation is based on a least square algorithm. A polynomial of the fourth order is calculated through the points in z-axes. This polynomial is then used to evaluate the points between the surface and the probe tip.
 - (ii) The maximum interpolated value is searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g and 10 g) are computed using the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"- condition (in x, y and z-direction). The volume is integrated with the trapezoidal – algorithm. One thousand points (10 x 10 x 10) are interpolated to calculate the averages.
 - (iii) All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.
 - (iv) The SAR value at the same location as in Step (a) is again measured to evaluate the actual power drift.



8.0 MEASUREMENT UNCERTAINTY

The uncertainty analysis is based on the template listed in the IEEE Std 1528-2003 for both EUT SAR tests and System verification uncertainty. The measurement uncertainty of a specific EUT is evaluated independently and the total uncertainty for both evaluations (95% confidence level) must be less than 30%.

Table 18 Uncertainty Budget for DASY4 V4.7 Build 80 – EUT SAR test 2450MHz

Uncertainty Component	Tol. (6%)	Prob. Dist.	Div.	C _i (1g)	C _i (10g)	1g u _i (6%)	10g u _i (6%)	v _i
Measurement System								
Probe Calibration	6.55	N	1	1	1	6.6	6.6	∞
Axial Isotropy	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effects	2	R	1.73	1	1	1.2	1.2	∞
Linearity	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	1	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	0.3	N	1	1	1	0.3	0.3	∞
Response Time	0.8	R	1.73	1	1	0.5	0.5	∞
Integration Time	2.6	R	1.73	1	1	1.5	1.5	∞
RF Ambient Noise	3	R	1.73	1	1	1.7	1.7	∞
RF Ambient Reflections	3	R	1.73	1	1	1.7	1.7	∞
Probe Positioner	0.8	R	1.73	1	1	0.5	0.5	∞
Probe Positioning	9.9	R	1.73	1	1	5.7	5.7	∞
Max. SAR Eval.	4	R	1.73	1	1	2.3	2.3	∞
Test Sample Related								
Test Sample Positioning	1.61	N	1	1	1	1.6	1.6	11
EUT Holder Uncertainty	3.6	N	1	1	1	3.6	3.6	7
Output Power Variation – SAR Drift Measurement	9.47	R	1.73	1	1	5.5	5.5	∞
Phantom and Setup								
Phantom Uncertainty	4	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity – Deviation from target values	5	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity – Measurement uncertainty	5	N	1.00	0.64	0.43	3.2	2.2	5
Liquid Permittivity – Deviation from target values	10	R	1.73	0.6	0.49	3.5	2.8	∞
Liquid Permittivity – Measurement uncertainty	5	N	1.00	0.6	0.49	3.0	2.5	5
Combined standard Uncertainty		RSS				13.9	13.5	154
Expanded Uncertainty (95% CONFIDENCE LEVEL)		k=2				27.9	27.03	

Estimated total measurement uncertainty for the DASY4 measurement system was $\pm 13.9\%$. The extended uncertainty ($K = 2$) was assessed to be $\pm 27.9\%$ based on 95% confidence level. The uncertainty is not added to the measurement result.



Table 19 Uncertainty Budget for DASY4 V4.7 Build 80 – System verification 2450MHz

Uncertainty Component	Tol. (6%)	Prob. Dist.	Div.	C _i (1g)	C _i (10g)	1g u _i (6%)	10g u _i (6%)	v _i
Measurement System								
Probe Calibration	5.5	N	1	1	1	5.5	5.5	∞
Axial Isotropy	4.7	R	1.73	1	1	2.7	2.7	∞
Hemispherical Isotropy	9.6	R	1.73	0	0	0.0	0.0	∞
Boundary Effects	1	R	1.73	1	1	0.6	0.6	∞
Linearity	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	1	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	0.3	N	1	1	1	0.3	0.3	∞
Response Time	0	R	1.73	1	1	0.0	0.0	∞
Integration Time	0	R	1.73	1	1	0.0	0.0	∞
RF Ambient Noise	3	R	1.73	1	1	1.7	1.7	∞
RF Ambient Reflections	3	R	1.73	1	1	1.7	1.7	∞
Probe Positioner	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning	2.9	R	1.73	1	1	1.7	1.7	∞
Max. SAR Eval.	1	R	1.73	1	1	0.6	0.6	∞
Dipole								
Dipole Axis to Liquid Distance	2	N	1.73	1	1	1.2	1.2	11
Input Power and SAR drift meas.	4.7	R	1.73	1	1	2.7	2.7	∞
Phantom and Tissue Param.								
Phantom Uncertainty	4	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity – Deviation from target values	5	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity – Measurement uncertainty	2.5	N	1.00	0.64	0.43	1.6	1.1	5
Liquid Permittivity – Deviation from target values	5	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity – Measurement uncertainty	2.5	N	1.00	0.6	0.49	1.5	1.2	5
Combined standard Uncertainty		RSS				9.0	8.7	154
Expanded Uncertainty (95% CONFIDENCE LEVEL)		k=2				17.9	17.34	

Estimated total measurement uncertainty for the DASY4 measurement system was ±9.0%. The extended uncertainty (K = 2) was assessed to be ±17.9% based on 95% confidence level. The uncertainty is not added to the System verification measurement result.



9.0 EQUIPMENT LIST AND CALIBRATION DETAILS

Table 20 SPEAG DASY4 Version V4.7 Build 80

Equipment Type	Manufacturer	Model Number	Serial Number	Calibration Due	Used For this Test?
Robot - Six Axes	Staubli	RX90BL	N/A	Not applicable	✓
Robot Remote Control	SPEAG	CS7MB	RX90B	Not applicable	✓
SAM Phantom	SPEAG	N/A	1260	Not applicable	✓
SAM Phantom	SPEAG	N/A	1060	Not applicable	✓
Flat Phantom	AndreT	10.1	P 10.1	Not Applicable	✓
Flat Phantom	AndreT	9.1	P 9.1	Not Applicable	✓
Flat Phantom	SPEAG	PO1A 6mm	1003	Not Applicable	
Data Acquisition Electronics	SPEAG	DAE3 V1	359	07-July-2011	
Data Acquisition Electronics	SPEAG	DAE3 V1	442	08-Dec-2010	✓
Probe E-Field - Dummy	SPEAG	DP1	N/A	Not applicable	
Probe E-Field	SPEAG	ET3DV6	1380	11-Dec-2010	✓
Probe E-Field	SPEAG	ET3DV6	1377	7-July-2011	
Probe E-Field	SPEAG	ES3DV6	3029	Not Used	
Probe E-Field	SPEAG	EX3DV4	3563	16-July-2011	
Probe E-Field	SPEAG	EX3DV4	3657	15-July-2011	
Antenna Dipole 300 MHz	SPEAG	D300V2	1005	15-Dec-2011	
Antenna Dipole 450 MHz	SPEAG	D450V2	1009	17-Dec-2010	
Antenna Dipole 900 MHz	SPEAG	D900V2	047	5-July-2012	
Antenna Dipole 1640 MHz	SPEAG	D1640V2	314	9-July-2012	
Antenna Dipole 1800 MHz	SPEAG	D1800V2	242	13-July-2012	
Antenna Dipole 1950 MHz	SPEAG	D1950V3	1113	12-Dec -2010	
Antenna Dipole 3500 MHz	SPEAG	D3500V2	1002	17-July-2010	
Antenna Dipole 2450 MHz	SPEAG	D2450V2	724	10-Dec-2010	✓
Antenna Dipole 5600 MHz	SPEAG	D5GHzV2	1008	16-Dec-2011	
RF Amplifier	EIN	603L	N/A	*In test	
RF Amplifier	Mini-Circuits	ZHL-42	N/A	*In test	✓
RF Amplifier	Mini-Circuits	ZVE-8G	N/A	*In test	
Synthesized signal generator	Hewlett Packard	ESG-D3000A	GB37420238	*In test	✓
RF Power Meter	Hewlett Packard	437B	3125012786	9-Aug-2011	✓
RF Power Sensor 0.01 - 18 GHz	Hewlett Packard	8481H	1545A01634	13-Aug-2011	✓
RF Power Meter	Rohde & Schwarz	NRP	101415	5-May-2011	
RF Power Sensor	Rohde & Schwarz	NRP - Z81	100174	16-July-2011	
RF Power Meter Dual	Hewlett Packard	435A	1733A05847	*In test	✓
RF Power Sensor	Hewlett Packard	8482A	2349A10114	*In test	✓
Network Analyser	Hewlett Packard	8714B	GB3510035	30-Sept-2010	
Network Analyser	Hewlett Packard	8753ES	JP39240130	24-Nov-2010	✓
Dual Directional Coupler	Hewlett Packard	778D	1144 04700	*In test	
Dual Directional Coupler	NARDA	3022	75453	*In test	✓

* Calibrated during the test for the relevant parameters.



This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

10.0 OET BULLETIN 65 – SUPPLEMENT C TEST METHOD

Notebooks should be evaluated in normal use positions, typical for lap-held bottom-face only. However the number of positions will depend on the number of configurations the laptop can be operated in. The “LIFEBOOK T SERIES” can be used in either a conventional laptop position (see Appendix A1) or a Tablet configuration. The antenna location in the “LIFEBOOK T SERIES” is closest to the top of the screen when used in a conventional laptop configuration and due to the separation distances involved between the phantom and the laptop antenna, testing is not required in this position.

10.1 Positions

10.1.1 “Tablet” Position Definition (0mm spacing)

The EUT was tested in the 2.00 mm flat section of the AndreT Flat phantom P 10.1 for the “Tablet” position. The Transceiver was placed at the bottom of the phantom and suspended in such way that the back of the EUT was touching the phantom. This EUT orientation simulates the PC’s normal use – being held on the lap of the user. A spacing of 0mm ensures that the SAR results are conservative and represent a worst-case position.

10.1.2 “Edge On” Position (Portrait or Landscape)

The EUT was tested in the (2.00 mm) flat section of the AndreT phantom for the “Edge On” position. The Antenna edge of the Transceiver was placed underneath the flat section of the phantom and suspended until the edge touched the phantom. *Refer to Appendix A for photos of measurement positions.*

10.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes)


The EUT has a fixed antenna. Depending on the measured SAR level up to three test channels with the test sample operating at maximum power were recorded. The following table represents the matrix used to determine what testing was required. All relevant provisions of KDB 447498 are applied for SAR measurements of the host system. Due to the screen size <12 inches, “Supplement to the KDB 616217” was followed for the SAR evaluation.

Table 21 Testing configurations

Phantom Configuration	*EUT Mode	Antenna	Test Configurations		
			Channel (Low)	Channel (Middle)	Channel (High)
Lap-Held	OFDM 2.4GHz	A		X	
		B		X	
	DSSS 2.4GHz	A		X	
		B		X	
Tablet	OFDM 2.4GHz	A		X	
		B		X	
	DSSS 2.4GHz	A		X	
		B		X	
Edge On	OFDM 2.4GHz	A		X	
		B		X	
	DSSS 2.4GHz	A		X	
		B		X	

Legend

 Testing Required in this configuration

 Testing required in this configuration only if SAR of middle channel is more than 3dB below the SAR limit or it is the worst case.

NOTE: Throughout this report, Antenna A, and B refer to Tx1, and Tx2 in the host respectively.



11.0 SAR MEASUREMENT RESULTS

The SAR values averaged over 1g tissue masses were determined for the sample EUT for all test configurations listed in section 10.2.

11.1 2450MHz SAR Results

There are two modes of operation within the 2450MHz band, they include OFDM and DSSS modulations. As per KDB 248227 and the Table 22 Channels and Output power setting, the EUT was tested only with OFDM modulation (802.11g). Table below displays the SAR results.

Table 23 SAR MEASUREMENT RESULTS – OFDM Mode

Test Position	Plot No.	Ant	Bit rate Mode (Mbps)	Channel Bandwidth (MHz)	Test Channel	Test Freq (MHz)	Measured 1g SAR Results (mW/g)	Measured Drift (dB)
Lap Held	-	A	6	-	06	2437	Noise Floor	N/A
	-	B	6	-	06	2437	Noise Floor	N/A
Tablet	1	A	6	-	06	2437	0.104	0.393
	2	B	6	-	06	2437	0.263	-0.072
Secondary Landscape	3	A	6	-	06	2437	0.368	0.090
	4	B	6	-	06	2437	0.303	-0.052
Primary Portrait	5	B	6	-	02	2417	0.911	0.089
	6				06	2437	1.010	0.138
	7				10	2457	1.070	0.311

NOTE: The measurement uncertainty of 27.9% for 2.45GHz was not added to the result.

The highest SAR level recorded in the 2450MHz band was 1.070 mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in Primary Portrait position in OFDM mode, utilizing channel 10 (2457 MHz) and antenna B.



12.0 COMPLIANCE STATEMENT

The EUT was found to comply with the FCC and RSS-102 SAR requirements.

The highest SAR level recorded was 1.070 mW/g for a 1g cube. This value was measured at 2457 MHz (channel 10) in the "Primary Portrait" position in OFDM modulation mode at the antenna B. This was below the limit of 1.6 mW/g for uncontrolled exposure, even taking into account the measurement uncertainty of 27.9 %.

This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing and calibration reports.



Accreditation No. 5292

This document must not be copied or reproduced, except in full without the written permission of the Manager, EMC Technologies Pty Ltd. The certificate on page 3 may be reproduced in full.
www.emctech.com.au

13.0 MULTIBAND EVALUATION CONSIDERATIONS

Fujitsu **TABLET PC**, Model: **T580/TH550** is equipped with WLAN (**AR5B97**) and Bluetooth (**BSMAN3**).

According to the FCC SAR evaluation procedures mentioned in **“Supplement to the KDB 616217” (for Tablet PC with the LCD size < 12)**, stand-alone SAR evaluation is NOT required when the maximum transmitter and antenna output power is less than or equal to $60/f_{(GHz)} (P_{ref})$. The Bluetooth module in the EUT operates in the 2.4GHz range. It has a maximum output power of 2.5mW (4dBm) which is less than $P_{ref} (=60/2.4=25mW)$.

The shortest distance between the BT module and any other transmitting antenna was 21.5cm.

Because $21.5cm > 5cm$, and $2.5mW < 25mW$, the Bluetooth module was not considered for SAR evaluation. This is in accordance with the test reduction methods detailed in **“Supplement to the KDB 616217”** and KDB 447498.

Diagram Showing distance between the Bluetooth and the WLAN antennas



NOTE: Throughout this report, Antenna A, and B refer to Tx1, and Tx2 in the host respectively.