



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION**

TEST REPORT

FOR

802.11 b/g CARDBUS

MODEL NUMBER: AR5BCB-00051

FCC ID: PPD-AR5BCB-00051

REPORT NUMBER: 04U2587-1

ISSUE DATE: MAY 5, 2004

Prepared for
**ATHEROS COMMUNICATIONS, INC.
529 ALMANOR AVENUE
SUNNYVALE, CA 94085 USA**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
4. FACILITIES AND ACCREDITATION	5
5. CALIBRATION AND UNCERTAINTY	6
5.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	6
5.2. <i>MEASUREMENT UNCERTAINTY</i>	6
5.3. <i>TEST AND MEASUREMENT EQUIPMENT</i>	7
6. SETUP OF EQUIPMENT UNDER TEST	8
7. APPLICABLE LIMITS AND TEST RESULTS	10
7.1. <i>WORST-CASE DATA RATE</i>	10
7.2. <i>6 dB BANDWIDTH</i>	10
7.3. <i>99% BANDWIDTH</i>	23
7.4. <i>PEAK OUTPUT POWER</i>	36
7.5. <i>MAXIMUM PERMISSIBLE EXPOSURE</i>	49
7.6. <i>AVERAGE POWER</i>	52
7.7. <i>PEAK POWER SPECTRAL DENSITY</i>	54
7.8. <i>CONDUCTED SPURIOUS EMISSIONS</i>	67
7.9. <i>RADIATED EMISSIONS</i>	90
7.9.1. <i>TRANSMITTER RADIATED SPURIOUS EMISSIONS</i>	90
7.9.2. <i>TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ</i>	93
7.9.3. <i>WORST-CASE RADIATED EMISSIONS BELOW 1 GHz</i>	128
7.10. <i>POWERLINE CONDUCTED EMISSIONS</i>	132
8. SETUP PHOTOS	136

1. TEST RESULT CERTIFICATION

COMPANY NAME: ATHEROS COMMUNICATIONS, INC.
529 ALMANOR AVENUE
SUNNYVALE, CA 94085 USA

EUT DESCRIPTION: 802.11 b/g CARDBUS

MODEL: AR5BCB-00051

DATE TESTED: MARCH 15 – MAY 5, 2004

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:

Tested By:



MIKE HECKROTTE
ENGINEERING MANAGER
COMPLIANCE CERTIFICATION SERVICES

DAVID GARCIA
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. EUT DESCRIPTION

The EUT is an 802.11b/g transceiver operating in the 2400-2483.5MHz band.

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2472	802.11b	20.69	117.22
2412 - 2472	802.11g	22.98	198.61
2437	802.11g Turbo	22.93	196.34

The radio utilizes an integral antenna with a maximum gain of 0 dBi.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/2001, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.



No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	10/13/2004
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	837990	10/13/2004
EMI Test Receiver	R & S	ESHS 20	827129/006	7/17/2004
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	11/21/2004
RF Filter Section	HP	85420E	3705A00256	11/21/2004
30MHz--- 2Ghz	Sunol Sciences	JB1 Antenna	A121003	12/22/2004
Antenna, Horn 1 ~ 18 GHz	EMCO	3117	29301	12/26/2004
Antenna, Horn 18 ~ 26 GHz	ARA	MWH 1826	1029	/2004
Amplifier 1-26GHz	MITEQ	NSP2600-SP	924341	4/25/2004
Peak / Average Power Sensor	Agilent	E9327A	US40440755	11/7/2004
Peak Power Meter	Agilent	E4416A	GB41291160	11/7/2004
Spectrum Analyzer 20Hz ~ 40MHz	HP	3585A	2504A05564	6/4/2004

6. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop PC	IBM	Thinkpad R40	FX-28550	DoC


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC adapter	1	US115	AC	1m	integrated w/adapter

TEST SETUP

The EUT is installed in a host laptop during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

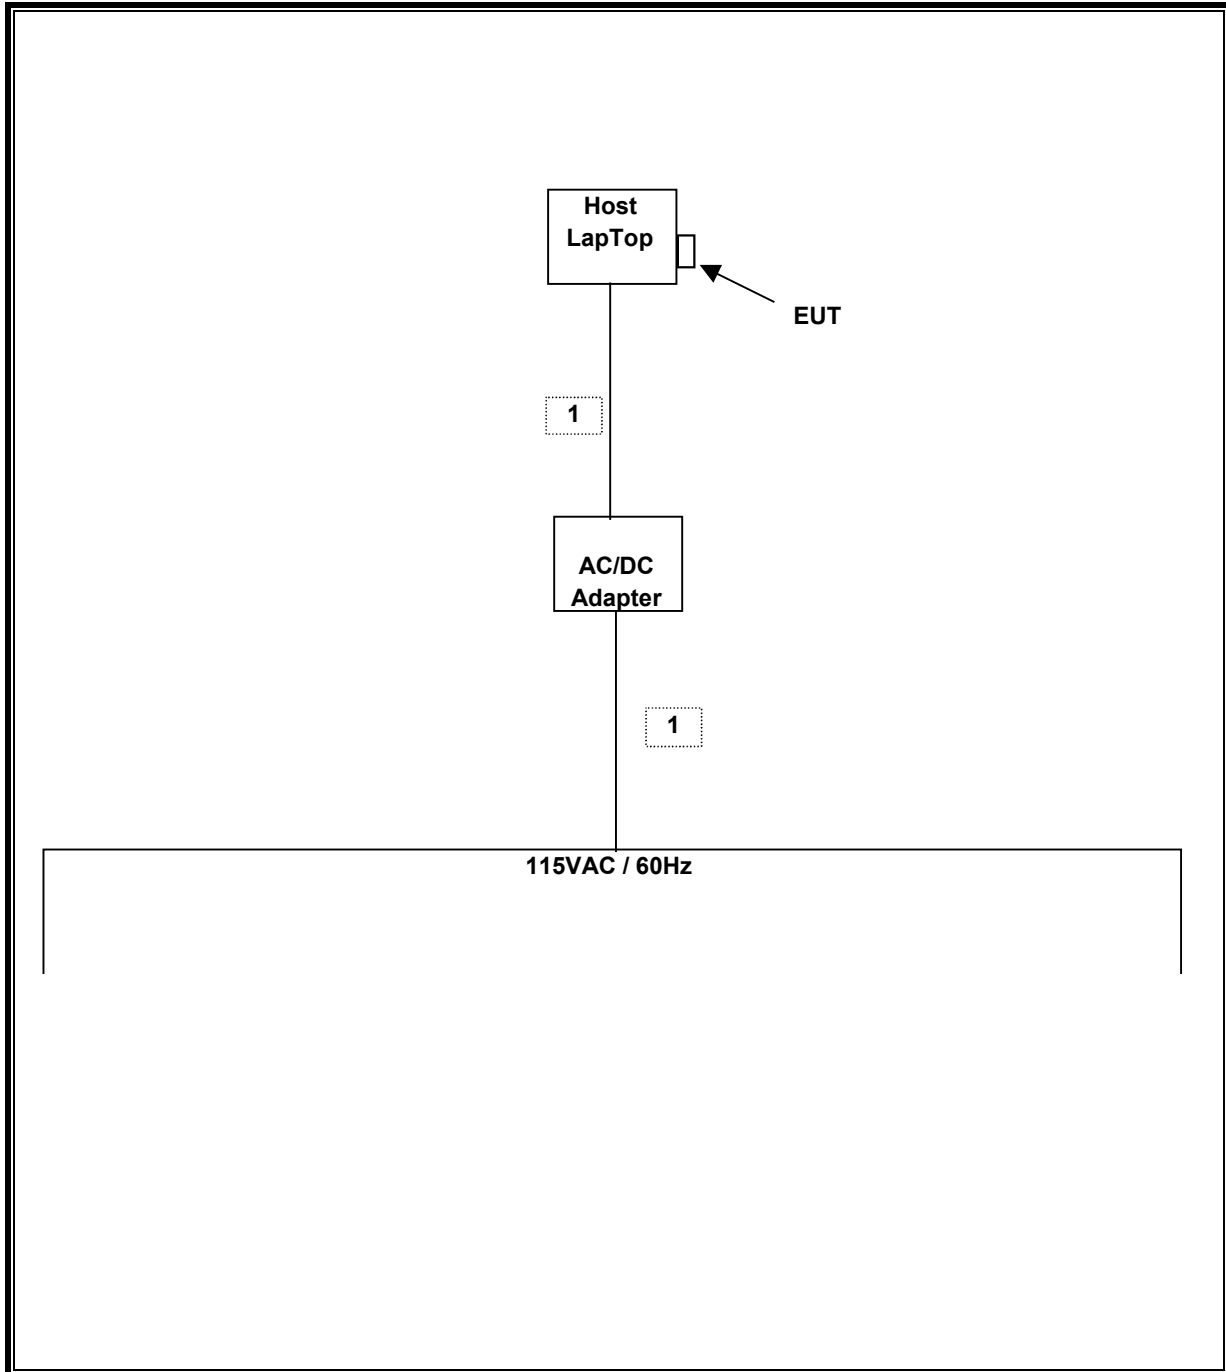

7. APPLICABLE LIMITS AND TEST RESULTS

7.1. WORST-CASE DATA RATE

A series of tests were performed to determine the worst-case data rate. For the 802.11b mode, the worst-case is at 1 Mb/s, the lowest data rate. For the 802.11g mode, the worst-case is at 54 Mb/s, the highest data rate. Therefore all final compliance tests as documented in this report were performed at 1 Mb/s for the 802.11b mode and at 54 Mb/s for the 802.11g mode.

7.2. 6 dB BANDWIDTH

LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	11330	500	10830
Middle	2437	12500	500	12000
High	2462	11970	500	11470
High	2467	11930	500	11430
High	2472	12430	500	11930


802.11g Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	16470	500	15970
Middle	2437	16500	500	16000
High	2462	16500	500	16000
High	2467	16500	500	16000
High	2472	16500	500	16000


802.11g Turbo Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Middle	2437	32730	500	32230


6 DB BANDWIDTH (802.11b MODE)

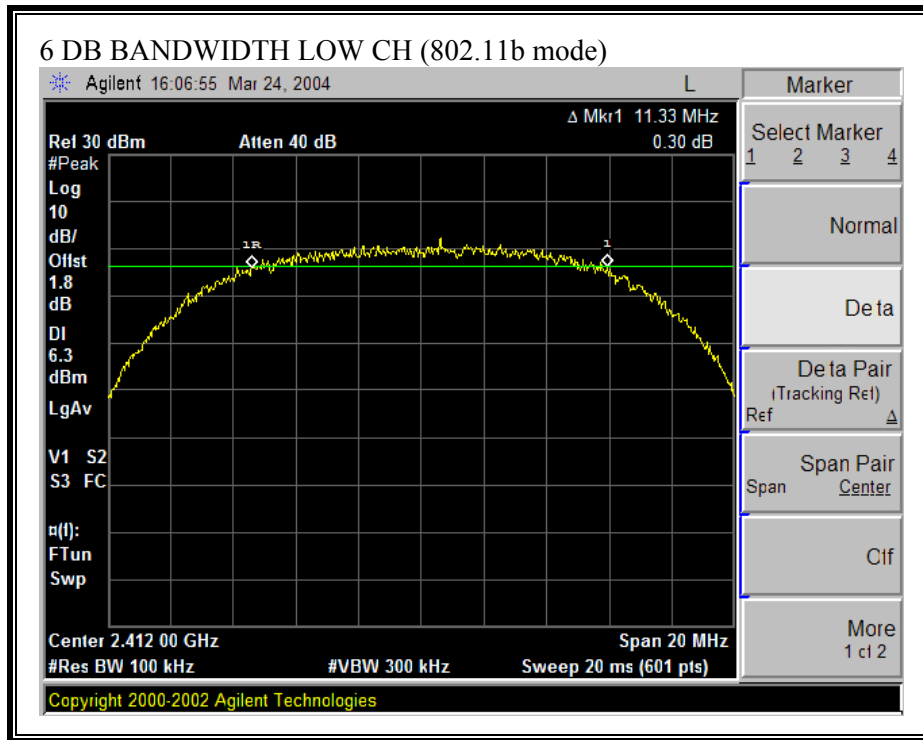

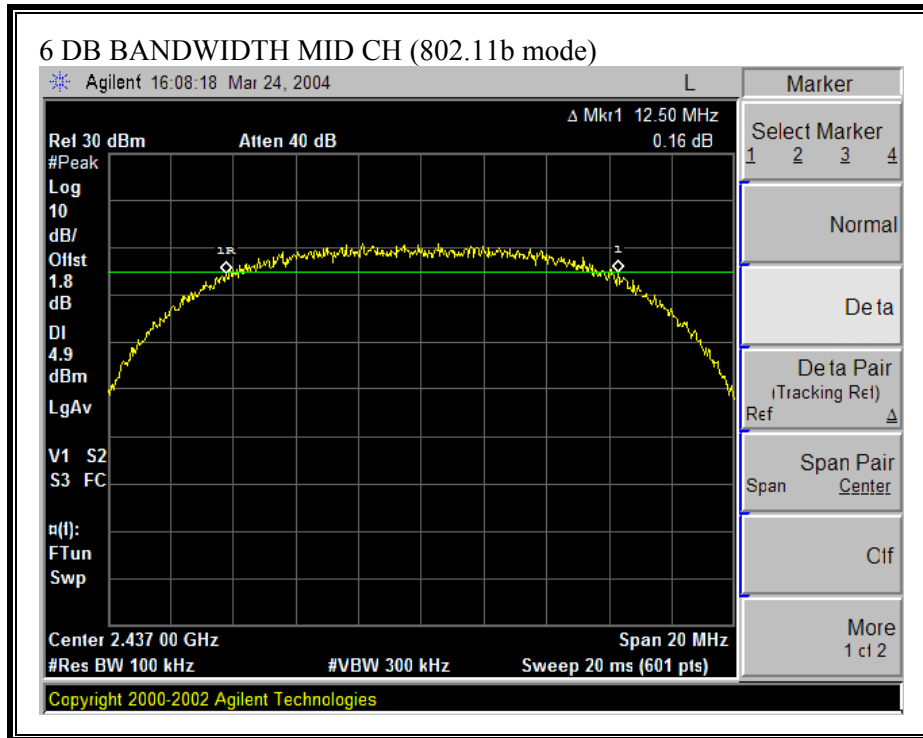


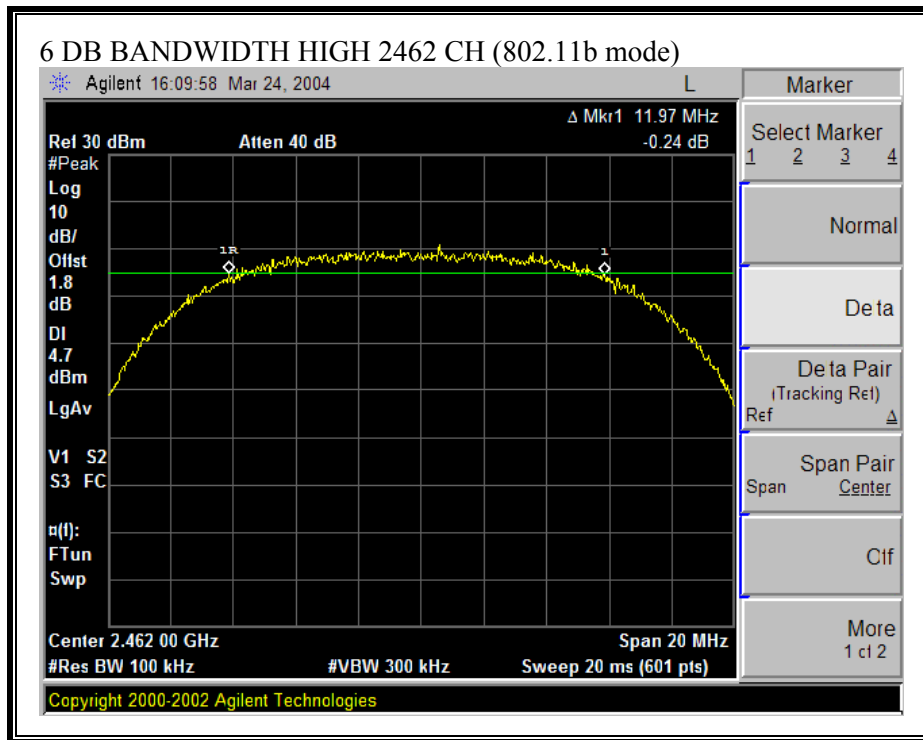


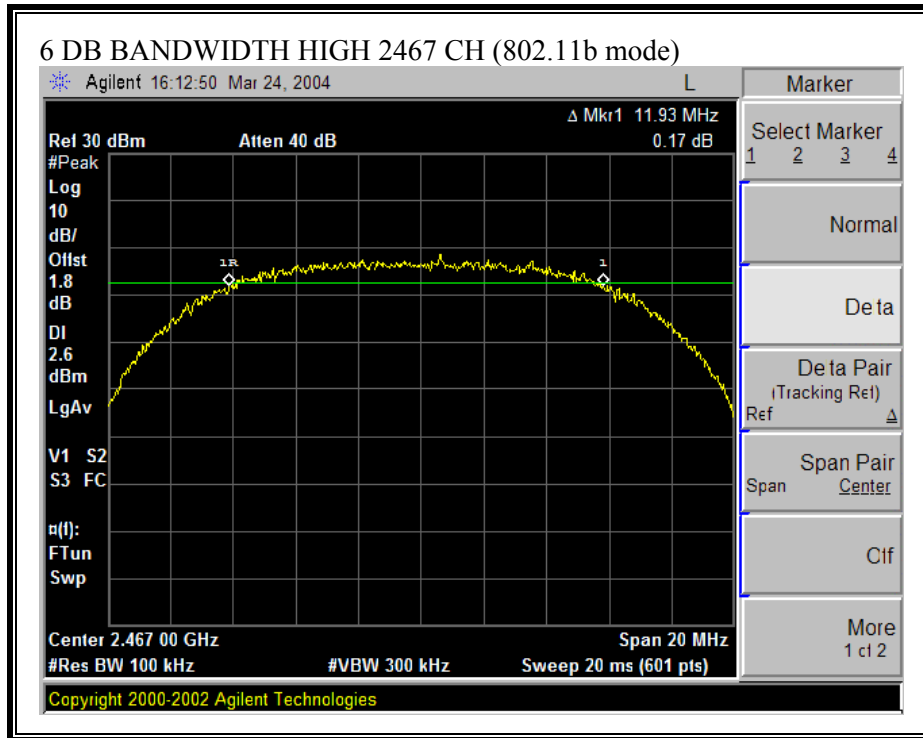


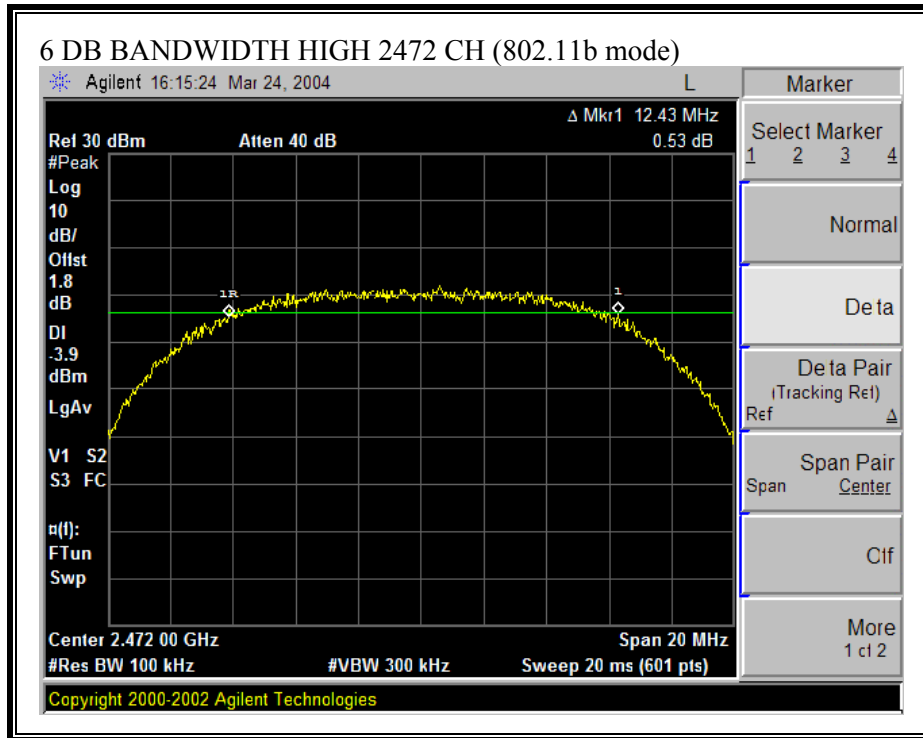



6 DB BANDWIDTH (802.11g MODE)

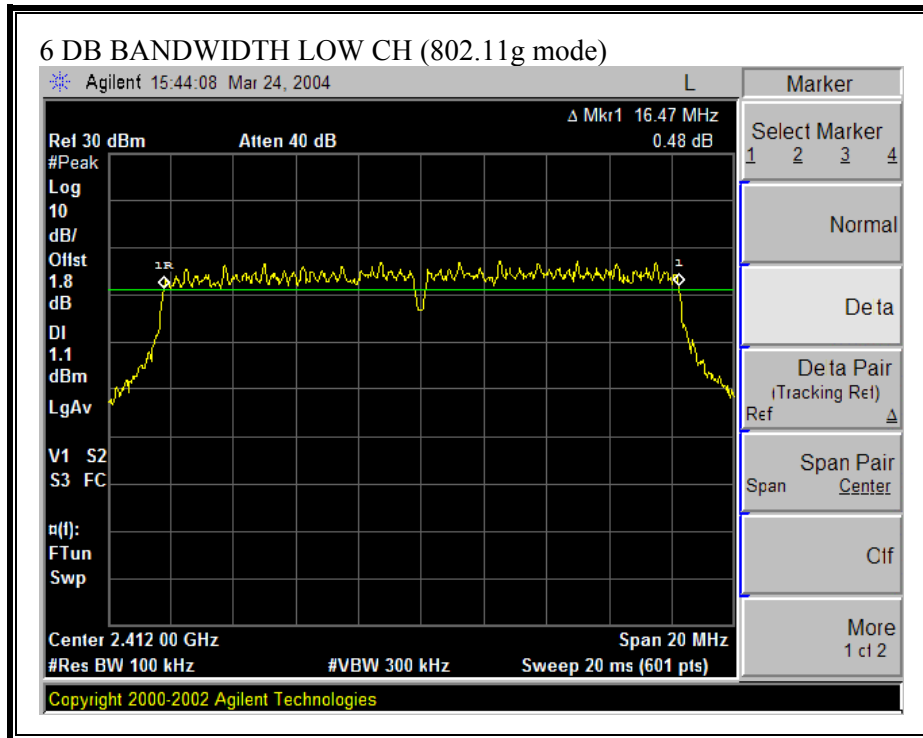

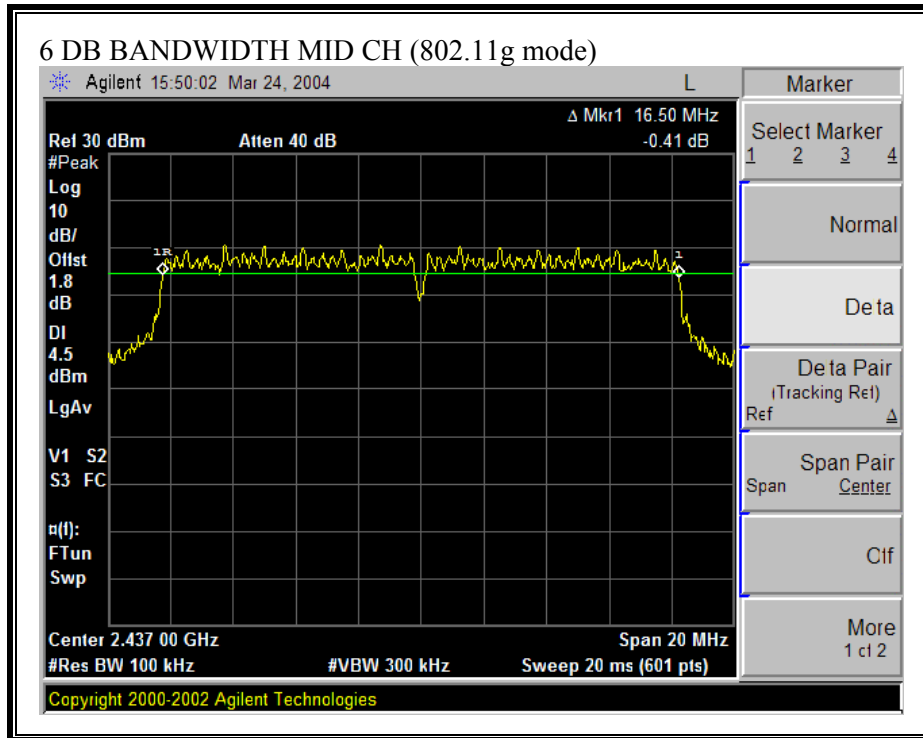


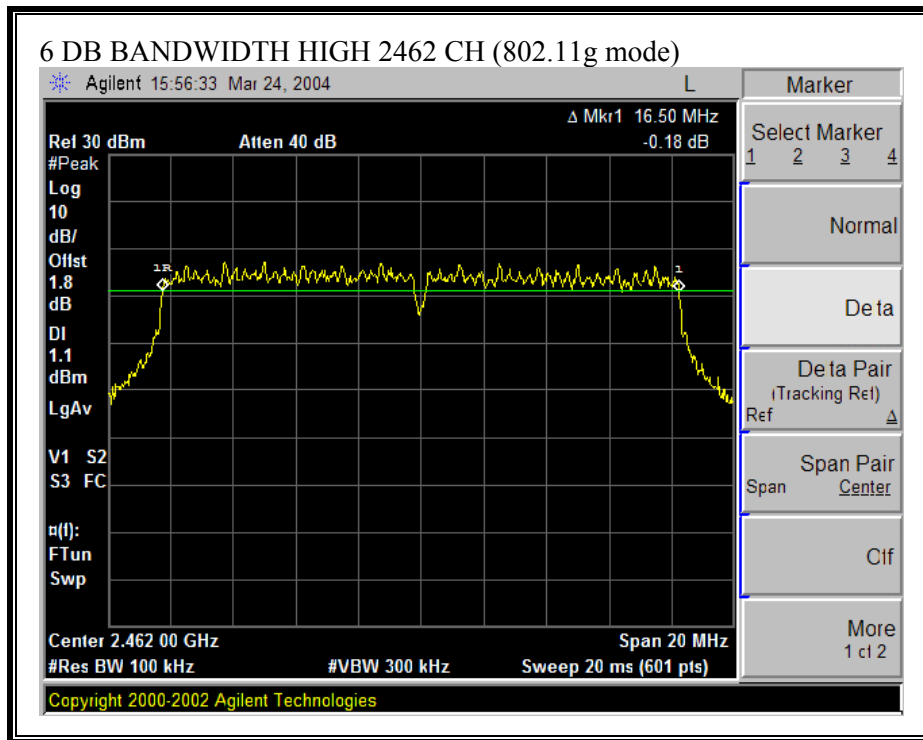

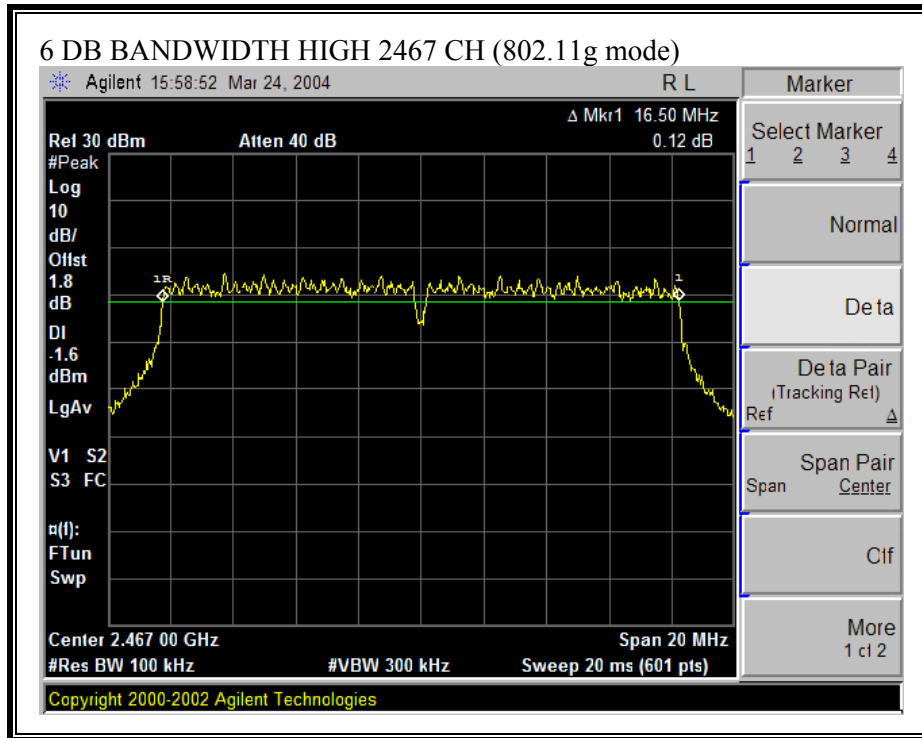

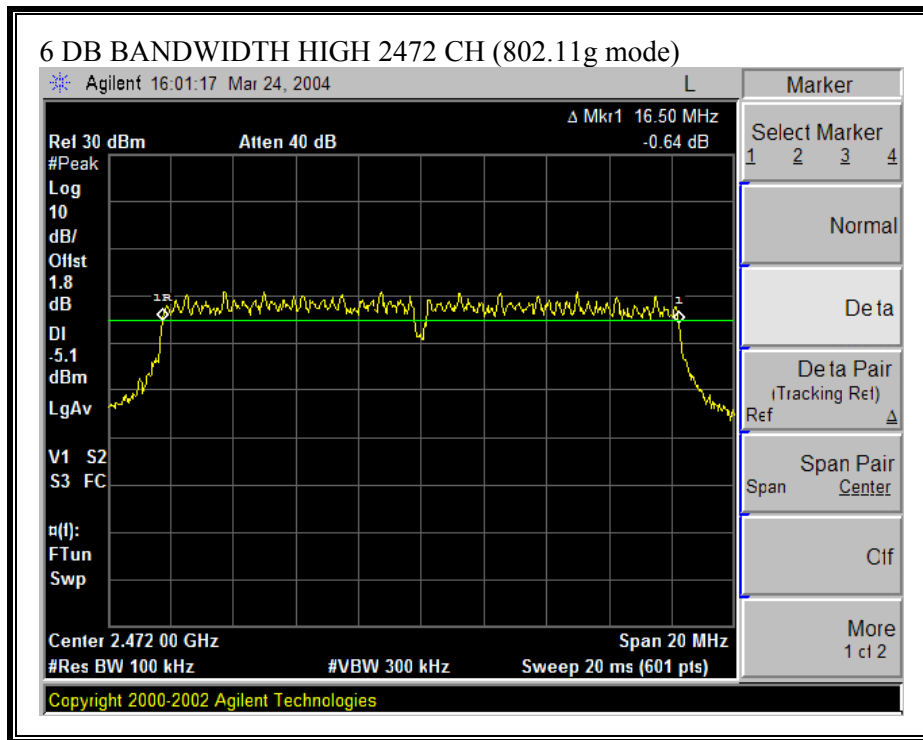

6 DB BANDWIDTH (802.11g TURBO MODE)

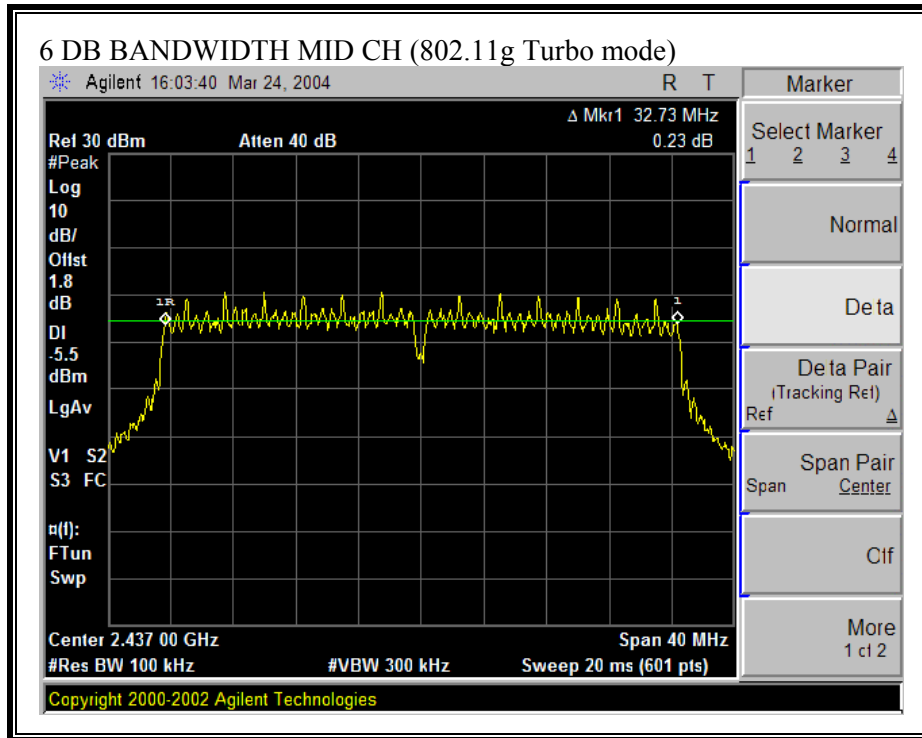

7.3. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	15.3178
Middle	2437	15.3471
High	2462	15.3277
High	2467	15.3437
High	2472	15.3467


802.11g Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.4351
Middle	2437	16.4915
High	2462	16.4416
High	2467	16.4337
High	2472	16.4749


802.11g Turbo Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Middle	2437	32.6897


99% BANDWIDTH (802.11b MODE)

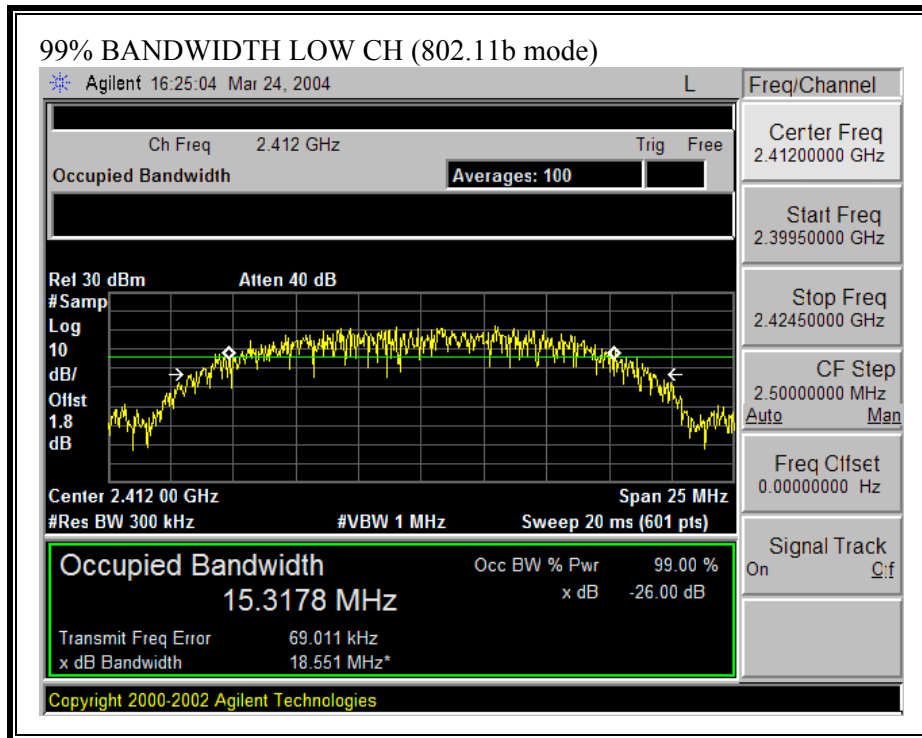

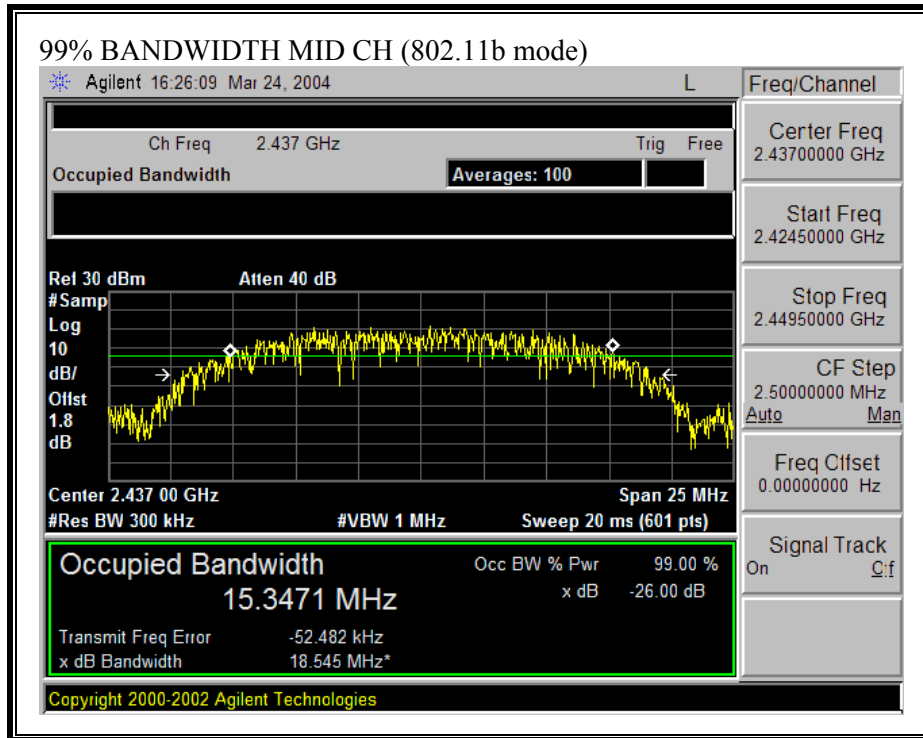


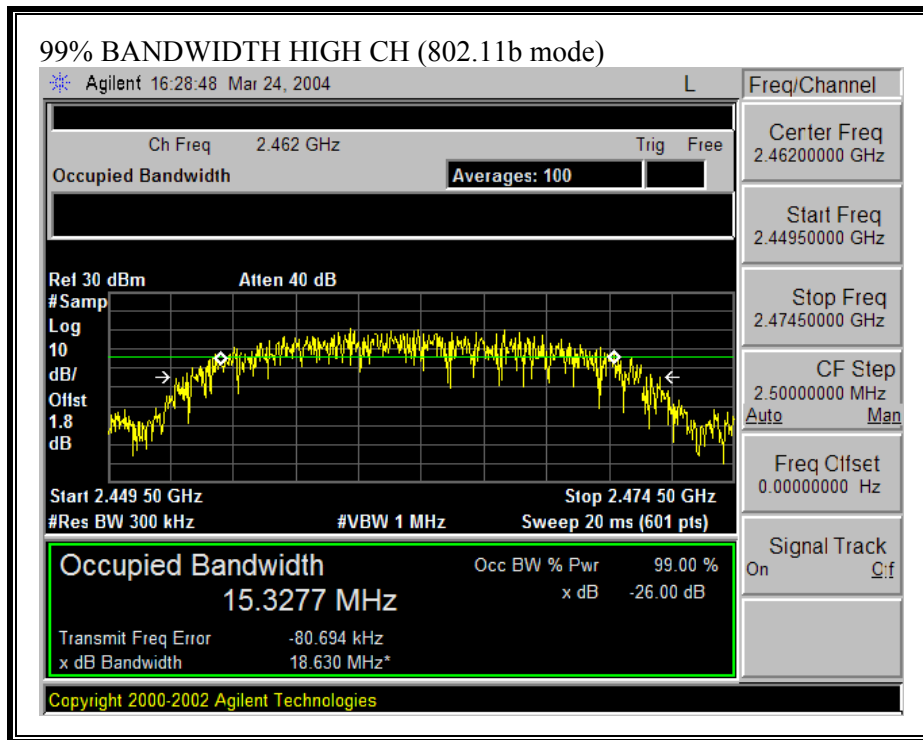


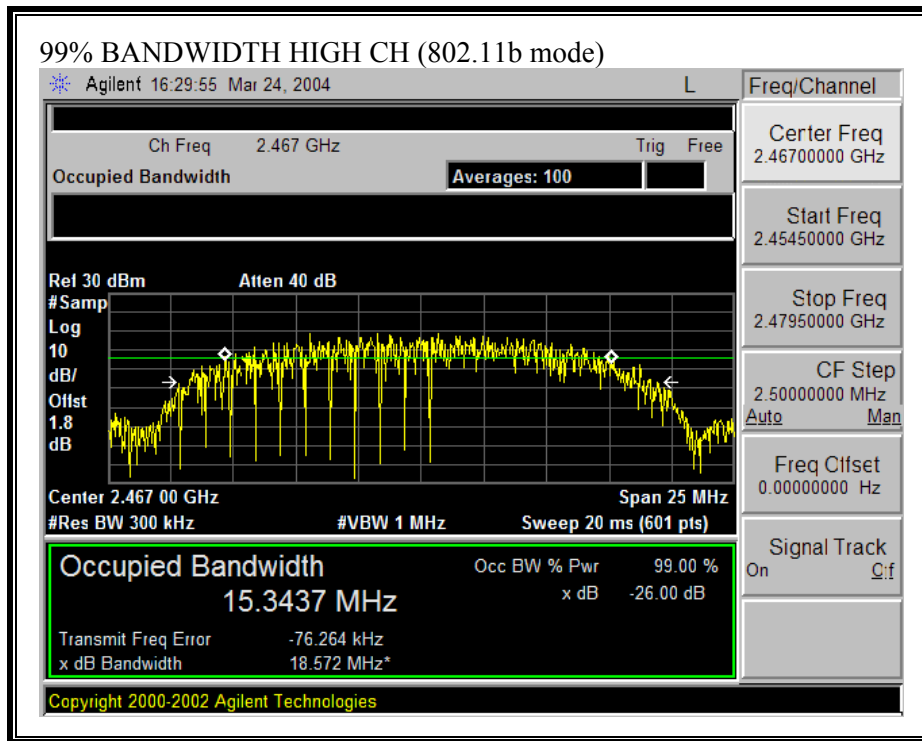


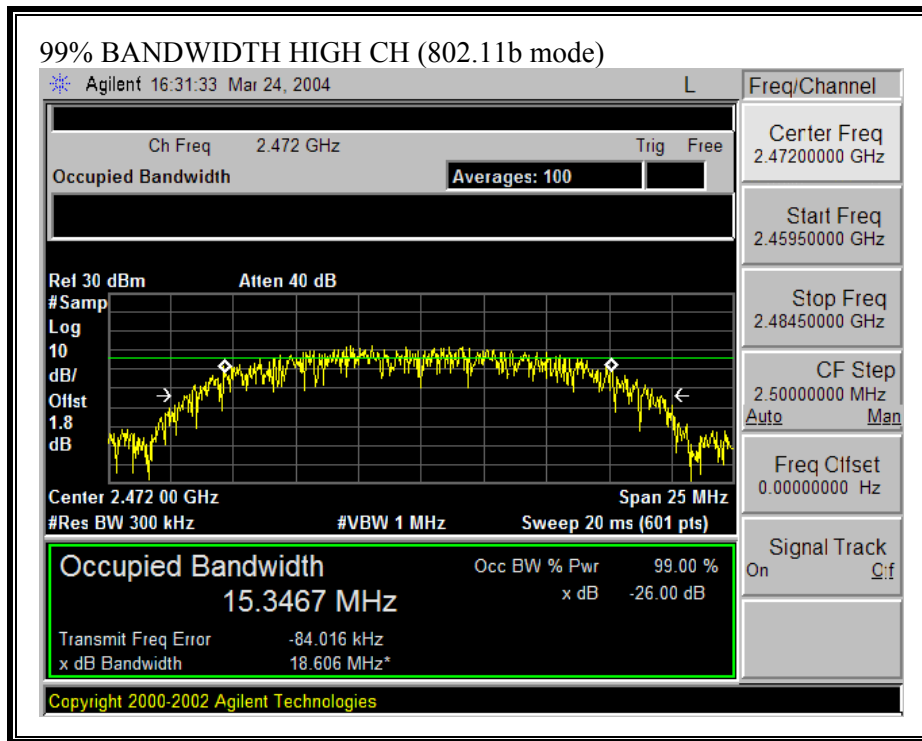



99% BANDWIDTH (802.11g MODE)

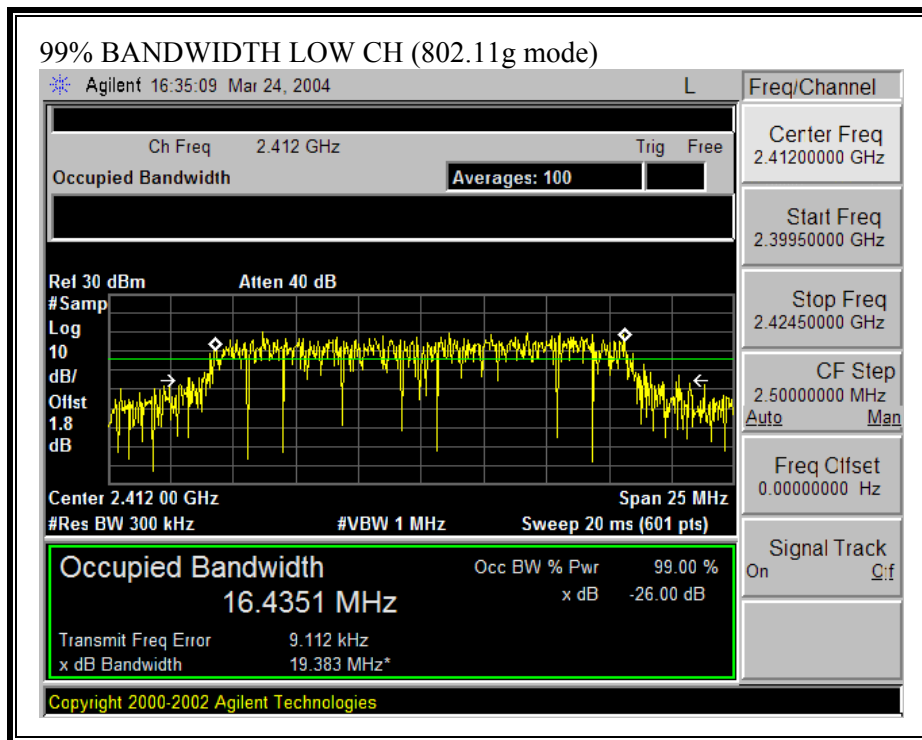

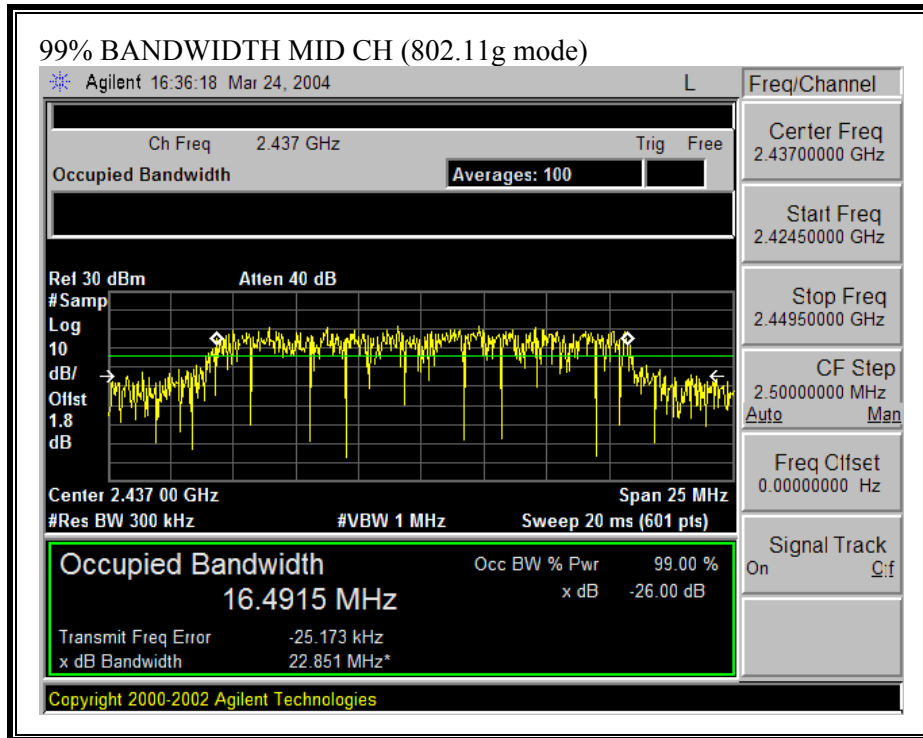


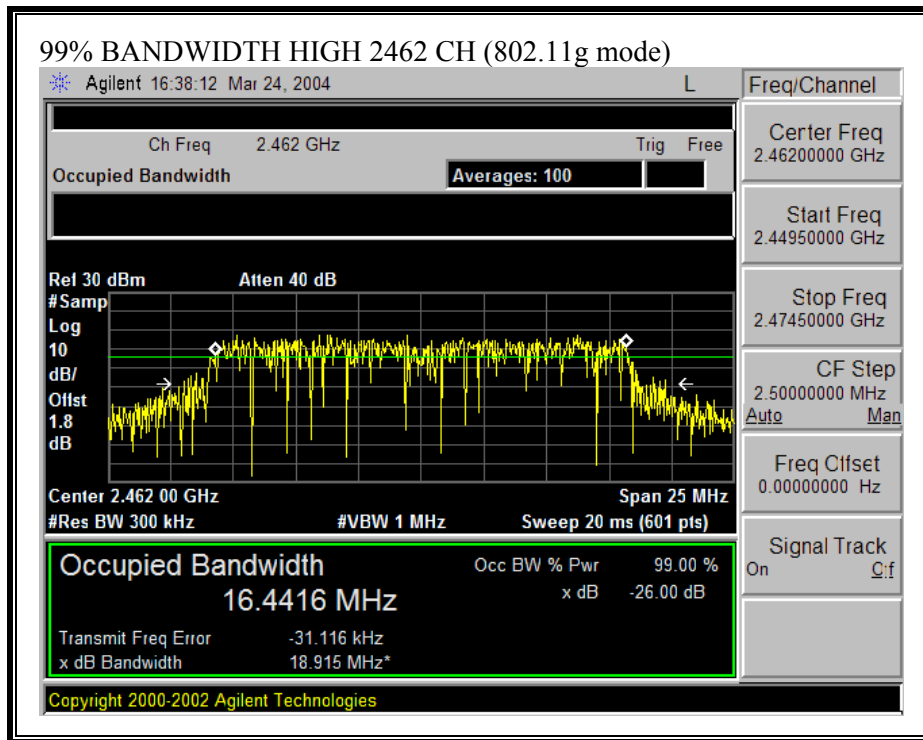

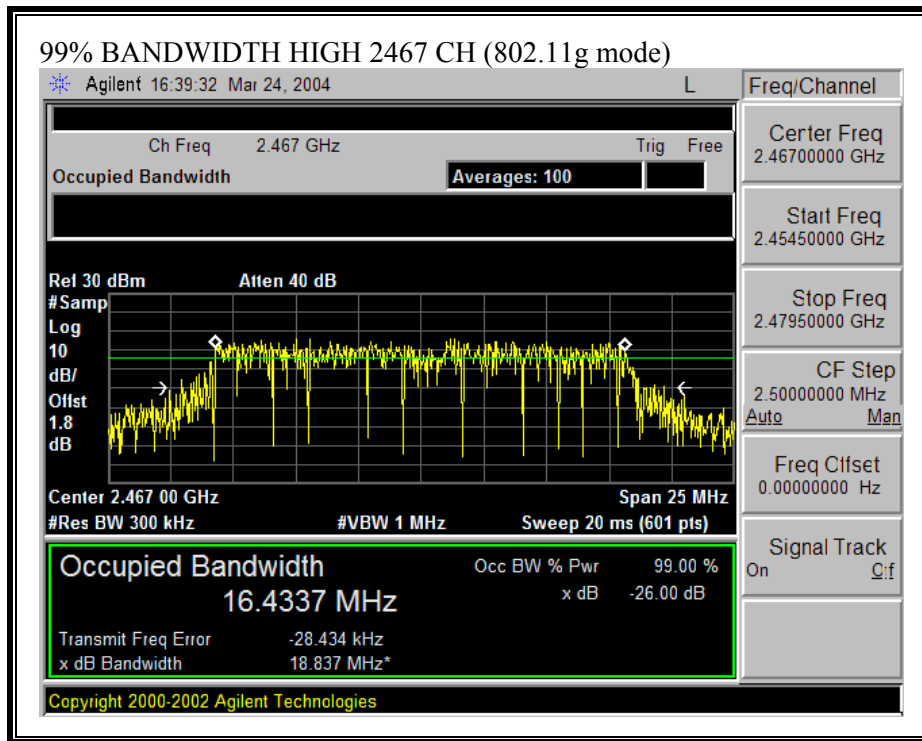

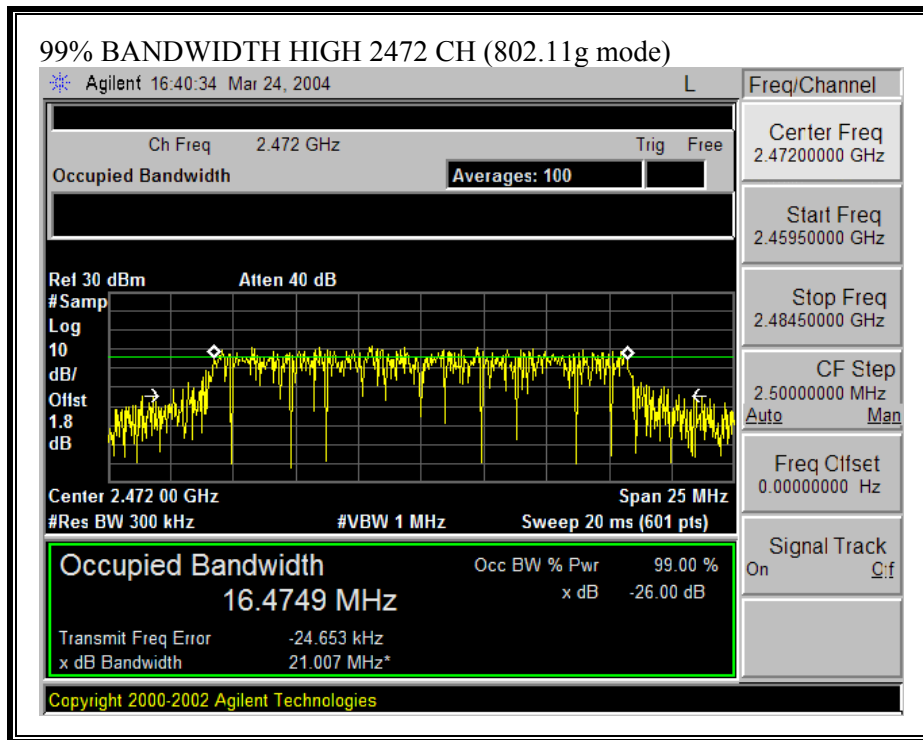

99% BANDWIDTH (802.11g TURBO MODE)

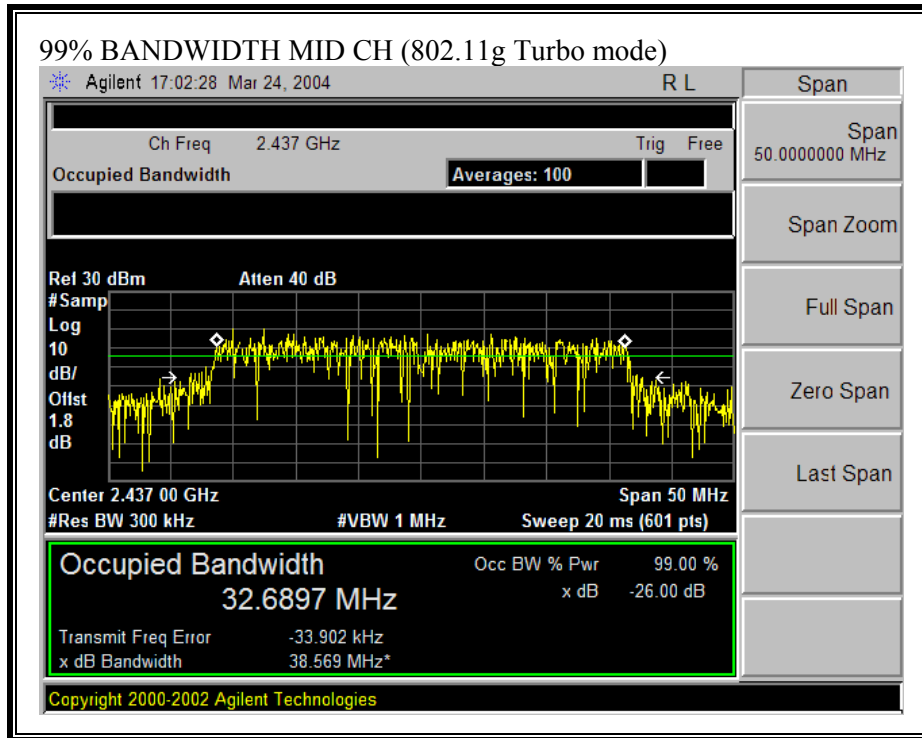

7.4. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain is 0 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	20.69	30	-9.31
Middle	2437	20.66	30	-9.34
High	2462	19.59	30	-10.41
High	2467	17.59	30	-12.41
High	2472	11.70	30	-18.30


802.11g Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	20.33	30	-9.67
Middle	2437	22.98	30	-7.02
High	2462	18.58	30	-11.42
High	2467	16.93	30	-13.07
High	2472	14.36	30	-15.64


802.11g Turbo Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Middle	2437	22.93	30	-7.07


OUTPUT POWER (802.11b MODE)

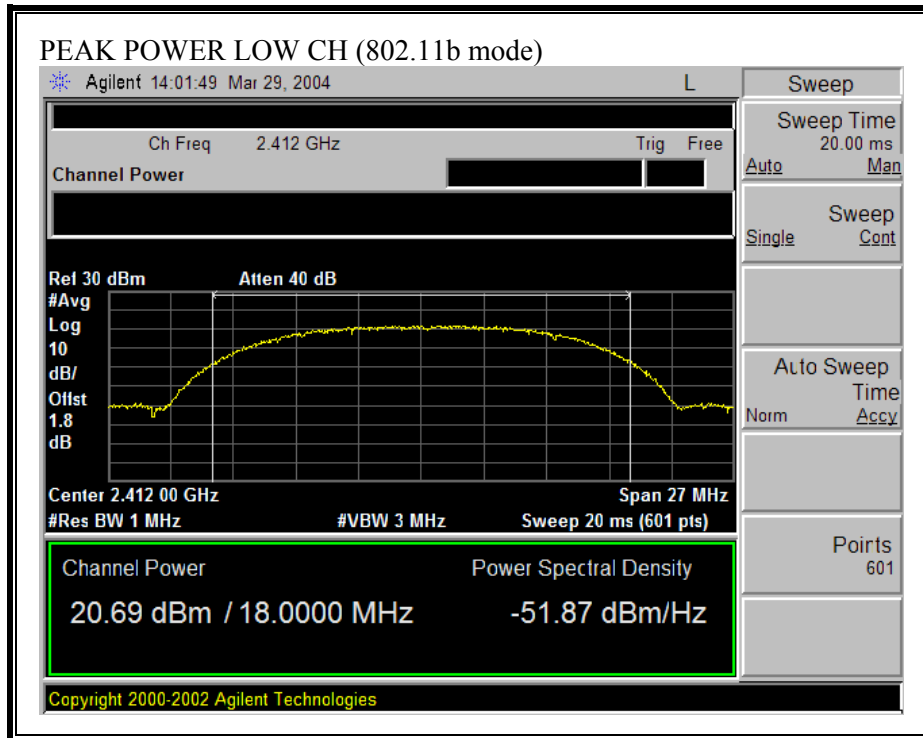

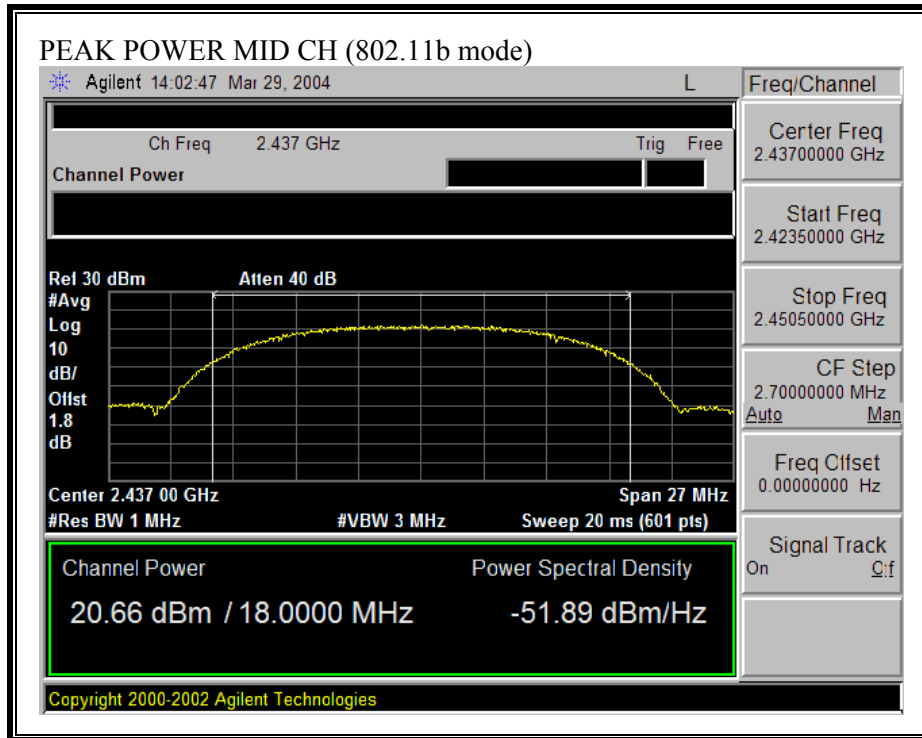


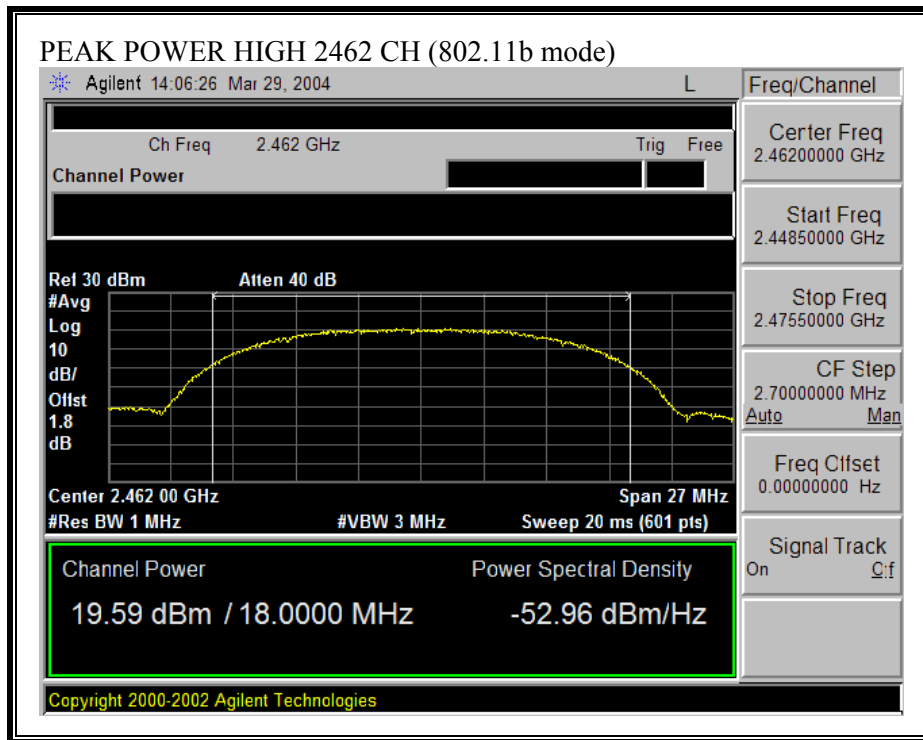


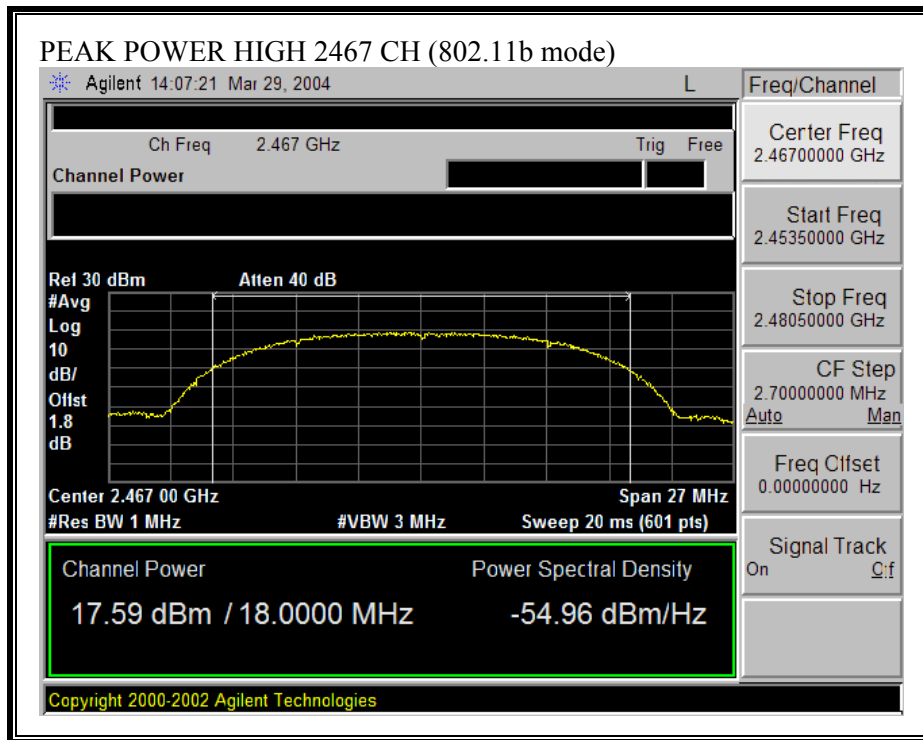


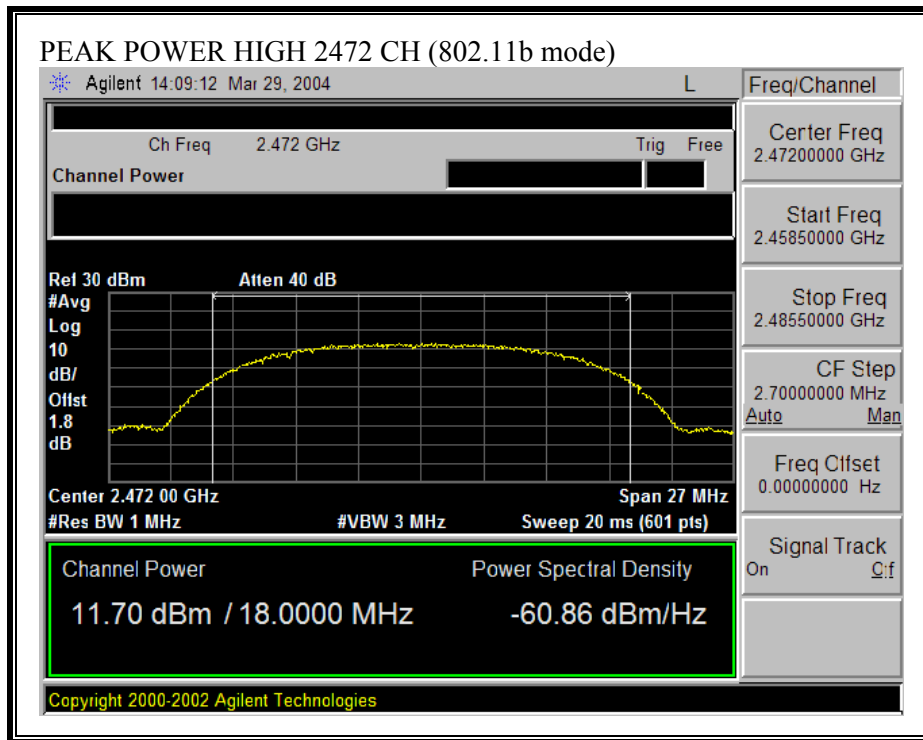



OUTPUT POWER (802.11g MODE)

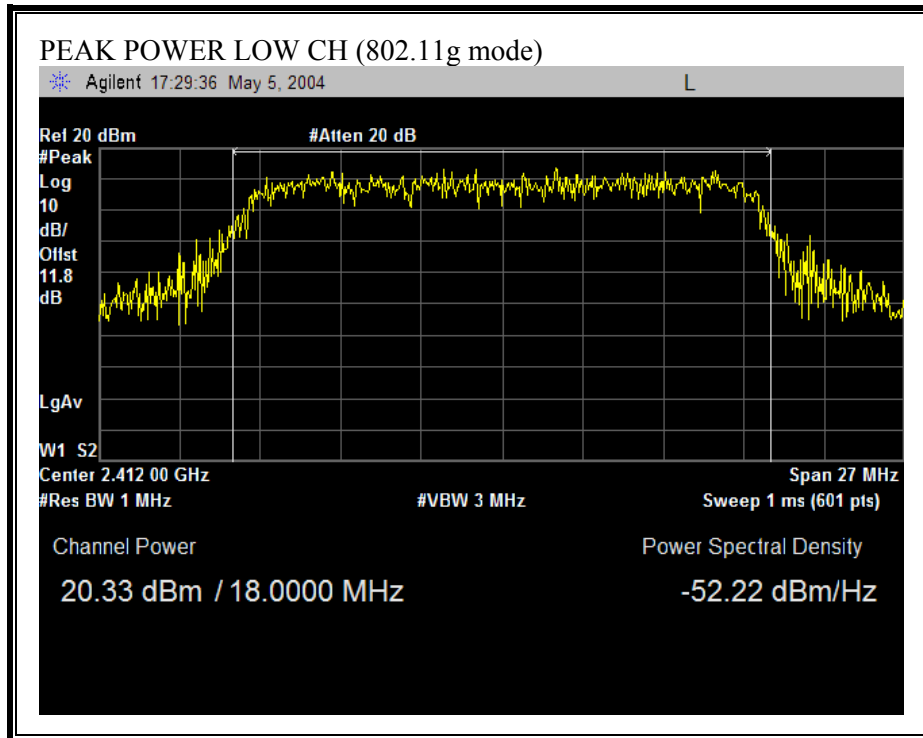

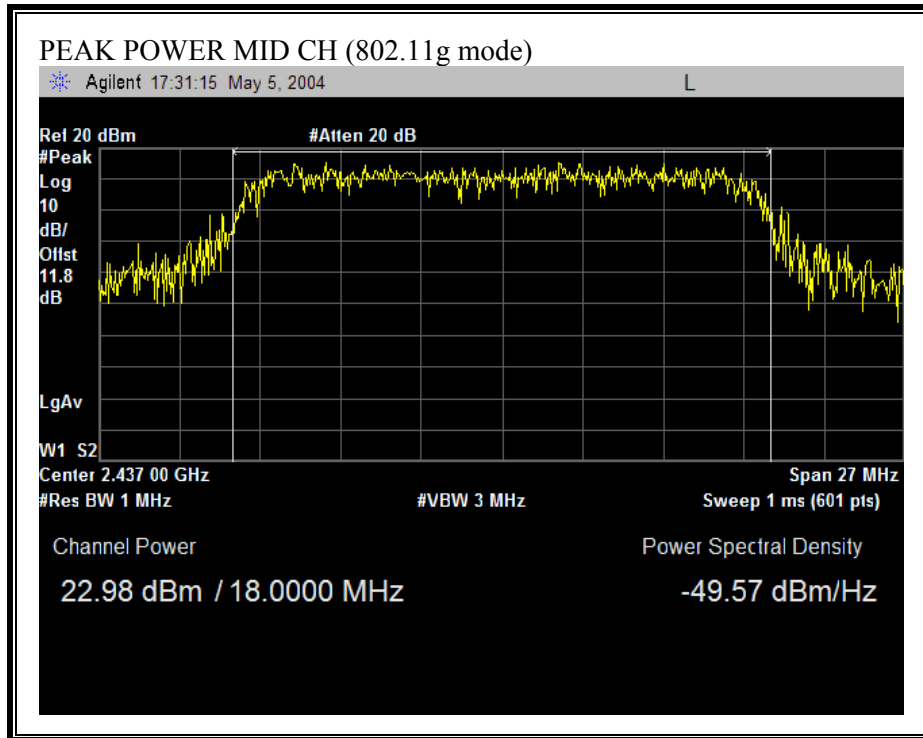


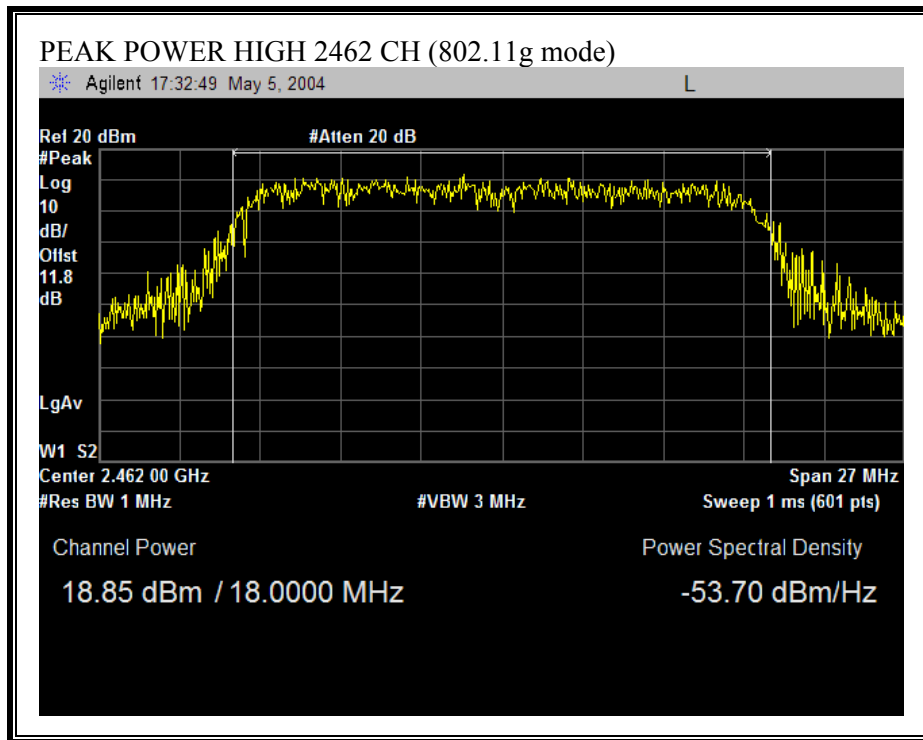

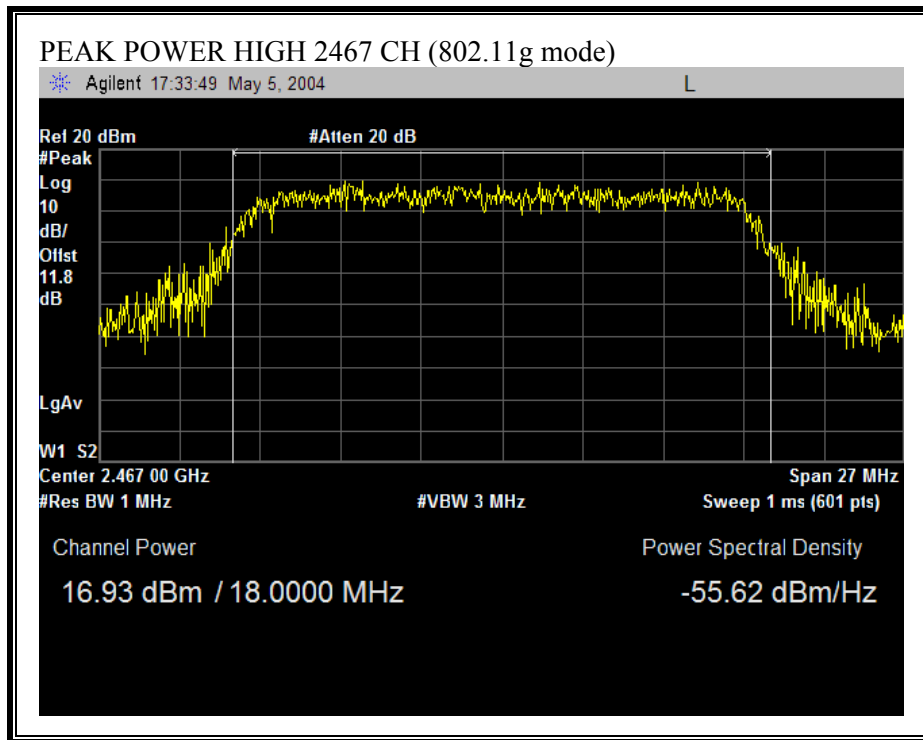

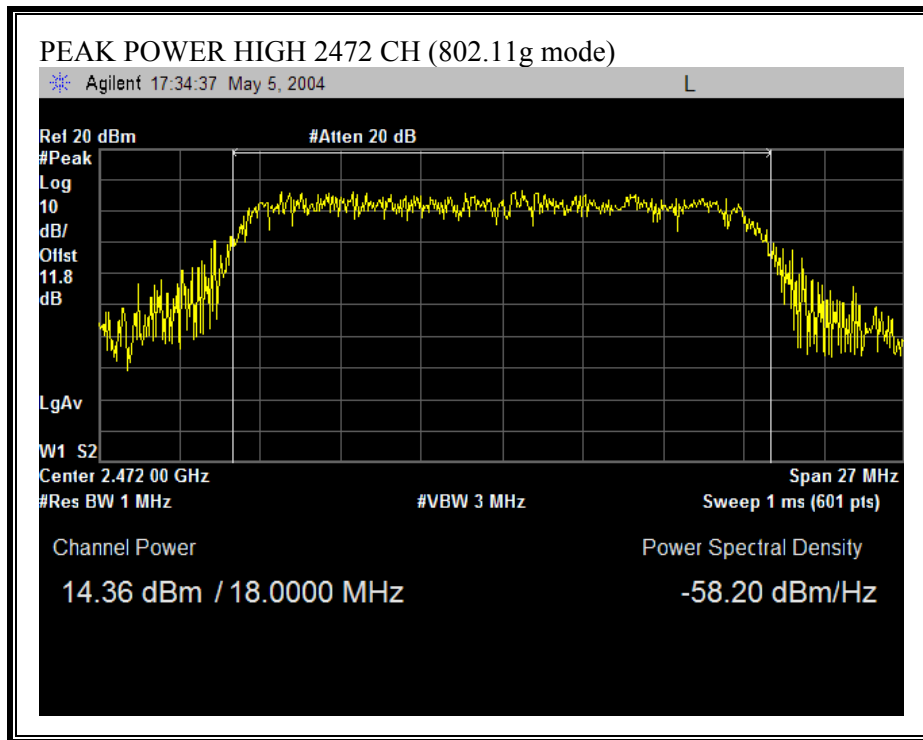

OUTPUT POWER (802.11g TURBO MODE)

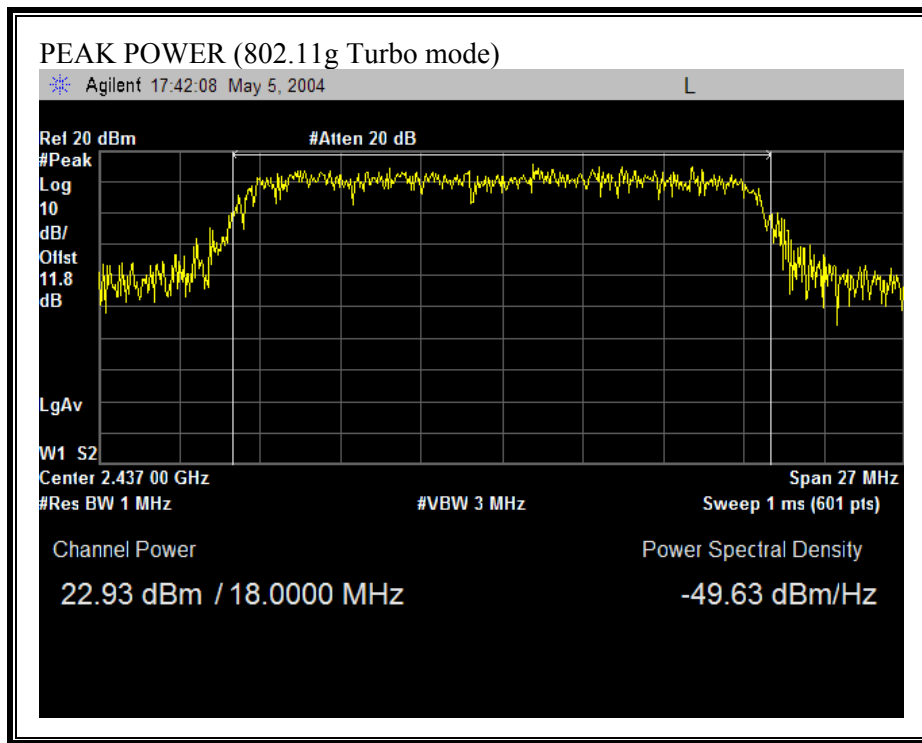

7.5. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Equation (1) and the measured peak power is used to calculate the MPE distance.

LIMITS

From §1.1310 Table 1 (B), $S = 1.0 \text{ mW/cm}^2$

RESULTS

No non-compliance noted:

Mode	Power Density Limit (mW/cm²)	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11b	1.0	20.69	0.00	3.05
802.11g	1.0	22.98	0.00	3.97
802.11g Turbo	1.0	22.93	0.00	3.95

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

7.6. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11.1 dB (including 10 dB pad and 1.1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11b Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	2412	19.50
Middle	2437	19.42
High	2462	18.65
High	2467	16.63
High	2472	10.80

802.11g Mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	2412	16.65
Middle	2437	19.50
High	2462	15.27
High	2467	13.33
High	2472	10.73

802.11g Turbo Mode

Channel	Frequency (MHz)	Average Power (dBm)
Middle	2437	19.42

7.7. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

RESULTS

No non-compliance noted:

802.11b Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	0.82	8	-7.18
Middle	2437	-1.42	8	-9.42
High	2462	-1.93	8	-9.93
High	2467	-6.31	8	-14.31
High	2472	-8.33	8	-16.33


802.11g Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-5.71	8	-13.71
Middle	2437	-3.22	8	-11.22
High	2462	-8.48	8	-16.48
High	2467	-10.45	8	-18.45
High	2472	-16.33	8	-24.33


802.11g Turbo Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Middle	2437	-5.41	8	-13.41


PEAK POWER SPECTRAL DENSITY (802.11b MODE)

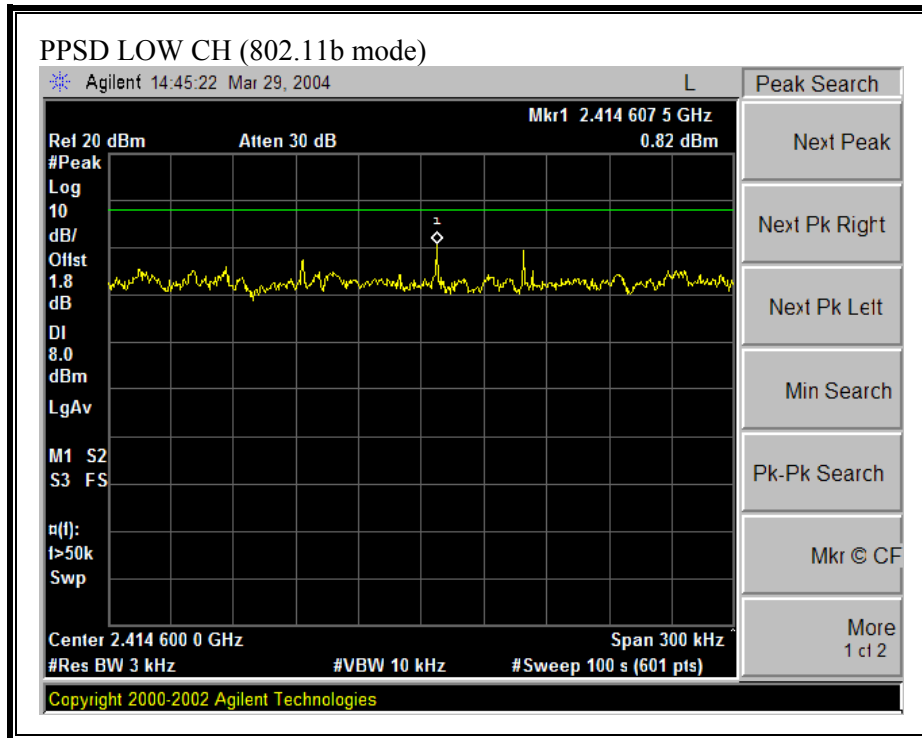

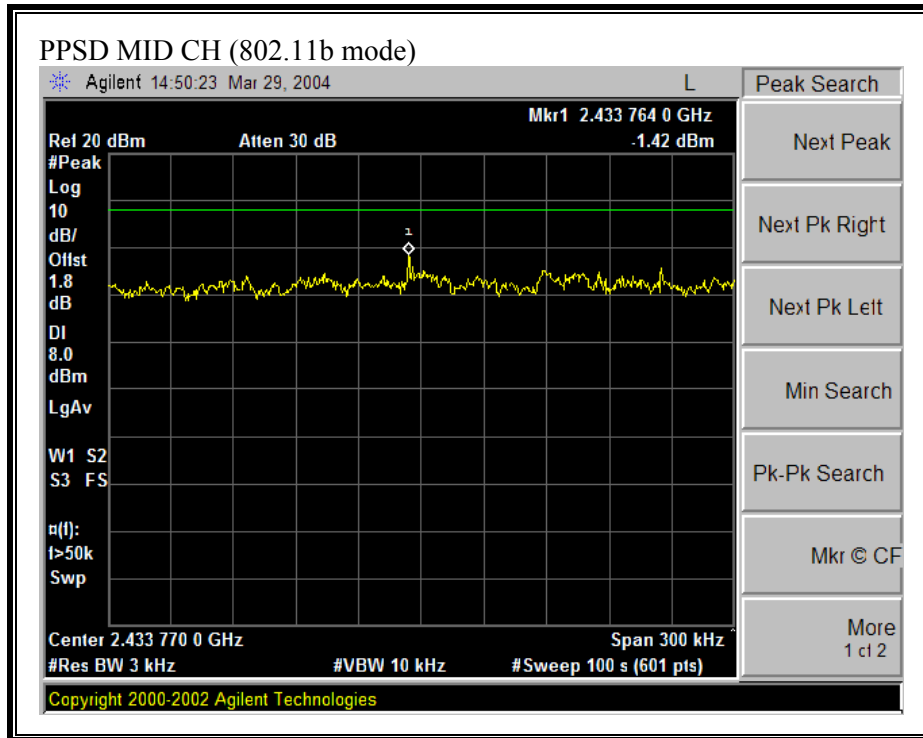


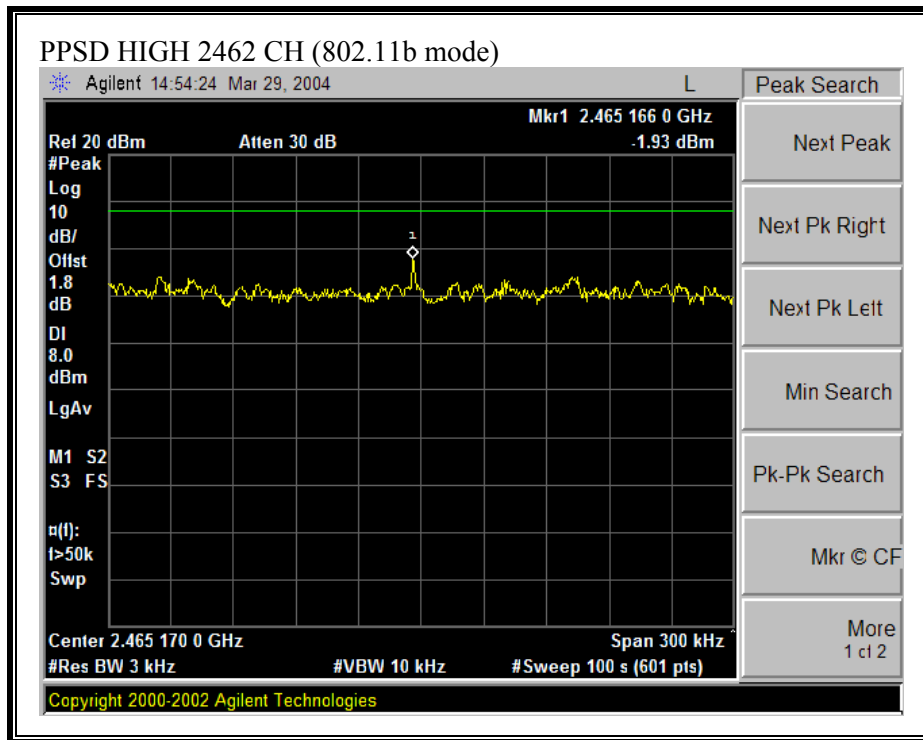


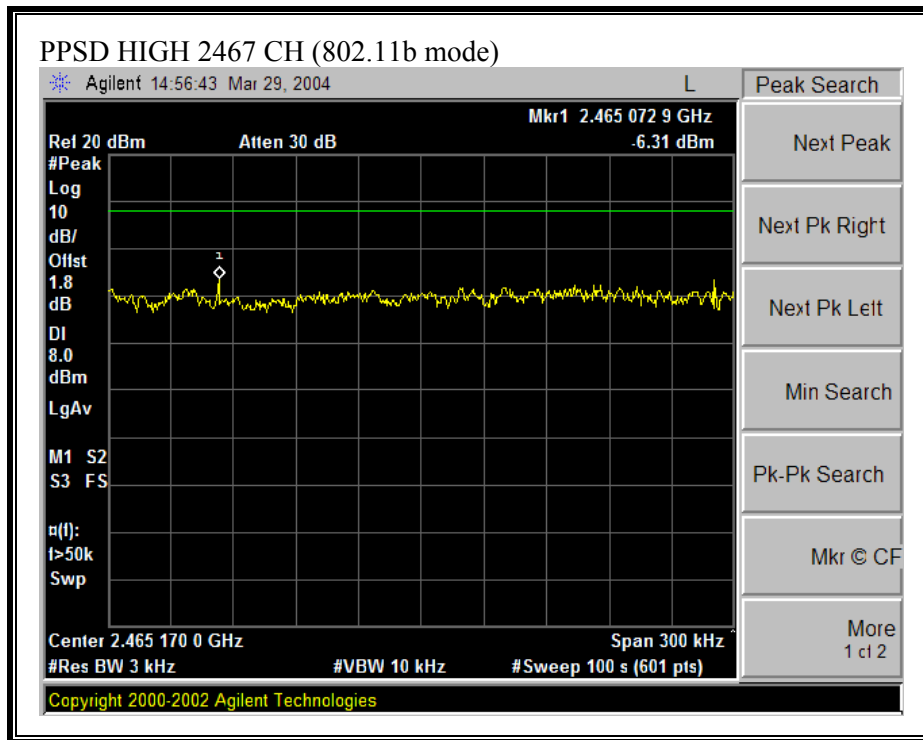


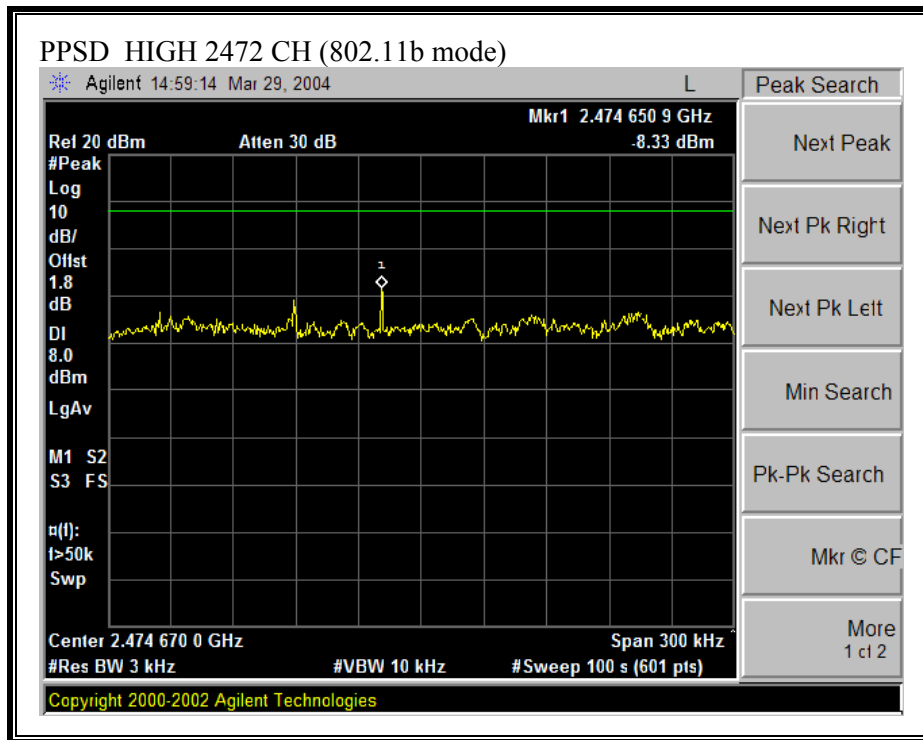



PEAK POWER SPECTRAL DENSITY (802.11g MODE)

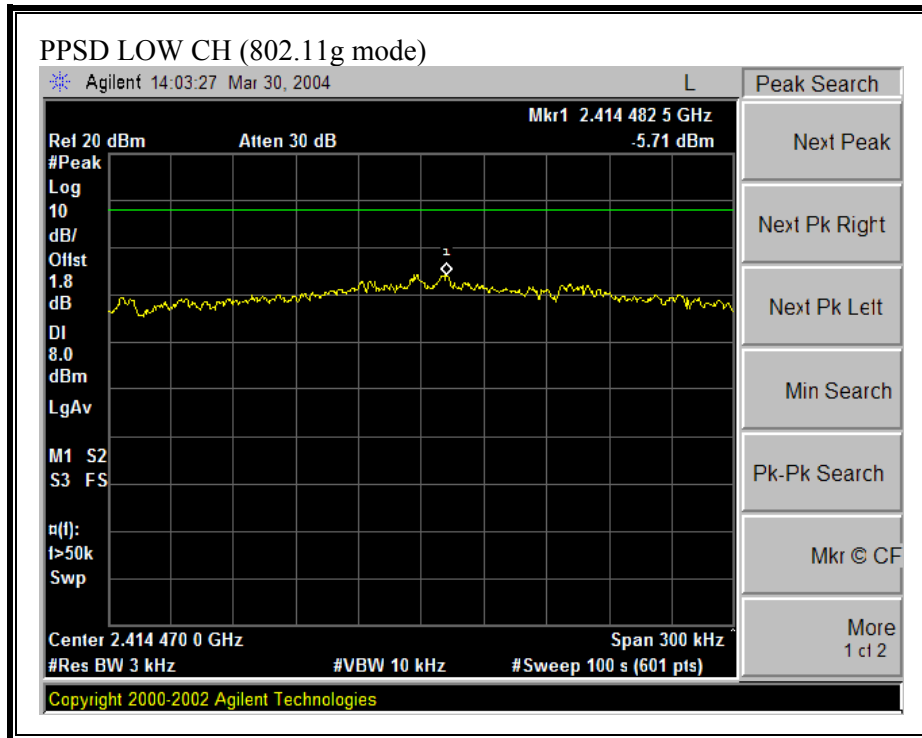

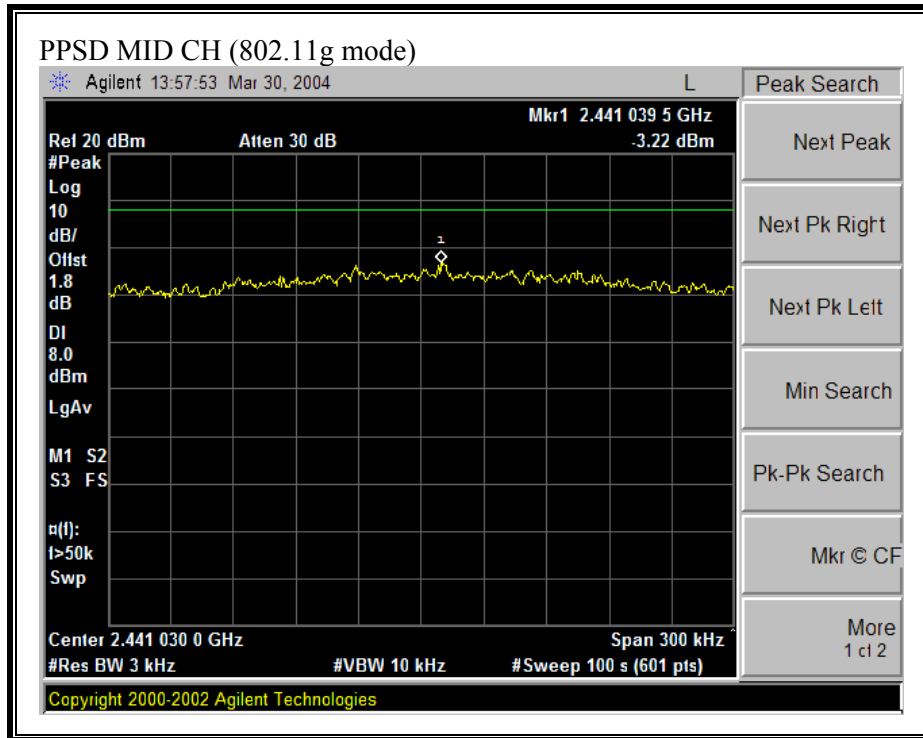


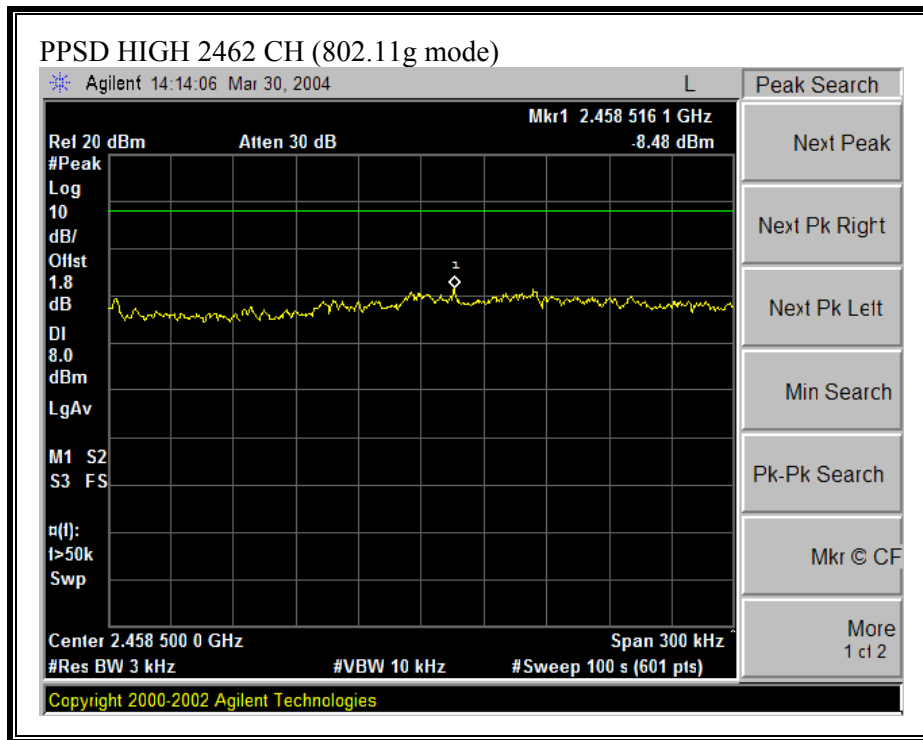

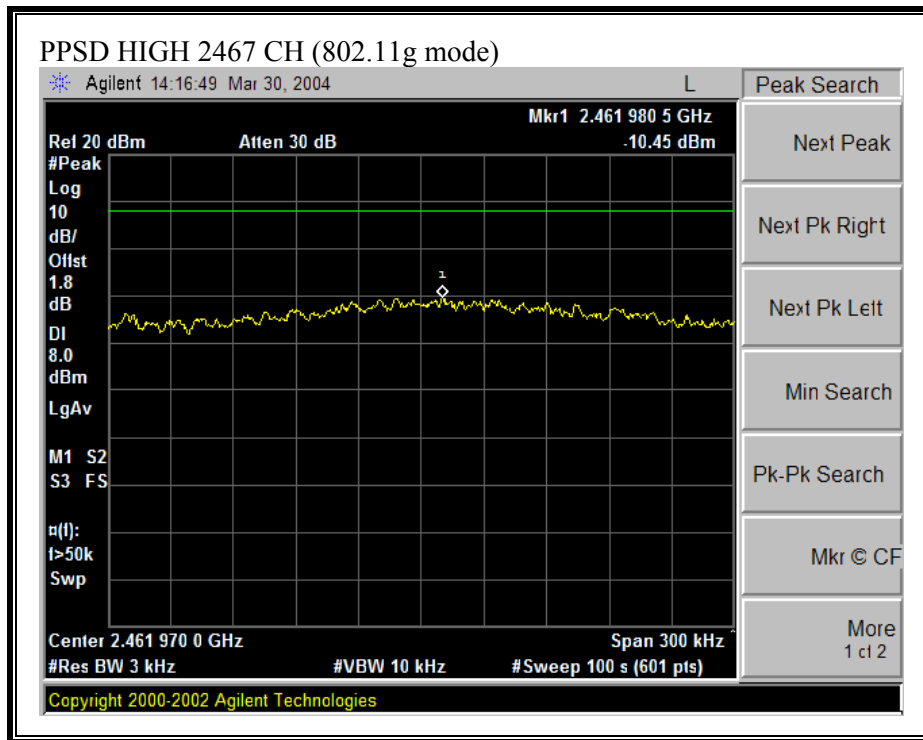

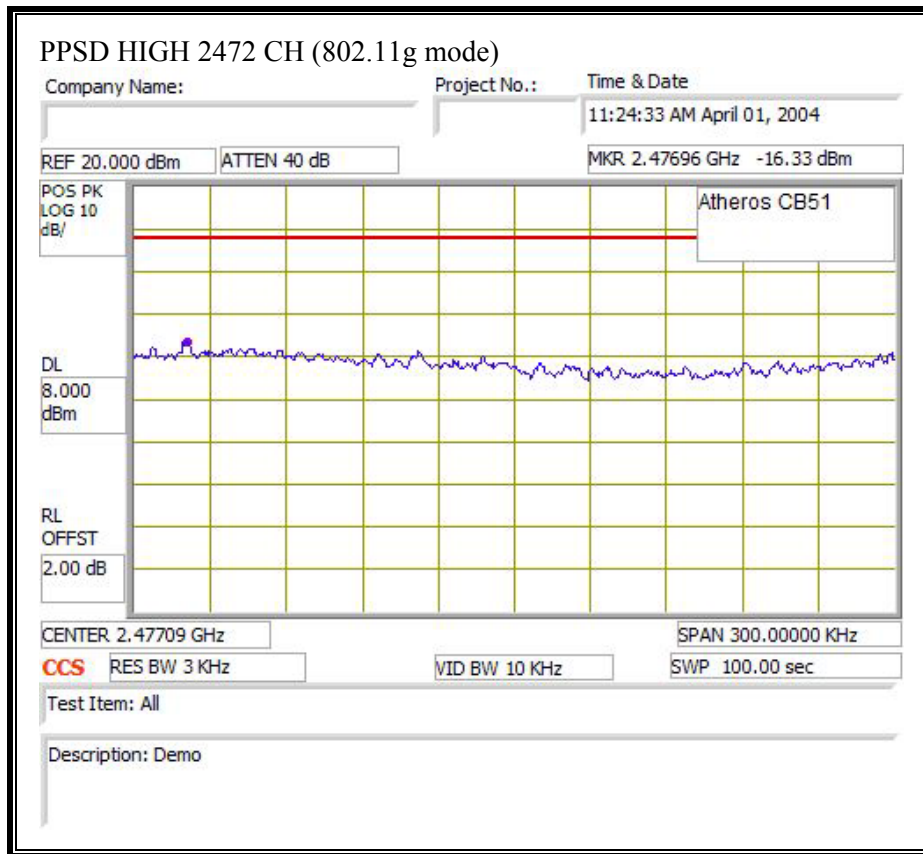

PEAK POWER SPECTRAL DENSITY (802.11g TURBO MODE)

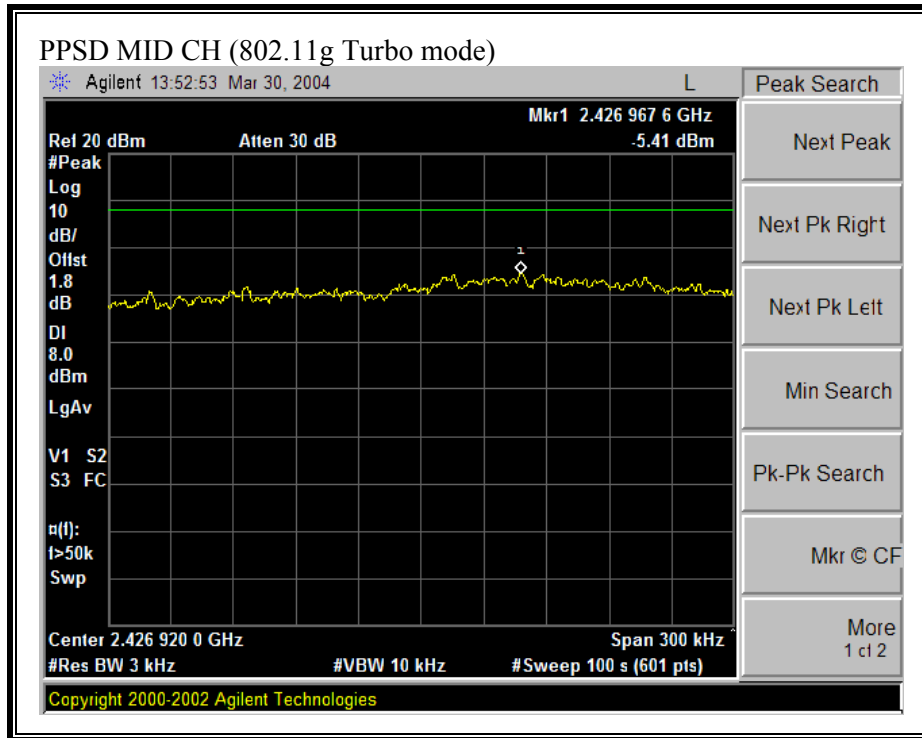

7.8. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS


No non-compliance noted:


SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)

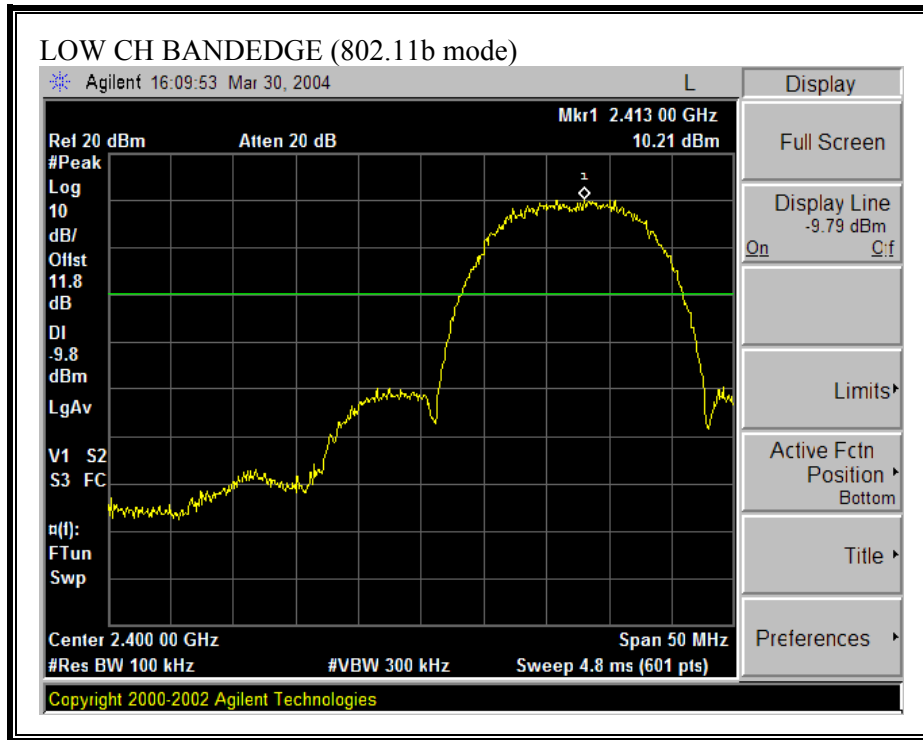

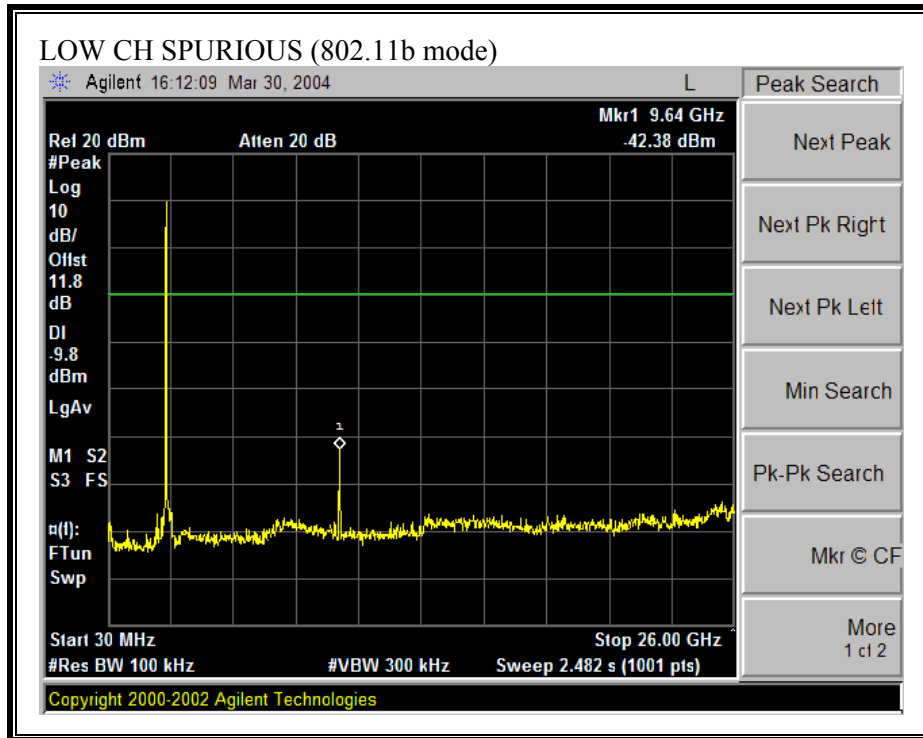



SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)

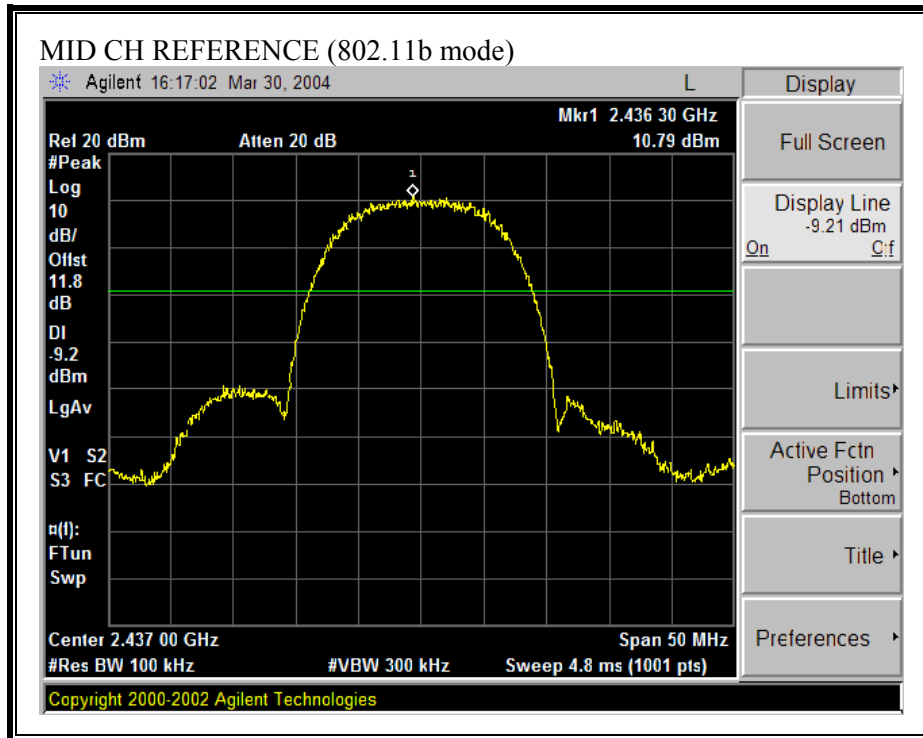


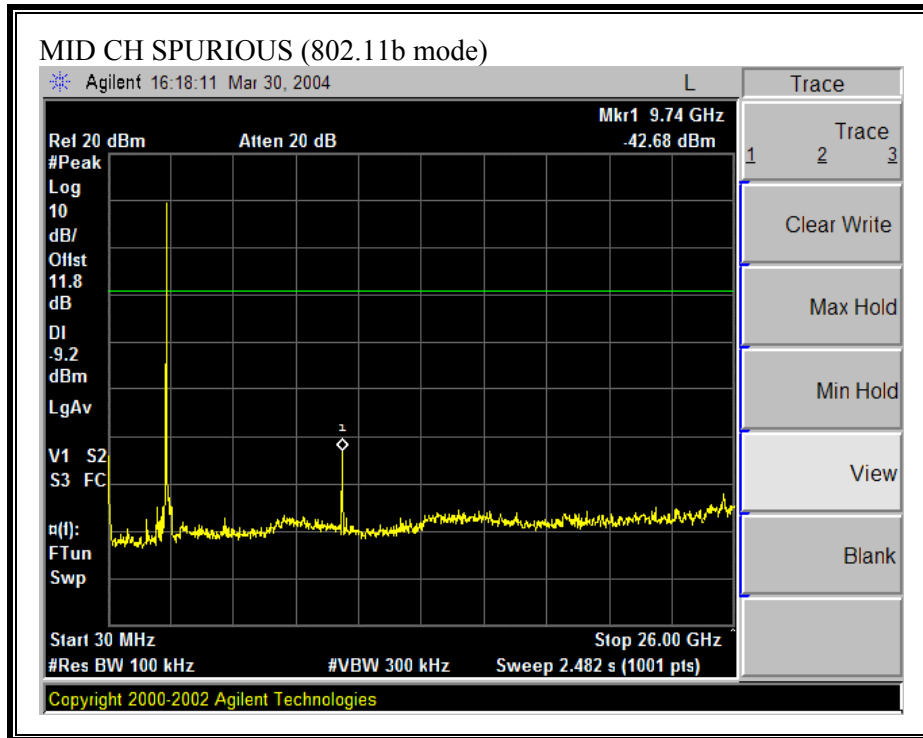



SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)

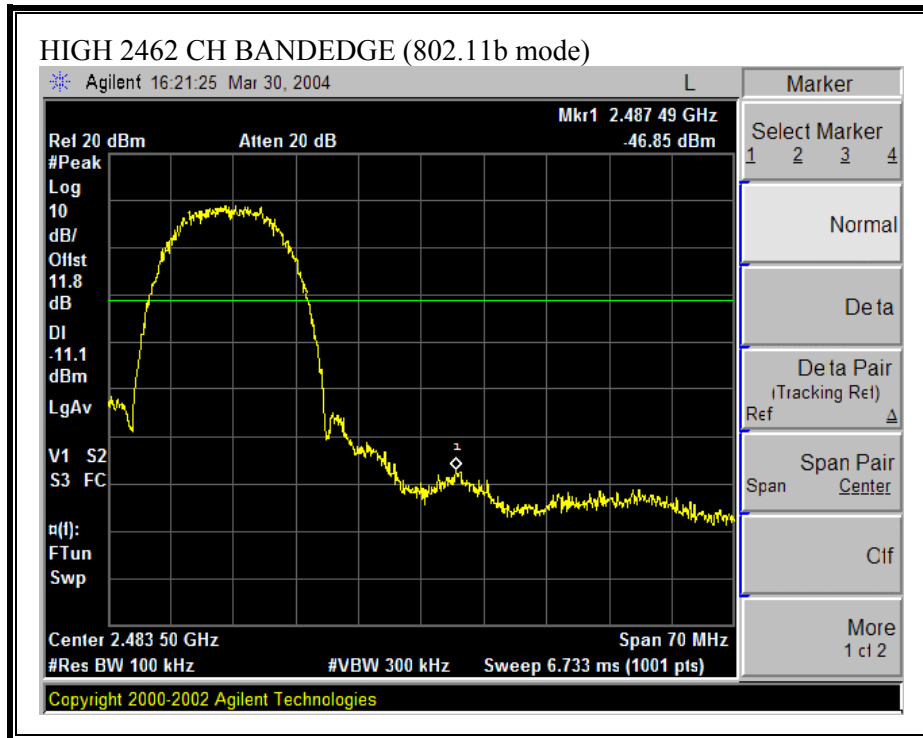


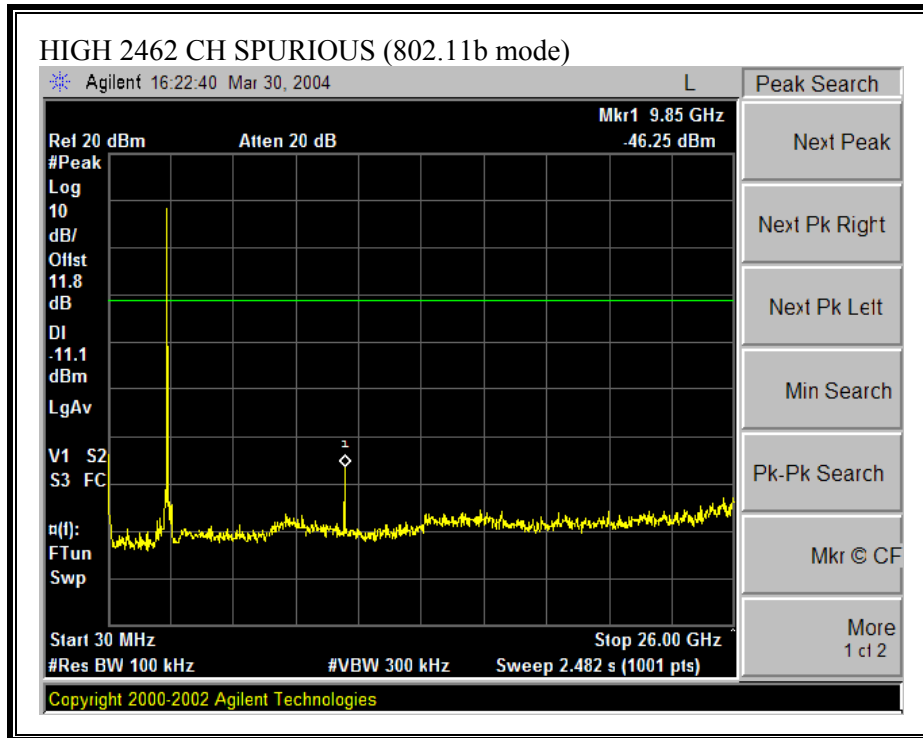

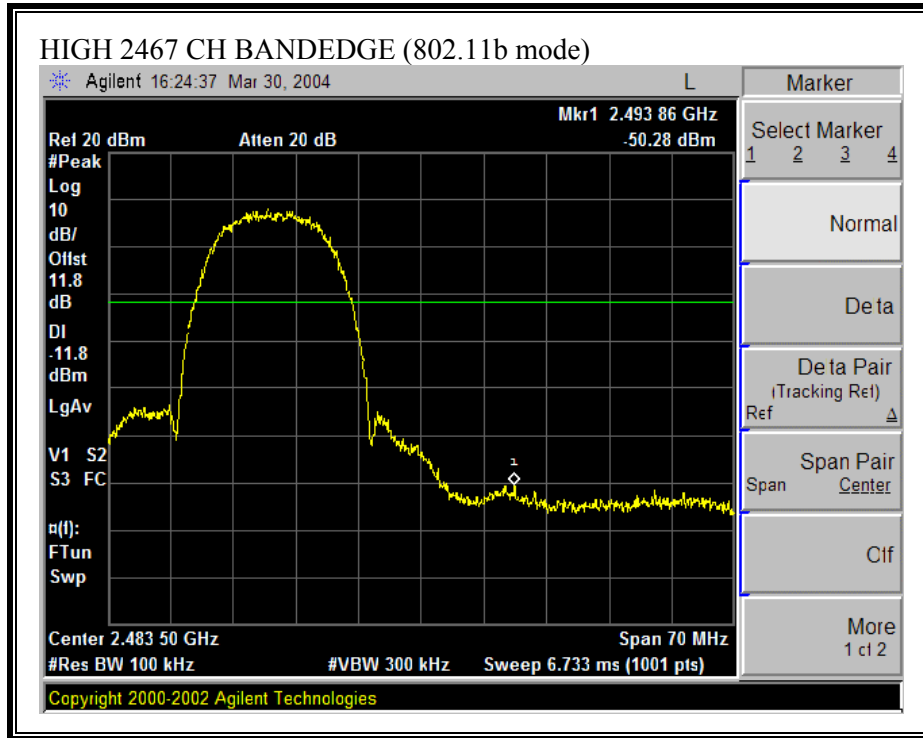


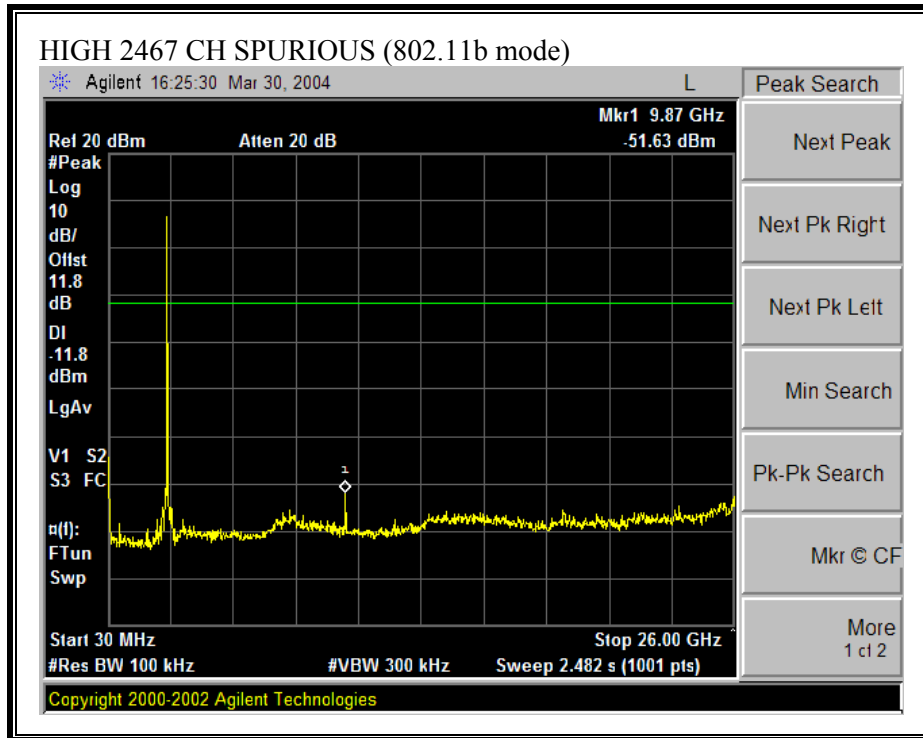


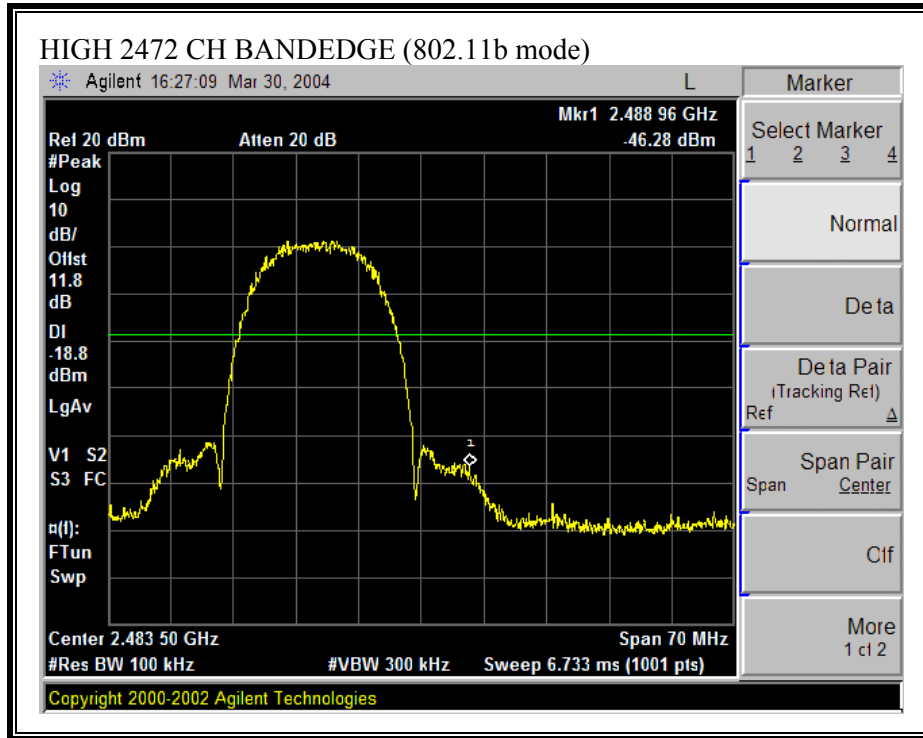

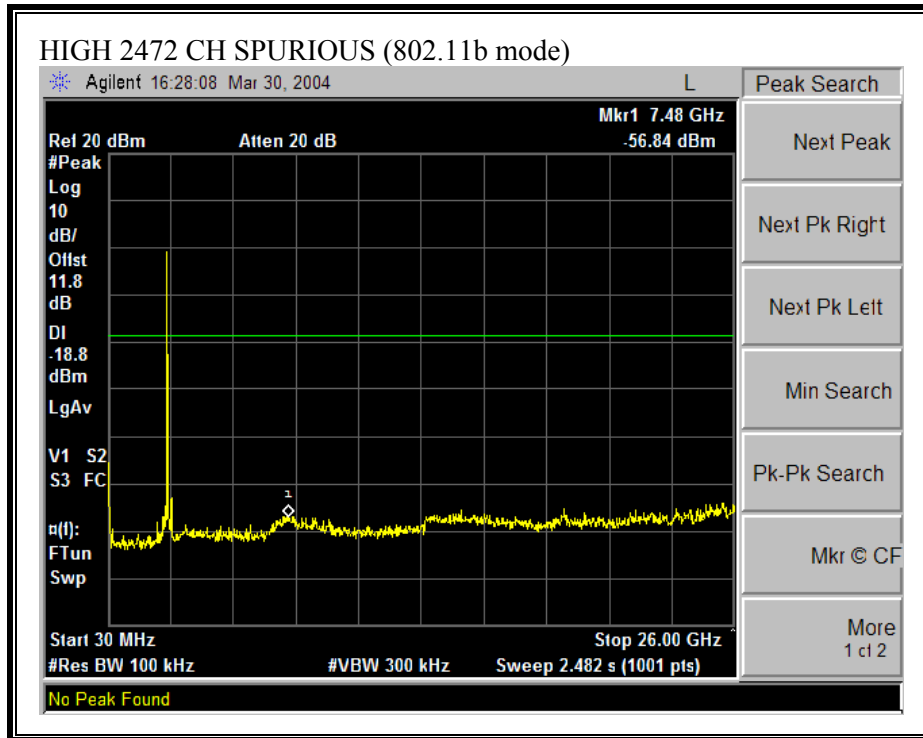



SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)

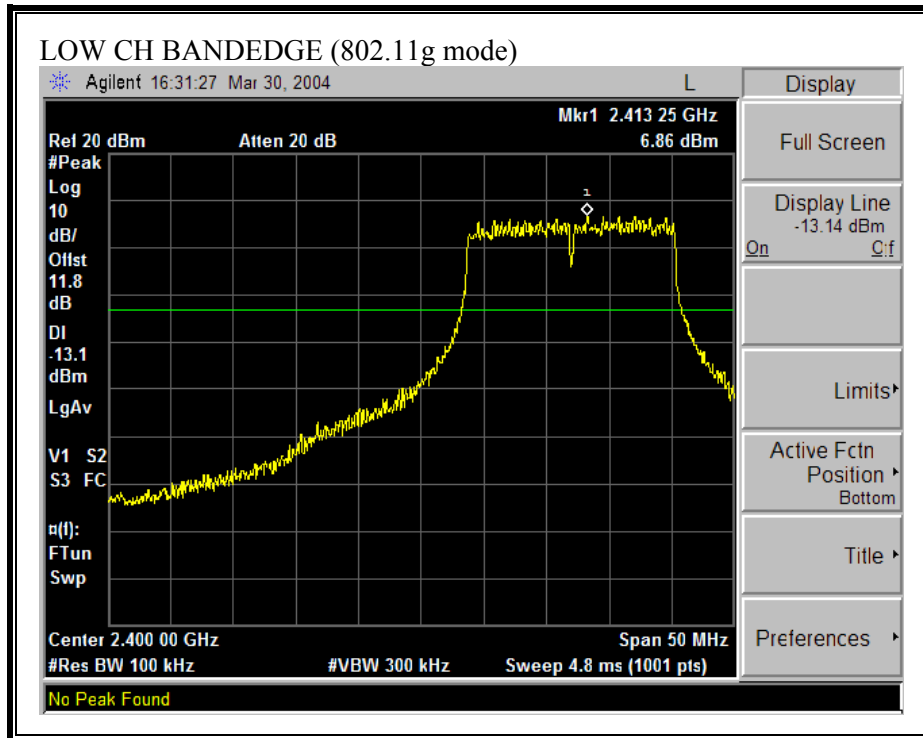

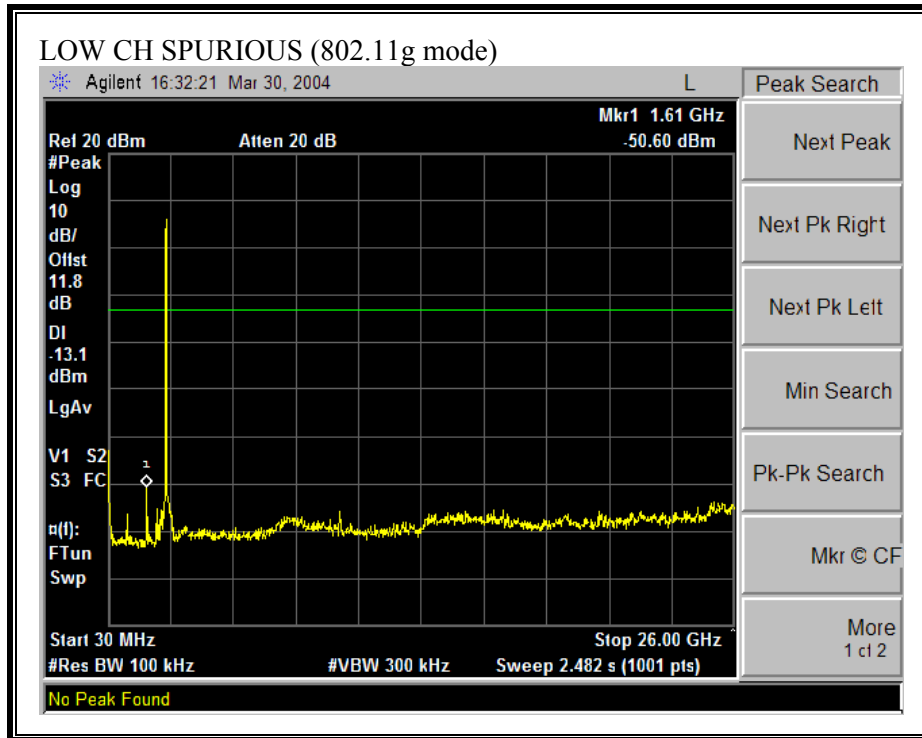



SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)

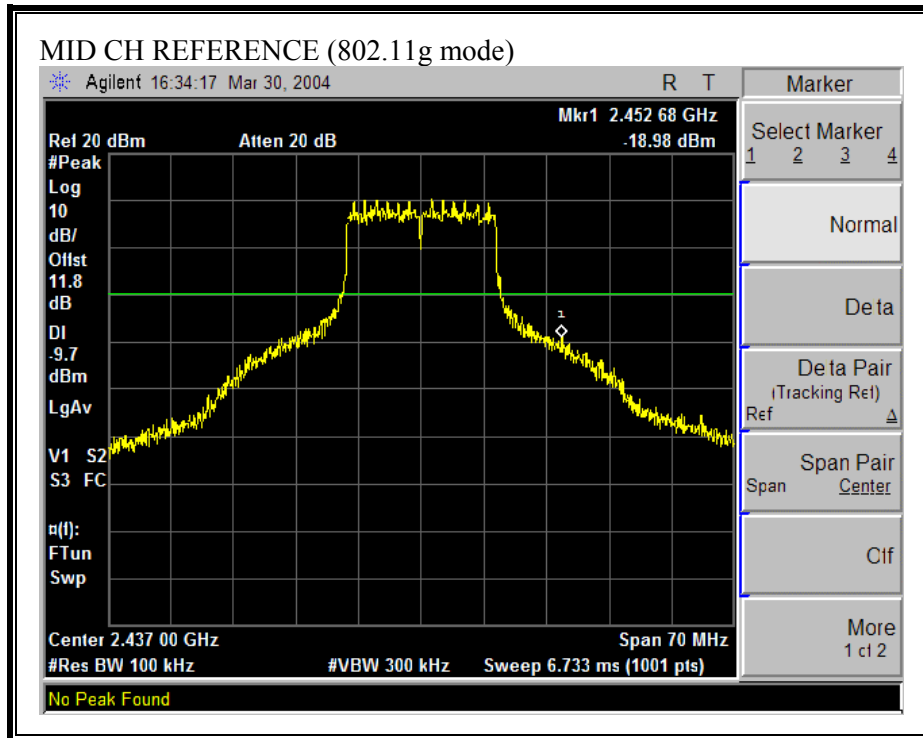


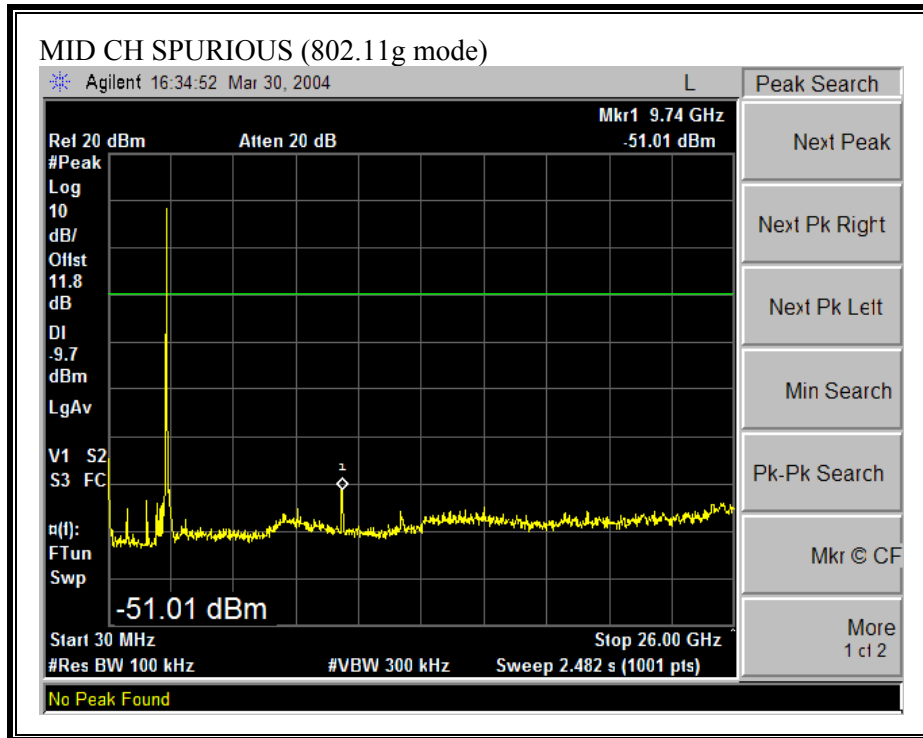



SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)

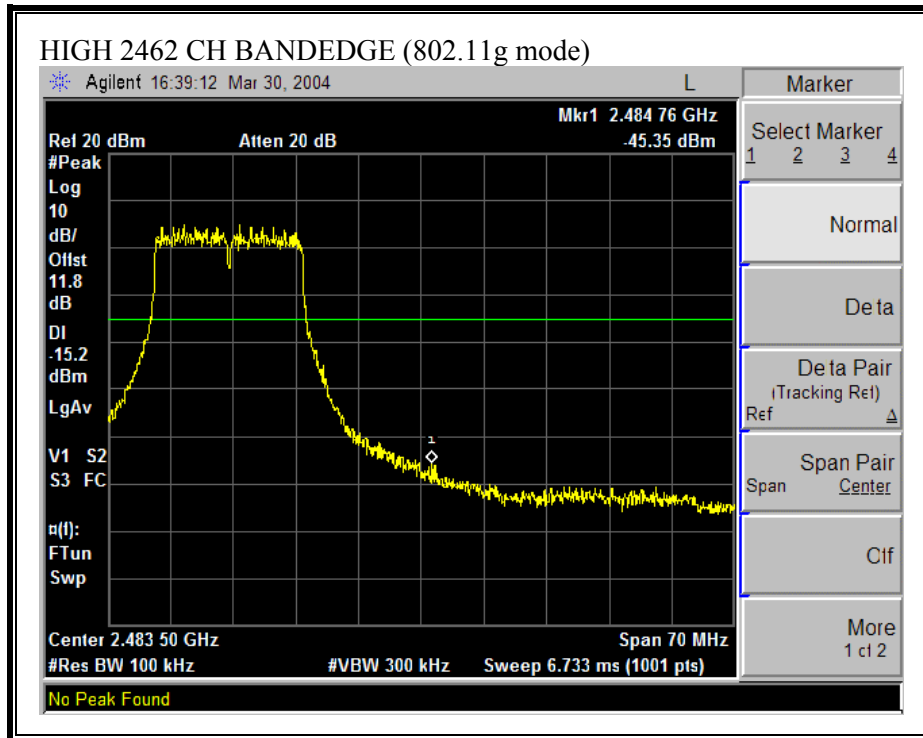


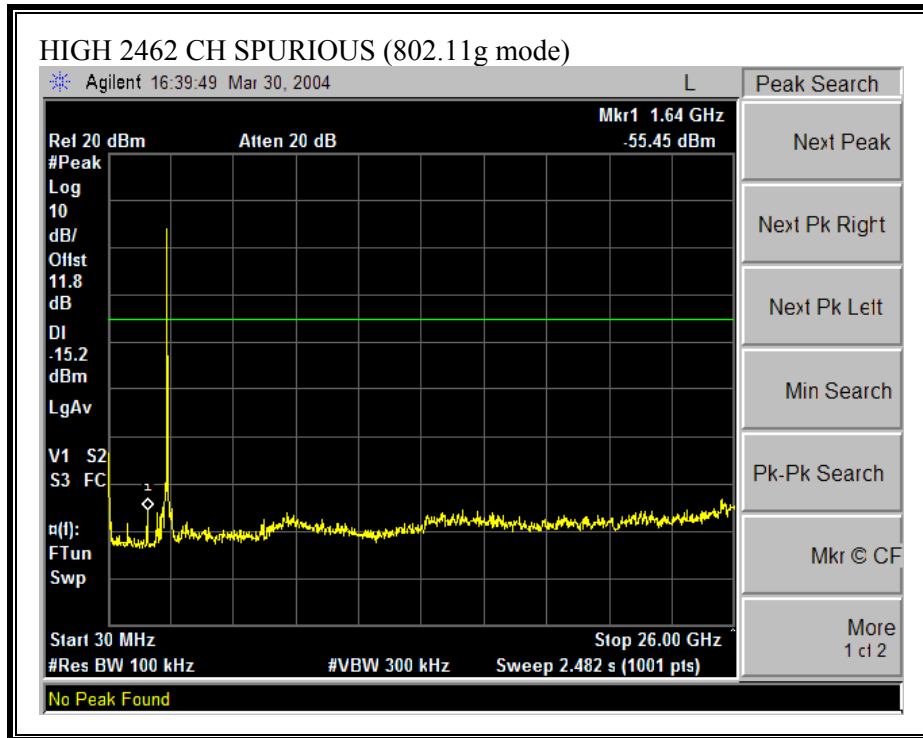

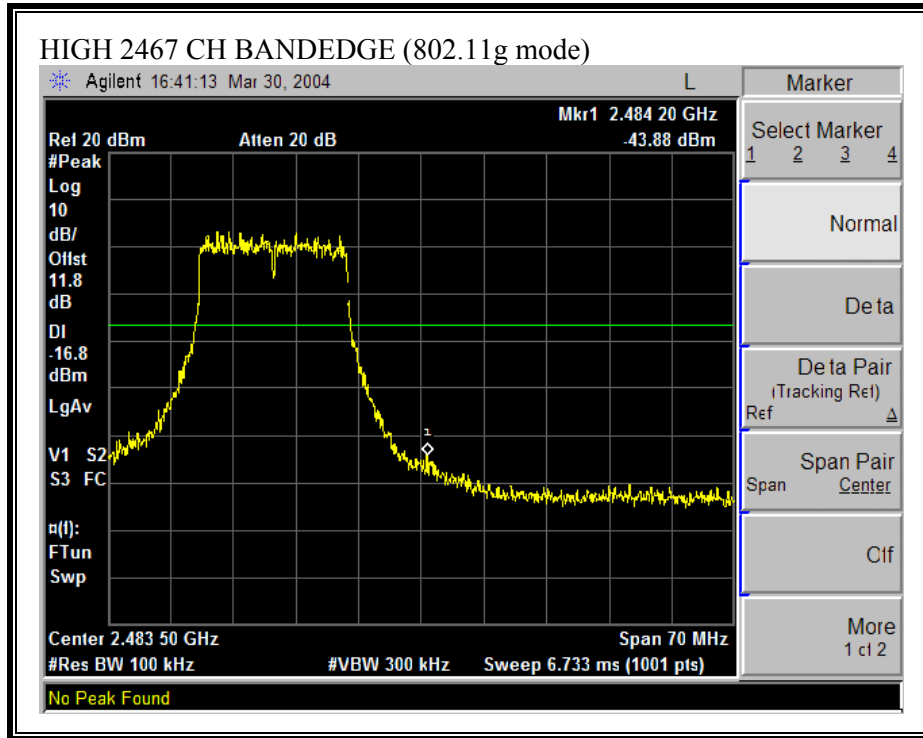


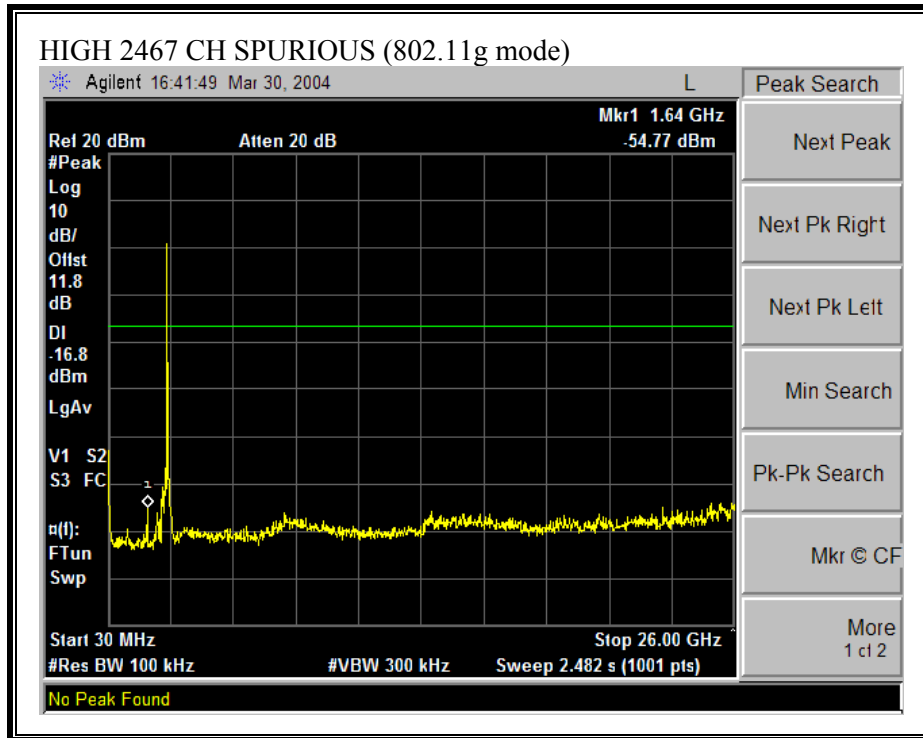


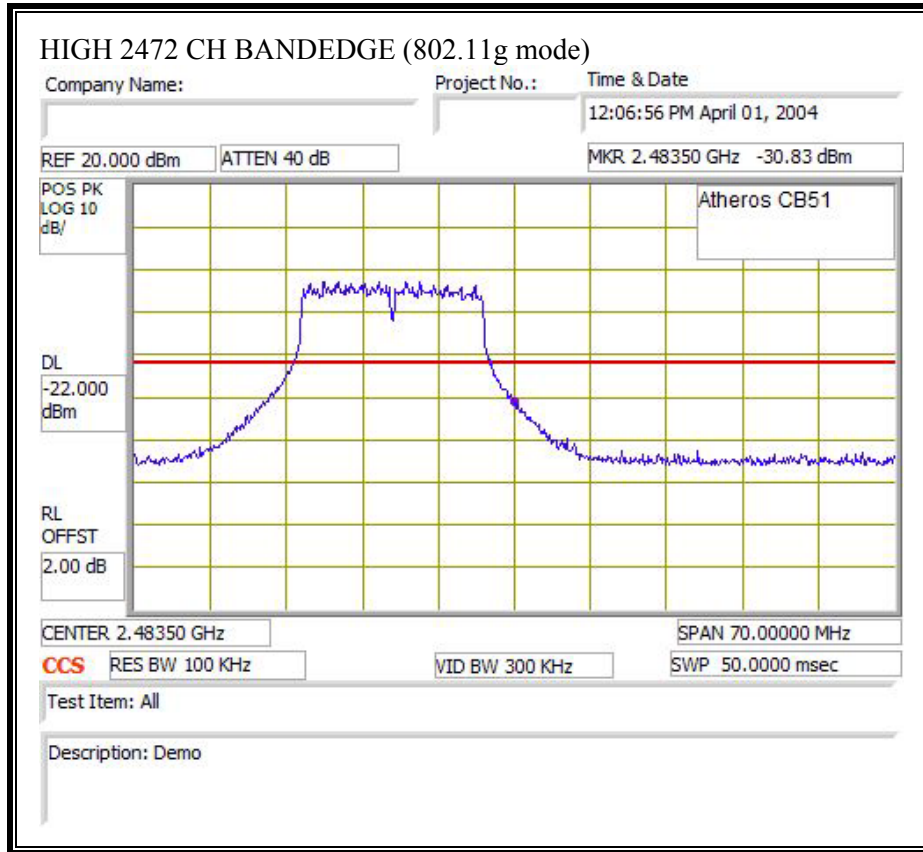

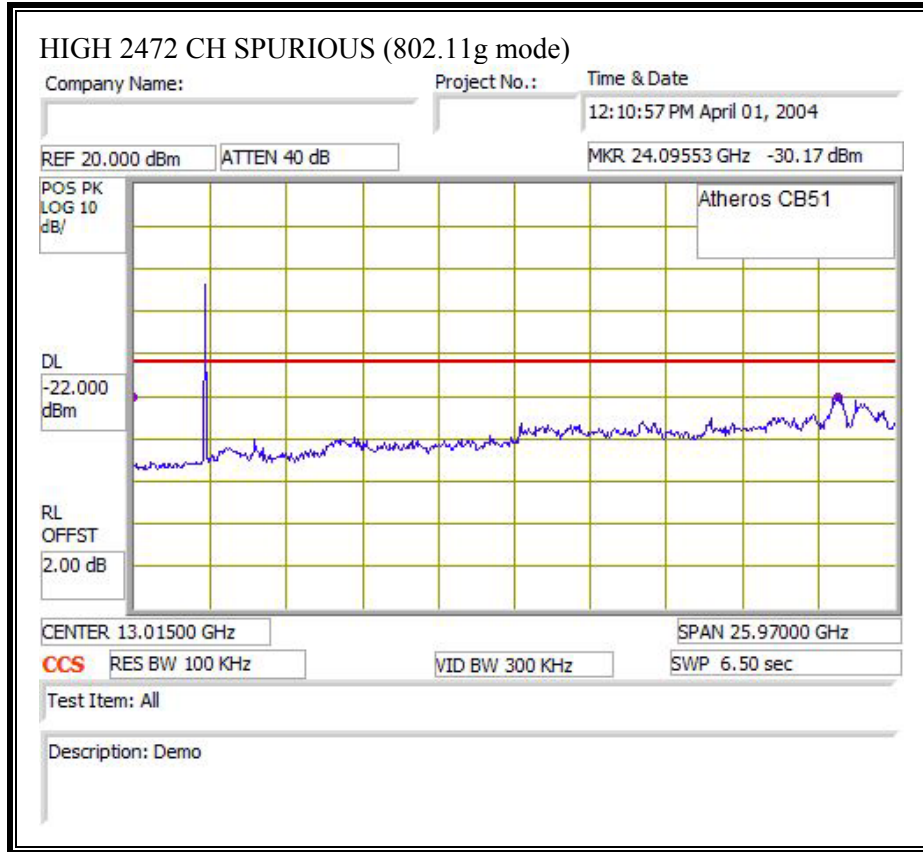

SPURIOUS EMISSIONS, MID CHANNEL (802.11g TURBO MODE)

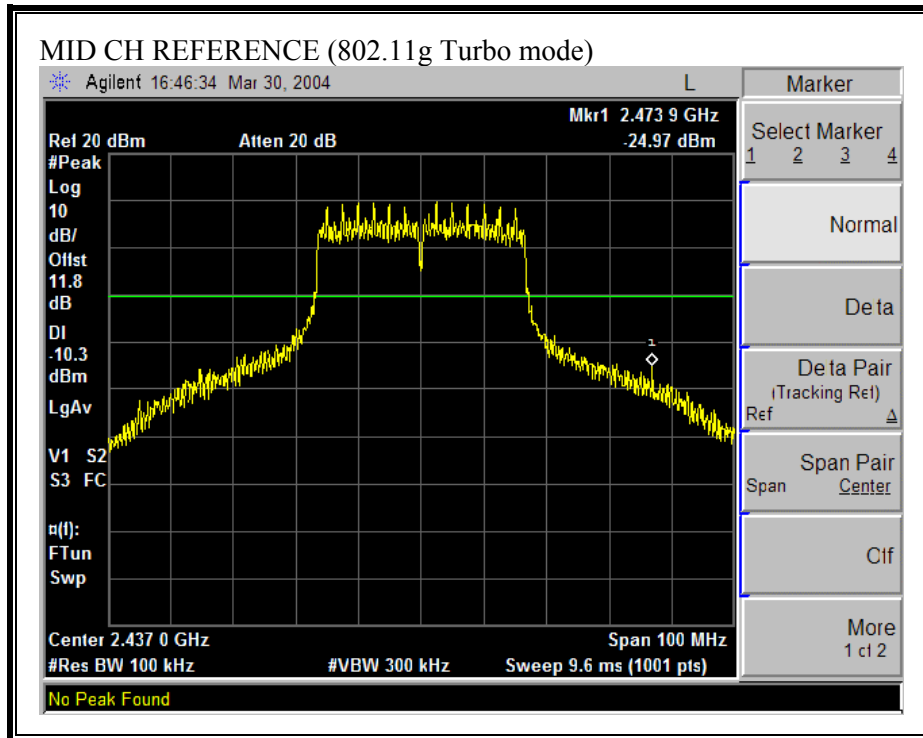

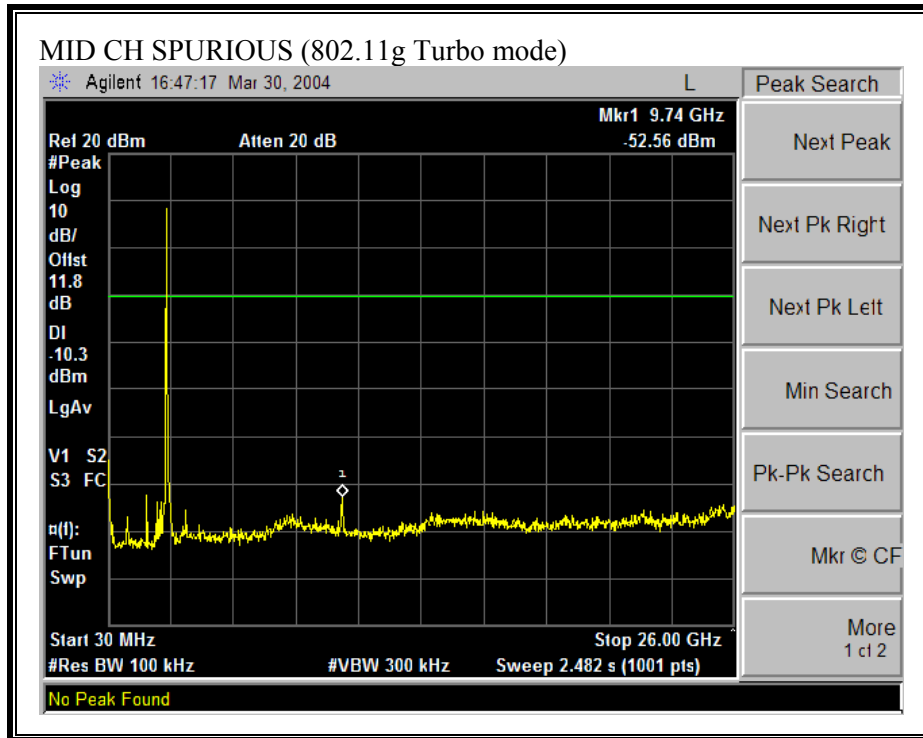

7.9. RADIATED EMISSIONS

7.9.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


RESULTS

No non-compliance noted:


7.9.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

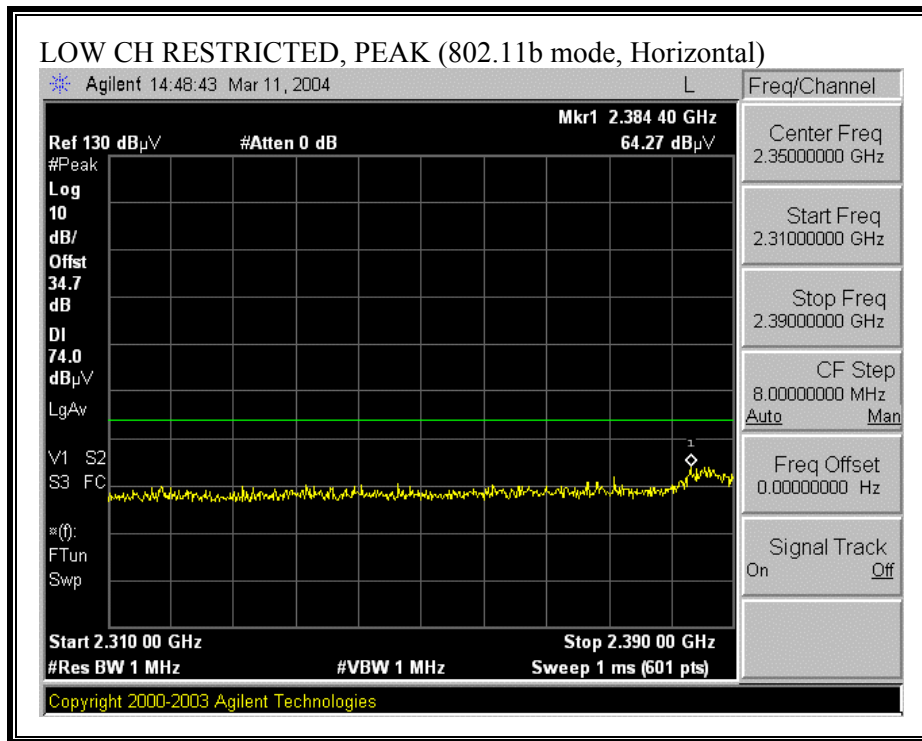

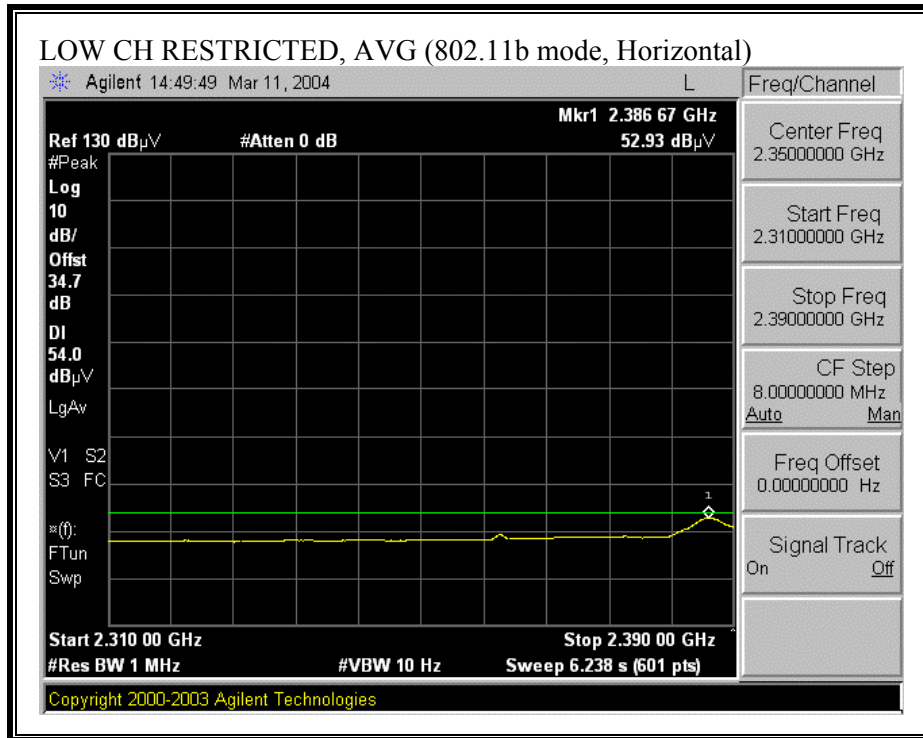



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

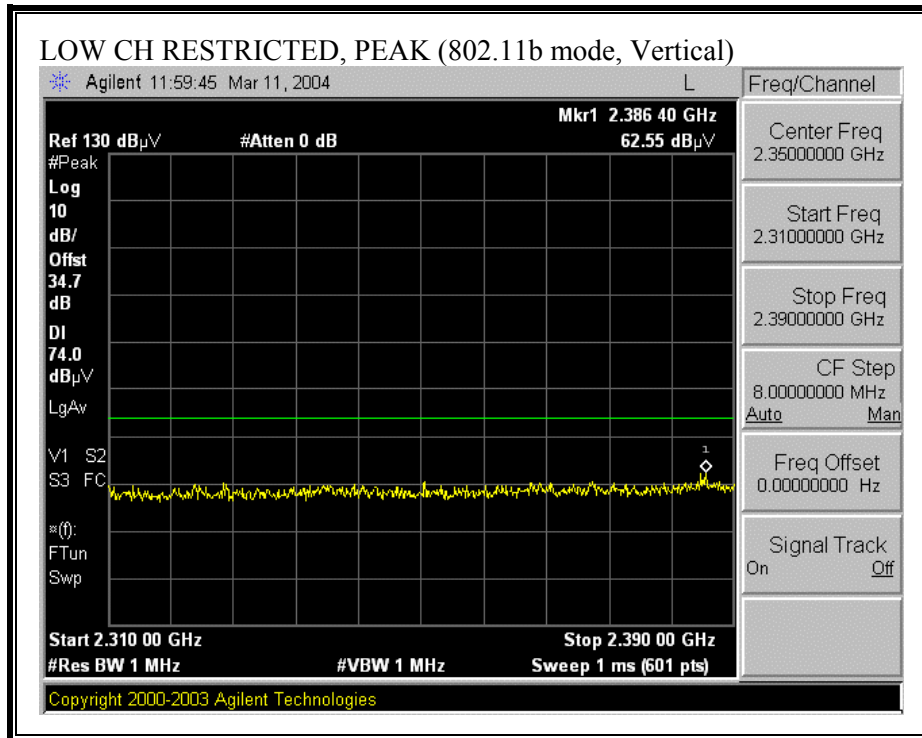


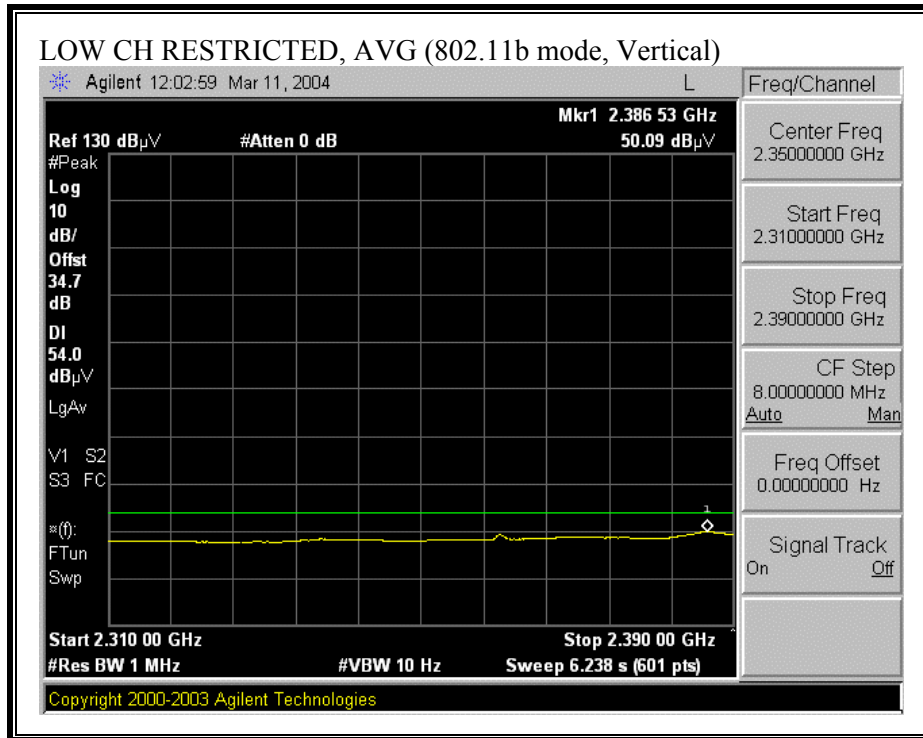



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

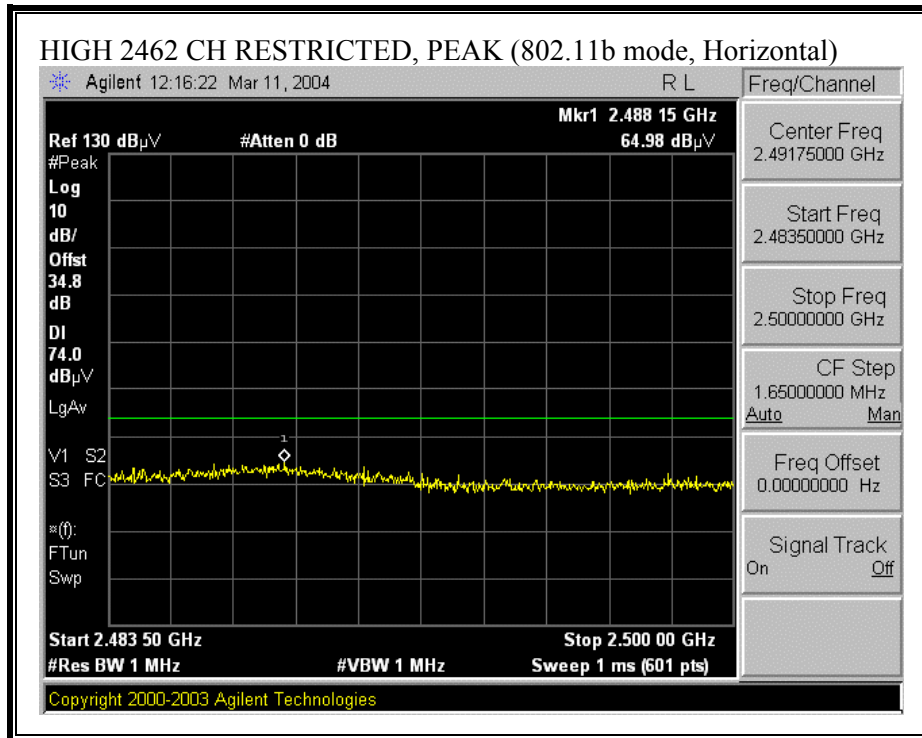


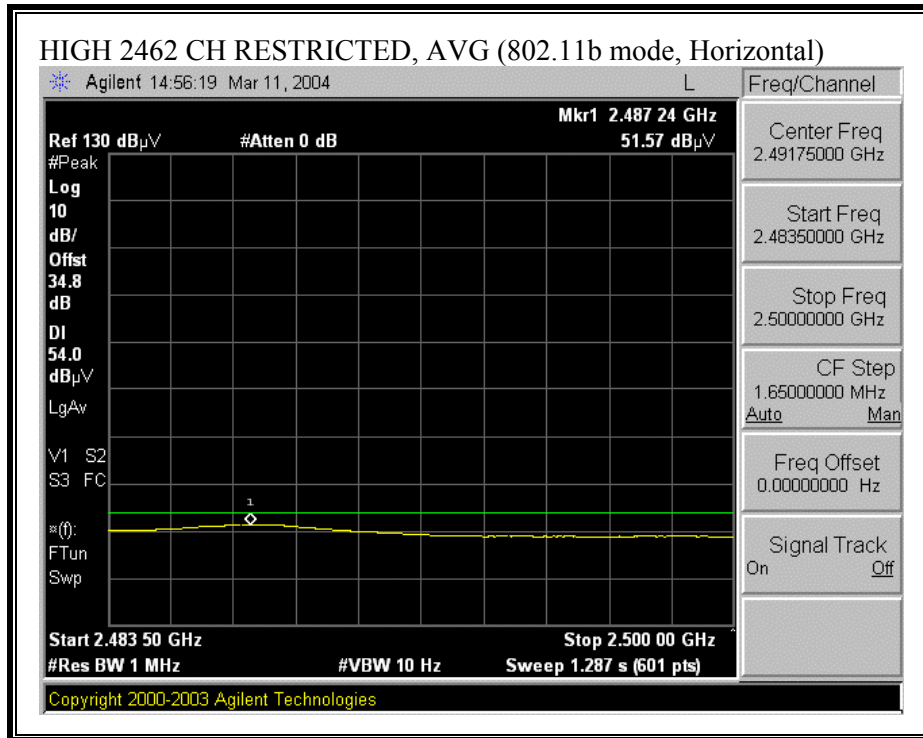

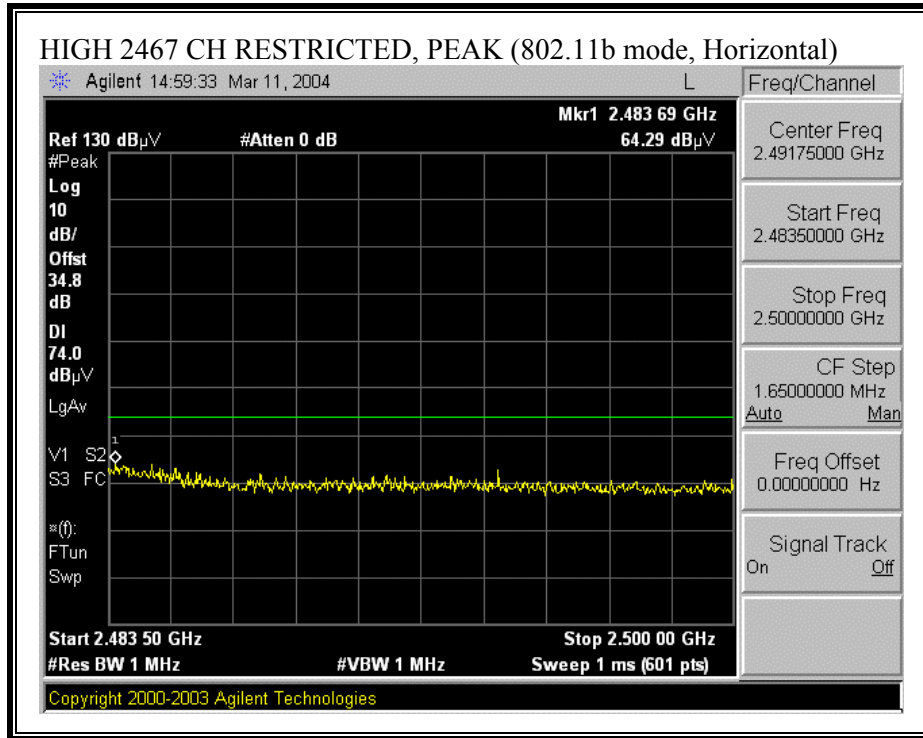


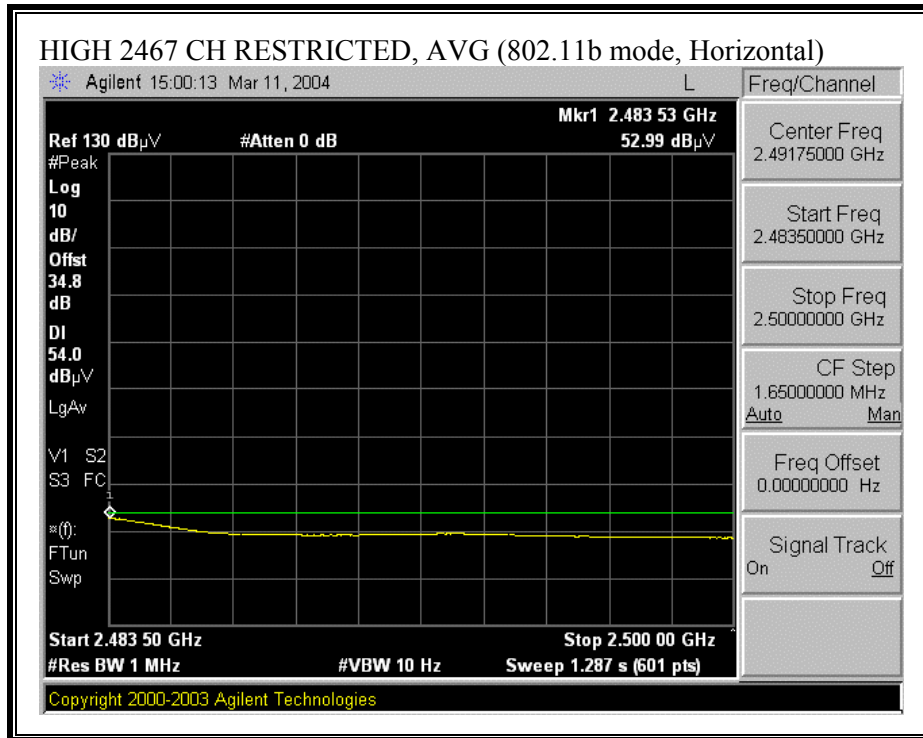


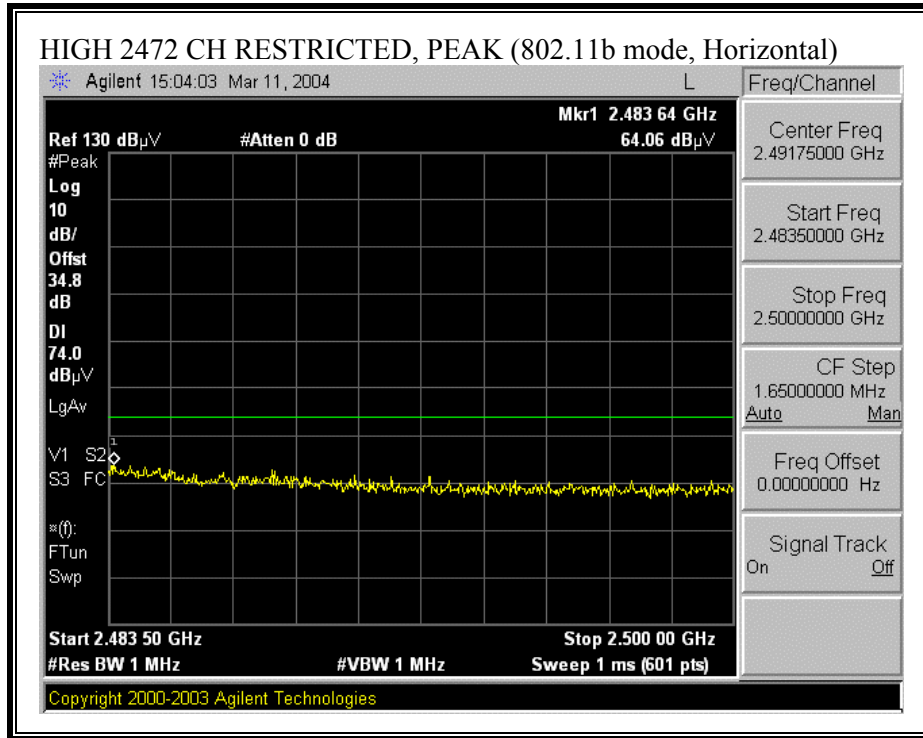


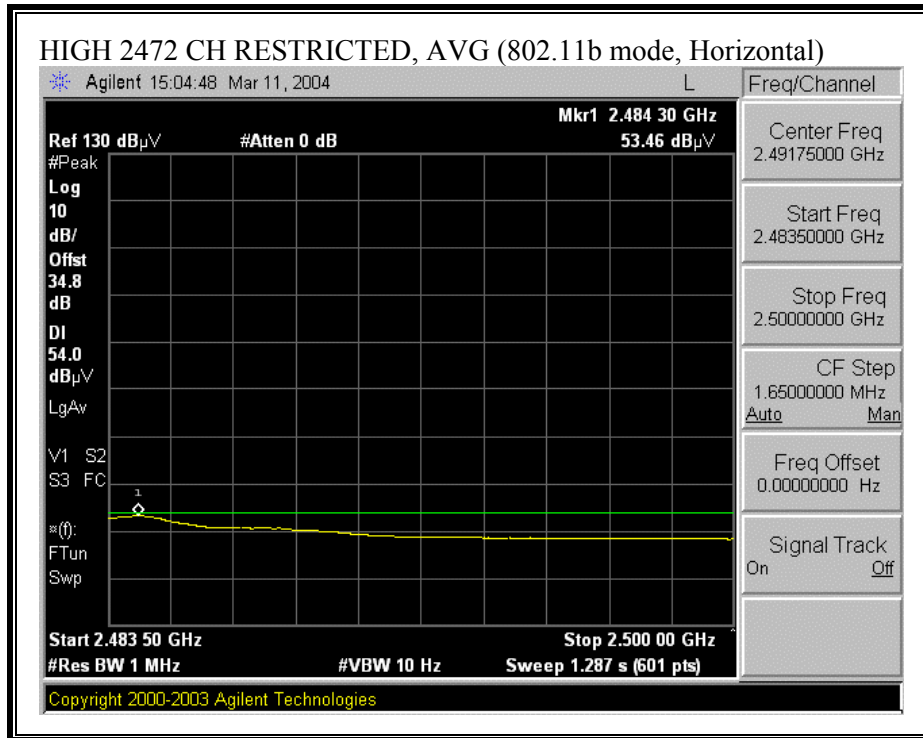



RESTRICTED BANDEGE (b MODE, HIGH CHANNEL, VERTICAL)

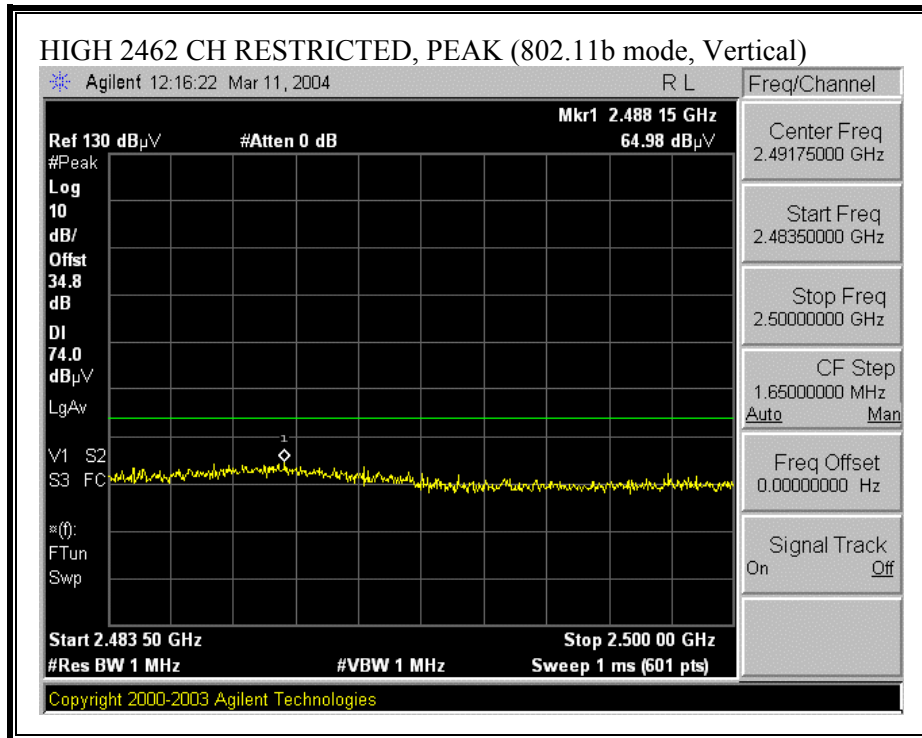


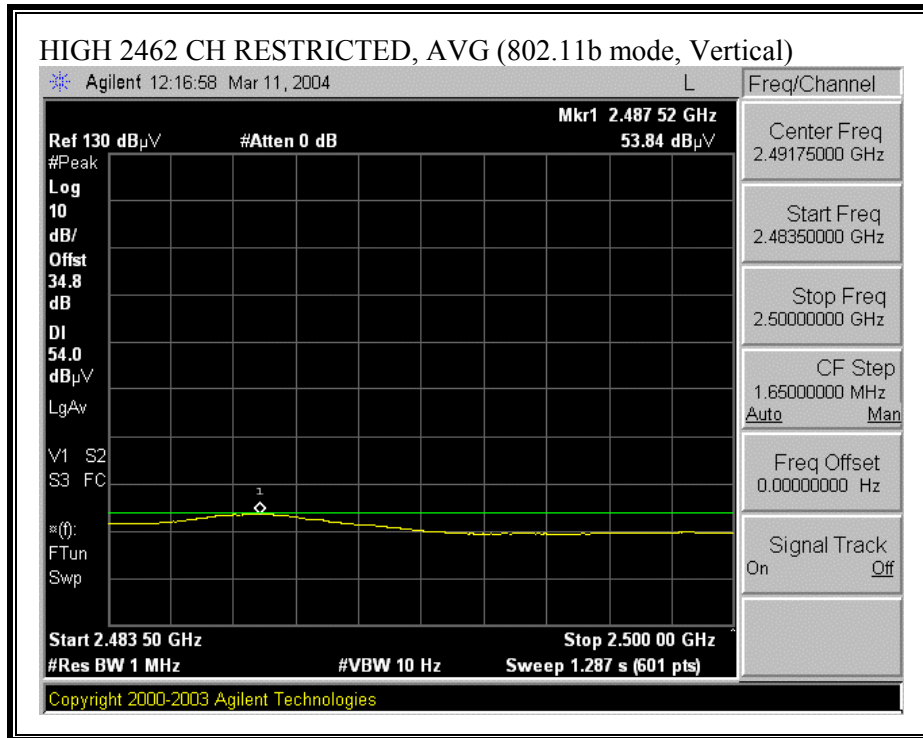

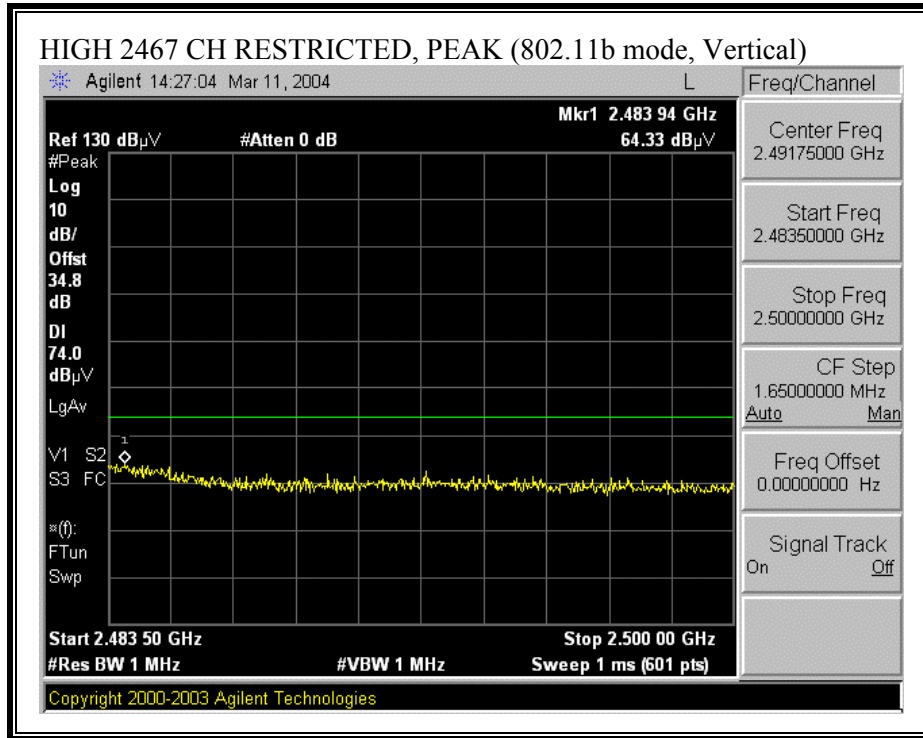

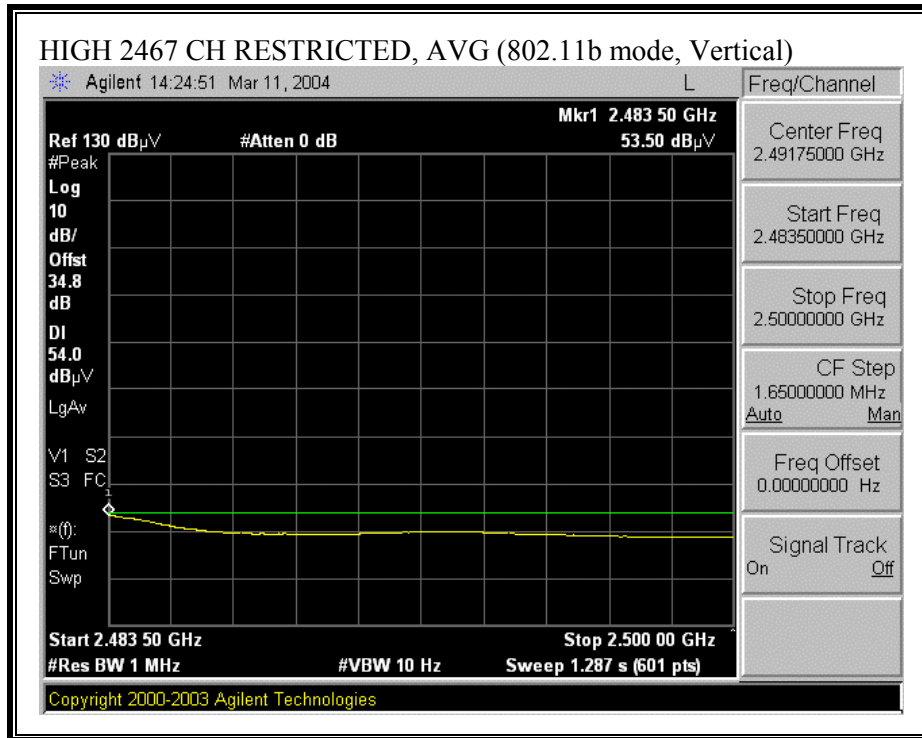

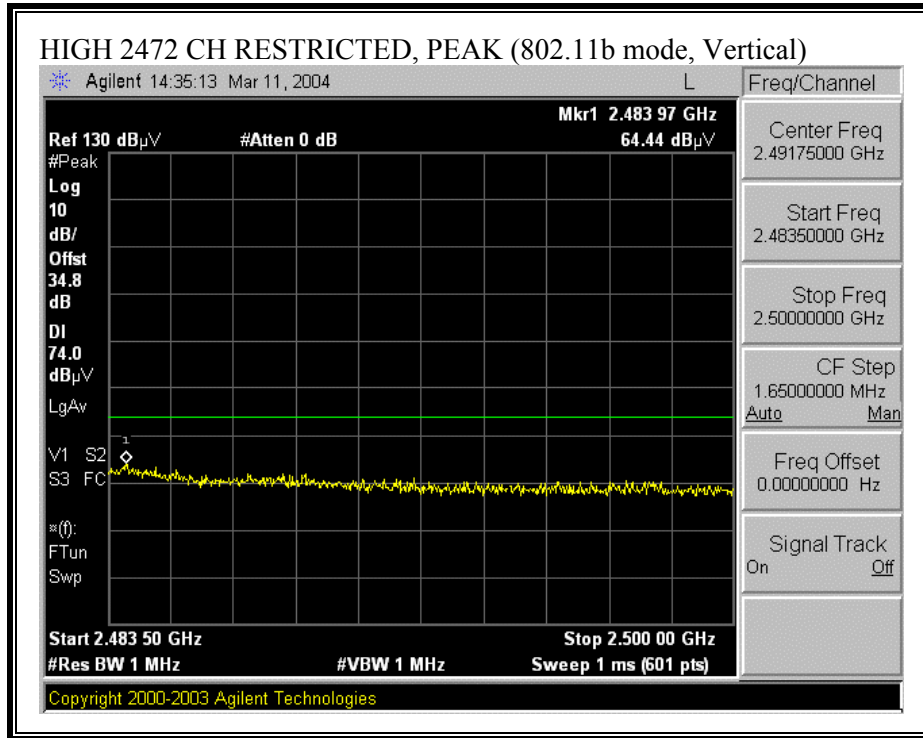


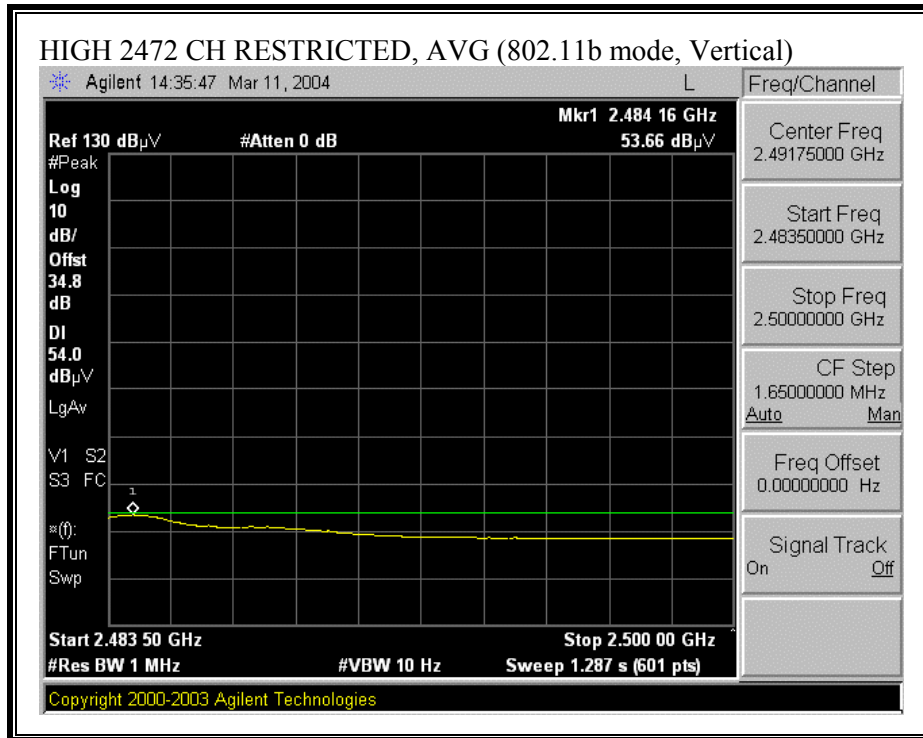


HARMONICS AND SPURIOUS EMISSIONS (b MODE)


03/11/04 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr: Project #: Company: ATHEROS EUT Descr.: WLAN Card EUT M/N: CB51 Test Target: FCC Part 15.247 Mode Oper: Tx b Mode																
Test Equipment:																
EMCO Horn 1-18GHz T119; S/N: 29301 @3m		Spectrum Analyzer HP 8593EM Analyzer			Pre-amplifier 1-26GHz T86 Miteq 924341			Pre-amplifier 26-40GHz			Horn > 18GHz					
Hi Frequency Cables <input type="checkbox"/> (2 ft) <input checked="" type="checkbox"/> (2 ~ 3 ft) <input type="checkbox"/> (4 ~ 6 ft) <input checked="" type="checkbox"/> (12 ft)																
Peak Measurements: 1 MHz Resolution Bandwidth 1MHz Video Bandwidth																
Average Measurements: 1 MHz Resolution Bandwidth 10Hz Video Bandwidth																
f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes	
b Mode Tx low channel 2412MHz																
4.824	9.8	61.4	57.3	35.0	3.2	-45.6	0.0	1.0	54.9	50.8	74.0	54.0	-19.1	-3.2	V	
12.060	9.8	51.2	39.2	39.6	5.3	-45.4	0.0	1.0	51.7	39.7	74.0	54.0	-22.3	-14.3	V	
14.472	9.8	57.5	50.5	39.8	6.0	-47.7	0.0	1.0	56.5	49.6	74.0	54.0	-17.5	-4.4	V	
4.824	9.8	61.3	58.2	35.0	3.2	-45.6	0.0	1.0	54.8	51.7	74.0	54.0	-19.2	-2.3	H	
12.060	9.8	58.2	50.8	39.6	5.3	-45.4	0.0	1.0	58.7	51.3	74.0	54.0	-15.3	-2.7	H	
14.472	9.8	58.8	52.9	39.8	6.0	-47.7	0.0	1.0	57.8	51.9	74.0	54.0	-16.2	-2.1	H	
No more Harmonic emissions was detected above 14.5GHz																
b Mode Tx Mid Channel 2437MHz																
4.874	9.8	59.5	55.0	35.0	3.2	-45.6	0.0	1.0	53.0	48.5	74.0	54.0	-21.0	-5.5	V	
7.311	9.8	57.9	50.8	36.7	4.0	-46.6	0.0	1.0	53.0	45.9	74.0	54.0	-21.0	-8.1	V	
12.184	9.8	53.9	43.5	39.6	5.4	-45.6	0.0	1.0	54.2	43.9	74.0	54.0	-19.8	-10.1	V	
4.872	9.8	56.8	51.6	35.0	3.2	-45.6	0.0	1.0	50.3	45.1	74.0	54.0	-23.7	-8.9	H	
7.311	9.8	55.8	50.3	36.7	4.0	-46.6	0.0	1.0	50.9	45.3	74.0	54.0	-23.1	-8.7	H	
12.184	9.8	54.7	47.8	39.6	5.4	-45.6	0.0	1.0	55.0	48.1	74.0	54.0	-19.0	-5.9	H	
No more harmonic emissions above 13GHz																
b mode Tx High Channel 2462MHz																
4.924	9.8	55.8	49.5	35.0	3.2	-45.7	0.0	1.0	49.4	43.1	74.0	54.0	-24.6	-10.9	H	
7.386	9.8	59.8	52.1	36.7	4.1	-46.5	0.0	1.0	55.0	47.3	74.0	54.0	-19.0	-6.7	H	
12.310	9.8	55.0	46.5	39.6	5.4	-45.7	0.0	1.0	55.2	46.7	74.0	54.0	-18.8	-7.3	H	
4.924	9.8	59.2	54.0	35.0	3.2	-45.7	0.0	1.0	52.8	47.6	74.0	54.0	-21.2	-6.4	V	
7.386	9.8	58.6	52.8	36.7	4.1	-46.5	0.0	1.0	53.8	48.0	74.0	54.0	-20.2	-6.0	V	
12.310	9.8	55.3	45.7	39.6	5.4	-45.7	0.0	1.0	55.5	45.9	74.0	54.0	-18.5	-8.1	V	
No more harmonic emissions above 13GHz																
b mode Tx High Channel 2467MHz																
4.934	9.8	56.9	50.9	35.0	3.2	-45.7	0.0	1.0	50.5	44.4	74.0	54.0	-23.5	-9.6	V	
7.402	9.8	60.7	55.2	36.7	4.1	-46.5	0.0	1.0	55.9	50.3	74.0	54.0	-18.1	-3.7	V	
12.337	9.8	56.2	47.1	39.6	5.4	-45.8	0.0	1.0	56.3	47.3	74.0	54.0	-17.7	-6.7	V	
4.934	9.8	56.2	49.0	35.0	3.2	-45.7	0.0	1.0	49.8	42.6	74.0	54.0	-24.2	-11.4	H	
7.402	9.8	59.3	52.6	36.7	4.1	-46.5	0.0	1.0	54.5	47.7	74.0	54.0	-19.5	-6.3	H	
12.337	9.8	55.5	48.1	39.6	5.4	-45.8	0.0	1.0	55.6	48.2	74.0	54.0	-18.4	-5.8	H	
No more harmonic emissions above 13GHz																
b mode Tx High Channel 2472MHz																
4.944	9.8	52.7	40.6	35.1	3.2	-45.7	0.0	1.0	46.3	34.1	74.0	54.0	-27.7	-19.9	Noise Floor	
4.944	9.8	50.1	40.0	35.1	3.2	-45.7	0.0	1.0	43.7	33.5	74.0	54.0	-30.3	-20.5	V/Noise floor	
No harmonic emissions was detected above 2nd harmonic.																
Spurious emissions																
1.001	9.8			28.6	1.2	-44.3	0.0	1.0			74.0	54.0			H	
1.041	9.8			28.6	1.2	-44.3	0.0	1.0			74.0	54.0			H	
1.051	9.8			28.6	1.2	-44.3	0.0	1.0			74.0	54.0			H	
1.089	9.8			28.7	1.3	-44.3	0.0	1.0			74.0	54.0			H	
1.001	9.8			28.6	1.2	-44.3	0.0	1.0			74.0	54.0			H	
1.041	9.8			28.6	1.2	-44.3	0.0	1.0			74.0	54.0			H	


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

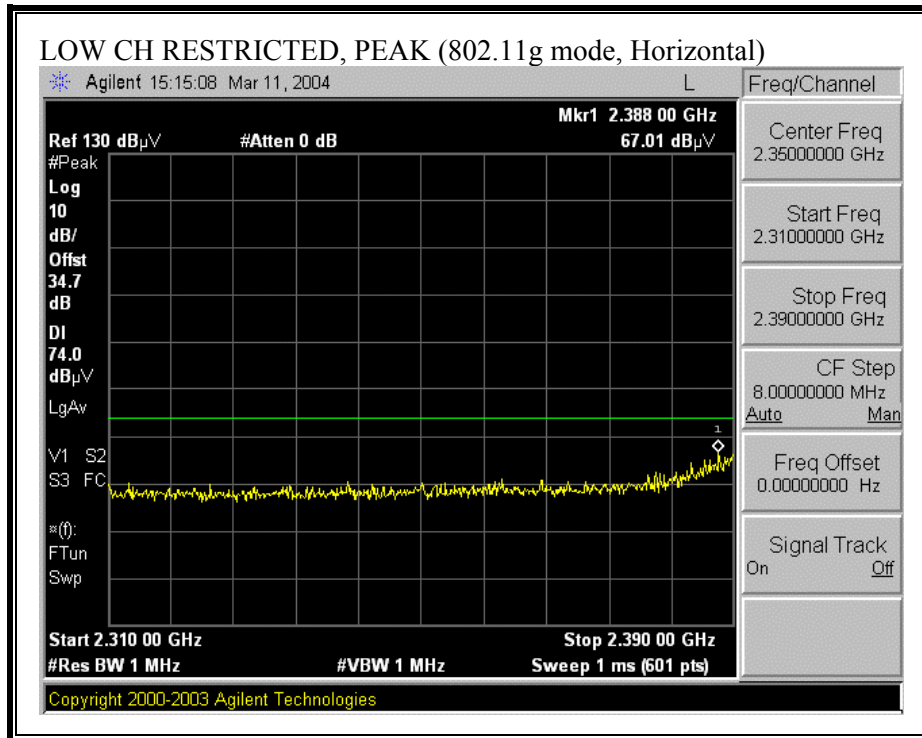

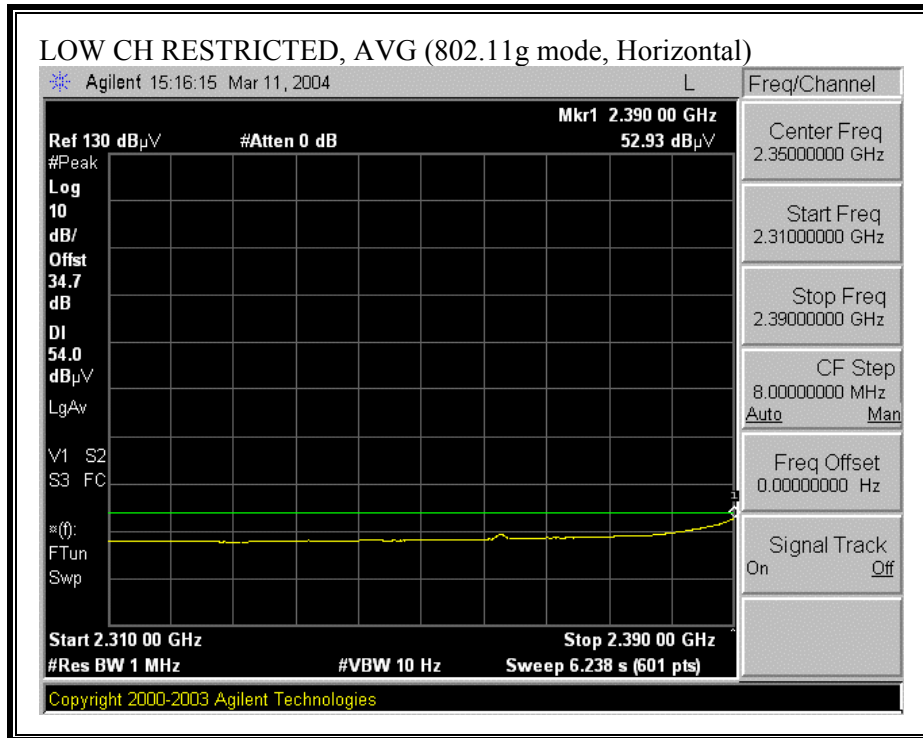



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

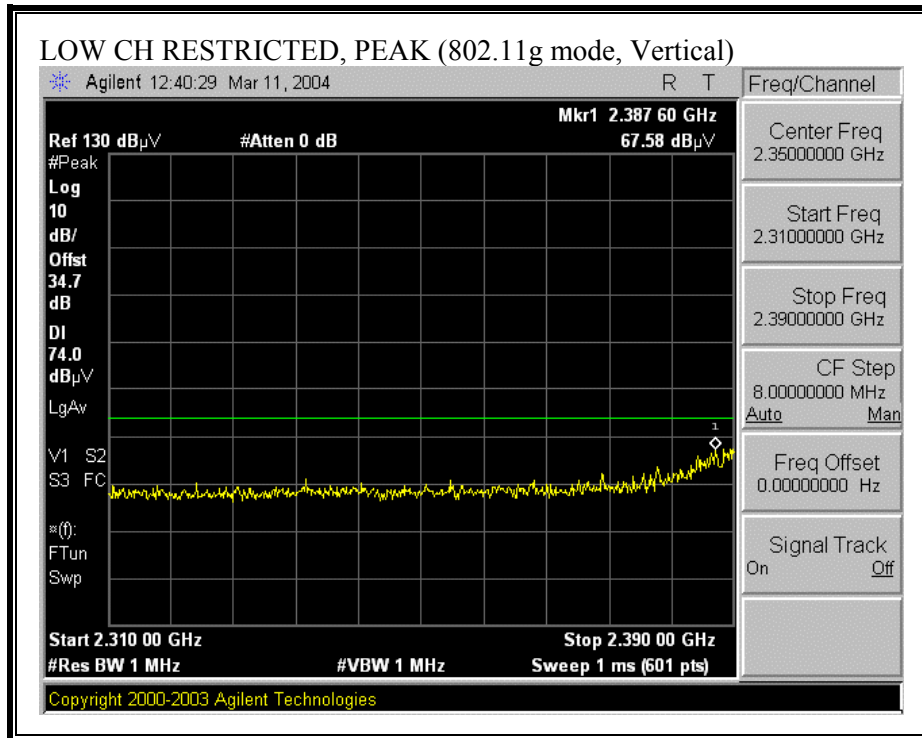


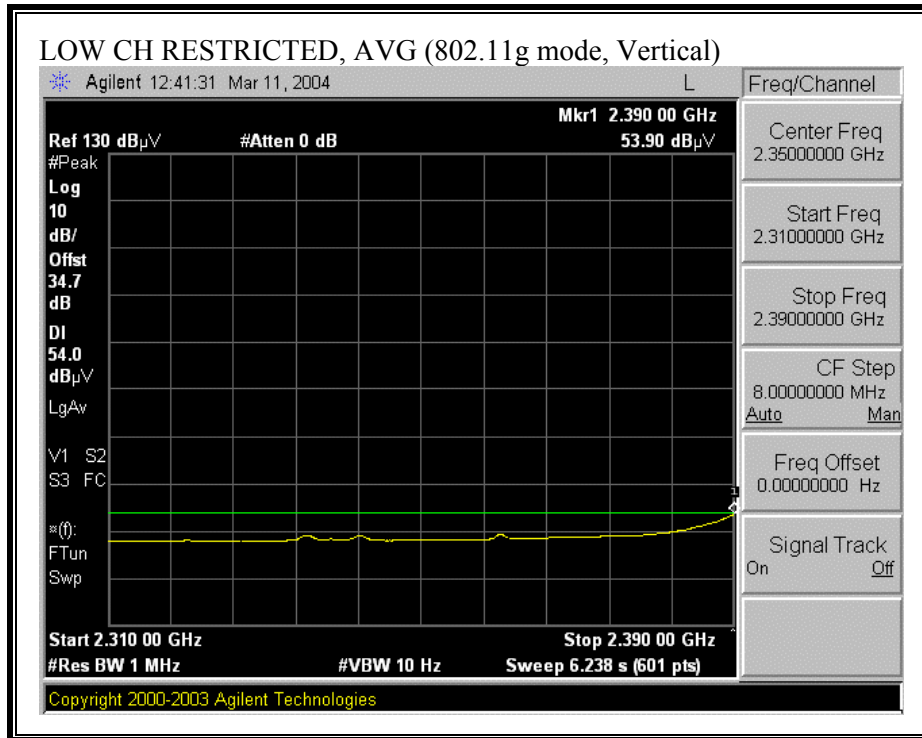



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

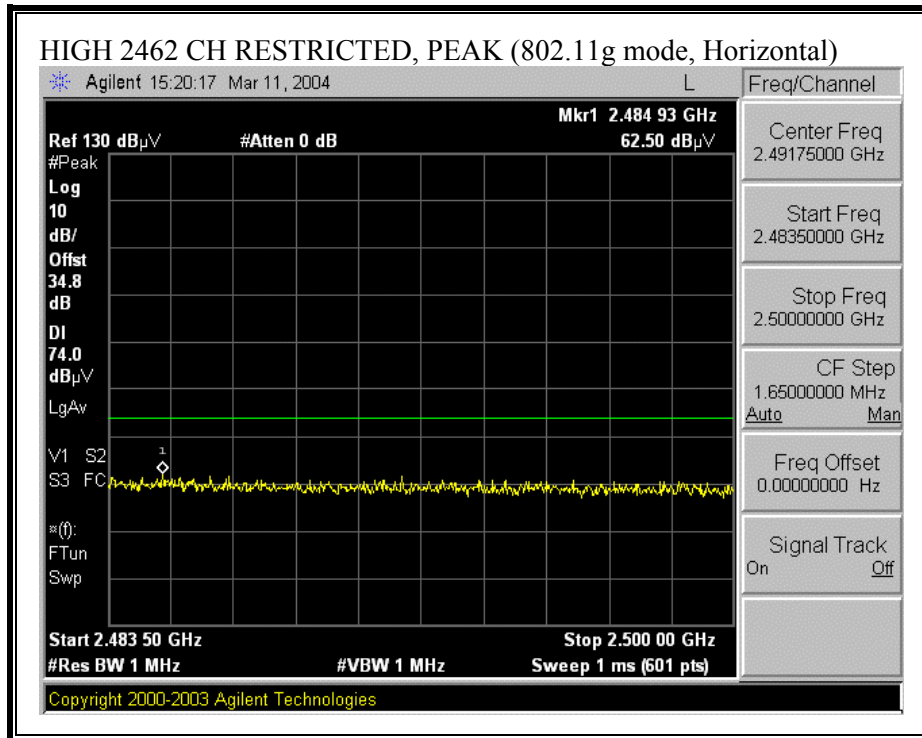


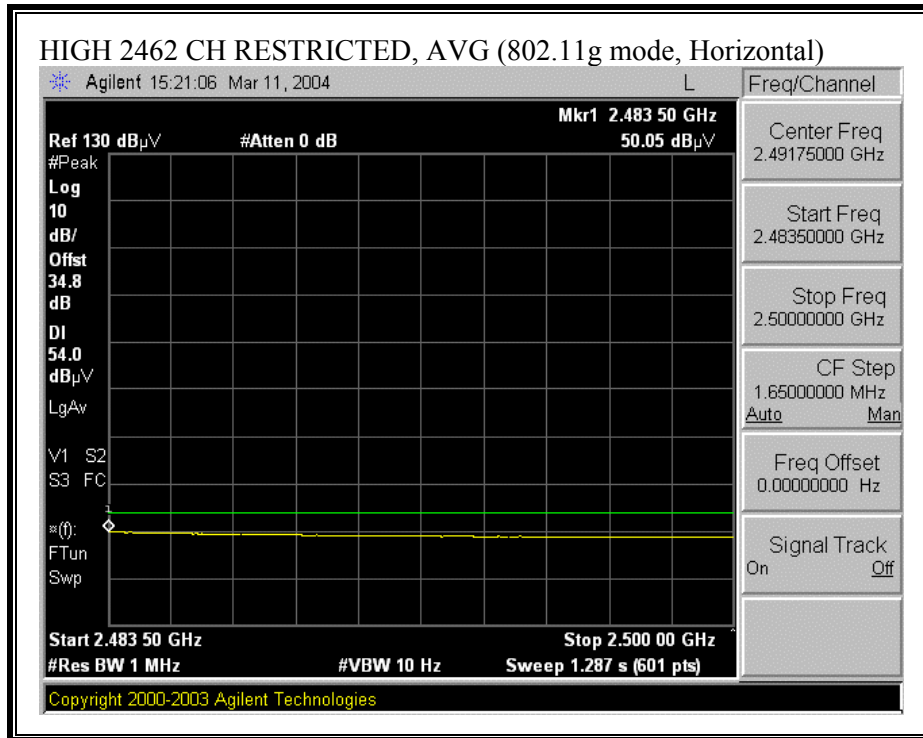

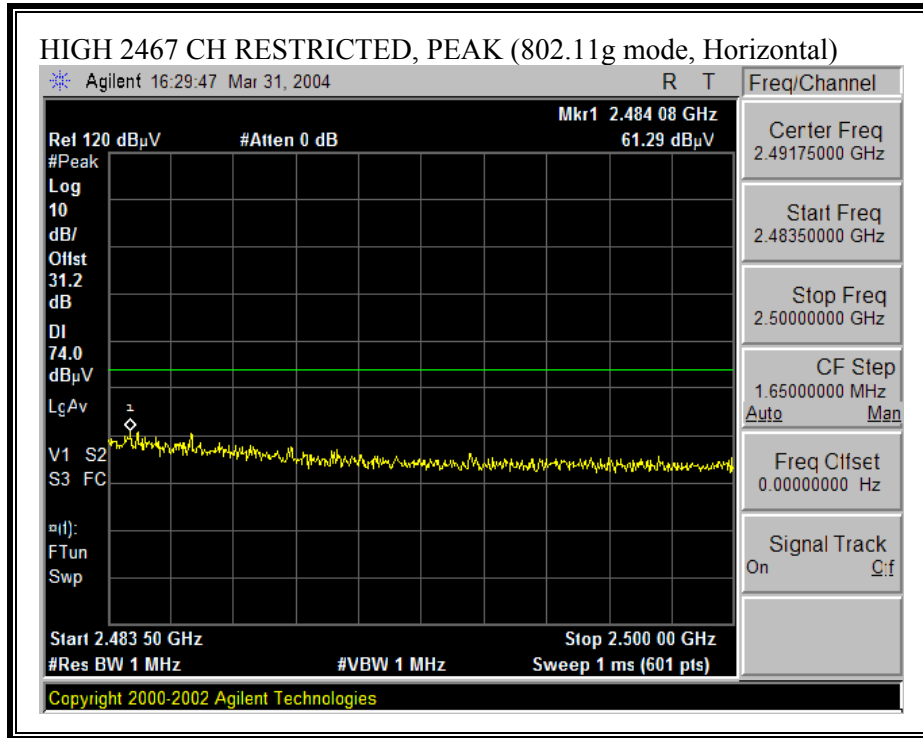


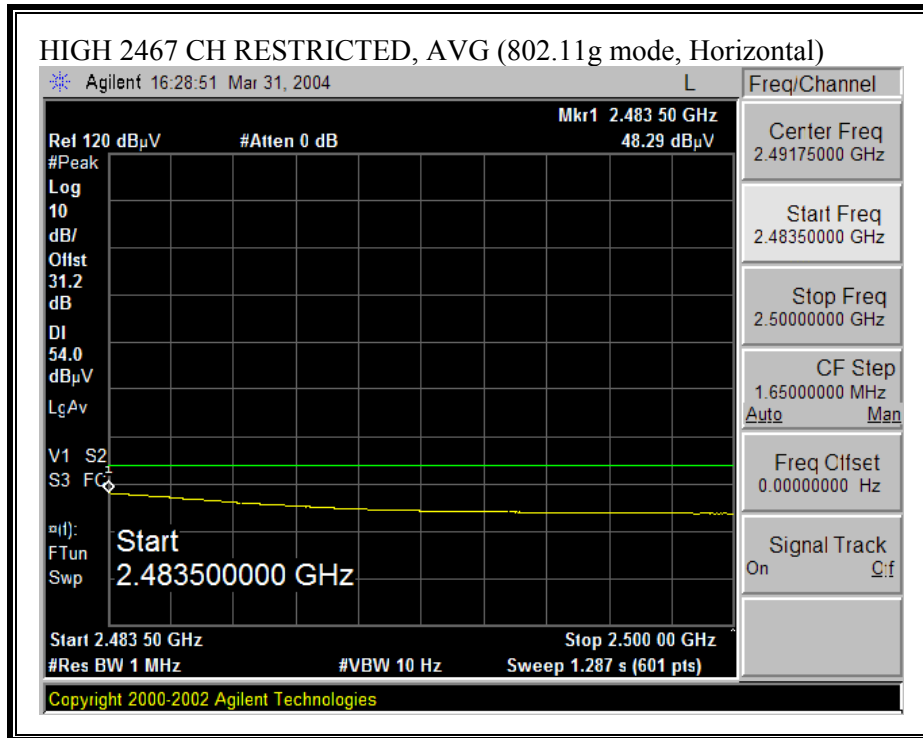


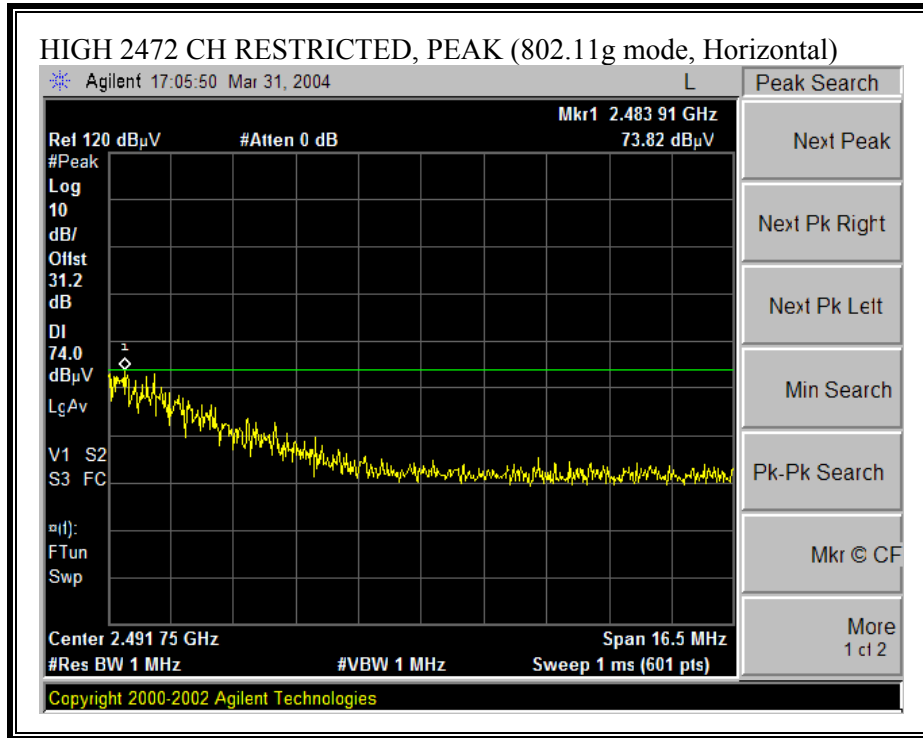


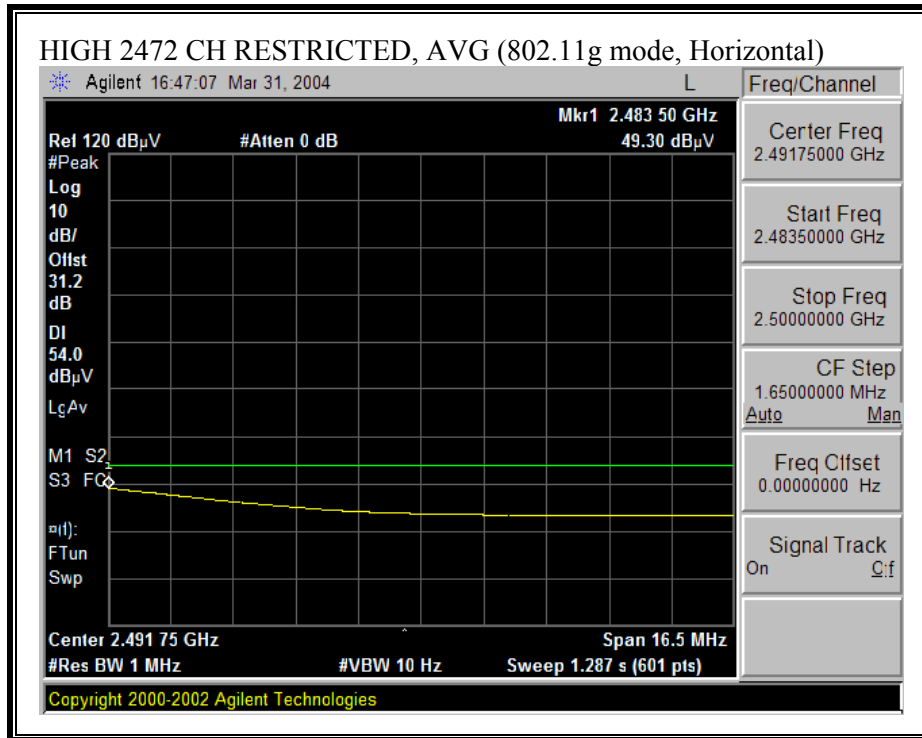



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

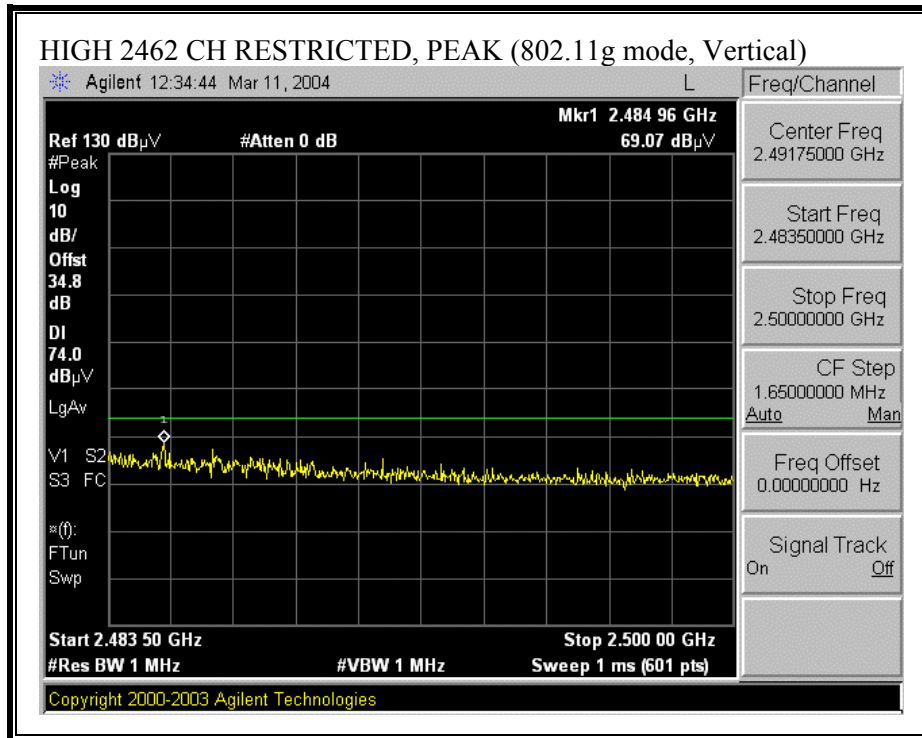

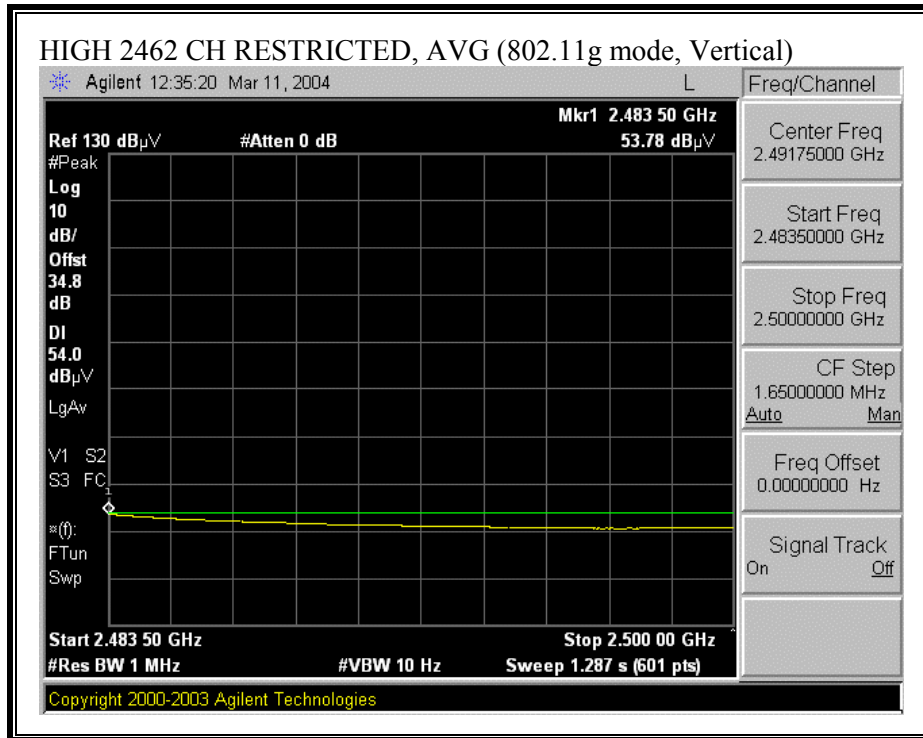

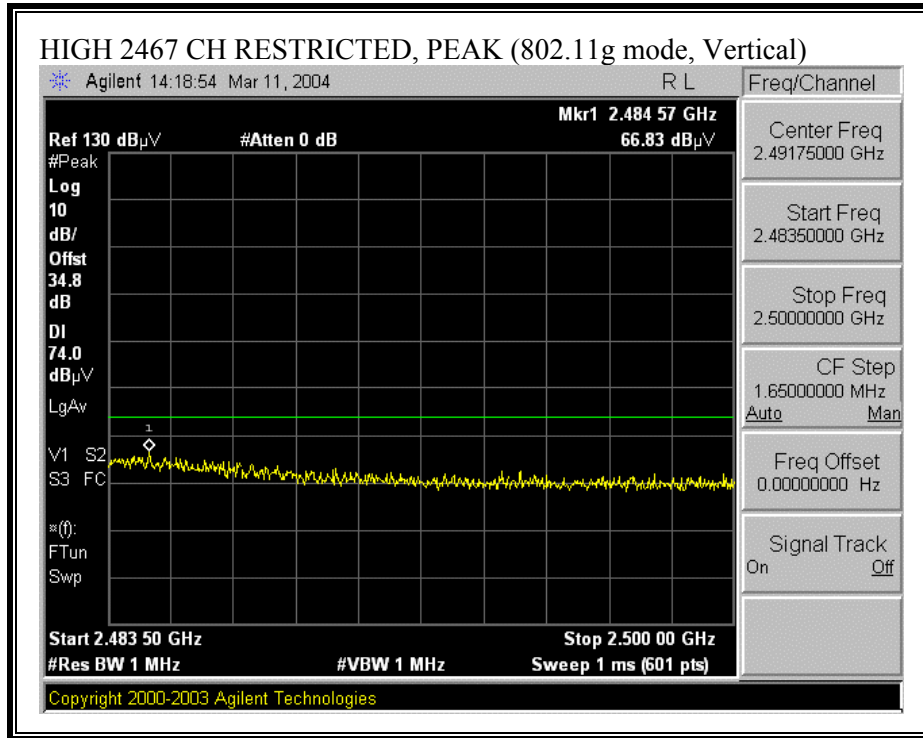

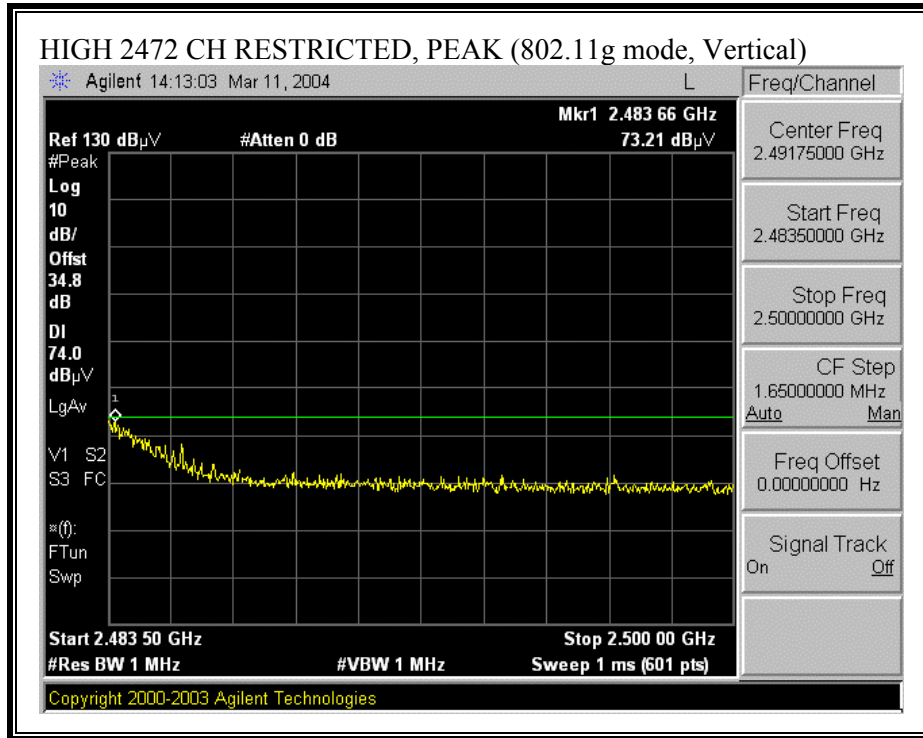

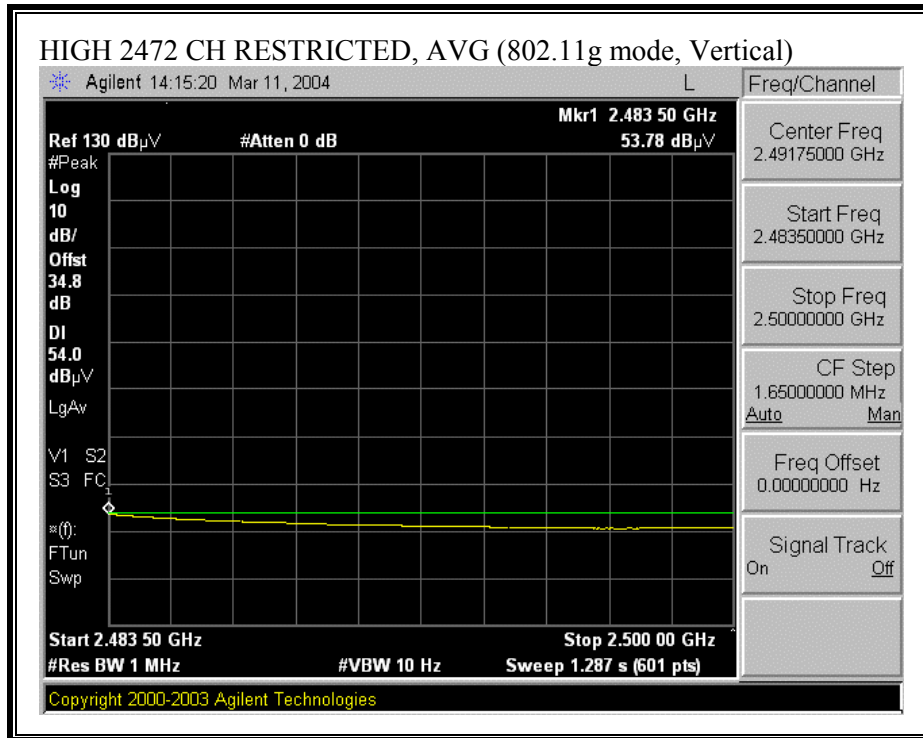

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

03/15/04 High Frequency Measurement
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Thanh Nguyen
 Project #: 04U2587
 Company: ATHEROS
 EUT Descr.: WLAN Card
 EUT M/N: CB51
 Test Target: FCC Part 15.247
 Mode Oper: Tx g Mode

Test Equipment:

EMCO Horn 1-18GHz | Spectrum Analyzer | Pre-amplifier 1-26GHz | Pre-amplifier 26-40GHz | Horn > 18GHz

T120; S/N: 29310 @3m | Agilent E4446A Analyzer | T86 Miteq 924341

Hi Frequency Cables: (2 ft) (2 ~ 3 ft) (4 ~ 6 ft) (12 ft)

Peak Measurements: 1 MHz Resolution Bandwidth, 1MHz Video Bandwidth
Average Measurements: 1 MHz Resolution Bandwidth, 10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dBm	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
g Mode Tx low channel 2412MHz															
4.824	9.8	62.4	48.2	34.5	3.2	-45.6	0.0	1.0	55.5	41.3	74.0	54.0	-18.5	-12.7	V
12.060	9.8	51.2	39.2	39.6	5.3	-45.4	0.0	1.0	51.7	39.7	74.0	54.0	-22.3	-14.3	Noise Floor
4.824	9.8	58.9	42.5	34.5	3.2	-45.6	0.0	1.0	52.0	35.6	74.0	54.0	-22.0	-18.4	H
12.060	9.8	53.6	40.4	39.6	5.3	-45.4	0.0	1.0	54.1	40.9	74.0	54.0	-19.9	-13.1	Noise Floor
No more Harmonic emissions was detected above 12GHz															
g Mode Tx Mid Channel 2437MHz															
4.874	9.8	53.0	40.7	34.6	3.2	-45.6	0.0	1.0	46.1	33.8	74.0	54.0	-27.9	-20.2	V
7.311	9.8	57.3	44.6	36.5	4.0	-46.6	0.0	1.0	52.2	39.5	74.0	54.0	-21.8	-14.5	V
12.184	9.8	52.3	39.9	39.6	5.4	-45.6	0.0	1.0	52.7	40.3	74.0	54.0	-21.3	-13.7	Noise Floor
4.872	9.8	54.1	41.3	34.6	3.2	-45.6	0.0	1.0	47.2	34.4	74.0	54.0	-26.8	-19.6	H
7.311	9.8	60.6	46.8	36.5	4.0	-46.6	0.0	1.0	55.5	41.8	74.0	54.0	-18.5	-12.2	H
12.184	9.8	53.9	40.8	39.6	5.4	-45.6	0.0	1.0	54.2	41.2	74.0	54.0	-19.8	-12.8	Noise Floor
No more harmonic emissions above 8GHz															
g mode Tx High Channel 2462MHz															
4.924	9.8	53.3	40.7	34.6	3.2	-45.7	0.0	1.0	46.5	33.8	74.0	54.0	-27.5	-20.2	V
7.386	9.8	63.7	48.8	36.5	4.1	-46.5	0.0	1.0	58.7	43.9	74.0	54.0	-15.3	-10.1	V
12.310	9.8	50.6	40.3	39.6	5.4	-45.7	0.0	1.0	50.8	40.5	74.0	54.0	-23.2	-13.5	Noise Floor
4.924	9.8	52.2	40.5	34.6	3.2	-45.7	0.0	1.0	45.3	33.6	74.0	54.0	-28.7	-20.4	Noise Floor
7.386	9.8	58.6	47.3	36.5	4.1	-46.5	0.0	1.0	53.6	42.3	74.0	54.0	-20.4	-11.7	H
12.310	9.8	55.3	42.0	39.6	5.4	-45.7	0.0	1.0	55.5	42.2	74.0	54.0	-18.5	-11.8	H
No more harmonic emissions above 13GHz															
g mode Tx High Channel 2467MHz															
4.934	9.8	48.6	39.4	34.6	3.2	-45.7	0.0	1.0	41.7	32.5	74.0	54.0	-32.3	-21.5	Noise Floor
7.402	9.8	60.9	46.8	36.5	4.1	-46.5	0.0	1.0	56.0	41.9	74.0	54.0	-18.0	-12.1	V
12.337	9.8	55.2	39.5	39.6	5.4	-45.8	0.0	1.0	55.4	39.7	74.0	54.0	-18.6	-14.3	Noise Floor
4.934	9.8	53.0	39.9	34.6	3.2	-45.7	0.0	1.0	46.1	33.1	74.0	54.0	-27.9	-20.9	H
7.402	9.8	57.8	43.3	36.5	4.1	-46.5	0.0	1.0	52.8	38.3	74.0	54.0	-21.2	-15.7	H
12.337	9.8	50.4	40.7	39.6	5.4	-45.8	0.0	1.0	50.6	40.9	74.0	54.0	-23.4	-13.1	Noise Floor
No more harmonic emissions above 8GHz															
g mode Tx High Channel 2472MHz															
4.944	9.8	51.2	39.0	34.6	3.2	-45.7	0.0	1.0	44.4	32.2	74.0	54.0	-29.6	-21.8	Noise Floor
No harmonic emissions was detected above 2nd harmonic.															
Spurious emissions															
1.001	9.8			28.8	1.2	-44.3	0.0	1.0			74.0	54.0			H
1.041	9.8			28.8	1.2	-44.3	0.0	1.0			74.0	54.0			H
1.051	9.8			28.8	1.2	-44.3	0.0	1.0			74.0	54.0			H
1.089	9.8			28.8	1.3	-44.3	0.0	1.0			74.0	54.0			H
1.001	9.8			28.8	1.2	-44.3	0.0	1.0			74.0	54.0			H
1.041	9.8			28.8	1.2	-44.3	0.0	1.0			74.0	54.0			H

HARMONICS AND SPURIOUS EMISSIONS (g TURBO MODE)

03/15/04 High Frequency Measurement
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Thanh Nguyen
 Project #: 04U2587
 Company: ATHEROS
 EUT Descr.: WLAN Card
 EUT M/N: CB51
 Test Target: FCC Part 15.247
 Mode Oper: Tx g Mode

Test Equipment:

EMCO Horn 1-18GHz Spectrum Analyzer Pre-amplifier 1-26GHz Pre-amplifier 26-40GHz Horn > 18GHz

T120; S/N: 29310 @3m Agilent E4446A Analyzer T86 Miteq 924341

Hi Frequency Cables: (2 ft) (2 ~ 3 ft) (4 ~ 6 ft) (12 ft)


Peak Measurements:
 1 MHz Resolution Bandwidth
 1MHz Video Bandwidth

Average Measurements:
 1 MHz Resolution Bandwidth
 10Hz Video Bandwidth

f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
g Turbo Mode Tx Mid Channel 2437MHz															
4.874	9.8	56.6	44.2	34.6	3.2	-45.6	0.0	1.0	49.8	37.3	74.0	54.0	-24.2	-16.7	V
7.311	9.8	60.6	48.4	36.5	4.0	-46.6	0.0	1.0	55.6	43.4	74.0	54.0	-18.4	-10.6	V
12.185	9.8	52.3	39.9	39.6	5.4	-45.6	0.0	1.0	52.7	40.3	74.0	54.0	-21.3	-13.7	Noise Floor
4.874	9.8	54.2	40.5	34.6	3.2	-45.6	0.0	1.0	47.3	33.7	74.0	54.0	-26.7	-20.3	H
7.311	9.8	57.9	47.7	36.5	4.0	-46.6	0.0	1.0	52.8	42.7	74.0	54.0	-21.2	-11.3	H
12.185	9.8	57.8	46.2	39.6	5.4	-45.6	0.0	1.0	58.1	46.5	74.0	54.0	-15.9	-7.5	H
No Harmonic emission was detected above 5th harmonic.															
Spurious emissions															
1.001	9.8			28.8	1.2	-44.3	0.0	1.0			74.0	54.0			H
1.041	9.8			28.8	1.2	-44.3	0.0	1.0			74.0	54.0			H
1.051	9.8			28.8	1.2	-44.3	0.0	1.0			74.0	54.0			H
1.089	9.8			28.8	1.3	-44.3	0.0	1.0			74.0	54.0			H
1.001	9.8			28.8	1.2	-44.3	0.0	1.0			74.0	54.0			H
1.041	9.8			28.8	1.2	-44.3	0.0	1.0			74.0	54.0			H

7.9.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

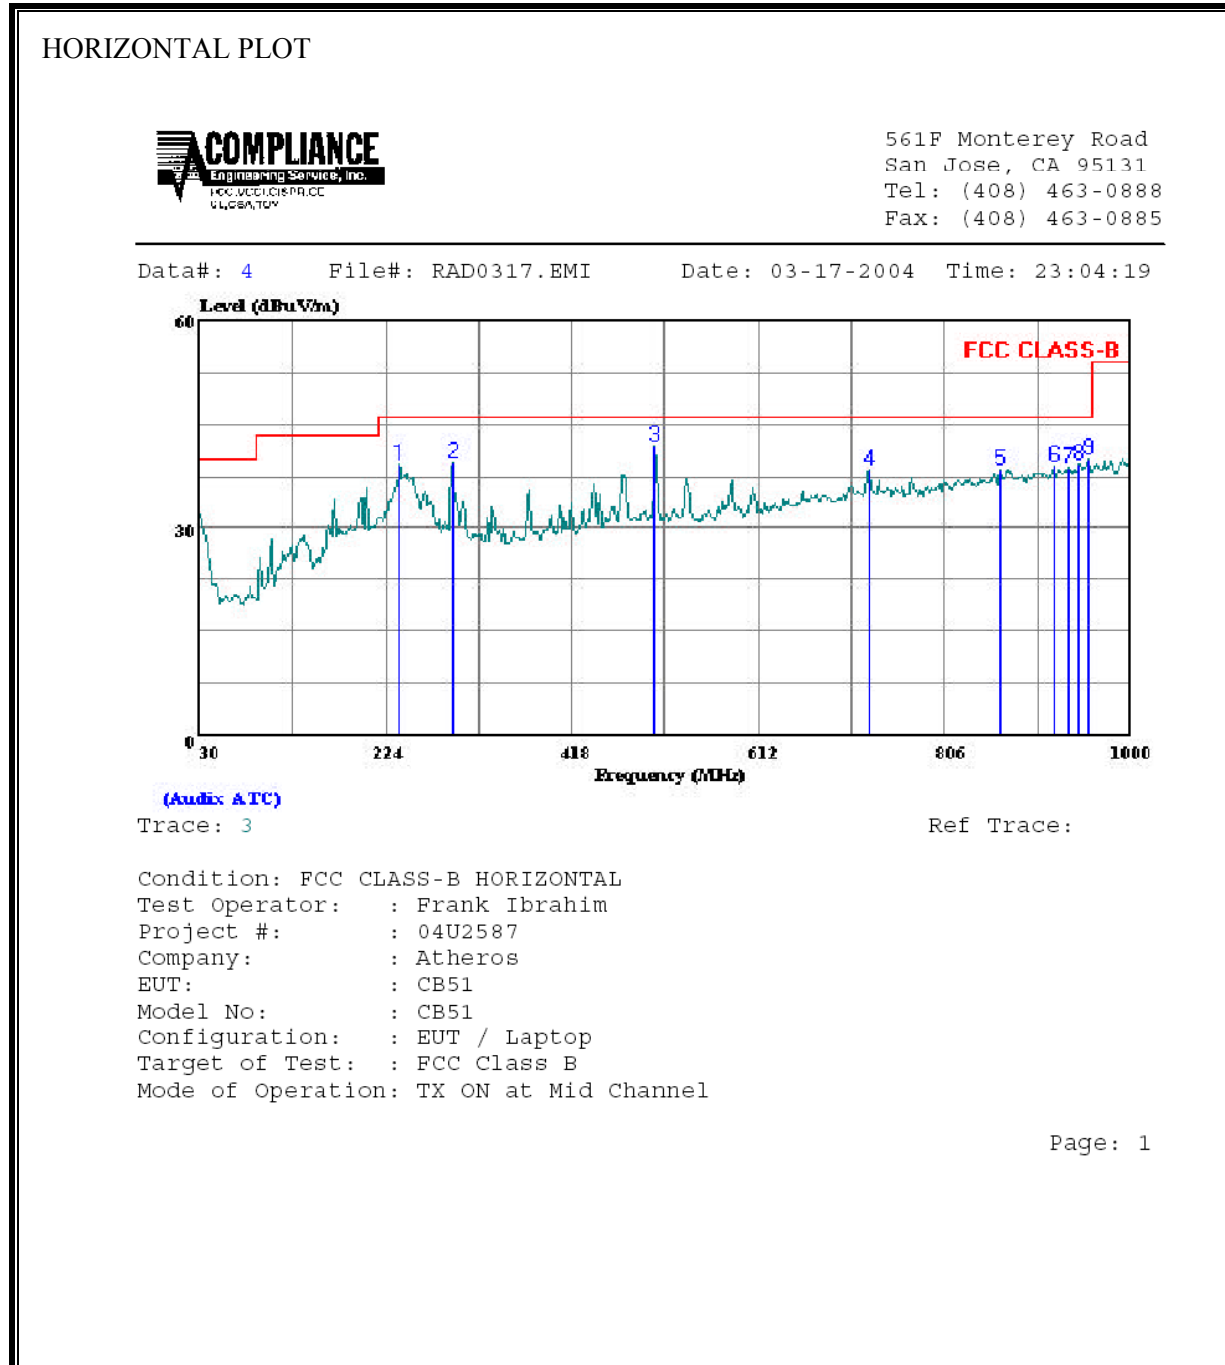

HORIZONTAL DATA

	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	237.580	Peak	25.76	13.57	39.33	46.00	-6.67
2	293.840	Peak	23.61	15.80	39.41	46.00	-6.59
3	504.330	Peak	21.22	20.67	41.89	46.00	-4.11
4	727.430	Peak	14.32	24.22	38.54	46.00	-7.46
5	863.230	Peak	12.97	25.56	38.53	46.00	-7.47
6	919.490	Peak	12.18	26.65	38.84	46.00	-7.17
7	934.040	Peak	11.90	26.81	38.71	46.00	-7.29
8	945.680	Peak	12.44	26.85	39.29	46.00	-6.71
9	955.380	Peak	13.03	26.95	39.98	46.00	-6.02

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

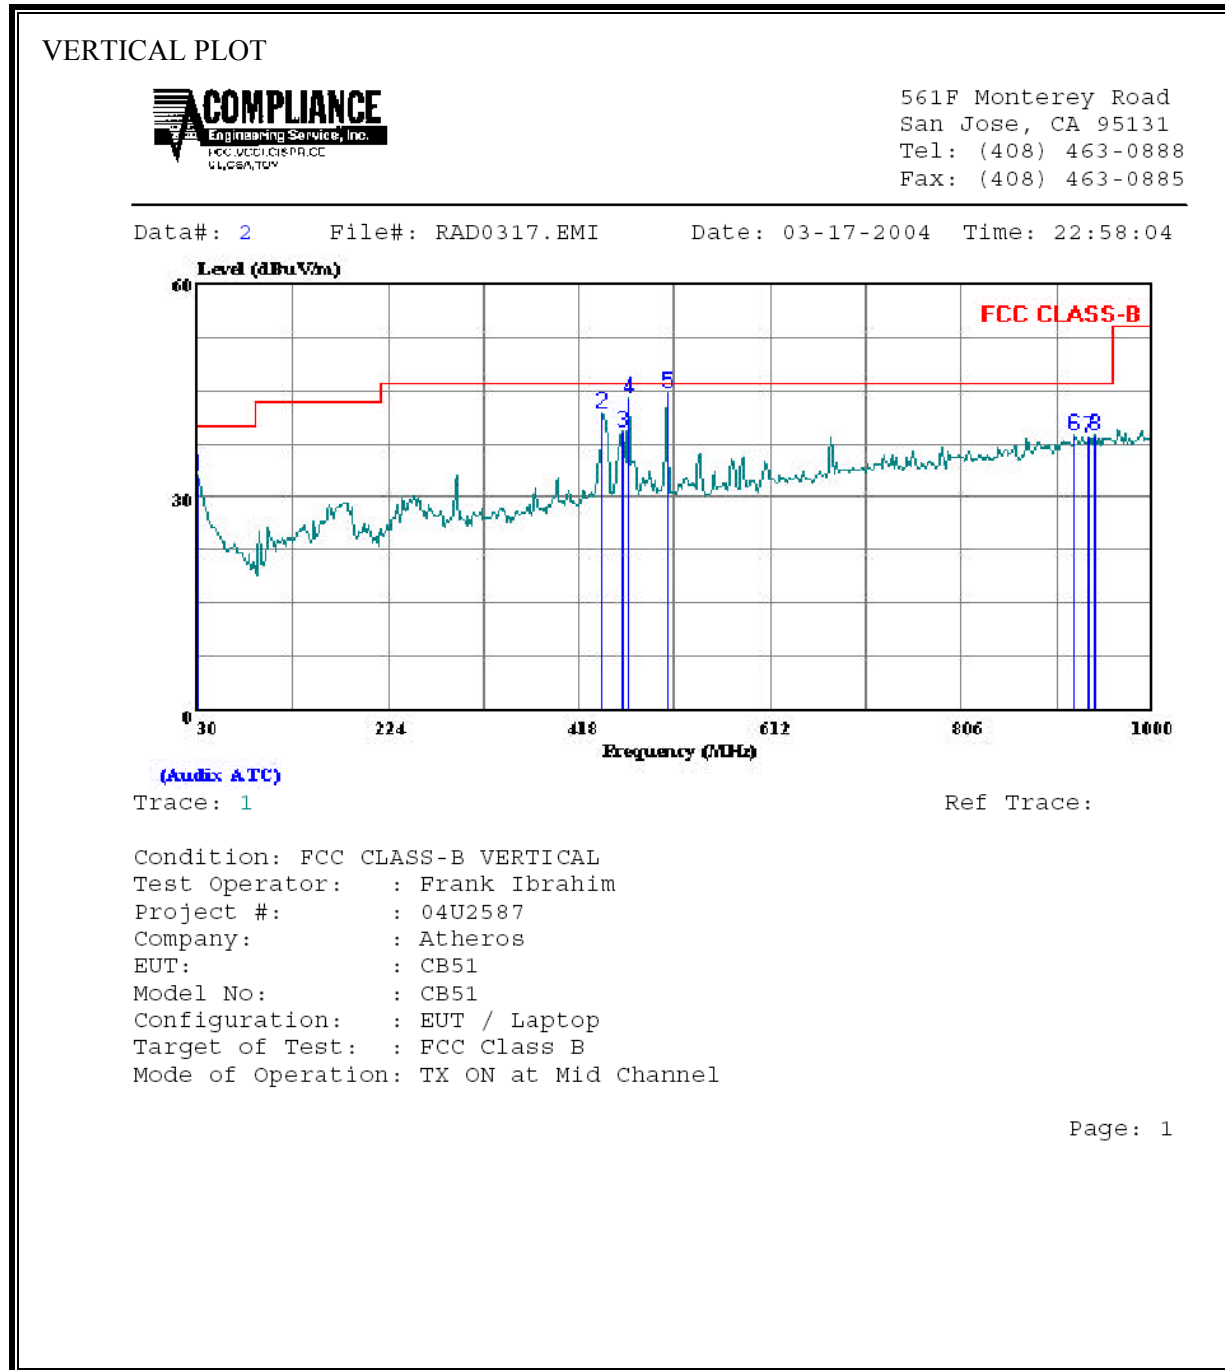

VERTICAL DATA

	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	30.970	Peak	10.11	22.95	33.06	40.00	-6.95
2	441.280	Peak	22.67	19.24	41.91	46.00	-4.09
3	460.680	Peak	19.53	19.71	39.24	46.00	-6.76
4	468.440	Peak	24.04	19.88	43.92	46.00	-2.08
5	507.240	Peak	24.10	20.70	44.80	46.00	-1.20
6	921.430	Peak	11.88	26.73	38.61	46.00	-7.39
7	935.980	Peak	11.72	26.83	38.55	46.00	-7.45
8	940.830	Peak	11.92	26.83	38.75	46.00	-7.25

7.10. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance PROCEDURE


The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution noted:


6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.16	51.77	--	29.50	0.00	65.69	55.69	-13.92	-26.19	L1
0.21	52.88	--	36.09	0.00	64.43	54.43	-11.55	-18.34	L1
14.36	35.18	--	29.10	0.00	60.00	50.00	-24.82	-20.90	L1
0.16	53.44	--	31.70	0.00	65.60	55.60	-12.16	-23.90	L2
0.21	53.12	--	36.05	0.00	64.43	54.43	-11.31	-18.38	L2
14.36	35.28	--	27.14	0.00	60.00	50.00	-24.72	-22.86	L2
6 Worst Data									

LINE 1 RESULTS

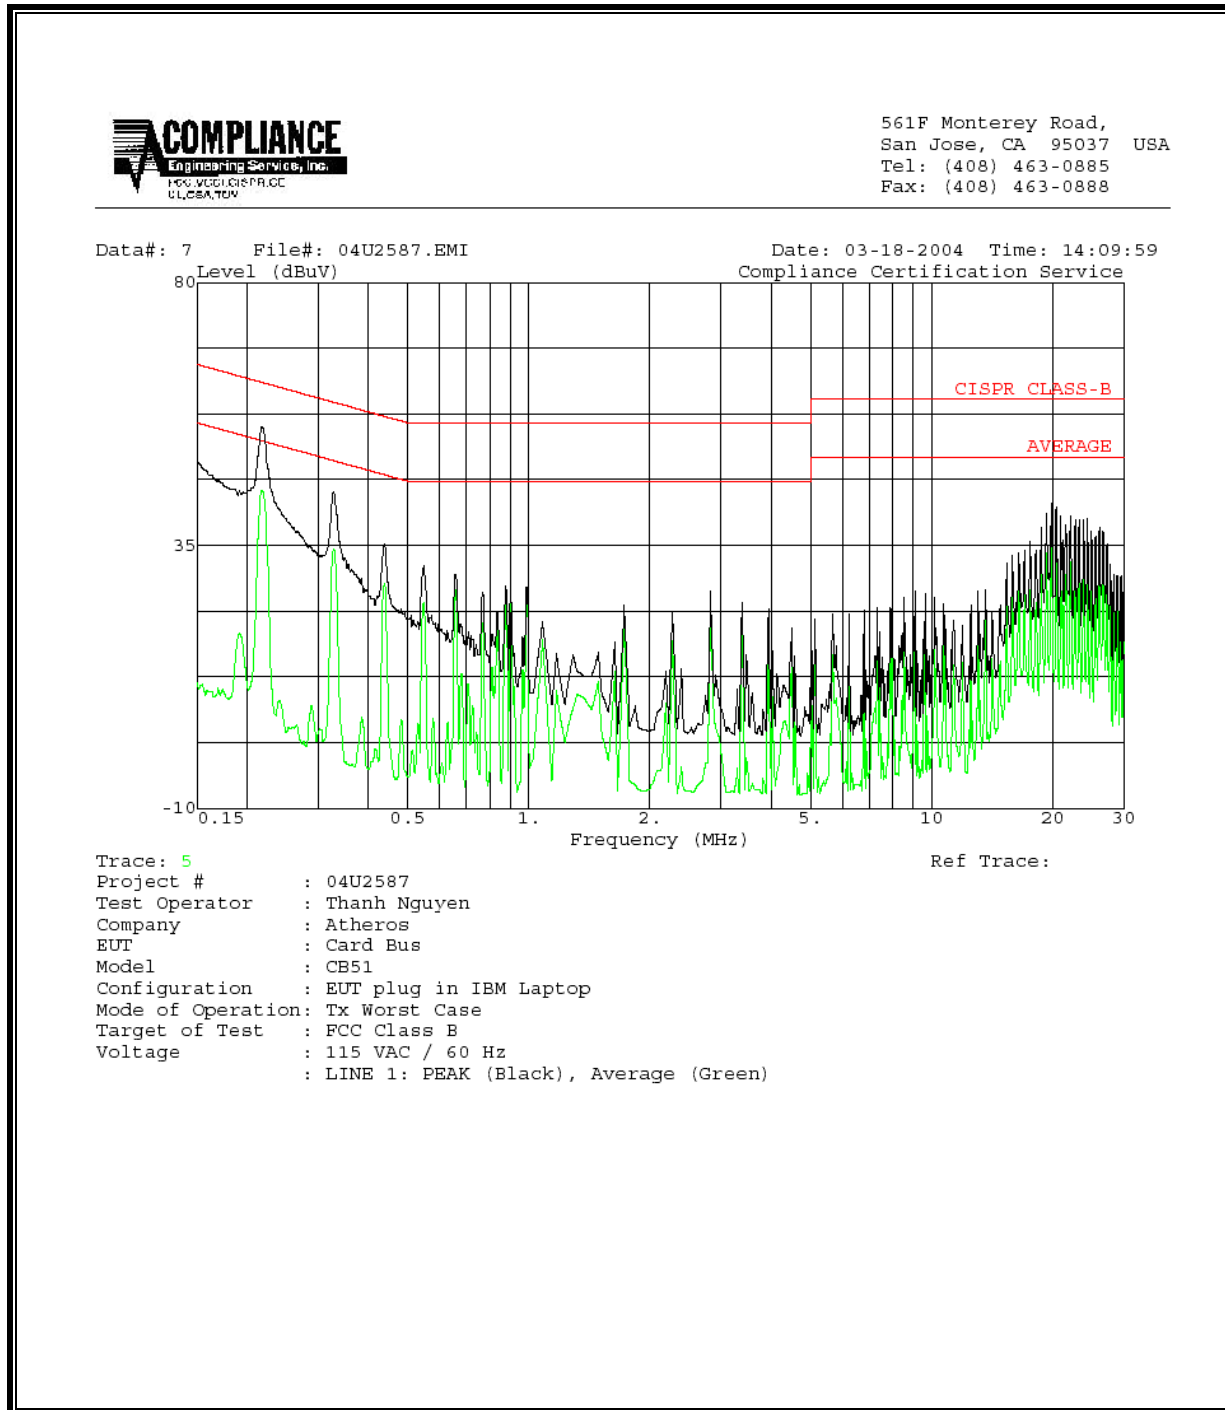


LINE 2 RESULTS

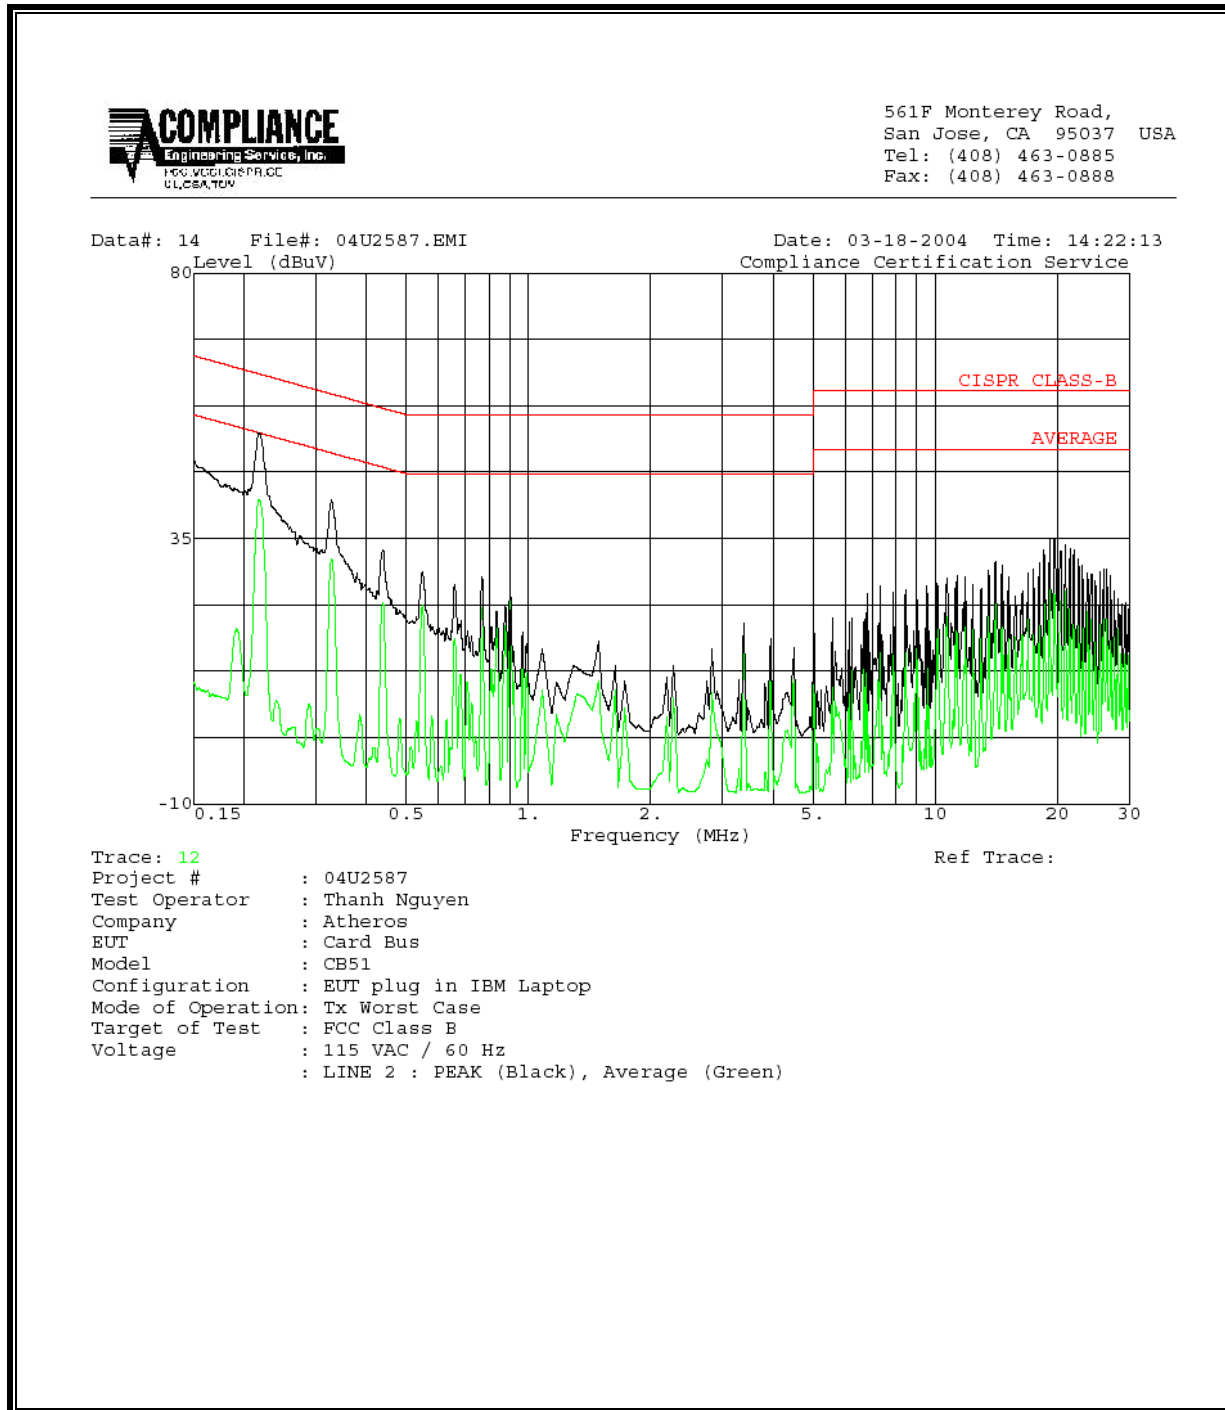



8. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

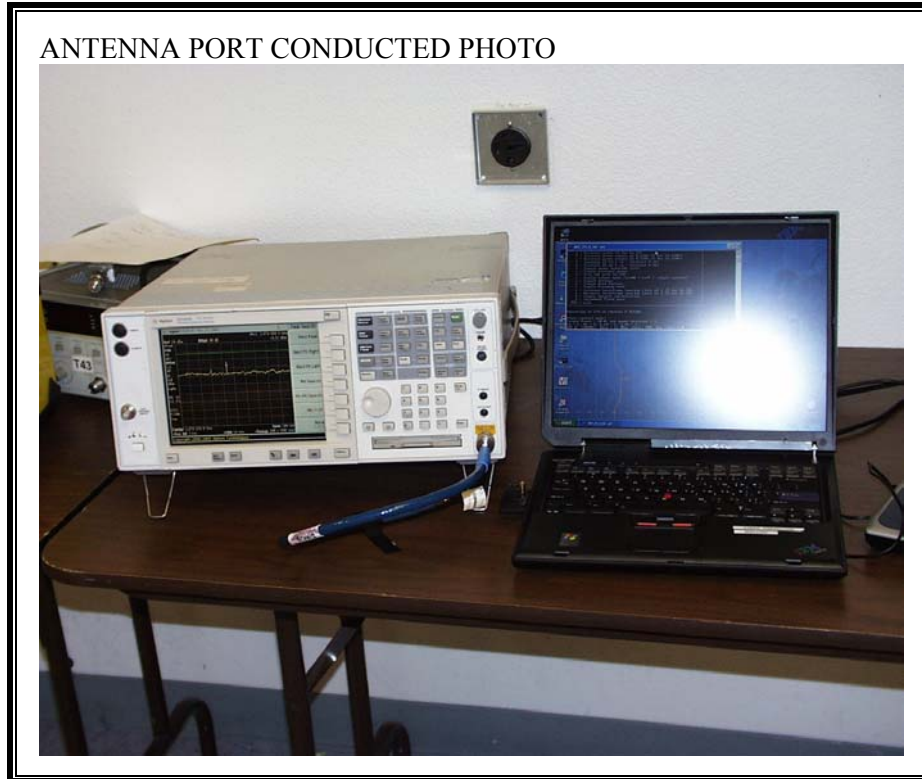

RADIATED RF MEASUREMENT SETUP

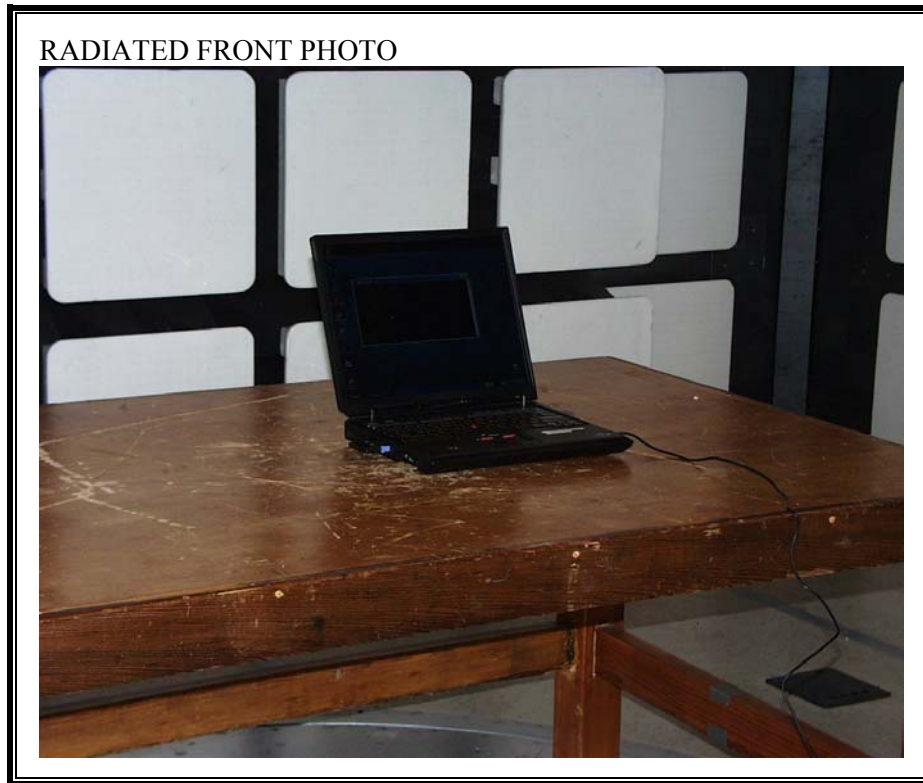

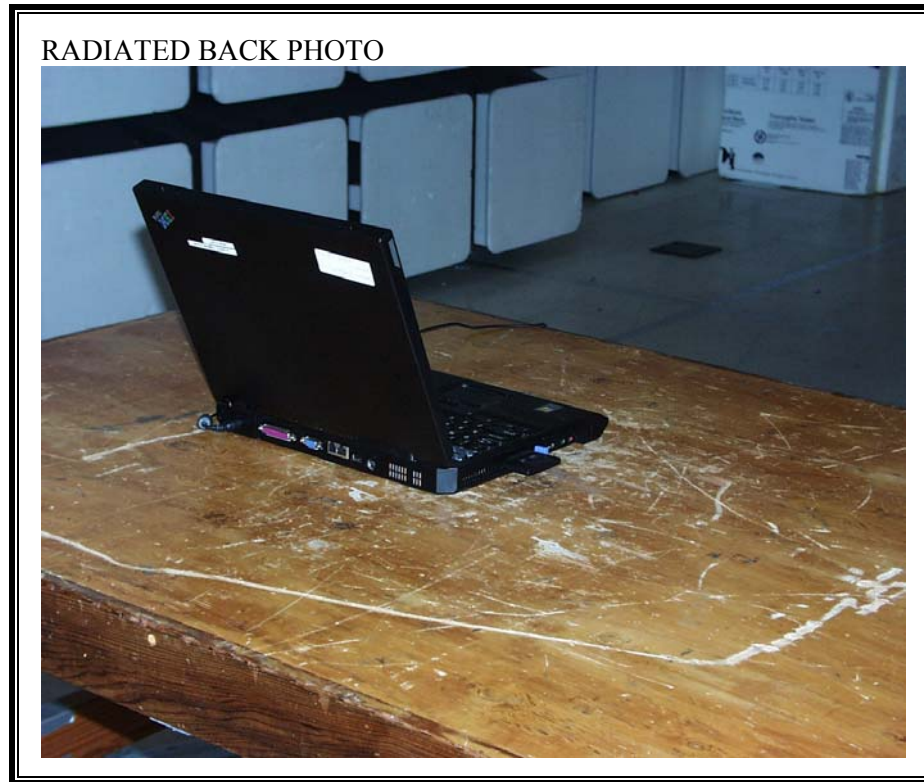

POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP

